libstdc++

Generated by Doxygen 1.8.6

Tue Nov 24 2020 03:13:01

Contents

1 Todo List 1

2 Module Documentation 2

2.1 Adaptors for pointers to functions . . . 2
2.1.1 Detailed Description . . . 3
2.1.2 Function Documentation . . . 3
2.2 Adaptors for pointers to members . . . 4
2.2.1 Detailed Description . . . 4
2.3 Algorithms . . . 5
2.3.1 Detailed Description . . . 5
2.4 Allocators . . . 6
2.4.1 Detailed Description . . . 7
2.4.2 Typedef Documentation . . . 7
2.4.3 Function Documentation . . . 7
2.5 Arithmetic Classes . . . 8
2.5.1 Detailed Description . . . 8
2.6 Array creation functions . . . 9
2.6.1 Detailed Description . . . 9
2.6.2 Function Documentation . . . 9
2.7 Associative . . . 10
2.7.1 Detailed Description . . . 10
2.8 Atomics . . . 11
2.8.1 Detailed Description . . . 15
2.8.2 Macro Definition Documentation . . . 15
2.8.3 Typedef Documentation . . . 15
2.8.4 Enumeration Type Documentation . . . 20
2.8.5 Function Documentation . . . 20
2.9 Base and Implementation Classes . . . 21
2.9.1 Detailed Description . . . 23
2.9.2 Function Documentation . . . 23
2.10 Base and Implementation Classes . . . 24
2.10.1 Detailed Description . . . 25
2.10.2 Enumeration Type Documentation . . . 25
2.11 Base and Policy Classes . . . 26
2.11.1 Detailed Description . . . 26
2.12 Base and Policy Classes . . . 27

2.12.1 Detailed Description . . . 27
2.13 Base and Policy Classes . . . 28
2.13.1 Detailed Description . . . 28
2.14 Bernoulli Distributions . . . 29
2.14.1 Detailed Description . . . 30
2.14.2 Function Documentation . . . 30
2.15 Binary Search . . . 32
2.15.1 Detailed Description . . . 32
2.15.2 Function Documentation . . . 33
2.16 Binder Classes . . . 37
2.16.1 Detailed Description . . . 38
2.16.2 Function Documentation . . . 38
2.17 Bit manipulation . . . 39
2.18 Boolean Operations Classes . . . 40
2.18.1 Detailed Description . . . 40
2.19 Branch-Based . . . 41
2.19.1 Detailed Description . . . 41
2.20 Comparison Classes . . . 42
2.20.1 Detailed Description . . . 42
2.21 Complex Numbers . . . 43
2.21.1 Detailed Description . . . 46
2.21.2 Function Documentation . . . 46
2.22 Concurrency . . . 53
2.22.1 Detailed Description . . . 53
2.23 Condition Variables . . . 54
2.23.1 Detailed Description . . . 54
2.23.2 Enumeration Type Documentation . . . 54
2.24 Const-propagating wrapper . . . 55
2.24.1 Detailed Description . . . 56
2.25 Containers . . . 57
2.25.1 Detailed Description . . . 57
2.26 Containers . . . 58
2.26.1 Detailed Description . . . 58
2.27 Data Structure Type . . . 59
2.27.1 Detailed Description . . . 59
2.28 Decimal Floating-Point Arithmetic . . . 60
2.28.1 Detailed Description . . . 60

2.29 Diagnostics . . . 61
2.29.1 Detailed Description . . . 63
2.29.2 Function Documentation . . . 63
2.30 Dynamic Bitset. . . . 64
2.30.1 Detailed Description . . . 65
2.30.2 Function Documentation . . . 65
2.31 Exceptions . . . 68
2.31.1 Detailed Description . . . 68
2.32 Exceptions . . . 69
2.32.1 Detailed Description . . . 70
2.32.2 Typedef Documentation . . . 70
2.32.3 Function Documentation . . . 71
2.33 Extensions . . . 73
2.33.1 Detailed Description . . . 73
2.34 Function Objects . . . 74
2.34.1 Detailed Description . . . 75
2.34.2 Function Documentation . . . 75
2.35 Futures . . . 76
2.35.1 Detailed Description . . . 77
2.35.2 Enumeration Type Documentation . . . 77
2.35.3 Function Documentation . . . 78
2.36 Generalized Numeric operations . . . 79
2.36.1 Detailed Description . . . 79
2.36.2 Function Documentation . . . 79
2.37 Hash-Based . . . 85
2.37.1 Detailed Description . . . 85
2.38 Hashes . . . 86
2.38.1 Detailed Description . . . 86
2.39 Heap . . . 87
2.39.1 Detailed Description . . . 87
2.39.2 Function Documentation . . . 87
2.40 Heap-Based . . . 94
2.40.1 Detailed Description . . . 95
2.40.2 Function Documentation . . . 95
2.41 I/O . . . 96
2.41.1 Detailed Description . . . 97
2.41.2 Typedef Documentation . . . 97

2.42 Invalidation Guarantees . . . 101
2.42.1 Detailed Description . . . 101
2.43 Iterator Tags . . . 102
2.43.1 Detailed Description . . . 102
2.44 Iterators . . . 103
2.44.1 Detailed Description . . . 106
2.44.2 Function Documentation . . . 107
2.45 Library Fundamentals TS . . . 109
2.45.1 Detailed Description . . . 110
2.46 List-Based . . . 111
2.46.1 Detailed Description . . . 111
2.47 Locales . . . 112
2.47.1 Detailed Description . . . 113
2.47.2 Function Documentation . . . 113
2.48 Mathematical Special Functions . . . 114
2.48.1 Detailed Description . . . 116
2.48.2 Mathematical Special Functions . . . 116
2.48.3 Function Documentation . . . 118
2.49 Memory . . . 138
2.49.1 Detailed Description . . . 138
2.49.2 Function Documentation . . . 139
2.50 Metaprogramming . . . 141
2.50.1 Detailed Description . . . 145
2.50.2 Typedef Documentation . . . 145
2.50.3 Variable Documentation . . . 148
2.51 Mutating . . . 149
2.51.1 Detailed Description . . . 151
2.51.2 Function Documentation . . . 151
2.52 Mutexes . . . 171
2.52.1 Detailed Description . . . 172
2.52.2 Function Documentation . . . 172
2.52.3 Variable Documentation . . . 173
2.53 Negators . . . 174
2.53.1 Detailed Description . . . 174
2.53.2 Function Documentation . . . 174
2.54 Networking-ts . . . 176
2.54.1 Detailed Description . . . 176

2.55 Non-Mutating . . . 177
2.55.1 Detailed Description . . . 179
2.55.2 Function Documentation . . . 179
2.56 Normal Distributions . . . 196
2.56.1 Detailed Description . . . 197
2.56.2 Function Documentation . . . 197
2.57 Numeric Arrays . . . 200
2.57.1 Detailed Description . . . 212
2.57.2 Function Documentation . . . 212
2.58 Numerics . . . 237
2.58.1 Detailed Description . . . 237
2.59 Optional values . . . 238
2.59.1 Detailed Description . . . 238
2.59.2 Variable Documentation . . . 238
2.60 Pointer Abstractions . . . 239
2.60.1 Detailed Description . . . 242
2.60.2 Macro Definition Documentation . . . 242
2.60.3 Function Documentation . . . 242
2.61 Pointer Safety and Garbage Collection . . . 250
2.61.1 Detailed Description . . . 250
2.61.2 Enumeration Type Documentation . . . 250
2.61.3 Function Documentation . . . 250
2.62 Poisson Distributions . . . 252
2.62.1 Detailed Description . . . 253
2.62.2 Function Documentation . . . 253
2.63 Policy-Based Data Structures . . . 257
2.63.1 Detailed Description . . . 257
2.64 Random Number Distributions . . . 258
2.64.1 Detailed Description . . . 258
2.65 Random Number Generation . . . 259
2.65.1 Detailed Description . . . 259
2.65.2 Function Documentation . . . 259
2.66 Random Number Generators . . . 260
2.66.1 Detailed Description . . . 261
2.66.2 Typedef Documentation . . . 261
2.66.3 Function Documentation . . . 262
2.67 Random Number Utilities . . . 266

2.67.1 Detailed Description . . . 266
2.68 Rational Arithmetic . . . 267
2.68.1 Detailed Description . . . 268
2.68.2 Typedef Documentation . . . 268
2.69 Regular Expressions . . . 269
2.69.1 Detailed Description . . . 274
2.69.2 Typedef Documentation . . . 274
2.69.3 Function Documentation . . . 275
2.70 SGI . . . 304
2.70.1 Detailed Description . . . 305
2.70.2 Function Documentation . . . 306
2.71 Sequences . . . 312
2.71.1 Detailed Description . . . 312
2.72 Set Operations . . . 313
2.72.1 Detailed Description . . . 313
2.72.2 Function Documentation . . . 314
2.73 Sorting . . . 319
2.73.1 Detailed Description . . . 321
2.73.2 Function Documentation . . . 321
2.74 Strings . . . 341
2.74.1 Detailed Description . . . 341
2.74.2 Typedef Documentation . . . 341
2.75 TR1 Mathematical Special Functions . . . 343
2.75.1 Detailed Description . . . 345
2.75.2 Function Documentation . . . 345
2.76 Tags . . . 349
2.76.1 Detailed Description . . . 349
2.76.2 Typedef Documentation . . . 349
2.77 Technical Specifications . . . 350
2.77.1 Detailed Description . . . 350
2.78 Threads . . . 351
2.78.1 Detailed Description . . . 351
2.79 Time . . . 352
2.79.1 Detailed Description . . . 354
2.79.2 Typedef Documentation . . . 354
2.79.3 Function Documentation . . . 354
2.80 Traits . . . 357

2.80.1 Detailed Description . . . 358
2.81 Type-safe container of any type . . . 359
2.81.1 Detailed Description . . . 359
2.81.2 Function Documentation . . . 360
2.82 Uniform Distributions . . . 364
2.82.1 Detailed Description . . . 364
2.82.2 Function Documentation . . . 364
2.83 Unordered Associative . . . 367
2.83.1 Detailed Description . . . 367
2.84 Utilities . . . 368
2.84.1 Detailed Description . . . 372
2.84.2 Function Documentation . . . 372
2.84.3 Variable Documentation . . . 377

3 Namespace Documentation **378**

3.1 __gnu_cxx Namespace Reference . . . 378
3.1.1 Detailed Description . . . 394
3.1.2 Function Documentation . . . 394
3.2 __gnu_cxx::__detail Namespace Reference . . . 404
3.2.1 Detailed Description . . . 405
3.2.2 Function Documentation . . . 405
3.3 __gnu_cxx::typelist Namespace Reference . . . 406
3.3.1 Detailed Description . . . 406
3.3.2 Function Documentation . . . 406
3.4 __gnu_debug Namespace Reference . . . 406
3.4.1 Detailed Description . . . 412
3.4.2 Enumeration Type Documentation . . . 412
3.4.3 Function Documentation . . . 412
3.5 __gnu_internal Namespace Reference . . . 414
3.5.1 Detailed Description . . . 414
3.6 __gnu_parallel Namespace Reference . . . 414
3.6.1 Detailed Description . . . 422
3.6.2 Typedef Documentation . . . 423
3.6.3 Enumeration Type Documentation . . . 423
3.6.4 Function Documentation . . . 424
3.6.5 Variable Documentation . . . 462
3.7 __gnu_pbds Namespace Reference . . . 462

3.7.1 Detailed Description . . . 464
3.8 __gnu_sequential Namespace Reference . . . 464
3.8.1 Detailed Description . . . 464
3.9 abi Namespace Reference . . . 464
3.9.1 Detailed Description . . . 464
3.10 std Namespace Reference . . . 464
3.10.1 Detailed Description . . . 581
3.10.2 Typedef Documentation . . . 581
3.10.3 Enumeration Type Documentation . . . 583
3.10.4 Function Documentation . . . 583
3.10.5 Variable Documentation . . . 647
3.11 std::__debug Namespace Reference . . . 648
3.11.1 Detailed Description . . . 653
3.11.2 Function Documentation . . . 653
3.12 std::__detail Namespace Reference . . . 653
3.12.1 Detailed Description . . . 657
3.12.2 Function Documentation . . . 657
3.13 std::__parallel Namespace Reference . . . 658
3.13.1 Detailed Description . . . 676
3.14 std::chrono Namespace Reference . . . 676
3.14.1 Detailed Description . . . 677
3.15 std::decimal Namespace Reference . . . 677
3.15.1 Detailed Description . . . 686
3.15.2 Function Documentation . . . 686
3.16 std::experimental Namespace Reference . . . 686
3.16.1 Detailed Description . . . 686
3.17 std::literals::chrono_literals Namespace Reference . . . 686
3.17.1 Detailed Description . . . 686
3.17.2 Function Documentation . . . 687
3.18 std::placeholders Namespace Reference . . . 688
3.18.1 Detailed Description . . . 689
3.19 std::regex_constants Namespace Reference . . . 689
3.19.1 Detailed Description . . . 691
3.19.2 Enumeration Type Documentation . . . 691
3.19.3 Function Documentation . . . 691
3.19.4 Variable Documentation . . . 695
3.20 std::rel_ops Namespace Reference . . . 698

3.20.1 Detailed Description . . . 698
3.20.2 Function Documentation . . . 699
3.21 std::this_thread Namespace Reference . . . 700
3.21.1 Detailed Description . . . 700
3.21.2 Function Documentation . . . 700
3.22 std::tr1 Namespace Reference . . . 701
3.22.1 Detailed Description . . . 704
3.23 std::tr1::__detail Namespace Reference . . . 704
3.23.1 Detailed Description . . . 704
3.24 std::tr2 Namespace Reference . . . 704
3.24.1 Detailed Description . . . 705
3.25 std::tr2::__detail Namespace Reference . . . 706
3.25.1 Detailed Description . . . 706

4 Class Documentation **706**

4.1 __gnu_parallel::__accumulate_binop_reduct< _BinOp > Struct Template Reference . . . 706
4.1.1 Detailed Description . . . 706
4.2 __gnu_parallel::__accumulate_selector< _It > Struct Template Reference . . . 706
4.2.1 Detailed Description . . . 707
4.2.2 Member Function Documentation . . . 707
4.2.3 Member Data Documentation . . . 707
4.3 std::__add_pointer_helper< _Tp, bool > Struct Template Reference . . . 707
4.3.1 Detailed Description . . . 708
4.4 __gnu_parallel::__adjacent_difference_selector< _It > Struct Template Reference . . . 708
4.4.1 Detailed Description . . . 708
4.4.2 Member Data Documentation . . . 709
4.5 __gnu_parallel::__adjacent_find_selector Struct Reference . . . 709
4.5.1 Detailed Description . . . 709
4.5.2 Member Function Documentation . . . 709
4.6 __gnu_cxx::__alloc_traits< _Alloc, typename > Struct Template Reference . . . 711
4.6.1 Detailed Description . . . 713
4.6.2 Member Typedef Documentation . . . 713
4.6.3 Member Function Documentation . . . 714
4.7 std::__allocated_ptr< _Alloc > Struct Template Reference . . . 716
4.7.1 Detailed Description . . . 716
4.7.2 Constructor & Destructor Documentation . . . 717
4.7.3 Member Function Documentation . . . 717

4.8 std::__atomic_base< _IntTp > Struct Template Reference . . . 717
4.8.1 Detailed Description . . . 719
4.9 std::__atomic_base< _PTp * > Struct Template Reference . . . 719
4.9.1 Detailed Description . . . 720
4.10 std::__atomic_flag_base Struct Reference . . . 720
4.10.1 Detailed Description . . . 721
4.11 std::__basic_future< _Res > Class Template Reference . . . 721
4.11.1 Detailed Description . . . 722
4.11.2 Member Typedef Documentation . . . 722
4.11.3 Member Function Documentation . . . 723
4.12 __gnu_parallel::__binder1st< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType > Class Template Reference . . . 723
4.12.1 Detailed Description . . . 724
4.12.2 Member Typedef Documentation . . . 724
4.13 __gnu_parallel::__binder2nd< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType > Class Template Reference . . . 725
4.13.1 Detailed Description . . . 725
4.13.2 Member Typedef Documentation . . . 726
4.14 std::__codecvt_abstract_base< _InternT, _ExternT, _StateT > Class Template Reference . . . 726
4.14.1 Detailed Description . . . 727
4.14.2 Member Function Documentation . . . 728
4.15 __gnu_cxx::__common_pool_policy< _PoolTp, _Thread > Struct Template Reference . . . 730
4.15.1 Detailed Description . . . 730
4.16 __gnu_parallel::__count_if_selector< _It, _Diff > Struct Template Reference . . . 730
4.16.1 Detailed Description . . . 731
4.16.2 Member Function Documentation . . . 731
4.16.3 Member Data Documentation . . . 731
4.17 __gnu_parallel::__count_selector< _It, _Diff > Struct Template Reference . . . 732
4.17.1 Detailed Description . . . 732
4.17.2 Member Function Documentation . . . 732
4.17.3 Member Data Documentation . . . 733
4.18 std::__ctype_abstract_base< _CharT > Class Template Reference . . . 733
4.18.1 Detailed Description . . . 735
4.18.2 Member Typedef Documentation . . . 735
4.18.3 Member Function Documentation . . . 735
4.19 std::__detector< _Default, _AlwaysVoid, _Op, _Args > Struct Template Reference . . . 745
4.19.1 Detailed Description . . . 745

4.20 std::__detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...> Struct Template Reference . . 746
4.20.1 Detailed Description . . . 746
4.21 std::tr2::__dynamic_bitset_base< _WordT, _Alloc > Struct Template Reference . . . 746
4.21.1 Detailed Description . . . 748
4.21.2 Member Data Documentation . . . 748
4.22 __gnu_parallel::__fill_selector< _It > Struct Template Reference . . . 748
4.22.1 Detailed Description . . . 749
4.22.2 Member Function Documentation . . . 749
4.22.3 Member Data Documentation . . . 749
4.23 __gnu_parallel::__find_first_of_selector< _FIterator > Struct Template Reference . . . 750
4.23.1 Detailed Description . . . 750
4.23.2 Member Function Documentation . . . 750
4.24 __gnu_parallel::__find_if_selector Struct Reference . . . 751
4.24.1 Detailed Description . . . 752
4.24.2 Member Function Documentation . . . 752
4.25 __gnu_parallel::__for_each_selector< _It > Struct Template Reference . . . 753
4.25.1 Detailed Description . . . 753
4.25.2 Member Function Documentation . . . 753
4.25.3 Member Data Documentation . . . 754
4.26 __cxxabiv1::__forced_unwind Class Reference . . . 754
4.26.1 Detailed Description . . . 754
4.27 std::__future_base Struct Reference . . . 754
4.27.1 Detailed Description . . . 755
4.27.2 Member Typedef Documentation . . . 755
4.28 __gnu_parallel::__generate_selector< _It > Struct Template Reference . . . 756
4.28.1 Detailed Description . . . 756
4.28.2 Member Function Documentation . . . 756
4.28.3 Member Data Documentation . . . 757
4.29 __gnu_parallel::__generic_find_selector Struct Reference . . . 757
4.29.1 Detailed Description . . . 757
4.30 __gnu_parallel::__generic_for_each_selector< _It > Struct Template Reference . . . 758
4.30.1 Detailed Description . . . 759
4.30.2 Member Data Documentation . . . 759
4.31 __gnu_parallel::__identity_selector< _It > Struct Template Reference . . . 759
4.31.1 Detailed Description . . . 760
4.31.2 Member Function Documentation . . . 760
4.31.3 Member Data Documentation . . . 760

4.32 __gnu_parallel::__inner_product_selector< _It, _It2, _Tp > Struct Template Reference 761
4.32.1 Detailed Description 761
4.32.2 Constructor & Destructor Documentation 761
4.32.3 Member Function Documentation 762
4.32.4 Member Data Documentation 762
4.33 std::__is_location_invariant< _Tp > Struct Template Reference 763
4.33.1 Detailed Description 763
4.34 std::__is_nullptr_t< _Tp > Struct Template Reference 764
4.34.1 Detailed Description 764
4.35 std::__is_tuple_like_impl< std::pair< _T1, _T2 > > Struct Template Reference 764
4.35.1 Detailed Description 765
4.36 __gnu_parallel::__max_element_reduct< _Compare, _It > Struct Template Reference 765
4.36.1 Detailed Description 765
4.37 __gnu_parallel::__min_element_reduct< _Compare, _It > Struct Template Reference 766
4.37.1 Detailed Description 766
4.38 __gnu_cxx::__detail::__mini_vector< _Tp > Class Template Reference 766
4.38.1 Detailed Description 767
4.39 __gnu_parallel::__mismatch_selector Struct Reference 767
4.39.1 Detailed Description 767
4.39.2 Member Function Documentation 768
4.40 __gnu_cxx::__mt_alloc< _Tp, _Poolp > Class Template Reference 768
4.40.1 Detailed Description 769
4.41 __gnu_cxx::__mt_alloc_base< _Tp > Class Template Reference 770
4.41.1 Detailed Description 770
4.42 __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference 771
4.42.1 Detailed Description 771
4.43 __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference 771
4.43.1 Detailed Description 771
4.44 __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference 771
4.44.1 Detailed Description 772
4.45 __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference 772
4.45.1 Detailed Description 772
4.46 __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< __sentinels, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference 772

4.46.1 Detailed Description . . . 772
4.47 __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< false, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference . . . 773
4.47.1 Detailed Description . . . 773
4.48 std::__numeric_limits_base Struct Reference . . . 773
4.48.1 Detailed Description . . . 774
4.48.2 Member Data Documentation . . . 774
4.49 __gnu_cxx::__per_type_pool_policy< _Tp, _PoolTp, _Thread > Struct Template Reference . . . 777
4.49.1 Detailed Description . . . 777
4.50 __gnu_cxx::__pool< _Thread > Class Template Reference . . . 777
4.50.1 Detailed Description . . . 777
4.51 __gnu_cxx::__pool< false > Class Template Reference . . . 778
4.51.1 Detailed Description . . . 779
4.52 __gnu_cxx::__pool< true > Class Template Reference . . . 779
4.52.1 Detailed Description . . . 780
4.53 __gnu_cxx::__pool_alloc< _Tp > Class Template Reference . . . 780
4.53.1 Detailed Description . . . 781
4.54 __gnu_cxx::__pool_alloc_base Class Reference . . . 782
4.54.1 Detailed Description . . . 782
4.55 __gnu_cxx::__pool_base Struct Reference . . . 783
4.55.1 Detailed Description . . . 784
4.56 __gnu_cxx::__rc_string_base< _CharT, _Traits, _Alloc > Class Template Reference . . . 784
4.56.1 Detailed Description . . . 786
4.57 std::tr2::__reflection_typelist< _Elements > Struct Template Reference . . . 786
4.57.1 Detailed Description . . . 786
4.58 std::tr2::__reflection_typelist< _First, _Rest...> Struct Template Reference . . . 787
4.58.1 Detailed Description . . . 787
4.59 std::tr2::__reflection_typelist<> Struct Template Reference . . . 787
4.59.1 Detailed Description . . . 787
4.60 __gnu_parallel::__replace_if_selector< _It, _Op, _Tp > Struct Template Reference . . . 788
4.60.1 Detailed Description . . . 788
4.60.2 Constructor & Destructor Documentation . . . 788
4.60.3 Member Function Documentation . . . 789
4.60.4 Member Data Documentation . . . 790
4.61 __gnu_parallel::__replace_selector< _It, _Tp > Struct Template Reference . . . 790
4.61.1 Detailed Description . . . 791
4.61.2 Constructor & Destructor Documentation . . . 791

4.61.3 Member Function Documentation . . . 791
4.61.4 Member Data Documentation . . . 791
4.62 __gnu_cxx::__scoped_lock Class Reference . . . 792
4.62.1 Detailed Description . . . 792
4.63 __gnu_parallel::__transform1_selector< _It > Struct Template Reference . . . 792
4.63.1 Detailed Description . . . 793
4.63.2 Member Function Documentation . . . 793
4.63.3 Member Data Documentation . . . 793
4.64 __gnu_parallel::__transform2_selector< _It > Struct Template Reference . . . 794
4.64.1 Detailed Description . . . 794
4.64.2 Member Function Documentation . . . 794
4.64.3 Member Data Documentation . . . 795
4.65 __gnu_parallel::__unary_negate< _Predicate, argument_type > Class Template Reference . . . 795
4.65.1 Detailed Description . . . 795
4.65.2 Member Typedef Documentation . . . 796
4.66 __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > Class Template Reference . . . 796
4.66.1 Detailed Description . . . 800
4.66.2 Constructor & Destructor Documentation . . . 800
4.66.3 Member Function Documentation . . . 802
4.66.4 Member Data Documentation . . . 847
4.67 __gnu_debug::_After_nth_from< _Iterator > Class Template Reference . . . 848
4.67.1 Detailed Description . . . 848
4.68 std::_Base_bitset< _Nw > Struct Template Reference . . . 848
4.68.1 Detailed Description . . . 849
4.68.2 Member Data Documentation . . . 849
4.69 std::_Base_bitset< 0 > Struct Template Reference . . . 849
4.69.1 Detailed Description . . . 850
4.70 std::_Base_bitset< 1 > Struct Template Reference . . . 850
4.70.1 Detailed Description . . . 851
4.71 __gnu_debug::_BeforeBeginHelper< _Sequence > Struct Template Reference . . . 851
4.71.1 Detailed Description . . . 852
4.72 std::_Bind< _Signature > Struct Template Reference . . . 852
4.72.1 Detailed Description . . . 852
4.73 std::_Bind_result< _Result, _Signature > Struct Template Reference . . . 852
4.73.1 Detailed Description . . . 852
4.74 __gnu_cxx::__detail::_Bitmap_counter< _Tp > Class Template Reference . . . 852
4.74.1 Detailed Description . . . 853

4.75 std::__detail::_BracketMatcher< typename, bool, bool > Struct Template Reference . . . 853
4.75.1 Detailed Description . . . 853
4.76 __gnu_cxx::_Caster< _ToType > Struct Template Reference . . . 853
4.76.1 Detailed Description . . . 854
4.77 __gnu_cxx::_Char_types< _CharT > Struct Template Reference . . . 854
4.77.1 Detailed Description . . . 854
4.78 __gnu_pbds::detail::pat_trie_base::_CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator > Class Template Reference . . . 855
4.78.1 Detailed Description . . . 856
4.79 std::__detail::_Compiler< _TraitsT > Class Template Reference . . . 856
4.79.1 Detailed Description . . . 857
4.80 std::__parallel::_CRandNumber< _MustBeInt > Struct Template Reference . . . 857
4.80.1 Detailed Description . . . 857
4.81 std::__detail::_Default_ranged_hash Struct Reference . . . 857
4.81.1 Detailed Description . . . 857
4.82 std::_Deque_base< _Tp, _Alloc > Class Template Reference . . . 858
4.82.1 Detailed Description . . . 859
4.82.2 Member Function Documentation . . . 859
4.83 std::_Deque_iterator< _Tp, _Ref, _Ptr > Struct Template Reference . . . 860
4.83.1 Detailed Description . . . 861
4.83.2 Member Function Documentation . . . 861
4.84 __gnu_parallel::_DRandomShufflingGlobalData< _RAIter > Struct Template Reference . . . 862
4.84.1 Detailed Description . . . 862
4.84.2 Constructor & Destructor Documentation . . . 862
4.84.3 Member Data Documentation . . . 862
4.85 __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator > Struct Template Reference . . . 863
4.85.1 Detailed Description . . . 864
4.85.2 Member Data Documentation . . . 864
4.86 __gnu_parallel::_DummyReduct Struct Reference . . . 865
4.86.1 Detailed Description . . . 865
4.87 std::_Enable_copy_move< _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag > Struct Template Reference . . . 865
4.87.1 Detailed Description . . . 865
4.88 std::_Enable_default_constructor< _Switch, _Tag > Struct Template Reference . . . 866
4.88.1 Detailed Description . . . 866
4.89 std::_Enable_destructor< _Switch, _Tag > Struct Template Reference . . . 866
4.89.1 Detailed Description . . . 866

4.90 std::_Enable_special_members< _Default, _Destructor, _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag > Struct Template Reference . . . 867
4.90.1 Detailed Description . . . 867
4.91 __gnu_debug::_Equal_to< _Type > Class Template Reference . . . 867
4.91.1 Detailed Description . . . 867
4.92 __gnu_parallel::_EqualFromLess< _T1, _T2, _Compare > Class Template Reference . . . 868
4.92.1 Detailed Description . . . 868
4.92.2 Member Typedef Documentation . . . 868
4.93 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys > Struct Template Reference . . . 869
4.93.1 Detailed Description . . . 869
4.94 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference . . . 870
4.94.1 Detailed Description . . . 870
4.95 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference . . . 870
4.95.1 Detailed Description . . . 870
4.96 __gnu_parallel::_EqualTo< _T1, _T2 > Struct Template Reference . . . 871
4.96.1 Detailed Description . . . 871
4.96.2 Member Typedef Documentation . . . 871
4.97 std::__detail::_Executor< typename, typename, typename, bool > Class Template Reference . . . 872
4.97.1 Detailed Description . . . 873
4.98 __gnu_cxx::_ExtPtr_allocator< _Tp > Class Template Reference . . . 873
4.98.1 Detailed Description . . . 874
4.99 __gnu_cxx::__detail::_Ffit_finder< _Tp > Class Template Reference . . . 874
4.99.1 Detailed Description . . . 875
4.99.2 Member Typedef Documentation . . . 875
4.100 std::_Function_base Class Reference . . . 875
4.100.1 Detailed Description . . . 876
4.101 std::_Fwd_list_base< _Tp, _Alloc > Struct Template Reference . . . 876
4.101.1 Detailed Description . . . 877
4.102 std::_Fwd_list_const_iterator< _Tp > Struct Template Reference . . . 878
4.102.1 Detailed Description . . . 878
4.102.2 Friends And Related Function Documentation . . . 878
4.103 std::_Fwd_list_iterator< _Tp > Struct Template Reference . . . 879
4.103.1 Detailed Description . . . 879
4.103.2 Friends And Related Function Documentation . . . 880
4.104 std::_Fwd_list_node< _Tp > Struct Template Reference . . . 880

4.104.1 Detailed Description . . . 881
4.105std::_Fwd_list_node_base Struct Reference . . . 881
4.105.1 Detailed Description . . . 881
4.106__gnu_parallel::_GuardedIterator< _RAIter, _Compare > Class Template Reference . . . 882
4.106.1 Detailed Description . . . 882
4.106.2 Constructor & Destructor Documentation . . . 882
4.106.3 Member Function Documentation . . . 883
4.106.4 Friends And Related Function Documentation . . . 883
4.107std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code > Struct Template Reference . . . 884
4.107.1 Detailed Description . . . 884
4.108std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false > Struct Template Reference . . . 885
4.108.1 Detailed Description . . . 886
4.109std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true > Struct Template Reference . . . 886
4.109.1 Detailed Description . . . 887
4.110std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false > Struct Template Reference . . . 887
4.110.1 Detailed Description . . . 888
4.111std::__detail::_Hash_node< _Value, _Cache_hash_code > Struct Template Reference . . . 888
4.111.1 Detailed Description . . . 888
4.112std::__detail::_Hash_node< _Value, false > Struct Template Reference . . . 889
4.112.1 Detailed Description . . . 889
4.113std::__detail::_Hash_node< _Value, true > Struct Template Reference . . . 890
4.113.1 Detailed Description . . . 891
4.114std::__detail::_Hash_node_base Struct Reference . . . 891
4.114.1 Detailed Description . . . 891
4.115std::__detail::_Hash_node_value_base< _Value > Struct Template Reference . . . 892
4.115.1 Detailed Description . . . 892
4.116std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits > Class Template Reference . . . 893
4.116.1 Detailed Description . . . 896
4.117std::__detail::_Hashtable_alloc< _NodeAlloc > Struct Template Reference . . . 898
4.117.1 Detailed Description . . . 899
4.118std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits > Struct Template Reference . . . 900
4.118.1 Detailed Description . . . 901
4.119std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, __use_ebo > Struct Template Reference . . . 901

4.119.1 Detailed Description . . . 901
4.120 std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false > Struct Template Reference . . . 901
4.120.1 Detailed Description . . . 901
4.121 std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true > Struct Template Reference . . . 902
4.121.1 Detailed Description . . . 902
4.122 std::__detail::_Hashtable_traits< _Cache_hash_code, _Constant_iterators, _Unique_keys > Struct Template Reference . . . 902
4.122.1 Detailed Description . . . 902
4.123 __gnu_pbds::detail::pat_trie_base::_Head< _ATraits, Metadata > Struct Template Reference . . . 903
4.123.1 Detailed Description . . . 904
4.124 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata > Struct Template Reference . . . 904
4.124.1 Detailed Description . . . 905
4.125 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators > Struct Template Reference . . . 906
4.125.1 Detailed Description . . . 906
4.126 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference . . . 906
4.126.1 Detailed Description . . . 908
4.127 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference . . . 908
4.127.1 Detailed Description . . . 909
4.128 std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits > Struct Template Reference . . . 909
4.128.1 Detailed Description . . . 910
4.129 __gnu_cxx::_Invalid_type Struct Reference . . . 911
4.129.1 Detailed Description . . . 911
4.130 __gnu_pbds::detail::pat_trie_base::_Iter< Node, Leaf, Head, Inode, Is_Forward_Iterator > Class Template Reference . . . 911
4.130.1 Detailed Description . . . 912
4.131 __gnu_parallel::_IteratorPair< _Iterator1, _Iterator2, _IteratorCategory > Class Template Reference . . . 913
4.131.1 Detailed Description . . . 914
4.131.2 Member Typedef Documentation . . . 914
4.131.3 Member Function Documentation . . . 914
4.131.4 Member Data Documentation . . . 914
4.132 __gnu_parallel::_IteratorTriple< _Iterator1, _Iterator2, _Iterator3, _IteratorCategory > Class Template Reference . . . 914
4.132.1 Detailed Description . . . 915
4.133 __gnu_parallel::_Job< _DifferenceTp > Struct Template Reference . . . 915
4.133.1 Detailed Description . . . 916

4.133.2 Member Data Documentation . . . 916
4.134 __gnu_pbds::detail::pat_trie_base::_Leaf< _ATraits, Metadata > Struct Template Reference . . . 917
4.134.1 Detailed Description . . . 918
4.135 __gnu_parallel::_Less< _T1, _T2 > Struct Template Reference . . . 918
4.135.1 Detailed Description . . . 918
4.135.2 Member Typedef Documentation . . . 919
4.136 __gnu_parallel::_Lexicographic< _T1, _T2, _Compare > Class Template Reference . . . 919
4.136.1 Detailed Description . . . 920
4.136.2 Member Typedef Documentation . . . 920
4.137 __gnu_parallel::_LexicographicReverse< _T1, _T2, _Compare > Class Template Reference . . . 921
4.137.1 Detailed Description . . . 921
4.137.2 Member Typedef Documentation . . . 921
4.138 std::_List_base< _Tp, _Alloc > Class Template Reference . . . 922
4.138.1 Detailed Description . . . 923
4.139 std::_List_const_iterator< typename > Struct Template Reference . . . 923
4.139.1 Detailed Description . . . 924
4.140 std::_List_iterator< typename > Struct Template Reference . . . 924
4.140.1 Detailed Description . . . 925
4.141 std::_List_node< _Tp > Struct Template Reference . . . 926
4.141.1 Detailed Description . . . 926
4.142 std::__detail::_List_node_base Struct Reference . . . 927
4.142.1 Detailed Description . . . 927
4.143 std::__detail::_List_node_header Struct Reference . . . 928
4.143.1 Detailed Description . . . 928
4.144 std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache > Struct Template Reference . . . 929
4.144.1 Detailed Description . . . 929
4.145 std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache > Struct Template Reference . . . 930
4.145.1 Detailed Description . . . 930
4.146 std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code > Struct Template Reference . . . 931
4.146.1 Detailed Description . . . 931
4.147 std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true > Struct Template Reference . . . 931
4.147.1 Detailed Description . . . 932
4.148 __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser Struct Reference . . . 932
4.148.1 Detailed Description . . . 932

4.148.2 Member Data Documentation . . . 932
4.149 __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >::_Loser Struct Reference . . . 933
4.149.1 Detailed Description . . . 933
4.150 __gnu_parallel::_LoserTree< __stable, _Tp, _Compare > Class Template Reference . . . 934
4.150.1 Detailed Description . . . 934
4.150.2 Member Function Documentation . . . 935
4.150.3 Member Data Documentation . . . 935
4.151 __gnu_parallel::_LoserTree< false, _Tp, _Compare > Class Template Reference . . . 936
4.151.1 Detailed Description . . . 937
4.151.2 Member Function Documentation . . . 937
4.151.3 Member Data Documentation . . . 938
4.152 __gnu_parallel::_LoserTreeBase< _Tp, _Compare > Class Template Reference . . . 939
4.152.1 Detailed Description . . . 940
4.152.2 Constructor & Destructor Documentation . . . 940
4.152.3 Member Function Documentation . . . 940
4.152.4 Member Data Documentation . . . 942
4.153 __gnu_parallel::_LoserTreePointer< __stable, _Tp, _Compare > Class Template Reference . . . 943
4.153.1 Detailed Description . . . 943
4.154 __gnu_parallel::_LoserTreePointer< false, _Tp, _Compare > Class Template Reference . . . 944
4.154.1 Detailed Description . . . 944
4.155 __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare > Class Template Reference . . . 945
4.155.1 Detailed Description . . . 945
4.156 __gnu_parallel::_LoserTreePointerUnguarded< __stable, _Tp, _Compare > Class Template Reference . . . 946
4.156.1 Detailed Description . . . 946
4.157 __gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare > Class Template Reference . . . 947
4.157.1 Detailed Description . . . 947
4.158 __gnu_parallel::_LoserTreePointerUnguardedBase< _Tp, _Compare > Class Template Reference . . . 948
4.158.1 Detailed Description . . . 948
4.159 __gnu_parallel::_LoserTreeTraits< _Tp > Struct Template Reference . . . 948
4.159.1 Detailed Description . . . 949
4.159.2 Member Data Documentation . . . 949
4.160 __gnu_parallel::_LoserTreeUnguarded< __stable, _Tp, _Compare > Class Template Reference . . . 950
4.160.1 Detailed Description . . . 950
4.161 __gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare > Class Template Reference . . . 951
4.161.1 Detailed Description . . . 951
4.162 __gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare > Class Template Reference . . . 952
4.162.1 Detailed Description . . . 952

4.163 std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys > Struct Template Reference . . . 953
4.163.1 Detailed Description . . . 953
4.164 std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference . . . 953
4.164.1 Detailed Description . . . 953
4.165 std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference . . . 954
4.165.1 Detailed Description . . . 954
4.166 std::__detail::_Mask_range_hashing Struct Reference . . . 954
4.166.1 Detailed Description . . . 955
4.167 __gnu_pbds::detail::pat_trie_base::_Metadata< Metadata, _Alloc > Struct Template Reference . . . 955
4.167.1 Detailed Description . . . 955
4.168 __gnu_pbds::detail::pat_trie_base::_Metadata< null_type, _Alloc > Struct Template Reference . . . 955
4.168.1 Detailed Description . . . 956
4.169 std::__detail::_Mod_range_hashing Struct Reference . . . 956
4.169.1 Detailed Description . . . 956
4.170 std::_Mu< _Arg, _IsBindExp, _IsPlaceholder > Class Template Reference . . . 956
4.170.1 Detailed Description . . . 956
4.171 std::_Mu< _Arg, false, false > Class Template Reference . . . 957
4.171.1 Detailed Description . . . 957
4.172 std::_Mu< _Arg, false, true > Class Template Reference . . . 957
4.172.1 Detailed Description . . . 957
4.173 std::_Mu< _Arg, true, false > Class Template Reference . . . 957
4.173.1 Detailed Description . . . 958
4.174 std::_Mu< reference_wrapper< _Tp >, false, false > Class Template Reference . . . 958
4.174.1 Detailed Description . . . 958
4.175 __gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result > Struct Template Reference . . . 958
4.175.1 Detailed Description . . . 959
4.175.2 Member Typedef Documentation . . . 959
4.176 __gnu_pbds::detail::pat_trie_base::_Node_base< _ATraits, Metadata > Struct Template Reference . . . 960
4.176.1 Detailed Description . . . 960
4.177 __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > Class Template Reference . . . 961
4.177.1 Detailed Description . . . 962
4.177.2 Member Typedef Documentation . . . 962
4.177.3 Member Function Documentation . . . 962
4.178 std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache > Struct Template Reference . . . 964

4.178.1 Detailed Description . . . 965
4.179 __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > Class Template Reference . . . 965
4.179.1 Detailed Description . . . 966
4.179.2 Member Typedef Documentation . . . 966
4.179.3 Member Function Documentation . . . 967
4.180 std::__detail::_Node_iterator< _Value, __constant_iterators, __cache > Struct Template Reference . . . 968
4.180.1 Detailed Description . . . 969
4.181 std::__detail::_Node_iterator_base< _Value, _Cache_hash_code > Struct Template Reference . . . 969
4.181.1 Detailed Description . . . 969
4.182 __gnu_debug::_Not_equal_to< _Type > Class Template Reference . . . 970
4.182.1 Detailed Description . . . 970
4.183 std::_Not_fn< _Fn > Class Template Reference . . . 970
4.183.1 Detailed Description . . . 971
4.184 __gnu_parallel::_Nothing Struct Reference . . . 971
4.184.1 Detailed Description . . . 971
4.184.2 Member Function Documentation . . . 971
4.185 __gnu_parallel::_Piece< _DifferenceTp > Struct Template Reference . . . 971
4.185.1 Detailed Description . . . 972
4.185.2 Member Data Documentation . . . 972
4.186 std::_Placeholder< _Num > Struct Template Reference . . . 972
4.186.1 Detailed Description . . . 972
4.187 __gnu_parallel::_Plus< _Tp1, _Tp2, _Result > Struct Template Reference . . . 973
4.187.1 Detailed Description . . . 973
4.187.2 Member Typedef Documentation . . . 973
4.188 __gnu_parallel::_PMWMSSortingData< _RAIter > Struct Template Reference . . . 974
4.188.1 Detailed Description . . . 974
4.188.2 Member Data Documentation . . . 974
4.189 __gnu_cxx::_Pointer_adapter< _Storage_policy > Class Template Reference . . . 975
4.189.1 Detailed Description . . . 977
4.190 std::__detail::_Power2_rehash_policy Struct Reference . . . 978
4.190.1 Detailed Description . . . 978
4.191 std::__detail::_Prime_rehash_policy Struct Reference . . . 979
4.191.1 Detailed Description . . . 979
4.192 __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp > Class Template Reference . . . 979
4.192.1 Detailed Description . . . 980
4.192.2 Constructor & Destructor Documentation . . . 980

4.192.3 Member Function Documentation . . . 980
4.193 __gnu_parallel::_PseudoSequenceIterator< _Tp, _DifferenceTp > Class Template Reference . . . 980
4.193.1 Detailed Description . . . 981
4.194 __gnu_parallel::_QSBThreadLocal< _RAIter > Struct Template Reference . . . 981
4.194.1 Detailed Description . . . 982
4.194.2 Member Typedef Documentation . . . 982
4.194.3 Constructor & Destructor Documentation . . . 982
4.194.4 Member Data Documentation . . . 982
4.195 std::__detail::_Quoted_string< _String, _CharT > Struct Template Reference . . . 983
4.195.1 Detailed Description . . . 983
4.196 __gnu_parallel::_RandomNumber Class Reference . . . 983
4.196.1 Detailed Description . . . 984
4.196.2 Constructor & Destructor Documentation . . . 984
4.196.3 Member Function Documentation . . . 984
4.197 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename > Struct Template Reference . . . 985
4.197.1 Detailed Description . . . 985
4.198 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type > Struct Template Reference . . . 985
4.198.1 Detailed Description . . . 985
4.199 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type > Struct Template Reference . . . 986
4.199.1 Detailed Description . . . 986
4.200 __gnu_cxx::_Relative_pointer_impl< _Tp > Class Template Reference . . . 986
4.200.1 Detailed Description . . . 986
4.201 __gnu_cxx::_Relative_pointer_impl< const _Tp > Class Template Reference . . . 987
4.201.1 Detailed Description . . . 987
4.202 __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp > Class Template Reference . . . 987
4.202.1 Detailed Description . . . 987
4.202.2 Constructor & Destructor Documentation . . . 988
4.202.3 Member Function Documentation . . . 988
4.203 std::__future_base::_Result< _Res > Struct Template Reference . . . 989
4.203.1 Detailed Description . . . 989
4.204 std::__future_base::_Result< _Res & > Struct Template Reference . . . 990
4.204.1 Detailed Description . . . 990
4.205 std::__future_base::_Result< void > Struct Template Reference . . . 991
4.205.1 Detailed Description . . . 991
4.206 std::__future_base::_Result_alloc< _Res, _Alloc > Struct Template Reference . . . 992

4.206.1 Detailed Description . . . 992
4.207 std::__future_base::_Result_base Struct Reference . . . 993
4.207.1 Detailed Description . . . 993
4.208 __gnu_debug::_Safe_container< _SafeContainer, _Alloc, _SafeBase, _IsCxx11AllocatorAware > Class Template Reference . . . 993
4.208.1 Detailed Description . . . 994
4.209 __gnu_debug::_Safe_forward_list< _SafeSequence > Class Template Reference . . . 994
4.209.1 Detailed Description . . . 995
4.209.2 Member Function Documentation . . . 995
4.209.3 Member Data Documentation . . . 996
4.210 __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > Class Template Reference . . . 997
4.210.1 Detailed Description . . . 999
4.210.2 Constructor & Destructor Documentation . . . 999
4.210.3 Member Function Documentation . . . 1000
4.210.4 Member Data Documentation . . . 1005
4.211 __gnu_debug::_Safe_iterator_base Class Reference . . . 1006
4.211.1 Detailed Description . . . 1007
4.211.2 Constructor & Destructor Documentation . . . 1007
4.211.3 Member Function Documentation . . . 1007
4.211.4 Member Data Documentation . . . 1009
4.212 __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence > Class Template Reference . . . 1010
4.212.1 Detailed Description . . . 1012
4.212.2 Constructor & Destructor Documentation . . . 1012
4.212.3 Member Function Documentation . . . 1013
4.212.4 Member Data Documentation . . . 1018
4.213 __gnu_debug::_Safe_local_iterator_base Class Reference . . . 1019
4.213.1 Detailed Description . . . 1020
4.213.2 Constructor & Destructor Documentation . . . 1020
4.213.3 Member Function Documentation . . . 1021
4.213.4 Member Data Documentation . . . 1022
4.214 __gnu_debug::_Safe_node_sequence< _Sequence > Class Template Reference . . . 1023
4.214.1 Detailed Description . . . 1024
4.214.2 Member Function Documentation . . . 1024
4.214.3 Member Data Documentation . . . 1025
4.215 __gnu_debug::_Safe_sequence< _Sequence > Class Template Reference . . . 1026
4.215.1 Detailed Description . . . 1027
4.215.2 Member Function Documentation . . . 1027

4.215.3 Member Data Documentation . . . 1028
4.216 __gnu_debug::_Safe_sequence_base Class Reference . . . 1029
4.216.1 Detailed Description . . . 1030
4.216.2 Constructor & Destructor Documentation . . . 1030
4.216.3 Member Function Documentation . . . 1030
4.216.4 Member Data Documentation . . . 1031
4.217 __gnu_debug::_Safe_unordered_container< _Container > Class Template Reference . . . 1032
4.217.1 Detailed Description . . . 1033
4.217.2 Member Function Documentation . . . 1033
4.217.3 Member Data Documentation . . . 1034
4.218 __gnu_debug::_Safe_unordered_container_base Class Reference . . . 1035
4.218.1 Detailed Description . . . 1036
4.218.2 Constructor & Destructor Documentation . . . 1036
4.218.3 Member Function Documentation . . . 1036
4.218.4 Member Data Documentation . . . 1037
4.219 __gnu_debug::_Safe_vector< _SafeSequence, _BaseSequence > Class Template Reference . . . 1038
4.219.1 Detailed Description . . . 1038
4.220 __gnu_parallel::_SamplingSorter< __stable, _RAIter, _StrictWeakOrdering > Struct Template Reference . . . 1038
4.220.1 Detailed Description . . . 1038
4.221 __gnu_parallel::_SamplingSorter< false, _RAIter, _StrictWeakOrdering > Struct Template Reference . . . 1039
4.221.1 Detailed Description . . . 1039
4.222 std::__detail::_Scanner< _CharT > Class Template Reference . . . 1039
4.222.1 Detailed Description . . . 1040
4.222.2 Member Enumeration Documentation . . . 1040
4.223 __gnu_debug::_Sequence_traits< _Sequence > Struct Template Reference . . . 1041
4.223.1 Detailed Description . . . 1041
4.224 __gnu_parallel::_Settings Struct Reference . . . 1041
4.224.1 Detailed Description . . . 1042
4.224.2 Member Function Documentation . . . 1042
4.224.3 Member Data Documentation . . . 1043
4.225 std::_Sp_ebo_helper< _Nm, _Tp, false > Struct Template Reference . . . 1047
4.225.1 Detailed Description . . . 1048
4.226 std::_Sp_ebo_helper< _Nm, _Tp, true > Struct Template Reference . . . 1048
4.226.1 Detailed Description . . . 1048
4.227 __gnu_parallel::_SplitConsistently< __exact, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference . . . 1048
4.227.1 Detailed Description . . . 1048

4.228 __gnu_parallel::_SplitConsistently< false, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference . . . 1049
4.228.1 Detailed Description . . . 1049
4.229 __gnu_parallel::_SplitConsistently< true, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference . . . 1049
4.229.1 Detailed Description . . . 1049
4.230 std::__detail::_StateSeq< _TraitsT > Class Template Reference . . . 1049
4.230.1 Detailed Description . . . 1050
4.231 __gnu_cxx::_Std_pointer_impl< _Tp > Class Template Reference . . . 1050
4.231.1 Detailed Description . . . 1050
4.232 std::_Temporary_buffer< _ForwardIterator, _Tp > Class Template Reference . . . 1051
4.232.1 Detailed Description . . . 1051
4.232.2 Constructor & Destructor Documentation . . . 1052
4.232.3 Member Function Documentation . . . 1052
4.233 std::_Tuple_impl< _Idx, _Elements > Struct Template Reference . . . 1052
4.233.1 Detailed Description . . . 1052
4.234 std::_Tuple_impl< _Idx, _Head, _Tail...> Struct Template Reference . . . 1053
4.234.1 Detailed Description . . . 1054
4.235 __gnu_cxx::_Unqualified_type< _Tp > Struct Template Reference . . . 1054
4.235.1 Detailed Description . . . 1055
4.236 std::_Vector_base< _Tp, _Alloc > Struct Template Reference . . . 1055
4.236.1 Detailed Description . . . 1056
4.237 std::add_const< _Tp > Struct Template Reference . . . 1056
4.237.1 Detailed Description . . . 1056
4.238 std::add_cv< _Tp > Struct Template Reference . . . 1056
4.238.1 Detailed Description . . . 1057
4.239 std::add_lvalue_reference< _Tp > Struct Template Reference . . . 1057
4.239.1 Detailed Description . . . 1057
4.240 std::add_rvalue_reference< _Tp > Struct Template Reference . . . 1057
4.240.1 Detailed Description . . . 1057
4.241 std::add_volatile< _Tp > Struct Template Reference . . . 1058
4.241.1 Detailed Description . . . 1058
4.242 std::adopt_lock_t Struct Reference . . . 1058
4.242.1 Detailed Description . . . 1058
4.243 std::aligned_storage< _Len, _Align > Struct Template Reference . . . 1058
4.243.1 Detailed Description . . . 1058
4.244 std::aligned_union< _Len, _Types > Struct Template Reference . . . 1058

4.244.1 Detailed Description . . . 1059
4.244.2 Member Typedef Documentation . . . 1059
4.245std::alignment_of< _Tp > Struct Template Reference . . . 1060
4.245.1 Detailed Description . . . 1060
4.246std::allocator< _Tp > Class Template Reference . . . 1061
4.246.1 Detailed Description . . . 1062
4.247std::allocator< void > Class Template Reference . . . 1062
4.247.1 Detailed Description . . . 1062
4.248std::allocator_arg_t Struct Reference . . . 1062
4.248.1 Detailed Description . . . 1063
4.249std::allocator_traits< _Alloc > Struct Template Reference . . . 1063
4.249.1 Detailed Description . . . 1064
4.249.2 Member Typedef Documentation . . . 1064
4.249.3 Member Function Documentation . . . 1066
4.250std::allocator_traits< allocator< _Tp > > Struct Template Reference . . . 1069
4.250.1 Detailed Description . . . 1070
4.250.2 Member Typedef Documentation . . . 1070
4.250.3 Member Function Documentation . . . 1071
4.251__gnu_cxx::random_condition::always_adjustor Struct Reference . . . 1074
4.251.1 Detailed Description . . . 1074
4.252__gnu_cxx::limit_condition::always_adjustor Struct Reference . . . 1074
4.252.1 Detailed Description . . . 1074
4.253__gnu_cxx::annotate_base Struct Reference . . . 1075
4.253.1 Detailed Description . . . 1075
4.254std::experimental::fundamentals_v1::any Class Reference . . . 1076
4.254.1 Detailed Description . . . 1076
4.254.2 Constructor & Destructor Documentation . . . 1076
4.254.3 Member Function Documentation . . . 1077
4.255std::array< _Tp, _Nm > Struct Template Reference . . . 1078
4.255.1 Detailed Description . . . 1079
4.256__gnu_pbds::associative_tag Struct Reference . . . 1080
4.256.1 Detailed Description . . . 1080
4.257std::atomic< _Tp > Struct Template Reference . . . 1080
4.257.1 Detailed Description . . . 1081
4.258std::atomic< _Tp * > Struct Template Reference . . . 1081
4.258.1 Detailed Description . . . 1083
4.259std::atomic< bool > Struct Template Reference . . . 1083

4.259.1 Detailed Description . . . 1084
4.260 std::atomic< char > Struct Template Reference . . . 1084
4.260.1 Detailed Description . . . 1086
4.261 std::atomic< char16_t > Struct Template Reference . . . 1086
4.261.1 Detailed Description . . . 1088
4.262 std::atomic< char32_t > Struct Template Reference . . . 1088
4.262.1 Detailed Description . . . 1090
4.263 std::atomic< int > Struct Template Reference . . . 1090
4.263.1 Detailed Description . . . 1092
4.264 std::atomic< long > Struct Template Reference . . . 1092
4.264.1 Detailed Description . . . 1094
4.265 std::atomic< long long > Struct Template Reference . . . 1094
4.265.1 Detailed Description . . . 1096
4.266 std::atomic< short > Struct Template Reference . . . 1096
4.266.1 Detailed Description . . . 1098
4.267 std::atomic< signed char > Struct Template Reference . . . 1098
4.267.1 Detailed Description . . . 1100
4.268 std::atomic< unsigned char > Struct Template Reference . . . 1100
4.268.1 Detailed Description . . . 1102
4.269 std::atomic< unsigned int > Struct Template Reference . . . 1102
4.269.1 Detailed Description . . . 1104
4.270 std::atomic< unsigned long > Struct Template Reference . . . 1104
4.270.1 Detailed Description . . . 1106
4.271 std::atomic< unsigned long long > Struct Template Reference . . . 1106
4.271.1 Detailed Description . . . 1108
4.272 std::atomic< unsigned short > Struct Template Reference . . . 1108
4.272.1 Detailed Description . . . 1110
4.273 std::atomic< wchar_t > Struct Template Reference . . . 1110
4.273.1 Detailed Description . . . 1112
4.274 std::atomic_flag Struct Reference . . . 1112
4.274.1 Detailed Description . . . 1112
4.275 std::auto_ptr< _Tp > Class Template Reference . . . 1113
4.275.1 Detailed Description . . . 1113
4.275.2 Member Typedef Documentation . . . 1114
4.275.3 Constructor & Destructor Documentation . . . 1114
4.275.4 Member Function Documentation . . . 1115
4.276 std::auto_ptr_ref< _Tp1 > Struct Template Reference . . . 1117

4.276.1 Detailed Description . . . 1117
4.277 std::back_insert_iterator< _Container > Class Template Reference . . . 1117
4.277.1 Detailed Description . . . 1118
4.277.2 Member Typedef Documentation . . . 1118
4.277.3 Constructor & Destructor Documentation . . . 1119
4.277.4 Member Function Documentation . . . 1119
4.278 std::bad_alloc Class Reference . . . 1120
4.278.1 Detailed Description . . . 1120
4.278.2 Member Function Documentation . . . 1120
4.279 std::experimental::fundamentals_v1::bad_any_cast Class Reference . . . 1121
4.279.1 Detailed Description . . . 1121
4.279.2 Member Function Documentation . . . 1121
4.280 std::bad_cast Class Reference . . . 1122
4.280.1 Detailed Description . . . 1122
4.280.2 Member Function Documentation . . . 1122
4.281 std::bad_exception Class Reference . . . 1123
4.281.1 Detailed Description . . . 1123
4.281.2 Member Function Documentation . . . 1123
4.282 std::bad_function_call Class Reference . . . 1124
4.282.1 Detailed Description . . . 1124
4.282.2 Member Function Documentation . . . 1124
4.283 std::experimental::fundamentals_v1::bad_optional_access Class Reference . . . 1125
4.283.1 Detailed Description . . . 1125
4.283.2 Member Function Documentation . . . 1125
4.284 std::bad_typeid Class Reference . . . 1126
4.284.1 Detailed Description . . . 1126
4.284.2 Member Function Documentation . . . 1126
4.285 std::bad_weak_ptr Class Reference . . . 1127
4.285.1 Detailed Description . . . 1127
4.285.2 Member Function Documentation . . . 1127
4.286 __gnu_parallel::balanced_quicksort_tag Struct Reference . . . 1128
4.286.1 Detailed Description . . . 1128
4.286.2 Member Function Documentation . . . 1128
4.287 __gnu_parallel::balanced_tag Struct Reference . . . 1129
4.287.1 Detailed Description . . . 1129
4.287.2 Member Function Documentation . . . 1129
4.288 std::tr2::bases< _Tp > Struct Template Reference . . . 1131

4.288.1 Detailed Description . . . 1131
4.289 __gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc > Class Template Reference . . . 1131
4.289.1 Detailed Description . . . 1132
4.290 __gnu_pbds::basic_branch_tag Struct Reference . . . 1132
4.290.1 Detailed Description . . . 1132
4.291 std::basic_filebuf< _CharT, _Traits > Class Template Reference . . . 1133
4.291.1 Detailed Description . . . 1135
4.291.2 Constructor & Destructor Documentation . . . 1136
4.291.3 Member Function Documentation . . . 1136
4.291.4 Member Data Documentation . . . 1150
4.292 std::basic_fstream< _CharT, _Traits > Class Template Reference . . . 1154
4.292.1 Detailed Description . . . 1160
4.292.2 Member Typedef Documentation . . . 1161
4.292.3 Member Enumeration Documentation . . . 1163
4.292.4 Constructor & Destructor Documentation . . . 1163
4.292.5 Member Function Documentation . . . 1164
4.292.6 Member Data Documentation . . . 1203
4.293 __gnu_pbds::basic_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Resize_Policy, Store_Hash, Tag, Policy_Tl, _Alloc > Class Template Reference . . . 1209
4.293.1 Detailed Description . . . 1209
4.294 __gnu_pbds::basic_hash_tag Struct Reference . . . 1210
4.294.1 Detailed Description . . . 1210
4.295 std::basic_ifstream< _CharT, _Traits > Class Template Reference . . . 1211
4.295.1 Detailed Description . . . 1216
4.295.2 Member Typedef Documentation . . . 1216
4.295.3 Member Enumeration Documentation . . . 1219
4.295.4 Constructor & Destructor Documentation . . . 1220
4.295.5 Member Function Documentation . . . 1220
4.295.6 Member Data Documentation . . . 1251
4.296 __gnu_pbds::basic_invalidation_guarantee Struct Reference . . . 1257
4.296.1 Detailed Description . . . 1257
4.297 std::basic_ios< _CharT, _Traits > Class Template Reference . . . 1257
4.297.1 Detailed Description . . . 1261
4.297.2 Member Typedef Documentation . . . 1261
4.297.3 Member Enumeration Documentation . . . 1264
4.297.4 Constructor & Destructor Documentation . . . 1264

4.297.5 Member Function Documentation . . . 1264
4.297.6 Member Data Documentation . . . 1279
4.298 std::basic_iostream< _CharT, _Traits > Class Template Reference . . . 1284
4.298.1 Detailed Description . . . 1290
4.298.2 Member Typedef Documentation . . . 1291
4.298.3 Member Enumeration Documentation . . . 1293
4.298.4 Constructor & Destructor Documentation . . . 1293
4.298.5 Member Function Documentation . . . 1293
4.298.6 Member Data Documentation . . . 1332
4.299 std::basic_istream< _CharT, _Traits > Class Template Reference . . . 1338
4.299.1 Detailed Description . . . 1343
4.299.2 Member Typedef Documentation . . . 1343
4.299.3 Member Enumeration Documentation . . . 1345
4.299.4 Constructor & Destructor Documentation . . . 1345
4.299.5 Member Function Documentation . . . 1346
4.299.6 Member Data Documentation . . . 1375
4.300 std::basic_istringstream< _CharT, _Traits, _Alloc > Class Template Reference . . . 1381
4.300.1 Detailed Description . . . 1386
4.300.2 Member Typedef Documentation . . . 1386
4.300.3 Member Enumeration Documentation . . . 1388
4.300.4 Constructor & Destructor Documentation . . . 1389
4.300.5 Member Function Documentation . . . 1390
4.300.6 Member Data Documentation . . . 1419
4.301 std::basic_ofstream< _CharT, _Traits > Class Template Reference . . . 1424
4.301.1 Detailed Description . . . 1429
4.301.2 Member Typedef Documentation . . . 1429
4.301.3 Member Enumeration Documentation . . . 1431
4.301.4 Constructor & Destructor Documentation . . . 1431
4.301.5 Member Function Documentation . . . 1432
4.301.6 Member Data Documentation . . . 1454
4.302 std::basic_ostream< _CharT, _Traits > Class Template Reference . . . 1459
4.302.1 Detailed Description . . . 1464
4.302.2 Member Typedef Documentation . . . 1464
4.302.3 Member Enumeration Documentation . . . 1466
4.302.4 Constructor & Destructor Documentation . . . 1466
4.302.5 Member Function Documentation . . . 1466
4.302.6 Member Data Documentation . . . 1485

4.303 std::basic_ostringstream< _CharT, _Traits, _Alloc > Class Template Reference . . . 1491
4.303.1 Detailed Description . . . 1495
4.303.2 Member Typedef Documentation . . . 1496
4.303.3 Member Enumeration Documentation . . . 1498
4.303.4 Constructor & Destructor Documentation . . . 1498
4.303.5 Member Function Documentation . . . 1500
4.303.6 Member Data Documentation . . . 1520
4.304 std::basic_regex< typename, typename > Class Template Reference . . . 1526
4.304.1 Detailed Description . . . 1527
4.304.2 Constructor & Destructor Documentation . . . 1527
4.304.3 Member Function Documentation . . . 1530
4.305 std::basic_streambuf< _CharT, _Traits > Class Template Reference . . . 1536
4.305.1 Detailed Description . . . 1538
4.305.2 Member Typedef Documentation . . . 1539
4.305.3 Constructor & Destructor Documentation . . . 1540
4.305.4 Member Function Documentation . . . 1540
4.305.5 Member Data Documentation . . . 1554
4.306 __gnu_debug::basic_string< _CharT, _Traits, _Allocator > Class Template Reference . . . 1556
4.306.1 Detailed Description . . . 1560
4.306.2 Member Function Documentation . . . 1561
4.306.3 Member Data Documentation . . . 1579
4.307 std::basic_string< _CharT, _Traits, _Alloc > Class Template Reference . . . 1580
4.307.1 Detailed Description . . . 1583
4.307.2 Constructor & Destructor Documentation . . . 1584
4.307.3 Member Function Documentation . . . 1587
4.307.4 Member Data Documentation . . . 1629
4.308 std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits > Class Template Reference 1630
4.308.1 Detailed Description . . . 1632
4.309 std::basic_stringbuf< _CharT, _Traits, _Alloc > Class Template Reference . . . 1633
4.309.1 Detailed Description . . . 1635
4.309.2 Constructor & Destructor Documentation . . . 1635
4.309.3 Member Function Documentation . . . 1636
4.309.4 Member Data Documentation . . . 1650
4.310 std::basic_stringstream< _CharT, _Traits, _Alloc > Class Template Reference . . . 1652
4.310.1 Detailed Description . . . 1658
4.310.2 Member Typedef Documentation . . . 1659
4.310.3 Member Enumeration Documentation . . . 1661

4.310.4 Constructor & Destructor Documentation . . . 1661
4.310.5 Member Function Documentation . . . 1663
4.310.6 Member Data Documentation . . . 1700
4.311 std::bernoulli_distribution Class Reference . . . 1705
4.311.1 Detailed Description . . . 1706
4.311.2 Member Typedef Documentation . . . 1706
4.311.3 Constructor & Destructor Documentation . . . 1706
4.311.4 Member Function Documentation . . . 1707
4.311.5 Friends And Related Function Documentation . . . 1707
4.312 std::bidirectional_iterator_tag Struct Reference . . . 1708
4.312.1 Detailed Description . . . 1708
4.313 __gnu_pbds::detail::bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > Class Template Reference . . . 1709
4.313.1 Detailed Description . . . 1710
4.314 __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > Class Template Reference . . . 1711
4.314.1 Detailed Description . . . 1712
4.314.2 Member Typedef Documentation . . . 1712
4.314.3 Member Function Documentation . . . 1713
4.315 __gnu_pbds::detail::bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > Class Template Reference . . . 1714
4.315.1 Detailed Description . . . 1716
4.316 __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc > Class Template Reference . . . 1716
4.316.1 Detailed Description . . . 1717
4.316.2 Member Typedef Documentation . . . 1717
4.316.3 Member Function Documentation . . . 1718
4.317 __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc > Struct Template Reference . . . 1719
4.317.1 Detailed Description . . . 1720
4.317.2 Member Typedef Documentation . . . 1721
4.318 __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_Update, Node, _Alloc > Struct Template Reference . . . 1721
4.318.1 Detailed Description . . . 1722
4.318.2 Member Typedef Documentation . . . 1722
4.319 __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 > Class Template Reference . . . 1723
4.319.1 Detailed Description . . . 1723
4.319.2 Member Typedef Documentation . . . 1723
4.320 std::binary_function< _Arg1, _Arg2, _Result > Struct Template Reference . . . 1724

4.320.1 Detailed Description . . . 1724
4.320.2 Member Typedef Documentation . . . 1725
4.321 __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference . . . 1725
4.321.1 Detailed Description . . . 1727
4.322 __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc > Class Template Reference . . . 1728
4.322.1 Detailed Description . . . 1729
4.322.2 Member Typedef Documentation . . . 1729
4.322.3 Constructor & Destructor Documentation . . . 1730
4.322.4 Member Function Documentation . . . 1730
4.323 __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > Class Template Reference . . . 1731
4.323.1 Detailed Description . . . 1732
4.323.2 Member Typedef Documentation . . . 1732
4.323.3 Constructor & Destructor Documentation . . . 1733
4.323.4 Member Function Documentation . . . 1733
4.324 __gnu_pbds::binary_heap_tag Struct Reference . . . 1734
4.324.1 Detailed Description . . . 1735
4.325 std::binary_negate< _Predicate > Class Template Reference . . . 1735
4.325.1 Detailed Description . . . 1735
4.325.2 Member Typedef Documentation . . . 1736
4.326 std::binder1st< _Operation > Class Template Reference . . . 1736
4.326.1 Detailed Description . . . 1737
4.326.2 Member Typedef Documentation . . . 1737
4.327 std::binder2nd< _Operation > Class Template Reference . . . 1738
4.327.1 Detailed Description . . . 1738
4.327.2 Member Typedef Documentation . . . 1738
4.328 std::binomial_distribution< _IntType > Class Template Reference . . . 1739
4.328.1 Detailed Description . . . 1740
4.328.2 Member Typedef Documentation . . . 1740
4.328.3 Member Function Documentation . . . 1740
4.328.4 Friends And Related Function Documentation . . . 1741
4.329 __gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference . . . 1743
4.329.1 Detailed Description . . . 1745
4.330 __gnu_pbds::detail::binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > Class Template Reference 1746
4.330.1 Detailed Description . . . 1748
4.331 __gnu_pbds::binomial_heap_tag Struct Reference . . . 1748

4.331.1 Detailed Description . . . 1748
4.332 __gnu_cxx::bitmap_allocator< _Tp > Class Template Reference . . . 1749
4.332.1 Detailed Description . . . 1750
4.332.2 Member Function Documentation . . . 1750
4.333 std::__debug::bitset< _Nb > Class Template Reference . . . 1751
4.333.1 Detailed Description . . . 1752
4.334 std::bitset< _Nb > Class Template Reference . . . 1752
4.334.1 Detailed Description . . . 1755
4.334.2 Constructor & Destructor Documentation . . . 1756
4.334.3 Member Function Documentation . . . 1757
4.335 std::tr2::bool_set Class Reference . . . 1763
4.335.1 Detailed Description . . . 1764
4.335.2 Constructor & Destructor Documentation . . . 1764
4.335.3 Member Function Documentation . . . 1765
4.336 __gnu_pbds::detail::branch_policy< Node_CItr, Node_Itr, _Alloc > Struct Template Reference . . . 1765
4.336.1 Detailed Description . . . 1766
4.337 __gnu_pbds::detail::branch_policy< Node_CItr, Node_CItr, _Alloc > Struct Template Reference . . . 1766
4.337.1 Detailed Description . . . 1767
4.338 std::cauchy_distribution< _RealType > Class Template Reference . . . 1767
4.338.1 Detailed Description . . . 1768
4.338.2 Member Typedef Documentation . . . 1768
4.338.3 Member Function Documentation . . . 1768
4.338.4 Friends And Related Function Documentation . . . 1769
4.339 __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type > Class Template Reference . . . 1769
4.339.1 Detailed Description . . . 1770
4.339.2 Member Enumeration Documentation . . . 1770
4.339.3 Constructor & Destructor Documentation . . . 1770
4.339.4 Member Function Documentation . . . 1771
4.340 __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc > Class Template Reference . . . 1773
4.340.1 Detailed Description . . . 1774
4.340.2 Constructor & Destructor Documentation . . . 1775
4.341 __gnu_pbds::cc_hash_tag Struct Reference . . . 1778
4.341.1 Detailed Description . . . 1778
4.342 __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy > Class Template Reference . . . 1779
4.342.1 Detailed Description . . . 1781

4.342.2 Member Enumeration Documentation . . . 1781
4.342.3 Member Function Documentation . . . 1782
4.343 __gnu_cxx::char_traits< _CharT > Struct Template Reference . . . 1783
4.343.1 Detailed Description . . . 1784
4.344 std::char_traits< _CharT > Struct Template Reference . . . 1785
4.344.1 Detailed Description . . . 1786
4.345 std::char_traits< __gnu_cxx::character< _Value, _Int, _St > > Struct Template Reference . . . 1786
4.345.1 Detailed Description . . . 1787
4.346 std::char_traits< char > Struct Template Reference . . . 1787
4.346.1 Detailed Description . . . 1787
4.347 std::char_traits< wchar_t > Struct Template Reference . . . 1788
4.347.1 Detailed Description . . . 1788
4.348 __gnu_cxx::character< _Value, _Int, _St > Struct Template Reference . . . 1788
4.348.1 Detailed Description . . . 1789
4.349 std::chi_squared_distribution< _RealType > Class Template Reference . . . 1789
4.349.1 Detailed Description . . . 1790
4.349.2 Member Typedef Documentation . . . 1790
4.349.3 Member Function Documentation . . . 1790
4.349.4 Friends And Related Function Documentation . . . 1791
4.350 std::codecvt< _InternT, _ExternT, _StateT > Class Template Reference . . . 1793
4.350.1 Detailed Description . . . 1794
4.350.2 Member Function Documentation . . . 1794
4.351 std::codecvt< _InternT, _ExternT, encoding_state > Class Template Reference . . . 1797
4.351.1 Detailed Description . . . 1798
4.351.2 Member Function Documentation . . . 1798
4.352 std::codecvt< char, char, mbstate_t > Class Template Reference . . . 1801
4.352.1 Detailed Description . . . 1802
4.352.2 Member Function Documentation . . . 1803
4.353 std::codecvt< char16_t, char, mbstate_t > Class Template Reference . . . 1805
4.353.1 Detailed Description . . . 1806
4.353.2 Member Function Documentation . . . 1806
4.354 std::codecvt< char32_t, char, mbstate_t > Class Template Reference . . . 1809
4.354.1 Detailed Description . . . 1810
4.354.2 Member Function Documentation . . . 1810
4.355 std::codecvt< wchar_t, char, mbstate_t > Class Template Reference . . . 1813
4.355.1 Detailed Description . . . 1814
4.355.2 Member Function Documentation . . . 1814

4.356 std::codecvt_base Class Reference . . . 1817
4.356.1 Detailed Description . . . 1817
4.357 std::codecvt_byname< _InternT, _ExternT, _StateT > Class Template Reference . . . 1818
4.357.1 Detailed Description . . . 1819
4.357.2 Member Function Documentation . . . 1819
4.358 std::collate< _CharT > Class Template Reference . . . 1822
4.358.1 Detailed Description . . . 1823
4.358.2 Member Typedef Documentation . . . 1823
4.358.3 Constructor & Destructor Documentation . . . 1823
4.358.4 Member Function Documentation . . . 1825
4.358.5 Member Data Documentation . . . 1828
4.359 std::collate_byname< _CharT > Class Template Reference . . . 1829
4.359.1 Detailed Description . . . 1830
4.359.2 Member Typedef Documentation . . . 1830
4.359.3 Member Function Documentation . . . 1830
4.359.4 Member Data Documentation . . . 1833
4.360 std::common_type< _Tp > Struct Template Reference . . . 1833
4.360.1 Detailed Description . . . 1833
4.361 std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > > Struct Template Reference . . . 1833
4.361.1 Detailed Description . . . 1833
4.362 std::common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > > Struct Template Reference . . . 1833
4.362.1 Detailed Description . . . 1834
4.363 std::complex< _Tp > Struct Template Reference . . . 1834
4.363.1 Detailed Description . . . 1835
4.363.2 Member Typedef Documentation . . . 1835
4.363.3 Constructor & Destructor Documentation . . . 1835
4.363.4 Member Function Documentation . . . 1835
4.364 std::complex< double > Struct Template Reference . . . 1836
4.364.1 Detailed Description . . . 1836
4.365 std::complex< float > Struct Template Reference . . . 1836
4.365.1 Detailed Description . . . 1837
4.366 std::complex< long double > Struct Template Reference . . . 1837
4.366.1 Detailed Description . . . 1838
4.367 __gnu_pbds::detail::cond_dealtor< Entry, _Alloc > Class Template Reference . . . 1838
4.367.1 Detailed Description . . . 1839

4.368 __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::cond_dtor< Size_Type > Class Template Reference . . . 1839
4.368.1 Detailed Description . . . 1839
4.369 __gnu_cxx::condition_base Struct Reference . . . 1840
4.369.1 Detailed Description . . . 1840
4.370 std::condition_variable Class Reference . . . 1840
4.370.1 Detailed Description . . . 1841
4.371 std::_V2::condition_variable_any Class Reference . . . 1841
4.371.1 Detailed Description . . . 1842
4.372 std::conditional< bool, typename, typename > Struct Template Reference . . . 1842
4.372.1 Detailed Description . . . 1842
4.373 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::const_iterator Struct Reference . . . 1842
4.373.1 Detailed Description . . . 1843
4.374 std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg > Class Template Reference . . . 1844
4.374.1 Detailed Description . . . 1844
4.374.2 Member Typedef Documentation . . . 1844
4.375 std::const_mem_fun1_t< _Ret, _Tp, _Arg > Class Template Reference . . . 1845
4.375.1 Detailed Description . . . 1845
4.375.2 Member Typedef Documentation . . . 1846
4.376 std::const_mem_fun_ref_t< _Ret, _Tp > Class Template Reference . . . 1846
4.376.1 Detailed Description . . . 1847
4.376.2 Member Typedef Documentation . . . 1847
4.377 std::const_mem_fun_t< _Ret, _Tp > Class Template Reference . . . 1847
4.377.1 Detailed Description . . . 1848
4.377.2 Member Typedef Documentation . . . 1848
4.378 __gnu_cxx::constant_binary_fun< _Result, _Arg1, _Arg2 > Struct Template Reference . . . 1848
4.378.1 Detailed Description . . . 1849
4.379 __gnu_parallel::constant_size_blocks_tag Struct Reference . . . 1849
4.379.1 Detailed Description . . . 1849
4.380 __gnu_cxx::constant_unary_fun< _Result, _Argument > Struct Template Reference . . . 1849
4.380.1 Detailed Description . . . 1850
4.381 __gnu_cxx::constant_void_fun< _Result > Struct Template Reference . . . 1850
4.381.1 Detailed Description . . . 1850
4.382 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, Tag, Policy_Tl > Struct Template Reference . . . 1851
4.382.1 Detailed Description . . . 1851
4.383 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type > Struct Template Reference . . . 1851

4.383.1 Detailed Description . . . 1851
4.383.2 Member Typedef Documentation . . . 1851
4.384 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type > Struct Template Reference . . . 1852
4.384.1 Detailed Description . . . 1852
4.384.2 Member Typedef Documentation . . . 1852
4.385 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type > Struct Template Reference . . . 1852
4.385.1 Detailed Description . . . 1852
4.385.2 Member Typedef Documentation . . . 1852
4.386 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type > Struct Template Reference . . . 1853
4.386.1 Detailed Description . . . 1853
4.386.2 Member Typedef Documentation . . . 1853
4.387 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type > Struct Template Reference . . . 1853
4.387.1 Detailed Description . . . 1854
4.387.2 Member Typedef Documentation . . . 1854
4.388 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl > Struct Template Reference . . . 1854
4.388.1 Detailed Description . . . 1854
4.388.2 Member Typedef Documentation . . . 1854
4.389 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl > Struct Template Reference . . . 1855
4.389.1 Detailed Description . . . 1855
4.389.2 Member Typedef Documentation . . . 1855
4.390 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl > Struct Template Reference . . . 1855
4.390.1 Detailed Description . . . 1855
4.390.2 Member Typedef Documentation . . . 1855
4.391 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl > Struct Template Reference . . . 1856
4.391.1 Detailed Description . . . 1856
4.391.2 Member Typedef Documentation . . . 1856
4.392 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, pat_trie_tag, Policy_Tl > Struct Template Reference . . . 1856
4.392.1 Detailed Description . . . 1857
4.393 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl > Struct Template Reference . . . 1857
4.393.1 Detailed Description . . . 1857

4.393.2 Member Typedef Documentation . . . 1857
4.394 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl > Struct Template Reference . . . 1857
4.394.1 Detailed Description . . . 1858
4.394.2 Member Typedef Documentation . . . 1858
4.395 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl > Struct Template Reference . . . 1858
4.395.1 Detailed Description . . . 1858
4.395.2 Member Typedef Documentation . . . 1858
4.396 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl > Struct Template Reference . . . 1859
4.396.1 Detailed Description . . . 1859
4.396.2 Member Typedef Documentation . . . 1859
4.397 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl > Struct Template Reference . . . 1859
4.397.1 Detailed Description . . . 1859
4.397.2 Member Typedef Documentation . . . 1859
4.398 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl > Struct Template Reference . . . 1860
4.398.1 Detailed Description . . . 1860
4.398.2 Member Typedef Documentation . . . 1860
4.399 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl > Struct Template Reference . . . 1860
4.399.1 Detailed Description . . . 1860
4.399.2 Member Typedef Documentation . . . 1861
4.400 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, rb_tree_tag, Policy_Tl > Struct Template Reference . . . 1861
4.400.1 Detailed Description . . . 1861
4.401 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl > Struct Template Reference . . . 1861
4.401.1 Detailed Description . . . 1861
4.401.2 Member Typedef Documentation . . . 1862
4.402 __gnu_pbds::container_error Struct Reference . . . 1862
4.402.1 Detailed Description . . . 1863
4.402.2 Member Function Documentation . . . 1863
4.403 __gnu_pbds::container_tag Struct Reference . . . 1863
4.403.1 Detailed Description . . . 1863
4.404 __gnu_pbds::container_traits< Cntnr > Struct Template Reference . . . 1864
4.404.1 Detailed Description . . . 1864

4.404.2 Member Enumeration Documentation . . . 1864
4.405 __gnu_pbds::container_traits_base< _Tag > Struct Template Reference . . . 1865
4.405.1 Detailed Description . . . 1865
4.406 __gnu_pbds::container_traits_base< binary_heap_tag > Struct Template Reference . . . 1865
4.406.1 Detailed Description . . . 1865
4.407 __gnu_pbds::container_traits_base< binomial_heap_tag > Struct Template Reference . . . 1865
4.407.1 Detailed Description . . . 1865
4.408 __gnu_pbds::container_traits_base< cc_hash_tag > Struct Template Reference . . . 1866
4.408.1 Detailed Description . . . 1866
4.409 __gnu_pbds::container_traits_base< gp_hash_tag > Struct Template Reference . . . 1866
4.409.1 Detailed Description . . . 1866
4.410 __gnu_pbds::container_traits_base< list_update_tag > Struct Template Reference . . . 1866
4.410.1 Detailed Description . . . 1867
4.411 __gnu_pbds::container_traits_base< ov_tree_tag > Struct Template Reference . . . 1867
4.411.1 Detailed Description . . . 1867
4.412 __gnu_pbds::container_traits_base< pairing_heap_tag > Struct Template Reference . . . 1867
4.412.1 Detailed Description . . . 1867
4.413 __gnu_pbds::container_traits_base< pat_trie_tag > Struct Template Reference . . . 1868
4.413.1 Detailed Description . . . 1868
4.414 __gnu_pbds::container_traits_base< rb_tree_tag > Struct Template Reference . . . 1868
4.414.1 Detailed Description . . . 1868
4.415 __gnu_pbds::container_traits_base< rc_binomial_heap_tag > Struct Template Reference . . . 1868
4.415.1 Detailed Description . . . 1869
4.416 __gnu_pbds::container_traits_base< splay_tree_tag > Struct Template Reference . . . 1869
4.416.1 Detailed Description . . . 1869
4.417 __gnu_pbds::container_traits_base< thin_heap_tag > Struct Template Reference . . . 1869
4.417.1 Detailed Description . . . 1869
4.418 std::ctype< _CharT > Class Template Reference . . . 1870
4.418.1 Detailed Description . . . 1872
4.418.2 Member Function Documentation . . . 1872
4.418.3 Member Data Documentation . . . 1881
4.419 std::ctype< char > Class Template Reference . . . 1882
4.419.1 Detailed Description . . . 1884
4.419.2 Member Typedef Documentation . . . 1884
4.419.3 Constructor & Destructor Documentation . . . 1884
4.419.4 Member Function Documentation . . . 1884
4.419.5 Member Data Documentation . . . 1893

4.420 std::ctype< wchar_t > Class Template Reference . . . 1894
4.420.1 Detailed Description . . . 1896
4.420.2 Member Typedef Documentation . . . 1896
4.420.3 Constructor & Destructor Documentation . . . 1896
4.420.4 Member Function Documentation . . . 1896
4.420.5 Member Data Documentation . . . 1908
4.421 std::ctype_base Struct Reference . . . 1909
4.421.1 Detailed Description . . . 1909
4.422 std::ctype_byname< _CharT > Class Template Reference . . . 1910
4.422.1 Detailed Description . . . 1911
4.422.2 Member Function Documentation . . . 1912
4.422.3 Member Data Documentation . . . 1920
4.423 std::ctype_byname< char > Class Template Reference . . . 1921
4.423.1 Detailed Description . . . 1923
4.423.2 Member Typedef Documentation . . . 1923
4.423.3 Member Function Documentation . . . 1923
4.423.4 Member Data Documentation . . . 1931
4.424 __gnu_cxx::debug_allocator< _Alloc > Class Template Reference . . . 1931
4.424.1 Detailed Description . . . 1932
4.425 std::decay< _Tp > Class Template Reference . . . 1932
4.425.1 Detailed Description . . . 1932
4.426 std::decimal::decimal128 Class Reference . . . 1932
4.426.1 Detailed Description . . . 1934
4.426.2 Constructor & Destructor Documentation . . . 1934
4.427 std::decimal::decimal32 Class Reference . . . 1934
4.427.1 Detailed Description . . . 1935
4.427.2 Constructor & Destructor Documentation . . . 1936
4.428 std::decimal::decimal64 Class Reference . . . 1936
4.428.1 Detailed Description . . . 1937
4.428.2 Constructor & Destructor Documentation . . . 1937
4.429 __gnu_pbds::detail::default_comb_hash_fn Struct Reference . . . 1937
4.429.1 Detailed Description . . . 1938
4.429.2 Member Typedef Documentation . . . 1938
4.430 std::default_delete< _Tp > Struct Template Reference . . . 1938
4.430.1 Detailed Description . . . 1938
4.430.2 Constructor & Destructor Documentation . . . 1938
4.430.3 Member Function Documentation . . . 1939

4.431 std::default_delete< _Tp[]> Struct Template Reference 1939
4.431.1 Detailed Description 1939
4.431.2 Constructor & Destructor Documentation 1939
4.431.3 Member Function Documentation 1939
4.432 __gnu_pbds::detail::default_eq_fn< Key > Struct Template Reference 1940
4.432.1 Detailed Description 1940
4.432.2 Member Typedef Documentation 1940
4.433 __gnu_pbds::detail::default_hash_fn< Key > Struct Template Reference 1940
4.433.1 Detailed Description 1940
4.433.2 Member Typedef Documentation 1941
4.434 __gnu_parallel::default_parallel_tag Struct Reference 1941
4.434.1 Detailed Description 1941
4.434.2 Member Function Documentation 1941
4.435 __gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn > Struct Template Reference 1942
4.435.1 Detailed Description 1942
4.435.2 Member Typedef Documentation 1942
4.436 __gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn > Struct Template Reference 1942
4.436.1 Detailed Description 1943
4.436.2 Member Typedef Documentation 1943
4.437 __gnu_pbds::detail::default_trie_access_traits< Key > Struct Template Reference 1943
4.437.1 Detailed Description 1943
4.438 __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > > Struct Template Reference 1943
4.438.1 Detailed Description 1943
4.438.2 Member Typedef Documentation 1944
4.439 __gnu_pbds::detail::default_update_policy Struct Reference 1944
4.439.1 Detailed Description 1944
4.439.2 Member Typedef Documentation 1944
4.440 std::defer_lock_t Struct Reference 1944
4.440.1 Detailed Description 1944
4.441 std::deque< _Tp, _Alloc > Class Template Reference 1945
4.441.1 Detailed Description 1949
4.441.2 Constructor & Destructor Documentation 1950
4.441.3 Member Function Documentation 1952
4.442 std::__debug::deque< _Tp, _Allocator > Class Template Reference 1966
4.442.1 Detailed Description 1969
4.442.2 Member Function Documentation 1969

4.442.3 Member Data Documentation . . . 1970
4.443 std::tr2::direct_bases< _Tp > Struct Template Reference . . . 1970
4.443.1 Detailed Description . . . 1970
4.444 __gnu_pbds::direct_mask_range_hashing< Size_Type > Class Template Reference . . . 1971
4.444.1 Detailed Description . . . 1971
4.444.2 Member Function Documentation . . . 1971
4.445 __gnu_pbds::direct_mod_range_hashing< Size_Type > Class Template Reference . . . 1972
4.445.1 Detailed Description . . . 1973
4.445.2 Member Function Documentation . . . 1973
4.446 std::discard_block_engine< _RandomNumberEngine, __p, __r > Class Template Reference . . . 1973
4.446.1 Detailed Description . . . 1974
4.446.2 Member Typedef Documentation . . . 1974
4.446.3 Constructor & Destructor Documentation . . . 1974
4.446.4 Member Function Documentation . . . 1975
4.446.5 Friends And Related Function Documentation . . . 1976
4.447 std::discrete_distribution< _IntType > Class Template Reference . . . 1977
4.447.1 Detailed Description . . . 1979
4.447.2 Member Typedef Documentation . . . 1979
4.447.3 Member Function Documentation . . . 1979
4.447.4 Friends And Related Function Documentation . . . 1980
4.448 std::divides< _Tp > Struct Template Reference . . . 1981
4.448.1 Detailed Description . . . 1981
4.448.2 Member Typedef Documentation . . . 1982
4.449 std::divides< void > Struct Template Reference . . . 1982
4.449.1 Detailed Description . . . 1982
4.450 std::domain_error Class Reference . . . 1983
4.450.1 Detailed Description . . . 1983
4.450.2 Member Function Documentation . . . 1983
4.451 __gnu_pbds::detail::dumnode_const_iterator< Key, Data, _Alloc > Struct Template Reference . . . 1984
4.451.1 Detailed Description . . . 1984
4.452 std::chrono::duration< _Rep, _Period > Struct Template Reference . . . 1984
4.452.1 Detailed Description . . . 1985
4.453 std::chrono::duration_values< _Rep > Struct Template Reference . . . 1986
4.453.1 Detailed Description . . . 1986
4.454 std::tr2::dynamic_bitset< _WordT, _Alloc > Class Template Reference . . . 1986
4.454.1 Detailed Description . . . 1989
4.454.2 Constructor & Destructor Documentation . . . 1990

4.454.3 Member Function Documentation . . . 1992
4.455std::enable_if< bool, _Tp > Struct Template Reference . . . 2002
4.455.1 Detailed Description . . . 2002
4.456std::enable_shared_from_this< _Tp > Class Template Reference . . . 2002
4.456.1 Detailed Description . . . 2002
4.457__gnu_cxx::enc_filebuf< _CharT > Class Template Reference . . . 2003
4.457.1 Detailed Description . . . 2005
4.457.2 Member Function Documentation . . . 2006
4.457.3 Member Data Documentation . . . 2020
4.458__gnu_cxx::encoding_char_traits< _CharT > Struct Template Reference . . . 2023
4.458.1 Detailed Description . . . 2024
4.459__gnu_cxx::encoding_state Class Reference . . . 2024
4.459.1 Detailed Description . . . 2025
4.460__gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, No_Throw > Struct Template Reference . . . 2025
4.460.1 Detailed Description . . . 2025
4.461__gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false > Struct Template Reference . . . 2025
4.461.1 Detailed Description . . . 2025
4.462__gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true > Struct Template Reference . . . 2025
4.462.1 Detailed Description . . . 2026
4.462.2 Member Typedef Documentation . . . 2026
4.463__gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, No_Throw > Struct Template Reference . . . 2026
4.463.1 Detailed Description . . . 2026
4.464__gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, false > Struct Template Reference . . . 2026
4.464.1 Detailed Description . . . 2026
4.465__gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, true > Struct Template Reference . . . 2027
4.465.1 Detailed Description . . . 2027
4.466__gnu_pbds::detail::eq_by_less< Key, Cmp_Fn > Struct Template Reference . . . 2027
4.466.1 Detailed Description . . . 2027
4.467__gnu_parallel::equal_split_tag Struct Reference . . . 2028
4.467.1 Detailed Description . . . 2028
4.468std::equal_to< _Tp > Struct Template Reference . . . 2028
4.468.1 Detailed Description . . . 2029
4.468.2 Member Typedef Documentation . . . 2029
4.469std::equal_to< void > Struct Template Reference . . . 2029
4.469.1 Detailed Description . . . 2030
4.470std::_V2::error_category Class Reference . . . 2030
4.470.1 Detailed Description . . . 2030

4.471 std::error_code Struct Reference . . . 2030
4.471.1 Detailed Description . . . 2031
4.472 std::error_condition Struct Reference . . . 2031
4.472.1 Detailed Description . . . 2032
4.473 __gnu_parallel::exact_tag Struct Reference . . . 2032
4.473.1 Detailed Description . . . 2033
4.473.2 Member Function Documentation . . . 2033
4.474 std::exception Class Reference . . . 2034
4.474.1 Detailed Description . . . 2034
4.475 std::__exception_ptr::exception_ptr Class Reference . . . 2035
4.475.1 Detailed Description . . . 2035
4.475.2 Friends And Related Function Documentation . . . 2035
4.476 std::exponential_distribution< _RealType > Class Template Reference . . . 2036
4.476.1 Detailed Description . . . 2036
4.476.2 Member Typedef Documentation . . . 2037
4.476.3 Constructor & Destructor Documentation . . . 2037
4.476.4 Member Function Documentation . . . 2037
4.476.5 Friends And Related Function Documentation . . . 2038
4.477 std::extent< _Tp > Struct Template Reference . . . 2039
4.477.1 Detailed Description . . . 2039
4.478 std::extreme_value_distribution< _RealType > Class Template Reference . . . 2039
4.478.1 Detailed Description . . . 2040
4.478.2 Member Typedef Documentation . . . 2041
4.478.3 Member Function Documentation . . . 2041
4.478.4 Friends And Related Function Documentation . . . 2043
4.479 std::locale::facet Class Reference . . . 2044
4.479.1 Detailed Description . . . 2045
4.479.2 Constructor & Destructor Documentation . . . 2045
4.480 std::ios_base::failure Class Reference . . . 2046
4.480.1 Detailed Description . . . 2046
4.480.2 Member Function Documentation . . . 2046
4.481 __gnu_parallel::find_tag Struct Reference . . . 2047
4.481.1 Detailed Description . . . 2047
4.482 std::fisher_f_distribution< _RealType > Class Template Reference . . . 2047
4.482.1 Detailed Description . . . 2048
4.482.2 Member Typedef Documentation . . . 2048
4.482.3 Member Function Documentation . . . 2049

4.482.4 Friends And Related Function Documentation . . . 2049
4.483 __gnu_cxx::forced_error Struct Reference . . . 2050
4.483.1 Detailed Description . . . 2051
4.484 std::forward_iterator_tag Struct Reference . . . 2051
4.484.1 Detailed Description . . . 2051
4.485 std::__debug::forward_list< _Tp, _Allocator > Class Template Reference . . . 2052
4.485.1 Detailed Description . . . 2054
4.485.2 Member Function Documentation . . . 2054
4.485.3 Member Data Documentation . . . 2055
4.486 std::forward_list< _Tp, _Alloc > Class Template Reference . . . 2056
4.486.1 Detailed Description . . . 2058
4.486.2 Constructor & Destructor Documentation . . . 2059
4.486.3 Member Function Documentation . . . 2061
4.487 std::fpos< _StateT > Class Template Reference . . . 2073
4.487.1 Detailed Description . . . 2073
4.487.2 Constructor & Destructor Documentation . . . 2073
4.487.3 Member Function Documentation . . . 2074
4.488 __gnu_cxx::free_list Class Reference . . . 2075
4.488.1 Detailed Description . . . 2075
4.488.2 Member Function Documentation . . . 2075
4.489 std::from_chars_result Struct Reference . . . 2076
4.489.1 Detailed Description . . . 2076
4.490 std::front_insert_iterator< _Container > Class Template Reference . . . 2077
4.490.1 Detailed Description . . . 2077
4.490.2 Member Typedef Documentation . . . 2078
4.490.3 Constructor & Destructor Documentation . . . 2078
4.490.4 Member Function Documentation . . . 2078
4.491 std::function< _Res(_ArgTypes...)> Class Template Reference . . . 2079
4.491.1 Detailed Description . . . 2081
4.491.2 Constructor & Destructor Documentation . . . 2081
4.491.3 Member Function Documentation . . . 2082
4.492 std::future< _Res > Class Template Reference . . . 2086
4.492.1 Detailed Description . . . 2088
4.492.2 Member Typedef Documentation . . . 2088
4.492.3 Constructor & Destructor Documentation . . . 2088
4.492.4 Member Function Documentation . . . 2088
4.493 std::future< _Res & > Class Template Reference . . . 2089

4.493.1 Detailed Description . . . 2090
4.493.2 Member Typedef Documentation . . . 2090
4.493.3 Constructor & Destructor Documentation . . . 2090
4.493.4 Member Function Documentation . . . 2091
4.494 std::future< void > Class Template Reference . . . 2091
4.494.1 Detailed Description . . . 2093
4.494.2 Member Typedef Documentation . . . 2093
4.494.3 Constructor & Destructor Documentation . . . 2093
4.494.4 Member Function Documentation . . . 2093
4.495 std::future_error Class Reference . . . 2094
4.495.1 Detailed Description . . . 2094
4.495.2 Member Function Documentation . . . 2094
4.496 std::gamma_distribution< _RealType > Class Template Reference . . . 2095
4.496.1 Detailed Description . . . 2096
4.496.2 Member Typedef Documentation . . . 2096
4.496.3 Constructor & Destructor Documentation . . . 2096
4.496.4 Member Function Documentation . . . 2096
4.496.5 Friends And Related Function Documentation . . . 2098
4.497 std::geometric_distribution< _IntType > Class Template Reference . . . 2098
4.497.1 Detailed Description . . . 2099
4.497.2 Member Typedef Documentation . . . 2099
4.497.3 Member Function Documentation . . . 2100
4.497.4 Friends And Related Function Documentation . . . 2101
4.498 __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc > Class Template Reference . . . 2101
4.498.1 Detailed Description . . . 2102
4.498.2 Constructor & Destructor Documentation . . . 2102
4.499 __gnu_pbds::gp_hash_tag Struct Reference . . . 2106
4.499.1 Detailed Description . . . 2106
4.500 __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy > Class Template Reference . . . 2107
4.500.1 Detailed Description . . . 2109
4.500.2 Member Enumeration Documentation . . . 2109
4.500.3 Member Function Documentation . . . 2110
4.501 std::greater< _Tp > Struct Template Reference . . . 2112
4.501.1 Detailed Description . . . 2112
4.501.2 Member Typedef Documentation . . . 2112

4.502std::greater< void > Struct Template Reference . . . 2113
4.502.1 Detailed Description . . . 2113
4.503std::greater_equal< _Tp > Struct Template Reference . . . 2114
4.503.1 Detailed Description . . . 2114
4.503.2 Member Typedef Documentation . . . 2114
4.504std::greater_equal< void > Struct Template Reference . . . 2115
4.504.1 Detailed Description . . . 2115
4.505__gnu_cxx::random_condition::group_adjustor Struct Reference . . . 2115
4.505.1 Detailed Description . . . 2115
4.506__gnu_parallel::growing_blocks_tag Struct Reference . . . 2116
4.506.1 Detailed Description . . . 2116
4.507std::gslice Class Reference . . . 2116
4.507.1 Detailed Description . . . 2117
4.508std::gslice_array< _Tp > Class Template Reference . . . 2117
4.508.1 Detailed Description . . . 2118
4.509std::has_virtual_destructor< _Tp > Struct Template Reference . . . 2119
4.509.1 Detailed Description . . . 2119
4.510std::hash< _Tp > Struct Template Reference . . . 2119
4.510.1 Detailed Description . . . 2120
4.511std::hash< __debug::bitset< _Nb > > Struct Template Reference . . . 2120
4.511.1 Detailed Description . . . 2120
4.512std::hash< __debug::vector< bool, _Alloc > > Struct Template Reference . . . 2120
4.512.1 Detailed Description . . . 2121
4.513std::hash< __gnu_cxx::__u16vstring > Struct Template Reference . . . 2121
4.513.1 Detailed Description . . . 2121
4.514std::hash< __gnu_cxx::__u32vstring > Struct Template Reference . . . 2121
4.514.1 Detailed Description . . . 2122
4.515std::hash< __gnu_cxx::__vstring > Struct Template Reference . . . 2122
4.515.1 Detailed Description . . . 2122
4.516std::hash< __gnu_cxx::__wvstring > Struct Template Reference . . . 2122
4.516.1 Detailed Description . . . 2123
4.517std::hash< __gnu_cxx::throw_value_limit > Struct Template Reference . . . 2123
4.517.1 Detailed Description . . . 2123
4.517.2 Member Typedef Documentation . . . 2124
4.518std::hash< __gnu_cxx::throw_value_random > Struct Template Reference . . . 2124
4.518.1 Detailed Description . . . 2125
4.518.2 Member Typedef Documentation . . . 2125

4.519std::hash< __shared_ptr< _Tp, _Lp > > Struct Template Reference 2125
4.519.1 Detailed Description 2125
4.520std::hash< _Tp * > Struct Template Reference 2126
4.520.1 Detailed Description 2126
4.521std::hash< bool > Struct Template Reference 2126
4.521.1 Detailed Description 2126
4.522std::hash< char > Struct Template Reference 2127
4.522.1 Detailed Description 2127
4.523std::hash< char16_t > Struct Template Reference 2127
4.523.1 Detailed Description 2127
4.524std::hash< char32_t > Struct Template Reference 2128
4.524.1 Detailed Description 2128
4.525std::hash< double > Struct Template Reference 2128
4.525.1 Detailed Description 2128
4.526std::hash< error_code > Struct Template Reference 2129
4.526.1 Detailed Description 2129
4.527std::hash< experimental::optional< _Tp > > Struct Template Reference 2129
4.527.1 Detailed Description 2129
4.528std::hash< experimental::shared_ptr< _Tp > > Struct Template Reference 2129
4.528.1 Detailed Description 2130
4.529std::hash< float > Struct Template Reference 2130
4.529.1 Detailed Description 2130
4.530std::hash< int > Struct Template Reference 2130
4.530.1 Detailed Description 2131
4.531std::hash< long > Struct Template Reference 2131
4.531.1 Detailed Description 2131
4.532std::hash< long double > Struct Template Reference 2131
4.532.1 Detailed Description 2132
4.533std::hash< long long > Struct Template Reference 2132
4.533.1 Detailed Description 2132
4.534std::hash< shared_ptr< _Tp > > Struct Template Reference 2132
4.534.1 Detailed Description 2133
4.535std::hash< short > Struct Template Reference 2133
4.535.1 Detailed Description 2133
4.536std::hash< signed char > Struct Template Reference 2133
4.536.1 Detailed Description 2134
4.537std::hash< string > Struct Template Reference 2134

4.537.1 Detailed Description . . . 2134
4.538std::hash< thread::id > Struct Template Reference . . . 2134
4.538.1 Detailed Description . . . 2135
4.539std::hash< type_index > Struct Template Reference . . . 2135
4.539.1 Detailed Description . . . 2135
4.540std::hash< u16string > Struct Template Reference . . . 2135
4.540.1 Detailed Description . . . 2136
4.541std::hash< u32string > Struct Template Reference . . . 2136
4.541.1 Detailed Description . . . 2136
4.542std::hash< unique_ptr< _Tp, _Dp > > Struct Template Reference . . . 2136
4.542.1 Detailed Description . . . 2137
4.543std::hash< unsigned char > Struct Template Reference . . . 2137
4.543.1 Detailed Description . . . 2137
4.544std::hash< unsigned int > Struct Template Reference . . . 2137
4.544.1 Detailed Description . . . 2138
4.545std::hash< unsigned long > Struct Template Reference . . . 2138
4.545.1 Detailed Description . . . 2138
4.546std::hash< unsigned long long > Struct Template Reference . . . 2138
4.546.1 Detailed Description . . . 2139
4.547std::hash< unsigned short > Struct Template Reference . . . 2139
4.547.1 Detailed Description . . . 2139
4.548std::hash< wchar_t > Struct Template Reference . . . 2139
4.548.1 Detailed Description . . . 2140
4.549std::hash< wstring > Struct Template Reference . . . 2140
4.549.1 Detailed Description . . . 2140
4.550std::hash<::bitset< _Nb > > Struct Template Reference . . . 2140
4.550.1 Detailed Description . . . 2141
4.551std::hash<::vector< bool, _Alloc > > Struct Template Reference . . . 2141
4.551.1 Detailed Description . . . 2141
4.552__gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, Store_Hash > Struct Template Reference . . . 2142
4.552.1 Detailed Description . . . 2142
4.553__gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, false > Struct Template Reference . . . 2142
4.553.1 Detailed Description . . . 2143
4.554__gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, true > Struct Template Reference . . . 2143
4.554.1 Detailed Description . . . 2143
4.555__gnu_pbds::hash_exponential_size_policy< Size_Type > Class Template Reference . . . 2143
4.555.1 Detailed Description . . . 2144

4.555.2 Constructor & Destructor Documentation . . . 2144
4.556 __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type > Class Template Reference . . . 2144
4.556.1 Detailed Description . . . 2145
4.556.2 Member Enumeration Documentation . . . 2145
4.556.3 Constructor & Destructor Documentation . . . 2145
4.556.4 Member Function Documentation . . . 2146
4.557 __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, Hold_Size > Class Template Reference . . . 2146
4.557.1 Detailed Description . . . 2146
4.558 __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, true > Class Template Reference . . . 2147
4.558.1 Detailed Description . . . 2147
4.559 __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc > Class Template Reference . . . 2147
4.559.1 Detailed Description . . . 2149
4.560 __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc > Class Template Reference . . . 2149
4.560.1 Detailed Description . . . 2150
4.561 __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc > Class Template Reference . . . 2151
4.561.1 Detailed Description . . . 2152
4.562 __gnu_pbds::hash_prime_size_policy Class Reference . . . 2152
4.562.1 Detailed Description . . . 2152
4.562.2 Member Typedef Documentation . . . 2153
4.562.3 Constructor & Destructor Documentation . . . 2153
4.563 __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc > Class Template Reference . . . 2153
4.563.1 Detailed Description . . . 2154
4.564 __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type > Class Template Reference . . . 2155
4.564.1 Detailed Description . . . 2156
4.564.2 Constructor & Destructor Documentation . . . 2156
4.564.3 Member Function Documentation . . . 2156
4.565 std::locale::id Class Reference . . . 2157
4.565.1 Detailed Description . . . 2158
4.565.2 Constructor & Destructor Documentation . . . 2158
4.565.3 Friends And Related Function Documentation . . . 2158
4.566 std::thread::id Class Reference . . . 2159
4.566.1 Detailed Description . . . 2159
4.567 std::experimental::fundamentals_v1::in_place_t Struct Reference . . . 2159
4.567.1 Detailed Description . . . 2159

4.568 std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > Class Template Reference 2160
4.568.1 Detailed Description . . . 2160
4.568.2 Member Typedef Documentation . . . 2161
4.568.3 Constructor & Destructor Documentation . . . 2161
4.568.4 Member Function Documentation . . . 2162
4.568.5 Friends And Related Function Documentation . . . 2163
4.569 std::indirect_array< _Tp > Class Template Reference . . . 2164
4.569.1 Detailed Description . . . 2165
4.570 std::initializer_list< _E > Class Template Reference . . . 2165
4.570.1 Detailed Description . . . 2166
4.570.2 Friends And Related Function Documentation . . . 2166
4.571 std::input_iterator_tag Struct Reference . . . 2167
4.571.1 Detailed Description . . . 2167
4.572 __gnu_pbds::insert_error Struct Reference . . . 2168
4.572.1 Detailed Description . . . 2168
4.572.2 Member Function Documentation . . . 2168
4.573 std::insert_iterator< _Container > Class Template Reference . . . 2169
4.573.1 Detailed Description . . . 2169
4.573.2 Member Typedef Documentation . . . 2170
4.573.3 Constructor & Destructor Documentation . . . 2170
4.573.4 Member Function Documentation . . . 2170
4.574 std::integer_sequence< _Tp, _Idx > Struct Template Reference . . . 2171
4.574.1 Detailed Description . . . 2172
4.575 std::integral_constant< _Tp, __v > Struct Template Reference . . . 2173
4.575.1 Detailed Description . . . 2174
4.576 std::invalid_argument Class Reference . . . 2174
4.576.1 Detailed Description . . . 2175
4.576.2 Member Function Documentation . . . 2175
4.577 std::ios_base Class Reference . . . 2175
4.577.1 Detailed Description . . . 2178
4.577.2 Member Typedef Documentation . . . 2178
4.577.3 Member Enumeration Documentation . . . 2180
4.577.4 Constructor & Destructor Documentation . . . 2180
4.577.5 Member Function Documentation . . . 2180
4.577.6 Member Data Documentation . . . 2186
4.578 std::is_abstract< _Tp > Struct Template Reference . . . 2191
4.578.1 Detailed Description . . . 2191

4.579 std::is_arithmetic< _Tp > Struct Template Reference 2192
4.579.1 Detailed Description 2192
4.580 std::is_array< typename > Struct Template Reference 2192
4.580.1 Detailed Description 2193
4.581 std::is_assignable< _Tp, _Up > Struct Template Reference 2193
4.581.1 Detailed Description 2194
4.582 std::is_base_of< _Base, _Derived > Struct Template Reference 2194
4.582.1 Detailed Description 2195
4.583 std::is_bind_expression< _Tp > Struct Template Reference 2195
4.583.1 Detailed Description 2195
4.584 std::is_bind_expression< _Bind< _Signature > > Struct Template Reference 2196
4.584.1 Detailed Description 2196
4.585 std::is_bind_expression< _Bind_result< _Result, _Signature > > Struct Template Reference 2197
4.585.1 Detailed Description 2197
4.586 std::is_bind_expression< const _Bind< _Signature > > Struct Template Reference 2198
4.586.1 Detailed Description 2198
4.587 std::is_bind_expression< const _Bind_result< _Result, _Signature > > Struct Template Reference . . 2199
4.587.1 Detailed Description 2199
4.588 std::is_bind_expression< const volatile _Bind< _Signature > > Struct Template Reference 2200
4.588.1 Detailed Description 2200
4.589 std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > > Struct Template Reference 2201
4.589.1 Detailed Description 2201
4.590 std::is_bind_expression< volatile _Bind< _Signature > > Struct Template Reference 2202
4.590.1 Detailed Description 2202
4.591 std::is_bind_expression< volatile _Bind_result< _Result, _Signature > > Struct Template Reference . 2203
4.591.1 Detailed Description 2203
4.592 std::is_class< _Tp > Struct Template Reference 2204
4.592.1 Detailed Description 2204
4.593 std::is_compound< _Tp > Struct Template Reference 2205
4.593.1 Detailed Description 2205
4.594 std::is_const< typename > Struct Template Reference 2206
4.594.1 Detailed Description 2206
4.595 std::is_constructible< _Tp, _Args > Struct Template Reference 2206
4.595.1 Detailed Description 2207
4.596 std::is_convertible< _From, _To > Struct Template Reference 2207
4.596.1 Detailed Description 2207

4.597std::is_copy_assignable< _Tp > Struct Template Reference 2207
4.597.1 Detailed Description 2208
4.598std::is_copy_constructible< _Tp > Struct Template Reference 2208
4.598.1 Detailed Description 2208
4.599std::is_default_constructible< _Tp > Struct Template Reference 2208
4.599.1 Detailed Description 2208
4.600std::is_destructible< _Tp > Struct Template Reference 2208
4.600.1 Detailed Description 2209
4.601std::is_empty< _Tp > Struct Template Reference 2209
4.601.1 Detailed Description 2209
4.602std::is_enum< _Tp > Struct Template Reference 2210
4.602.1 Detailed Description 2210
4.603std::is_error_code_enum< _Tp > Struct Template Reference 2211
4.603.1 Detailed Description 2211
4.604std::is_error_code_enum< future_errc > Struct Template Reference 2212
4.604.1 Detailed Description 2212
4.605std::is_error_condition_enum< _Tp > Struct Template Reference 2213
4.605.1 Detailed Description 2213
4.606std::is_final< _Tp > Struct Template Reference 2214
4.606.1 Detailed Description 2214
4.607std::is_floating_point< _Tp > Struct Template Reference 2214
4.607.1 Detailed Description 2215
4.608std::is_function< typename > Struct Template Reference 2215
4.608.1 Detailed Description 2215
4.609std::is_fundamental< _Tp > Struct Template Reference 2216
4.609.1 Detailed Description 2216
4.610std::is_integral< _Tp > Struct Template Reference 2216
4.610.1 Detailed Description 2217
4.611std::is_literal_type< _Tp > Struct Template Reference 2217
4.611.1 Detailed Description 2218
4.612std::is_lvalue_reference< typename > Struct Template Reference 2218
4.612.1 Detailed Description 2219
4.613std::is_member_function_pointer< _Tp > Struct Template Reference 2219
4.613.1 Detailed Description 2220
4.614std::is_member_object_pointer< _Tp > Struct Template Reference 2220
4.614.1 Detailed Description 2220
4.615std::is_member_pointer< typename > Struct Template Reference 2220

4.615.1 Detailed Description . . . 2221
4.616std::is_move_assignable< _Tp > Struct Template Reference . . . 2221
4.616.1 Detailed Description . . . 2221
4.617std::is_move_constructible< _Tp > Struct Template Reference . . . 2221
4.617.1 Detailed Description . . . 2221
4.618std::is_nothrow_assignable< _Tp, _Up > Struct Template Reference . . . 2222
4.618.1 Detailed Description . . . 2222
4.619std::is_nothrow_constructible< _Tp, _Args > Struct Template Reference . . . 2222
4.619.1 Detailed Description . . . 2223
4.620std::is_nothrow_copy_assignable< _Tp > Struct Template Reference . . . 2223
4.620.1 Detailed Description . . . 2223
4.621std::is_nothrow_copy_constructible< _Tp > Struct Template Reference . . . 2223
4.621.1 Detailed Description . . . 2223
4.622std::is_nothrow_default_constructible< _Tp > Struct Template Reference . . . 2224
4.622.1 Detailed Description . . . 2224
4.623std::is_nothrow_destructible< _Tp > Struct Template Reference . . . 2224
4.623.1 Detailed Description . . . 2225
4.624std::is_nothrow_move_assignable< _Tp > Struct Template Reference . . . 2225
4.624.1 Detailed Description . . . 2225
4.625std::is_nothrow_move_constructible< _Tp > Struct Template Reference . . . 2225
4.625.1 Detailed Description . . . 2225
4.626std::is_nothrow_swappable< _Tp > Struct Template Reference . . . 2225
4.626.1 Detailed Description . . . 2225
4.627std::is_nothrow_swappable_with< _Tp, _Up > Struct Template Reference . . . 2226
4.627.1 Detailed Description . . . 2226
4.628std::is_null_pointer< _Tp > Struct Template Reference . . . 2226
4.628.1 Detailed Description . . . 2226
4.629std::is_object< _Tp > Struct Template Reference . . . 2227
4.629.1 Detailed Description . . . 2227
4.630std::is_placeholder< _Tp > Struct Template Reference . . . 2228
4.630.1 Detailed Description . . . 2228
4.631std::is_placeholder< _Placeholder< _Num > > Struct Template Reference . . . 2229
4.631.1 Detailed Description . . . 2229
4.632std::is_pod< _Tp > Struct Template Reference . . . 2230
4.632.1 Detailed Description . . . 2230
4.633std::is_pointer< _Tp > Struct Template Reference . . . 2230
4.633.1 Detailed Description . . . 2231

4.634std::is_polymorphic< _Tp > Struct Template Reference 2231
4.634.1 Detailed Description 2231
4.635std::is_reference< typename > Struct Template Reference 2232
4.635.1 Detailed Description 2232
4.636std::is_rvalue_reference< typename > Struct Template Reference 2232
4.636.1 Detailed Description 2233
4.637std::is_same< typename, typename > Struct Template Reference 2233
4.637.1 Detailed Description 2234
4.638std::is_scalar< _Tp > Struct Template Reference 2234
4.638.1 Detailed Description 2234
4.639std::is_standard_layout< _Tp > Struct Template Reference 2234
4.639.1 Detailed Description 2235
4.640std::is_swappable< _Tp > Struct Template Reference 2235
4.640.1 Detailed Description 2235
4.641std::is_swappable_with< _Tp, _Up > Struct Template Reference 2235
4.641.1 Detailed Description 2236
4.642std::is_trivial< _Tp > Struct Template Reference 2236
4.642.1 Detailed Description 2236
4.643std::is_trivially_assignable< _Tp, _Up > Struct Template Reference 2237
4.643.1 Detailed Description 2237
4.644std::is_trivially_constructible< _Tp, _Args > Struct Template Reference 2238
4.644.1 Detailed Description 2238
4.645std::is_trivially_copy_assignable< _Tp > Struct Template Reference 2239
4.645.1 Detailed Description 2239
4.646std::is_trivially_copy_constructible< _Tp > Struct Template Reference 2239
4.646.1 Detailed Description 2239
4.647std::is_trivially_default_constructible< _Tp > Struct Template Reference 2239
4.647.1 Detailed Description 2240
4.648std::is_trivially_destructible< _Tp > Struct Template Reference 2240
4.648.1 Detailed Description 2240
4.649std::is_trivially_move_assignable< _Tp > Struct Template Reference 2240
4.649.1 Detailed Description 2241
4.650std::is_trivially_move_constructible< _Tp > Struct Template Reference 2241
4.650.1 Detailed Description 2241
4.651std::is_union< _Tp > Struct Template Reference 2241
4.651.1 Detailed Description 2242
4.652std::is_void< typename > Struct Template Reference 2242

4.652.1 Detailed Description . . . 2243
4.653 std::is_volatile< typename > Struct Template Reference . . . 2243
4.653.1 Detailed Description . . . 2244
4.654 std::istream_iterator< _Tp, _CharT, _Traits, _Dist > Class Template Reference . . . 2244
4.654.1 Detailed Description . . . 2245
4.654.2 Member Typedef Documentation . . . 2245
4.654.3 Constructor & Destructor Documentation . . . 2246
4.654.4 Friends And Related Function Documentation . . . 2246
4.655 std::istreambuf_iterator< _CharT, _Traits > Class Template Reference . . . 2247
4.655.1 Detailed Description . . . 2248
4.655.2 Member Typedef Documentation . . . 2248
4.655.3 Constructor & Destructor Documentation . . . 2249
4.655.4 Member Function Documentation . . . 2250
4.656 std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference > Struct Template Reference . . . 2250
4.656.1 Detailed Description . . . 2251
4.656.2 Member Typedef Documentation . . . 2251
4.657 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::iterator Struct Reference . . . 2252
4.657.1 Detailed Description . . . 2253
4.658 std::iterator_traits< typename > Struct Template Reference . . . 2253
4.658.1 Detailed Description . . . 2253
4.659 std::iterator_traits< _Tp * > Struct Template Reference . . . 2253
4.659.1 Detailed Description . . . 2253
4.660 std::iterator_traits< const _Tp * > Struct Template Reference . . . 2254
4.660.1 Detailed Description . . . 2254
4.661 __gnu_pbds::join_error Struct Reference . . . 2255
4.661.1 Detailed Description . . . 2255
4.661.2 Member Function Documentation . . . 2255
4.662 __gnu_pbds::detail::left_child_next_sibling_heap< Value_Type, Cmp_Fn, Node_Metadata, _Alloc > Class Template Reference . . . 2256
4.662.1 Detailed Description . . . 2257
4.663 __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc > Class Template Reference . . . 2258
4.663.1 Detailed Description . . . 2259
4.663.2 Member Typedef Documentation . . . 2259
4.663.3 Constructor & Destructor Documentation . . . 2260
4.663.4 Member Function Documentation . . . 2260
4.664 __gnu_pbds::detail::left_child_next_sibling_heap_node_< _Value, _Metadata, _Alloc > Struct Template Reference . . . 2261

4.664.1 Detailed Description . . . 2261
4.665__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > Class Template Reference . . . 2262
4.665.1 Detailed Description . . . 2263
4.665.2 Member Typedef Documentation . . . 2263
4.665.3 Constructor & Destructor Documentation . . . 2264
4.665.4 Member Function Documentation . . . 2264
4.666std::length_error Class Reference . . . 2265
4.666.1 Detailed Description . . . 2266
4.666.2 Member Function Documentation . . . 2266
4.667std::less< _Tp > Struct Template Reference . . . 2266
4.667.1 Detailed Description . . . 2267
4.667.2 Member Typedef Documentation . . . 2267
4.668std::less< void > Struct Template Reference . . . 2267
4.668.1 Detailed Description . . . 2267
4.669std::less_equal< _Tp > Struct Template Reference . . . 2268
4.669.1 Detailed Description . . . 2268
4.669.2 Member Typedef Documentation . . . 2268
4.670std::less_equal< void > Struct Template Reference . . . 2269
4.670.1 Detailed Description . . . 2269
4.671__gnu_cxx::limit_condition::limit_adjustor Struct Reference . . . 2269
4.671.1 Detailed Description . . . 2269
4.672__gnu_cxx::limit_condition Struct Reference . . . 2270
4.672.1 Detailed Description . . . 2270
4.673std::linear_congruential_engine< _UIntType, __a, __c, __m > Class Template Reference . . . 2270
4.673.1 Detailed Description . . . 2271
4.673.2 Member Typedef Documentation . . . 2271
4.673.3 Constructor & Destructor Documentation . . . 2272
4.673.4 Member Function Documentation . . . 2272
4.673.5 Friends And Related Function Documentation . . . 2273
4.673.6 Member Data Documentation . . . 2274
4.674__gnu_pbds::linear_probe_fn< Size_Type > Class Template Reference . . . 2275
4.674.1 Detailed Description . . . 2275
4.674.2 Member Function Documentation . . . 2275
4.675std::__debug::list< _Tp, _Allocator > Class Template Reference . . . 2276
4.675.1 Detailed Description . . . 2278
4.675.2 Member Function Documentation . . . 2278

4.675.3 Member Data Documentation . . . 2279
4.676 std::list< _Tp, _Alloc > Class Template Reference . . . 2280
4.676.1 Detailed Description . . . 2284
4.676.2 Constructor & Destructor Documentation . . . 2284
4.676.3 Member Function Documentation . . . 2287
4.677 __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc > Class Template Reference . . . 2301
4.677.1 Detailed Description . . . 2302
4.677.2 Constructor & Destructor Documentation . . . 2302
4.678 __gnu_pbds::list_update_tag Struct Reference . . . 2303
4.678.1 Detailed Description . . . 2303
4.679 std::locale Class Reference . . . 2303
4.679.1 Detailed Description . . . 2305
4.679.2 Member Typedef Documentation . . . 2305
4.679.3 Constructor & Destructor Documentation . . . 2305
4.679.4 Member Function Documentation . . . 2307
4.679.5 Friends And Related Function Documentation . . . 2309
4.679.6 Member Data Documentation . . . 2310
4.680 std::lock_guard< _Mutex > Class Template Reference . . . 2311
4.680.1 Detailed Description . . . 2312
4.681 std::logic_error Class Reference . . . 2312
4.681.1 Detailed Description . . . 2312
4.681.2 Constructor & Destructor Documentation . . . 2313
4.681.3 Member Function Documentation . . . 2313
4.682 std::logical_and< _Tp > Struct Template Reference . . . 2313
4.682.1 Detailed Description . . . 2314
4.682.2 Member Typedef Documentation . . . 2314
4.683 std::logical_and< void > Struct Template Reference . . . 2314
4.683.1 Detailed Description . . . 2314
4.684 std::logical_not< _Tp > Struct Template Reference . . . 2315
4.684.1 Detailed Description . . . 2315
4.684.2 Member Typedef Documentation . . . 2315
4.685 std::logical_not< void > Struct Template Reference . . . 2316
4.685.1 Detailed Description . . . 2316
4.686 std::logical_or< _Tp > Struct Template Reference . . . 2316
4.686.1 Detailed Description . . . 2317
4.686.2 Member Typedef Documentation . . . 2317
4.687 std::logical_or< void > Struct Template Reference . . . 2317

4.687.1 Detailed Description . . . 2318
4.688 std::lognormal_distribution< _RealType > Class Template Reference . . . 2318
4.688.1 Detailed Description . . . 2319
4.688.2 Member Typedef Documentation . . . 2319
4.688.3 Member Function Documentation . . . 2319
4.688.4 Friends And Related Function Documentation . . . 2320
4.689 __gnu_pbds::detail::lu_counter_metadata< Size_Type > Class Template Reference . . . 2321
4.689.1 Detailed Description . . . 2321
4.690 __gnu_pbds::lu_counter_policy< Max_Count, _Alloc > Class Template Reference . . . 2322
4.690.1 Detailed Description . . . 2322
4.690.2 Member Typedef Documentation . . . 2323
4.690.3 Member Enumeration Documentation . . . 2323
4.690.4 Member Function Documentation . . . 2323
4.691 __gnu_pbds::detail::lu_counter_policy_base< Size_Type > Class Template Reference . . . 2323
4.691.1 Detailed Description . . . 2324
4.692 __gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy > Class Template Reference 2324
4.692.1 Detailed Description . . . 2326
4.693 __gnu_pbds::lu_move_to_front_policy< _Alloc > Class Template Reference . . . 2326
4.693.1 Detailed Description . . . 2327
4.693.2 Member Typedef Documentation . . . 2327
4.693.3 Member Function Documentation . . . 2327
4.694 std::make_signed< _Tp > Struct Template Reference . . . 2327
4.694.1 Detailed Description . . . 2328
4.695 std::make_unsigned< _Tp > Struct Template Reference . . . 2328
4.695.1 Detailed Description . . . 2328
4.696 __gnu_cxx::malloc_allocator< _Tp > Class Template Reference . . . 2328
4.696.1 Detailed Description . . . 2329
4.697 std::__debug::map< _Key, _Tp, _Compare, _Allocator > Class Template Reference . . . 2329
4.697.1 Detailed Description . . . 2332
4.697.2 Member Function Documentation . . . 2332
4.697.3 Member Data Documentation . . . 2333
4.698 std::map< _Key, _Tp, _Compare, _Alloc > Class Template Reference . . . 2334
4.698.1 Detailed Description . . . 2337
4.698.2 Constructor & Destructor Documentation . . . 2337
4.698.3 Member Function Documentation . . . 2339
4.699 std::mask_array< _Tp > Class Template Reference . . . 2359
4.699.1 Detailed Description . . . 2360

4.700 __gnu_pbds::detail::mask_based_range_hashing< Size_Type > Class Template Reference 2361
4.700.1 Detailed Description 2361
4.701 std::match_results< typename, typename > Class Template Reference 2362
4.701.1 Detailed Description 2365
4.701.2 Constructor & Destructor Documentation 2366
4.701.3 Member Function Documentation 2366
4.702 __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash > Struct Template Reference 2371
4.702.1 Detailed Description 2371
4.703 __gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash > Struct Template Reference 2372
4.703.1 Detailed Description 2372
4.704 std::mem_fun1_ref_t< _Ret, _Tp, _Arg > Class Template Reference 2372
4.704.1 Detailed Description 2373
4.704.2 Member Typedef Documentation 2373
4.705 std::mem_fun1_t< _Ret, _Tp, _Arg > Class Template Reference 2374
4.705.1 Detailed Description 2374
4.705.2 Member Typedef Documentation 2374
4.706 std::mem_fun_ref_t< _Ret, _Tp > Class Template Reference 2375
4.706.1 Detailed Description 2375
4.706.2 Member Typedef Documentation 2375
4.707 std::mem_fun_t< _Ret, _Tp > Class Template Reference 2376
4.707.1 Detailed Description 2376
4.707.2 Member Typedef Documentation 2377
4.708 std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > Class Template Reference 2377
4.708.1 Detailed Description 2378
4.708.2 Member Typedef Documentation 2379
4.708.3 Constructor & Destructor Documentation 2379
4.708.4 Member Function Documentation 2379
4.708.5 Friends And Related Function Documentation 2380
4.709 std::messages< _CharT > Class Template Reference 2382
4.709.1 Detailed Description 2383
4.709.2 Member Typedef Documentation 2384
4.709.3 Constructor & Destructor Documentation 2384
4.709.4 Member Data Documentation 2384
4.710 std::messages_base Struct Reference 2385
4.710.1 Detailed Description 2385
4.711 std::messages_byname< _CharT > Class Template Reference 2386

4.711.1 Detailed Description . . . 2387
4.711.2 Member Data Documentation . . . 2387
4.712std::minus< _Tp > Struct Template Reference . . . 2388
4.712.1 Detailed Description . . . 2388
4.712.2 Member Typedef Documentation . . . 2388
4.713std::minus< void > Struct Template Reference . . . 2389
4.713.1 Detailed Description . . . 2389
4.714__gnu_pbds::detail::mod_based_range_hashing< Size_Type > Class Template Reference . . . 2390
4.714.1 Detailed Description . . . 2390
4.715std::modulus< _Tp > Struct Template Reference . . . 2391
4.715.1 Detailed Description . . . 2391
4.715.2 Member Typedef Documentation . . . 2391
4.716std::modulus< void > Struct Template Reference . . . 2392
4.716.1 Detailed Description . . . 2392
4.717std::money_base Class Reference . . . 2393
4.717.1 Detailed Description . . . 2393
4.718std::money_get< _CharT, _InIter > Class Template Reference . . . 2394
4.718.1 Detailed Description . . . 2395
4.718.2 Member Typedef Documentation . . . 2395
4.718.3 Constructor & Destructor Documentation . . . 2396
4.718.4 Member Function Documentation . . . 2396
4.718.5 Member Data Documentation . . . 2398
4.719std::money_put< _CharT, _OutIter > Class Template Reference . . . 2398
4.719.1 Detailed Description . . . 2399
4.719.2 Member Typedef Documentation . . . 2399
4.719.3 Constructor & Destructor Documentation . . . 2400
4.719.4 Member Function Documentation . . . 2400
4.719.5 Member Data Documentation . . . 2402
4.720std::moneypunct< _CharT, _Intl > Class Template Reference . . . 2403
4.720.1 Detailed Description . . . 2404
4.720.2 Member Typedef Documentation . . . 2405
4.720.3 Constructor & Destructor Documentation . . . 2405
4.720.4 Member Function Documentation . . . 2406
4.720.5 Member Data Documentation . . . 2411
4.721std::moneypunct_byname< _CharT, _Intl > Class Template Reference . . . 2412
4.721.1 Detailed Description . . . 2414
4.721.2 Member Function Documentation . . . 2414

4.721.3 Member Data Documentation . . . 2420
4.722std::move_iterator< _Iterator > Class Template Reference . . . 2420
4.722.1 Detailed Description . . . 2421
4.723std::__debug::multimap< _Key, _Tp, _Compare, _Allocator > Class Template Reference . . . 2421
4.723.1 Detailed Description . . . 2424
4.723.2 Member Function Documentation . . . 2424
4.723.3 Member Data Documentation . . . 2425
4.724std::multimap< _Key, _Tp, _Compare, _Alloc > Class Template Reference . . . 2425
4.724.1 Detailed Description . . . 2428
4.724.2 Constructor & Destructor Documentation . . . 2429
4.724.3 Member Function Documentation . . . 2431
4.725std::multiplies< _Tp > Struct Template Reference . . . 2448
4.725.1 Detailed Description . . . 2448
4.725.2 Member Typedef Documentation . . . 2448
4.726std::multiplies< void > Struct Template Reference . . . 2449
4.726.1 Detailed Description . . . 2449
4.727std::multiset< _Key, _Compare, _Alloc > Class Template Reference . . . 2449
4.727.1 Detailed Description . . . 2452
4.727.2 Constructor & Destructor Documentation . . . 2453
4.727.3 Member Function Documentation . . . 2455
4.728std::__debug::multiset< _Key, _Compare, _Allocator > Class Template Reference . . . 2469
4.728.1 Detailed Description . . . 2471
4.728.2 Member Function Documentation . . . 2472
4.728.3 Member Data Documentation . . . 2472
4.729__gnu_parallel::multiway_mergesort_exact_tag Struct Reference . . . 2473
4.729.1 Detailed Description . . . 2473
4.729.2 Member Function Documentation . . . 2474
4.730__gnu_parallel::multiway_mergesort_sampling_tag Struct Reference . . . 2474
4.730.1 Detailed Description . . . 2475
4.730.2 Member Function Documentation . . . 2475
4.731__gnu_parallel::multiway_mergesort_tag Struct Reference . . . 2475
4.731.1 Detailed Description . . . 2476
4.731.2 Member Function Documentation . . . 2476
4.732std::mutex Class Reference . . . 2476
4.732.1 Detailed Description . . . 2477
4.733std::negate< _Tp > Struct Template Reference . . . 2477
4.733.1 Detailed Description . . . 2478

4.733.2 Member Typedef Documentation . . . 2478
4.734 std::negate< void > Struct Template Reference . . . 2478
4.734.1 Detailed Description . . . 2478
4.735 std::negative_binomial_distribution< _IntType > Class Template Reference . . . 2478
4.735.1 Detailed Description . . . 2480
4.735.2 Member Typedef Documentation . . . 2480
4.735.3 Member Function Documentation . . . 2480
4.735.4 Friends And Related Function Documentation . . . 2481
4.736 std::nested_exception Class Reference . . . 2482
4.736.1 Detailed Description . . . 2482
4.737 __gnu_cxx::limit_condition::never_adjustor Struct Reference . . . 2482
4.737.1 Detailed Description . . . 2482
4.738 __gnu_cxx::random_condition::never_adjustor Struct Reference . . . 2482
4.738.1 Detailed Description . . . 2483
4.739 __gnu_cxx::new_allocator< _Tp > Class Template Reference . . . 2483
4.739.1 Detailed Description . . . 2484
4.740 __gnu_pbds::detail::no_throw_copies< Key, Mapped > Struct Template Reference . . . 2484
4.740.1 Detailed Description . . . 2484
4.741 __gnu_pbds::detail::no_throw_copies< Key, null_type > Struct Template Reference . . . 2485
4.741.1 Detailed Description . . . 2485
4.742 std::normal_distribution< _RealType > Class Template Reference . . . 2485
4.742.1 Detailed Description . . . 2486
4.742.2 Member Typedef Documentation . . . 2486
4.742.3 Constructor & Destructor Documentation . . . 2486
4.742.4 Member Function Documentation . . . 2487
4.742.5 Friends And Related Function Documentation . . . 2488
4.743 std::not_equal_to< _Tp > Struct Template Reference . . . 2489
4.743.1 Detailed Description . . . 2489
4.743.2 Member Typedef Documentation . . . 2490
4.744 std::not_equal_to< void > Struct Template Reference . . . 2490
4.744.1 Detailed Description . . . 2490
4.745 __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 > Struct Template Reference . . . 2491
4.745.1 Detailed Description . . . 2491
4.746 __gnu_pbds::null_type Struct Reference . . . 2491
4.746.1 Detailed Description . . . 2492
4.747 std::experimental::fundamentals_v1::nullopt_t Struct Reference . . . 2492
4.747.1 Detailed Description . . . 2492

4.748std::num_get< _CharT, _InIter > Class Template Reference . . . 2493
4.748.1 Detailed Description . . . 2494
4.748.2 Member Typedef Documentation . . . 2495
4.748.3 Constructor & Destructor Documentation . . . 2495
4.748.4 Member Function Documentation . . . 2495
4.748.5 Member Data Documentation . . . 2507
4.749std::num_put< _CharT, _OutIter > Class Template Reference . . . 2507
4.749.1 Detailed Description . . . 2509
4.749.2 Member Typedef Documentation . . . 2509
4.749.3 Constructor & Destructor Documentation . . . 2509
4.749.4 Member Function Documentation . . . 2510
4.749.5 Member Data Documentation . . . 2517
4.750std::numeric_limits< _Tp > Struct Template Reference . . . 2518
4.750.1 Detailed Description . . . 2519
4.750.2 Member Function Documentation . . . 2519
4.750.3 Member Data Documentation . . . 2520
4.751std::numeric_limits< bool > Struct Template Reference . . . 2523
4.751.1 Detailed Description . . . 2524
4.752std::numeric_limits< char > Struct Template Reference . . . 2524
4.752.1 Detailed Description . . . 2525
4.753std::numeric_limits< char16_t > Struct Template Reference . . . 2525
4.753.1 Detailed Description . . . 2526
4.754std::numeric_limits< char32_t > Struct Template Reference . . . 2526
4.754.1 Detailed Description . . . 2527
4.755std::numeric_limits< double > Struct Template Reference . . . 2527
4.755.1 Detailed Description . . . 2528
4.756std::numeric_limits< float > Struct Template Reference . . . 2528
4.756.1 Detailed Description . . . 2529
4.757std::numeric_limits< int > Struct Template Reference . . . 2529
4.757.1 Detailed Description . . . 2530
4.758std::numeric_limits< long > Struct Template Reference . . . 2530
4.758.1 Detailed Description . . . 2531
4.759std::numeric_limits< long double > Struct Template Reference . . . 2531
4.759.1 Detailed Description . . . 2532
4.760std::numeric_limits< long long > Struct Template Reference . . . 2532
4.760.1 Detailed Description . . . 2533
4.761std::numeric_limits< short > Struct Template Reference . . . 2533

4.761.1 Detailed Description . . . 2534
4.762std::numeric_limits< signed char > Struct Template Reference . . . 2534
4.762.1 Detailed Description . . . 2535
4.763std::numeric_limits< unsigned char > Struct Template Reference . . . 2535
4.763.1 Detailed Description . . . 2536
4.764std::numeric_limits< unsigned int > Struct Template Reference . . . 2536
4.764.1 Detailed Description . . . 2537
4.765std::numeric_limits< unsigned long > Struct Template Reference . . . 2537
4.765.1 Detailed Description . . . 2538
4.766std::numeric_limits< unsigned long long > Struct Template Reference . . . 2538
4.766.1 Detailed Description . . . 2539
4.767std::numeric_limits< unsigned short > Struct Template Reference . . . 2539
4.767.1 Detailed Description . . . 2540
4.768std::numeric_limits< wchar_t > Struct Template Reference . . . 2540
4.768.1 Detailed Description . . . 2541
4.769std::numpunct< _CharT > Class Template Reference . . . 2542
4.769.1 Detailed Description . . . 2543
4.769.2 Member Typedef Documentation . . . 2543
4.769.3 Constructor & Destructor Documentation . . . 2544
4.769.4 Member Function Documentation . . . 2544
4.769.5 Member Data Documentation . . . 2547
4.770std::numpunct_byname< _CharT > Class Template Reference . . . 2548
4.770.1 Detailed Description . . . 2549
4.770.2 Member Function Documentation . . . 2549
4.770.3 Member Data Documentation . . . 2552
4.771__gnu_parallel::omp_loop_static_tag Struct Reference . . . 2553
4.771.1 Detailed Description . . . 2553
4.771.2 Member Function Documentation . . . 2553
4.772__gnu_parallel::omp_loop_tag Struct Reference . . . 2554
4.772.1 Detailed Description . . . 2554
4.772.2 Member Function Documentation . . . 2554
4.773std::once_flag Struct Reference . . . 2556
4.773.1 Detailed Description . . . 2556
4.773.2 Constructor & Destructor Documentation . . . 2556
4.773.3 Member Function Documentation . . . 2556
4.773.4 Friends And Related Function Documentation . . . 2556
4.774std::experimental::fundamentals_v1::optional< _Tp > Class Template Reference . . . 2557

4.774.1 Detailed Description . . . 2559
4.775 std::ostream_iterator< _Tp, _CharT, _Traits > Class Template Reference . . . 2559
4.775.1 Detailed Description . . . 2560
4.775.2 Member Typedef Documentation . . . 2560
4.775.3 Constructor & Destructor Documentation . . . 2561
4.775.4 Member Function Documentation . . . 2561
4.776 std::experimental::fundamentals_v2::ostream_joiner< _DelimT, _CharT, _Traits > Class Template Reference . . . 2562
4.776.1 Detailed Description . . . 2562
4.777 std::ostreambuf_iterator< _CharT, _Traits > Class Template Reference . . . 2563
4.777.1 Detailed Description . . . 2564
4.777.2 Member Typedef Documentation . . . 2564
4.777.3 Constructor & Destructor Documentation . . . 2565
4.777.4 Member Function Documentation . . . 2565
4.778 std::out_of_range Class Reference . . . 2566
4.778.1 Detailed Description . . . 2567
4.778.2 Member Function Documentation . . . 2567
4.779 std::output_iterator_tag Struct Reference . . . 2567
4.779.1 Detailed Description . . . 2567
4.780 __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference . . . 2568
4.780.1 Detailed Description . . . 2570
4.780.2 Member Function Documentation . . . 2570
4.781 __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc > Class Template Reference . . . 2571
4.781.1 Detailed Description . . . 2573
4.781.2 Member Function Documentation . . . 2573
4.782 __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc > Class Template Reference . . . 2573
4.782.1 Detailed Description . . . 2574
4.782.2 Member Function Documentation . . . 2575
4.783 __gnu_pbds::ov_tree_tag Struct Reference . . . 2576
4.783.1 Detailed Description . . . 2576
4.784 std::overflow_error Class Reference . . . 2577
4.784.1 Detailed Description . . . 2577
4.784.2 Member Function Documentation . . . 2577
4.785 std::owner_less< _Tp > Struct Template Reference . . . 2578
4.785.1 Detailed Description . . . 2578
4.786 std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > > Struct Template Reference . . . 2578

4.786.1 Detailed Description . . . 2578
4.786.2 Member Typedef Documentation . . . 2578
4.787std::owner_less< shared_ptr< _Tp > > Struct Template Reference . . . 2579
4.787.1 Detailed Description . . . 2579
4.787.2 Member Typedef Documentation . . . 2579
4.788std::owner_less< void > Struct Template Reference . . . 2580
4.788.1 Detailed Description . . . 2580
4.788.2 Member Typedef Documentation . . . 2580
4.789std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > > Struct Template Reference . . . 2580
4.789.1 Detailed Description . . . 2581
4.789.2 Member Typedef Documentation . . . 2581
4.790std::owner_less< weak_ptr< _Tp > > Struct Template Reference . . . 2581
4.790.1 Detailed Description . . . 2582
4.790.2 Member Typedef Documentation . . . 2582
4.791std::packaged_task< _Res(_ArgTypes...)> Class Template Reference . . . 2582
4.791.1 Detailed Description . . . 2583
4.792std::pair< _T1, _T2 > Struct Template Reference . . . 2583
4.792.1 Detailed Description . . . 2585
4.792.2 Member Typedef Documentation . . . 2585
4.792.3 Constructor & Destructor Documentation . . . 2585
4.792.4 Member Function Documentation . . . 2586
4.792.5 Member Data Documentation . . . 2586
4.793__gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference . . . 2587
4.793.1 Detailed Description . . . 2589
4.794__gnu_pbds::pairing_heap_tag Struct Reference . . . 2589
4.794.1 Detailed Description . . . 2589
4.795__gnu_parallel::parallel_tag Struct Reference . . . 2590
4.795.1 Detailed Description . . . 2591
4.795.2 Constructor & Destructor Documentation . . . 2591
4.795.3 Member Function Documentation . . . 2591
4.796std::exponential_distribution< _RealType >::param_type Struct Reference . . . 2591
4.796.1 Detailed Description . . . 2592
4.797std::lognormal_distribution< _RealType >::param_type Struct Reference . . . 2592
4.797.1 Detailed Description . . . 2593
4.798std::negative_binomial_distribution< _IntType >::param_type Struct Reference . . . 2593
4.798.1 Detailed Description . . . 2593
4.799std::poisson_distribution< _IntType >::param_type Struct Reference . . . 2593

4.799.1 Detailed Description . . . 2594
4.800 std::weibull_distribution< _RealType >::param_type Struct Reference . . . 2594
4.800.1 Detailed Description . . . 2594
4.801 std::extreme_value_distribution< _RealType >::param_type Struct Reference . . . 2595
4.801.1 Detailed Description . . . 2595
4.802 std::discrete_distribution< _IntType >::param_type Struct Reference . . . 2595
4.802.1 Detailed Description . . . 2596
4.803 std::piecewise_constant_distribution< _RealType >::param_type Struct Reference . . . 2596
4.803.1 Detailed Description . . . 2597
4.804 std::bernoulli_distribution::param_type Struct Reference . . . 2597
4.804.1 Detailed Description . . . 2597
4.805 std::fisher_f_distribution< _RealType >::param_type Struct Reference . . . 2597
4.805.1 Detailed Description . . . 2598
4.806 std::geometric_distribution< _IntType >::param_type Struct Reference . . . 2598
4.806.1 Detailed Description . . . 2598
4.807 std::cauchy_distribution< _RealType >::param_type Struct Reference . . . 2599
4.807.1 Detailed Description . . . 2599
4.808 std::binomial_distribution< _IntType >::param_type Struct Reference . . . 2599
4.808.1 Detailed Description . . . 2600
4.809 std::student_t_distribution< _RealType >::param_type Struct Reference . . . 2600
4.809.1 Detailed Description . . . 2600
4.810 std::uniform_int_distribution< _IntType >::param_type Struct Reference . . . 2600
4.810.1 Detailed Description . . . 2601
4.811 std::gamma_distribution< _RealType >::param_type Struct Reference . . . 2601
4.811.1 Detailed Description . . . 2601
4.812 std::uniform_real_distribution< _RealType >::param_type Struct Reference . . . 2602
4.812.1 Detailed Description . . . 2602
4.813 std::normal_distribution< _RealType >::param_type Struct Reference . . . 2602
4.813.1 Detailed Description . . . 2603
4.814 std::piecewise_linear_distribution< _RealType >::param_type Struct Reference . . . 2603
4.814.1 Detailed Description . . . 2603
4.815 std::chi_squared_distribution< _RealType >::param_type Struct Reference . . . 2604
4.815.1 Detailed Description . . . 2604
4.816 __gnu_pbds::detail::pat_trie_base Struct Reference . . . 2605
4.816.1 Detailed Description . . . 2605
4.816.2 Member Enumeration Documentation . . . 2605

4.817__gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > Class Template Reference . . . 2606
4.817.1 Detailed Description . . . 2608
4.817.2 Member Enumeration Documentation . . . 2608
4.817.3 Member Function Documentation . . . 2609
4.818__gnu_pbds::pat_trie_tag Struct Reference . . . 2610
4.818.1 Detailed Description . . . 2610
4.819std::piecewise_constant_distribution< _RealType > Class Template Reference . . . 2610
4.819.1 Detailed Description . . . 2611
4.819.2 Member Typedef Documentation . . . 2612
4.819.3 Member Function Documentation . . . 2612
4.819.4 Friends And Related Function Documentation . . . 2613
4.820std::piecewise_construct_t Struct Reference . . . 2614
4.820.1 Detailed Description . . . 2614
4.821std::piecewise_linear_distribution< _RealType > Class Template Reference . . . 2614
4.821.1 Detailed Description . . . 2615
4.821.2 Member Typedef Documentation . . . 2615
4.821.3 Member Function Documentation . . . 2615
4.821.4 Friends And Related Function Documentation . . . 2616
4.822std::plus< _Tp > Struct Template Reference . . . 2618
4.822.1 Detailed Description . . . 2619
4.822.2 Member Typedef Documentation . . . 2619
4.823__gnu_pbds::point_invalidation_guarantee Struct Reference . . . 2620
4.823.1 Detailed Description . . . 2620
4.824std::pointer_to_binary_function< _Arg1, _Arg2, _Result > Class Template Reference . . . 2621
4.824.1 Detailed Description . . . 2621
4.824.2 Member Typedef Documentation . . . 2621
4.825std::pointer_to_unary_function< _Arg, _Result > Class Template Reference . . . 2622
4.825.1 Detailed Description . . . 2623
4.825.2 Member Typedef Documentation . . . 2623
4.826std::pointer_traits< _Ptr > Struct Template Reference . . . 2623
4.826.1 Detailed Description . . . 2623
4.826.2 Member Typedef Documentation . . . 2623
4.827std::pointer_traits< _Tp * > Struct Template Reference . . . 2624
4.827.1 Detailed Description . . . 2624
4.827.2 Member Typedef Documentation . . . 2624
4.827.3 Member Function Documentation . . . 2625

4.828 std::poisson_distribution< _IntType > Class Template Reference . . . 2625
4.828.1 Detailed Description . . . 2626
4.828.2 Member Typedef Documentation . . . 2626
4.828.3 Member Function Documentation . . . 2627
4.828.4 Friends And Related Function Documentation . . . 2628
4.829 __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc > Class Template Reference . . . 2629
4.829.1 Detailed Description . . . 2629
4.830 std::priority_queue< _Tp, _Sequence, _Compare > Class Template Reference . . . 2630
4.830.1 Detailed Description . . . 2631
4.830.2 Constructor & Destructor Documentation . . . 2631
4.830.3 Member Function Documentation . . . 2632
4.831 __gnu_pbds::priority_queue_tag Struct Reference . . . 2634
4.831.1 Detailed Description . . . 2635
4.832 __gnu_pbds::detail::probe_fn_base< _Alloc > Class Template Reference . . . 2635
4.832.1 Detailed Description . . . 2635
4.833 __gnu_cxx::project1st< _Arg1, _Arg2 > Struct Template Reference . . . 2635
4.833.1 Detailed Description . . . 2635
4.833.2 Member Typedef Documentation . . . 2635
4.834 __gnu_cxx::project2nd< _Arg1, _Arg2 > Struct Template Reference . . . 2636
4.834.1 Detailed Description . . . 2636
4.834.2 Member Typedef Documentation . . . 2636
4.835 std::promise< _Res > Class Template Reference . . . 2637
4.835.1 Detailed Description . . . 2637
4.836 std::promise< _Res & > Class Template Reference . . . 2638
4.836.1 Detailed Description . . . 2638
4.837 std::promise< void > Class Template Reference . . . 2638
4.837.1 Detailed Description . . . 2639
4.838 std::experimental::fundamentals_v2::propagate_const< _Tp > Class Template Reference . . . 2639
4.838.1 Detailed Description . . . 2640
4.839 __gnu_pbds::quadratic_probe_fn< Size_Type > Class Template Reference . . . 2640
4.839.1 Detailed Description . . . 2641
4.839.2 Member Function Documentation . . . 2641
4.840 std::queue< _Tp, _Sequence > Class Template Reference . . . 2641
4.840.1 Detailed Description . . . 2642
4.840.2 Constructor & Destructor Documentation . . . 2642
4.840.3 Member Function Documentation . . . 2643
4.840.4 Member Data Documentation . . . 2645

4.841 __gnu_parallel::quicksort_tag Struct Reference . . . 2645
4.841.1 Detailed Description . . . 2646
4.841.2 Member Function Documentation . . . 2646
4.842 std::random_access_iterator_tag Struct Reference . . . 2647
4.842.1 Detailed Description . . . 2647
4.843 __gnu_cxx::random_condition Struct Reference . . . 2647
4.843.1 Detailed Description . . . 2648
4.844 std::random_device Class Reference . . . 2648
4.844.1 Detailed Description . . . 2648
4.844.2 Member Typedef Documentation . . . 2649
4.845 std::range_error Class Reference . . . 2649
4.845.1 Detailed Description . . . 2649
4.845.2 Member Function Documentation . . . 2650
4.846 __gnu_pbds::range_invalidation_guarantee Struct Reference . . . 2650
4.846.1 Detailed Description . . . 2650
4.847 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, Store_Hash > Class Template Reference . . . 2651
4.847.1 Detailed Description . . . 2651
4.848 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, false > Class Template Reference . . . 2651
4.848.1 Detailed Description . . . 2652
4.849 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, true > Class Template Reference . . . 2652
4.849.1 Detailed Description . . . 2653
4.850 __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, false > Class Template Reference . . . 2653
4.850.1 Detailed Description . . . 2653
4.851 __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, true > Class Template Reference . . . 2653
4.851.1 Detailed Description . . . 2654
4.852 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, Store_Hash > Class Template Reference . . . 2654
4.852.1 Detailed Description . . . 2654
4.853 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, false > Class Template Reference . . . 2655
4.853.1 Detailed Description . . . 2655
4.854 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, true > Class Template Reference . . . 2655
4.854.1 Detailed Description . . . 2656

4.855 __gnu_pbds::detail::ranged_probe_fn< Key, null_type, _Alloc, Comb_Probe_Fn, null_type, false > Class Template Reference . . . 2656
4.855.1 Detailed Description . . . 2657
4.856 std::rank< typename > Struct Template Reference . . . 2657
4.856.1 Detailed Description . . . 2658
4.857 std::ratio< _Num, _Den > Struct Template Reference . . . 2658
4.857.1 Detailed Description . . . 2658
4.858 std::ratio_equal< _R1, _R2 > Struct Template Reference . . . 2659
4.858.1 Detailed Description . . . 2659
4.859 std::ratio_greater< _R1, _R2 > Struct Template Reference . . . 2660
4.859.1 Detailed Description . . . 2660
4.860 std::ratio_greater_equal< _R1, _R2 > Struct Template Reference . . . 2661
4.860.1 Detailed Description . . . 2661
4.861 std::ratio_less< _R1, _R2 > Struct Template Reference . . . 2661
4.861.1 Detailed Description . . . 2662
4.862 std::ratio_less_equal< _R1, _R2 > Struct Template Reference . . . 2662
4.862.1 Detailed Description . . . 2663
4.863 std::ratio_not_equal< _R1, _R2 > Struct Template Reference . . . 2663
4.863.1 Detailed Description . . . 2664
4.864 std::raw_storage_iterator< _OutputIterator, _Tp > Class Template Reference . . . 2664
4.864.1 Detailed Description . . . 2665
4.864.2 Member Typedef Documentation . . . 2665
4.865 __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc > Struct Template Reference . . . 2665
4.865.1 Detailed Description . . . 2670
4.866 __gnu_pbds::detail::rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference . . . 2670
4.866.1 Detailed Description . . . 2673
4.866.2 Member Function Documentation . . . 2674
4.867 __gnu_pbds::detail::rb_tree_node_< Value_Type, Metadata, _Alloc > Struct Template Reference . . . 2674
4.867.1 Detailed Description . . . 2675
4.868 __gnu_pbds::rb_tree_tag Struct Reference . . . 2676
4.868.1 Detailed Description . . . 2676
4.869 __gnu_pbds::detail::rc< _Node, _Alloc > Class Template Reference . . . 2676
4.869.1 Detailed Description . . . 2677
4.870 __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference . . . 2677
4.870.1 Detailed Description . . . 2679
4.871 __gnu_pbds::rc_binomial_heap_tag Struct Reference . . . 2680

4.871.1 Detailed Description . . . 2680
4.872__gnu_pbds::detail::rebind_traits< _Alloc, T > Struct Template Reference . . . 2680
4.872.1 Detailed Description . . . 2680
4.873__gnu_cxx::recursive_init_error Class Reference . . . 2681
4.873.1 Detailed Description . . . 2681
4.874std::recursive_mutex Class Reference . . . 2681
4.874.1 Detailed Description . . . 2682
4.875std::recursive_timed_mutex Class Reference . . . 2682
4.875.1 Detailed Description . . . 2682
4.876std::bitset< _Nb >::reference Class Reference . . . 2683
4.876.1 Detailed Description . . . 2683
4.877std::tr2::dynamic_bitset< _WordT, _Alloc >::reference Class Reference . . . 2683
4.877.1 Detailed Description . . . 2684
4.878std::reference_wrapper< _Tp > Class Template Reference . . . 2684
4.878.1 Detailed Description . . . 2685
4.878.2 Friends And Related Function Documentation . . . 2685
4.879std::regex_error Class Reference . . . 2686
4.879.1 Detailed Description . . . 2686
4.879.2 Constructor & Destructor Documentation . . . 2686
4.879.3 Member Function Documentation . . . 2687
4.880std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > Class Template Reference . . . 2687
4.880.1 Detailed Description . . . 2688
4.880.2 Constructor & Destructor Documentation . . . 2688
4.880.3 Member Function Documentation . . . 2688
4.881std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > Class Template Reference . . . 2689
4.881.1 Detailed Description . . . 2690
4.881.2 Constructor & Destructor Documentation . . . 2690
4.881.3 Member Function Documentation . . . 2693
4.882std::regex_traits< _Ch_type > Class Template Reference . . . 2694
4.882.1 Detailed Description . . . 2695
4.882.2 Constructor & Destructor Documentation . . . 2695
4.882.3 Member Function Documentation . . . 2695
4.883std::remove_all_extents< typename > Struct Template Reference . . . 2700
4.883.1 Detailed Description . . . 2700
4.884std::remove_const< _Tp > Struct Template Reference . . . 2700
4.884.1 Detailed Description . . . 2700
4.885std::remove_cv< typename > Struct Template Reference . . . 2701

4.885.1 Detailed Description . . . 2701
4.886std::remove_extent< _Tp > Struct Template Reference . . . 2701
4.886.1 Detailed Description . . . 2701
4.887std::remove_pointer< _Tp > Struct Template Reference . . . 2701
4.887.1 Detailed Description . . . 2702
4.888std::remove_reference< _Tp > Struct Template Reference . . . 2702
4.888.1 Detailed Description . . . 2702
4.889std::remove_volatile< _Tp > Struct Template Reference . . . 2702
4.889.1 Detailed Description . . . 2702
4.890__gnu_pbds::resize_error Struct Reference . . . 2703
4.890.1 Detailed Description . . . 2703
4.890.2 Member Function Documentation . . . 2703
4.891__gnu_pbds::detail::resize_policy< _Tp > Class Template Reference . . . 2704
4.891.1 Detailed Description . . . 2704
4.892std::result_of< _Signature > Class Template Reference . . . 2704
4.892.1 Detailed Description . . . 2704
4.893std::reverse_iterator< _Iterator > Class Template Reference . . . 2705
4.893.1 Detailed Description . . . 2706
4.893.2 Member Typedef Documentation . . . 2706
4.893.3 Constructor & Destructor Documentation . . . 2706
4.893.4 Member Function Documentation . . . 2707
4.894__gnu_cxx::rope< _CharT, _Alloc > Class Template Reference . . . 2709
4.894.1 Detailed Description . . . 2715
4.895std::runtime_error Class Reference . . . 2715
4.895.1 Detailed Description . . . 2716
4.895.2 Constructor & Destructor Documentation . . . 2716
4.895.3 Member Function Documentation . . . 2716
4.896__gnu_pbds::sample_probe_fn Class Reference . . . 2716
4.896.1 Detailed Description . . . 2717
4.896.2 Constructor & Destructor Documentation . . . 2717
4.896.3 Member Function Documentation . . . 2717
4.897__gnu_pbds::sample_range_hashing Class Reference . . . 2717
4.897.1 Detailed Description . . . 2717
4.897.2 Member Typedef Documentation . . . 2718
4.897.3 Constructor & Destructor Documentation . . . 2718
4.897.4 Member Function Documentation . . . 2718
4.898__gnu_pbds::sample_ranged_hash_fn Class Reference . . . 2718

4.898.1 Detailed Description . . . 2719
4.898.2 Constructor & Destructor Documentation . . . 2719
4.898.3 Member Function Documentation . . . 2719
4.899 __gnu_pbds::sample_ranged_probe_fn Class Reference . . . 2719
4.899.1 Detailed Description . . . 2720
4.900 __gnu_pbds::sample_resize_policy Class Reference . . . 2720
4.900.1 Detailed Description . . . 2720
4.900.2 Member Typedef Documentation . . . 2720
4.900.3 Constructor & Destructor Documentation . . . 2721
4.900.4 Member Function Documentation . . . 2721
4.901 __gnu_pbds::sample_resize_trigger Class Reference . . . 2722
4.901.1 Detailed Description . . . 2723
4.901.2 Member Typedef Documentation . . . 2723
4.901.3 Constructor & Destructor Documentation . . . 2723
4.901.4 Member Function Documentation . . . 2723
4.902 __gnu_pbds::sample_size_policy Class Reference . . . 2724
4.902.1 Detailed Description . . . 2725
4.902.2 Member Typedef Documentation . . . 2725
4.902.3 Constructor & Destructor Documentation . . . 2725
4.902.4 Member Function Documentation . . . 2725
4.903 __gnu_pbds::sample_tree_node_update< Const_Node_Iter, Node_Iter, Cmp_Fn, _Alloc > Class Template Reference . . . 2725
4.903.1 Detailed Description . . . 2726
4.904 __gnu_pbds::sample_trie_access_traits Struct Reference . . . 2726
4.904.1 Detailed Description . . . 2726
4.904.2 Member Typedef Documentation . . . 2726
4.904.3 Member Function Documentation . . . 2726
4.905 __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference . . . 2727
4.905.1 Detailed Description . . . 2727
4.905.2 Constructor & Destructor Documentation . . . 2727
4.905.3 Member Function Documentation . . . 2727
4.906 __gnu_pbds::sample_update_policy Struct Reference . . . 2728
4.906.1 Detailed Description . . . 2728
4.906.2 Member Typedef Documentation . . . 2728
4.906.3 Constructor & Destructor Documentation . . . 2728
4.906.4 Member Function Documentation . . . 2728

4.907__gnu_parallel::sampling_tag Struct Reference . . . 2729
4.907.1 Detailed Description . . . 2729
4.907.2 Member Function Documentation . . . 2729
4.908std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs > Class Template Reference . . . 2731
4.908.1 Detailed Description . . . 2733
4.909std::seed_seq Class Reference . . . 2733
4.909.1 Detailed Description . . . 2733
4.909.2 Member Typedef Documentation . . . 2733
4.909.3 Constructor & Destructor Documentation . . . 2734
4.910__gnu_cxx::select1st< _Pair > Struct Template Reference . . . 2734
4.910.1 Detailed Description . . . 2734
4.910.2 Member Typedef Documentation . . . 2734
4.911__gnu_cxx::select2nd< _Pair > Struct Template Reference . . . 2735
4.911.1 Detailed Description . . . 2735
4.911.2 Member Typedef Documentation . . . 2735
4.912__gnu_pbds::detail::select_value_type< Key, Mapped > Struct Template Reference . . . 2735
4.912.1 Detailed Description . . . 2736
4.913__gnu_pbds::detail::select_value_type< Key, null_type > Struct Template Reference . . . 2736
4.913.1 Detailed Description . . . 2736
4.914std::basic_istream< _CharT, _Traits >::sentry Class Reference . . . 2736
4.914.1 Detailed Description . . . 2737
4.914.2 Member Typedef Documentation . . . 2737
4.914.3 Constructor & Destructor Documentation . . . 2737
4.914.4 Member Function Documentation . . . 2737
4.915std::basic_ostream< _CharT, _Traits >::sentry Class Reference . . . 2738
4.915.1 Detailed Description . . . 2738
4.915.2 Constructor & Destructor Documentation . . . 2738
4.915.3 Member Function Documentation . . . 2739
4.916__gnu_pbds::sequence_tag Struct Reference . . . 2739
4.916.1 Detailed Description . . . 2739
4.917__gnu_parallel::sequential_tag Struct Reference . . . 2740
4.917.1 Detailed Description . . . 2740
4.918std::__debug::set< _Key, _Compare, _Allocator > Class Template Reference . . . 2740
4.918.1 Detailed Description . . . 2743
4.918.2 Member Function Documentation . . . 2743
4.918.3 Member Data Documentation . . . 2744
4.919std::set< _Key, _Compare, _Alloc > Class Template Reference . . . 2744

4.919.1 Detailed Description . . . 2747
4.919.2 Member Typedef Documentation . . . 2748
4.919.3 Constructor & Destructor Documentation . . . 2750
4.919.4 Member Function Documentation . . . 2752
4.920 std::shared_future< _Res > Class Template Reference . . . 2767
4.920.1 Detailed Description . . . 2768
4.920.2 Member Typedef Documentation . . . 2768
4.920.3 Constructor & Destructor Documentation . . . 2768
4.920.4 Member Function Documentation . . . 2769
4.921 std::shared_future< _Res & > Class Template Reference . . . 2770
4.921.1 Detailed Description . . . 2771
4.921.2 Member Typedef Documentation . . . 2771
4.921.3 Constructor & Destructor Documentation . . . 2771
4.921.4 Member Function Documentation . . . 2772
4.922 std::shared_future< void > Class Template Reference . . . 2772
4.922.1 Detailed Description . . . 2774
4.922.2 Member Typedef Documentation . . . 2774
4.922.3 Constructor & Destructor Documentation . . . 2774
4.922.4 Member Function Documentation . . . 2774
4.923 std::shared_lock< _Mutex > Class Template Reference . . . 2774
4.923.1 Detailed Description . . . 2775
4.924 std::shared_ptr< _Tp > Class Template Reference . . . 2775
4.924.1 Detailed Description . . . 2778
4.924.2 Member Typedef Documentation . . . 2779
4.924.3 Constructor & Destructor Documentation . . . 2779
4.924.4 Member Function Documentation . . . 2784
4.925 std::shared_timed_mutex Class Reference . . . 2785
4.925.1 Detailed Description . . . 2785
4.926 std::shuffle_order_engine< _RandomNumberEngine, __k > Class Template Reference . . . 2786
4.926.1 Detailed Description . . . 2787
4.926.2 Member Typedef Documentation . . . 2787
4.926.3 Constructor & Destructor Documentation . . . 2787
4.926.4 Member Function Documentation . . . 2789
4.926.5 Friends And Related Function Documentation . . . 2790
4.927 std::slice Class Reference . . . 2791
4.927.1 Detailed Description . . . 2791
4.928 std::slice_array< _Tp > Class Template Reference . . . 2791

4.928.1 Detailed Description . . . 2792
4.929 __gnu_cxx::slist< _Tp, _Alloc > Class Template Reference . . . 2793
4.929.1 Detailed Description . . . 2795
4.930 __gnu_pbds::detail::splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference . . . 2795
4.930.1 Detailed Description . . . 2798
4.930.2 Member Function Documentation . . . 2799
4.931 __gnu_pbds::detail::splay_tree_node_< Value_Type, Metadata, _Alloc > Struct Template Reference . . . 2799
4.931.1 Detailed Description . . . 2800
4.932 __gnu_pbds::splay_tree_tag Struct Reference . . . 2801
4.932.1 Detailed Description . . . 2801
4.933 std::stack< _Tp, _Sequence > Class Template Reference . . . 2801
4.933.1 Detailed Description . . . 2802
4.933.2 Constructor & Destructor Documentation . . . 2803
4.933.3 Member Function Documentation . . . 2803
4.934 __gnu_cxx::stdio_filebuf< _CharT, _Traits > Class Template Reference . . . 2804
4.934.1 Detailed Description . . . 2807
4.934.2 Constructor & Destructor Documentation . . . 2807
4.934.3 Member Function Documentation . . . 2809
4.934.4 Member Data Documentation . . . 2824
4.935 __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits > Class Template Reference . . . 2827
4.935.1 Detailed Description . . . 2830
4.935.2 Member Function Documentation . . . 2830
4.935.3 Member Data Documentation . . . 2844
4.936 std::chrono::_V2::steady_clock Struct Reference . . . 2845
4.936.1 Detailed Description . . . 2846
4.937 __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash > Struct Template Reference . . . 2846
4.937.1 Detailed Description . . . 2847
4.938 __gnu_pbds::detail::stored_data< _Tv, _Th, false > Struct Template Reference . . . 2847
4.938.1 Detailed Description . . . 2848
4.939 __gnu_pbds::detail::stored_hash< _Th > Struct Template Reference . . . 2848
4.939.1 Detailed Description . . . 2848
4.940 __gnu_pbds::detail::stored_value< _Tv > Struct Template Reference . . . 2849
4.940.1 Detailed Description . . . 2849
4.941 __gnu_pbds::string_tag Struct Reference . . . 2850
4.941.1 Detailed Description . . . 2850
4.942 std::student_t_distribution< _RealType > Class Template Reference . . . 2850

4.942.1 Detailed Description . . . 2851
4.942.2 Member Typedef Documentation . . . 2851
4.942.3 Member Function Documentation . . . 2852
4.942.4 Friends And Related Function Documentation . . . 2852
4.943std::sub_match< _BiIter > Class Template Reference . . . 2854
4.943.1 Detailed Description . . . 2858
4.943.2 Member Typedef Documentation . . . 2858
4.943.3 Member Function Documentation . . . 2858
4.943.4 Member Data Documentation . . . 2860
4.944std::subtract_with_carry_engine< _UIntType, __w, __s, __r > Class Template Reference . . . 2860
4.944.1 Detailed Description . . . 2861
4.944.2 Member Typedef Documentation . . . 2861
4.944.3 Constructor & Destructor Documentation . . . 2861
4.944.4 Member Function Documentation . . . 2863
4.944.5 Friends And Related Function Documentation . . . 2863
4.945__gnu_cxx::subtractive_rng Class Reference . . . 2866
4.945.1 Detailed Description . . . 2866
4.945.2 Member Typedef Documentation . . . 2866
4.945.3 Constructor & Destructor Documentation . . . 2867
4.945.4 Member Function Documentation . . . 2867
4.946__gnu_pbds::detail::synth_access_traits< Type_Traits, Set, _ATraits > Struct Template Reference . . . 2867
4.946.1 Detailed Description . . . 2868
4.947std::chrono::_V2::system_clock Struct Reference . . . 2868
4.947.1 Detailed Description . . . 2868
4.948std::system_error Class Reference . . . 2869
4.948.1 Detailed Description . . . 2869
4.948.2 Member Function Documentation . . . 2869
4.949__gnu_cxx::temporary_buffer< _ForwardIterator, _Tp > Struct Template Reference . . . 2870
4.949.1 Detailed Description . . . 2871
4.949.2 Constructor & Destructor Documentation . . . 2871
4.949.3 Member Function Documentation . . . 2871
4.950__gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference . . . 2872
4.950.1 Detailed Description . . . 2874
4.951__gnu_pbds::thin_heap_tag Struct Reference . . . 2874
4.951.1 Detailed Description . . . 2874
4.952std::thread Class Reference . . . 2875
4.952.1 Detailed Description . . . 2875

4.952.2 Member Function Documentation . . . 2875
4.953__gnu_cxx::throw_allocator_base< _Tp, _Cond > Class Template Reference . . . 2876
4.953.1 Detailed Description . . . 2877
4.954__gnu_cxx::throw_allocator_limit< _Tp > Struct Template Reference . . . 2877
4.954.1 Detailed Description . . . 2878
4.955__gnu_cxx::throw_allocator_random< _Tp > Struct Template Reference . . . 2879
4.955.1 Detailed Description . . . 2880
4.956__gnu_cxx::throw_value_base< _Cond > Struct Template Reference . . . 2880
4.956.1 Detailed Description . . . 2881
4.957__gnu_cxx::throw_value_limit Struct Reference . . . 2881
4.957.1 Detailed Description . . . 2882
4.958__gnu_cxx::throw_value_random Struct Reference . . . 2883
4.958.1 Detailed Description . . . 2884
4.959std::time_base Class Reference . . . 2884
4.959.1 Detailed Description . . . 2884
4.960std::time_get< _CharT, _InIter > Class Template Reference . . . 2885
4.960.1 Detailed Description . . . 2886
4.960.2 Member Typedef Documentation . . . 2887
4.960.3 Constructor & Destructor Documentation . . . 2887
4.960.4 Member Function Documentation . . . 2887
4.960.5 Member Data Documentation . . . 2895
4.961std::time_get_byname< _CharT, _InIter > Class Template Reference . . . 2896
4.961.1 Detailed Description . . . 2897
4.961.2 Member Function Documentation . . . 2897
4.961.3 Member Data Documentation . . . 2905
4.962std::chrono::time_point< _Clock, _Dur > Struct Template Reference . . . 2905
4.962.1 Detailed Description . . . 2906
4.963std::time_put< _CharT, _OutIter > Class Template Reference . . . 2907
4.963.1 Detailed Description . . . 2908
4.963.2 Member Typedef Documentation . . . 2908
4.963.3 Constructor & Destructor Documentation . . . 2908
4.963.4 Member Function Documentation . . . 2909
4.963.5 Member Data Documentation . . . 2910
4.964std::time_put_byname< _CharT, _OutIter > Class Template Reference . . . 2911
4.964.1 Detailed Description . . . 2912
4.964.2 Member Function Documentation . . . 2912
4.964.3 Member Data Documentation . . . 2913

4.965std::timed_mutex Class Reference . . . 2914
4.965.1 Detailed Description . . . 2914
4.966std::to_chars_result Struct Reference . . . 2914
4.966.1 Detailed Description . . . 2914
4.967std::chrono::treat_as_floating_point< _Rep > Struct Template Reference . . . 2915
4.967.1 Detailed Description . . . 2915
4.968__gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc > Class Template Reference . . . 2915
4.968.1 Detailed Description . . . 2916
4.968.2 Member Typedef Documentation . . . 2916
4.968.3 Constructor & Destructor Documentation . . . 2917
4.969__gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp > Struct Template Reference . . . 2917
4.969.1 Detailed Description . . . 2917
4.970__gnu_pbds::detail::tree_metadata_helper< Node_Update, false > Struct Template Reference . . . 2917
4.970.1 Detailed Description . . . 2918
4.971__gnu_pbds::detail::tree_metadata_helper< Node_Update, true > Struct Template Reference . . . 2918
4.971.1 Detailed Description . . . 2918
4.972__gnu_pbds::detail::tree_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc > Struct Template Reference . . . 2918
4.972.1 Detailed Description . . . 2918
4.973__gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc > Class Template Reference . . . 2919
4.973.1 Detailed Description . . . 2920
4.973.2 Member Function Documentation . . . 2920
4.974__gnu_pbds::tree_tag Struct Reference . . . 2921
4.974.1 Detailed Description . . . 2921
4.975__gnu_pbds::detail::tree_traits< Key, Data, Cmp_Fn, Node_Update, Tag, _Alloc > Struct Template Reference . . . 2922
4.975.1 Detailed Description . . . 2922
4.976__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc > Struct Template Reference . . . 2922
4.976.1 Detailed Description . . . 2922
4.976.2 Member Typedef Documentation . . . 2923
4.977__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc > Struct Template Reference . . . 2923
4.977.1 Detailed Description . . . 2925
4.977.2 Member Typedef Documentation . . . 2925
4.978__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc > Struct Template Reference . . . 2926
4.978.1 Detailed Description . . . 2928

4.978.2 Member Typedef Documentation . . . 2928
4.979 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc > Struct Template Reference . . . 2928
4.979.1 Detailed Description . . . 2929
4.979.2 Member Typedef Documentation . . . 2929
4.980 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc > Struct Template Reference . . . 2929
4.980.1 Detailed Description . . . 2931
4.980.2 Member Typedef Documentation . . . 2931
4.981 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc > Struct Template Reference . . . 2932
4.981.1 Detailed Description . . . 2934
4.981.2 Member Typedef Documentation . . . 2934
4.982 __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc > Class Template Reference . . . 2935
4.982.1 Detailed Description . . . 2935
4.982.2 Member Typedef Documentation . . . 2936
4.982.3 Constructor & Destructor Documentation . . . 2936
4.983 __gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp > Struct Template Reference . . . 2937
4.983.1 Detailed Description . . . 2937
4.984 __gnu_pbds::detail::trie_metadata_helper< Node_Update, false > Struct Template Reference . . . 2937
4.984.1 Detailed Description . . . 2937
4.985 __gnu_pbds::detail::trie_metadata_helper< Node_Update, true > Struct Template Reference . . . 2937
4.985.1 Detailed Description . . . 2937
4.986 __gnu_pbds::detail::trie_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc > Struct Template Reference . . . 2938
4.986.1 Detailed Description . . . 2938
4.987 __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference . . . 2938
4.987.1 Detailed Description . . . 2940
4.987.2 Member Function Documentation . . . 2940
4.988 __gnu_pbds::detail::trie_policy_base< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference . . . 2941
4.988.1 Detailed Description . . . 2942
4.989 __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference . . . 2943
4.989.1 Detailed Description . . . 2944
4.989.2 Member Typedef Documentation . . . 2945
4.989.3 Member Function Documentation . . . 2945
4.990 __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc > Struct Template Reference . . . 2946

4.990.1 Detailed Description . . . 2947
4.990.2 Member Typedef Documentation . . . 2947
4.990.3 Member Function Documentation . . . 2947
4.991 __gnu_pbds::trie_tag Struct Reference . . . 2948
4.991.1 Detailed Description . . . 2949
4.992 __gnu_pbds::detail::trie_traits< Key, Data, _ATraits, Node_Update, Tag, _Alloc > Struct Template Reference . . . 2949
4.992.1 Detailed Description . . . 2949
4.993 __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc > Struct Template Reference . . . 2949
4.993.1 Detailed Description . . . 2950
4.993.2 Member Typedef Documentation . . . 2950
4.994 __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc > Struct Template Reference . . . 2951
4.994.1 Detailed Description . . . 2952
4.994.2 Member Typedef Documentation . . . 2952
4.995 __gnu_pbds::trivial_iterator_tag Struct Reference . . . 2953
4.995.1 Detailed Description . . . 2953
4.996 std::try_to_lock_t Struct Reference . . . 2953
4.996.1 Detailed Description . . . 2953
4.997 std::tuple< _Elements > Class Template Reference . . . 2953
4.997.1 Detailed Description . . . 2955
4.998 std::tuple< _T1, _T2 > Class Template Reference . . . 2955
4.998.1 Detailed Description . . . 2957
4.999 std::tuple_element< _Int, _Tp > Struct Template Reference . . . 2957
4.999.1 Detailed Description . . . 2957
4.1000 std::tuple_element< 0, std::pair< _Tp1, _Tp2 > > Struct Template Reference . . . 2958
4.1000.1 Detailed Description . . . 2958
4.1001 std::tuple_element< 0, tuple< _Head, _Tail...> > Struct Template Reference . . . 2958
4.1001.1 Detailed Description . . . 2958
4.1002 std::tuple_element< 1, std::pair< _Tp1, _Tp2 > > Struct Template Reference . . . 2958
4.1002.1 Detailed Description . . . 2958
4.1003 std::tuple_element< __i, tuple< _Head, _Tail...> > Struct Template Reference . . . 2959
4.1003.1 Detailed Description . . . 2959
4.1004 std::tuple_element< __i, tuple<> > Struct Template Reference . . . 2959
4.1004.1 Detailed Description . . . 2959
4.1005 std::tuple_element< _Int, std::__debug::array< _Tp, _Nm > > Struct Template Reference . . . 2959
4.1005.1 Detailed Description . . . 2960

4.1006 std::tuple_element< _Int,::array< _Tp, _Nm > > Struct Template Reference . . . 2960
4.1006.1 Detailed Description . . . 2960
4.1007 std::tuple_size< _Tp > Struct Template Reference . . . 2960
4.1007.1 Detailed Description . . . 2960
4.1008 std::tuple_size< std::__debug::array< _Tp, _Nm > > Struct Template Reference . . . 2961
4.1008.1 Detailed Description . . . 2961
4.1009 std::tuple_size< std::pair< _Tp1, _Tp2 > > Struct Template Reference . . . 2962
4.1009.1 Detailed Description . . . 2962
4.1010 std::tuple_size< tuple< _Elements...> > Struct Template Reference . . . 2963
4.1010.1 Detailed Description . . . 2963
4.1011 std::tuple_size<::array< _Tp, _Nm > > Struct Template Reference . . . 2964
4.1011.1 Detailed Description . . . 2964
4.1012 __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >::type Struct Reference . . . 2964
4.1012.1 Detailed Description . . . 2965
4.1013 std::type_index Struct Reference . . . 2965
4.1013.1 Detailed Description . . . 2965
4.1014 std::type_info Class Reference . . . 2965
4.1014.1 Detailed Description . . . 2966
4.1014.2 Constructor & Destructor Documentation . . . 2966
4.1014.3 Member Function Documentation . . . 2966
4.1015 __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash > Struct Template Reference . . . 2967
4.1015.1 Detailed Description . . . 2968
4.1016 __gnu_cxx::unary_compose< _Operation1, _Operation2 > Class Template Reference . . . 2968
4.1016.1 Detailed Description . . . 2969
4.1016.2 Member Typedef Documentation . . . 2969
4.1017 std::unary_function< _Arg, _Result > Struct Template Reference . . . 2969
4.1017.1 Detailed Description . . . 2970
4.1017.2 Member Typedef Documentation . . . 2970
4.1018 std::unary_negate< _Predicate > Class Template Reference . . . 2970
4.1018.1 Detailed Description . . . 2971
4.1018.2 Member Typedef Documentation . . . 2971
4.1019 __gnu_parallel::unbalanced_tag Struct Reference . . . 2971
4.1019.1 Detailed Description . . . 2972
4.1019.2 Member Function Documentation . . . 2972
4.1020 std::underflow_error Class Reference . . . 2973
4.1020.1 Detailed Description . . . 2973
4.1020.2 Member Function Documentation . . . 2973

4.1021 std::underlying_type< _Tp > Struct Template Reference . . . 2974
4.1021.1 Detailed Description . . . 2974
4.1022 std::uniform_int_distribution< _IntType > Class Template Reference . . . 2974
4.1022.1 Detailed Description . . . 2975
4.1022.2 Member Typedef Documentation . . . 2975
4.1022.3 Constructor & Destructor Documentation . . . 2975
4.1022.4 Member Function Documentation . . . 2975
4.1022.5 Friends And Related Function Documentation . . . 2976
4.1023 std::uniform_real_distribution< _RealType > Class Template Reference . . . 2976
4.1023.1 Detailed Description . . . 2977
4.1023.2 Member Typedef Documentation . . . 2978
4.1023.3 Constructor & Destructor Documentation . . . 2978
4.1023.4 Member Function Documentation . . . 2978
4.1023.5 Friends And Related Function Documentation . . . 2979
4.1024 std::unique_lock< _Mutex > Class Template Reference . . . 2979
4.1024.1 Detailed Description . . . 2980
4.1024.2 Friends And Related Function Documentation . . . 2980
4.1025 std::unique_ptr< _Tp, _Dp > Class Template Reference . . . 2981
4.1025.1 Detailed Description . . . 2983
4.1025.2 Constructor & Destructor Documentation . . . 2983
4.1025.3 Member Function Documentation . . . 2984
4.1026 std::unique_ptr< _Tp[], _Dp > Class Template Reference . . . 2986
4.1026.1 Detailed Description . . . 2987
4.1026.2 Constructor & Destructor Documentation . . . 2987
4.1026.3 Member Function Documentation . . . 2989
4.1027 std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > Class Template Reference . . . 2991
4.1027.1 Detailed Description . . . 2994
4.1027.2 Member Typedef Documentation . . . 2994
4.1027.3 Constructor & Destructor Documentation . . . 2996
4.1027.4 Member Function Documentation . . . 2999
4.1028 std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator > Class Template Reference . . . 3015
4.1028.1 Detailed Description . . . 3018
4.1028.2 Member Function Documentation . . . 3018
4.1028.3 Member Data Documentation . . . 3019
4.1029 std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > Class Template Reference . . . 3019
4.1029.1 Detailed Description . . . 3022
4.1029.2 Member Typedef Documentation . . . 3022

4.1029.3 Constructor & Destructor Documentation . . . 3024
4.1029.4 Member Function Documentation . . . 3026
4.1030 std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator > Class Template Reference 3039
4.1030.1 Detailed Description . . . 3042
4.1030.2 Member Function Documentation . . . 3042
4.1030.3 Member Data Documentation . . . 3043
4.1031 std::unordered_multiset< _Value, _Hash, _Pred, _Alloc > Class Template Reference . . . 3043
4.1031.1 Detailed Description . . . 3046
4.1031.2 Member Typedef Documentation . . . 3046
4.1031.3 Constructor & Destructor Documentation . . . 3048
4.1031.4 Member Function Documentation . . . 3049
4.1032 std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator > Class Template Reference . . . 3064
4.1032.1 Detailed Description . . . 3067
4.1032.2 Member Function Documentation . . . 3067
4.1032.3 Member Data Documentation . . . 3068
4.1033 std::unordered_set< _Value, _Hash, _Pred, _Alloc > Class Template Reference . . . 3069
4.1033.1 Detailed Description . . . 3071
4.1033.2 Member Typedef Documentation . . . 3071
4.1033.3 Constructor & Destructor Documentation . . . 3073
4.1033.4 Member Function Documentation . . . 3076
4.1034 std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator > Class Template Reference . . . 3089
4.1034.1 Detailed Description . . . 3092
4.1034.2 Member Function Documentation . . . 3092
4.1034.3 Member Data Documentation . . . 3093
4.1035 std::uses_allocator< typename, typename > Struct Template Reference . . . 3093
4.1035.1 Detailed Description . . . 3094
4.1036 std::uses_allocator< tuple< _Types...>, _Alloc > Struct Template Reference . . . 3094
4.1036.1 Detailed Description . . . 3095
4.1037 std::valarray< _Tp > Class Template Reference . . . 3095
4.1037.1 Detailed Description . . . 3097
4.1037.2 Constructor & Destructor Documentation . . . 3097
4.1038 std::vector< _Tp, _Alloc > Class Template Reference . . . 3098
4.1038.1 Detailed Description . . . 3101
4.1038.2 Constructor & Destructor Documentation . . . 3101
4.1038.3 Member Function Documentation . . . 3103
4.1039 std::__debug::vector< _Tp, _Allocator > Class Template Reference . . . 3116
4.1039.1 Detailed Description . . . 3118

4.1039.2 Constructor & Destructor Documentation . . . 3118
4.1039.3 Member Function Documentation . . . 3119
4.1039.4 Member Data Documentation . . . 3119
4.1040 std::vector< bool, _Alloc > Class Template Reference . . . 3120
4.1040.1 Detailed Description . . . 3123
4.1041 std::wbuffer_convert< _Codecvt, _Elem, _Tr > Class Template Reference . . . 3124
4.1041.1 Detailed Description . . . 3126
4.1041.2 Member Typedef Documentation . . . 3126
4.1041.3 Constructor & Destructor Documentation . . . 3126
4.1041.4 Member Function Documentation . . . 3127
4.1041.5 Member Data Documentation . . . 3139
4.1042 std::weak_ptr< _Tp > Class Template Reference . . . 3139
4.1042.1 Detailed Description . . . 3140
4.1043 std::weibull_distribution< _RealType > Class Template Reference . . . 3141
4.1043.1 Detailed Description . . . 3142
4.1043.2 Member Typedef Documentation . . . 3142
4.1043.3 Member Function Documentation . . . 3142
4.1043.4 Friends And Related Function Documentation . . . 3143
4.1044 std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc > Class Template Reference . . . 3143
4.1044.1 Detailed Description . . . 3144
4.1044.2 Constructor & Destructor Documentation . . . 3144
4.1044.3 Member Function Documentation . . . 3146

5 File Documentation **3148**

5.1 algo.h File Reference . . . 3148
5.1.1 Detailed Description . . . 3157
5.2 algobase.h File Reference . . . 3158
5.2.1 Detailed Description . . . 3159
5.3 algorithm File Reference . . . 3159
5.3.1 Detailed Description . . . 3160
5.4 algorithm File Reference . . . 3160
5.4.1 Detailed Description . . . 3161
5.5 algorithm File Reference . . . 3161
5.5.1 Detailed Description . . . 3161
5.6 algorithm File Reference . . . 3161
5.6.1 Detailed Description . . . 3162
5.7 algorithmfwd.h File Reference . . . 3162

5.7.1 Detailed Description . . . 3167
5.8 algorithmfwd.h File Reference . . . 3167
5.8.1 Detailed Description . . . 3176
5.9 aligned_buffer.h File Reference . . . 3176
5.9.1 Detailed Description . . . 3176
5.10 alloc_traits.h File Reference . . . 3176
5.10.1 Detailed Description . . . 3177
5.11 alloc_traits.h File Reference . . . 3177
5.11.1 Detailed Description . . . 3178
5.12 allocated_ptr.h File Reference . . . 3178
5.12.1 Detailed Description . . . 3178
5.13 allocator.h File Reference . . . 3178
5.13.1 Detailed Description . . . 3179
5.14 any File Reference . . . 3179
5.14.1 Detailed Description . . . 3179
5.15 any File Reference . . . 3179
5.15.1 Detailed Description . . . 3180
5.16 array File Reference . . . 3180
5.16.1 Detailed Description . . . 3181
5.17 array File Reference . . . 3181
5.17.1 Detailed Description . . . 3182
5.18 array File Reference . . . 3182
5.18.1 Detailed Description . . . 3183
5.19 assertions.h File Reference . . . 3183
5.19.1 Detailed Description . . . 3183
5.20 assoc_container.hpp File Reference . . . 3183
5.20.1 Detailed Description . . . 3184
5.21 atomic File Reference . . . 3184
5.21.1 Detailed Description . . . 3188
5.22 atomic_base.h File Reference . . . 3188
5.22.1 Detailed Description . . . 3189
5.23 atomic_futex.h File Reference . . . 3189
5.23.1 Detailed Description . . . 3189
5.24 atomic_lockfree_defines.h File Reference . . . 3189
5.24.1 Detailed Description . . . 3190
5.25 atomic_word.h File Reference . . . 3190
5.25.1 Detailed Description . . . 3190

5.26 atomicity.h File Reference . . . 3190
5.26.1 Detailed Description . . . 3190
5.27 auto_ptr.h File Reference . . . 3191
5.27.1 Detailed Description . . . 3191
5.28 backward_warning.h File Reference . . . 3191
5.28.1 Detailed Description . . . 3191
5.29 balanced_quicksort.h File Reference . . . 3191
5.29.1 Detailed Description . . . 3192
5.30 base.h File Reference . . . 3192
5.30.1 Detailed Description . . . 3193
5.31 basic_file.h File Reference . . . 3193
5.31.1 Detailed Description . . . 3193
5.32 basic_ios.h File Reference . . . 3193
5.32.1 Detailed Description . . . 3193
5.33 basic_ios.tcc File Reference . . . 3194
5.33.1 Detailed Description . . . 3194
5.34 basic_iterator.h File Reference . . . 3194
5.34.1 Detailed Description . . . 3194
5.35 basic_string.h File Reference . . . 3194
5.35.1 Detailed Description . . . 3197
5.36 basic_string.tcc File Reference . . . 3197
5.36.1 Detailed Description . . . 3198
5.37 bin_search_tree_.hpp File Reference . . . 3198
5.37.1 Detailed Description . . . 3198
5.38 binary_heap_.hpp File Reference . . . 3198
5.38.1 Detailed Description . . . 3199
5.39 binders.h File Reference . . . 3199
5.39.1 Detailed Description . . . 3199
5.40 binomial_heap_.hpp File Reference . . . 3199
5.40.1 Detailed Description . . . 3199
5.41 binomial_heap_base_.hpp File Reference . . . 3200
5.41.1 Detailed Description . . . 3200
5.42 bit File Reference . . . 3200
5.42.1 Detailed Description . . . 3200
5.43 bitmap_allocator.h File Reference . . . 3200
5.43.1 Detailed Description . . . 3201
5.43.2 Macro Definition Documentation . . . 3201

5.44 bitset File Reference . . . 3201
5.44.1 Detailed Description . . . 3202
5.45 bitset File Reference . . . 3202
5.45.1 Detailed Description . . . 3203
5.46 bool_set File Reference . . . 3203
5.46.1 Detailed Description . . . 3204
5.47 bool_set.tcc File Reference . . . 3204
5.47.1 Detailed Description . . . 3204
5.48 boost_concept_check.h File Reference . . . 3204
5.48.1 Detailed Description . . . 3205
5.49 branch_policy.hpp File Reference . . . 3205
5.49.1 Detailed Description . . . 3205
5.50 c++0x_warning.h File Reference . . . 3205
5.50.1 Detailed Description . . . 3205
5.51 c++allocator.h File Reference . . . 3206
5.51.1 Detailed Description . . . 3206
5.52 c++config.h File Reference . . . 3206
5.52.1 Detailed Description . . . 3210
5.53 c++io.h File Reference . . . 3210
5.53.1 Detailed Description . . . 3210
5.54 c++locale.h File Reference . . . 3211
5.54.1 Detailed Description . . . 3211
5.55 cassert File Reference . . . 3211
5.55.1 Detailed Description . . . 3211
5.56 cast.h File Reference . . . 3211
5.56.1 Detailed Description . . . 3212
5.57 cc_hash_max_collision_check_resize_trigger_imp.hpp File Reference . . . 3212
5.57.1 Detailed Description . . . 3212
5.58 cc_ht_map_.hpp File Reference . . . 3212
5.58.1 Detailed Description . . . 3213
5.59 ccomplex File Reference . . . 3213
5.59.1 Detailed Description . . . 3213
5.60 ccomplex File Reference . . . 3213
5.60.1 Detailed Description . . . 3213
5.61 cctype File Reference . . . 3213
5.61.1 Detailed Description . . . 3213
5.62 cctype File Reference . . . 3214

5.62.1 Detailed Description . . . 3214
5.63 cerrno File Reference . . . 3214
5.63.1 Detailed Description . . . 3214
5.64 cfenv File Reference . . . 3214
5.64.1 Detailed Description . . . 3214
5.65 cfenv File Reference . . . 3214
5.65.1 Detailed Description . . . 3215
5.66 cfloat File Reference . . . 3215
5.66.1 Detailed Description . . . 3215
5.67 cfloat File Reference . . . 3215
5.67.1 Detailed Description . . . 3215
5.68 char_traits.h File Reference . . . 3215
5.68.1 Detailed Description . . . 3216
5.69 charconv File Reference . . . 3216
5.69.1 Detailed Description . . . 3217
5.70 charconv.h File Reference . . . 3218
5.70.1 Detailed Description . . . 3218
5.71 checkers.h File Reference . . . 3218
5.71.1 Detailed Description . . . 3218
5.72 chrono File Reference . . . 3218
5.72.1 Detailed Description . . . 3220
5.73 chrono File Reference . . . 3220
5.73.1 Detailed Description . . . 3220
5.74 cinttypes File Reference . . . 3220
5.74.1 Detailed Description . . . 3221
5.75 cinttypes File Reference . . . 3221
5.75.1 Detailed Description . . . 3221
5.76 ciso646 File Reference . . . 3221
5.76.1 Detailed Description . . . 3221
5.77 climits File Reference . . . 3221
5.77.1 Detailed Description . . . 3221
5.78 climits File Reference . . . 3221
5.78.1 Detailed Description . . . 3222
5.79 clocale File Reference . . . 3222
5.79.1 Detailed Description . . . 3222
5.80 cmath File Reference . . . 3222
5.80.1 Detailed Description . . . 3225

5.81 cmath File Reference . . . 3225
5.81.1 Detailed Description . . . 3226
5.82 cmath File Reference . . . 3226
5.82.1 Detailed Description . . . 3228
5.83 cmp_fn_imps.hpp File Reference . . . 3228
5.83.1 Detailed Description . . . 3228
5.84 codecvt File Reference . . . 3229
5.84.1 Detailed Description . . . 3229
5.85 codecvt.h File Reference . . . 3229
5.85.1 Detailed Description . . . 3229
5.86 codecvt_specializations.h File Reference . . . 3230
5.86.1 Detailed Description . . . 3230
5.87 compare File Reference . . . 3230
5.87.1 Detailed Description . . . 3230
5.88 compatibility.h File Reference . . . 3230
5.88.1 Detailed Description . . . 3230
5.89 compatibility.h File Reference . . . 3230
5.89.1 Detailed Description . . . 3231
5.90 compiletime_settings.h File Reference . . . 3231
5.90.1 Detailed Description . . . 3231
5.90.2 Macro Definition Documentation . . . 3231
5.91 complex File Reference . . . 3232
5.91.1 Detailed Description . . . 3237
5.92 complex File Reference . . . 3237
5.92.1 Detailed Description . . . 3238
5.93 complex.h File Reference . . . 3238
5.93.1 Detailed Description . . . 3238
5.94 concept_check.h File Reference . . . 3238
5.94.1 Detailed Description . . . 3238
5.95 concepts File Reference . . . 3238
5.95.1 Detailed Description . . . 3238
5.96 concurrence.h File Reference . . . 3239
5.96.1 Detailed Description . . . 3239
5.97 cond_dealtor.hpp File Reference . . . 3239
5.97.1 Detailed Description . . . 3239
5.98 cond_key_dtor_entry_dealtor.hpp File Reference . . . 3239
5.98.1 Detailed Description . . . 3240

5.99 condition_variable File Reference . . . 3240
5.99.1 Detailed Description . . . 3240
5.100const_iterator.hpp File Reference . . . 3240
5.100.1 Detailed Description . . . 3241
5.101const_iterator.hpp File Reference . . . 3241
5.101.1 Detailed Description . . . 3241
5.102const_iterator.hpp File Reference . . . 3241
5.102.1 Detailed Description . . . 3241
5.103constructor_destructor_fn_imps.hpp File Reference . . . 3241
5.103.1 Detailed Description . . . 3241
5.104constructor_destructor_fn_imps.hpp File Reference . . . 3242
5.104.1 Detailed Description . . . 3242
5.105constructor_destructor_fn_imps.hpp File Reference . . . 3242
5.106constructor_destructor_no_store_hash_fn_imps.hpp File Reference . . . 3242
5.106.1 Detailed Description . . . 3242
5.107constructor_destructor_no_store_hash_fn_imps.hpp File Reference . . . 3242
5.107.1 Detailed Description . . . 3242
5.108constructor_destructor_store_hash_fn_imps.hpp File Reference . . . 3242
5.108.1 Detailed Description . . . 3242
5.109constructor_destructor_store_hash_fn_imps.hpp File Reference . . . 3242
5.109.1 Detailed Description . . . 3242
5.110constructors_destructor_fn_imps.hpp File Reference . . . 3242
5.110.1 Detailed Description . . . 3242
5.111constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.111.1 Detailed Description . . . 3243
5.112constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.112.1 Detailed Description . . . 3243
5.113constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.113.1 Detailed Description . . . 3243
5.114constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.114.1 Detailed Description . . . 3243
5.115constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.115.1 Detailed Description . . . 3243
5.116constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.116.1 Detailed Description . . . 3243
5.117constructors_destructor_fn_imps.hpp File Reference . . . 3243
5.117.1 Detailed Description . . . 3244

5.118constructors_destructor_fn_imps.hpp File Reference . . . 3244
5.118.1 Detailed Description . . . 3244
5.119constructors_destructor_fn_imps.hpp File Reference . . . 3244
5.119.1 Detailed Description . . . 3244
5.120constructors_destructor_fn_imps.hpp File Reference . . . 3244
5.120.1 Detailed Description . . . 3244
5.121constructors_destructor_fn_imps.hpp File Reference . . . 3244
5.121.1 Detailed Description . . . 3244
5.122container_base_dispatch.hpp File Reference . . . 3244
5.122.1 Detailed Description . . . 3245
5.123cpp_type_traits.h File Reference . . . 3245
5.123.1 Detailed Description . . . 3246
5.124cpu_defines.h File Reference . . . 3246
5.124.1 Detailed Description . . . 3246
5.125csetjmp File Reference . . . 3246
5.125.1 Detailed Description . . . 3246
5.126csignal File Reference . . . 3246
5.126.1 Detailed Description . . . 3247
5.127cstdalign File Reference . . . 3247
5.127.1 Detailed Description . . . 3247
5.128cstdarg File Reference . . . 3247
5.128.1 Detailed Description . . . 3247
5.129cstdarg File Reference . . . 3247
5.129.1 Detailed Description . . . 3248
5.130cstdbool File Reference . . . 3248
5.130.1 Detailed Description . . . 3248
5.131cstdbool File Reference . . . 3248
5.131.1 Detailed Description . . . 3248
5.132cstddef File Reference . . . 3248
5.132.1 Detailed Description . . . 3248
5.133cstdint File Reference . . . 3249
5.133.1 Detailed Description . . . 3249
5.134cstdint File Reference . . . 3249
5.134.1 Detailed Description . . . 3249
5.135cstdio File Reference . . . 3249
5.135.1 Detailed Description . . . 3249
5.136cstdio File Reference . . . 3250

5.136.1 Detailed Description . . . 3250
5.137cstdlib File Reference . . . 3250
5.137.1 Detailed Description . . . 3250
5.138cstdlib File Reference . . . 3250
5.138.1 Detailed Description . . . 3251
5.139cstring File Reference . . . 3251
5.139.1 Detailed Description . . . 3251
5.140ctgmath File Reference . . . 3251
5.140.1 Detailed Description . . . 3251
5.141ctgmath File Reference . . . 3251
5.141.1 Detailed Description . . . 3252
5.142ctime File Reference . . . 3252
5.142.1 Detailed Description . . . 3252
5.143ctime File Reference . . . 3252
5.143.1 Detailed Description . . . 3252
5.144ctype_inline.h File Reference . . . 3252
5.144.1 Detailed Description . . . 3252
5.145cuchar File Reference . . . 3253
5.145.1 Detailed Description . . . 3253
5.146cwchar File Reference . . . 3253
5.146.1 Detailed Description . . . 3253
5.147cwchar File Reference . . . 3253
5.147.1 Detailed Description . . . 3254
5.148cwctype File Reference . . . 3254
5.148.1 Detailed Description . . . 3254
5.149cwctype File Reference . . . 3254
5.149.1 Detailed Description . . . 3254
5.150cxxabi.h File Reference . . . 3255
5.150.1 Detailed Description . . . 3256
5.151cxxabi_forced.h File Reference . . . 3256
5.151.1 Detailed Description . . . 3256
5.152cxxabi_init_exception.h File Reference . . . 3256
5.152.1 Detailed Description . . . 3257
5.153cxxabi_tweaks.h File Reference . . . 3257
5.153.1 Detailed Description . . . 3257
5.154debug.h File Reference . . . 3257
5.154.1 Detailed Description . . . 3258

5.155debug_allocator.h File Reference . . . 3258
5.155.1 Detailed Description . . . 3258
5.156debug_fn_imps.hpp File Reference . . . 3259
5.156.1 Detailed Description . . . 3259
5.157debug_fn_imps.hpp File Reference . . . 3259
5.157.1 Detailed Description . . . 3259
5.158debug_fn_imps.hpp File Reference . . . 3259
5.158.1 Detailed Description . . . 3259
5.159debug_fn_imps.hpp File Reference . . . 3259
5.159.1 Detailed Description . . . 3259
5.160debug_fn_imps.hpp File Reference . . . 3259
5.160.1 Detailed Description . . . 3259
5.161debug_fn_imps.hpp File Reference . . . 3259
5.161.1 Detailed Description . . . 3259
5.162debug_fn_imps.hpp File Reference . . . 3259
5.162.1 Detailed Description . . . 3260
5.163debug_fn_imps.hpp File Reference . . . 3260
5.163.1 Detailed Description . . . 3260
5.164debug_fn_imps.hpp File Reference . . . 3260
5.164.1 Detailed Description . . . 3260
5.165debug_fn_imps.hpp File Reference . . . 3260
5.165.1 Detailed Description . . . 3260
5.166debug_fn_imps.hpp File Reference . . . 3260
5.166.1 Detailed Description . . . 3260
5.167debug_fn_imps.hpp File Reference . . . 3260
5.167.1 Detailed Description . . . 3260
5.168debug_fn_imps.hpp File Reference . . . 3260
5.168.1 Detailed Description . . . 3260
5.169debug_fn_imps.hpp File Reference . . . 3261
5.169.1 Detailed Description . . . 3261
5.170debug_fn_imps.hpp File Reference . . . 3261
5.170.1 Detailed Description . . . 3261
5.171debug_map_base.hpp File Reference . . . 3261
5.171.1 Detailed Description . . . 3261
5.172debug_no_store_hash_fn_imps.hpp File Reference . . . 3261
5.172.1 Detailed Description . . . 3261
5.173debug_no_store_hash_fn_imps.hpp File Reference . . . 3261

5.173.1 Detailed Description . . . 3261
5.174debug_store_hash_fn_imps.hpp File Reference . . . 3261
5.174.1 Detailed Description . . . 3261
5.175debug_store_hash_fn_imps.hpp File Reference . . . 3262
5.175.1 Detailed Description . . . 3262
5.176decimal File Reference . . . 3262
5.176.1 Detailed Description . . . 3271
5.177deque File Reference . . . 3271
5.177.1 Detailed Description . . . 3271
5.178deque File Reference . . . 3271
5.178.1 Detailed Description . . . 3272
5.179deque File Reference . . . 3272
5.179.1 Detailed Description . . . 3273
5.180deque.tcc File Reference . . . 3273
5.180.1 Detailed Description . . . 3274
5.181direct_mask_range_hashing_imp.hpp File Reference . . . 3274
5.181.1 Detailed Description . . . 3274
5.182direct_mod_range_hashing_imp.hpp File Reference . . . 3274
5.182.1 Detailed Description . . . 3274
5.183dynamic_bitset File Reference . . . 3274
5.183.1 Detailed Description . . . 3275
5.184dynamic_bitset.tcc File Reference . . . 3276
5.184.1 Detailed Description . . . 3276
5.185enable_special_members.h File Reference . . . 3276
5.185.1 Detailed Description . . . 3276
5.186enc_filebuf.h File Reference . . . 3276
5.186.1 Detailed Description . . . 3277
5.187entry_cmp.hpp File Reference . . . 3277
5.187.1 Detailed Description . . . 3277
5.188entry_list_fn_imps.hpp File Reference . . . 3277
5.188.1 Detailed Description . . . 3277
5.189entry_metadata_base.hpp File Reference . . . 3277
5.189.1 Detailed Description . . . 3277
5.190entry_pred.hpp File Reference . . . 3278
5.190.1 Detailed Description . . . 3278
5.191eq_by_less.hpp File Reference . . . 3278
5.191.1 Detailed Description . . . 3278

5.192equally_split.h File Reference . . . 3278
5.192.1 Detailed Description . . . 3279
5.193erase_fn_imps.hpp File Reference . . . 3279
5.193.1 Detailed Description . . . 3279
5.194erase_fn_imps.hpp File Reference . . . 3279
5.194.1 Detailed Description . . . 3279
5.195erase_fn_imps.hpp File Reference . . . 3279
5.195.1 Detailed Description . . . 3279
5.196erase_fn_imps.hpp File Reference . . . 3279
5.196.1 Detailed Description . . . 3279
5.197erase_fn_imps.hpp File Reference . . . 3279
5.197.1 Detailed Description . . . 3279
5.198erase_fn_imps.hpp File Reference . . . 3279
5.198.1 Detailed Description . . . 3279
5.199erase_fn_imps.hpp File Reference . . . 3280
5.199.1 Detailed Description . . . 3280
5.200erase_fn_imps.hpp File Reference . . . 3280
5.200.1 Detailed Description . . . 3280
5.201erase_fn_imps.hpp File Reference . . . 3280
5.201.1 Detailed Description . . . 3280
5.202erase_fn_imps.hpp File Reference . . . 3280
5.202.1 Detailed Description . . . 3280
5.203erase_fn_imps.hpp File Reference . . . 3280
5.203.1 Detailed Description . . . 3280
5.204erase_fn_imps.hpp File Reference . . . 3280
5.204.1 Detailed Description . . . 3280
5.205erase_fn_imps.hpp File Reference . . . 3281
5.205.1 Detailed Description . . . 3281
5.206erase_fn_imps.hpp File Reference . . . 3281
5.206.1 Detailed Description . . . 3281
5.207erase_if.h File Reference . . . 3281
5.207.1 Detailed Description . . . 3281
5.208erase_no_store_hash_fn_imps.hpp File Reference . . . 3281
5.208.1 Detailed Description . . . 3281
5.209erase_no_store_hash_fn_imps.hpp File Reference . . . 3281
5.209.1 Detailed Description . . . 3281
5.210erase_store_hash_fn_imps.hpp File Reference . . . 3282

5.210.1 Detailed Description . . . 3282
5.211erase_store_hash_fn_imps.hpp File Reference . . . 3282
5.211.1 Detailed Description . . . 3282
5.212error_constants.h File Reference . . . 3282
5.212.1 Detailed Description . . . 3282
5.213exception File Reference . . . 3282
5.213.1 Detailed Description . . . 3283
5.214exception.h File Reference . . . 3283
5.214.1 Detailed Description . . . 3284
5.215exception.hpp File Reference . . . 3284
5.215.1 Detailed Description . . . 3284
5.216exception_defines.h File Reference . . . 3284
5.216.1 Detailed Description . . . 3284
5.217exception_ptr.h File Reference . . . 3285
5.217.1 Detailed Description . . . 3285
5.218extc++.h File Reference . . . 3285
5.218.1 Detailed Description . . . 3285
5.219extptr_allocator.h File Reference . . . 3285
5.219.1 Detailed Description . . . 3286
5.220features.h File Reference . . . 3286
5.220.1 Detailed Description . . . 3286
5.220.2 Macro Definition Documentation . . . 3286
5.221fenv.h File Reference . . . 3288
5.221.1 Detailed Description . . . 3288
5.222filesystem File Reference . . . 3288
5.222.1 Detailed Description . . . 3288
5.223find.h File Reference . . . 3288
5.223.1 Detailed Description . . . 3289
5.224find_fn_imps.hpp File Reference . . . 3289
5.224.1 Detailed Description . . . 3289
5.225find_fn_imps.hpp File Reference . . . 3289
5.225.1 Detailed Description . . . 3289
5.226find_fn_imps.hpp File Reference . . . 3289
5.226.1 Detailed Description . . . 3289
5.227find_fn_imps.hpp File Reference . . . 3289
5.227.1 Detailed Description . . . 3289
5.228find_fn_imps.hpp File Reference . . . 3289

5.228.1 Detailed Description . . . 3289
5.229find_fn_imps.hpp File Reference . . . 3289
5.229.1 Detailed Description . . . 3290
5.230find_fn_imps.hpp File Reference . . . 3290
5.230.1 Detailed Description . . . 3290
5.231find_fn_imps.hpp File Reference . . . 3290
5.231.1 Detailed Description . . . 3290
5.232find_fn_imps.hpp File Reference . . . 3290
5.232.1 Detailed Description . . . 3290
5.233find_fn_imps.hpp File Reference . . . 3290
5.233.1 Detailed Description . . . 3290
5.234find_fn_imps.hpp File Reference . . . 3290
5.234.1 Detailed Description . . . 3290
5.235find_no_store_hash_fn_imps.hpp File Reference . . . 3290
5.235.1 Detailed Description . . . 3290
5.236find_selectors.h File Reference . . . 3291
5.236.1 Detailed Description . . . 3291
5.237find_store_hash_fn_imps.hpp File Reference . . . 3291
5.237.1 Detailed Description . . . 3291
5.238find_store_hash_fn_imps.hpp File Reference . . . 3291
5.238.1 Detailed Description . . . 3291
5.239for_each.h File Reference . . . 3291
5.239.1 Detailed Description . . . 3292
5.240for_each_selectors.h File Reference . . . 3292
5.240.1 Detailed Description . . . 3292
5.241formatter.h File Reference . . . 3293
5.241.1 Detailed Description . . . 3293
5.242forward_list File Reference . . . 3294
5.242.1 Detailed Description . . . 3294
5.243forward_list File Reference . . . 3294
5.243.1 Detailed Description . . . 3295
5.244forward_list File Reference . . . 3295
5.244.1 Detailed Description . . . 3295
5.245forward_list.h File Reference . . . 3295
5.245.1 Detailed Description . . . 3296
5.246forward_list.tcc File Reference . . . 3296
5.246.1 Detailed Description . . . 3297

5.247fs_dir.h File Reference . . . 3297
5.247.1 Detailed Description . . . 3297
5.248fs_fwd.h File Reference . . . 3297
5.248.1 Detailed Description . . . 3297
5.249fs_path.h File Reference . . . 3297
5.249.1 Detailed Description . . . 3297
5.250fstream File Reference . . . 3297
5.250.1 Detailed Description . . . 3298
5.251fstream.tcc File Reference . . . 3298
5.251.1 Detailed Description . . . 3298
5.252functexcept.h File Reference . . . 3298
5.252.1 Detailed Description . . . 3299
5.253functional File Reference . . . 3299
5.253.1 Detailed Description . . . 3301
5.254functional File Reference . . . 3301
5.254.1 Detailed Description . . . 3302
5.255functional File Reference . . . 3302
5.255.1 Detailed Description . . . 3303
5.256functional_hash.h File Reference . . . 3303
5.256.1 Detailed Description . . . 3304
5.257functions.h File Reference . . . 3304
5.257.1 Detailed Description . . . 3306
5.258future File Reference . . . 3306
5.258.1 Detailed Description . . . 3308
5.259gp_ht_map_.hpp File Reference . . . 3308
5.259.1 Detailed Description . . . 3308
5.260gslice.h File Reference . . . 3308
5.260.1 Detailed Description . . . 3308
5.261gslice_array.h File Reference . . . 3309
5.261.1 Detailed Description . . . 3309
5.262hash_bytes.h File Reference . . . 3309
5.262.1 Detailed Description . . . 3309
5.263hash_eq_fn.hpp File Reference . . . 3309
5.263.1 Detailed Description . . . 3310
5.264hash_exponential_size_policy_imp.hpp File Reference . . . 3310
5.264.1 Detailed Description . . . 3310
5.265hash_fun.h File Reference . . . 3310

5.265.1 Detailed Description . . . 3310
5.266hash_load_check_resize_trigger_imp.hpp File Reference . . . 3310
5.266.1 Detailed Description . . . 3310
5.267hash_load_check_resize_trigger_size_base.hpp File Reference . . . 3310
5.267.1 Detailed Description . . . 3311
5.268hash_map File Reference . . . 3311
5.268.1 Detailed Description . . . 3311
5.269hash_policy.hpp File Reference . . . 3312
5.269.1 Detailed Description . . . 3313
5.270hash_prime_size_policy_imp.hpp File Reference . . . 3313
5.270.1 Detailed Description . . . 3313
5.271hash_set File Reference . . . 3313
5.271.1 Detailed Description . . . 3314
5.272hash_standard_resize_policy_imp.hpp File Reference . . . 3314
5.272.1 Detailed Description . . . 3314
5.273hashtable.h File Reference . . . 3314
5.273.1 Detailed Description . . . 3314
5.274hashtable.h File Reference . . . 3314
5.274.1 Detailed Description . . . 3315
5.275hashtable_policy.h File Reference . . . 3315
5.275.1 Detailed Description . . . 3317
5.276helper_functions.h File Reference . . . 3317
5.276.1 Detailed Description . . . 3319
5.277indirect_array.h File Reference . . . 3319
5.277.1 Detailed Description . . . 3319
5.278info_fn_imps.hpp File Reference . . . 3319
5.278.1 Detailed Description . . . 3319
5.279info_fn_imps.hpp File Reference . . . 3319
5.279.1 Detailed Description . . . 3319
5.280info_fn_imps.hpp File Reference . . . 3320
5.280.1 Detailed Description . . . 3320
5.281info_fn_imps.hpp File Reference . . . 3320
5.281.1 Detailed Description . . . 3320
5.282info_fn_imps.hpp File Reference . . . 3320
5.282.1 Detailed Description . . . 3320
5.283info_fn_imps.hpp File Reference . . . 3320
5.283.1 Detailed Description . . . 3320

5.284info_fn_imps.hpp File Reference . . . 3320
5.284.1 Detailed Description . . . 3320
5.285info_fn_imps.hpp File Reference . . . 3320
5.285.1 Detailed Description . . . 3320
5.286info_fn_imps.hpp File Reference . . . 3320
5.286.1 Detailed Description . . . 3321
5.287info_fn_imps.hpp File Reference . . . 3321
5.287.1 Detailed Description . . . 3321
5.288initializer_list File Reference . . . 3321
5.288.1 Detailed Description . . . 3321
5.289insert_fn_imps.hpp File Reference . . . 3321
5.289.1 Detailed Description . . . 3321
5.290insert_fn_imps.hpp File Reference . . . 3321
5.290.1 Detailed Description . . . 3321
5.291insert_fn_imps.hpp File Reference . . . 3321
5.291.1 Detailed Description . . . 3321
5.292insert_fn_imps.hpp File Reference . . . 3322
5.292.1 Detailed Description . . . 3322
5.293insert_fn_imps.hpp File Reference . . . 3322
5.293.1 Detailed Description . . . 3322
5.294insert_fn_imps.hpp File Reference . . . 3322
5.294.1 Detailed Description . . . 3322
5.295insert_fn_imps.hpp File Reference . . . 3322
5.295.1 Detailed Description . . . 3322
5.296insert_fn_imps.hpp File Reference . . . 3322
5.296.1 Detailed Description . . . 3322
5.297insert_fn_imps.hpp File Reference . . . 3322
5.297.1 Detailed Description . . . 3322
5.298insert_fn_imps.hpp File Reference . . . 3323
5.298.1 Detailed Description . . . 3323
5.299insert_fn_imps.hpp File Reference . . . 3323
5.299.1 Detailed Description . . . 3323
5.300insert_fn_imps.hpp File Reference . . . 3323
5.300.1 Detailed Description . . . 3323
5.301insert_fn_imps.hpp File Reference . . . 3323
5.301.1 Detailed Description . . . 3323
5.302insert_join_fn_imps.hpp File Reference . . . 3323

5.302.1 Detailed Description . . . 3323
5.303insert_no_store_hash_fn_imps.hpp File Reference . . . 3323
5.303.1 Detailed Description . . . 3323
5.304insert_no_store_hash_fn_imps.hpp File Reference . . . 3323
5.304.1 Detailed Description . . . 3324
5.305insert_store_hash_fn_imps.hpp File Reference . . . 3324
5.305.1 Detailed Description . . . 3324
5.306insert_store_hash_fn_imps.hpp File Reference . . . 3324
5.306.1 Detailed Description . . . 3324
5.307invoke.h File Reference . . . 3324
5.307.1 Detailed Description . . . 3325
5.308iomanip File Reference . . . 3325
5.308.1 Detailed Description . . . 3327
5.309ios File Reference . . . 3327
5.309.1 Detailed Description . . . 3327
5.310ios_base.h File Reference . . . 3327
5.310.1 Detailed Description . . . 3329
5.311iosfwd File Reference . . . 3329
5.311.1 Detailed Description . . . 3330
5.312iostream File Reference . . . 3330
5.312.1 Detailed Description . . . 3331
5.313istream File Reference . . . 3331
5.313.1 Detailed Description . . . 3332
5.314istream.tcc File Reference . . . 3332
5.314.1 Detailed Description . . . 3332
5.315iterator File Reference . . . 3333
5.315.1 Detailed Description . . . 3333
5.316iterator File Reference . . . 3333
5.316.1 Detailed Description . . . 3333
5.317iterator File Reference . . . 3333
5.317.1 Detailed Description . . . 3334
5.318iterator.h File Reference . . . 3334
5.318.1 Detailed Description . . . 3334
5.319iterator.hpp File Reference . . . 3334
5.319.1 Detailed Description . . . 3334
5.320iterator_concepts.h File Reference . . . 3335
5.320.1 Detailed Description . . . 3335

5.321 iterator_fn_imps.hpp File Reference . . . 3335
5.321.1 Detailed Description . . . 3335
5.322 iterators_fn_imps.hpp File Reference . . . 3335
5.322.1 Detailed Description . . . 3335
5.323 iterators_fn_imps.hpp File Reference . . . 3335
5.323.1 Detailed Description . . . 3335
5.324 iterators_fn_imps.hpp File Reference . . . 3335
5.324.1 Detailed Description . . . 3335
5.325 iterators_fn_imps.hpp File Reference . . . 3335
5.325.1 Detailed Description . . . 3335
5.326 iterators_fn_imps.hpp File Reference . . . 3335
5.326.1 Detailed Description . . . 3336
5.327 iterators_fn_imps.hpp File Reference . . . 3336
5.327.1 Detailed Description . . . 3336
5.328 iterators_fn_imps.hpp File Reference . . . 3336
5.328.1 Detailed Description . . . 3336
5.329 left_child_next_sibling_heap_.hpp File Reference . . . 3336
5.329.1 Detailed Description . . . 3336
5.330 lfts_config.h File Reference . . . 3336
5.330.1 Detailed Description . . . 3336
5.331 limits File Reference . . . 3337
5.331.1 Detailed Description . . . 3338
5.332 linear_probe_fn_imp.hpp File Reference . . . 3338
5.332.1 Detailed Description . . . 3338
5.333 list File Reference . . . 3338
5.333.1 Detailed Description . . . 3338
5.334 list File Reference . . . 3338
5.334.1 Detailed Description . . . 3339
5.335 list File Reference . . . 3339
5.335.1 Detailed Description . . . 3340
5.336 list.tcc File Reference . . . 3340
5.336.1 Detailed Description . . . 3340
5.337 list_partition.h File Reference . . . 3340
5.337.1 Detailed Description . . . 3341
5.338 list_update_policy.hpp File Reference . . . 3341
5.338.1 Detailed Description . . . 3341
5.339 locale File Reference . . . 3341

5.339.1 Detailed Description . . . 3341
5.340locale_classes.h File Reference . . . 3341
5.340.1 Detailed Description . . . 3342
5.341locale_classes.tcc File Reference . . . 3342
5.341.1 Detailed Description . . . 3342
5.342locale_conv.h File Reference . . . 3342
5.342.1 Detailed Description . . . 3343
5.343locale_facets.h File Reference . . . 3343
5.343.1 Detailed Description . . . 3344
5.344locale_facets.tcc File Reference . . . 3345
5.344.1 Detailed Description . . . 3345
5.345locale_facets_nonio.h File Reference . . . 3345
5.345.1 Detailed Description . . . 3346
5.346locale_facets_nonio.tcc File Reference . . . 3346
5.346.1 Detailed Description . . . 3346
5.347localefwd.h File Reference . . . 3346
5.347.1 Detailed Description . . . 3347
5.348losertree.h File Reference . . . 3347
5.348.1 Detailed Description . . . 3348
5.349lu_counter_metadata.hpp File Reference . . . 3348
5.349.1 Detailed Description . . . 3348
5.350lu_map_.hpp File Reference . . . 3348
5.350.1 Detailed Description . . . 3349
5.351macros.h File Reference . . . 3349
5.351.1 Detailed Description . . . 3350
5.351.2 Macro Definition Documentation . . . 3350
5.352malloc_allocator.h File Reference . . . 3352
5.352.1 Detailed Description . . . 3352
5.353map File Reference . . . 3352
5.353.1 Detailed Description . . . 3352
5.354map File Reference . . . 3352
5.354.1 Detailed Description . . . 3353
5.355map File Reference . . . 3353
5.355.1 Detailed Description . . . 3353
5.356map.h File Reference . . . 3353
5.356.1 Detailed Description . . . 3354
5.357mask_array.h File Reference . . . 3354

5.357.1 Detailed Description . . . 3355
5.358 mask_based_range_hashing.hpp File Reference . . . 3355
5.358.1 Detailed Description . . . 3355
5.359 math.h File Reference . . . 3355
5.359.1 Detailed Description . . . 3355
5.360 memory File Reference . . . 3355
5.360.1 Detailed Description . . . 3356
5.361 memory File Reference . . . 3356
5.361.1 Detailed Description . . . 3357
5.362 memory File Reference . . . 3357
5.362.1 Detailed Description . . . 3358
5.363 memory_resource File Reference . . . 3358
5.363.1 Detailed Description . . . 3358
5.364 memory_resource File Reference . . . 3358
5.364.1 Detailed Description . . . 3359
5.365 memoryfwd.h File Reference . . . 3359
5.365.1 Detailed Description . . . 3359
5.366 merge.h File Reference . . . 3359
5.366.1 Detailed Description . . . 3360
5.367 messages_members.h File Reference . . . 3360
5.367.1 Detailed Description . . . 3360
5.368 mod_based_range_hashing.hpp File Reference . . . 3360
5.368.1 Detailed Description . . . 3360
5.369 move.h File Reference . . . 3360
5.369.1 Detailed Description . . . 3361
5.370 mt_allocator.h File Reference . . . 3361
5.370.1 Detailed Description . . . 3362
5.371 multimap.h File Reference . . . 3362
5.371.1 Detailed Description . . . 3363
5.372 multiseq_selection.h File Reference . . . 3363
5.372.1 Detailed Description . . . 3364
5.373 multiset.h File Reference . . . 3364
5.373.1 Detailed Description . . . 3364
5.374 multiway_merge.h File Reference . . . 3365
5.374.1 Detailed Description . . . 3367
5.374.2 Macro Definition Documentation . . . 3367
5.375 multiway_mergesort.h File Reference . . . 3368

5.375.1 Detailed Description . . . 3368
5.376 mutex File Reference . . . 3368
5.376.1 Detailed Description . . . 3369
5.377 nested_exception.h File Reference . . . 3369
5.377.1 Detailed Description . . . 3369
5.378 net.h File Reference . . . 3369
5.378.1 Detailed Description . . . 3370
5.379 new File Reference . . . 3370
5.379.1 Detailed Description . . . 3370
5.379.2 Function Documentation . . . 3371
5.380 new_allocator.h File Reference . . . 3374
5.380.1 Detailed Description . . . 3374
5.381 node.hpp File Reference . . . 3374
5.381.1 Detailed Description . . . 3374
5.382 node.hpp File Reference . . . 3374
5.382.1 Detailed Description . . . 3374
5.383 node.hpp File Reference . . . 3375
5.383.1 Detailed Description . . . 3375
5.384 node_handle.h File Reference . . . 3375
5.384.1 Detailed Description . . . 3375
5.385 node_iterators.hpp File Reference . . . 3375
5.385.1 Detailed Description . . . 3375
5.386 node_iterators.hpp File Reference . . . 3376
5.386.1 Detailed Description . . . 3376
5.387 node_metadata_selector.hpp File Reference . . . 3376
5.387.1 Detailed Description . . . 3376
5.388 node_metadata_selector.hpp File Reference . . . 3376
5.388.1 Detailed Description . . . 3377
5.389 null_node_metadata.hpp File Reference . . . 3377
5.389.1 Detailed Description . . . 3377
5.390 numbers File Reference . . . 3377
5.390.1 Detailed Description . . . 3377
5.391 numeric File Reference . . . 3377
5.391.1 Detailed Description . . . 3378
5.392 numeric File Reference . . . 3378
5.392.1 Detailed Description . . . 3378
5.393 numeric File Reference . . . 3378

5.393.1 Detailed Description . . . 3380
5.394 numeric File Reference . . . 3380
5.394.1 Detailed Description . . . 3381
5.395 numeric_traits.h File Reference . . . 3381
5.395.1 Detailed Description . . . 3381
5.396 numericfwd.h File Reference . . . 3382
5.396.1 Detailed Description . . . 3383
5.397 omp_loop.h File Reference . . . 3383
5.397.1 Detailed Description . . . 3384
5.398 omp_loop_static.h File Reference . . . 3384
5.398.1 Detailed Description . . . 3384
5.399 opt_random.h File Reference . . . 3384
5.399.1 Detailed Description . . . 3384
5.400 optional File Reference . . . 3384
5.400.1 Detailed Description . . . 3384
5.401 optional File Reference . . . 3385
5.401.1 Detailed Description . . . 3385
5.402 order_statistics_imp.hpp File Reference . . . 3385
5.402.1 Detailed Description . . . 3385
5.403 order_statistics_imp.hpp File Reference . . . 3385
5.403.1 Detailed Description . . . 3385
5.404 os_defines.h File Reference . . . 3386
5.404.1 Detailed Description . . . 3386
5.405 ostream File Reference . . . 3386
5.405.1 Detailed Description . . . 3387
5.406 ostream.tcc File Reference . . . 3387
5.406.1 Detailed Description . . . 3388
5.407 ostream_insert.h File Reference . . . 3388
5.407.1 Detailed Description . . . 3388
5.408 ov_tree_map_.hpp File Reference . . . 3388
5.408.1 Detailed Description . . . 3389
5.409 pairing_heap_.hpp File Reference . . . 3389
5.409.1 Detailed Description . . . 3389
5.410 par_loop.h File Reference . . . 3389
5.410.1 Detailed Description . . . 3390
5.411 parallel.h File Reference . . . 3390
5.411.1 Detailed Description . . . 3390

5.412parse_numbers.h File Reference . . . 3390
5.412.1 Detailed Description . . . 3390
5.413partial_sum.h File Reference . . . 3390
5.413.1 Detailed Description . . . 3391
5.414partition.h File Reference . . . 3391
5.414.1 Detailed Description . . . 3391
5.414.2 Macro Definition Documentation . . . 3391
5.415pat_trie_.hpp File Reference . . . 3392
5.415.1 Detailed Description . . . 3392
5.416pat_trie_base.hpp File Reference . . . 3392
5.416.1 Detailed Description . . . 3393
5.417pod_char_traits.h File Reference . . . 3393
5.417.1 Detailed Description . . . 3393
5.418point_const_iterator.hpp File Reference . . . 3393
5.418.1 Detailed Description . . . 3394
5.419point_const_iterator.hpp File Reference . . . 3394
5.419.1 Detailed Description . . . 3394
5.420point_const_iterator.hpp File Reference . . . 3394
5.420.1 Detailed Description . . . 3394
5.421point_iterator.hpp File Reference . . . 3394
5.421.1 Detailed Description . . . 3394
5.422point_iterators.hpp File Reference . . . 3395
5.422.1 Detailed Description . . . 3395
5.423pointer.h File Reference . . . 3395
5.423.1 Detailed Description . . . 3397
5.424policy_access_fn_imps.hpp File Reference . . . 3397
5.424.1 Detailed Description . . . 3397
5.425policy_access_fn_imps.hpp File Reference . . . 3397
5.425.1 Detailed Description . . . 3397
5.426policy_access_fn_imps.hpp File Reference . . . 3397
5.426.1 Detailed Description . . . 3397
5.427policy_access_fn_imps.hpp File Reference . . . 3398
5.427.1 Detailed Description . . . 3398
5.428policy_access_fn_imps.hpp File Reference . . . 3398
5.428.1 Detailed Description . . . 3398
5.429policy_access_fn_imps.hpp File Reference . . . 3398
5.429.1 Detailed Description . . . 3398

5.430policy_access_fn_imps.hpp File Reference . . . 3398
5.430.1 Detailed Description . . . 3398
5.431pool_allocator.h File Reference . . . 3398
5.431.1 Detailed Description . . . 3399
5.432postypes.h File Reference . . . 3399
5.432.1 Detailed Description . . . 3399
5.433predefined_ops.h File Reference . . . 3399
5.433.1 Detailed Description . . . 3400
5.434prefix_search_node_update_imp.hpp File Reference . . . 3401
5.434.1 Detailed Description . . . 3401
5.435priority_queue.hpp File Reference . . . 3401
5.435.1 Detailed Description . . . 3401
5.436priority_queue_base_dispatch.hpp File Reference . . . 3401
5.436.1 Detailed Description . . . 3401
5.437probe_fn_base.hpp File Reference . . . 3402
5.437.1 Detailed Description . . . 3402
5.438propagate_const File Reference . . . 3402
5.438.1 Detailed Description . . . 3404
5.439ptr_traits.h File Reference . . . 3404
5.439.1 Detailed Description . . . 3404
5.440quadratic_probe_fn_imp.hpp File Reference . . . 3405
5.440.1 Detailed Description . . . 3405
5.441queue File Reference . . . 3405
5.441.1 Detailed Description . . . 3405
5.442queue.h File Reference . . . 3405
5.442.1 Detailed Description . . . 3405
5.442.2 Macro Definition Documentation . . . 3405
5.443quicksort.h File Reference . . . 3406
5.443.1 Detailed Description . . . 3406
5.444quoted_string.h File Reference . . . 3406
5.444.1 Detailed Description . . . 3407
5.445r_erase_fn_imps.hpp File Reference . . . 3407
5.445.1 Detailed Description . . . 3407
5.446r_erase_fn_imps.hpp File Reference . . . 3407
5.446.1 Detailed Description . . . 3407
5.447random File Reference . . . 3407
5.447.1 Detailed Description . . . 3407

5.448random File Reference . . . 3407
5.448.1 Detailed Description . . . 3408
5.449random.h File Reference . . . 3408
5.449.1 Detailed Description . . . 3412
5.450random.tcc File Reference . . . 3412
5.450.1 Detailed Description . . . 3417
5.451random.tcc File Reference . . . 3417
5.451.1 Detailed Description . . . 3420
5.452random_number.h File Reference . . . 3420
5.452.1 Detailed Description . . . 3420
5.453random_shuffle.h File Reference . . . 3420
5.453.1 Detailed Description . . . 3421
5.454range_access.h File Reference . . . 3421
5.454.1 Detailed Description . . . 3422
5.455range_cmp.h File Reference . . . 3422
5.455.1 Detailed Description . . . 3422
5.456ranged_hash_fn.hpp File Reference . . . 3423
5.456.1 Detailed Description . . . 3423
5.457ranged_probe_fn.hpp File Reference . . . 3423
5.457.1 Detailed Description . . . 3424
5.458ranges File Reference . . . 3424
5.458.1 Detailed Description . . . 3424
5.459ranges_algo.h File Reference . . . 3424
5.459.1 Detailed Description . . . 3424
5.460ranges_algobase.h File Reference . . . 3424
5.460.1 Detailed Description . . . 3424
5.461ranges_uninitialized.h File Reference . . . 3424
5.461.1 Detailed Description . . . 3424
5.462ratio File Reference . . . 3424
5.462.1 Detailed Description . . . 3425
5.463ratio File Reference . . . 3426
5.463.1 Detailed Description . . . 3426
5.464ratio File Reference . . . 3426
5.464.1 Detailed Description . . . 3426
5.465rb_tree File Reference . . . 3426
5.465.1 Detailed Description . . . 3427
5.466rb_tree_.hpp File Reference . . . 3427

5.466.1 Detailed Description . . . 3427
5.467rc.hpp File Reference . . . 3427
5.467.1 Detailed Description . . . 3428
5.468rc_binomial_heap_.hpp File Reference . . . 3428
5.468.1 Detailed Description . . . 3428
5.469rc_string_base.h File Reference . . . 3428
5.469.1 Detailed Description . . . 3428
5.470refwrap.h File Reference . . . 3428
5.470.1 Detailed Description . . . 3429
5.471regex File Reference . . . 3429
5.471.1 Detailed Description . . . 3429
5.472regex File Reference . . . 3429
5.472.1 Detailed Description . . . 3429
5.473regex.h File Reference . . . 3429
5.473.1 Detailed Description . . . 3432
5.474regex.tcc File Reference . . . 3432
5.474.1 Detailed Description . . . 3433
5.475regex_automaton.h File Reference . . . 3433
5.475.1 Detailed Description . . . 3433
5.476regex_automaton.tcc File Reference . . . 3434
5.476.1 Detailed Description . . . 3434
5.477regex_compiler.h File Reference . . . 3434
5.477.1 Detailed Description . . . 3435
5.478regex_compiler.tcc File Reference . . . 3435
5.478.1 Detailed Description . . . 3435
5.479regex_constants.h File Reference . . . 3435
5.479.1 Detailed Description . . . 3436
5.480regex_error.h File Reference . . . 3437
5.480.1 Detailed Description . . . 3437
5.481regex_executor.h File Reference . . . 3437
5.481.1 Detailed Description . . . 3438
5.482regex_executor.tcc File Reference . . . 3438
5.482.1 Detailed Description . . . 3438
5.483regex_scanner.h File Reference . . . 3438
5.483.1 Detailed Description . . . 3438
5.484regex_scanner.tcc File Reference . . . 3438
5.484.1 Detailed Description . . . 3439

5.485resize_fn_imps.hpp File Reference . . . 3439
5.485.1 Detailed Description . . . 3439
5.486resize_fn_imps.hpp File Reference . . . 3439
5.486.1 Detailed Description . . . 3439
5.487resize_no_store_hash_fn_imps.hpp File Reference . . . 3439
5.487.1 Detailed Description . . . 3439
5.488resize_no_store_hash_fn_imps.hpp File Reference . . . 3439
5.488.1 Detailed Description . . . 3439
5.489resize_policy.hpp File Reference . . . 3439
5.489.1 Detailed Description . . . 3440
5.490resize_store_hash_fn_imps.hpp File Reference . . . 3440
5.490.1 Detailed Description . . . 3440
5.491resize_store_hash_fn_imps.hpp File Reference . . . 3440
5.491.1 Detailed Description . . . 3440
5.492rope File Reference . . . 3440
5.492.1 Detailed Description . . . 3443
5.493ropeimpl.h File Reference . . . 3443
5.493.1 Detailed Description . . . 3444
5.494rotate_fn_imps.hpp File Reference . . . 3444
5.494.1 Detailed Description . . . 3444
5.495rotate_fn_imps.hpp File Reference . . . 3444
5.495.1 Detailed Description . . . 3444
5.496safe_base.h File Reference . . . 3444
5.496.1 Detailed Description . . . 3444
5.497safe_container.h File Reference . . . 3445
5.497.1 Detailed Description . . . 3445
5.498safe_iterator.h File Reference . . . 3445
5.498.1 Detailed Description . . . 3446
5.499safe_iterator.tcc File Reference . . . 3446
5.499.1 Detailed Description . . . 3447
5.500safe_local_iterator.h File Reference . . . 3447
5.500.1 Detailed Description . . . 3447
5.501safe_local_iterator.tcc File Reference . . . 3447
5.501.1 Detailed Description . . . 3448
5.502safe_sequence.h File Reference . . . 3448
5.502.1 Detailed Description . . . 3448
5.503safe_sequence.tcc File Reference . . . 3448

5.503.1 Detailed Description . . . 3448
5.504safe_unordered_base.h File Reference . . . 3449
5.504.1 Detailed Description . . . 3449
5.505safe_unordered_container.h File Reference . . . 3449
5.505.1 Detailed Description . . . 3449
5.506safe_unordered_container.tcc File Reference . . . 3449
5.506.1 Detailed Description . . . 3449
5.507sample_probe_fn.hpp File Reference . . . 3450
5.507.1 Detailed Description . . . 3450
5.508sample_range_hashing.hpp File Reference . . . 3450
5.508.1 Detailed Description . . . 3450
5.509sample_ranged_hash_fn.hpp File Reference . . . 3450
5.509.1 Detailed Description . . . 3450
5.510sample_ranged_probe_fn.hpp File Reference . . . 3451
5.510.1 Detailed Description . . . 3451
5.511sample_resize_policy.hpp File Reference . . . 3451
5.511.1 Detailed Description . . . 3451
5.512sample_resize_trigger.hpp File Reference . . . 3451
5.512.1 Detailed Description . . . 3451
5.513sample_size_policy.hpp File Reference . . . 3452
5.513.1 Detailed Description . . . 3452
5.514sample_tree_node_update.hpp File Reference . . . 3452
5.514.1 Detailed Description . . . 3452
5.515sample_trie_access_traits.hpp File Reference . . . 3452
5.515.1 Detailed Description . . . 3452
5.516sample_trie_node_update.hpp File Reference . . . 3453
5.516.1 Detailed Description . . . 3453
5.517sample_update_policy.hpp File Reference . . . 3453
5.517.1 Detailed Description . . . 3453
5.518scoped_allocator File Reference . . . 3453
5.518.1 Detailed Description . . . 3454
5.519search.h File Reference . . . 3454
5.519.1 Detailed Description . . . 3454
5.520set File Reference . . . 3454
5.520.1 Detailed Description . . . 3454
5.521set File Reference . . . 3454
5.521.1 Detailed Description . . . 3455

5.522set File Reference . . . 3455
5.522.1 Detailed Description . . . 3455
5.523set.h File Reference . . . 3455
5.523.1 Detailed Description . . . 3456
5.524set_operations.h File Reference . . . 3456
5.524.1 Detailed Description . . . 3457
5.525settings.h File Reference . . . 3457
5.525.1 Detailed Description . . . 3457
5.525.2 Deciding whether to run an algorithm in parallel. . . . 3457
5.525.3 Macro Definition Documentation . . . 3458
5.526shared_mutex File Reference . . . 3458
5.526.1 Detailed Description . . . 3458
5.527shared_ptr.h File Reference . . . 3459
5.527.1 Detailed Description . . . 3459
5.528shared_ptr.h File Reference . . . 3459
5.528.1 Detailed Description . . . 3462
5.529shared_ptr_atomic.h File Reference . . . 3462
5.529.1 Detailed Description . . . 3462
5.530shared_ptr_base.h File Reference . . . 3462
5.530.1 Detailed Description . . . 3464
5.531size_fn_imps.hpp File Reference . . . 3464
5.531.1 Detailed Description . . . 3464
5.532slice_array.h File Reference . . . 3464
5.532.1 Detailed Description . . . 3464
5.533slist File Reference . . . 3464
5.533.1 Detailed Description . . . 3465
5.534sort.h File Reference . . . 3465
5.534.1 Detailed Description . . . 3466
5.535span File Reference . . . 3466
5.535.1 Detailed Description . . . 3466
5.536specfun.h File Reference . . . 3466
5.536.1 Detailed Description . . . 3469
5.537splay_fn_imps.hpp File Reference . . . 3469
5.537.1 Detailed Description . . . 3469
5.538splay_tree_.hpp File Reference . . . 3469
5.538.1 Detailed Description . . . 3469
5.539split_fn_imps.hpp File Reference . . . 3470

5.539.1 Detailed Description . . . 3470
5.540split_join_fn_imps.hpp File Reference . . . 3470
5.540.1 Detailed Description . . . 3470
5.541split_join_fn_imps.hpp File Reference . . . 3470
5.541.1 Detailed Description . . . 3470
5.542split_join_fn_imps.hpp File Reference . . . 3470
5.542.1 Detailed Description . . . 3470
5.543split_join_fn_imps.hpp File Reference . . . 3470
5.543.1 Detailed Description . . . 3470
5.544split_join_fn_imps.hpp File Reference . . . 3470
5.544.1 Detailed Description . . . 3470
5.545split_join_fn_imps.hpp File Reference . . . 3470
5.545.1 Detailed Description . . . 3471
5.546split_join_fn_imps.hpp File Reference . . . 3471
5.546.1 Detailed Description . . . 3471
5.547split_join_fn_imps.hpp File Reference . . . 3471
5.547.1 Detailed Description . . . 3471
5.548split_join_fn_imps.hpp File Reference . . . 3471
5.548.1 Detailed Description . . . 3471
5.549sso_string_base.h File Reference . . . 3471
5.549.1 Detailed Description . . . 3471
5.550sstream File Reference . . . 3471
5.550.1 Detailed Description . . . 3472
5.551sstream.tcc File Reference . . . 3472
5.551.1 Detailed Description . . . 3472
5.552stack File Reference . . . 3472
5.552.1 Detailed Description . . . 3473
5.553standard_policies.hpp File Reference . . . 3473
5.553.1 Detailed Description . . . 3473
5.554std_abs.h File Reference . . . 3473
5.554.1 Detailed Description . . . 3474
5.555std_function.h File Reference . . . 3474
5.555.1 Detailed Description . . . 3474
5.556std_mutex.h File Reference . . . 3475
5.556.1 Detailed Description . . . 3475
5.557stdc++.h File Reference . . . 3475
5.557.1 Detailed Description . . . 3475

5.558stdexcept File Reference . . . 3475
5.558.1 Detailed Description . . . 3476
5.559stdio_filebuf.h File Reference . . . 3476
5.559.1 Detailed Description . . . 3476
5.560stdio_sync_filebuf.h File Reference . . . 3476
5.560.1 Detailed Description . . . 3476
5.561stdlib.h File Reference . . . 3477
5.561.1 Detailed Description . . . 3477
5.562stdtr1c++.h File Reference . . . 3477
5.562.1 Detailed Description . . . 3477
5.563stl_algo.h File Reference . . . 3477
5.563.1 Detailed Description . . . 3487
5.564stl_algobase.h File Reference . . . 3487
5.564.1 Detailed Description . . . 3493
5.565stl_bvector.h File Reference . . . 3493
5.565.1 Detailed Description . . . 3493
5.566stl_construct.h File Reference . . . 3494
5.566.1 Detailed Description . . . 3494
5.567stl_deque.h File Reference . . . 3494
5.567.1 Detailed Description . . . 3495
5.567.2 Macro Definition Documentation . . . 3495
5.568stl_function.h File Reference . . . 3495
5.568.1 Detailed Description . . . 3497
5.569stl_heap.h File Reference . . . 3497
5.569.1 Detailed Description . . . 3499
5.570stl_iterator.h File Reference . . . 3499
5.570.1 Detailed Description . . . 3503
5.571stl_iterator.h File Reference . . . 3503
5.571.1 Detailed Description . . . 3503
5.572stl_iterator_base_funcs.h File Reference . . . 3504
5.572.1 Detailed Description . . . 3504
5.573stl_iterator_base_types.h File Reference . . . 3505
5.573.1 Detailed Description . . . 3505
5.574stl_list.h File Reference . . . 3505
5.574.1 Detailed Description . . . 3506
5.575stl_map.h File Reference . . . 3506
5.575.1 Detailed Description . . . 3507

5.576stl_multimap.h File Reference . . . 3507
5.576.1 Detailed Description . . . 3508
5.577stl_multiset.h File Reference . . . 3508
5.577.1 Detailed Description . . . 3509
5.578stl_numeric.h File Reference . . . 3509
5.578.1 Detailed Description . . . 3509
5.579stl_pair.h File Reference . . . 3510
5.579.1 Detailed Description . . . 3510
5.580stl_queue.h File Reference . . . 3510
5.580.1 Detailed Description . . . 3511
5.581stl_raw_storage_iter.h File Reference . . . 3511
5.581.1 Detailed Description . . . 3511
5.582stl_relops.h File Reference . . . 3511
5.582.1 Detailed Description . . . 3512
5.583stl_set.h File Reference . . . 3512
5.583.1 Detailed Description . . . 3512
5.584stl_stack.h File Reference . . . 3513
5.584.1 Detailed Description . . . 3513
5.585stl_tempbuf.h File Reference . . . 3513
5.585.1 Detailed Description . . . 3514
5.586stl_tree.h File Reference . . . 3514
5.586.1 Detailed Description . . . 3515
5.587stl_uninitialized.h File Reference . . . 3515
5.587.1 Detailed Description . . . 3515
5.588stl_vector.h File Reference . . . 3515
5.588.1 Detailed Description . . . 3516
5.589stop_token File Reference . . . 3516
5.589.1 Detailed Description . . . 3516
5.590stream_iterator.h File Reference . . . 3516
5.590.1 Detailed Description . . . 3517
5.591streambuf File Reference . . . 3517
5.591.1 Detailed Description . . . 3517
5.592streambuf.tcc File Reference . . . 3517
5.592.1 Detailed Description . . . 3518
5.593streambuf_iterator.h File Reference . . . 3518
5.593.1 Detailed Description . . . 3519
5.594string File Reference . . . 3519

5.594.1 Detailed Description . . . 3519
5.595string File Reference . . . 3519
5.595.1 Detailed Description . . . 3522
5.596string File Reference . . . 3522
5.596.1 Detailed Description . . . 3522
5.597string_conversions.h File Reference . . . 3522
5.597.1 Detailed Description . . . 3523
5.598string_view File Reference . . . 3523
5.598.1 Detailed Description . . . 3525
5.599string_view.tcc File Reference . . . 3525
5.599.1 Detailed Description . . . 3525
5.600string_view.tcc File Reference . . . 3525
5.600.1 Detailed Description . . . 3525
5.601stringfwd.h File Reference . . . 3525
5.601.1 Detailed Description . . . 3526
5.602strstream File Reference . . . 3526
5.602.1 Detailed Description . . . 3526
5.603synth_access_traits.hpp File Reference . . . 3526
5.603.1 Detailed Description . . . 3526
5.604system_error File Reference . . . 3527
5.604.1 Detailed Description . . . 3527
5.605system_error File Reference . . . 3527
5.605.1 Detailed Description . . . 3528
5.606tag_and_trait.hpp File Reference . . . 3528
5.606.1 Detailed Description . . . 3529
5.607tags.h File Reference . . . 3529
5.607.1 Detailed Description . . . 3530
5.608tgmath.h File Reference . . . 3530
5.608.1 Detailed Description . . . 3530
5.609thin_heap_.hpp File Reference . . . 3530
5.609.1 Detailed Description . . . 3530
5.610thread File Reference . . . 3531
5.610.1 Detailed Description . . . 3531
5.611throw_allocator.h File Reference . . . 3531
5.611.1 Detailed Description . . . 3533
5.612time_members.h File Reference . . . 3533
5.612.1 Detailed Description . . . 3533

5.613trace_fn_imps.hpp File Reference . . . 3533
5.613.1 Detailed Description . . . 3533
5.614trace_fn_imps.hpp File Reference . . . 3533
5.614.1 Detailed Description . . . 3533
5.615trace_fn_imps.hpp File Reference . . . 3533
5.615.1 Detailed Description . . . 3533
5.616trace_fn_imps.hpp File Reference . . . 3533
5.616.1 Detailed Description . . . 3533
5.617trace_fn_imps.hpp File Reference . . . 3534
5.617.1 Detailed Description . . . 3534
5.618trace_fn_imps.hpp File Reference . . . 3534
5.618.1 Detailed Description . . . 3534
5.619trace_fn_imps.hpp File Reference . . . 3534
5.619.1 Detailed Description . . . 3534
5.620trace_fn_imps.hpp File Reference . . . 3534
5.620.1 Detailed Description . . . 3534
5.621traits.hpp File Reference . . . 3534
5.621.1 Detailed Description . . . 3534
5.622traits.hpp File Reference . . . 3535
5.622.1 Detailed Description . . . 3535
5.623traits.hpp File Reference . . . 3535
5.623.1 Detailed Description . . . 3535
5.624traits.hpp File Reference . . . 3535
5.624.1 Detailed Description . . . 3536
5.625traits.hpp File Reference . . . 3536
5.625.1 Detailed Description . . . 3536
5.626traits.hpp File Reference . . . 3536
5.626.1 Detailed Description . . . 3536
5.627tree_policy.hpp File Reference . . . 3536
5.627.1 Detailed Description . . . 3537
5.628tree_trace_base.hpp File Reference . . . 3537
5.628.1 Detailed Description . . . 3537
5.629trie_policy.hpp File Reference . . . 3537
5.629.1 Detailed Description . . . 3537
5.630trie_policy_base.hpp File Reference . . . 3538
5.630.1 Detailed Description . . . 3538
5.631trie_string_access_traits_imp.hpp File Reference . . . 3538

5.631.1 Detailed Description . . . 3538
5.632tuple File Reference . . . 3538
5.632.1 Detailed Description . . . 3540
5.633tuple File Reference . . . 3540
5.633.1 Detailed Description . . . 3541
5.634type_traits File Reference . . . 3541
5.634.1 Detailed Description . . . 3546
5.634.2 Macro Definition Documentation . . . 3546
5.635type_traits File Reference . . . 3546
5.635.1 Detailed Description . . . 3547
5.636type_traits File Reference . . . 3547
5.636.1 Detailed Description . . . 3550
5.637type_traits.h File Reference . . . 3550
5.637.1 Detailed Description . . . 3551
5.638type_utils.hpp File Reference . . . 3551
5.638.1 Detailed Description . . . 3551
5.639typeindex File Reference . . . 3551
5.639.1 Detailed Description . . . 3552
5.640typeinfo File Reference . . . 3552
5.640.1 Detailed Description . . . 3552
5.641typelist.h File Reference . . . 3552
5.641.1 Detailed Description . . . 3553
5.642types.h File Reference . . . 3553
5.642.1 Detailed Description . . . 3554
5.643types_traits.hpp File Reference . . . 3554
5.643.1 Detailed Description . . . 3554
5.644uniform_int_dist.h File Reference . . . 3555
5.644.1 Detailed Description . . . 3555
5.645unique_copy.h File Reference . . . 3555
5.645.1 Detailed Description . . . 3555
5.646unique_lock.h File Reference . . . 3555
5.646.1 Detailed Description . . . 3556
5.647unique_ptr.h File Reference . . . 3556
5.647.1 Detailed Description . . . 3556
5.648unordered_map File Reference . . . 3556
5.648.1 Detailed Description . . . 3556
5.649unordered_map File Reference . . . 3557

5.649.1 Detailed Description . . . 3557
5.650unordered_map File Reference . . . 3557
5.650.1 Detailed Description . . . 3558
5.651unordered_map.h File Reference . . . 3558
5.651.1 Detailed Description . . . 3559
5.652unordered_set File Reference . . . 3559
5.652.1 Detailed Description . . . 3559
5.653unordered_set File Reference . . . 3559
5.653.1 Detailed Description . . . 3560
5.654unordered_set File Reference . . . 3560
5.654.1 Detailed Description . . . 3561
5.655unordered_set.h File Reference . . . 3561
5.655.1 Detailed Description . . . 3562
5.656update_fn_imps.hpp File Reference . . . 3562
5.656.1 Detailed Description . . . 3562
5.657utility File Reference . . . 3562
5.657.1 Detailed Description . . . 3564
5.658utility File Reference . . . 3564
5.658.1 Detailed Description . . . 3564
5.659valarray File Reference . . . 3565
5.659.1 Detailed Description . . . 3571
5.660valarray_after.h File Reference . . . 3572
5.660.1 Detailed Description . . . 3589
5.661valarray_array.h File Reference . . . 3589
5.661.1 Detailed Description . . . 3597
5.662valarray_array.tcc File Reference . . . 3597
5.662.1 Detailed Description . . . 3598
5.663valarray_before.h File Reference . . . 3598
5.663.1 Detailed Description . . . 3598
5.664variant File Reference . . . 3598
5.664.1 Detailed Description . . . 3599
5.665vector File Reference . . . 3599
5.665.1 Detailed Description . . . 3599
5.666vector File Reference . . . 3599
5.666.1 Detailed Description . . . 3600
5.667vector File Reference . . . 3600
5.667.1 Detailed Description . . . 3600

5.668vector.tcc File Reference 3600
5.668.1 Detailed Description 3601
5.669vstring.h File Reference 3601
5.669.1 Detailed Description 3603
5.670vstring.tcc File Reference 3604
5.670.1 Detailed Description 3604
5.671vstring_fwd.h File Reference 3604
5.671.1 Detailed Description 3605
5.672vstring_util.h File Reference 3605
5.672.1 Detailed Description 3605
5.673workstealing.h File Reference 3606
5.673.1 Detailed Description 3606

Index **3607**

1 Todo List

Member __gnu_cxx::distance (_InputIterator __first, _InputIterator __last, _Distance &__n)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::power (_Tp __x, _Integer __n)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::power (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last, _RandomNumberGenerator &__rand)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n, _RandomNumberGenerator &__rand)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n)

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::rope< _CharT, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Class __gnu_cxx::slist< _Tp, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Group mathsf

Provide accuracy comparisons on a per-function basis for a small number of targets.

Class std::basic_string< _CharT, _Traits, _Alloc >

Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Member std::regex_traits< _Ch_type >::transform_primary (_Fwd_iter __first, _Fwd_iter __last) const

Implement this function correctly.

2 Module Documentation

2.1 Adaptors for pointers to functions

Collaboration diagram for Adaptors for pointers to functions:



Classes

- class std::pointer_to_binary_function< _Arg1, _Arg2, _Result >
- class std::pointer_to_unary_function< _Arg, _Result >

Functions

- template<typename _Arg , typename _Result >
  pointer_to_unary_function
  < _Arg, _Result > std::ptr_fun (_Result(*__x)(_Arg))
- template<typename _Arg1 , typename _Arg2 , typename _Result >
  pointer_to_binary_function
  < _Arg1, _Arg2, _Result > std::ptr_fun (_Result(*__x)(_Arg1, _Arg2))

2.1.1 Detailed Description

The advantage of function objects over pointers to functions is that the objects in the standard library declare nested typedefs describing their argument and result types with uniform names (e.g., `result_type` from the base classes `unary_function` and `binary_function`). Sometimes those typedefs are required, not just optional.

Adaptors are provided to turn pointers to unary (single-argument) and binary (double-argument) functions into function objects. The long-winded functor `pointer_to_unary_function` is constructed with a function pointer `f`, and its `operator()` called with argument `x` returns `f(x)`. The functor `pointer_to_binary_function` does the same thing, but with a double-argument `f` and `operator()`.

The function `ptr_fun` takes a pointer-to-function `f` and constructs an instance of the appropriate functor.

2.1.2 Function Documentation

2.1.2.1 template<typename _Arg , typename _Result > pointer_to_unary_function<_Arg, _Result> std::ptr_fun (_Result(*)(_Arg) __x) [inline]

One of the adaptors for function pointers.

Definition at line 1100 of file stl_function.h.

2.1.2.2 template<typename _Arg1 , typename _Arg2 , typename _Result > pointer_to_binary_function<_Arg1, _Arg2, _Result> std::ptr_fun (_Result(*)(_Arg1, _Arg2) __x) [inline]

One of the adaptors for function pointers.

Definition at line 1126 of file stl_function.h.

2.2 Adaptors for pointers to members

Collaboration diagram for Adaptors for pointers to members:



Classes

- class std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg >
- class std::const_mem_fun1_t< _Ret, _Tp, _Arg >
- class std::const_mem_fun_ref_t< _Ret, _Tp >
- class std::const_mem_fun_t< _Ret, _Tp >
- class std::mem_fun1_ref_t< _Ret, _Tp, _Arg >
- class std::mem_fun1_t< _Ret, _Tp, _Arg >
- class std::mem_fun_ref_t< _Ret, _Tp >
- class std::mem_fun_t< _Ret, _Tp >

Functions

- template<typename _Ret , typename _Tp >
  mem_fun_t< _Ret, _Tp > **std::mem_fun** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_t< _Ret, _Tp, _Arg > **std::mem_fun** (_Ret(_Tp::*__f)(_Arg))
- template<typename _Ret , typename _Tp >
  mem_fun_ref_t< _Ret, _Tp > **std::mem_fun_ref** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_ref_t< _Ret, _Tp, _Arg > **std::mem_fun_ref** (_Ret(_Tp::*__f)(_Arg))

2.2.1 Detailed Description

There are a total of 8 = 2^3 function objects in this family. (1) Member functions taking no arguments vs member functions taking one argument. (2) Call through pointer vs call through reference. (3) Const vs non-const member function.

All of this complexity is in the function objects themselves. You can ignore it by using the helper function mem_fun and mem_fun_ref, which create whichever type of adaptor is appropriate.

2.3 Algorithms

Collaboration diagram for Algorithms:

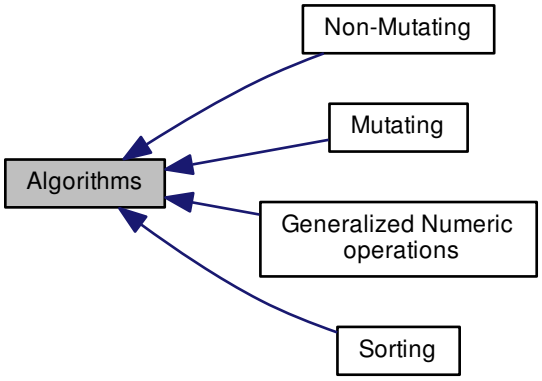

Modules

- Generalized Numeric operations
- Mutating
- Non-Mutating
- Sorting

2.3.1 Detailed Description

Components for performing algorithmic operations. Includes non-modifying sequence, modifying (mutating) sequence, sorting, searching, merge, partition, heap, set, minima, maxima, and permutation operations.

2.4 Allocators

Collaboration diagram for Allocators:

Files

- file scoped_allocator

Classes

- struct __gnu_cxx::__alloc_traits< _Alloc, typename >
- class __gnu_cxx::__mt_alloc< _Tp, _Poolp >
- class __gnu_cxx::__pool_alloc< _Tp >
- class __gnu_cxx::_ExtPtr_allocator< _Tp >
- class std::allocator< _Tp >
- class std::allocator< void >
- struct std::allocator_traits< _Alloc >
- class __gnu_cxx::bitmap_allocator< _Tp >
- class __gnu_cxx::debug_allocator< _Alloc >
- class __gnu_cxx::malloc_allocator< _Tp >
- class __gnu_cxx::new_allocator< _Tp >
- class std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs >
- class __gnu_cxx::throw_allocator_base< _Tp, _Cond >
- struct std::uses_allocator< typename, typename >

Typedefs

- template<typename _Tp >
  using std::__allocator_base = __gnu_cxx::new_allocator< _Tp >

Functions

- template<typename _T1 , typename _T2 >
  constexpr bool **std::operator!=** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept
- template<typename _OutA1 , typename _OutA2 , typename... _InA>
  bool operator!= (const scoped_allocator_adaptor< _OutA1, _InA...> &__a, const scoped_allocator_adaptor< _OutA2, _InA...> &__b) noexcept
- template<typename _T1 , typename _T2 >
  constexpr bool **std::operator==** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept
- template<typename _OutA1 , typename _OutA2 , typename... _InA>
  bool operator== (const scoped_allocator_adaptor< _OutA1, _InA...> &__a, const scoped_allocator_adaptor< _OutA2, _InA...> &__b) noexcept

2.4.1 Detailed Description

Classes encapsulating memory operations.

2.4.2 Typedef Documentation

2.4.2.1 template<typename _Tp > using std::__allocator_base = typedef __gnu_cxx::new_allocator<_Tp>

An alias to the base class for std::allocator.

Used to set the std::allocator base class to __gnu_cxx::new_allocator.

Template Parameters

_Tp	Type of allocated object.

Definition at line 48 of file c++allocator.h.

2.4.3 Function Documentation

2.4.3.1 template<typename _OutA1 , typename _OutA2 , typename... _InA> bool operator!= (const scoped_allocator_adaptor< _OutA1, _InA...> & *__a,* const scoped_allocator_adaptor< _OutA2, _InA...> & *__b*) [related]

Definition at line 507 of file scoped_allocator.

2.4.3.2 template<typename _OutA1 , typename _OutA2 , typename... _InA> bool operator== (const scoped_allocator_adaptor< _OutA1, _InA...> & *__a,* const scoped_allocator_adaptor< _OutA2, _InA...> & *__b*) [related]

Definition at line 496 of file scoped_allocator.

2.5 Arithmetic Classes

Collaboration diagram for Arithmetic Classes:

Classes

- struct std::divides< _Tp >
- struct std::divides< void >
- struct std::minus< _Tp >
- struct std::minus< void >
- struct std::modulus< _Tp >
- struct std::modulus< void >
- struct std::multiplies< _Tp >
- struct std::multiplies< void >
- struct std::negate< _Tp >
- struct std::negate< void >
- struct std::plus< _Tp >

Macros

- #define **__cpp_lib_transparent_operators**

2.5.1 Detailed Description

Because basic math often needs to be done during an algorithm, the library provides functors for those operations. See the documentation for the base classes for examples of their use.

2.6 Array creation functions

Collaboration diagram for Array creation functions:

Functions

- template<typename _Tp , size_t _Nm, size_t... _Idx>
  constexpr array< remove_cv_t
  < _Tp >, _Nm > **std::experimental::fundamentals_v2::__to_array** (_Tp(&__a)[_Nm], index_sequence< _-
  Idx...>)
- template<typename _Dest = void, typename... _Types>
  constexpr array< typename
  __make_array_elem< _Dest,
  _Types...>::type, sizeof...(_Types)> std::experimental::fundamentals_v2::make_array (_Types &&...__t)
- template<typename _Tp , size_t _Nm>
  constexpr array< remove_cv_t
  < _Tp >, _Nm > std::experimental::fundamentals_v2::to_array (_Tp(&__a)[_Nm]) noexcept(is_nothrow_-
  constructible< remove_cv_t< _Tp >, _Tp & >::value)

2.6.1 Detailed Description

Array creation functions as described in N4529, Working Draft, C++ Extensions for Library Fundamentals, Version 2

2.6.2 Function Documentation

2.6.2.1 template<typename _Dest = void, typename... _Types> constexpr array<typename __make_array_elem<_Dest, _Types...>::type, sizeof...(_Types)> std::experimental::fundamentals_v2::make_array (_Types &&... *__t*)

Create a std::array from a variable-length list of arguments.

Definition at line 86 of file experimental/array.

2.6.2.2 template<typename _Tp , size_t _Nm> constexpr array<remove_cv_t<_Tp>, _Nm> std::experimental::fundamentals_v2::to_array (_Tp(&) *__a[_Nm]*) [noexcept]

Create a std::array from an array.

Definition at line 101 of file experimental/array.

2.7 Associative

Collaboration diagram for Associative:

Classes

- class std::map< _Key, _Tp, _Compare, _Alloc >
- class std::multimap< _Key, _Tp, _Compare, _Alloc >
- class std::multiset< _Key, _Compare, _Alloc >
- class std::set< _Key, _Compare, _Alloc >

2.7.1 Detailed Description

Associative containers allow fast retrieval of data based on keys.

Each container type is parameterized on a `Key` type, and an ordering relation used to sort the elements of the container.

All associative containers must meet certain requirements, summarized in `tables`.

2.8 Atomics

Classes

- struct std::__atomic_base< _IntTp >
- struct std::__atomic_base< _PTp * >
- struct std::__atomic_flag_base
- struct std::atomic< _Tp >
- struct std::atomic< _Tp * >
- struct std::atomic< bool >
- struct std::atomic< char >
- struct std::atomic< char16_t >
- struct std::atomic< char32_t >
- struct std::atomic< int >
- struct std::atomic< long >
- struct std::atomic< long long >
- struct std::atomic< short >
- struct std::atomic< signed char >
- struct std::atomic< unsigned char >
- struct std::atomic< unsigned int >
- struct std::atomic< unsigned long >
- struct std::atomic< unsigned long long >
- struct std::atomic< unsigned short >
- struct std::atomic< wchar_t >
- struct std::atomic_flag

Macros

- #define **_GLIBCXX20_INIT**(I)
- #define **_GLIBCXX20_INIT**(I)
- #define ATOMIC_BOOL_LOCK_FREE
- #define **ATOMIC_CHAR16_T_LOCK_FREE**
- #define **ATOMIC_CHAR32_T_LOCK_FREE**
- #define **ATOMIC_CHAR_LOCK_FREE**
- #define **ATOMIC_FLAG_INIT**
- #define **ATOMIC_INT_LOCK_FREE**
- #define **ATOMIC_LLONG_LOCK_FREE**
- #define **ATOMIC_LONG_LOCK_FREE**
- #define **ATOMIC_POINTER_LOCK_FREE**
- #define **ATOMIC_SHORT_LOCK_FREE**
- #define **ATOMIC_VAR_INIT**(_VI)
- #define **ATOMIC_WCHAR_T_LOCK_FREE**

Typedefs

- template<typename _Tp >
  using **std::__atomic_diff_t** = typename atomic< _Tp >::difference_type
- typedef unsigned char **std::__atomic_flag_data_type**
- template<typename _Tp >
  using **std::__atomic_val_t** = typename atomic< _Tp >::value_type

- typedef atomic< bool > std::atomic_bool
- typedef atomic< char > std::atomic_char
- typedef atomic< char16_t > std::atomic_char16_t
- typedef atomic< char32_t > std::atomic_char32_t
- typedef atomic< int > std::atomic_int
- typedef atomic< int16_t > std::atomic_int16_t
- typedef atomic< int32_t > std::atomic_int32_t
- typedef atomic< int64_t > std::atomic_int64_t
- typedef atomic< int8_t > std::atomic_int8_t
- typedef atomic< int_fast16_t > std::atomic_int_fast16_t
- typedef atomic< int_fast32_t > std::atomic_int_fast32_t
- typedef atomic< int_fast64_t > std::atomic_int_fast64_t
- typedef atomic< int_fast8_t > std::atomic_int_fast8_t
- typedef atomic< int_least16_t > std::atomic_int_least16_t
- typedef atomic< int_least32_t > std::atomic_int_least32_t
- typedef atomic< int_least64_t > std::atomic_int_least64_t
- typedef atomic< int_least8_t > std::atomic_int_least8_t
- typedef atomic< intmax_t > std::atomic_intmax_t
- typedef atomic< intptr_t > std::atomic_intptr_t
- typedef atomic< long long > std::atomic_llong
- typedef atomic< long > std::atomic_long
- typedef atomic< ptrdiff_t > std::atomic_ptrdiff_t
- typedef atomic< signed char > std::atomic_schar
- typedef atomic< short > std::atomic_short
- typedef atomic< size_t > std::atomic_size_t
- typedef atomic< unsigned char > std::atomic_uchar
- typedef atomic< unsigned int > std::atomic_uint
- typedef atomic< uint16_t > std::atomic_uint16_t
- typedef atomic< uint32_t > std::atomic_uint32_t
- typedef atomic< uint64_t > std::atomic_uint64_t
- typedef atomic< uint8_t > std::atomic_uint8_t
- typedef atomic< uint_fast16_t > std::atomic_uint_fast16_t
- typedef atomic< uint_fast32_t > std::atomic_uint_fast32_t
- typedef atomic< uint_fast64_t > std::atomic_uint_fast64_t
- typedef atomic< uint_fast8_t > std::atomic_uint_fast8_t
- typedef atomic< uint_least16_t > std::atomic_uint_least16_t
- typedef atomic< uint_least32_t > std::atomic_uint_least32_t
- typedef atomic< uint_least64_t > std::atomic_uint_least64_t
- typedef atomic< uint_least8_t > std::atomic_uint_least8_t
- typedef atomic< uintmax_t > std::atomic_uintmax_t
- typedef atomic< uintptr_t > std::atomic_uintptr_t
- typedef atomic< unsigned long long > std::atomic_ullong
- typedef atomic< unsigned long > std::atomic_ulong
- typedef atomic< unsigned short > std::atomic_ushort
- typedef atomic< wchar_t > std::atomic_wchar_t
- typedef enum std::memory_order std::memory_order

Enumerations

- enum **__memory_order_modifier** { **__memory_order_mask**, **__memory_order_modifier_mask**, **__memory_order_hle_acquire**, **__memory_order_hle_release** }
- enum std::memory_order { **memory_order_relaxed**, **memory_order_consume**, **memory_order_acquire**, **memory_order_release**, **memory_order_acq_rel**, **memory_order_seq_cst** }

Functions

- constexpr memory_order **std::__cmpexch_failure_order** (memory_order __m) noexcept
- constexpr memory_order **std::__cmpexch_failure_order2** (memory_order __m) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_strong** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_strong** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_strong_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_strong_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_weak** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_weak** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_weak_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp > bool **std::atomic_compare_exchange_weak_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp > _ITp **std::atomic_exchange** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp > _ITp **std::atomic_exchange** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp > _ITp **std::atomic_exchange_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp > _ITp **std::atomic_exchange_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp > _ITp **std::atomic_fetch_add** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp > _ITp **std::atomic_fetch_add** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp > _ITp **std::atomic_fetch_add_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept

- template<typename _ITp >
  _ITp **std::atomic_fetch_add_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- void **std::atomic_flag_clear** (atomic_flag *__a) noexcept
- void **std::atomic_flag_clear** (volatile atomic_flag *__a) noexcept
- void **std::atomic_flag_clear_explicit** (atomic_flag *__a, memory_order __m) noexcept
- void **std::atomic_flag_clear_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- bool **std::atomic_flag_test_and_set** (atomic_flag *__a) noexcept
- bool **std::atomic_flag_test_and_set** (volatile atomic_flag *__a) noexcept
- bool **std::atomic_flag_test_and_set_explicit** (atomic_flag *__a, memory_order __m) noexcept
- bool **std::atomic_flag_test_and_set_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_init** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept

- template<typename _ITp >
  void **std::atomic_init** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  bool **std::atomic_is_lock_free** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  bool **std::atomic_is_lock_free** (const volatile atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load** (const volatile atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load_explicit** (const atomic< _ITp > *__a, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load_explicit** (const volatile atomic< _ITp > *__a, memory_order __m) noexcept
- void **std::atomic_signal_fence** (memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_store** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **std::atomic_store** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **std::atomic_store_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_store_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- void **std::atomic_thread_fence** (memory_order __m) noexcept
- template<typename _Tp >
  _Tp std::kill_dependency (_Tp __y) noexcept
- constexpr memory_order **std::operator&** (memory_order __m, __memory_order_modifier __mod)
- constexpr memory_order **std::operator|** (memory_order __m, __memory_order_modifier __mod)

2.8.1 Detailed Description

Components for performing atomic operations.

2.8.2 Macro Definition Documentation

2.8.2.1 #define ATOMIC_BOOL_LOCK_FREE

Lock-free property.

0 indicates that the types are never lock-free. 1 indicates that the types are sometimes lock-free. 2 indicates that the types are always lock-free.

Definition at line 49 of file atomic_lockfree_defines.h.

2.8.3 Typedef Documentation

2.8.3.1 typedef atomic<bool> std::atomic_bool

atomic_bool

Definition at line 984 of file atomic.

2.8.3.2 typedef atomic<char> std::atomic_char

atomic_char

Definition at line 987 of file atomic.

2.8.3.3 typedef atomic<char16_t> std::atomic_char16_t

atomic_char16_t

Definition at line 1028 of file atomic.

2.8.3.4 typedef atomic<char32_t> std::atomic_char32_t

atomic_char32_t

Definition at line 1031 of file atomic.

2.8.3.5 typedef atomic<int> std::atomic_int

atomic_int

Definition at line 1002 of file atomic.

2.8.3.6 typedef atomic<int16_t> std::atomic_int16_t

atomic_int16_t

Definition at line 1044 of file atomic.

2.8.3.7 typedef atomic<int32_t> std::atomic_int32_t

atomic_int32_t

Definition at line 1050 of file atomic.

2.8.3.8 typedef atomic<int64_t> std::atomic_int64_t

atomic_int64_t

Definition at line 1056 of file atomic.

2.8.3.9 typedef atomic<int8_t> std::atomic_int8_t

atomic_int8_t

Definition at line 1038 of file atomic.

2.8.3.10 typedef atomic<int_fast16_t> std::atomic_int_fast16_t

atomic_int_fast16_t

Definition at line 1094 of file atomic.

2.8.3.11 typedef atomic<int_fast32_t> std::atomic_int_fast32_t

atomic_int_fast32_t

Definition at line 1100 of file atomic.

2.8.3.12 typedef atomic<int_fast64_t> std::atomic_int_fast64_t

atomic_int_fast64_t

Definition at line 1106 of file atomic.

2.8.3.13 typedef atomic<int_fast8_t> std::atomic_int_fast8_t

atomic_int_fast8_t

Definition at line 1088 of file atomic.

2.8.3.14 typedef atomic<int_least16_t> std::atomic_int_least16_t

atomic_int_least16_t

Definition at line 1069 of file atomic.

2.8.3.15 typedef atomic<int_least32_t> std::atomic_int_least32_t

atomic_int_least32_t

Definition at line 1075 of file atomic.

2.8.3.16 typedef atomic<int_least64_t> std::atomic_int_least64_t

atomic_int_least64_t

Definition at line 1081 of file atomic.

2.8.3.17 typedef atomic<int_least8_t> std::atomic_int_least8_t

atomic_int_least8_t

Definition at line 1063 of file atomic.

2.8.3.18 typedef atomic<intmax_t> std::atomic_intmax_t

atomic_intmax_t

Definition at line 1127 of file atomic.

2.8.3.19 typedef atomic<intptr_t> std::atomic_intptr_t

atomic_intptr_t

Definition at line 1114 of file atomic.

2.8.3.20 typedef atomic<long long> std::atomic_llong

atomic_llong

Definition at line 1014 of file atomic.

2.8.3.21 typedef atomic<long> std::atomic_long

atomic_long

Definition at line 1008 of file atomic.

2.8.3.22 typedef atomic<ptrdiff_t> std::atomic_ptrdiff_t

atomic_ptrdiff_t

Definition at line 1123 of file atomic.

2.8.3.23 typedef atomic<signed char> std::atomic_schar

atomic_schar

Definition at line 990 of file atomic.

2.8.3.24 typedef atomic<short> std::atomic_short

atomic_short

Definition at line 996 of file atomic.

2.8.3.25 typedef atomic<size_t> std::atomic_size_t

atomic_size_t

Definition at line 1120 of file atomic.

2.8.3.26 typedef atomic<unsigned char> std::atomic_uchar

atomic_uchar

Definition at line 993 of file atomic.

2.8.3.27 typedef atomic<unsigned int> std::atomic_uint

atomic_uint

Definition at line 1005 of file atomic.

2.8.3.28 typedef atomic<uint16_t> std::atomic_uint16_t

atomic_uint16_t

Definition at line 1047 of file atomic.

2.8.3.29 typedef atomic<uint32_t> std::atomic_uint32_t

atomic_uint32_t

Definition at line 1053 of file atomic.

2.8.3.30 typedef atomic<uint64_t> std::atomic_uint64_t

atomic_uint64_t

Definition at line 1059 of file atomic.

2.8.3.31 typedef atomic<uint8_t> std::atomic_uint8_t

atomic_uint8_t

Definition at line 1041 of file atomic.

2.8.3.32 typedef atomic<uint_fast16_t> std::atomic_uint_fast16_t

atomic_uint_fast16_t

Definition at line 1097 of file atomic.

2.8.3.33 typedef atomic<uint_fast32_t> std::atomic_uint_fast32_t

atomic_uint_fast32_t

Definition at line 1103 of file atomic.

2.8.3.34 typedef atomic<uint_fast64_t> std::atomic_uint_fast64_t

atomic_uint_fast64_t

Definition at line 1109 of file atomic.

2.8.3.35 typedef atomic<uint_fast8_t> std::atomic_uint_fast8_t

atomic_uint_fast8_t

Definition at line 1091 of file atomic.

2.8.3.36 typedef atomic<uint_least16_t> std::atomic_uint_least16_t

atomic_uint_least16_t

Definition at line 1072 of file atomic.

2.8.3.37 typedef atomic<uint_least32_t> std::atomic_uint_least32_t

atomic_uint_least32_t

Definition at line 1078 of file atomic.

2.8.3.38 typedef atomic<uint_least64_t> std::atomic_uint_least64_t

atomic_uint_least64_t

Definition at line 1084 of file atomic.

2.8.3.39 typedef atomic<uint_least8_t> std::atomic_uint_least8_t

atomic_uint_least8_t

Definition at line 1066 of file atomic.

2.8.3.40 typedef atomic<uintmax_t> std::atomic_uintmax_t

atomic_uintmax_t

Definition at line 1130 of file atomic.

2.8.3.41 typedef atomic<uintptr_t> std::atomic_uintptr_t

atomic_uintptr_t

Definition at line 1117 of file atomic.

2.8.3.42 typedef atomic<unsigned long long> std::atomic_ullong

atomic_ullong

Definition at line 1017 of file atomic.

2.8.3.43 typedef atomic<unsigned long> std::atomic_ulong

atomic_ulong

Definition at line 1011 of file atomic.

2.8.3.44 typedef atomic<unsigned short> std::atomic_ushort

atomic_ushort

Definition at line 999 of file atomic.

2.8.3.45 typedef atomic<wchar_t> std::atomic_wchar_t

atomic_wchar_t

Definition at line 1020 of file atomic.

2.8.3.46 typedef enum std::memory_order std::memory_order

Enumeration for memory_order.

2.8.4 Enumeration Type Documentation

2.8.4.1 enum std::memory_order

Enumeration for memory_order.

Definition at line 74 of file atomic_base.h.

2.8.5 Function Documentation

2.8.5.1 template<typename _Tp > _Tp std::kill_dependency (_Tp __y) [inline], [noexcept]

kill_dependency

Definition at line 131 of file atomic_base.h.

2.9 Base and Implementation Classes

Collaboration diagram for Base and Implementation Classes:



Classes

- struct std::__detail::_Default_ranged_hash
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >
- struct std::__detail::_Hash_node< _Value, _Cache_hash_code >
- struct std::__detail::_Hash_node< _Value, false >
- struct std::__detail::_Hash_node< _Value, true >
- struct std::__detail::_Hash_node_base
- struct std::__detail::_Hash_node_value_base< _Value >
- class std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- struct std::__detail::_Hashtable_alloc< _NodeAlloc >
- struct std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, __use_ebo >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true >
- struct std::__detail::_Hashtable_traits< _Cache_hash_code, _Constant_iterators, _Unique_keys >
- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators >
- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- struct std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >
- struct std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >

- struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >
- struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >
- struct std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >
- struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Mask_range_hashing
- struct std::__detail::_Mod_range_hashing
- struct std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache >
- struct std::__detail::_Node_iterator< _Value, __constant_iterators, __cache >
- struct std::__detail::_Node_iterator_base< _Value, _Cache_hash_code >
- struct std::__detail::_Power2_rehash_policy
- struct std::__detail::_Prime_rehash_policy
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename >
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type >
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type >

Typedefs

- template<typename _Policy >
  using **std::__detail::__has_load_factor** = typename _Policy::__has_load_factor
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash >
  using **std::__detail::__hash_code_for_local_iter** = _Hash_code_storage< _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >>

Functions

- std::size_t std::__detail::__clp2 (std::size_t __n) noexcept
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last, std::input_iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last, std::forward_iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last)
- __bucket_type * **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_allocate_buckets** (std::size_t __bkt_count)
- template<typename... _Args>
  auto **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_allocate_node** (_Args &&...__args) -> __node_type *
- void **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_deallocate_buckets** (__bucket_type *, std::size_t __bkt_count)

- void **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_deallocate_node** (__node_type *__n)
- void **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_deallocate_node_ptr** (__node_type *__n)
- void **std::__detail::_Hashtable_alloc< _NodeAlloc >::_M_deallocate_nodes** (__node_type *__n)
- bool **std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >::_M_equal** (const __hashtable &) const
- bool **std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >::_M_equal** (const __hashtable &) const
- template<typename _InputIterator , typename _NodeGetter >
  void **std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >::_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, true_type)
- template<typename _InputIterator , typename _NodeGetter >
  void **std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >::_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, false_type)
- mapped_type & **std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >::at** (const key_type &__k)
- const mapped_type & **std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >::at** (const key_type &__k) const
- template<typename _Value , bool _Cache_hash_code>
  bool **std::__detail::operator!=** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _Node_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **std::__detail::operator!=** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)
- template<typename _Value , bool _Cache_hash_code>
  bool **std::__detail::operator==** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _Node_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **std::__detail::operator==** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)
- mapped_type & **std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >::operator[]** (const key_type &__k)
- mapped_type & **std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >::operator[]** (key_type &&__k)

2.9.1 Detailed Description

2.9.2 Function Documentation

2.9.2.1 std::size_t std::__detail::__clp2 (std::size_t __n) [inline], [noexcept]

Compute closest power of 2 not less than __n.

Definition at line 508 of file hashtable_policy.h.

2.10 Base and Implementation Classes

Collaboration diagram for Base and Implementation Classes:



Classes

- struct std::__detail::_BracketMatcher< typename, bool, bool >
- class std::__detail::_Compiler< _TraitsT >
- class std::__detail::_Executor< typename, typename, typename, bool >
- class std::__detail::_Scanner< _CharT >
- class std::__detail::_StateSeq< _TraitsT >

Typedefs

- template<typename _Iter , typename _TraitsT >
  using **std::__detail::__disable_if_contiguous_iter** = __enable_if_t< !__is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >
- template<typename _Iter , typename _TraitsT >
  using **std::__detail::__enable_if_contiguous_iter** = __enable_if_t< __is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >
- template<typename _CharT >
  using **std::__detail::_Matcher** = std::function< bool(_CharT)>
- typedef long **std::__detail::_StateIdT**

Enumerations

- enum std::__detail::_Opcode : int {
  _S_opcode_unknown, **_S_opcode_alternative**, **_S_opcode_repeat**, **_S_opcode_backref**, **_S_opcode_line_begin_assertion**, **_S_opcode_line_end_assertion**, **_S_opcode_word_boundary**, **_S_opcode_subexpr_lookahead**, **_S_opcode_subexpr_begin**, **_S_opcode_subexpr_end**, **_S_opcode_dummy**, **_S_opcode_match**, **_S_opcode_accept** }

Functions

- template<typename _TraitsT , typename _FwdIter >
  __enable_if_contiguous_iter
  < _FwdIter, _TraitsT > **std::__detail::__compile_nfa** (_FwdIter __first, _FwdIter __last, const typename _TraitsT::locale_type &__loc, regex_constants::syntax_option_type __flags)

Variables

- static const _StateIdT **std::__detail::_S_invalid_state_id**

2.10.1 Detailed Description

2.10.2 Enumeration Type Documentation

2.10.2.1 enum std::__detail::_Opcode : int

Operation codes that define the type of transitions within the base NFA that represents the regular expression.

Definition at line 56 of file regex_automaton.h.

2.11 Base and Policy Classes

Collaboration diagram for Base and Policy Classes:



Classes

- class __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >
- class __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >

2.11.1 Detailed Description

2.12 Base and Policy Classes

Collaboration diagram for Base and Policy Classes:



Classes

- class __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >
- class __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >
- class __gnu_pbds::detail::rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >
- class __gnu_pbds::detail::splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

2.12.1 Detailed Description

2.13 Base and Policy Classes

Collaboration diagram for Base and Policy Classes:



Classes

- class __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc >
- class __gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc >
- class __gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc >
- class __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc >
- class __gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc >

2.13.1 Detailed Description

2.14 Bernoulli Distributions

Collaboration diagram for Bernoulli Distributions:



Classes

- class std::bernoulli_distribution
- class std::binomial_distribution< _IntType >
- class std::geometric_distribution< _IntType >
- class std::negative_binomial_distribution< _IntType >

Functions

- bool std::operator!= (const std::bernoulli_distribution &__d1, const std::bernoulli_distribution &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::binomial_distribution< _IntType > &__d1, const std::binomial_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::geometric_distribution< _IntType > &__d1, const std::geometric_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::negative_binomial_distribution< _IntType > &__d1, const std::negative_binomial_distribution< _IntType > &__d2)
- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::geometric_distribution< _IntType > &__x)
- template<typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::geometric_distribution< _IntType > &__x)

2.14.1 Detailed Description

2.14.2 Function Documentation

2.14.2.1 bool std::operator!= (const std::bernoulli_distribution & *__d1*, const std::bernoulli_distribution & *__d2*) [inline]

Return true if two Bernoulli distributions have different parameters.

Definition at line 3681 of file random.h.

2.14.2.2 template<typename _IntType > bool std::operator!= (const std::binomial_distribution< _IntType > & *__d1*, const std::binomial_distribution< _IntType > & *__d2*) [inline]

Return true if two binomial distributions are different.

Definition at line 3956 of file random.h.

2.14.2.3 template<typename _IntType > bool std::operator!= (const std::geometric_distribution< _IntType > & *__d1*, const std::geometric_distribution< _IntType > & *__d2*) [inline]

Return true if two geometric distributions have different parameters.

Definition at line 4135 of file random.h.

2.14.2.4 template<typename _IntType > bool std::operator!= (const std::negative_binomial_distribution< _IntType > & *__d1*, const std::negative_binomial_distribution< _IntType > & *__d2*) [inline]

Return true if two negative binomial distributions are different.

Definition at line 4389 of file random.h.

2.14.2.5 template<typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & *__os*, const std::bernoulli_distribution & *__x*)

Inserts a bernoulli_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A bernoulli_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 986 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.14.2.6 template<typename _IntType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & *__os*, const std::geometric_distribution< _IntType > & *__x*)

Inserts a geometric_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A geometric_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 1067 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.14.2.7 template<typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& std::operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::bernoulli_distribution & *__x*) [inline]

Extracts a bernoulli_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A bernoulli_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 3711 of file random.h.

References std::bernoulli_distribution::param().

2.14.2.8 template<typename _IntType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::geometric_distribution< _IntType > & *__x*)

Extracts a geometric_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A geometric_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 1090 of file bits/random.tcc.

References std::ios_base::flags(), std::geometric_distribution< _IntType >::param(), and std::skipws().

2.15 Binary Search

Collaboration diagram for Binary Search:



Functions

- template<typename _ForwardIterator , typename _Tp >
  constexpr bool std::binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr bool std::binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _ForwardIterator , typename _Tp >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator std::lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator std::upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)

2.15.1 Detailed Description

These algorithms are variations of a classic binary search, and all assume that the sequence being searched is already sorted.

The number of comparisons will be logarithmic (and as few as possible). The number of steps through the sequence will be logarithmic for random-access iterators (e.g., pointers), and linear otherwise.

The LWG has passed Defect Report 270, which notes: *The proposed resolution reinterprets binary search. Instead of thinking about searching for a value in a sorted range, we view that as an important special case of a more general algorithm: searching for the partition point in a partitioned range. We also add a guarantee that the old wording did*

not: we ensure that the upper bound is no earlier than the lower bound, that the pair returned by equal_range is a valid range, and that the first part of that pair is the lower bound.

The actual effect of the first sentence is that a comparison functor passed by the user doesn't necessarily need to induce a strict weak ordering relation. Rather, it partitions the range.

2.15.2 Function Documentation

2.15.2.1 template<typename _ForwardIterator , typename _Tp > constexpr bool std::binary_search (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val*)

Determines whether an element exists in a range.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.

Returns

True if `__val` (or its equivalent) is in [`__first`,`__last`].

Note that this does not actually return an iterator to `__val`. For that, use std::find or a container's specialized find member functions.

Definition at line 2262 of file stl_algo.h.

2.15.2.2 template<typename _ForwardIterator , typename _Tp , typename _Compare > constexpr bool std::binary_search (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val,* _Compare *__comp*)

Determines whether an element exists in a range.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.
__comp	A functor to use for comparisons.

Returns

True if `__val` (or its equivalent) is in [__first,__last].

Note that this does not actually return an iterator to `__val`. For that, use std::find or a container's specialized find member functions.

The comparison function should have the same effects on ordering as the function used for the initial sort.

Definition at line 2296 of file stl_algo.h.

2.15.2.3 template<typename _ForwardIterator , typename _Tp > constexpr pair<_ForwardIterator, _ForwardIterator> std::equal_range (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val*) [inline]

Finds the largest subrange in which `__val` could be inserted at any place in it without changing the ordering.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.

Returns

An pair of iterators defining the subrange.

This is equivalent to

```
std::make_pair(lower_bound(__first, __last, __val),
               upper_bound(__first, __last, __val))
```

but does not actually call those functions.

Definition at line 2191 of file stl_algo.h.

2.15.2.4 template<typename _ForwardIterator , typename _Tp , typename _Compare > constexpr pair<_ForwardIterator, _ForwardIterator> std::equal_range (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val,* _Compare *__comp*) [inline]

Finds the largest subrange in which __val could be inserted at any place in it without changing the ordering.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.
__comp	A functor to use for comparisons.

Returns

An pair of iterators defining the subrange.

This is equivalent to

```
std::make_pair(lower_bound(__first, __last, __val, __comp),
               upper_bound(__first, __last, __val, __comp))
```

but does not actually call those functions.

Definition at line 2228 of file stl_algo.h.

2.15.2.5 template<typename _ForwardIterator , typename _Tp > constexpr _ForwardIterator std::lower_bound (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val*) [inline]

Finds the first position in which *val* could be inserted without changing the ordering.

Parameters

__first	An iterator.

__last	Another iterator.
__val	The search term.

Returns

An iterator pointing to the first element *not less than val*, or end() if every element is less than *val*.

Definition at line 1348 of file stl_algobase.h.

2.15.2.6 template<typename _ForwardIterator , typename _Tp , typename _Compare > constexpr _ForwardIterator std::lower_bound (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val,* _Compare *__comp*) [inline]

Finds the first position in which __val could be inserted without changing the ordering.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.
__comp	A functor to use for comparisons.

Returns

An iterator pointing to the first element *not less than* __val, or end() if every element is less than __val.

The comparison function should have the same effects on ordering as the function used for the initial sort.

Definition at line 2031 of file stl_algo.h.

2.15.2.7 template<typename _ForwardIterator , typename _Tp > constexpr _ForwardIterator std::upper_bound (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val*) [inline]

Finds the last position in which __val could be inserted without changing the ordering.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.

Returns

An iterator pointing to the first element greater than __val, or end() if no elements are greater than __val.

Definition at line 2087 of file stl_algo.h.

2.15.2.8 template<typename _ForwardIterator , typename _Tp , typename _Compare > constexpr _ForwardIterator std::upper_bound (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__val,* _Compare *__comp*) [inline]

Finds the last position in which __val could be inserted without changing the ordering.

Parameters

__first	An iterator.
__last	Another iterator.
__val	The search term.
__comp	A functor to use for comparisons.

Returns

An iterator pointing to the first element greater than `__val`, or end() if no elements are greater than `__val`.

The comparison function should have the same effects on ordering as the function used for the initial sort.

Definition at line 2118 of file stl_algo.h.

2.16 Binder Classes

Collaboration diagram for Binder Classes:

Namespaces

- std::placeholders

Classes

- struct std::_Placeholder< _Num >
- class std::binder1st< _Operation >
- class std::binder2nd< _Operation >
- struct std::is_bind_expression< _Tp >
- struct std::is_bind_expression< _Bind< _Signature > >
- struct std::is_bind_expression< _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< const _Bind< _Signature > >
- struct std::is_bind_expression< const _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< const volatile _Bind< _Signature > >
- struct std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< volatile _Bind< _Signature > >
- struct std::is_bind_expression< volatile _Bind_result< _Result, _Signature > >
- struct std::is_placeholder< _Tp >
- struct std::is_placeholder< _Placeholder< _Num > >

Functions

- template<typename _Func , typename... _BoundArgs>
  constexpr _Bind_helper
  < __is_socketlike< _Func >
  ::value, _Func, _BoundArgs...>
  ::type std::bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Result , typename _Func , typename... _BoundArgs>
  constexpr _Bindres_helper
  < _Result, _Func,
  _BoundArgs...>::type std::bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Operation , typename _Tp >
  binder1st< _Operation > std::bind1st (const _Operation &__fn, const _Tp &__x)
- template<typename _Operation , typename _Tp >
  binder2nd< _Operation > std::bind2nd (const _Operation &__fn, const _Tp &__x)

2.16.1 Detailed Description

Binders turn functions/functors with two arguments into functors with a single argument, storing an argument to be applied later. For example, a variable `B` of type `binder1st` is constructed from a functor `f` and an argument `x`. Later, B's `operator()` is called with a single argument `y`. The return value is the value of `f(x,y)`. `B` can be *called* with various arguments (y1, y2, ...) and will in turn call `f(x,y1)`, `f(x,y2)`, ...

The function `bind1st` is provided to save some typing. It takes the function and an argument as parameters, and returns an instance of `binder1st`.

The type `binder2nd` and its creator function `bind2nd` do the same thing, but the stored argument is passed as the second parameter instead of the first, e.g., `bind2nd`(std::minus<float>(),1.3) will create a functor whose `operator()` accepts a floating-point number, subtracts 1.3 from it, and returns the result. (If `bind1st` had been used, the functor would perform *1.3 - x* instead.

Creator-wrapper functions like `bind1st` are intended to be used in calling algorithms. Their return values will be temporary objects. (The goal is to not require you to type names like `std::binder1st<std::plus<int>>` for declaring a variable to hold the return value from `bind1st(std::plus<int>(),5)`.

These become more useful when combined with the composition functions.

These functions are deprecated in C++11 and can be replaced by `std::bind` (or `std::tr1::bind`) which is more powerful and flexible, supporting functions with any number of arguments. Uses of `bind1st` can be replaced by `std::bind(f, x, std::placeholders::_1)` and `bind2nd` by `std::bind(f, std::placeholders::_1, x)`.

2.16.2 Function Documentation

2.16.2.1 template<typename _Func , typename... _BoundArgs> constexpr _Bind_helper<__is_socketlike<_Func>::value, _Func, _BoundArgs...>::type std::bind (_Func && *__f,* _BoundArgs &&... *__args*) [inline]

Function template for std::bind.

Definition at line 785 of file functional.

2.16.2.2 template<typename _Result , typename _Func , typename... _BoundArgs> constexpr _Bindres_helper<_Result, _Func, _BoundArgs...>::type std::bind (_Func && *__f,* _BoundArgs &&... *__args*) [inline]

Function template for std::bind<R>.

Definition at line 809 of file functional.

2.16.2.3 template<typename _Operation , typename _Tp > binder1st<_Operation> std::bind1st (const _Operation & *__fn,* const _Tp & *__x*) [inline]

One of the binder functors.

Definition at line 135 of file binders.h.

2.16.2.4 template<typename _Operation , typename _Tp > binder2nd<_Operation> std::bind2nd (const _Operation & *__fn,* const _Tp & *__x*) [inline]

One of the binder functors.

Definition at line 170 of file binders.h.

2.17 Bit manipulation

Collaboration diagram for Bit manipulation:



Utilities for examining and manipulating individual bits.

2.18 Boolean Operations Classes

Collaboration diagram for Boolean Operations Classes:



Classes

- struct std::logical_and< _Tp >
- struct std::logical_and< void >
- struct std::logical_not< _Tp >
- struct std::logical_not< void >
- struct std::logical_or< _Tp >
- struct std::logical_or< void >

2.18.1 Detailed Description

Here are wrapper functors for Boolean operations: `&&`, `||`, and `!`.

2.19 Branch-Based

Collaboration diagram for Branch-Based:



Modules

- Base and Policy Classes

Classes

- class __gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc >
- class __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >
- class __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >

Macros

- #define **PB_DS_BRANCH_BASE**
- #define **PB_DS_TREE_BASE**
- #define **PB_DS_TREE_NODE_AND_IT_TRAITS**
- #define **PB_DS_TRIE_BASE**
- #define **PB_DS_TRIE_NODE_AND_IT_TRAITS**

2.19.1 Detailed Description

2.20 Comparison Classes

Collaboration diagram for Comparison Classes:

Classes

- struct std::equal_to< _Tp >
- struct std::equal_to< void >
- struct std::greater< _Tp >
- struct std::greater< void >
- struct std::greater_equal< _Tp >
- struct std::greater_equal< void >
- struct std::less< _Tp >
- struct std::less< void >
- struct std::less_equal< _Tp >
- struct std::less_equal< void >
- struct std::not_equal_to< _Tp >
- struct std::not_equal_to< void >

2.20.1 Detailed Description

The library provides six wrapper functors for all the basic comparisons in C++, like <.

2.21 Complex Numbers

Collaboration diagram for Complex Numbers:



Classes

- struct std::complex< _Tp >
- struct std::complex< double >
- struct std::complex< float >
- struct std::complex< long double >

Functions

- constexpr **std::complex**< **float** >**::complex** (const complex< double > &)
- constexpr **std::complex**< **float** >**::complex** (const complex< long double > &)
- constexpr **std::complex**< **double** >**::complex** (const complex< long double > &)
- template<typename _Tp >
  _Tp **std::__complex_abs** (const complex< _Tp > &__z)
- template<typename _Tp >
  _Tp **std::__complex_arg** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_cos** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_cosh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_exp** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_log** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_pow** (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  complex< _Tp > **std::__complex_pow_unsigned** (complex< _Tp > __x, unsigned __n)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sin** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sinh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sqrt** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_tan** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_tanh** (const complex< _Tp > &__z)

- template<typename _Tp >
  _Tp std::abs (const complex< _Tp > &)
- template<typename _Tp >
  _Tp std::arg (const complex< _Tp > &)
- template<typename _Tp >
  constexpr complex< _Tp > std::conj (const complex< _Tp > &)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::conj** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **std::tr1::conj** (_Tp __x)
- template<typename _Tp >
  complex< _Tp > std::cos (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::cosh (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::exp (const complex< _Tp > &)
- template<typename _Tp >
  std::complex< _Tp > std::tr1::fabs (const std::complex< _Tp > &__z)
- template<typename _Tp >
  constexpr _Tp **std::imag** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > std::log (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::log10 (const complex< _Tp > &)
- template<typename _Tp >
  _Tp constexpr std::norm (const complex< _Tp > &)
- constexpr complex< _Tp > & std::complex< _Tp >::operator*= (const _Tp &)
- template<typename _Up >
  constexpr complex< _Tp > & std::complex< _Tp >::operator*= (const complex< _Up > &)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x)
- template<typename _Up >
  constexpr complex< _Tp > & std::complex< _Tp >::operator+= (const complex< _Up > &)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x)
- template<typename _Up >
  constexpr complex< _Tp > & std::complex< _Tp >::operator-= (const complex< _Up > &)
- constexpr complex< _Tp > & std::complex< _Tp >::operator/= (const _Tp &)
- template<typename _Up >
  constexpr complex< _Tp > & std::complex< _Tp >::operator/= (const complex< _Up > &)
- template<typename _Tp , typename _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__os, const complex< _Tp > &__x)
- constexpr complex< _Tp > & std::complex< _Tp >::operator= (const _Tp &)
- template<typename _Up >
  constexpr complex< _Tp > & std::complex< _Tp >::operator= (const complex< _Up > &)
- template<typename _Tp , typename _CharT , class _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, complex< _Tp > &__x)
- template<typename _Tp >
  complex< _Tp > std::polar (const _Tp &, const _Tp &=0)

- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::polar** (const _Tp &__rho, const _Up &__theta)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, int)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, const _Tp &)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::pow (const _Tp &, const complex< _Tp > &)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > std::tr1::pow (const std::complex< _Tp > &__x, const _Up &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::pow** (const _Tp &__x, const std::complex< _Up > &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::pow** (const std::complex< _Tp > &__x, const std::complex< _Up > &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const std::complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const _Tp &__x, const std::complex< _Tp > &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const std::complex< _Tp > &__x, const std::complex< _Tp > &__y)
- template<typename _Tp >
  constexpr _Tp **std::real** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > std::sin (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::sinh (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::sqrt (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::tan (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::tanh (const complex< _Tp > &)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool std::operator== (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool std::operator== (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool std::operator== (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool std::operator!= (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool std::operator!= (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool std::operator!= (const _Tp &__x, const complex< _Tp > &__y)

2.21.1 Detailed Description

Classes and functions for complex numbers.

2.21.2 Function Documentation

2.21.2.1 template<typename _Tp > _Tp std::abs (const complex< _Tp > & __z) [inline]

Return magnitude of *z*.

Definition at line 629 of file complex.

Referenced by std::tr1::fabs(), std::fabs(), std::poisson_distribution< _IntType >::operator()(), and std::binomial_-distribution< _IntType >::operator()().

2.21.2.2 template<typename _Tp > _Tp std::arg (const complex< _Tp > & __z) [inline]

Return phase angle of *z*.

Definition at line 656 of file complex.

Referenced by std::arg().

2.21.2.3 template<typename _Tp > constexpr complex< _Tp > std::conj (const complex< _Tp > & __z) [inline]

Return complex conjugate of *z*.

Definition at line 708 of file complex.

2.21.2.4 template<typename _Tp > complex< _Tp > std::cos (const complex< _Tp > & __z) [inline]

Return complex cosine of *z*.

Definition at line 740 of file complex.

Referenced by std::polar().

2.21.2.5 template<typename _Tp > complex< _Tp > std::cosh (const complex< _Tp > & __z) [inline]

Return complex hyperbolic cosine of *z*.

Definition at line 770 of file complex.

2.21.2.6 template<typename _Tp > complex< _Tp > std::exp (const complex< _Tp > & __z) [inline]

Return complex base e exponential of *z*.

Definition at line 796 of file complex.

Referenced by std::pow().

2.21.2.7 template<typename _Tp > std::complex< _Tp > std::tr1::fabs (const std::complex< _Tp > & __z) [inline]

fabs(__z) [8.1.8].

Definition at line 309 of file tr1/complex.

References std::abs(), and std::fabs().

2.21.2.8 template<typename _Tp > complex< _Tp > std::log (const complex< _Tp > & __z) [inline]

Return complex natural logarithm of *z*.

Definition at line 823 of file complex.

Referenced by std::generate_canonical(), std::log10(), std::poisson_distribution< _IntType >::operator()(), std::binomial_distribution< _IntType >::operator()(), std::normal_distribution< _RealType >::operator()(), std::gamma_distribution< _RealType >::operator()(), and std::pow().

2.21.2.9 template<typename _Tp > complex< _Tp > std::log10 (const complex< _Tp > & __z) [inline]

Return complex base 10 logarithm of *z*.

Definition at line 828 of file complex.

References std::log().

2.21.2.10 template<typename _Tp > _Tp constexpr std::norm (const complex< _Tp > &) [inline]

Return *z* magnitude squared.

Definition at line 692 of file complex.

Referenced by std::complex< _Tp >::operator/=().

2.21.2.11 template<typename _Tp > constexpr bool std::operator!= (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return false if *x* is equal to *y*.

Definition at line 482 of file complex.

2.21.2.12 template<typename _Tp > constexpr bool std::operator!= (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return false if *x* is equal to *y*.

Definition at line 487 of file complex.

2.21.2.13 template<typename _Tp > constexpr bool std::operator!= (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return false if *x* is equal to *y*.

Definition at line 492 of file complex.

2.21.2.14 template<typename _Tp > constexpr complex<_Tp> std::operator* (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* times *y*.

Definition at line 391 of file complex.

2.21.2.15 template<typename _Tp > constexpr complex<_Tp> std::operator* (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return new complex value *x* times *y*.

Definition at line 400 of file complex.

2.21.2.16 template<typename _Tp > constexpr complex<_Tp> std::operator* (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* times *y*.

Definition at line 409 of file complex.

2.21.2.17 template<typename _Tp > constexpr complex< _Tp > & std::complex< _Tp >::operator*= (const _Tp & __t)

Multiply this complex number by a scalar.

Definition at line 250 of file complex.

2.21.2.18 template<typename _Tp > template<typename _Up > constexpr complex< _Tp > & std::complex< _Tp >::operator*= (const complex< _Up > & __z)

Multiply this complex number by another.

Definition at line 304 of file complex.

2.21.2.19 template<typename _Tp > constexpr complex<_Tp> std::operator+ (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* plus *y*.

Definition at line 331 of file complex.

2.21.2.20 template<typename _Tp > constexpr complex<_Tp> std::operator+ (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return new complex value *x* plus *y*.

Definition at line 340 of file complex.

2.21.2.21 template<typename _Tp > constexpr complex<_Tp> std::operator+ (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* plus *y*.

Definition at line 349 of file complex.

2.21.2.22 template<typename _Tp > constexpr complex<_Tp> std::operator+ (const complex< _Tp > & __x) [inline]

Return *x*.

Definition at line 450 of file complex.

2.21.2.23 template<typename _Tp > template<typename _Up > constexpr complex< _Tp > & std::complex< _Tp >::operator+= (const complex< _Up > & __z)

Add another complex number to this one.

Definition at line 281 of file complex.

2.21.2.24 template<typename _Tp > constexpr complex<_Tp> std::operator- (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* minus *y*.

Definition at line 361 of file complex.

2.21.2.25 template<typename _Tp > constexpr complex<_Tp> std::operator- (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return new complex value *x* minus *y*.

Definition at line 370 of file complex.

2.21.2.26 template<typename _Tp > constexpr complex<_Tp> std::operator- (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* minus *y*.

Definition at line 379 of file complex.

2.21.2.27 template<typename _Tp > constexpr complex<_Tp> std::operator- (const complex< _Tp > & __x) [inline]

Return complex negation of *x*.

Definition at line 456 of file complex.

2.21.2.28 template<typename _Tp > template<typename _Up > constexpr complex< _Tp > & std::complex< _Tp >::operator-= (const complex< _Up > & __z)

Subtract another complex number from this one.

Definition at line 292 of file complex.

2.21.2.29 template<typename _Tp > constexpr complex<_Tp> std::operator/ (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* divided by *y*.

Definition at line 421 of file complex.

2.21.2.30 template<typename _Tp > constexpr complex<_Tp> std::operator/ (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return new complex value *x* divided by *y*.

Definition at line 430 of file complex.

2.21.2.31 template<typename _Tp > constexpr complex<_Tp> std::operator/ (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return new complex value *x* divided by *y*.

Definition at line 439 of file complex.

2.21.2.32 template<typename _Tp > constexpr complex< _Tp > & std::complex< _Tp >::operator/= (const _Tp & __t)

Divide this complex number by a scalar.

Definition at line 260 of file complex.

2.21.2.33 template<typename _Tp > template<typename _Up > constexpr complex< _Tp > & std::complex< _Tp >::operator/= (const complex< _Up > & __z)

Divide this complex number by another.

Definition at line 317 of file complex.

References std::norm().

2.21.2.34 template<typename _Tp , typename _CharT , class _Traits > basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & __os, const complex< _Tp > & __x)

Insertion operator for complex values.

Definition at line 554 of file complex.

References std::ios_base::flags(), std::basic_ios< _CharT, _Traits >::imbue(), std::ios_base::precision(), and std::basic_ostringstream< _CharT, _Traits, _Alloc >::str().

2.21.2.35 template<typename _Tp > constexpr complex< _Tp > & std::complex< _Tp >::operator= (const _Tp & __t)

Assign a scalar to this complex number.

Definition at line 240 of file complex.

2.21.2.36 template<typename _Tp > template<typename _Up > constexpr complex< _Tp > & std::complex< _Tp >::operator= (const complex< _Up > & __z)

Assign another complex number to this one.

Definition at line 270 of file complex.

2.21.2.37 template<typename _Tp > constexpr bool std::operator== (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return true if *x* is equal to *y*.

Definition at line 463 of file complex.

2.21.2.38 template<typename _Tp > constexpr bool std::operator== (const complex< _Tp > & __x, const _Tp & __y) [inline]

Return true if *x* is equal to *y*.

Definition at line 468 of file complex.

2.21.2.39 template<typename _Tp > constexpr bool std::operator== (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return true if *x* is equal to *y*.

Definition at line 474 of file complex.

2.21.2.40 template<typename _Tp , typename _CharT , class _Traits > basic_istream<_CharT, _Traits>& std::operator>> (basic_istream< _CharT, _Traits > & __is, complex< _Tp > & __x)

Extraction operator for complex values.

Definition at line 500 of file complex.

References std::ios_base::failbit, std::basic_istream< _CharT, _Traits >::putback(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_ios< _CharT, _Traits >::widen().

2.21.2.41 template<typename _Tp > complex< _Tp > std::polar (const _Tp & __rho, const _Tp & __theta = 0) [inline]

Return complex with magnitude *rho* and angle *theta*.

Definition at line 700 of file complex.

References std::cos(), and std::sin().

2.21.2.42 template<typename _Tp > complex< _Tp > std::pow (const complex< _Tp > & __z, int __n) [inline]

Return *x* to the *y'th* power.

Definition at line 1018 of file complex.

Referenced by std::gamma_distribution< _RealType >::operator()(), std::pow(), and std::tr1::pow().

2.21.2.43 template<typename _Tp > complex< _Tp > std::pow (const complex< _Tp > & __x, const _Tp & __y)

Return *x* to the *y'th* power.

Definition at line 1027 of file complex.

References std::exp(), std::log(), and std::pow().

2.21.2.44 template<typename _Tp > complex< _Tp > std::pow (const complex< _Tp > & __x, const complex< _Tp > & __y) [inline]

Return *x* to the *y'th* power.

Definition at line 1066 of file complex.

2.21.2.45 template<typename _Tp > complex< _Tp > std::pow (const _Tp & __x, const complex< _Tp > & __y) [inline]

Return *x* to the *y'th* power.

Definition at line 1072 of file complex.

References std::log(), and std::pow().

2.21.2.46 template<typename _Tp , typename _Up > std::complex<typename __gnu_cxx::__promote_2<_Tp, _Up>::__type> std::tr1::pow (const std::complex< _Tp > & __x, const _Up & __y) [inline]

Additional overloads [8.1.9].

Definition at line 350 of file tr1/complex.

References std::pow().

2.21.2.47 template<typename _Tp > complex< _Tp > std::sin (const complex< _Tp > & __z) [inline]

Return complex sine of *z*.

Definition at line 858 of file complex.

Referenced by std::polar().

2.21.2.48 template<typename _Tp > complex< _Tp > std::sinh (const complex< _Tp > & __z) [inline]

Return complex hyperbolic sine of *z*.

Definition at line 888 of file complex.

2.21.2.49 template<typename _Tp > complex< _Tp > std::sqrt (const complex< _Tp > & __z) [inline]

Return complex square root of *z*.

Definition at line 932 of file complex.

Referenced by std::normal_distribution< _RealType >::operator()(), and std::student_t_distribution< _RealType >::operator()().

2.21.2.50 template<typename _Tp > complex< _Tp > std::tan (const complex< _Tp > & __z) [inline]

Return complex tangent of *z*.

Definition at line 959 of file complex.

2.21.2.51 template<typename _Tp > complex< _Tp > std::tanh (const complex< _Tp > & __z) [inline]

Return complex hyperbolic tangent of *z*.

Definition at line 987 of file complex.

2.22 Concurrency

Collaboration diagram for Concurrency:

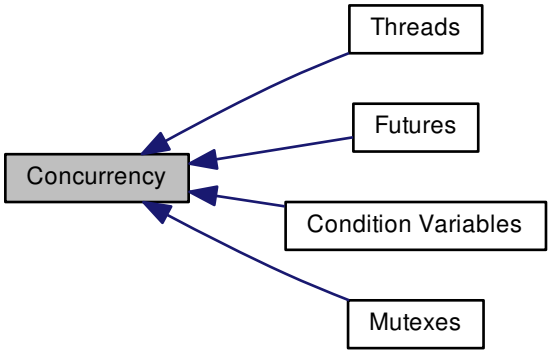

Modules

- Condition Variables
- Futures
- Mutexes
- Threads

2.22.1 Detailed Description

Components for concurrent operations, including threads, mutexes, and condition variables.

2.23 Condition Variables

Collaboration diagram for Condition Variables:

Classes

- class std::condition_variable

Enumerations

- enum std::cv_status { **no_timeout**, **timeout** }

Functions

- void **std::notify_all_at_thread_exit** (condition_variable &, unique_lock< mutex >)

2.23.1 Detailed Description

Classes for condition_variable support.

2.23.2 Enumeration Type Documentation

2.23.2.1 enum std::cv_status [strong]

cv_status

Definition at line 68 of file condition_variable.

2.24 Const-propagating wrapper

Collaboration diagram for Const-propagating wrapper:

Classes

- class std::experimental::fundamentals_v2::propagate_const< _Tp >

Functions

- template<typename _Tp >
  constexpr const _Tp & **std::experimental::fundamentals_v2::get_underlying** (const propagate_const< _Tp > &__pt) noexcept
- template<typename _Tp >
  constexpr _Tp & **std::experimental::fundamentals_v2::get_underlying** (propagate_const< _Tp > &__pt) noexcept
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, nullptr_t)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (nullptr_t, const propagate_const< _Tp > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator**< (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator**< (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator**< (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)

- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, nullptr_t)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (nullptr_t, const propagate_const< _Tp > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp >
  constexpr void **std::experimental::fundamentals_v2::swap** (propagate_const< _Tp > &__pt, propagate_const< _Tp > &__pt2) noexcept(__is_nothrow_swappable< _Tp >::value)

2.24.1 Detailed Description

A const-propagating wrapper that propagates const to pointer-like members, as described in n4388 "A Proposal to Add a Const-Propagating Wrapper to the Standard Library".

2.25 Containers

Collaboration diagram for Containers:

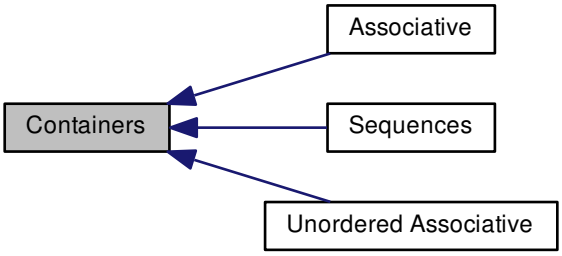

Modules

- Associative
- Sequences
- Unordered Associative

2.25.1 Detailed Description

Containers are collections of objects.

A container may hold any type which meets certain requirements, but the type of contained object is chosen at compile time, and all objects in a given container must be of the same type. (Polymorphism is possible by declaring a container of pointers to a base class and then populating it with pointers to instances of derived classes. Variant value types such as the `any` class from `Boost` can also be used.

All contained types must be `Assignable` and `CopyConstructible`. Specific containers may place additional requirements on the types of their contained objects.

Containers manage memory allocation and deallocation themselves when storing your objects. The objects are destroyed when the container is itself destroyed. Note that if you are storing pointers in a container, `delete` is *not* automatically called on the pointers before destroying them.

All containers must meet certain requirements, summarized in `tables`.

The standard containers are further refined into Sequences and Associative Containers. Unordered Associative Containers.

2.26 Containers

Collaboration diagram for Containers:

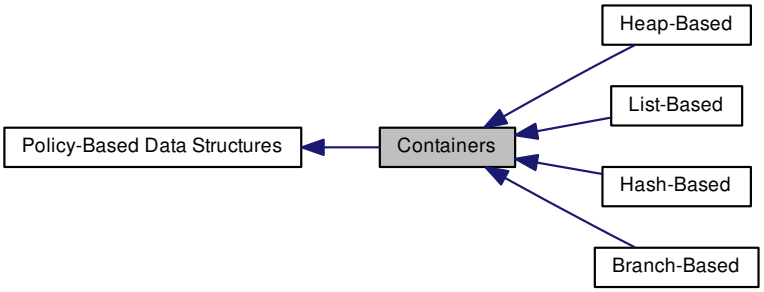

Modules

- Branch-Based
- Hash-Based
- Heap-Based
- List-Based

2.26.1 Detailed Description

2.27 Data Structure Type

Collaboration diagram for Data Structure Type:

Classes

- struct __gnu_pbds::associative_tag
- struct __gnu_pbds::basic_branch_tag
- struct __gnu_pbds::basic_hash_tag
- struct __gnu_pbds::binary_heap_tag
- struct __gnu_pbds::binomial_heap_tag
- struct __gnu_pbds::cc_hash_tag
- struct __gnu_pbds::container_tag
- struct __gnu_pbds::gp_hash_tag
- struct __gnu_pbds::list_update_tag
- struct __gnu_pbds::ov_tree_tag
- struct __gnu_pbds::pairing_heap_tag
- struct __gnu_pbds::pat_trie_tag
- struct __gnu_pbds::priority_queue_tag
- struct __gnu_pbds::rb_tree_tag
- struct __gnu_pbds::rc_binomial_heap_tag
- struct __gnu_pbds::sequence_tag
- struct __gnu_pbds::splay_tree_tag
- struct __gnu_pbds::string_tag
- struct __gnu_pbds::thin_heap_tag
- struct __gnu_pbds::tree_tag
- struct __gnu_pbds::trie_tag

2.27.1 Detailed Description

2.28 Decimal Floating-Point Arithmetic

Collaboration diagram for Decimal Floating-Point Arithmetic:



Namespaces

- std::decimal

2.28.1 Detailed Description

Classes and functions for decimal floating-point arithmetic.

2.29 Diagnostics

Collaboration diagram for Diagnostics:

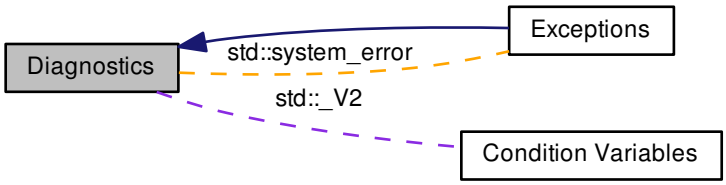

Modules

- Exceptions

Classes

- class std::_V2::error_category
- struct std::error_code
- struct std::error_condition
- struct std::hash< error_code >
- struct std::is_error_code_enum< _Tp >
- struct std::is_error_condition_enum< _Tp >
- class std::system_error

Functions

- **std::_V2::error_category::error_category** (const error_category &)=delete
- **std::error_code::error_code** (int __v, const error_category &__cat) noexcept
- template<typename _ErrorCodeEnum , typename = typename enable_if<is_error_code_enum<_ErrorCodeEnum>::value>::type>
  std::error_code::error_code (_ErrorCodeEnum __e) noexcept
- **std::error_condition::error_condition** (int __v, const error_category &__cat) noexcept
- template<typename _ErrorConditionEnum , typename = typename enable_if<is_error_condition_enum<_ErrorConditionEnum>::value>::type>
  std::error_condition::error_condition (_ErrorConditionEnum __e) noexcept
- **std::system_error::system_error** (error_code __ec=error_code())
- **std::system_error::system_error** (error_code __ec, const string &__what)
- **std::system_error::system_error** (error_code __ec, const char *__what)
- **std::system_error::system_error** (int __v, const error_category &__ecat, const char *__what)
- **std::system_error::system_error** (int __v, const error_category &__ecat)
- **std::system_error::system_error** (int __v, const error_category &__ecat, const string &__what)
- **std::system_error::system_error** (const system_error &)=default
- void **std::error_code::assign** (int __v, const error_category &__cat) noexcept
- void **std::error_condition::assign** (int __v, const error_category &__cat) noexcept

- const error_category & **std::error_code::category** () const noexcept
- const error_category & **std::error_condition::category** () const noexcept
- void **std::error_code::clear** () noexcept
- void **std::error_condition::clear** () noexcept
- const error_code & **std::system_error::code** () const noexcept
- virtual error_condition **std::_V2::error_category::default_error_condition** (int __i) const noexcept
- error_condition **std::error_code::default_error_condition** () const noexcept
- virtual bool **std::_V2::error_category::equivalent** (int __i, const error_condition &__cond) const noexcept
- virtual bool **std::_V2::error_category::equivalent** (const error_code &__code, int __i) const noexcept
- const error_category & std::_V2::generic_category () noexcept
- error_condition make_error_condition (errc __e) noexcept
- virtual string **std::_V2::error_category::message** (int) const =0
- _GLIBCXX_DEFAULT_ABI_TAG string **std::error_code::message** () const
- _GLIBCXX_DEFAULT_ABI_TAG string **std::error_condition::message** () const
- virtual const char * **std::_V2::error_category::name** () const noexcept=0
- **std::error_code::operator bool** () const noexcept
- **std::error_condition::operator bool** () const noexcept
- bool **std::_V2::error_category::operator!=** (const error_category &__other) const noexcept
- bool operator!= (const error_code &__lhs, const error_code &__rhs) noexcept
- bool **operator!=** (const error_code &__lhs, const error_condition &__rhs) noexcept
- bool **operator!=** (const error_condition &__lhs, const error_code &__rhs) noexcept
- bool operator!= (const error_condition &__lhs, const error_condition &__rhs) noexcept
- size_t **std::hash**< **error_code** >**::operator()** (const error_code &__e) const noexcept
- bool **std::_V2::error_category::operator**< (const error_category &__other) const noexcept
- bool operator< (const error_condition &__lhs, const error_condition &__rhs) noexcept
- error_category & **std::_V2::error_category::operator=** (const error_category &)=delete
- template<typename _ErrorCodeEnum >
  enable_if< is_error_code_enum
  < _ErrorCodeEnum >::value,
  error_code & >::type **std::error_code::operator=** (_ErrorCodeEnum __e) noexcept
- template<typename _ErrorConditionEnum >
  enable_if
  < is_error_condition_enum
  < _ErrorConditionEnum >::value,
  error_condition & >::type **std::error_condition::operator=** (_ErrorConditionEnum __e) noexcept
- system_error & **std::system_error::operator=** (const system_error &)=default
- bool **std::_V2::error_category::operator==** (const error_category &__other) const noexcept
- bool operator== (const error_code &__lhs, const error_code &__rhs) noexcept
- bool **operator==** (const error_code &__lhs, const error_condition &__rhs) noexcept
- bool operator== (const error_condition &__lhs, const error_condition &__rhs) noexcept
- bool **operator==** (const error_condition &__lhs, const error_code &__rhs) noexcept
- const error_category & std::_V2::system_category () noexcept
- int **std::error_code::value** () const noexcept
- int **std::error_condition::value** () const noexcept

Variables

- error_code **std::make_error_code** (errc) noexcept
- error_condition **make_error_condition** (errc) noexcept

- error_code make_error_code (errc __e) noexcept

2.29.1 Detailed Description

Components for error handling, reporting, and diagnostic operations.

2.29.2 Function Documentation

2.29.2.1 const error_category& std::_V2::generic_category ( ) [noexcept]

Error category for `errno` error codes.

Referenced by std::error_code::make_error_code(), and std::error_condition::make_error_condition().

2.29.2.2 error_code make_error_code (errc __e) [related]

Definition at line 239 of file system_error.

References std::_V2::generic_category().

2.29.2.3 error_condition make_error_condition (errc __e) [related]

Create an `error_condition` representing a standard `errc` condition.

Definition at line 335 of file system_error.

References std::_V2::generic_category().

2.29.2.4 bool operator!= (const error_code & __lhs, const error_code & __rhs) [related]

Definition at line 398 of file system_error.

2.29.2.5 bool operator!= (const error_condition & __lhs, const error_condition & __rhs) [related]

Definition at line 415 of file system_error.

2.29.2.6 bool operator< (const error_condition & __lhs, const error_condition & __rhs) [related]

Define an ordering for error_condition objects.

Definition at line 379 of file system_error.

2.29.2.7 bool operator== (const error_code & __lhs, const error_code & __rhs) [related]

Definition at line 342 of file system_error.

2.29.2.8 bool operator== (const error_condition & __lhs, const error_condition & __rhs) [related]

Definition at line 357 of file system_error.

2.29.2.9 const error_category& std::_V2::system_category ( ) [noexcept]

Error category for other error codes defined by the OS.

2.30 Dynamic Bitset.

Collaboration diagram for Dynamic Bitset.:

Classes

- struct std::tr2::__dynamic_bitset_base< _WordT, _Alloc >
- class std::tr2::dynamic_bitset< _WordT, _Alloc >

Functions

- template<typename _CharT , typename _Traits , typename _Alloc1 >
  void **std::tr2::dynamic_bitset< _WordT, _Alloc >::_M_copy_to_string** (std::basic_string< _CharT, _Traits, _Alloc1 > &__str, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1')) const
- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_ostream< _CharT, _Traits > & std::tr2::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const dynamic_bitset< _WordT, _Alloc > &__x)
- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_istream< _CharT, _Traits > & std::tr2::operator>> (std::basic_istream< _CharT, _Traits > &__is, dynamic_bitset< _WordT, _Alloc > &__x)

- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator!= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator<= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator> (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator>= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)

- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator& (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator| (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)

- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator^ (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator- (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)

2.30.1 Detailed Description

2.30.2 Function Documentation

2.30.2.1 template<typename _WordT , typename _Alloc > bool std::tr2::operator!= (const dynamic_bitset< _WordT, _Alloc > & *__lhs,* const dynamic_bitset< _WordT, _Alloc > & *__rhs*) [inline]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1123 of file dynamic_bitset.

2.30.2.2 template<typename _WordT , typename _Alloc > dynamic_bitset<_WordT, _Alloc> std::tr2::operator& (const dynamic_bitset< _WordT, _Alloc > & *__x,* const dynamic_bitset< _WordT, _Alloc > & *__y*) [inline]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1158 of file dynamic_bitset.

2.30.2.3 template<typename _WordT , typename _Alloc > dynamic_bitset<_WordT, _Alloc> std::tr2::operator- (const dynamic_bitset< _WordT, _Alloc > & *__x,* const dynamic_bitset< _WordT, _Alloc > & *__y*) [inline]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1188 of file dynamic_bitset.

2.30.2.4 template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc > std::basic_ostream<_CharT, _Traits>& std::tr2::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const dynamic_bitset< _WordT, _Alloc > & __x) [inline]

Stream output operator for dynamic_bitset.

Definition at line 1201 of file dynamic_bitset.

References std::__ctype_abstract_base< _CharT >::widen().

2.30.2.5 template<typename _WordT , typename _Alloc > bool std::tr2::operator<= (const dynamic_bitset< _WordT, _Alloc > & __lhs, const dynamic_bitset< _WordT, _Alloc > & __rhs) [inline]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1129 of file dynamic_bitset.

2.30.2.6 template<typename _WordT , typename _Alloc > bool std::tr2::operator> (const dynamic_bitset< _WordT, _Alloc > & __lhs, const dynamic_bitset< _WordT, _Alloc > & __rhs) [inline]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1135 of file dynamic_bitset.

2.30.2.7 template<typename _WordT , typename _Alloc > bool std::tr2::operator>= (const dynamic_bitset< _WordT, _Alloc > & __lhs, const dynamic_bitset< _WordT, _Alloc > & __rhs) [inline]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1141 of file dynamic_bitset.

2.30.2.8 template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc > std::basic_istream<_CharT, _Traits>& std::tr2::operator>> (std::basic_istream< _CharT, _Traits > & __is, dynamic_bitset< _WordT, _Alloc > & __x)

Stream input operator for dynamic_bitset.

Input will skip whitespace and only accept '0' and '1' characters. The dynamic_bitset will grow as necessary to hold the string of bits.

Definition at line 207 of file dynamic_bitset.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::empty(), std::basic_string< _CharT, _Traits, _Alloc >::push_back(), std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_string< _CharT, _Traits, _Alloc >::reserve(), std::tr2::dynamic_bitset< _WordT, _Alloc >::resize(), std::basic_ios< _CharT, _Traits >::setstate(), std::tr2::dynamic_bitset< _WordT, _Alloc >::size(), std::basic_string< _CharT, _Traits, _Alloc >::size(), and std::basic_ios< _CharT, _Traits >::widen().

2.30.2.9 template<typename _WordT , typename _Alloc > dynamic_bitset<_WordT, _Alloc> std::tr2::operator^ (const dynamic_bitset< _WordT, _Alloc > & __x, const dynamic_bitset< _WordT, _Alloc > & __y) [inline]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1178 of file dynamic_bitset.

2.30.2.10 template<typename _WordT , typename _Alloc > dynamic_bitset<_WordT, _Alloc> std::tr2::operator| (const dynamic_bitset< _WordT, _Alloc > & __x, const dynamic_bitset< _WordT, _Alloc > & __y) [inline]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1168 of file dynamic_bitset.

2.31 Exceptions

Collaboration diagram for Exceptions:



Classes

- struct __gnu_pbds::container_error
- struct __gnu_pbds::insert_error
- struct __gnu_pbds::join_error
- struct __gnu_pbds::resize_error

Functions

- void **__gnu_pbds::__throw_container_error** ()
- void **__gnu_pbds::__throw_insert_error** ()
- void **__gnu_pbds::__throw_join_error** ()
- void **__gnu_pbds::__throw_resize_error** ()

2.31.1 Detailed Description

2.32 Exceptions

Collaboration diagram for Exceptions:

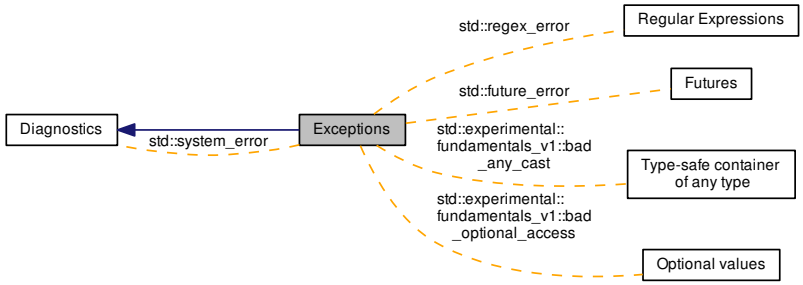

Classes

- class __cxxabiv1::__forced_unwind
- class std::bad_alloc
- class std::experimental::fundamentals_v1::bad_any_cast
- class std::bad_cast
- class std::bad_exception
- class std::bad_function_call
- class std::experimental::fundamentals_v1::bad_optional_access
- class std::bad_typeid
- class std::bad_weak_ptr
- class std::domain_error
- class std::exception
- class std::__exception_ptr::exception_ptr
- class std::ios_base::failure
- struct __gnu_cxx::forced_error
- class std::future_error
- class std::invalid_argument
- class std::length_error
- class std::logic_error
- class std::nested_exception
- class std::out_of_range
- class std::overflow_error
- class std::range_error
- class __gnu_cxx::recursive_init_error
- class std::regex_error
- class std::runtime_error
- class std::system_error
- class std::underflow_error

Macros

- #define **__cpp_lib_uncaught_exceptions**

Typedefs

- typedef void(∗ std::terminate_handler)()
- typedef void(∗ std::unexpected_handler)()

Functions

- **std::exception::exception** (const exception &)=default
- **std::exception::exception** (exception &&)=default
- void __gnu_cxx::__verbose_terminate_handler ()
- exception_ptr std::current_exception () noexcept
- terminate_handler std::get_terminate () noexcept
- unexpected_handler std::get_unexpected () noexcept
- template<typename _Ex >
  exception_ptr std::make_exception_ptr (_Ex __ex) noexcept
- exception & **std::exception::operator=** (const exception &)=default
- exception & **std::exception::operator=** (exception &&)=default
- void std::rethrow_exception (exception_ptr)
- template<typename _Ex >
  void std::rethrow_if_nested (const _Ex &__ex)
- terminate_handler std::set_terminate (terminate_handler) noexcept
- unexpected_handler std::set_unexpected (unexpected_handler) noexcept
- void std::terminate () noexcept
- template<typename _Tp >
  void std::throw_with_nested (_Tp &&__t)
- bool std::uncaught_exception () noexcept
- int std::uncaught_exceptions () noexcept
- void std::unexpected ()
- virtual const char ∗ std::exception::what () const noexcept

2.32.1 Detailed Description

Classes and functions for reporting errors via exception classes.

2.32.2 Typedef Documentation

2.32.2.1 typedef void(∗ std::terminate_handler)()

If you write a replacement terminate handler, it must be of this type.

Definition at line 65 of file exception.

2.32.2.2 typedef void(∗ std::unexpected_handler)()

If you write a replacement unexpected handler, it must be of this type.

Definition at line 68 of file exception.

2.32.3 Function Documentation

2.32.3.1 void __gnu_cxx::__verbose_terminate_handler ( )

A replacement for the standard terminate_handler which prints more information about the terminating exception (if any) on stderr.

Call

```
std::set_terminate(__gnu_cxx::__verbose_terminate_handler
      )
```

to use. For more info, see http://gcc.gnu.org/onlinedocs/libstdc++/manual/bk01pt02ch06s02.-html

In 3.4 and later, this is on by default.

2.32.3.2 exception_ptr std::current_exception ( ) [noexcept]

Obtain an exception_ptr to the currently handled exception. If there is none, or the currently handled exception is foreign, return the null value.

Referenced by std::make_exception_ptr().

2.32.3.3 terminate_handler std::get_terminate ( ) [noexcept]

Return the current terminate handler.

2.32.3.4 unexpected_handler std::get_unexpected ( ) [noexcept]

Return the current unexpected handler.

2.32.3.5 template<typename _Ex > exception_ptr std::make_exception_ptr (_Ex __ex) [noexcept]

Obtain an exception_ptr pointing to a copy of the supplied object.

Definition at line 186 of file exception_ptr.h.

References std::current_exception().

2.32.3.6 void std::rethrow_exception (exception_ptr)

Throw the object pointed to by the exception_ptr.

Referenced by std::__basic_future< _Res & >::_M_get_result().

2.32.3.7 template<typename _Ex > void std::rethrow_if_nested (const _Ex & __ex) [inline]

If __ex is derived from nested_exception, __ex.rethrow_nested().

Definition at line 159 of file nested_exception.h.

References std::__addressof().

2.32.3.8 terminate_handler std::set_terminate (terminate_handler) [noexcept]

Takes a new handler function as an argument, returns the old function.

2.32.3.9 unexpected_handler std::set_unexpected (unexpected_handler) [noexcept]

Takes a new handler function as an argument, returns the old function.

2.32.3.10 void std::terminate ( ) [noexcept]

The runtime will call this function if exception handling must be abandoned for any reason. It can also be called by the user.

2.32.3.11 template<typename _Tp > void std::throw_with_nested (_Tp && __t) [inline]

If __t is derived from nested_exception, throws __t. Else, throws an implementation-defined object derived from both.

Definition at line 118 of file nested_exception.h.

2.32.3.12 bool std::uncaught_exception ( ) [noexcept]

[18.6.4]/1: 'Returns true after completing evaluation of a throw-expression until either completing initialization of the exception-declaration in the matching handler or entering unexpected() due to the throw; or after entering terminate() for any reason other than an explicit call to terminate(). [Note: This includes stack unwinding [15.2]. end note]'

2: 'When uncaught_exception() is true, throwing an exception can result in a call of terminate() (15.5.1).'

Referenced by std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

2.32.3.13 int std::uncaught_exceptions ( ) [noexcept]

The number of uncaught exceptions.

2.32.3.14 void std::unexpected ( )

The runtime will call this function if an exception is thrown which violates the function's exception specification.

2.32.3.15 virtual const char* std::exception::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented in std::ios_base::failure, std::runtime_error, std::bad_typeid, std::bad_cast, std::logic_error, std::future_error, std::bad_weak_ptr, std::bad_alloc, std::experimental::fundamentals_v1::bad_any_cast, std::bad_exception, and std::bad_function_call.

2.33 Extensions

Collaboration diagram for Extensions:

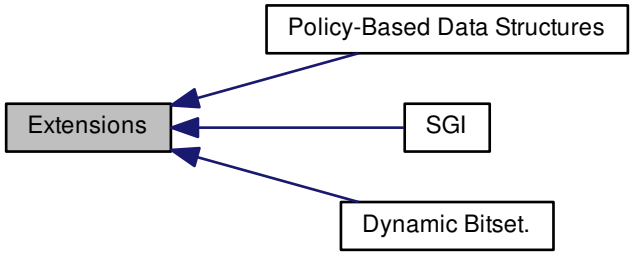

Modules

- Dynamic Bitset.
- Policy-Based Data Structures
- SGI

Namespaces

- __gnu_cxx
- std::tr2

Classes

- class __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >

2.33.1 Detailed Description

Components generally useful that are not part of any standard.

2.34 Function Objects

Collaboration diagram for Function Objects:

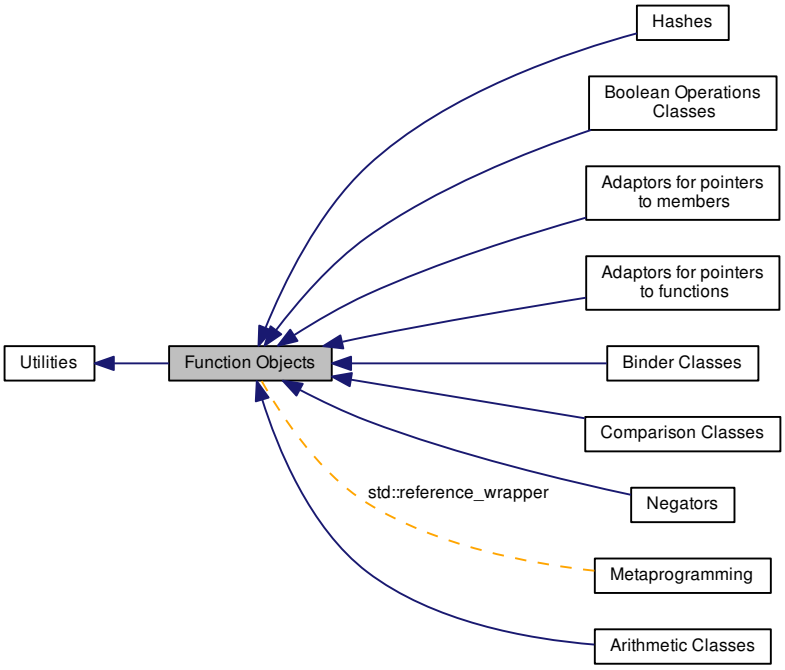

Modules

- Adaptors for pointers to functions
- Adaptors for pointers to members
- Arithmetic Classes
- Binder Classes
- Boolean Operations Classes
- Comparison Classes
- Hashes
- Negators

Classes

- struct std::binary_function< _Arg1, _Arg2, _Result >
- class std::function< _Res(_ArgTypes...)>
- class std::reference_wrapper< _Tp >
- struct std::unary_function< _Arg, _Result >

Functions

- template<typename _Tp , typename _Class >
  constexpr _Mem_fn< _Tp _Class::* > std::mem_fn (_Tp _Class::*__pm) noexcept

2.34.1 Detailed Description

Function objects, or *functors*, are objects with an `operator()` defined and accessible. They can be passed as arguments to algorithm templates and used in place of a function pointer. Not only is the resulting expressiveness of the library increased, but the generated code can be more efficient than what you might write by hand. When we refer to *functors*, then, generally we include function pointers in the description as well.

Often, functors are only created as temporaries passed to algorithm calls, rather than being created as named variables.

Two examples taken from the standard itself follow. To perform a by-element addition of two vectors `a` and `b` containing `double`, and put the result in `a`, use

```
transform (a.begin(), a.end(), b.begin(), a.begin(), plus<double>());
```

To negate every element in `a`, use

```
transform(a.begin(), a.end(), a.begin(), negate<double>());
```

The addition and negation functions will be inlined directly.

The standard functors are derived from structs named `unary_function` and `binary_function`. These two classes contain nothing but typedefs, to aid in generic (template) programming. If you write your own functors, you might consider doing the same.

2.34.2 Function Documentation

2.34.2.1 template<typename _Tp , typename _Class > constexpr _Mem_fn<_Tp _Class::*> std::mem_fn (_Tp _Class::* __pm) [inline], [noexcept]

Returns a function object that forwards to the member pointer *pm*.

Definition at line 170 of file functional.

2.35 Futures

Collaboration diagram for Futures:

Classes

- class std::__basic_future< _Res >
- struct std::__future_base
- struct std::__future_base::_Result< _Res & >
- struct std::__future_base::_Result< void >
- class std::future< _Res >
- class std::future< _Res & >
- class std::future< void >
- class std::future_error
- struct std::is_error_code_enum< future_errc >
- class std::packaged_task< _Res(_ArgTypes...)>
- class std::promise< _Res >
- class std::promise< _Res & >
- class std::promise< void >
- class std::shared_future< _Res >
- class std::shared_future< _Res & >
- class std::shared_future< void >

Typedefs

- template<typename _Fn , typename... _Args>
  using **std::__async_result_of** = typename __invoke_result< typename decay< _Fn >::type, typename decay< _Args >::type...>::type

Enumerations

- enum std::future_errc { **future_already_retrieved**, **promise_already_satisfied**, **no_state**, **broken_promise** }
- enum std::future_status { **ready**, **timeout**, **deferred** }
- enum std::launch { **async**, **deferred** }

Functions

- **std::__basic_future< _Res >::__basic_future** (const shared_future< _Res > &) noexcept
- **std::__basic_future< _Res >::__basic_future** (shared_future< _Res > &&) noexcept
- **std::__basic_future< _Res >::__basic_future** (future< _Res > &&) noexcept

- template<typename _Signature , typename _Fn , typename _Alloc = std::allocator<int>>
  static shared_ptr
  < __future_base::_Task_state_base
  < _Signature > > **std::__create_task_state** (_Fn &&__fn, const _Alloc &__a=_Alloc())
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **std::__future_base::_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **std::__future_base::_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > std::async (launch __policy, _Fn &&__fn, _Args &&...__args)
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > std::async (_Fn &&__fn, _Args &&...__args)
- const error_category & std::future_category () noexcept
- error_code std::make_error_code (future_errc __errc) noexcept
- error_condition std::make_error_condition (future_errc __errc) noexcept
- constexpr launch **std::operator&** (launch __x, launch __y)
- launch & **std::operator&=** (launch &__x, launch __y)
- constexpr launch **std::operator^** (launch __x, launch __y)
- launch & **std::operator^=** (launch &__x, launch __y)
- constexpr launch **std::operator|** (launch __x, launch __y)
- launch & **std::operator|=** (launch &__x, launch __y)
- constexpr launch **std::operator~** (launch __x)
- shared_future< _Res > **std::future< _Res >::share** () noexcept
- shared_future< _Res & > **std::future< _Res & >::share** () noexcept
- shared_future< void > **std::future< void >::share** () noexcept
- template<typename _Res >
  void **std::swap** (promise< _Res > &__x, promise< _Res > &__y) noexcept
- template<typename _Res , typename... _ArgTypes>
  void std::swap (packaged_task< _Res(_ArgTypes...)> &__x, packaged_task< _Res(_ArgTypes...)> &__y) noexcept

2.35.1 Detailed Description

Classes for futures support.

2.35.2 Enumeration Type Documentation

2.35.2.1 enum std::future_errc [strong]

Error code for futures.

Definition at line 66 of file future.

2.35.2.2 enum std::future_status [strong]

Status code for futures.

Definition at line 174 of file future.

2.35.2.3 enum std::launch [strong]

Launch code for futures.

Definition at line 137 of file future.

2.35.3 Function Documentation

2.35.3.1 template<typename _Fn , typename... _Args> future< __async_result_of< _Fn, _Args...> > std::async (launch __*policy,* _Fn && __*fn,* _Args &&... __*args*)

async

Definition at line 1719 of file future.

2.35.3.2 template<typename _Fn , typename... _Args> future< __async_result_of< _Fn, _Args...> > std::async (_Fn && __*fn,* _Args &&... __*args*) [inline]

async, potential overload

Definition at line 1752 of file future.

References std::async().

Referenced by std::async().

2.35.3.3 const error_category& std::future_category ( ) [noexcept]

Points to a statically-allocated object derived from error_category.

Referenced by std::make_error_code(), and std::make_error_condition().

2.35.3.4 error_code std::make_error_code (future_errc __*errc*) [inline], [noexcept]

Overload for make_error_code.

Definition at line 84 of file future.

References std::future_category().

2.35.3.5 error_condition std::make_error_condition (future_errc __*errc*) [inline], [noexcept]

Overload for make_error_condition.

Definition at line 89 of file future.

References std::future_category().

2.35.3.6 template<typename _Res , typename... _ArgTypes> void std::swap (packaged_task< _Res(_ArgTypes...)> & __*x,* packaged_task< _Res(_ArgTypes...)> & __*y*) [inline], [noexcept]

swap

Definition at line 1583 of file future.

2.36 Generalized Numeric operations

Collaboration diagram for Generalized Numeric operations:



Functions

- template<typename _InputIterator , typename _Tp >
  constexpr _Tp std::accumulate (_InputIterator __first, _InputIterator __last, _Tp __init)
- template<typename _InputIterator , typename _Tp , typename _BinaryOperation >
  constexpr _Tp std::accumulate (_InputIterator __first, _InputIterator __last, _Tp __init, _BinaryOperation __binary_op)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp >
  constexpr _Tp std::inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp , typename _BinaryOperation1 , typename _BinaryOperation2 >
  constexpr _Tp std::inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init, _BinaryOperation1 __binary_op1, _BinaryOperation2 __binary_op2)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::iota (_ForwardIterator __first, _ForwardIterator __last, _Tp __value)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)

2.36.1 Detailed Description

2.36.2 Function Documentation

2.36.2.1 template<typename _InputIterator , typename _Tp > constexpr _Tp std::accumulate (_InputIterator *__first,* _InputIterator *__last,* _Tp *__init*) [inline]

Accumulate values in a range.

Accumulates the values in the range [first,last) using operator+(). The initial value is *init*. The values are processed in order.

Parameters

__first	Start of range.
__last	End of range.
__init	Starting value to add other values to.

Returns

The final sum.

Definition at line 134 of file stl_numeric.h.

Referenced by __gnu_parallel::__parallel_partial_sum_linear().

2.36.2.2 template<typename _InputIterator , typename _Tp , typename _BinaryOperation > constexpr _Tp std::accumulate (_InputIterator *__first*, _InputIterator *__last*, _Tp *__init*, _BinaryOperation *__binary_op*) [inline]

Accumulate values in a range with operation.

Accumulates the values in the range `[first,last)` using the function object `__binary_op`. The initial value is `__init`. The values are processed in order.

Parameters

__first	Start of range.
__last	End of range.
__init	Starting value to add other values to.
__binary_op	Function object to accumulate with.

Returns

The final sum.

Definition at line 161 of file stl_numeric.h.

2.36.2.3 template<typename _InputIterator , typename _OutputIterator > constexpr _OutputIterator std::adjacent_difference (_InputIterator *__first*, _InputIterator *__last*, _OutputIterator *__result*)

Return differences between adjacent values.

Computes the difference between adjacent values in the range [first,last) using operator-() and writes the result to `__result`.

Parameters

__first	Start of input range.
__last	End of input range.
__result	Output sums.

Returns

Iterator pointing just beyond the values written to result.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 539. partial_sum and adjacent_difference should mention requirements

Definition at line 338 of file stl_numeric.h.

2.36.2.4 template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation > constexpr _OutputIterator std::adjacent_difference (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _BinaryOperation *__binary_op*)

Return differences between adjacent values.

Computes the difference between adjacent values in the range [__first,__last) using the function object __binary_op and writes the result to __result.

Parameters

__first	Start of input range.
__last	End of input range.
__result	Output sum.
__binary_op	Function object.

Returns

Iterator pointing just beyond the values written to result.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 539. partial_sum and adjacent_difference should mention requirements

Definition at line 382 of file stl_numeric.h.

2.36.2.5 template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp > constexpr _Tp std::inner_product (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _Tp *__init*) [inline]

Compute inner product of two ranges.

Starting with an initial value of __init, multiplies successive elements from the two ranges and adds each product into the accumulated value using operator+(). The values in the ranges are processed in order.

Parameters

__first1	Start of range 1.
__last1	End of range 1.
__first2	Start of range 2.
__init	Starting value to add other values to.

Returns

The final inner product.

Definition at line 190 of file stl_numeric.h.

2.36.2.6 template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp , typename _BinaryOperation1 , typename _BinaryOperation2 > constexpr _Tp std::inner_product (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _Tp *__init,* _BinaryOperation1 *__binary_op1,* _BinaryOperation2 *__binary_op2*) [inline]

Compute inner product of two ranges.

Starting with an initial value of __init, applies __binary_op2 to successive elements from the two ranges and accumulates each result into the accumulated value using __binary_op1. The values in the ranges are processed in order.

Parameters

__first1	Start of range 1.
__last1	End of range 1.
__first2	Start of range 2.
__init	Starting value to add other values to.
__binary_op1	Function object to accumulate with.
__binary_op2	Function object to apply to pairs of input values.

Returns

The final inner product.

Definition at line 223 of file stl_numeric.h.

2.36.2.7 template<typename _ForwardIterator , typename _Tp > constexpr void std::iota (_ForwardIterator *__first,* _ForwardIterator *__last,* _Tp *__value*)

Create a range of sequentially increasing values.

For each element in the range [first,last) assigns `value` and increments `value` as if by `++value`.

Parameters

__first	Start of range.
__last	End of range.
__value	Starting value.

Returns

Nothing.

Definition at line 88 of file stl_numeric.h.

2.36.2.8 template<typename _InputIterator , typename _OutputIterator > constexpr _OutputIterator std::partial_sum (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result*)

Return list of partial sums.

Accumulates the values in the range [first,last) using the + operator. As each successive input value is added into the total, that partial sum is written to `__result`. Therefore, the first value in `__result` is the first value of the input, the second value in `__result` is the sum of the first and second input values, and so on.

Parameters

__first	Start of input range.
__last	End of input range.
__result	Output sum.

Returns

Iterator pointing just beyond the values written to __result.

Definition at line 256 of file stl_numeric.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs_pu(), and __gnu_parallel::__sequential_random_shuffle().

2.36.2.9 template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation > constexpr _OutputIterator std::partial_sum (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _BinaryOperation *__binary_op*)

Return list of partial sums.

Accumulates the values in the range [first,last) using `__binary_op`. As each successive input value is added into the total, that partial sum is written to `__result`. Therefore, the first value in `__result` is the first value of the input, the second value in `__result` is the sum of the first and second input values, and so on.

Parameters

__first	Start of input range.
__last	End of input range.
__result	Output sum.
__binary_op	Function object.

Returns

Iterator pointing just beyond the values written to __result.

Definition at line 298 of file stl_numeric.h.

2.37 Hash-Based

Collaboration diagram for Hash-Based:



Modules

- Base and Policy Classes

Classes

- class __gnu_pbds::basic_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Resize_Policy, Store_Hash, Tag, Policy_Tl, _Alloc >
- class __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >
- class __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >

Macros

- #define **PB_DS_CC_HASH_BASE**
- #define **PB_DS_GP_HASH_BASE**
- #define **PB_DS_HASH_BASE**

2.37.1 Detailed Description

2.38 Hashes

Collaboration diagram for Hashes:

Classes

- struct std::hash< _Tp >
- struct std::hash< _Tp * >
- struct std::hash< bool >
- struct std::hash< char >
- struct std::hash< char16_t >
- struct std::hash< char32_t >
- struct std::hash< double >
- struct std::hash< float >
- struct std::hash< int >
- struct std::hash< long >
- struct std::hash< long double >
- struct std::hash< long long >
- struct std::hash< short >
- struct std::hash< signed char >
- struct std::hash< unsigned char >
- struct std::hash< unsigned int >
- struct std::hash< unsigned long >
- struct std::hash< unsigned long long >
- struct std::hash< unsigned short >
- struct std::hash< wchar_t >

Macros

- #define **_Cxx_hashtable_define_trivial_hash**(_Tp)

2.38.1 Detailed Description

Hashing functors taking a variable type and returning a `std::size_t`.

2.39 Heap

Collaboration diagram for Heap:

Functions

- template<typename _RandomAccessIterator >
  constexpr bool std::is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr bool std::is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)

2.39.1 Detailed Description

2.39.2 Function Documentation

2.39.2.1 template<typename _RandomAccessIterator > constexpr bool std::is_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Determines whether a range is a heap.

Parameters

__first	Start of range.
__last	End of range.

Returns

True if range is a heap, false otherwise.

Definition at line 550 of file stl_heap.h.

References std::is_heap_until().

2.39.2.2 template<typename _RandomAccessIterator , typename _Compare > constexpr bool std::is_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*, _Compare *__comp*) [inline]

Determines whether a range is a heap using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	Comparison functor to use.

Returns

True if range is a heap, false otherwise.

Definition at line 564 of file stl_heap.h.

References std::distance().

2.39.2.3 template<typename _RandomAccessIterator > constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Search the end of a heap.

Parameters

__first	Start of range.
__last	End of range.

Returns

An iterator pointing to the first element not in the heap.

This operation returns the last iterator i in [__first, __last) for which the range [__first, i) is a heap.

Definition at line 496 of file stl_heap.h.

References std::distance().

2.39.2.4 template<typename _RandomAccessIterator , typename _Compare > constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*, _Compare *__comp*) [inline]

Search the end of a heap using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	Comparison functor to use.

Returns

An iterator pointing to the first element not in the heap.

This operation returns the last iterator i in [__first, __last) for which the range [__first, i) is a heap. Comparisons are made using __comp.

Definition at line 525 of file stl_heap.h.

References std::distance().

Referenced by std::is_heap().

2.39.2.5 template<typename _RandomAccessIterator > constexpr void std::make_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Construct a heap over a range.

Parameters

__first	Start of heap.
__last	End of heap.

This operation makes the elements in [__first,__last) into a heap.

Definition at line 374 of file stl_heap.h.

2.39.2.6 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::make_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*, _Compare *__comp*) [inline]

Construct a heap over a range using comparison functor.

Parameters

__first	Start of heap.
__last	End of heap.
__comp	Comparison functor to use.

This operation makes the elements in [__first,__last) into a heap. Comparisons are made using __comp.

Definition at line 401 of file stl_heap.h.

Referenced by std::priority_queue< _Tp, _Sequence, _Compare >::priority_queue().

2.39.2.7 template<typename _RandomAccessIterator > constexpr void std::pop_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Pop an element off a heap.

Parameters

__first	Start of heap.

__last	End of heap.

Precondition

[__first, __last) is a valid, non-empty range.

This operation pops the top of the heap. The elements __first and __last-1 are swapped and [__first,__last-1) is made into a heap.

Definition at line 282 of file stl_heap.h.

2.39.2.8 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::pop_heap (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Pop an element off a heap using comparison functor.

Parameters

__first	Start of heap.
__last	End of heap.
__comp	Comparison functor to use.

This operation pops the top of the heap. The elements __first and __last-1 are swapped and [__first,__last-1) is made into a heap. Comparisons are made using comp.

Definition at line 316 of file stl_heap.h.

Referenced by std::priority_queue< _Tp, _Sequence, _Compare >::pop().

2.39.2.9 template<typename _RandomAccessIterator > constexpr void std::push_heap (_RandomAccessIterator *__first,* _RandomAccessIterator *__last*) [inline]

Push an element onto a heap.

Parameters

__first	Start of heap.
__last	End of heap + element.

This operation pushes the element at last-1 onto the valid heap over the range [__first,__last-1). After completion, [__first,__last) is a valid heap.

Definition at line 161 of file stl_heap.h.

2.39.2.10 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::push_heap (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Push an element onto a heap using comparison functor.

Parameters

__first	Start of heap.
__last	End of heap + element.
__comp	Comparison functor.

This operation pushes the element at __last-1 onto the valid heap over the range [__first,__last-1). After completion, [__first,__last) is a valid heap. Compare operations are performed using comp.

Definition at line 197 of file stl_heap.h.

Referenced by std::priority_queue< _Tp, _Sequence, _Compare >::push().

2.39.2.11 template<typename _RandomAccessIterator > constexpr void std::sort_heap (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Sort a heap.

Parameters

__first	Start of heap.
__last	End of heap.

This operation sorts the valid heap in the range [__first,__last).

Definition at line 439 of file stl_heap.h.

2.39.2.12 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::sort_heap (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Sort a heap using comparison functor.

Parameters

__first	Start of heap.
__last	End of heap.
__comp	Comparison functor to use.

This operation sorts the valid heap in the range [__first,__last). Comparisons are made using __comp.

Definition at line 467 of file stl_heap.h.

2.40 Heap-Based

Collaboration diagram for Heap-Based:



Modules

- Base and Policy Classes

Classes

- class __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >

Typedefs

- typedef _Alloc **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::allocator_type**
- typedef Cmp_Fn **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::cmp_fn**
- typedef base_type::const_iterator **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::const_iterator**
- typedef __rebind_va::const_pointer **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::const_pointer**
- typedef __rebind_va::const_reference **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::const_reference**
- typedef Tag **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::container_category**
- typedef allocator_type::difference_type **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::difference_type**
- typedef base_type::iterator **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::iterator**
- typedef base_type::point_const_iterator **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::point_const_iterator**
- typedef base_type::point_iterator **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::point_iterator**
- typedef __rebind_va::pointer **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::pointer**
- typedef __rebind_va::reference **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::reference**
- typedef allocator_type::size_type **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::size_type**
- typedef _Tv **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::value_type**

Functions

- __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (const cmp_fn &r_cmp_fn)
- template<typename It >
  __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (It first_it, It last_it)

- template<typename It >
  __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (It first_it, It last_it, const cmp_fn &r_cmp_fn)
- **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue** (const priority_queue &other)
- priority_queue & **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::operator=** (const priority_queue &other)
- void **__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::swap** (priority_queue &other)

2.40.1 Detailed Description

2.40.2 Function Documentation

2.40.2.1 template<typename _Tv , typename Cmp_Fn = std::less<_Tv>, typename Tag = pairing_heap_tag, typename _Alloc = std::allocator<char>> __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (const cmp_fn & *r_cmp_fn*) [inline]

Constructor taking some policy objects. r_cmp_fn will be copied by the Cmp_Fn object of the container object.

Definition at line 115 of file priority_queue.hpp.

2.40.2.2 template<typename _Tv , typename Cmp_Fn = std::less<_Tv>, typename Tag = pairing_heap_tag, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (It *first_it,* It *last_it*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 121 of file priority_queue.hpp.

2.40.2.3 template<typename _Tv , typename Cmp_Fn = std::less<_Tv>, typename Tag = pairing_heap_tag, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >::priority_queue (It *first_it,* It *last_it,* const cmp_fn & *r_cmp_fn*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects The value_types between first_it and last_it will be inserted into the container object. r_cmp_fn will be copied by the cmp_fn object of the container object.

Definition at line 129 of file priority_queue.hpp.

2.41 I/O

Collaboration diagram for I/O:



Classes

- class std::basic_filebuf< _CharT, _Traits >
- class std::basic_fstream< _CharT, _Traits >
- class std::basic_ifstream< _CharT, _Traits >
- class std::basic_ios< _CharT, _Traits >
- class std::basic_iostream< _CharT, _Traits >
- class std::basic_istream< _CharT, _Traits >
- class std::basic_istringstream< _CharT, _Traits, _Alloc >
- class std::basic_ofstream< _CharT, _Traits >
- class std::basic_ostream< _CharT, _Traits >
- class std::basic_ostringstream< _CharT, _Traits, _Alloc >
- class std::basic_streambuf< _CharT, _Traits >
- class std::basic_stringbuf< _CharT, _Traits, _Alloc >
- class std::basic_stringstream< _CharT, _Traits, _Alloc >
- class std::ios_base
- class std::istreambuf_iterator< _CharT, _Traits >
- class std::ostreambuf_iterator< _CharT, _Traits >
- class __gnu_cxx::stdio_filebuf< _CharT, _Traits >
- class __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >

Typedefs

- typedef basic_filebuf< char > std::filebuf
- typedef basic_fstream< char > std::fstream
- typedef basic_ifstream< char > std::ifstream
- typedef basic_ios< char > std::ios
- typedef basic_iostream< char > std::iostream
- typedef basic_istream< char > std::istream
- typedef basic_istringstream< char > std::istringstream
- typedef basic_ofstream< char > std::ofstream
- typedef basic_ostream< char > std::ostream
- typedef basic_ostringstream< char > std::ostringstream
- typedef basic_streambuf< char > std::streambuf
- typedef basic_stringbuf< char > std::stringbuf
- typedef basic_stringstream< char > std::stringstream

- typedef basic_filebuf< wchar_t > std::wfilebuf
- typedef basic_fstream< wchar_t > std::wfstream
- typedef basic_ifstream< wchar_t > std::wifstream
- typedef basic_ios< wchar_t > std::wios
- typedef basic_iostream< wchar_t > std::wiostream
- typedef basic_istream< wchar_t > std::wistream
- typedef basic_istringstream < wchar_t > std::wistringstream
- typedef basic_ofstream< wchar_t > std::wofstream
- typedef basic_ostream< wchar_t > std::wostream
- typedef basic_ostringstream < wchar_t > std::wostringstream
- typedef basic_streambuf< wchar_t > std::wstreambuf
- typedef basic_stringbuf< wchar_t > std::wstringbuf
- typedef basic_stringstream < wchar_t > std::wstringstream

2.41.1 Detailed Description

Nearly all of the I/O classes are parameterized on the type of characters they read and write. (The major exception is ios_base at the top of the hierarchy.) This is a change from pre-Standard streams, which were not templates.

For ease of use and compatibility, all of the basic_* I/O-related classes are given typedef names for both of the builtin character widths (wide and narrow). The typedefs are the same as the pre-Standard names, for example:

```
typedef basic_ifstream<char>  ifstream;
```

Because properly forward-declaring these classes can be difficult, you should not do it yourself. Instead, include the <iosfwd> header, which contains only declarations of all the I/O classes as well as the typedefs. Trying to forward-declare the typedefs themselves (e.g., `class ostream;`) is not valid ISO C++.

For more specific declarations, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/io.-html#std.io.objects

2.41.2 Typedef Documentation

2.41.2.1 typedef basic_filebuf<char> std::filebuf

Class for `char` file buffers.

Definition at line 159 of file iosfwd.

2.41.2.2 typedef basic_fstream<char> std::fstream

Class for `char` mixed input and output file streams.

Definition at line 168 of file iosfwd.

2.41.2.3 typedef basic_ifstream<char> std::ifstream

Class for `char` input file streams.

Definition at line 162 of file iosfwd.

2.41.2.4 typedef basic_ios<char> std::ios

Base class for `char` streams.

Definition at line 128 of file iosfwd.

2.41.2.5 typedef basic_iostream<char> std::iostream

Base class for `char` mixed input and output streams.

Definition at line 144 of file iosfwd.

2.41.2.6 typedef basic_istream<char> std::istream

Base class for `char` input streams.

Definition at line 138 of file iosfwd.

2.41.2.7 typedef basic_istringstream<char> std::istringstream

Class for `char` input memory streams.

Definition at line 150 of file iosfwd.

2.41.2.8 typedef basic_ofstream<char> std::ofstream

Class for `char` output file streams.

Definition at line 165 of file iosfwd.

2.41.2.9 typedef basic_ostream<char> std::ostream

Base class for `char` output streams.

Definition at line 141 of file iosfwd.

2.41.2.10 typedef basic_ostringstream<char> std::ostringstream

Class for `char` output memory streams.

Definition at line 153 of file iosfwd.

2.41.2.11 typedef basic_streambuf<char> std::streambuf

Base class for `char` buffers.

Definition at line 135 of file iosfwd.

2.41.2.12 typedef basic_stringbuf<char> std::stringbuf

Class for `char` memory buffers.

Definition at line 147 of file iosfwd.

2.41.2.13 typedef basic_stringstream<char> std::stringstream

Class for `char` mixed input and output memory streams.

Definition at line 156 of file iosfwd.

2.41.2.14 typedef basic_filebuf<wchar_t> std::wfilebuf

Class for wchar_t file buffers.

Definition at line 199 of file iosfwd.

2.41.2.15 typedef basic_fstream<wchar_t> std::wfstream

Class for wchar_t mixed input and output file streams.

Definition at line 208 of file iosfwd.

2.41.2.16 typedef basic_ifstream<wchar_t> std::wifstream

Class for wchar_t input file streams.

Definition at line 202 of file iosfwd.

2.41.2.17 typedef basic_ios<wchar_t> std::wios

Base class for wchar_t streams.

Definition at line 172 of file iosfwd.

2.41.2.18 typedef basic_iostream<wchar_t> std::wiostream

Base class for wchar_t mixed input and output streams.

Definition at line 184 of file iosfwd.

2.41.2.19 typedef basic_istream<wchar_t> std::wistream

Base class for wchar_t input streams.

Definition at line 178 of file iosfwd.

2.41.2.20 typedef basic_istringstream<wchar_t> std::wistringstream

Class for wchar_t input memory streams.

Definition at line 190 of file iosfwd.

2.41.2.21 typedef basic_ofstream<wchar_t> std::wofstream

Class for wchar_t output file streams.

Definition at line 205 of file iosfwd.

2.41.2.22 typedef basic_ostream<wchar_t> std::wostream

Base class for wchar_t output streams.

Definition at line 181 of file iosfwd.

2.41.2.23 typedef basic_ostringstream<wchar_t> std::wostringstream

Class for wchar_t output memory streams.

Definition at line 193 of file iosfwd.

2.41.2.24 typedef basic_streambuf<wchar_t> std::wstreambuf

Base class for `wchar_t` buffers.

Definition at line 175 of file iosfwd.

2.41.2.25 typedef basic_stringbuf<wchar_t> std::wstringbuf

Class for `wchar_t` memory buffers.

Definition at line 187 of file iosfwd.

2.41.2.26 typedef basic_stringstream<wchar_t> std::wstringstream

Class for `wchar_t` mixed input and output memory streams.

Definition at line 196 of file iosfwd.

2.42 Invalidation Guarantees

Collaboration diagram for Invalidation Guarantees:



Classes

- struct __gnu_pbds::basic_invalidation_guarantee
- struct __gnu_pbds::point_invalidation_guarantee
- struct __gnu_pbds::range_invalidation_guarantee

2.42.1 Detailed Description

2.43 Iterator Tags

Collaboration diagram for Iterator Tags:



Classes

- struct std::bidirectional_iterator_tag
- struct std::forward_iterator_tag
- struct std::input_iterator_tag
- struct std::output_iterator_tag
- struct std::random_access_iterator_tag

2.43.1 Detailed Description

These are empty types, used to distinguish different iterators. The distinction is not made by what they contain, but simply by what they are. Different underlying algorithms can then be used based on the different operations supported by different iterator types.

2.44 Iterators

Collaboration diagram for Iterators:

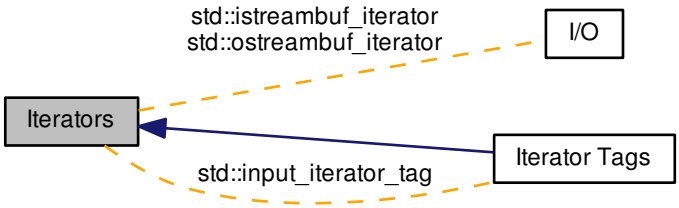

Modules

- Iterator Tags

Classes

- class std::back_insert_iterator< _Container >
- class std::front_insert_iterator< _Container >
- struct std::input_iterator_tag
- class std::insert_iterator< _Container >
- class std::istream_iterator< _Tp, _CharT, _Traits, _Dist >
- class std::istreambuf_iterator< _CharT, _Traits >
- struct std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >
- struct std::iterator_traits< typename >
- struct std::iterator_traits< _Tp * >
- struct std::iterator_traits< const _Tp * >
- class std::move_iterator< _Iterator >
- class std::ostream_iterator< _Tp, _CharT, _Traits >
- class std::ostreambuf_iterator< _CharT, _Traits >
- class std::reverse_iterator< _Iterator >

Macros

- #define **__cpp_lib_make_reverse_iterator**

Functions

- template<bool _IsMove, typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  ostreambuf_iterator< _CharT >
  >::__type **std::__copy_move_a2** (_CharT *__first, _CharT *__last, ostreambuf_iterator< _CharT > __result)

- template<bool _IsMove, typename _CharT >
__gnu_cxx::__enable_if
< __is_char< _CharT >::__value,
ostreambuf_iterator< _CharT >
>::__type **std::__copy_move_a2** (const _CharT *__first, const _CharT *__last, ostreambuf_iterator< _CharT > __result)
- template<bool _IsMove, typename _CharT >
__gnu_cxx::__enable_if
< __is_char< _CharT >::__value,
_CharT * >::__type **std::__copy_move_a2** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, _CharT *__result)
- template<typename _CharT , typename _Size >
__enable_if_t< __is_char
< _CharT >::__value, _CharT * > **std::__copy_n_a** (istreambuf_iterator< _CharT > __it, _Size __n, _CharT *__result)
- template<typename _Iter >
constexpr iterator_traits
< _Iter >::iterator_category std::__iterator_category (const _Iter &)
- template<typename _Iterator , typename _ReturnType = typename conditional<__move_if_noexcept_cond <typename iterator_traits<_Iterator>::value_type>::value, _Iterator, move_iterator<_Iterator>>::type>
constexpr _ReturnType **std::__make_move_if_noexcept_iterator** (_Iterator __i)
- template<typename _Tp , typename _ReturnType = typename conditional<__move_if_noexcept_cond<_Tp>::value, const _Tp*, move_iterator<_Tp*>>::type>
constexpr _ReturnType **std::__make_move_if_noexcept_iterator** (_Tp *__i)
- template<typename _Iterator >
constexpr reverse_iterator
< _Iterator > **std::__make_reverse_iterator** (_Iterator __i)
- template<typename _Iterator >
constexpr auto **std::__miter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__miter_base(__it.base())))
- template<typename _Iterator >
constexpr auto **std::__niter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__niter_base(__it.base())))
- template<typename _CharT , typename _Distance >
__gnu_cxx::__enable_if
< __is_char< _CharT >::__value,
void >::__type **std::advance** (istreambuf_iterator< _CharT > &__i, _Distance __n)
- template<typename _Container >
constexpr back_insert_iterator
< _Container > std::back_inserter (_Container &__x)
- template<typename _CharT >
__gnu_cxx::__enable_if
< __is_char< _CharT >::__value,
ostreambuf_iterator< _CharT >
>::__type **std::copy** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, ostreambuf_iterator< _CharT > __result)
- template<typename _CharT >
__gnu_cxx::__enable_if
< __is_char< _CharT >::__value,
istreambuf_iterator< _CharT >
>::__type **std::find** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, const _CharT &__val)

- template<typename _Container >
  constexpr
  front_insert_iterator
  < _Container > std::front_inserter (_Container &__x)
- template<typename _Container , typename _Iterator >
  insert_iterator< _Container > std::inserter (_Container &__x, _Iterator __i)
- template<typename _Iterator >
  constexpr move_iterator
  < _Iterator > **std::make_move_iterator** (_Iterator __i)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > std::make_reverse_iterator (_Iterator __i)
- template<typename _CharT , typename _Traits >
  bool **std::operator!=** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT, _Traits > &__b)
- template<typename _Iterator >
  constexpr bool **std::operator!=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator!=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator!=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator!=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > **std::operator+** (typename reverse_iterator< _Iterator >::difference_type __n, const reverse_iterator< _Iterator > &__x)
- template<typename _Iterator >
  constexpr move_iterator
  < _Iterator > **std::operator+** (typename move_iterator< _Iterator >::difference_type __n, const move_iterator< _Iterator > &__x)
- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **std::operator-** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y) -> decltype(__y.base()-__x.base())
- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **std::operator-** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y) -> decltype(__x.base()-__y.base())
- template<typename _Iterator >
  constexpr bool **std::operator**< (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator**< (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator**< (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator**< (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator**<= (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)

- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator<=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &_-_y)
- template<typename _CharT , typename _Traits >
  bool **std::operator==** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT, _Traits > &__b)
- template<typename _Iterator >
  constexpr bool std::operator== (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator==** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator==** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator==** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &_-_y)

2.44.1 Detailed Description

Abstractions for uniform iterating through various underlying types.

2.44.2 Function Documentation

2.44.2.1 template<typename _Iter > constexpr iterator_traits<_Iter>::iterator_category std::__iterator_category (const _Iter &) [inline]

This function is not a part of the C++ standard but is syntactic sugar for internal library use only.

Definition at line 238 of file stl_iterator_base_types.h.

Referenced by std::__find_if_not(), __gnu_debug::__valid_range_aux(), std::advance(), std::deque< _StateSeqT >::assign(), __gnu_cxx::copy_n(), std::copy_n(), std::deque< _StateSeqT >::deque(), __gnu_cxx::distance(), std::distance(), std::fill_n(), std::find_end(), std::deque< _StateSeqT >::insert(), std::partition(), std::reverse(), std::__V2::rotate(), __gnu_cxx::uninitialized_copy_n(), std::uninitialized_copy_n(), std::unique_copy(), and std::vector< block_type, allocator_type >::vector().

2.44.2.2 template<typename _Container > constexpr back_insert_iterator<_Container> std::back_inserter (_Container & __x) [inline]

Parameters

__x	A container of arbitrary type.

Returns

An instance of back_insert_iterator working on __x.

This wrapper function helps in creating back_insert_iterator instances. Typing the name of the iterator requires knowing the precise full type of the container, which can be tedious and impedes generic programming. Using this function lets you take advantage of automatic template parameter deduction, making the compiler match the correct types for you.

Definition at line 685 of file bits/stl_iterator.h.

Referenced by std::match_results< _Bi_iter >::format(), and std::regex_replace().

2.44.2.3 template<typename _Container > constexpr front_insert_iterator<_Container> std::front_inserter (_Container & __x) [inline]

Parameters

__x	A container of arbitrary type.

Returns

An instance of front_insert_iterator working on x.

This wrapper function helps in creating front_insert_iterator instances. Typing the name of the iterator requires knowing the precise full type of the container, which can be tedious and impedes generic programming. Using this function lets you take advantage of automatic template parameter deduction, making the compiler match the correct types for you.

Definition at line 788 of file bits/stl_iterator.h.

2.44.2.4 template<typename _Container , typename _Iterator > insert_iterator<_Container> std::inserter (_Container & __x, _Iterator __i) [inline]

Parameters

__x	A container of arbitrary type.
__i	An iterator into the container.

Returns

An instance of insert_iterator working on __x.

This wrapper function helps in creating insert_iterator instances. Typing the name of the iterator requires knowing the precise full type of the container, which can be tedious and impedes generic programming. Using this function lets you take advantage of automatic template parameter deduction, making the compiler match the correct types for you.

Definition at line 931 of file bits/stl_iterator.h.

2.44.2.5 template<typename _Iterator > constexpr reverse_iterator<_Iterator> std::make_reverse_iterator (_Iterator __i) [inline]

Generator function for reverse_iterator.

Definition at line 552 of file bits/stl_iterator.h.

2.44.2.6 template<typename _Iterator > constexpr bool std::operator== (const reverse_iterator< _Iterator > & __x, const reverse_iterator< _Iterator > & __y) [inline]

Parameters

__x	A reverse_iterator.
__y	A reverse_iterator.

Returns

A simple bool.

Reverse iterators forward comparisons to their underlying base() iterators.

Definition at line 385 of file bits/stl_iterator.h.

References std::reverse_iterator< _Iterator >::base().

2.45 Library Fundamentals TS

Collaboration diagram for Library Fundamentals TS:

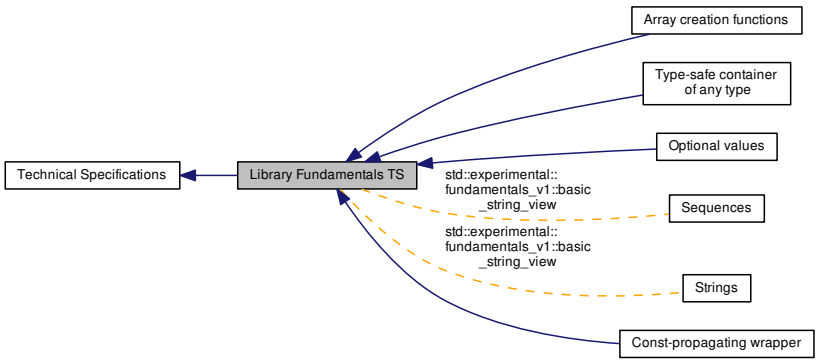

Modules

- Array creation functions
- Const-propagating wrapper
- Optional values
- Type-safe container of any type

Files

- file experimental/algorithm
- file experimental/any
- file experimental/array
- file experimental/chrono
- file experimental/deque
- file experimental/forward_list
- file experimental/functional
- file experimental/iterator
- file experimental/list
- file experimental/map
- file experimental/memory
- file experimental/memory_resource
- file experimental/numeric
- file experimental/optional
- file propagate_const
- file experimental/random
- file experimental/ratio
- file experimental/regex
- file experimental/set
- file experimental/string
- file experimental/string_view

- file experimental/system_error
- file experimental/tuple
- file experimental/type_traits
- file experimental/unordered_map
- file experimental/unordered_set
- file experimental/utility
- file experimental/vector

Classes

- class std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >

2.45.1 Detailed Description

Components defined by the *C++ Extensions for Library Fundamentals* Technical Specification, versions 1 and 2.

- ISO/IEC TS 19568:2015 C++ Extensions for Library Fundamentals
- ISO/IEC TS 19568:2017 C++ Extensions for Library Fundamentals, Version 2

2.46 List-Based

Collaboration diagram for List-Based:

Classes

- class __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc >

Macros

- #define **PB_DS_LU_BASE**

2.46.1 Detailed Description

2.47 Locales

Classes

- class std::codecvt< _InternT, _ExternT, _StateT >
- class std::ctype< _CharT >
- class std::ctype< char >
- class std::ctype< wchar_t >
- class std::locale::facet
- class std::locale::id
- class std::locale
- class std::messages< _CharT >
- struct std::messages_base
- class std::money_base
- class std::money_get< _CharT, _InIter >
- class std::money_put< _CharT, _OutIter >
- class std::moneypunct< _CharT, _Intl >
- class std::num_get< _CharT, _InIter >
- class std::num_put< _CharT, _OutIter >
- class std::numpunct< _CharT >
- class std::time_base
- class std::time_get< _CharT, _InIter >
- class std::time_put< _CharT, _OutIter >
- class std::wbuffer_convert< _Codecvt, _Elem, _Tr >
- class std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >

Functions

- template<typename _OutStr , typename _InChar , typename _Codecvt , typename _State , typename _Fn >
  bool **std::__do_str_codecvt** (const _InChar *__first, const _InChar *__last, _OutStr &__outstr, const _Codecvt &__cvt, _State &__state, size_t &__count, _Fn __fn)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in_all** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out_all** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _Facet >
  bool std::has_facet (const locale &__loc) throw ()
- template<typename _Facet >
  const _Facet & std::use_facet (const locale &__loc)

2.47.1 Detailed Description

Classes and functions for internationalization and localization.

2.47.2 Function Documentation

2.47.2.1 template<typename _Facet > bool std::has_facet (const locale & __loc) throw)

Test for the presence of a facet.

has_facet tests the locale argument for the presence of the facet type provided as the template parameter. Facets derived from the facet parameter will also return true.

Template Parameters

_Facet	The facet type to test the presence of.

Parameters

__loc	The locale to test.

Returns

true if `__loc` contains a facet of type _Facet, else false.

Definition at line 104 of file locale_classes.tcc.

2.47.2.2 template<typename _Facet > const _Facet & std::use_facet (const locale & __loc)

Return a facet.

use_facet looks for and returns a reference to a facet of type Facet where Facet is the template parameter. If has_facet(locale) is true, there is a suitable facet to return. It throws std::bad_cast if the locale doesn't contain a facet of type Facet.

Template Parameters

_Facet	The facet type to access.

Parameters

__loc	The locale to use.

Returns

Reference to facet of type Facet.

Exceptions

std::bad_cast	if `__loc` doesn't contain a facet of type _Facet.

Definition at line 132 of file locale_classes.tcc.

2.48 Mathematical Special Functions

Collaboration diagram for Mathematical Special Functions:



Functions

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type __gnu_cxx::airy_ai (_Tp __x)
- float __gnu_cxx::airy_aif (float __x)
- long double __gnu_cxx::airy_ail (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type __gnu_cxx::airy_bi (_Tp __x)
- float __gnu_cxx::airy_bif (float __x)
- long double __gnu_cxx::airy_bil (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float std::assoc_laguerref (unsigned int __n, unsigned int __m, float __x)
- long double std::assoc_laguerrel (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float std::assoc_legendref (unsigned int __l, unsigned int __m, float __x)
- long double std::assoc_legendrel (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Tpa , typename _Tpb >
  __gnu_cxx::__promote_2< _Tpa,
  _Tpb >::__type std::beta (_Tpa __a, _Tpb __b)
- float std::betaf (float __a, float __b)
- long double std::betal (long double __a, long double __b)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::comp_ellint_1 (_Tp __k)
- float std::comp_ellint_1f (float __k)
- long double std::comp_ellint_1l (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::comp_ellint_2 (_Tp __k)
- float std::comp_ellint_2f (float __k)
- long double std::comp_ellint_2l (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type std::comp_ellint_3 (_Tp __k, _Tpn __nu)
- float std::comp_ellint_3f (float __k, float __nu)
- long double std::comp_ellint_3l (long double __k, long double __nu)

- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type __gnu_cxx::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float __gnu_cxx::conf_hypergf (float __a, float __c, float __x)
- long double __gnu_cxx::conf_hypergl (long double __a, long double __c, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_if (float __nu, float __x)
- long double std::cyl_bessel_il (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_jf (float __nu, float __x)
- long double std::cyl_bessel_jl (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_kf (float __nu, float __x)
- long double std::cyl_bessel_kl (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_neumann (_Tpnu __nu, _Tp __x)
- float std::cyl_neumannf (float __nu, float __x)
- long double std::cyl_neumannl (long double __nu, long double __x)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::ellint_1 (_Tp __k, _Tpp __phi)
- float std::ellint_1f (float __k, float __phi)
- long double std::ellint_1l (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::ellint_2 (_Tp __k, _Tpp __phi)
- float std::ellint_2f (float __k, float __phi)
- long double std::ellint_2l (long double __k, long double __phi)
- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type std::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float std::ellint_3f (float __k, float __nu, float __phi)
- long double std::ellint_3l (long double __k, long double __nu, long double __phi)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::expint (_Tp __x)
- float std::expintf (float __x)
- long double std::expintl (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::hermite (unsigned int __n, _Tp __x)
- float std::hermitef (unsigned int __n, float __x)
- long double std::hermitel (unsigned int __n, long double __x)
- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type __gnu_cxx::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float __gnu_cxx::hypergf (float __a, float __b, float __c, float __x)

- long double __gnu_cxx::hypergl (long double __a, long double __b, long double __c, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::laguerre (unsigned int __n, _Tp __x)
- float std::laguerref (unsigned int __n, float __x)
- long double std::laguerrel (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::legendre (unsigned int __l, _Tp __x)
- float std::legendref (unsigned int __l, float __x)
- long double std::legendrel (unsigned int __l, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::riemann_zeta (_Tp __s)
- float std::riemann_zetaf (float __s)
- long double std::riemann_zetal (long double __s)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_bessel (unsigned int __n, _Tp __x)
- float std::sph_besself (unsigned int __n, float __x)
- long double std::sph_bessell (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float std::sph_legendref (unsigned int __l, unsigned int __m, float __theta)
- long double std::sph_legendrel (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_neumann (unsigned int __n, _Tp __x)
- float std::sph_neumannf (unsigned int __n, float __x)
- long double std::sph_neumannl (unsigned int __n, long double __x)

2.48.1 Detailed Description

2.48.2 Mathematical Special Functions

A collection of advanced mathematical special functions, defined by ISO/IEC IS 29124 and then added to ISO C++ 2017.

2.48.2.1 Introduction and History

The first significant library upgrade on the road to C++2011, TR1, included a set of 23 mathematical functions that significantly extended the standard transcendental functions inherited from C and declared in <cmath>.

Although most components from TR1 were eventually adopted for C++11 these math functions were left behind out of concern for implementability. The math functions were published as a separate international standard IS 29124 - Extensions to the C++ Library to Support Mathematical Special Functions.

For C++17 these functions were incorporated into the main standard.

2.48.2.2 Contents

The following functions are implemented in namespace `std`:

- assoc_laguerre - Associated Laguerre functions
- assoc_legendre - Associated Legendre functions
- beta - Beta functions
- comp_ellint_1 - Complete elliptic functions of the first kind

- comp_ellint_2 - Complete elliptic functions of the second kind
- comp_ellint_3 - Complete elliptic functions of the third kind
- cyl_bessel_i - Regular modified cylindrical Bessel functions
- cyl_bessel_j - Cylindrical Bessel functions of the first kind
- cyl_bessel_k - Irregular modified cylindrical Bessel functions
- cyl_neumann - Cylindrical Neumann functions or Cylindrical Bessel functions of the second kind
- ellint_1 - Incomplete elliptic functions of the first kind
- ellint_2 - Incomplete elliptic functions of the second kind
- ellint_3 - Incomplete elliptic functions of the third kind
- expint - The exponential integral
- hermite - Hermite polynomials
- laguerre - Laguerre functions
- legendre - Legendre polynomials
- riemann_zeta - The Riemann zeta function
- sph_bessel - Spherical Bessel functions
- sph_legendre - Spherical Legendre functions
- sph_neumann - Spherical Neumann functions

The hypergeometric functions were stricken from the TR29124 and C++17 versions of this math library because of implementation concerns. However, since they were in the TR1 version and since they are popular we kept them as an extension in namespace `__gnu_cxx`:

- conf_hyperg - Confluent hypergeometric functions
- hyperg - Hypergeometric functions

2.48.2.3 Argument Promotion

The arguments suppled to the non-suffixed functions will be promoted according to the following rules:

1. If any argument intended to be floating point is given an integral value That integral value is promoted to double.
2. All floating point arguments are promoted up to the largest floating point precision among them.

2.48.2.4 NaN Arguments

If any of the floating point arguments supplied to these functions is invalid or NaN (std::numeric_limits<Tp>::quiet_NaN), the value NaN is returned.

2.48.2.5 Implementation

We strive to implement the underlying math with type generic algorithms to the greatest extent possible. In practice, the functions are thin wrappers that dispatch to function templates. Type dependence is controlled with std::numeric_limits and functions thereof.

We don't promote `float` to `double` or `double` to `long double` reflexively. The goal is for `float` functions to operate more quickly, at the cost of `float` accuracy and possibly a smaller domain of validity. Similaryly, `long double` should give you more dynamic range and slightly more pecision than `double` on many systems.

2.48.2.6 Testing

These functions have been tested against equivalent implementations from the Gnu Scientific Library, GSL and Boost and the ratio

$$\frac{|f - f_{test}|}{|f_{test}|}$$

is generally found to be within 10^{-15} for 64-bit double on linux-x86_64 systems over most of the ranges of validity.

Todo Provide accuracy comparisons on a per-function basis for a small number of targets.

2.48.2.7 General Bibliography

See Also

Abramowitz and Stegun: Handbook of Mathematical Functions, with Formulas, Graphs, and Mathematical Tables Edited by Milton Abramowitz and Irene A. Stegun, National Bureau of Standards Applied Mathematics Series - 55 Issued June 1964, Tenth Printing, December 1972, with corrections Electronic versions of A&S abound including both pdf and navigable html.
for example http://people.math.sfu.ca/~cbm/aands/
The old A&S has been redone as the NIST Digital Library of Mathematical Functions: http://dlmf.nist.gov/ This version is far more navigable and includes more recent work.
An Atlas of Functions: with Equator, the Atlas Function Calculator 2nd Edition, by Oldham, Keith B., Myland, Jan, Spanier, Jerome
Asymptotics and Special Functions by Frank W. J. Olver, Academic Press, 1974
Numerical Recipes in C, The Art of Scientific Computing, by William H. Press, Second Ed., Saul A. Teukolsky, William T. Vetterling, and Brian P. Flannery, Cambridge University Press, 1992
The Special Functions and Their Approximations: Volumes 1 and 2, by Yudell L. Luke, Academic Press, 1969

2.48.3 Function Documentation

2.48.3.1 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type __gnu_cxx::airy_ai (_Tp __x) [inline]

Return the Airy function $Ai(x)$ of real argument x.

Definition at line 1242 of file specfun.h.

2.48.3.2 float __gnu_cxx::airy_aif (float __x) [inline]

Return the Airy function $Ai(x)$ of `float` argument x.

Definition at line 1219 of file specfun.h.

2.48.3.3 long double __gnu_cxx::airy_ail (long double __x) [inline]

Return the Airy function $Ai(x)$ of `long double` argument x.

Definition at line 1230 of file specfun.h.

2.48.3.4 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type __gnu_cxx::airy_bi (_Tp __x) [inline]

Return the Airy function $Bi(x)$ of real argument x.

Definition at line 1277 of file specfun.h.

2.48.3.5 float __gnu_cxx::airy_bif (float __x) [inline]

Return the Airy function $Bi(x)$ of `float` argument x.

Definition at line 1254 of file specfun.h.

2.48.3.6 long double __gnu_cxx::airy_bil (long double __x) [inline]

Return the Airy function $Bi(x)$ of `long double` argument x.

Definition at line 1265 of file specfun.h.

2.48.3.7 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x) [inline]

Return the associated Laguerre polynomial of nonnegative order `n`, nonnegative degree `m` and real argument `x`: $L_n^m(x)$.

The associated Laguerre function of real degree α, $L_n^\alpha(x)$, is defined by

$$L_n^\alpha(x) = \frac{(\alpha+1)_n}{n!}\,{}_1F_1(-n;\alpha+1;x)$$

where $(\alpha)_n$ is the Pochhammer symbol and ${}_1F_1(a;c;x)$ is the confluent hypergeometric function.

The associated Laguerre polynomial is defined for integral degree $\alpha = m$ by:

$$L_n^m(x) = (-1)^m \frac{d^m}{dx^m} L_{n+m}(x)$$

where the Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!}\frac{d^n}{dx^n}(x^n e^{-x})$$

and $x >= 0$.

See Also

laguerre for details of the Laguerre function of degree `n`

Template Parameters

_Tp	The floating-point type of the argument `__x`.

Parameters

__n	The order of the Laguerre function, `__n >= 0`.
__m	The degree of the Laguerre function, `__m >= 0`.
__x	The argument of the Laguerre function, `__x >= 0`.

Exceptions

std::domain_error	if `__x < 0`.

Definition at line 252 of file specfun.h.

2.48.3.8 float std::assoc_laguerref (unsigned int __n, unsigned int __m, float __x) [inline]

Return the associated Laguerre polynomial of order `n`, degree `m`: $L_n^m(x)$ for `float` argument.

See Also

assoc_laguerre for more details.

Definition at line 206 of file specfun.h.

2.48.3.9 long double std::assoc_laguerrel (unsigned int __n, unsigned int __m, long double __x) [inline]

Return the associated Laguerre polynomial of order n, degree m: $L_n^m(x)$.

See Also

assoc_laguerre for more details.

Definition at line 216 of file specfun.h.

2.48.3.10 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x) [inline]

Return the associated Legendre function of degree l and order m.

The associated Legendre function is derived from the Legendre function $P_l(x)$ by the Rodrigues formula:

$$P_l^m(x) = (1-x^2)^{m/2}\frac{d^m}{dx^m}P_l(x)$$

See Also

legendre for details of the Legendre function of degree l

Template Parameters

_Tp	The floating-point type of the argument __x.

Parameters

__l	The degree __l >= 0.
__m	The order __m <= l.
__x	The argument, abs(__x) <= 1.

Exceptions

std::domain_error	if abs(__x) > 1.

Definition at line 298 of file specfun.h.

2.48.3.11 float std::assoc_legendref (unsigned int __l, unsigned int __m, float __x) [inline]

Return the associated Legendre function of degree l and order m for float argument.

See Also

assoc_legendre for more details.

Definition at line 267 of file specfun.h.

2.48.3.12 long double std::assoc_legendrel (unsigned int __l, unsigned int __m, long double __x) [inline]

Return the associated Legendre function of degree l and order m.

See Also

assoc_legendre for more details.

Definition at line 276 of file specfun.h.

2.48.3.13 template<typename _Tpa , typename _Tpb > __gnu_cxx::__promote_2<_Tpa, _Tpb>::__type std::beta (_Tpa __a, _Tpb __b) [inline]

Return the beta function, $B(a,b)$, for real parameters a, b.

The beta function is defined by

$$B(a,b) = \int_0^1 t^{a-1}(1-t)^{b-1}dt = \frac{\Gamma(a)\Gamma(b)}{\Gamma(a+b)}$$

where $a > 0$ and $b > 0$

Template Parameters

_Tpa	The floating-point type of the parameter __a.
_Tpb	The floating-point type of the parameter __b.

Parameters

__a	The first argument of the beta function, __a > 0 .
__b	The second argument of the beta function, __b > 0 .

Exceptions

std::domain_error	if __a < 0 or __b < 0 .

Definition at line 343 of file specfun.h.

2.48.3.14 float std::betaf (float __a, float __b) [inline]

Return the beta function, $B(a,b)$, for float parameters a, b.

See Also

beta for more details.

Definition at line 312 of file specfun.h.

2.48.3.15 long double std::betal (long double __a, long double __b) [inline]

Return the beta function, $B(a,b)$, for long double parameters a, b.

See Also

beta for more details.

Definition at line 322 of file specfun.h.

2.48.3.16 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::comp_ellint_1 (_Tp __k) [inline]

Return the complete elliptic integral of the first kind $K(k)$ for real modulus k.

The complete elliptic integral of the first kind is defined as

$$K(k) = F(k,\pi/2) = \int_0^{\pi/2} \frac{d\theta}{\sqrt{1-k^2 sin^2\theta}}$$

where $F(k,\phi)$ is the incomplete elliptic integral of the first kind and the modulus $|k| <= 1$.

See Also

ellint_1 for details of the incomplete elliptic function of the first kind.

Template Parameters

_Tp	The floating-point type of the modulus __k.

Parameters

__k	The modulus, abs(__k) <= 1

Exceptions

std::domain_error	if abs(__k) > 1 .

Definition at line 391 of file specfun.h.

2.48.3.17 float std::comp_ellint_1f (float __k) [inline]

Return the complete elliptic integral of the first kind $E(k)$ for float modulus k.

See Also

comp_ellint_1 for details.

Definition at line 358 of file specfun.h.

2.48.3.18 long double std::comp_ellint_1l (long double __k) [inline]

Return the complete elliptic integral of the first kind $E(k)$ for long double modulus k.

See Also

comp_ellint_1 for details.

Definition at line 368 of file specfun.h.

2.48.3.19 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::comp_ellint_2 (_Tp __k) [inline]

Return the complete elliptic integral of the second kind $E(k)$ for real modulus k.

The complete elliptic integral of the second kind is defined as

$$E(k) = E(k, \pi/2) = \int_0^{\pi/2} \sqrt{1 - k^2 sin^2\theta}$$

where $E(k, \phi)$ is the incomplete elliptic integral of the second kind and the modulus $|k| <= 1$.

See Also

ellint_2 for details of the incomplete elliptic function of the second kind.

Template Parameters

_Tp	The floating-point type of the modulus __k.

Parameters

__k	The modulus, `abs(__k) <= 1`

Exceptions

std::domain_error	if `abs(__k) > 1`.

Definition at line 438 of file specfun.h.

2.48.3.20 float std::comp_ellint_2f (float __k) [inline]

Return the complete elliptic integral of the second kind $E(k)$ for `float` modulus `k`.

See Also

comp_ellint_2 for details.

Definition at line 406 of file specfun.h.

2.48.3.21 long double std::comp_ellint_2l (long double __k) [inline]

Return the complete elliptic integral of the second kind $E(k)$ for long double modulus `k`.

See Also

comp_ellint_2 for details.

Definition at line 416 of file specfun.h.

2.48.3.22 template<typename _Tp , typename _Tpn > __gnu_cxx::__promote_2<_Tp, _Tpn>::__type std::comp_ellint_3 (_Tp __k, _Tpn __nu) [inline]

Return the complete elliptic integral of the third kind $\Pi(k,\nu) = \Pi(k,\nu,\pi/2)$ for real modulus `k`.

The complete elliptic integral of the third kind is defined as

$$\Pi(k,\nu) = \Pi(k,\nu,\pi/2) = \int_0^{\pi/2} \frac{d\theta}{(1-\nu\sin^2\theta)\sqrt{1-k^2\sin^2\theta}}$$

where $\Pi(k,\nu,\phi)$ is the incomplete elliptic integral of the second kind and the modulus $|k| <= 1$.

See Also

ellint_3 for details of the incomplete elliptic function of the third kind.

Template Parameters

_Tp	The floating-point type of the modulus `__k`.
_Tpn	The floating-point type of the argument `__nu`.

Parameters

__k	The modulus, `abs(__k) <= 1`
__nu	The argument

Exceptions

std::domain_error	if `abs(__k)` > 1.

Definition at line 489 of file specfun.h.

2.48.3.23 float std::comp_ellint_3f (float __k, float __nu) [inline]

Return the complete elliptic integral of the third kind $\Pi(k,\nu)$ for `float` modulus `k`.

See Also

comp_ellint_3 for details.

Definition at line 453 of file specfun.h.

2.48.3.24 long double std::comp_ellint_3l (long double __k, long double __nu) [inline]

Return the complete elliptic integral of the third kind $\Pi(k,\nu)$ for `long double` modulus `k`.

See Also

comp_ellint_3 for details.

Definition at line 463 of file specfun.h.

2.48.3.25 template<typename _Tpa , typename _Tpc , typename _Tp > __gnu_cxx::__promote_3<_Tpa, _Tpc, _Tp>::__type __gnu_cxx::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x) [inline]

Return the confluent hypergeometric function ${}_1F_1(a;c;x)$ of real numeratorial parameter `a`, denominatorial parameter `c`, and argument `x`.

The confluent hypergeometric function is defined by

$$ {}_1F_1(a;c;x) = \sum_{n=0}^{\infty} \frac{(a)_n x^n}{(c)_n n!} $$

where the Pochhammer symbol is $(x)_k = (x)(x+1)...(x+k-1)$, $(x)_0 = 1$

Parameters

__a	The numeratorial parameter
__c	The denominatorial parameter
__x	The argument

Definition at line 1327 of file specfun.h.

2.48.3.26 float __gnu_cxx::conf_hypergf (float __a, float __c, float __x) [inline]

Return the confluent hypergeometric function ${}_1F_1(a;c;x)$ of `float` numeratorial parameter `a`, denominatorial parameter `c`, and argument `x`.

See Also

conf_hyperg for details.

Definition at line 1295 of file specfun.h.

2.48.3.27 long double __gnu_cxx::conf_hypergl (long double __a, long double __c, long double __x) [inline]

Return the confluent hypergeometric function ${}_1F_1(a;c;x)$ of `long double` numeratorial parameter `a`, denominatorial parameter `c`, and argument `x`.

See Also

conf_hyperg for details.

Definition at line 1306 of file specfun.h.

2.48.3.28 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_i (_Tpnu __nu, _Tp __x) [inline]

Return the regular modified Bessel function $I_\nu(x)$ for real order ν and argument $x >= 0$.

The regular modified cylindrical Bessel function is:

$$I_\nu(x) = i^{-\nu} J_\nu(ix) = \sum_{k=0}^{\infty} \frac{(x/2)^{\nu+2k}}{k!\Gamma(\nu+k+1)}$$

Template Parameters

_Tpnu	The floating-point type of the order `__nu`.
_Tp	The floating-point type of the argument `__x`.

Parameters

__nu	The order
__x	The argument, `__x >= 0`

Exceptions

std::domain_error	if `__x < 0` .

Definition at line 535 of file specfun.h.

2.48.3.29 float std::cyl_bessel_if (float __nu, float __x) [inline]

Return the regular modified Bessel function $I_\nu(x)$ for `float` order ν and argument $x >= 0$.

See Also

cyl_bessel_i for setails.

Definition at line 504 of file specfun.h.

2.48.3.30 long double std::cyl_bessel_il (long double __nu, long double __x) [inline]

Return the regular modified Bessel function $I_\nu(x)$ for `long double` order ν and argument $x >= 0$.

See Also

cyl_bessel_i for setails.

Definition at line 514 of file specfun.h.

2.48.3.31 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_j (_Tpnu __nu, _Tp __x) [inline]

Return the Bessel function $J_\nu(x)$ of real order ν and argument $x >= 0$.

The cylindrical Bessel function is:

$$J_\nu(x) = \sum_{k=0}^{\infty} \frac{(-1)^k (x/2)^{\nu+2k}}{k!\Gamma(\nu+k+1)}$$

Template Parameters

_Tpnu	The floating-point type of the order __nu.
_Tp	The floating-point type of the argument __x.

Parameters

__nu	The order
__x	The argument, __x >= 0

Exceptions

std::domain_error	if __x < 0 .

Definition at line 581 of file specfun.h.

2.48.3.32 float std::cyl_bessel_jf (float __nu, float __x) [inline]

Return the Bessel function of the first kind $J_\nu(x)$ for float order ν and argument $x >= 0$.

See Also

cyl_bessel_j for setails.

Definition at line 550 of file specfun.h.

2.48.3.33 long double std::cyl_bessel_jl (long double __nu, long double __x) [inline]

Return the Bessel function of the first kind $J_\nu(x)$ for long double order ν and argument $x >= 0$.

See Also

cyl_bessel_j for setails.

Definition at line 560 of file specfun.h.

2.48.3.34 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_bessel_k (_Tpnu __nu, _Tp __x) [inline]

Return the irregular modified Bessel function $K_\nu(x)$ of real order ν and argument x.

The irregular modified Bessel function is defined by:

$$K_\nu(x) = \frac{\pi}{2} \frac{I_{-\nu}(x) - I_\nu(x)}{\sin \nu\pi}$$

where for integral $\nu = n$ a limit is taken: $lim_{\nu \to n}$. For negative argument we have simply:

$$K_{-\nu}(x) = K_\nu(x)$$

Template Parameters

_Tpnu	The floating-point type of the order __nu.
_Tp	The floating-point type of the argument __x.

Parameters

__nu	The order
__x	The argument, __x >= 0

Exceptions

std::domain_error	if __x < 0 .

Definition at line 633 of file specfun.h.

2.48.3.35 float std::cyl_bessel_kf (float __nu, float __x) [inline]

Return the irregular modified Bessel function $K_\nu(x)$ for `float` order ν and argument $x >= 0$.

See Also

cyl_bessel_k for setails.

Definition at line 596 of file specfun.h.

2.48.3.36 long double std::cyl_bessel_kl (long double __nu, long double __x) [inline]

Return the irregular modified Bessel function $K_\nu(x)$ for `long double` order ν and argument $x >= 0$.

See Also

cyl_bessel_k for setails.

Definition at line 606 of file specfun.h.

2.48.3.37 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::cyl_neumann (_Tpnu __nu, _Tp __x) [inline]

Return the Neumann function $N_\nu(x)$ of real order ν and argument $x >= 0$.

The Neumann function is defined by:

$$N_\nu(x) = \frac{J_\nu(x)\cos\nu\pi - J_{-\nu}(x)}{\sin\nu\pi}$$

where $x >= 0$ and for integral order $\nu = n$ a limit is taken: $lim_{\nu\to n}$.

Template Parameters

_Tpnu	The floating-point type of the order __nu.
_Tp	The floating-point type of the argument __x.

Parameters

__nu	The order

__x	The argument, `__x >= 0`

Exceptions

std::domain_error	if `__x < 0` .

Definition at line 681 of file specfun.h.

2.48.3.38 float std::cyl_neumannf (float *__nu,* float *__x*) [inline]

Return the Neumann function $N_\nu(x)$ of `float` order ν and argument x.

See Also

cyl_neumann for setails.

Definition at line 648 of file specfun.h.

2.48.3.39 long double std::cyl_neumannl (long double *__nu,* long double *__x*) [inline]

Return the Neumann function $N_\nu(x)$ of `long double` order ν and argument x.

See Also

cyl_neumann for setails.

Definition at line 658 of file specfun.h.

2.48.3.40 template<typename _Tp , typename _Tpp > __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_1 (_Tp *__k,* _Tpp *__phi*) [inline]

Return the incomplete elliptic integral of the first kind $F(k,\phi)$ for `real` modulus k and angle ϕ.

The incomplete elliptic integral of the first kind is defined as

$$F(k,\phi) = \int_0^\phi \frac{d\theta}{\sqrt{1 - k^2 sin^2\theta}}$$

For $\phi = \pi/2$ this becomes the complete elliptic integral of the first kind, $K(k)$.

See Also

comp_ellint_1.

Template Parameters

_Tp	The floating-point type of the modulus `__k`.
_Tpp	The floating-point type of the angle `__phi`.

Parameters

__k	The modulus, `abs(__k) <= 1`
__phi	The integral limit argument in radians

Exceptions

std::domain_error	if `abs(__k) > 1` .

Definition at line 729 of file specfun.h.

2.48.3.41 float std::ellint_1f (float __k, float __phi) [inline]

Return the incomplete elliptic integral of the first kind $E(k,\phi)$ for `float` modulus k and angle ϕ.

See Also

ellint_1 for details.

Definition at line 696 of file specfun.h.

2.48.3.42 long double std::ellint_1l (long double __k, long double __phi) [inline]

Return the incomplete elliptic integral of the first kind $E(k,\phi)$ for `long double` modulus k and angle ϕ.

See Also

ellint_1 for details.

Definition at line 706 of file specfun.h.

2.48.3.43 template<typename _Tp , typename _Tpp > __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::ellint_2 (_Tp __k, _Tpp __phi) [inline]

Return the incomplete elliptic integral of the second kind $E(k,\phi)$.

The incomplete elliptic integral of the second kind is defined as

$$E(k,\phi) = \int_0^\phi \sqrt{1 - k^2 sin^2\theta}$$

For $\phi = \pi/2$ this becomes the complete elliptic integral of the second kind, $E(k)$.

See Also

comp_ellint_2.

Template Parameters

_Tp	The floating-point type of the modulus `__k`.
_Tpp	The floating-point type of the angle `__phi`.

Parameters

__k	The modulus, `abs(__k) <= 1`
__phi	The integral limit argument in radians

Returns

The elliptic function of the second kind.

Exceptions

std::domain_error	if `abs(__k) > 1` .

Definition at line 777 of file specfun.h.

2.48.3.44 float std::ellint_2f (float __k, float __phi) [inline]

Return the incomplete elliptic integral of the second kind $E(k,\phi)$ for `float` argument.

See Also

ellint_2 for details.

Definition at line 744 of file specfun.h.

2.48.3.45 long double std::ellint_2l (long double __k, long double __phi) [inline]

Return the incomplete elliptic integral of the second kind $E(k,\phi)$.

See Also

ellint_2 for details.

Definition at line 754 of file specfun.h.

2.48.3.46 template<typename _Tp , typename _Tpn , typename _Tpp > __gnu_cxx::__promote_3<_Tp, _Tpn, _Tpp>::__type std::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi) [inline]

Return the incomplete elliptic integral of the third kind $\Pi(k,\nu,\phi)$.

The incomplete elliptic integral of the third kind is defined by:

$$\Pi(k,\nu,\phi) = \int_0^\phi \frac{d\theta}{(1-\nu\sin^2\theta)\sqrt{1-k^2\sin^2\theta}}$$

For $\phi = \pi/2$ this becomes the complete elliptic integral of the third kind, $\Pi(k,\nu)$.

See Also

comp_ellint_3.

Template Parameters

_Tp	The floating-point type of the modulus `__k`.
_Tpn	The floating-point type of the argument `__nu`.
_Tpp	The floating-point type of the angle `__phi`.

Parameters

__k	The modulus, `abs(__k) <= 1`
__nu	The second argument
__phi	The integral limit argument in radians

Returns

The elliptic function of the third kind.

Exceptions

std::domain_error	if `abs(__k) > 1` .

Definition at line 830 of file specfun.h.

2.48.3.47 float std::ellint_3f (float __k, float __nu, float __phi) [inline]

Return the incomplete elliptic integral of the third kind $\Pi(k,\nu,\phi)$ for `float` argument.

See Also

ellint_3 for details.

Definition at line 792 of file specfun.h.

2.48.3.48 long double std::ellint_3l (long double __k, long double __nu, long double __phi) [inline]

Return the incomplete elliptic integral of the third kind $\Pi(k,\nu,\phi)$.

See Also

ellint_3 for details.

Definition at line 802 of file specfun.h.

2.48.3.49 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::expint (_Tp __x) [inline]

Return the exponential integral $Ei(x)$ for `real` argument `x`.

The exponential integral is given by

$$Ei(x) = -\int_{-x}^{\infty} \frac{e^t}{t} dt$$

Template Parameters

_Tp	The floating-point type of the argument `__x`.

Parameters

__x	The argument of the exponential integral function.

Definition at line 870 of file specfun.h.

2.48.3.50 float std::expintf (float __x) [inline]

Return the exponential integral $Ei(x)$ for `float` argument `x`.

See Also

expint for details.

Definition at line 844 of file specfun.h.

2.48.3.51 long double std::expintl (long double __x) [inline]

Return the exponential integral $Ei(x)$ for `long double` argument `x`.

See Also

expint for details.

Definition at line 854 of file specfun.h.

2.48.3.52 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::hermite (unsigned int __n, _Tp __x) [inline]

Return the Hermite polynomial $H_n(x)$ of order n and `real` argument `x`.

The Hermite polynomial is defined by:

$$H_n(x) = (-1)^n e^{x^2} \frac{d^n}{dx^n} e^{-x^2}$$

The Hermite polynomial obeys a reflection formula:

$$H_n(-x) = (-1)^n H_n(x)$$

Template Parameters

_Tp	The floating-point type of the argument __x.

Parameters

__n	The order
__x	The argument

Definition at line 918 of file specfun.h.

2.48.3.53 float std::hermitef (unsigned int __n, float __x) [inline]

Return the Hermite polynomial $H_n(x)$ of nonnegative order n and float argument `x`.

See Also

hermite for details.

Definition at line 885 of file specfun.h.

2.48.3.54 long double std::hermitel (unsigned int __n, long double __x) [inline]

Return the Hermite polynomial $H_n(x)$ of nonnegative order n and `long double` argument `x`.

See Also

hermite for details.

Definition at line 895 of file specfun.h.

2.48.3.55 template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp > __gnu_cxx::__promote_4<_Tpa, _Tpb, _Tpc, _Tp>::__type __gnu_cxx::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x) [inline]

Return the hypergeometric function ${}_2F_1(a,b;c;x)$ of real numeratorial parameters `a` and `b`, denominatorial parameter `c`, and argument `x`.

The hypergeometric function is defined by

$${}_2F_1(a;c;x) = \sum_{n=0}^{\infty} \frac{(a)_n (b)_n x^n}{(c)_n n!}$$

where the Pochhammer symbol is $(x)_k = (x)(x+1)...(x+k-1)$, $(x)_0 = 1$

Parameters

__a	The first numeratorial parameter
__b	The second numeratorial parameter
__c	The denominatorial parameter
__x	The argument

Definition at line 1376 of file specfun.h.

2.48.3.56 float __gnu_cxx::hypergf (float __a, float __b, float __c, float __x) [inline]

Return the hypergeometric function ${}_2F_1(a,b;c;x)$ of @ float numeratorial parameters `a` and `b`, denominatorial parameter `c`, and argument `x`.

See Also

hyperg for details.

Definition at line 1343 of file specfun.h.

2.48.3.57 long double __gnu_cxx::hypergl (long double __a, long double __b, long double __c, long double __x) [inline]

Return the hypergeometric function ${}_2F_1(a,b;c;x)$ of `long double` numeratorial parameters `a` and `b`, denominatorial parameter `c`, and argument `x`.

See Also

hyperg for details.

Definition at line 1354 of file specfun.h.

2.48.3.58 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::laguerre (unsigned int __n, _Tp __x) [inline]

Returns the Laguerre polynomial $L_n(x)$ of nonnegative degree `n` and real argument $x >= 0$.

The Laguerre polynomial is defined by:

$$L_n(x) = \frac{e^x}{n!}\frac{d^n}{dx^n}(x^n e^{-x})$$

Template Parameters

_Tp	The floating-point type of the argument `__x`.

Parameters

__n	The nonnegative order
__x	The argument `__x >= 0`

Exceptions

std::domain_error	if `__x < 0` .

Definition at line 962 of file specfun.h.

2.48.3.59 float std::laguerref (unsigned int __n, float __x) [inline]

Returns the Laguerre polynomial $L_n(x)$ of nonnegative degree `n` and `float` argument $x >= 0$.

See Also

laguerre for more details.

Definition at line 933 of file specfun.h.

2.48.3.60 long double std::laguerrel (unsigned int __n, long double __x) [inline]

Returns the Laguerre polynomial $L_n(x)$ of nonnegative degree `n` and `long double` argument $x >= 0$.

See Also

laguerre for more details.

Definition at line 943 of file specfun.h.

2.48.3.61 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::legendre (unsigned int __l, _Tp __x) [inline]

Return the Legendre polynomial $P_l(x)$ of nonnegative degree l and real argument $|x| <= 0$.

The Legendre function of order l and argument x, $P_l(x)$, is defined by:

$$P_l(x) = \frac{1}{2^l l!}\frac{d^l}{dx^l}(x^2 - 1)^l$$

Template Parameters

_Tp	The floating-point type of the argument `__x`.

Parameters

__l	The degree $l >= 0$
__x	The argument `abs(__x)` <= 1

Exceptions

std::domain_error	if `abs(__x)` > 1

Definition at line 1007 of file specfun.h.

2.48.3.62 float std::legendref (unsigned int __l, float __x) [inline]

Return the Legendre polynomial $P_l(x)$ of nonnegative degree l and `float` argument $|x| <= 0$.

See Also

legendre for more details.

Definition at line 977 of file specfun.h.

2.48.3.63 long double std::legendrel (unsigned int __l, long double __x) [inline]

Return the Legendre polynomial $P_l(x)$ of nonnegative degree l and `long double` argument $|x| <= 0$.

See Also

legendre for more details.

Definition at line 987 of file specfun.h.

2.48.3.64 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::riemann_zeta (_Tp __s) [inline]

Return the Riemann zeta function $\zeta(s)$ for real argument s.

The Riemann zeta function is defined by:

$$\zeta(s) = \sum_{k=1}^{\infty} k^{-s} \text{ for } s > 1$$

and

$$\zeta(s) = \frac{1}{1-2^{1-s}} \sum_{k=1}^{\infty} (-1)^{k-1} k^{-s} \text{ for } 0 <= s <= 1$$

For s < 1 use the reflection formula:

$$\zeta(s) = 2^s \pi^{s-1} \sin(\frac{\pi s}{2}) \Gamma(1-s) \zeta(1-s)$$

Template Parameters

_Tp	The floating-point type of the argument __s.

Parameters

__s	The argument s != 1

Definition at line 1058 of file specfun.h.

2.48.3.65 float std::riemann_zetaf (float __s) [inline]

Return the Riemann zeta function $\zeta(s)$ for float argument s.

See Also

riemann_zeta for more details.

Definition at line 1022 of file specfun.h.

2.48.3.66 long double std::riemann_zetal (long double __s) [inline]

Return the Riemann zeta function $\zeta(s)$ for long double argument s.

See Also

riemann_zeta for more details.

Definition at line 1032 of file specfun.h.

2.48.3.67 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::sph_bessel (unsigned int __n, _Tp __x) [inline]

Return the spherical Bessel function $j_n(x)$ of nonnegative order n and real argument $x >= 0$.

The spherical Bessel function is defined by:

$$j_n(x) = \left(\frac{\pi}{2x}\right)^{1/2} J_{n+1/2}(x)$$

Template Parameters

_Tp	The floating-point type of the argument __x.

Parameters

__n	The integral order n >= 0
__x	The real argument x >= 0

Exceptions

std::domain_error	if __x < 0 .

Definition at line 1102 of file specfun.h.

2.48.3.68 float std::sph_besself (unsigned int __n, float __x) [inline]

Return the spherical Bessel function $j_n(x)$ of nonnegative order n and float argument $x >= 0$.

See Also

sph_bessel for more details.

Definition at line 1073 of file specfun.h.

2.48.3.69 long double std::sph_bessell (unsigned int __n, long double __x) [inline]

Return the spherical Bessel function $j_n(x)$ of nonnegative order n and long double argument $x >= 0$.

See Also

sph_bessel for more details.

Definition at line 1083 of file specfun.h.

2.48.3.70 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta) [inline]

Return the spherical Legendre function of nonnegative integral degree l and order m and real angle θ in radians.

The spherical Legendre function is defined by

$$Y_l^m(\theta,\phi) = (-1)^m[\frac{(2l+1)}{4\pi}\frac{(l-m)!}{(l+m)!}]P_l^m(\cos\theta)\exp^{im\phi}$$

Template Parameters

_Tp	The floating-point type of the angle __theta.

Parameters

__l	The order __l >= 0
__m	The degree __m >= 0 and __m <= __l

__theta	The radian polar angle argument

Definition at line 1149 of file specfun.h.

2.48.3.71 float std::sph_legendref (unsigned int __l, unsigned int __m, float __theta) [inline]

Return the spherical Legendre function of nonnegative integral degree `l` and order `m` and float angle θ in radians.

See Also

sph_legendre for details.

Definition at line 1117 of file specfun.h.

2.48.3.72 long double std::sph_legendrel (unsigned int __l, unsigned int __m, long double __theta) [inline]

Return the spherical Legendre function of nonnegative integral degree `l` and order `m` and `long double` angle θ in radians.

See Also

sph_legendre for details.

Definition at line 1128 of file specfun.h.

2.48.3.73 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::sph_neumann (unsigned int __n, _Tp __x) [inline]

Return the spherical Neumann function of integral order $n >= 0$ and real argument $x >= 0$.

The spherical Neumann function is defined by

$$n_n(x) = \left(\frac{\pi}{2x}\right)^{1/2} N_{n+1/2}(x)$$

Template Parameters

_Tp	The floating-point type of the argument `__x`.

Parameters

__n	The integral order `n >= 0`
__x	The real argument `__x >= 0`

Exceptions

std::domain_error	if `__x < 0` .

Definition at line 1193 of file specfun.h.

2.48.3.74 float std::sph_neumannf (unsigned int __n, float __x) [inline]

Return the spherical Neumann function of integral order $n >= 0$ and `float` argument $x >= 0$.

See Also

sph_neumann for details.

Definition at line 1164 of file specfun.h.

2.48.3.75 long double std::sph_neumannl (unsigned int __n, long double __x) [inline]

Return the spherical Neumann function of integral order $n >= 0$ and `long double` $x >= 0$.

See Also

sph_neumann for details.

Definition at line 1174 of file specfun.h.

2.49 Memory

Collaboration diagram for Memory:

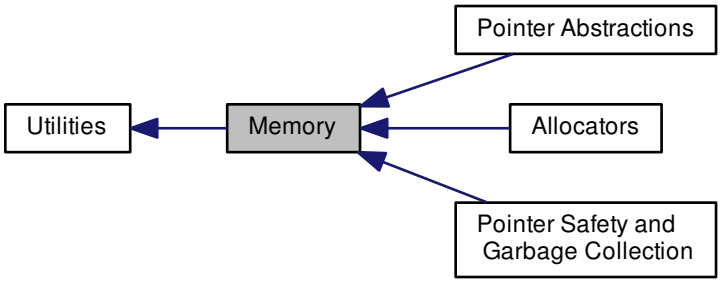

Modules

- Allocators
- Pointer Abstractions
- Pointer Safety and Garbage Collection

Files

- file memory

Functions

- void * std::align (size_t __align, size_t __size, void *&__ptr, size_t &__space) noexcept
- template<typename _InputIterator , typename _ForwardIterator >
  _ForwardIterator std::uninitialized_copy (_InputIterator __first, _InputIterator __last, _ForwardIterator __result)
- template<typename _InputIterator , typename _Size , typename _ForwardIterator >
  _ForwardIterator std::uninitialized_copy_n (_InputIterator __first, _Size __n, _ForwardIterator __result)
- template<typename _ForwardIterator , typename _Tp >
  void std::uninitialized_fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__x)
- template<typename _ForwardIterator , typename _Size , typename _Tp >
  _ForwardIterator std::uninitialized_fill_n (_ForwardIterator __first, _Size __n, const _Tp &__x)

2.49.1 Detailed Description

Components for memory allocation, deallocation, and management.

2.49.2 Function Documentation

2.49.2.1 void* std::align (size_t *__align*, size_t *__size*, void *&* *__ptr*, size_t & *__space*) [inline], [noexcept]

Fit aligned storage in buffer.

This function tries to fit *__size* bytes of storage with alignment *__align* into the buffer *__ptr* of size *__space* bytes. If such a buffer fits then *__ptr* is changed to point to the first byte of the aligned storage and *__space* is reduced by the bytes used for alignment.

C++11 20.6.5 [ptr.align]

Parameters

__align	A fundamental or extended alignment value.
__size	Size of the aligned storage required.
__ptr	Pointer to a buffer of *__space* bytes.
__space	Size of the buffer pointed to by *__ptr*.

Returns

the updated pointer if the aligned storage fits, otherwise nullptr.

Definition at line 123 of file memory.

2.49.2.2 template<typename _InputIterator , typename _ForwardIterator > _ForwardIterator std::uninitialized_copy (_InputIterator *__first*, _InputIterator *__last*, _ForwardIterator *__result*) [inline]

Copies the range [first,last) into result.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.

Returns

__result + (__first - __last)

Like copy(), but does not require an initialized output range.

Definition at line 125 of file stl_uninitialized.h.

Referenced by __gnu_parallel::parallel_sort_mwms_pu().

2.49.2.3 template<typename _InputIterator , typename _Size , typename _ForwardIterator > _ForwardIterator std::uninitialized_copy_n (_InputIterator *__first*, _Size *__n*, _ForwardIterator *__result*) [inline]

Copies the range [first,first+n) into result.

Parameters

__first	An input iterator.

__n	The number of elements to copy.
__result	An output iterator.

Returns

__result + __n

Like copy_n(), but does not require an initialized output range.

Definition at line 854 of file stl_uninitialized.h.

References std::__iterator_category().

2.49.2.4 template<typename _ForwardIterator , typename _Tp > void std::uninitialized_fill (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__x*) [inline]

Copies the value x into the range [first,last).

Parameters

__first	An input iterator.
__last	An input iterator.
__x	The source value.

Returns

Nothing.

Like fill(), but does not require an initialized output range.

Definition at line 200 of file stl_uninitialized.h.

2.49.2.5 template<typename _ForwardIterator , typename _Size , typename _Tp > _ForwardIterator std::uninitialized_fill_n (_ForwardIterator *__first,* _Size *__n,* const _Tp & *__x*) [inline]

Copies the value x into the range [first,first+n).

Parameters

__first	An input iterator.
__n	The number of copies to make.
__x	The source value.

Returns

Nothing.

Like fill_n(), but does not require an initialized output range.

Definition at line 272 of file stl_uninitialized.h.

2.50 Metaprogramming

Collaboration diagram for Metaprogramming:

Classes

- struct std::__add_pointer_helper< _Tp, bool >
- struct std::__detector< _Default, _AlwaysVoid, _Op, _Args >
- struct std::__detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...>
- struct std::__is_nullptr_t< _Tp >
- struct std::tr2::__reflection_typelist< _Elements >
- struct std::tr2::__reflection_typelist< _First, _Rest...>
- struct std::tr2::__reflection_typelist<>
- struct std::add_const< _Tp >
- struct std::add_cv< _Tp >
- struct std::add_lvalue_reference< _Tp >
- struct std::add_rvalue_reference< _Tp >
- struct std::add_volatile< _Tp >
- struct std::aligned_storage< _Len, _Align >
- struct std::aligned_union< _Len, _Types >
- struct std::alignment_of< _Tp >
- struct std::tr2::bases< _Tp >
- struct std::common_type< _Tp >
- struct std::conditional< bool, typename, typename >
- class std::decay< _Tp >
- struct std::tr2::direct_bases< _Tp >
- struct std::enable_if< bool, _Tp >
- struct std::extent< _Tp >
- struct std::has_virtual_destructor< _Tp >
- struct std::integral_constant< _Tp, __v >
- struct std::is_abstract< _Tp >
- struct std::is_arithmetic< _Tp >
- struct std::is_array< typename >
- struct std::is_assignable< _Tp, _Up >
- struct std::is_base_of< _Base, _Derived >
- struct std::is_class< _Tp >
- struct std::is_compound< _Tp >
- struct std::is_const< typename >
- struct std::is_constructible< _Tp, _Args >
- struct std::is_convertible< _From, _To >
- struct std::is_copy_assignable< _Tp >
- struct std::is_copy_constructible< _Tp >
- struct std::is_default_constructible< _Tp >

- struct std::is_destructible< _Tp >
- struct std::is_empty< _Tp >
- struct std::is_enum< _Tp >
- struct std::is_final< _Tp >
- struct std::is_floating_point< _Tp >
- struct std::is_function< typename >
- struct std::is_fundamental< _Tp >
- struct std::is_integral< _Tp >
- struct std::is_literal_type< _Tp >
- struct std::is_lvalue_reference< typename >
- struct std::is_member_function_pointer< _Tp >
- struct std::is_member_object_pointer< _Tp >
- struct std::is_member_pointer< typename >
- struct std::is_move_assignable< _Tp >
- struct std::is_move_constructible< _Tp >
- struct std::is_nothrow_assignable< _Tp, _Up >
- struct std::is_nothrow_constructible< _Tp, _Args >
- struct std::is_nothrow_copy_assignable< _Tp >
- struct std::is_nothrow_copy_constructible< _Tp >
- struct std::is_nothrow_default_constructible< _Tp >
- struct std::is_nothrow_destructible< _Tp >
- struct std::is_nothrow_move_assignable< _Tp >
- struct std::is_nothrow_move_constructible< _Tp >
- struct std::is_null_pointer< _Tp >
- struct std::is_object< _Tp >
- struct std::is_pod< _Tp >
- struct std::is_pointer< _Tp >
- struct std::is_polymorphic< _Tp >
- struct std::is_reference< typename >
- struct std::is_rvalue_reference< typename >
- struct std::is_same< typename, typename >
- struct std::is_scalar< _Tp >
- struct std::is_standard_layout< _Tp >
- struct std::is_trivial< _Tp >
- struct std::is_trivially_assignable< _Tp, _Up >
- struct std::is_trivially_constructible< _Tp, _Args >
- struct std::is_trivially_copy_assignable< _Tp >
- struct std::is_trivially_copy_constructible< _Tp >
- struct std::is_trivially_default_constructible< _Tp >
- struct std::is_trivially_destructible< _Tp >
- struct std::is_trivially_move_assignable< _Tp >
- struct std::is_trivially_move_constructible< _Tp >
- struct std::is_union< _Tp >
- struct std::is_void< typename >
- struct std::is_volatile< typename >
- struct std::make_signed< _Tp >
- struct std::make_unsigned< _Tp >
- struct std::rank< typename >
- class std::reference_wrapper< _Tp >
- struct std::remove_all_extents< typename >
- struct std::remove_const< _Tp >

- struct std::remove_cv< typename >
- struct std::remove_extent< _Tp >
- struct std::remove_pointer< _Tp >
- struct std::remove_reference< _Tp >
- struct std::remove_volatile< _Tp >
- class std::result_of< _Signature >
- struct std::underlying_type< _Tp >

Macros

- #define **__cpp_lib_is_final**
- #define **__cpp_lib_is_null_pointer**
- #define **__cpp_lib_result_of_sfinae**
- #define **__cpp_lib_transformation_trait_aliases**
- #define **__cpp_lib_void_t**

Typedefs

- template<bool __v>
  using **std::__bool_constant** = integral_constant< bool, __v >
- template<typename _Tp >
  using **std::__decay_and_strip** = __strip_reference_wrapper< __decay_t< _Tp >>
- template<typename _Tp >
  using **std::__decay_t** = typename decay< _Tp >::type
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::__detected_or** = __detector< _Default, void, _Op, _Args...>
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::__detected_or_t** = typename __detected_or< _Default, _Op, _Args...>::type
- template<bool _Cond, typename _Tp = void>
  using **std::__enable_if_t** = typename enable_if< _Cond, _Tp >::type
- template<typename _ToElementType , typename _FromElementType >
  using **std::__is_array_convertible** = is_convertible< _FromElementType(*)[], _ToElementType(*)[]>
- template<typename _Tp , typename... _Args>
  using **std::__is_nothrow_constructible_impl** = __is_nt_constructible_impl< __is_constructible(_Tp, _Args...), _Tp, _Args...>
- template<typename _Tp , typename... _Types>
  using **std::__is_one_of** = __or_< is_same< _Tp, _Types >...>
- template<typename _Tp >
  using **std::__is_signed_integer** = __is_one_of< __remove_cv_t< _Tp >, signed char, signed short, signed int, signed long, signed long long >
- template<typename _Tp >
  using **std::__is_standard_integer** = __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >>
- template<typename _Tp >
  using **std::__is_unsigned_integer** = __is_one_of< __remove_cv_t< _Tp >, unsigned char, unsigned short, unsigned int, unsigned long, unsigned long long >
- template<typename _Tp >
  using **std::__remove_cv_t** = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using **std::__remove_cvref_t** = typename remove_cv< typename remove_reference< _Tp >::type >::type
- template<typename _Tp >
  using **std::__type_identity_t** = typename __type_identity< _Tp >::type

- template<typename... >
  using **std::__void_t** = void
- template<typename... _Cond>
  using **std::_Require** = __enable_if_t< __and_< _Cond...>::value >
- template<typename _Tp >
  using std::add_const_t = typename add_const< _Tp >::type
- template<typename _Tp >
  using std::add_cv_t = typename add_cv< _Tp >::type
- template<typename _Tp >
  using std::add_lvalue_reference_t = typename add_lvalue_reference< _Tp >::type
- template<typename _Tp >
  using std::add_pointer_t = typename add_pointer< _Tp >::type
- template<typename _Tp >
  using std::add_rvalue_reference_t = typename add_rvalue_reference< _Tp >::type
- template<typename _Tp >
  using std::add_volatile_t = typename add_volatile< _Tp >::type
- template<size_t _Len, size_t _Align = __alignof__(typename __aligned_storage_msa<_Len>::__type)>
  using std::aligned_storage_t = typename aligned_storage< _Len, _Align >::type
- template<size_t _Len, typename... _Types>
  using **std::aligned_union_t** = typename aligned_union< _Len, _Types...>::type
- template<typename... _Tp>
  using std::common_type_t = typename common_type< _Tp...>::type
- template<bool _Cond, typename _Iftrue , typename _Iffalse >
  using std::conditional_t = typename conditional< _Cond, _Iftrue, _Iffalse >::type
- template<typename _Tp >
  using std::decay_t = typename decay< _Tp >::type
- template<bool _Cond, typename _Tp = void>
  using std::enable_if_t = typename enable_if< _Cond, _Tp >::type
- typedef integral_constant
  < bool, false > std::false_type
- template<typename _Tp >
  using std::make_signed_t = typename make_signed< _Tp >::type
- template<typename _Tp >
  using std::make_unsigned_t = typename make_unsigned< _Tp >::type
- template<typename _Tp >
  using std::remove_all_extents_t = typename remove_all_extents< _Tp >::type
- template<typename _Tp >
  using std::remove_const_t = typename remove_const< _Tp >::type
- template<typename _Tp >
  using std::remove_cv_t = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using std::remove_extent_t = typename remove_extent< _Tp >::type
- template<typename _Tp >
  using std::remove_pointer_t = typename remove_pointer< _Tp >::type
- template<typename _Tp >
  using std::remove_reference_t = typename remove_reference< _Tp >::type
- template<typename _Tp >
  using std::remove_volatile_t = typename remove_volatile< _Tp >::type
- template<typename _Tp >
  using std::result_of_t = typename result_of< _Tp >::type
- typedef integral_constant
  < bool, true > std::true_type

- template<typename _Tp >
  using std::underlying_type_t = typename underlying_type< _Tp >::type
- template<typename... >
  using std::void_t = void

Functions

- template<typename _Tp , size_t = sizeof(_Tp)>
  constexpr true_type **std::__is_complete_or_unbounded** (__type_identity< _Tp >)
- template<typename _TypeIdentity , typename _NestedType = typename _TypeIdentity::type>
  constexpr __or_< is_reference
  < _NestedType >, is_function
  < _NestedType >, is_void
  < _NestedType >
  , __is_array_unknown_bounds
  < _NestedType > >::type **std::__is_complete_or_unbounded** (_TypeIdentity)
- template<typename _Tp >
  std::__is_nullptr_t is_null_pointer **std::_GLIBCXX_DEPRECATED_SUGGEST** ("std::is_null_pointer")
- template<typename _Tp >
  auto **std::declval** () noexcept-> decltype(__declval< _Tp >(0))

Variables

- std::is_reference **std::_GLIBCXX_DEPRECATED_SUGGEST**
- static const size_t std::aligned_union< _Len, _Types >::alignment_value
- static constexpr _Tp **std::integral_constant< _Tp, __v >::value**

2.50.1 Detailed Description

Template utilities for compile-time introspection and modification, including type classification traits, type property inspection traits and type transformation traits.

2.50.2 Typedef Documentation

2.50.2.1 template<typename _Tp > using std::add_const_t = typedef typename add_const<_Tp>::type

Alias template for add_const.

Definition at line 1578 of file type_traits.

2.50.2.2 template<typename _Tp > using std::add_cv_t = typedef typename add_cv<_Tp>::type

Alias template for add_cv.

Definition at line 1586 of file type_traits.

2.50.2.3 template<typename _Tp > using std::add_lvalue_reference_t = typedef typename add_lvalue_reference<_Tp>::type

Alias template for add_lvalue_reference.

Definition at line 1639 of file type_traits.

2.50.2.4 template<typename _Tp > using std::add_pointer_t = typedef typename add_pointer<_Tp>::type

Alias template for add_pointer.

Definition at line 2044 of file type_traits.

2.50.2.5 template<typename _Tp > using std::add_rvalue_reference_t = typedef typename add_rvalue_reference<_Tp>::type

Alias template for add_rvalue_reference.

Definition at line 1643 of file type_traits.

2.50.2.6 template<typename _Tp > using std::add_volatile_t = typedef typename add_volatile<_Tp>::type

Alias template for add_volatile.

Definition at line 1582 of file type_traits.

2.50.2.7 template<size_t _Len, size_t _Align = __alignof__(typename __aligned_storage_msa<_Len>::__type)> using std::aligned_storage_t = typedef typename aligned_storage<_Len, _Align>::type

Alias template for aligned_storage.

Definition at line 2543 of file type_traits.

2.50.2.8 template<typename... _Tp> using std::common_type_t = typedef typename common_type<_Tp...>::type

Alias template for common_type.

Definition at line 2562 of file type_traits.

2.50.2.9 template<bool _Cond, typename _Iftrue , typename _Iffalse > using std::conditional_t = typedef typename conditional<_Cond, _Iftrue, _Iffalse>::type

Alias template for conditional.

Definition at line 2558 of file type_traits.

2.50.2.10 template<typename _Tp > using std::decay_t = typedef typename decay<_Tp>::type

Alias template for decay.

Definition at line 2550 of file type_traits.

2.50.2.11 template<bool _Cond, typename _Tp = void> using std::enable_if_t = typedef typename enable_if<_Cond, _Tp>::type

Alias template for enable_if.

Definition at line 2554 of file type_traits.

2.50.2.12 typedef integral_constant<bool, false> std::false_type

The type used as a compile-time boolean with false value.

Definition at line 78 of file type_traits.

2.50.2.13 template<typename _Tp > using std::make_signed_t = typedef typename make_signed<_Tp>::type

Alias template for make_signed.

Definition at line 1961 of file type_traits.

2.50.2.14 template<typename _Tp > using std::make_unsigned_t = typedef typename make_unsigned<_Tp>::type

Alias template for make_unsigned.

Definition at line 1965 of file type_traits.

2.50.2.15 template<typename _Tp > using std::remove_all_extents_t = typedef typename remove_all_extents<_Tp>::type

Alias template for remove_all_extents.

Definition at line 2003 of file type_traits.

2.50.2.16 template<typename _Tp > using std::remove_const_t = typedef typename remove_const<_Tp>::type

Alias template for remove_const.

Definition at line 1566 of file type_traits.

2.50.2.17 template<typename _Tp > using std::remove_cv_t = typedef typename remove_cv<_Tp>::type

Alias template for remove_cv.

Definition at line 1574 of file type_traits.

2.50.2.18 template<typename _Tp > using std::remove_extent_t = typedef typename remove_extent<_Tp>::type

Alias template for remove_extent.

Definition at line 1999 of file type_traits.

2.50.2.19 template<typename _Tp > using std::remove_pointer_t = typedef typename remove_pointer<_Tp>::type

Alias template for remove_pointer.

Definition at line 2040 of file type_traits.

2.50.2.20 template<typename _Tp > using std::remove_reference_t = typedef typename remove_reference<_Tp>::type

Alias template for remove_reference.

Definition at line 1635 of file type_traits.

2.50.2.21 template<typename _Tp > using std::remove_volatile_t = typedef typename remove_volatile<_Tp>::type

Alias template for remove_volatile.

Definition at line 1570 of file type_traits.

2.50.2.22 template<typename _Tp > using std::result_of_t = typedef typename result_of<_Tp>::type

Alias template for result_of.

Definition at line 2570 of file type_traits.

2.50.2.23 typedef integral_constant<bool, true> std::true_type

The type used as a compile-time boolean with true value.

Definition at line 75 of file type_traits.

2.50.2.24 template<typename _Tp > using std::underlying_type_t = typedef typename underlying_type<_Tp>::type

Alias template for underlying_type.

Definition at line 2566 of file type_traits.

2.50.2.25 template<typename... > using std::void_t = typedef void

A metafunction that always yields void, used for detecting valid types.

Definition at line 2576 of file type_traits.

2.50.3 Variable Documentation

2.50.3.1 template<size_t _Len, typename... _Types> const size_t std::aligned_union< _Len, _Types >::alignment_value [static]

The value of the strictest alignment of _Types.

Definition at line 2117 of file type_traits.

2.51 Mutating

Collaboration diagram for Mutating:

Functions

- template<typename _II , typename _OI >
  constexpr _OI std::copy (_II __first, _II __last, _OI __result)
- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 std::copy_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator std::copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator std::copy_n (_InputIterator __first, _Size __n, _OutputIterator __result)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _OI , typename _Size , typename _Tp >
  constexpr _OI std::fill_n (_OI __first, _Size __n, const _Tp &__value)
- template<typename _ForwardIterator , typename _Generator >
  constexpr void std::generate (_ForwardIterator __first, _ForwardIterator __last, _Generator __gen)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  constexpr _OutputIterator std::generate_n (_OutputIterator __first, _Size __n, _Generator __gen)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::is_partitioned (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr void std::iter_swap (_ForwardIterator1 __a, _ForwardIterator2 __b)
- template<typename _II , typename _OI >
  constexpr _OI std::move (_II __first, _II __last, _OI __result)
- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 std::move_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _OutputIterator1 , typename _OutputIterator2 , typename _Predicate >
  constexpr pair
  < _OutputIterator1,
  _OutputIterator2 > std::partition_copy (_InputIterator __first, _InputIterator __last, _OutputIterator1 __out_true, _OutputIterator2 __out_false, _Predicate __pred)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::partition_point (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)

- template<typename _RandomAccessIterator , typename _RandomNumberGenerator >
  void std::random_shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomNumberGenerator &&__rand)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::remove (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  constexpr _OutputIterator std::remove_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__value)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator std::remove_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::remove_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::replace (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp >
  constexpr _OutputIterator std::replace_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred, const _Tp &__new_value)
- template<typename _ForwardIterator , typename _Predicate , typename _Tp >
  constexpr void std::replace_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, const _Tp &__new_value)
- template<typename _BidirectionalIterator >
  constexpr void std::reverse (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _OutputIterator >
  constexpr _OutputIterator std::reverse_copy (_BidirectionalIterator __first, _BidirectionalIterator __last, _OutputIterator __result)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::_V2::rotate (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _OutputIterator >
  constexpr _OutputIterator std::rotate_copy (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last, _OutputIterator __result)
- template<typename _RandomAccessIterator , typename _UniformRandomNumberGenerator >
  void std::shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _UniformRandomNumberGenerator &&__g)
- template<typename _ForwardIterator , typename _Predicate >
  _ForwardIterator std::stable_partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator2 std::swap_ranges (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)
- template<typename _InputIterator , typename _OutputIterator , typename _UnaryOperation >
  constexpr _OutputIterator std::transform (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _UnaryOperation __unary_op)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::transform (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::unique (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator std::unique (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)

- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate >
  constexpr _OutputIterator std::unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred)

2.51.1 Detailed Description

2.51.2 Function Documentation

2.51.2.1 template<typename _II , typename _OI > constexpr _OI std::copy (_II *__first,* _II *__last,* _OI *__result*) [inline]

Copies the range [first,last) into result.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.

Returns

result + (last - first)

This inline function will boil down to a call to `memmove` whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling). Result may not be contained within [first,last); the copy_backward function should be used instead.

Note that the end of the output range is permitted to be contained within [first,last).

Definition at line 560 of file stl_algobase.h.

2.51.2.2 template<typename _BI1 , typename _BI2 > constexpr _BI2 std::copy_backward (_BI1 *__first,* _BI1 *__last,* _BI2 *__result*) [inline]

Copies the range [first,last) into result.

Parameters

__first	A bidirectional iterator.
__last	A bidirectional iterator.
__result	A bidirectional iterator.

Returns

result - (last - first)

The function has the same effect as copy, but starts at the end of the range and works its way to the start, returning the start of the result. This inline function will boil down to a call to `memmove` whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling).

Result may not be in the range (first,last]. Use copy instead. Note that the start of the output range may overlap [first,last).

Definition at line 797 of file stl_algobase.h.

Referenced by std::deque< _Tp, _Alloc >::_M_reallocate_map().

2.51.2.3 template<typename _InputIterator , typename _OutputIterator , typename _Predicate > constexpr _OutputIterator std::copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)

Copy the elements of a sequence for which a predicate is true.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__pred	A predicate.

Returns

An iterator designating the end of the resulting sequence.

Copies each element in the range [__first,__last) for which __pred returns true to the range beginning at __result.

copy_if() is stable, so the relative order of elements that are copied is unchanged.

Definition at line 688 of file stl_algo.h.

2.51.2.4 template<typename _InputIterator , typename _Size , typename _OutputIterator > constexpr _OutputIterator std::copy_n (_InputIterator *__first,* _Size *__n,* _OutputIterator *__result*) [inline]

Copies the range [first,first+n) into [result,result+n).

Parameters

__first	An input iterator.
__n	The number of elements to copy.
__result	An output iterator.

Returns

result+n.

This inline function will boil down to a call to memmove whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling).

Definition at line 768 of file stl_algo.h.

References std::__iterator_category().

2.51.2.5 template<typename _ForwardIterator , typename _Tp > constexpr void std::fill (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__value*) [inline]

Fills the range [first,last) with copies of value.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__value	A reference-to-const of arbitrary type.

Returns

Nothing.

This function fills a range with copies of the same value. For char types filling contiguous areas of memory, this becomes an inline call to memset or wmemset.

Definition at line 937 of file stl_algobase.h.

2.51.2.6 template<typename _OI , typename _Size , typename _Tp > constexpr _OI std::fill_n (_OI *__first,* _Size *__n,* const _Tp & *__value*) [inline]

Fills the range [first,first+n) with copies of value.

Parameters

__first	An output iterator.
__n	The count of copies to perform.
__value	A reference-to-const of arbitrary type.

Returns

The iterator at first+n.

This function fills a range with copies of the same value. For char types filling contiguous areas of memory, this becomes an inline call to `memset` or `wmemset`.

If `__n` is negative, the function does nothing.

Definition at line 1089 of file stl_algobase.h.

References std::__iterator_category().

2.51.2.7 template<typename _ForwardIterator , typename _Generator > constexpr void std::generate (_ForwardIterator *__first*, _ForwardIterator *__last*, _Generator *__gen*)

Assign the result of a function object to each value in a sequence.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__gen	A function object taking no arguments and returning std::iterator_traits<_ForwardIterator>-::value_type

Returns

generate() returns no value.

Performs the assignment `*i = __gen()` for each `i` in the range [__first,__last).

Definition at line 4441 of file stl_algo.h.

2.51.2.8 template<typename _OutputIterator , typename _Size , typename _Generator > constexpr _OutputIterator std::generate_n (_OutputIterator *__first*, _Size *__n*, _Generator *__gen*)

Assign the result of a function object to each value in a sequence.

Parameters

__first	A forward iterator.
__n	The length of the sequence.
__gen	A function object taking no arguments and returning std::iterator_traits<_ForwardIterator>-::value_type

Returns

The end of the sequence, `__first+__n`

Performs the assignment `*i = __gen()` for each `i` in the range [__first,__first+__n).

If `__n` is negative, the function does nothing and returns `__first`.

Definition at line 4475 of file stl_algo.h.

2.51.2.9 template<typename _InputIterator , typename _Predicate > constexpr bool std::is_partitioned (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Checks whether the sequence is partitioned.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

True if the range [__first,__last) is partioned by __pred, i.e. if all elements that satisfy __pred appear before those that do not.

Definition at line 530 of file stl_algo.h.

References std::find_if_not(), and std::none_of().

2.51.2.10 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr void std::iter_swap (_ForwardIterator1 *__a,* _ForwardIterator2 *__b*) [inline]

Swaps the contents of two iterators.

Parameters

__a	An iterator.
__b	Another iterator.

Returns

Nothing.

This function swaps the values pointed to by two iterators, not the iterators themselves.

Definition at line 152 of file stl_algobase.h.

Referenced by std::__merge_without_buffer(), std::__move_median_to_first(), std::__partition(), std::__reverse(), std::__unguarded_partition(), std::random_shuffle(), std::shuffle(), and std::swap_ranges().

2.51.2.11 template<typename _II , typename _OI > constexpr _OI std::move (_II *__first,* _II *__last,* _OI *__result*) [inline]

Moves the range [first,last) into result.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.

Returns

result + (last - first)

This inline function will boil down to a call to memmove whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling). Result may not be contained within [first,last); the move_backward function should be used instead.

Note that the end of the output range is permitted to be contained within [first,last).

Definition at line 593 of file stl_algobase.h.

2.51.2.12 template<typename _BI1 , typename _BI2 > constexpr _BI2 std::move_backward (_BI1 *__first,* _BI1 *__last,* _BI2 *__result*) [inline]

Moves the range [first,last) into result.

Parameters

__first	A bidirectional iterator.
__last	A bidirectional iterator.
__result	A bidirectional iterator.

Returns

result - (last - first)

The function has the same effect as move, but starts at the end of the range and works its way to the start, returning the start of the result. This inline function will boil down to a call to `memmove` whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling).

Result may not be in the range (first,last]. Use move instead. Note that the start of the output range may overlap [first,last).

Definition at line 833 of file stl_algobase.h.

2.51.2.13 template<typename _ForwardIterator , typename _Predicate > constexpr _ForwardIterator std::partition (_ForwardIterator *__first*, _ForwardIterator *__last*, _Predicate *__pred*) [inline]

Move elements for which a predicate is true to the beginning of a sequence.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__pred	A predicate functor.

Returns

An iterator `middle` such that `__pred(i)` is true for each iterator `i` in the range [__first,middle) and false for each `i` in the range [middle,__last).

`__pred` must not modify its operand. `partition()` does not preserve the relative ordering of elements in each group, use `stable_partition()` if this is needed.

Definition at line 4663 of file stl_algo.h.

References std::__iterator_category(), and std::__partition().

2.51.2.14 template<typename _InputIterator , typename _OutputIterator1 , typename _OutputIterator2 , typename _Predicate > constexpr pair<_OutputIterator1, _OutputIterator2> std::partition_copy (_InputIterator *__first*, _InputIterator *__last*, _OutputIterator1 *__out_true*, _OutputIterator2 *__out_false*, _Predicate *__pred*)

Copy the elements of a sequence to separate output sequences depending on the truth value of a predicate.

Parameters

__first	An input iterator.
__last	An input iterator.
__out_true	An output iterator.

__out_false	An output iterator.
__pred	A predicate.

Returns

A pair designating the ends of the resulting sequences.

Copies each element in the range [__first,__last) for which __pred returns true to the range beginning at out_true and each element for which __pred returns false to __out_false.

Definition at line 800 of file stl_algo.h.

2.51.2.15 template<typename _ForwardIterator , typename _Predicate > constexpr _ForwardIterator std::partition_point (_ForwardIterator *__first*, _ForwardIterator *__last*, _Predicate *__pred*)

Find the partition point of a partitioned range.

Parameters

__first	An iterator.
__last	Another iterator.
__pred	A predicate.

Returns

An iterator mid such that all_of(__first, mid, __pred) and none_of(mid, __last, __pred) are both true.

Definition at line 552 of file stl_algo.h.

References std::advance(), and std::distance().

2.51.2.16 template<typename _RandomAccessIterator , typename _RandomNumberGenerator > void std::random_shuffle (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*, _RandomNumberGenerator && *__rand*)

Shuffle the elements of a sequence using a random number generator.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__rand	The RNG functor or function.

Returns

Nothing.

Reorders the elements in the range [__first,__last) using __rand to provide a random distribution. Calling __rand(N) for a positive integer N should return a randomly chosen integer from the range [0,N).

Definition at line 4622 of file stl_algo.h.

References std::iter_swap().

2.51.2.17 template<typename _ForwardIterator , typename _Tp > constexpr _ForwardIterator std::remove (_ForwardIterator *__first*, _ForwardIterator *__last*, const _Tp & *__value*) [inline]

Remove elements from a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__value	The value to be removed.

Returns

An iterator designating the end of the resulting sequence.

All elements equal to __value are removed from the range [__first,__last).

remove() is stable, so the relative order of elements that are not removed is unchanged.

Elements between the end of the resulting sequence and __last are still present, but their value is unspecified.

Definition at line 870 of file stl_algo.h.

2.51.2.18 template<typename _InputIterator , typename _OutputIterator , typename _Tp > constexpr _OutputIterator std::remove_copy (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* const _Tp & *__value*) [inline]

Copy a sequence, removing elements of a given value.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__value	The value to be removed.

Returns

An iterator designating the end of the resulting sequence.

Copies each element in the range [__first,__last) not equal to __value to the range beginning at __result. remove_copy() is stable, so the relative order of elements that are copied is unchanged.

Definition at line 619 of file stl_algo.h.

2.51.2.19 template<typename _InputIterator , typename _OutputIterator , typename _Predicate > constexpr _OutputIterator std::remove_copy_if (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _Predicate *__pred*) [inline]

Copy a sequence, removing elements for which a predicate is true.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__pred	A predicate.

Returns

An iterator designating the end of the resulting sequence.

Copies each element in the range [__first,__last) for which __pred returns false to the range beginning at __result.

remove_copy_if() is stable, so the relative order of elements that are copied is unchanged.

Definition at line 653 of file stl_algo.h.

2.51.2.20 template<typename _ForwardIterator , typename _Predicate > constexpr _ForwardIterator std::remove_if (_ForwardIterator *__first,* _ForwardIterator *__last,* _Predicate *__pred*) [inline]

Remove elements from a sequence using a predicate.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__pred	A predicate.

Returns

An iterator designating the end of the resulting sequence.

All elements for which `__pred` returns true are removed from the range [__first,__last).

remove_if() is stable, so the relative order of elements that are not removed is unchanged.

Elements between the end of the resulting sequence and `__last` are still present, but their value is unspecified.

Definition at line 904 of file stl_algo.h.

2.51.2.21 template<typename _ForwardIterator , typename _Tp > constexpr void std::replace (_ForwardIterator *__first,* _ForwardIterator *__last,* const _Tp & *__old_value,* const _Tp & *__new_value*)

Replace each occurrence of one value in a sequence with another value.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__old_value	The value to be replaced.
__new_value	The replacement value.

Returns

replace() returns no value.

For each iterator `i` in the range [__first,__last) if `*i == __old_value` then the assignment `*i = __new_value` is performed.

Definition at line 4375 of file stl_algo.h.

2.51.2.22 template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp > constexpr _OutputIterator std::replace_copy_if (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _Predicate *__pred,* const _Tp & *__new_value*) [inline]

Copy a sequence, replacing each value for which a predicate returns true with another value.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__pred	A predicate.
__new_value	The replacement value.

Returns

The end of the output sequence, __result+(__last-__first).

Copies each element in the range [__first,__last) to the range [__result,__result+(__last-__first)) replacing elements for which __pred returns true with __new_value.

Definition at line 3195 of file stl_algo.h.

2.51.2.23 template<typename _ForwardIterator , typename _Predicate , typename _Tp > constexpr void std::replace_if (_ForwardIterator *__first,* _ForwardIterator *__last,* _Predicate *__pred,* const _Tp & *__new_value*)

Replace each value in a sequence for which a predicate returns true with another value.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__pred	A predicate.
__new_value	The replacement value.

Returns

replace_if() returns no value.

For each iterator i in the range [__first,__last) if __pred(*i) is true then the assignment *i = __new_value is performed.

Definition at line 4408 of file stl_algo.h.

2.51.2.24 template<typename _BidirectionalIterator > constexpr void std::reverse (_BidirectionalIterator *__first,* _BidirectionalIterator *__last*) [inline]

Reverse a sequence.

Parameters

__first	A bidirectional iterator.
__last	A bidirectional iterator.

Returns

reverse() returns no value.

Reverses the order of the elements in the range [__first,__last), so that the first element becomes the last etc. For every i such that 0<=i<=(__last-__first)/2), reverse() swaps *(__first+i) and *(__last-(i+1))

Definition at line 1165 of file stl_algo.h.

References std::__iterator_category(), and std::__reverse().

2.51.2.25 template<typename _BidirectionalIterator , typename _OutputIterator > constexpr _OutputIterator std::reverse_copy (_BidirectionalIterator __*first*, _BidirectionalIterator __*last*, _OutputIterator __*result*)

Copy a sequence, reversing its elements.

Parameters

__first	A bidirectional iterator.
__last	A bidirectional iterator.
__result	An output iterator.

Returns

An iterator designating the end of the resulting sequence.

Copies the elements in the range [__first,__last) to the range [__result,__result+(__last-__first)) such that the order of the elements is reversed. For every `i` such that `0<=i<=`(__last-__first), `reverse_copy()` performs the assignment *(__result+(__last-__first)-1-i) = *(__first+i). The ranges [__first,__last) and [__result,__result+(__last-__first)) must not overlap.

Definition at line 1193 of file stl_algo.h.

2.51.2.26 template<typename _ForwardIterator > constexpr _ForwardIterator std::_V2::rotate (_ForwardIterator *__first,* _ForwardIterator *__middle,* _ForwardIterator *__last*) [inline]

Rotate the elements of a sequence.

Parameters

__first	A forward iterator.
__middle	A forward iterator.
__last	A forward iterator.

Returns

first + (last - middle).

Rotates the elements of the range [__first,__last) by (__middle - __first) positions so that the element at `__middle` is moved to `__first`, the element at `__middle+1` is moved to `__first+1` and so on for each element in the range [__first,__last).

This effectively swaps the ranges [__first,__middle) and [__middle,__last).

Performs *(__first+(n+(__last-__middle))%(__last-__first))=*(__first+n) for each `n` in the range [0,__last-__first).

Definition at line 1425 of file stl_algo.h.

References std::__iterator_category().

Referenced by std::__merge_without_buffer(), std::__rotate_adaptive(), and std::__stable_partition_adaptive().

2.51.2.27 template<typename _ForwardIterator , typename _OutputIterator > constexpr _OutputIterator std::rotate_copy (_ForwardIterator *__first,* _ForwardIterator *__middle,* _ForwardIterator *__last,* _OutputIterator *__result*) [inline]

Copy a sequence, rotating its elements.

Parameters

__first	A forward iterator.
__middle	A forward iterator.

__last	A forward iterator.
__result	An output iterator.

Returns

An iterator designating the end of the resulting sequence.

Copies the elements of the range [__first,__last) to the range beginning at

Returns

, rotating the copied elements by (__middle-__first) positions so that the element at `__middle` is moved to `__result`, the element at `__middle+1` is moved to `__result+1` and so on for each element in the range [__first,__last).

Performs *(__result+(n+(__last-__middle))%(__last-__first))=*(__first+n) for each `n` in the range [0,__last-__first).

Definition at line 1463 of file stl_algo.h.

2.51.2.28 template<typename _RandomAccessIterator , typename _UniformRandomNumberGenerator > void std::shuffle (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _UniformRandomNumberGenerator && *__g*)

Shuffle the elements of a sequence using a uniform random number generator.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__g	A UniformRandomNumberGenerator (26.5.1.3).

Returns

Nothing.

Reorders the elements in the range [__first,__last) using `__g` to provide random numbers.

Definition at line 3748 of file stl_algo.h.

References std::__gen_two_uniform_ints(), std::pair< _T1, _T2 >::first, std::iter_swap(), and std::pair< _T1, _T2 >::second.

2.51.2.29 template<typename _ForwardIterator , typename _Predicate > _ForwardIterator std::stable_partition (_ForwardIterator *__first,* _ForwardIterator *__last,* _Predicate *__pred*) [inline]

Move elements for which a predicate is true to the beginning of a sequence, preserving relative ordering.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__pred	A predicate functor.

Returns

An iterator `middle` such that `__pred(i)` is true for each iterator `i` in the range [first,middle) and false for each `i` in the range [middle,last).

Performs the same function as `partition()` with the additional guarantee that the relative ordering of elements in each group is preserved, so any two elements `x` and `y` in the range [__first,__last) such that `__pred(x)==__pred(y)` will have the same relative ordering after calling `stable_partition()`.

Definition at line 1644 of file stl_algo.h.

2.51.2.30 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr _ForwardIterator2 std::swap_ranges (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2*)

Swap the elements of two sequences.

Parameters

__first1	A forward iterator.
__last1	A forward iterator.
__first2	A forward iterator.

Returns

An iterator equal to `first2`+(last1-first1).

Swaps each element in the range [first1,last1) with the corresponding element in the range [first2,(last1-first1)). The ranges must not overlap.

Definition at line 201 of file stl_algobase.h.

References std::iter_swap().

2.51.2.31 template<typename _InputIterator , typename _OutputIterator , typename _UnaryOperation > constexpr _OutputIterator std::transform (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _UnaryOperation *__unary_op*)

Perform an operation on a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__unary_op	A unary operator.

Returns

An output iterator equal to `__result`+(__last-__first).

Applies the operator to each element in the input range and assigns the results to successive elements of the output sequence. Evaluates ∗(__result+N)=unary_op(∗(__first+N)) for each `N` in the range [0,__last-__first).

`unary_op` must not alter its argument.

Definition at line 4304 of file stl_algo.h.

2.51.2.32 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _BinaryOperation > constexpr _OutputIterator std::transform (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _OutputIterator *__result,* _BinaryOperation *__binary_op*)

Perform an operation on corresponding elements of two sequences.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__result	An output iterator.
__binary_op	A binary operator.

Returns

An output iterator equal to `result+`(last-first).

Applies the operator to the corresponding elements in the two input ranges and assigns the results to successive elements of the output sequence. Evaluates ∗(__result+N)=__binary_op(∗(__first1+N),∗(__first2+N)) for each `N` in the range [0,__last1-__first1).

`binary_op` must not alter either of its arguments.

Definition at line 4342 of file stl_algo.h.

2.51.2.33 template<typename _ForwardIterator > constexpr _ForwardIterator std::unique (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Remove consecutive duplicate values from a sequence.

Parameters

__first	A forward iterator.
__last	A forward iterator.

Returns

An iterator designating the end of the resulting sequence.

Removes all but the first element from each group of consecutive values that compare equal. unique() is stable, so the relative order of elements that are not removed is unchanged. Elements between the end of the resulting sequence and `__last` are still present, but their value is unspecified.

Definition at line 973 of file stl_algo.h.

2.51.2.34 template<typename _ForwardIterator , typename _BinaryPredicate > constexpr _ForwardIterator std::unique (_ForwardIterator *__first*, _ForwardIterator *__last*, _BinaryPredicate *__binary_pred*) [inline]

Remove consecutive values from a sequence using a predicate.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__binary_pred	A binary predicate.

Returns

An iterator designating the end of the resulting sequence.

Removes all but the first element from each group of consecutive values for which `__binary_pred` returns true. unique() is stable, so the relative order of elements that are not removed is unchanged. Elements between the end of the resulting sequence and `__last` are still present, but their value is unspecified.

Definition at line 1004 of file stl_algo.h.

2.51.2.35 template<typename _InputIterator , typename _OutputIterator > constexpr _OutputIterator std::unique_copy (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result*) [inline]

Copy a sequence, removing consecutive duplicate values.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.

Returns

An iterator designating the end of the resulting sequence.

Copies each element in the range [__first,__last) to the range beginning at `__result`, except that only the first element is copied from groups of consecutive elements that compare equal. unique_copy() is stable, so the relative order of elements that are copied is unchanged.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 241. Does unique_copy() require CopyConstructible and Assignable?

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 538. 241 again: Does unique_copy() require CopyConstructible and Assignable?

Definition at line 4513 of file stl_algo.h.

References std::__iterator_category(), and std::__unique_copy().

2.51.2.36 template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate > constexpr _OutputIterator std::unique_copy (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _BinaryPredicate *__binary_pred*) [inline]

Copy a sequence, removing consecutive values using a predicate.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__binary_pred	A binary predicate.

Returns

An iterator designating the end of the resulting sequence.

Copies each element in the range [__first,__last) to the range beginning at `__result`, except that only the first element is copied from groups of consecutive elements for which `__binary_pred` returns true. unique_copy() is stable, so the relative order of elements that are copied is unchanged.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 241. Does unique_copy() require CopyConstructible and Assignable?

Definition at line 4555 of file stl_algo.h.

References std::__iterator_category(), and std::__unique_copy().

2.52 Mutexes

Collaboration diagram for Mutexes:



Classes

- struct std::adopt_lock_t
- struct std::defer_lock_t
- class std::lock_guard< _Mutex >
- class std::mutex
- struct std::once_flag
- class std::recursive_mutex
- class std::recursive_timed_mutex
- class std::shared_lock< _Mutex >
- class std::shared_timed_mutex
- class std::timed_mutex
- struct std::try_to_lock_t
- class std::unique_lock< _Mutex >

Macros

- #define **__cpp_lib_shared_timed_mutex**

Functions

- template<typename _Callable , typename... _Args>
  void std::call_once (once_flag &__once, _Callable &&__f, _Args &&...__args)
- template<typename _L1 , typename _L2 , typename... _L3>
  void std::lock (_L1 &__l1, _L2 &__l2, _L3 &...__l3)
- template<typename _Lock1 , typename _Lock2 , typename... _Lock3>
  int std::try_lock (_Lock1 &__l1, _Lock2 &__l2, _Lock3 &...__l3)

Variables

- constexpr adopt_lock_t std::adopt_lock
- constexpr defer_lock_t std::defer_lock
- constexpr try_to_lock_t std::try_to_lock

2.52.1 Detailed Description

Classes for mutex support.

2.52.2 Function Documentation

2.52.2.1 template<typename _Callable , typename... _Args> void std::call_once (once_flag & *__once,* _Callable && *__f,* _Args &&... *__args*)

Invoke a callable and synchronize with other calls using the same flag.

Definition at line 712 of file mutex.

References std::__addressof(), and std::__invoke().

2.52.2.2 template<typename _L1 , typename _L2 , typename... _L3> void std::lock (_L1 & *__l1,* _L2 & *__l2,* _L3 &... *__l3*)

Generic lock.

Parameters

__l1	Meets Lockable requirements (try_lock() may throw).
__l2	Meets Lockable requirements (try_lock() may throw).
__l3	Meets Lockable requirements (try_lock() may throw).

Exceptions

An	exception thrown by an argument's lock() or try_lock() member.

Postcondition

All arguments are locked.

All arguments are locked via a sequence of calls to lock(), try_lock() and unlock(). If the call exits via an exception any locks that were obtained will be released.

Definition at line 589 of file mutex.

References std::tie().

2.52.2.3 template<typename _Lock1 , typename _Lock2 , typename... _Lock3> int std::try_lock (_Lock1 & *__l1,* _Lock2 & *__l2,* _Lock3 &... *__l3*)

Generic try_lock.

Parameters

__l1	Meets Lockable requirements (try_lock() may throw).
__l2	Meets Lockable requirements (try_lock() may throw).
__l3	Meets Lockable requirements (try_lock() may throw).

Returns

Returns -1 if all try_lock() calls return true. Otherwise returns a 0-based index corresponding to the argument that returned false.

Postcondition

Either all arguments are locked, or none will be.

Sequentially calls try_lock() on each argument.

Definition at line 568 of file mutex.

References std::tie().

2.52.3 Variable Documentation

2.52.3.1 constexpr adopt_lock_t std::adopt_lock [inline]

Tag used to make a scoped lock take ownership of a locked mutex.

Definition at line 145 of file std_mutex.h.

2.52.3.2 constexpr defer_lock_t std::defer_lock [inline]

Tag used to prevent a scoped lock from acquiring ownership of a mutex.

Definition at line 139 of file std_mutex.h.

2.52.3.3 constexpr try_to_lock_t std::try_to_lock [inline]

Tag used to prevent a scoped lock from blocking if a mutex is locked.

Definition at line 142 of file std_mutex.h.

2.53 Negators

Collaboration diagram for Negators:



Classes

- class std::binary_negate< _Predicate >
- class std::unary_negate< _Predicate >

Functions

- template<typename _Predicate >
  constexpr unary_negate
  < _Predicate > std::not1 (const _Predicate &__pred)
- template<typename _Predicate >
  constexpr binary_negate
  < _Predicate > std::not2 (const _Predicate &__pred)

2.53.1 Detailed Description

The functions `not1` and `not2` each take a predicate functor and return an instance of `unary_negate` or `binary_negate`, respectively. These classes are functors whose `operator()` performs the stored predicate function and then returns the negation of the result.

For example, given a vector of integers and a trivial predicate,

```
struct IntGreaterThanThree
  : public std::unary_function<int, bool>
{
    bool operator() (int x) { return x > 3; }
};

std::find_if (v.begin(), v.end(), not1(IntGreaterThanThree()));
```

The call to `find_if` will locate the first index (i) of `v` for which `!(v[i] > 3)` is true.

The not1/unary_negate combination works on predicates taking a single argument. The not2/binary_negate combination works on predicates which take two arguments.

2.53.2 Function Documentation

2.53.2.1 template<typename _Predicate > constexpr unary_negate<_Predicate> std::not1 (const _Predicate & *__pred*) [inline]

One of the negation functors.

Definition at line 1024 of file stl_function.h.

2.53.2.2 template<typename _Predicate > constexpr binary_negate<_Predicate> std::not2 (const _Predicate & *__pred*) [inline]

One of the negation functors.

Definition at line 1052 of file stl_function.h.

2.54 Networking-ts

2.54.1 Detailed Description

2.55 Non-Mutating

Collaboration diagram for Non-Mutating:

Functions

- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::adjacent_find (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator std::adjacent_find (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::all_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::any_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Tp >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type std::count (_InputIterator __first, _InputIterator __last, const _Tp &__value)
- template<typename _InputIterator , typename _Predicate >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type std::count_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool std::equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _BinaryPredicate __binary_pred)
- template<typename _II1 , typename _II2 >
  constexpr bool std::equal (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _II1 , typename _II2 >
  constexpr bool std::equal (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool std::equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _IIter2 __last2, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _Tp >
  constexpr _InputIterator std::find (_InputIterator __first, _InputIterator __last, const _Tp &__val)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _ForwardIterator >
  constexpr _InputIterator std::find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2)

- template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _InputIterator std::find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Function >
  constexpr _Function std::for_each (_InputIterator __first, _InputIterator __last, _Function __f)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _BinaryPredicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _BinaryPredicate __binary_pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::none_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 std::search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 std::search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __predicate)
- template<typename _ForwardIterator , typename _Integer , typename _Tp >
  constexpr _ForwardIterator std::search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val)
- template<typename _ForwardIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  constexpr _ForwardIterator std::search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred)

2.55.1 Detailed Description

2.55.2 Function Documentation

2.55.2.1 template<typename _ForwardIterator > constexpr _ForwardIterator std::adjacent_find (_ForwardIterator *__first,* _ForwardIterator *__last*) [inline]

Find two adjacent values in a sequence that are equal.

Parameters

__first	A forward iterator.
__last	A forward iterator.

Returns

The first iterator `i` such that `i` and `i+1` are both valid iterators in [__first,__last) and such that `*i == *(i+1)`, or `__last` if no such iterator exists.

Definition at line 4026 of file stl_algo.h.

2.55.2.2 template<typename _ForwardIterator , typename _BinaryPredicate > constexpr _ForwardIterator std::adjacent_find (_ForwardIterator *__first,* _ForwardIterator *__last,* _BinaryPredicate *__binary_pred*) [inline]

Find two adjacent values in a sequence using a predicate.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__binary_pred	A binary predicate.

Returns

The first iterator `i` such that `i` and `i+1` are both valid iterators in [__first,__last) and such that `__binary_pred(`*i*`,(i+1))` is true, or `__last` if no such iterator exists.

Definition at line 4052 of file stl_algo.h.

2.55.2.3 template<typename _InputIterator , typename _Predicate > constexpr bool std::all_of (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Checks that a predicate is true for all the elements of a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

True if the check is true, false otherwise.

Returns true if `__pred` is true for each element in the range [__first,__last), and false otherwise.

Definition at line 452 of file stl_algo.h.

References std::find_if_not().

2.55.2.4 template<typename _InputIterator , typename _Predicate > constexpr bool std::any_of (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Checks that a predicate is true for at least one element of a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

True if the check is true, false otherwise.

Returns true if an element exists in the range [__first,__last) such that __pred is true, and false otherwise.

Definition at line 489 of file stl_algo.h.

References std::none_of().

2.55.2.5 template<typename _InputIterator , typename _Tp > constexpr iterator_traits<_InputIterator>::difference_type std::count (_InputIterator *__first,* _InputIterator *__last,* const _Tp & *__value*) [inline]

Count the number of copies of a value in a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__value	The value to be counted.

Returns

The number of iterators i in the range [__first,__last) for which *i == __value

Definition at line 4078 of file stl_algo.h.

2.55.2.6 template<typename _InputIterator , typename _Predicate > constexpr iterator_traits<_InputIterator>::difference_type std::count_if (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Count the elements of a sequence for which a predicate is true.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

The number of iterators i in the range [__first,__last) for which __pred(*i) is true.

Definition at line 4102 of file stl_algo.h.

2.55.2.7 template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate > constexpr bool std::equal (_IIter1 *__first1,* _IIter1 *__last1,* _IIter2 *__first2,* _BinaryPredicate *__binary_pred*) [inline]

Tests a range for element-wise equality.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__binary_pred	A binary predicate functor.

Returns

A boolean true or false.

This compares the elements of two ranges using the binary_pred parameter, and returns true or false depending on whether all of the corresponding elements of the ranges are equal.

Definition at line 1435 of file stl_algobase.h.

2.55.2.8 template<typename _II1 , typename _II2 > constexpr bool std::equal (_II1 *__first1*, _II1 *__last1*, _II2 *__first2*) [inline]

Tests a range for element-wise equality.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.

Returns

A boolean true or false.

This compares the elements of two ranges using == and returns true or false depending on whether all of the corresponding elements of the ranges are equal.

Definition at line 1404 of file stl_algobase.h.

2.55.2.9 template<typename _II1 , typename _II2 > constexpr bool std::equal (_II1 *__first1*, _II1 *__last1*, _II2 *__first2*, _II2 *__last2*) [inline]

Tests a range for element-wise equality.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.

Returns

A boolean true or false.

This compares the elements of two ranges using == and returns true or false depending on whether all of the corresponding elements of the ranges are equal.

Definition at line 1525 of file stl_algobase.h.

2.55.2.10 template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate > constexpr bool std::equal (_IIter1 *__first1,* _IIter1 *__last1,* _IIter2 *__first2,* _IIter2 *__last2,* _BinaryPredicate *__binary_pred*) [inline]

Tests a range for element-wise equality.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.
__binary_pred	A binary predicate functor.

Returns

A boolean true or false.

This compares the elements of two ranges using the binary_pred parameter, and returns true or false depending on whether all of the corresponding elements of the ranges are equal.

Definition at line 1558 of file stl_algobase.h.

Referenced by std::operator==().

2.55.2.11 template<typename _InputIterator , typename _Tp > constexpr _InputIterator std::find (_InputIterator *__first,* _InputIterator *__last,* const _Tp & *__val*) [inline]

Find the first occurrence of a value in a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__val	The value to find.

Returns

The first iterator `i` in the range [__first,__last) such that `*i == __val`, or `__last` if no such iterator exists.

Definition at line 3895 of file stl_algo.h.

References std::__find_if().

2.55.2.12 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2*) [inline]

Find last matching subsequence in a sequence.

Parameters

__first1	Start of range to search.
__last1	End of range to search.
__first2	Start of sequence to match.
__last2	End of sequence to match.

Returns

The last iterator `i` in the range [__first1,__last1-(__last2-__first2)) such that *(i+N) == *(__first2+N) for each `N` in the range [0,__last2-__first2), or `__last1` if no such iterator exists.

Searches the range [__first1,__last1) for a sub-sequence that compares equal value-by-value with the sequence given by [__first2,__last2) and returns an iterator to the __first element of the sub-sequence, or `__last1` if the sub-sequence is not found. The sub-sequence will be the last such subsequence contained in [__first1,__last1).

Because the sub-sequence must lie completely within the range [__first1,__last1) it must start at a position less than __last1-(__last2-__first2) where __last2-__first2 is the length of the sub-sequence. This means that the returned iterator i will be in the range [__first1,__last1-(__last2-__first2))

Definition at line 367 of file stl_algo.h.

References std::__iterator_category().

2.55.2.13 template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate > constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2,* _BinaryPredicate *__comp*) [inline]

Find last matching subsequence in a sequence using a predicate.

Parameters

__first1	Start of range to search.
__last1	End of range to search.
__first2	Start of sequence to match.
__last2	End of sequence to match.
__comp	The predicate to use.

Returns

The last iterator i in the range [__first1,__last1-(__last2-__first2)) such that predicate(*(i+N), (__first2+N)) is true for each N in the range [0,__last2-__first2), or __last1 if no such iterator exists.

Searches the range [__first1,__last1) for a sub-sequence that compares equal value-by-value with the sequence given by [__first2,__last2) using comp as a predicate and returns an iterator to the first element of the sub-sequence, or __last1 if the sub-sequence is not found. The sub-sequence will be the last such subsequence contained in [__first,-__last1).

Because the sub-sequence must lie completely within the range [__first1,__last1) it must start at a position less than __last1-(__last2-__first2) where __last2-__first2 is the length of the sub-sequence. This means that the returned iterator i will be in the range [__first1,__last1-(__last2-__first2))

Definition at line 417 of file stl_algo.h.

References std::__iterator_category().

2.55.2.14 template<typename _InputIterator , typename _ForwardIterator > constexpr _InputIterator std::find_first_of (_InputIterator *__first1,* _InputIterator *__last1,* _ForwardIterator *__first2,* _ForwardIterator *__last2*)

Find element from a set in a sequence.

Parameters

__first1	Start of range to search.
__last1	End of range to search.
__first2	Start of match candidates.
__last2	End of match candidates.

Returns

The first iterator i in the range [__first1,__last1) such that *i == *(i2) such that i2 is an iterator in [__first2,__last2), or __last1 if no such iterator exists.

Searches the range [__first1,__last1) for an element that is equal to some element in the range [__first2,__last2). If found, returns an iterator in the range [__first1,__last1), otherwise returns __last1.

Definition at line 3952 of file stl_algo.h.

2.55.2.15 template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate > constexpr _InputIterator std::find_first_of (_InputIterator *__first1,* _InputIterator *__last1,* _ForwardIterator *__first2,* _ForwardIterator *__last2,* _BinaryPredicate *__comp*)

Find element from a set in a sequence using a predicate.

Parameters

__first1	Start of range to search.
__last1	End of range to search.
__first2	Start of match candidates.
__last2	End of match candidates.
__comp	Predicate to use.

Returns

The first iterator `i` in the range [__first1,__last1) such that `comp`(∗i, ∗(i2)) is true and i2 is an iterator in [__first2,-__last2), or `__last1` if no such iterator exists.

Searches the range [__first1,__last1) for an element that is equal to some element in the range [__first2,__last2). If found, returns an iterator in the range [__first1,__last1), otherwise returns `__last1`.

Definition at line 3994 of file stl_algo.h.

2.55.2.16 template<typename _InputIterator , typename _Predicate > constexpr _InputIterator std::find_if (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Find the first element in a sequence for which a predicate is true.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

The first iterator `i` in the range [__first,__last) such that `__pred(*i)` is true, or `__last` if no such iterator exists.

Definition at line 3920 of file stl_algo.h.

References std::__find_if().

Referenced by std::none_of().

2.55.2.17 template<typename _InputIterator , typename _Predicate > constexpr _InputIterator std::find_if_not (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Find the first element in a sequence for which a predicate is false.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

The first iterator `i` in the range [__first,__last) such that `__pred(*i)` is false, or `__last` if no such iterator exists.

Definition at line 505 of file stl_algo.h.

References std::__find_if_not().

Referenced by std::all_of(), and std::is_partitioned().

2.55.2.18 template<typename _InputIterator , typename _Function > constexpr _Function std::for_each (_InputIterator *__first,* _InputIterator *__last,* _Function *__f*)

Apply a function to every element of a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__f	A unary function object.

Returns

`__f`

Applies the function object `__f` to each element in the range [first,last). `__f` must not modify the order of the sequence. If `__f` has a return value it is ignored.

Definition at line 3833 of file stl_algo.h.

2.55.2.19 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr bool std::is_permutation (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2*) [inline]

Checks whether a permutation of the second sequence is equal to the first sequence.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.

Returns

true if there exists a permutation of the elements in the range [__first2, __first2 + (__last1 - __first1)), beginning with ForwardIterator2 begin, such that equal(__first1, __last1, begin) returns true; otherwise, returns false.

Definition at line 2044 of file stl_algobase.h.

2.55.2.20 template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate > constexpr bool std::is_permutation (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _BinaryPredicate *__pred*) [inline]

Checks whether a permutation of the second sequence is equal to the first sequence.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__pred	A binary predicate.

Returns

true if there exists a permutation of the elements in the range [__first2, __first2 + (__last1 - __first1)), beginning with ForwardIterator2 begin, such that equal(__first1, __last1, __begin, __pred) returns true; otherwise, returns false.

Definition at line 3527 of file stl_algo.h.

2.55.2.21 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr bool std::is_permutation (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2*) [inline]

Checks whether a permutaion of the second sequence is equal to the first sequence.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of first range.

Returns

true if there exists a permutation of the elements in the range [__first2, __last2), beginning with ForwardIterator2 begin, such that equal(__first1, __last1, begin) returns true; otherwise, returns false.

Definition at line 3621 of file stl_algo.h.

2.55.2.22 template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate > constexpr bool std::is_permutation (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2,* _BinaryPredicate *__pred*) [inline]

Checks whether a permutation of the second sequence is equal to the first sequence.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of first range.
__pred	A binary predicate.

Returns

true if there exists a permutation of the elements in the range [__first2, __last2), beginning with ForwardIterator2 begin, such that equal(__first1, __last1, __begin, __pred) returns true; otherwise, returns false.

Definition at line 3650 of file stl_algo.h.

2.55.2.23 template<typename _InputIterator1 , typename _InputIterator2 > constexpr pair<_InputIterator1, _InputIterator2> std::mismatch (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2*) [inline]

Finds the places in ranges which don't match.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.

Returns

A pair of iterators pointing to the first mismatch.

This compares the elements of two ranges using == and returns a pair of iterators. The first iterator points into the first range, the second iterator points into the second range, and the elements pointed to by the iterators are not equal.

Definition at line 1768 of file stl_algobase.h.

2.55.2.24 **template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate > constexpr pair<_InputIterator1, _InputIterator2> std::mismatch (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _BinaryPredicate *__binary_pred*)** `[inline]`

Finds the places in ranges which don't match.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__binary_pred	A binary predicate functor.

Returns

A pair of iterators pointing to the first mismatch.

This compares the elements of two ranges using the binary_pred parameter, and returns a pair of iterators. The first iterator points into the first range, the second iterator points into the second range, and the elements pointed to by the iterators are not equal.

Definition at line 1803 of file stl_algobase.h.

2.55.2.25 **template<typename _InputIterator1 , typename _InputIterator2 > constexpr pair<_InputIterator1, _InputIterator2> std::mismatch (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2*)** `[inline]`

Finds the places in ranges which don't match.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.

Returns

A pair of iterators pointing to the first mismatch.

This compares the elements of two ranges using == and returns a pair of iterators. The first iterator points into the first range, the second iterator points into the second range, and the elements pointed to by the iterators are not equal.

Definition at line 1851 of file stl_algobase.h.

2.55.2.26 template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate > constexpr pair<_InputIterator1, _InputIterator2> std::mismatch (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _BinaryPredicate *__binary_pred*) [inline]

Finds the places in ranges which don't match.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.
__binary_pred	A binary predicate functor.

Returns

A pair of iterators pointing to the first mismatch.

This compares the elements of two ranges using the binary_pred parameter, and returns a pair of iterators. The first iterator points into the first range, the second iterator points into the second range, and the elements pointed to by the iterators are not equal.

Definition at line 1888 of file stl_algobase.h.

2.55.2.27 template<typename _InputIterator , typename _Predicate > constexpr bool std::none_of (_InputIterator *__first,* _InputIterator *__last,* _Predicate *__pred*) [inline]

Checks that a predicate is false for all the elements of a sequence.

Parameters

__first	An input iterator.
__last	An input iterator.
__pred	A predicate.

Returns

True if the check is true, false otherwise.

Returns true if `__pred` is false for each element in the range [__first,__last), and false otherwise.

Definition at line 470 of file stl_algo.h.

References std::find_if().

Referenced by std::any_of(), and std::is_partitioned().

2.55.2.28 template<typename _ForwardIterator1 , typename _ForwardIterator2 > constexpr _ForwardIterator1 std::search (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2*) [inline]

Search a sequence for a matching sub-sequence.

Parameters

__first1	A forward iterator.
__last1	A forward iterator.
__first2	A forward iterator.
__last2	A forward iterator.

Returns

The first iterator `i` in the range [__first1,__last1-(__last2-__first2)) such that *(i+N) == *(__first2+N) for each `N` in the range [0,__last2-__first2), or `__last1` if no such iterator exists.

Searches the range [__first1,__last1) for a sub-sequence that compares equal value-by-value with the sequence given by [__first2,__last2) and returns an iterator to the first element of the sub-sequence, or __last1 if the sub-sequence is not found.

Because the sub-sequence must lie completely within the range [__first1,__last1) it must start at a position less than __last1-(__last2-__first2) where __last2-__first2 is the length of the sub-sequence.

This means that the returned iterator i will be in the range [__first1,__last1-(__last2-__first2))

Definition at line 4143 of file stl_algo.h.

2.55.2.29 template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate > constexpr _ForwardIterator1 std::search (_ForwardIterator1 *__first1,* _ForwardIterator1 *__last1,* _ForwardIterator2 *__first2,* _ForwardIterator2 *__last2,* _BinaryPredicate *__predicate*) [inline]

Search a sequence for a matching sub-sequence using a predicate.

Parameters

__first1	A forward iterator.
__last1	A forward iterator.
__first2	A forward iterator.
__last2	A forward iterator.
__predicate	A binary predicate.

Returns

The first iterator i in the range [__first1,__last1-(__last2-__first2)) such that __predicate(*(i+N),*(__first2+N)) is true for each N in the range [0,__last2-__first2), or __last1 if no such iterator exists.

Searches the range [__first1,__last1) for a sub-sequence that compares equal value-by-value with the sequence given by [__first2,__last2), using __predicate to determine equality, and returns an iterator to the first element of the sub-sequence, or __last1 if no such iterator exists.

See Also

search(_ForwardIter1, _ForwardIter1, _ForwardIter2, _ForwardIter2)

Definition at line 4184 of file stl_algo.h.

2.55.2.30 template<typename _ForwardIterator , typename _Integer , typename _Tp > constexpr _ForwardIterator std::search_n (_ForwardIterator *__first,* _ForwardIterator *__last,* _Integer *__count,* const _Tp & *__val*) [inline]

Search a sequence for a number of consecutive values.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__count	The number of consecutive values.
__val	The value to find.

Returns

The first iterator i in the range [__first,__last-__count) such that *(i+N) == __val for each N in the range [0,__count), or __last if no such iterator exists.

Searches the range [__first,__last) for count consecutive elements equal to __val.

Definition at line 4219 of file stl_algo.h.

2.55.2.31 template<typename _ForwardIterator , typename _Integer , typename _Tp , typename _BinaryPredicate > constexpr _ForwardIterator std::search_n (_ForwardIterator *__first,* _ForwardIterator *__last,* _Integer *__count,* const _Tp & *__val,* _BinaryPredicate *__binary_pred*) [inline]

Search a sequence for a number of consecutive values using a predicate.

Parameters

__first	A forward iterator.
__last	A forward iterator.
__count	The number of consecutive values.
__val	The value to find.
__binary_pred	A binary predicate.

Returns

The first iterator `i` in the range [__first,__last-__count) such that `__binary_pred`(*(i+N),__val) is true for each `N` in the range [0,__count), or `__last` if no such iterator exists.

Searches the range [__first,__last) for `__count` consecutive elements for which the predicate returns true.

Definition at line 4254 of file stl_algo.h.

2.56 Normal Distributions

Collaboration diagram for Normal Distributions:

Classes

- class std::cauchy_distribution< _RealType >
- class std::chi_squared_distribution< _RealType >
- class std::fisher_f_distribution< _RealType >
- class std::gamma_distribution< _RealType >
- class std::lognormal_distribution< _RealType >
- class std::normal_distribution< _RealType >
- class std::student_t_distribution< _RealType >

Functions

- template<typename _RealType >
  bool std::operator!= (const std::normal_distribution< _RealType > &__d1, const std::normal_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::lognormal_distribution< _RealType > &__d1, const std::lognormal_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::gamma_distribution< _RealType > &__d1, const std::gamma_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::chi_squared_distribution< _RealType > &__d1, const std::chi_squared_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::cauchy_distribution< _RealType > &__d1, const std::cauchy_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::fisher_f_distribution< _RealType > &__d1, const std::fisher_f_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::student_t_distribution< _RealType > &__d1, const std::student_t_distribution< _RealType > &__d2)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::cauchy_distribution< _RealType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::cauchy_distribution< _RealType > &__x)

2.56.1 Detailed Description

2.56.2 Function Documentation

2.56.2.1 template<typename _RealType > bool std::operator!= (const std::normal_distribution< _RealType > & *__d1*, const std::normal_distribution< _RealType > & *__d2*) [inline]

Return true if two normal distributions are different.

Definition at line 2167 of file random.h.

2.56.2.2 template<typename _RealType > bool std::operator!= (const std::lognormal_distribution< _RealType > & *__d1*, const std::lognormal_distribution< _RealType > & *__d2*) [inline]

Return true if two lognormal distributions are different.

Definition at line 2378 of file random.h.

2.56.2.3 template<typename _RealType > bool std::operator!= (const std::gamma_distribution< _RealType > & *__d1*, const std::gamma_distribution< _RealType > & *__d2*) [inline]

Return true if two gamma distributions are different.

Definition at line 2609 of file random.h.

2.56.2.4 template<typename _RealType > bool std::operator!= (const std::chi_squared_distribution< _RealType > & *__d1*, const std::chi_squared_distribution< _RealType > & *__d2*) [inline]

Return true if two Chi-squared distributions are different.

Definition at line 2833 of file random.h.

2.56.2.5 template<typename _RealType > bool std::operator!= (const std::cauchy_distribution< _RealType > & *__d1*, const std::cauchy_distribution< _RealType > & *__d2*) [inline]

Return true if two Cauchy distributions have different parameters.

Definition at line 3007 of file random.h.

2.56.2.6 template<typename _RealType > bool std::operator!= (const std::fisher_f_distribution< _RealType > & *__d1*, const std::fisher_f_distribution< _RealType > & *__d2*) [inline]

Return true if two Fisher f distributions are different.

Definition at line 3271 of file random.h.

2.56.2.7 template<typename _RealType > bool std::operator!= (const std::student_t_distribution< _RealType > & *__d1*, const std::student_t_distribution< _RealType > & *__d2*) [inline]

Return true if two Student t distributions are different.

Definition at line 3493 of file random.h.

2.56.2.8 template<typename _RealType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::cauchy_distribution< _RealType > & __x)

Inserts a cauchy_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A cauchy_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 2110 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.56.2.9 template<typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::cauchy_distribution< _RealType > & *__x*)

Extracts a cauchy_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A cauchy_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 2133 of file bits/random.tcc.

References std::dec(), std::ios_base::flags(), std::cauchy_distribution< _RealType >::param(), and std::skipws().

2.57 Numeric Arrays

Collaboration diagram for Numeric Arrays:



Classes

- class std::gslice
- class std::gslice_array< _Tp >
- class std::indirect_array< _Tp >
- class std::mask_array< _Tp >
- class std::slice
- class std::slice_array< _Tp >
- class std::valarray< _Tp >

Macros

- #define **_DEFINE_BINARY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_AUGMENTED_ASSIGNMENT**(_Op, _Name)
- #define **_DEFINE_VALARRAY_EXPR_AUGMENTED_ASSIGNMENT**(_Op, _Name)
- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_UNARY_OPERATOR**(_Op, _Name)

Functions

- std::gslice::gslice ()
- std::gslice::gslice (size_t __o, const valarray< size_t > &__l, const valarray< size_t > &__s)
- std::gslice::gslice (const gslice &)
- std::gslice_array< _Tp >::gslice_array (const gslice_array &)
- std::indirect_array< _Tp >::indirect_array (const indirect_array &)
- std::mask_array< _Tp >::mask_array (const mask_array &)
- std::slice::slice ()
- std::slice::slice (size_t __o, size_t __d, size_t __s)
- std::slice_array< _Tp >::slice_array (const slice_array &)
- std::valarray< _Tp >::valarray ()
- std::valarray< _Tp >::valarray (size_t)
- std::valarray< _Tp >::valarray (const _Tp &, size_t)
- std::valarray< _Tp >::valarray (const valarray &)

- std::valarray< _Tp >::valarray (valarray &&) noexcept
- std::valarray< _Tp >::valarray (const slice_array< _Tp > &)
- std::valarray< _Tp >::valarray (const gslice_array< _Tp > &)
- std::valarray< _Tp >::valarray (const mask_array< _Tp > &)
- std::valarray< _Tp >::valarray (const indirect_array< _Tp > &)
- std::valarray< _Tp >::valarray (initializer_list< _Tp >)
- template<class _Dom >
  std::valarray< _Tp >::valarray (const _Expr< _Dom, _Tp > &__e)
- template<typename _Tp>
  std::valarray< _Tp >::valarray (const _Tp *__restrict__ __p, size_t __n)
- std::gslice::~gslice ()
- _Expr< _ValFunClos< _ValArray,
  _Tp >, _Tp > std::valarray< _Tp >::apply (_Tp func(_Tp)) const
- _Expr< _RefFunClos< _ValArray,
  _Tp >, _Tp > std::valarray< _Tp >::apply (_Tp func(const _Tp &)) const
- template<class _Tp >
  _Tp * std::begin (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::begin (const valarray< _Tp > &__va)
- valarray< _Tp > std::valarray< _Tp >::cshift (int __n) const
- template<class _Tp >
  _Tp * std::end (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::end (const valarray< _Tp > &__va)
- _Tp std::valarray< _Tp >::max () const
- _Tp std::valarray< _Tp >::min () const
- _UnaryOp< __logical_not >::_Rt std::valarray< _Tp >::operator! () const
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _Constant, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _Constant,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- void std::gslice_array< _Tp >::operator%= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator%= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator%=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator%=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator%=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator%=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator%= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator%= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator%=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &_-
  _v)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **std::operator&&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **std::operator&&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **std::operator&&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- void std::gslice_array< _Tp >::operator&= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator&= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator&=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator&=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator&=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator&=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator&= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator&= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator&=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **std::operator*** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **std::operator*** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **std::operator*** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- void std::gslice_array< _Tp >::operator*= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator*= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator*=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator*=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator*=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator*=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator*= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator*= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator*=** (const _Expr< _Dom, _Tp > &)
- _UnaryOp< __unary_plus >::_Rt std::valarray< _Tp >::operator+ () const
- template<typename _Tp >
  _Expr< _BinClos< __plus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __plus, _Tp >
  ::result_type > **std::operator+** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __plus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __plus, _Tp >
  ::result_type > **std::operator+** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __plus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __plus, _Tp >
  ::result_type > **std::operator+** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- void std::gslice_array< _Tp >::operator+= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator+= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator+=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator+=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator+=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator+=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator+= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator+= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator+=** (const _Expr< _Dom, _Tp > &)
- _UnaryOp< __negate >::_Rt std::valarray< _Tp >::operator- () const
- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **std::operator-** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **std::operator-** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **std::operator-** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- void std::gslice_array< _Tp >::operator-= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator-= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator-=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator-=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator-=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator-=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator-= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator-= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator-=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- void std::gslice_array< _Tp >::operator/= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator/= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator/= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator/=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator/=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator/=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator/= (const valarray< _Tp > &) const

- template<class _Dom >
  void **std::slice_array**< **_Tp** >**::operator/=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator/= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator/= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray**< **_Tp** >**::operator/=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __shift_left,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __shift_left,
  _Tp >::result_type > **std::operator**<< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __shift_left,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __shift_left,
  _Tp >::result_type > **std::operator**<< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value-_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __shift_left,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __shift_left,
  _Tp >::result_type > **std::operator**<< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- void std::gslice_array< _Tp >::operator<<= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator<<= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array**< **_Tp** >**::operator**<<**=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array**< **_Tp** >**::operator**<<**=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array**< **_Tp** >**::operator**<<**=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array**< **_Tp** >**::operator**<<**=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator<<= (const _Tp &)

- valarray< _Tp > & std::valarray< _Tp >::operator<<= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator<<=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **std::operator<=** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **std::operator<=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **std::operator<=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value-
  _type &__t)
- gslice_array & std::gslice_array< _Tp >::operator= (const gslice_array &)
- indirect_array & std::indirect_array< _Tp >::operator= (const indirect_array &)
- mask_array & std::mask_array< _Tp >::operator= (const mask_array &)
- void std::gslice_array< _Tp >::operator= (const valarray< _Tp > &) const
- void **std::mask_array< _Tp >::operator=** (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator= (const valarray< _Tp > &) const
- gslice & std::gslice::operator= (const gslice &)
- void std::gslice_array< _Tp >::operator= (const _Tp &) const
- void std::mask_array< _Tp >::operator= (const _Tp &) const
- void std::indirect_array< _Tp >::operator= (const _Tp &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator=** (const _Expr< _Dom, _Tp > &) const
- slice_array & std::slice_array< _Tp >::operator= (const slice_array &)
- void std::slice_array< _Tp >::operator= (const valarray< _Tp > &) const
- void std::slice_array< _Tp >::operator= (const _Tp &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator=** (const _Expr< _Dom, _Tp > &) const
- template<class _Ex >
  void **std::mask_array< _Tp >::operator=** (const _Expr< _Ex, _Tp > &__e) const
- valarray< _Tp > & std::valarray< _Tp >::operator= (const valarray< _Tp > &__v)
- valarray< _Tp > & std::valarray< _Tp >::operator= (valarray< _Tp > &&__v) noexcept
- valarray< _Tp > & std::valarray< _Tp >::operator= (const _Tp &__t)
- valarray< _Tp > & std::valarray< _Tp >::operator= (const slice_array< _Tp > &__sa)
- valarray< _Tp > & std::valarray< _Tp >::operator= (const gslice_array< _Tp > &__ga)
- valarray< _Tp > & std::valarray< _Tp >::operator= (const mask_array< _Tp > &__ma)
- valarray< _Tp > & std::valarray< _Tp >::operator= (const indirect_array< _Tp > &__ia)
- valarray & std::valarray< _Tp >::operator= (initializer_list< _Tp > __l)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator=** (const _Expr< _Dom, _Tp > &)

- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **std::operator==** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **std::operator==** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **std::operator==** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __greater,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __greater,
  _Tp >::result_type > **std::operator**> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __greater,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __greater,
  _Tp >::result_type > **std::operator**> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __greater,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __greater,
  _Tp >::result_type > **std::operator**> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- template<typename _Tp >
  _Expr< _BinClos
  < __greater_equal, _Constant,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __greater_equal, _Tp >
  ::result_type > **std::operator**>**=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos
  < __greater_equal, _ValArray,
  _Constant, _Tp, _Tp >
  , typename __fun
  < __greater_equal, _Tp >
  ::result_type > **std::operator**>**=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >

_Expr< _BinClos
< __greater_equal, _ValArray,
_ValArray, _Tp, _Tp >
, typename __fun
< __greater_equal, _Tp >
::result_type > **std::operator**>= (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- void std::gslice_array< _Tp >::operator>>= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator>>= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator>>= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array**< **_Tp** >**::operator**>>**=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array**< **_Tp** >**::operator**>>**=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array**< **_Tp** >**::operator**>>**=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator>>= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array**< **_Tp** >**::operator**>>**=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator>>= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator>>= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray**< **_Tp** >**::operator**>>**=** (const _Expr< _Dom, _Tp > &)
- _Tp & std::valarray< _Tp >::operator[] (size_t __i)
- const _Tp & **std::valarray**< **_Tp** >**::operator[]** (size_t) const
- _Expr< _SClos< _ValArray, _Tp >
  , _Tp > std::valarray< _Tp >::operator[] (slice __s) const
- slice_array< _Tp > std::valarray< _Tp >::operator[] (slice __s)
- _Expr< _GClos< _ValArray, _Tp >
  , _Tp > std::valarray< _Tp >::operator[] (const gslice &__s) const
- gslice_array< _Tp > std::valarray< _Tp >::operator[] (const gslice &__s)
- valarray< _Tp > std::valarray< _Tp >::operator[] (const valarray< bool > &__m) const
- mask_array< _Tp > std::valarray< _Tp >::operator[] (const valarray< bool > &__m)

- _Expr< _IClos< _ValArray, _Tp >
, _Tp > std::valarray< _Tp >::operator[] (const valarray< size_t > &__i) const
- indirect_array< _Tp > std::valarray< _Tp >::operator[] (const valarray< size_t > &__i)
- template<typename _Tp >
_Expr< _BinClos< __bitwise_xor,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun
< __bitwise_xor, _Tp >
::result_type > **std::operator^** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __bitwise_xor,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun
< __bitwise_xor, _Tp >
::result_type > **std::operator^** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
_Expr< _BinClos< __bitwise_xor,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun
< __bitwise_xor, _Tp >
::result_type > **std::operator^** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &_-
_v)
- void std::gslice_array< _Tp >::operator^= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator^= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator^= (const valarray< _Tp > &) const
- template<class _Dom >
void **std::gslice_array< _Tp >::operator^=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
void **std::mask_array< _Tp >::operator^=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
void **std::indirect_array< _Tp >::operator^=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator^= (const valarray< _Tp > &) const
- template<class _Dom >
void **std::slice_array< _Tp >::operator^=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator^= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator^= (const valarray< _Tp > &)
- template<class _Dom >
valarray< _Tp > & **std::valarray< _Tp >::operator^=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
_Expr< _BinClos< __bitwise_or,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __bitwise_or,
_Tp >::result_type > **std::operator|** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
> &__v)
- template<typename _Tp >
_Expr< _BinClos< __bitwise_or,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __bitwise_or,
_Tp >::result_type > **std::operator|** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
&__t)

- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **std::operator|** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- void std::gslice_array< _Tp >::operator|= (const valarray< _Tp > &) const
- void std::mask_array< _Tp >::operator|= (const valarray< _Tp > &) const
- void std::indirect_array< _Tp >::operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::gslice_array< _Tp >::operator|=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::indirect_array< _Tp >::operator|=** (const _Expr< _Dom, _Tp > &) const
- template<class _Dom >
  void **std::mask_array< _Tp >::operator|=** (const _Expr< _Dom, _Tp > &) const
- void std::slice_array< _Tp >::operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **std::slice_array< _Tp >::operator|=** (const _Expr< _Dom, _Tp > &) const
- valarray< _Tp > & std::valarray< _Tp >::operator|= (const _Tp &)
- valarray< _Tp > & std::valarray< _Tp >::operator|= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **std::valarray< _Tp >::operator|=** (const _Expr< _Dom, _Tp > &)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- _UnaryOp< __bitwise_not >::_Rt std::valarray< _Tp >::operator~ () const
- void std::valarray< _Tp >::resize (size_t __size, _Tp __c=_Tp())
- valarray< _Tp > std::valarray< _Tp >::shift (int __n) const
- size_t std::slice::size () const
- valarray< size_t > std::gslice::size () const
- size_t std::valarray< _Tp >::size () const
- size_t std::slice::start () const
- size_t std::gslice::start () const
- size_t std::slice::stride () const
- valarray< size_t > std::gslice::stride () const
- _Tp std::valarray< _Tp >::sum () const
- void std::valarray< _Tp >::swap (valarray< _Tp > &__v) noexcept

2.57.1 Detailed Description

Classes and functions for representing and manipulating arrays of elements.

2.57.2 Function Documentation

2.57.2.1 std::gslice::gslice ( ) [inline]

Construct an empty slice.

Definition at line 149 of file gslice.h.

2.57.2.2 std::gslice::gslice (size_t __o, const valarray< size_t > & __l, const valarray< size_t > & __s) [inline]

Construct a slice.

Constructs a slice with as many dimensions as the length of the *l* and *s* arrays.

Parameters

__o	Offset in array of first element.
__l	Array of dimension lengths.
__s	Array of dimension strides between array elements.

Definition at line 153 of file gslice.h.

2.57.2.3 std::gslice::gslice (const gslice & __g) [inline]

Copy constructor.

Definition at line 158 of file gslice.h.

2.57.2.4 template<typename _Tp > std::gslice_array< _Tp >::gslice_array (const gslice_array< _Tp > & __a) [inline]

Copy constructor. Both slices refer to the same underlying array.

Definition at line 148 of file gslice_array.h.

2.57.2.5 template<typename _Tp > std::indirect_array< _Tp >::indirect_array (const indirect_array< _Tp > & __a) [inline]

Copy constructor. Both slices refer to the same underlying array.

Definition at line 143 of file indirect_array.h.

2.57.2.6 template<typename _Tp > std::mask_array< _Tp >::mask_array (const mask_array< _Tp > & __a) [inline]

Copy constructor. Both slices refer to the same underlying array.

Definition at line 144 of file mask_array.h.

2.57.2.7 std::slice::slice ( ) [inline]

Construct an empty slice.

Definition at line 95 of file slice_array.h.

2.57.2.8 std::slice::slice (size_t __o, size_t __d, size_t __s) [inline]

Construct a slice.

Parameters

__o	Offset in array of first element.
__d	Number of elements in slice.
__s	Stride between array elements.

Definition at line 99 of file slice_array.h.

2.57.2.9 template<typename _Tp> std::slice_array< _Tp >::slice_array (const slice_array< _Tp > & *__a*) [inline]

Copy constructor. Both slices refer to the same underlying array.

Definition at line 217 of file slice_array.h.

2.57.2.10 template<typename _Tp> std::valarray< _Tp >::valarray ( ) [inline]

Construct an empty array.

Definition at line 621 of file valarray.

2.57.2.11 template<typename _Tp> std::valarray< _Tp >::valarray (size_t *__n*) [inline], [explicit]

Construct an array with *n* elements.

Definition at line 625 of file valarray.

2.57.2.12 template<typename _Tp> std::valarray< _Tp >::valarray (const _Tp & *__t*, size_t *__n*) [inline]

Construct an array with *n* elements initialized to *t*.

Definition at line 631 of file valarray.

2.57.2.13 template<typename _Tp> std::valarray< _Tp >::valarray (const valarray< _Tp > & *__v*) [inline]

Copy constructor.

Definition at line 646 of file valarray.

2.57.2.14 template<typename _Tp> std::valarray< _Tp >::valarray (valarray< _Tp > && *__v*) [inline], [noexcept]

Move constructor.

Definition at line 654 of file valarray.

2.57.2.15 template<typename _Tp> std::valarray< _Tp >::valarray (const slice_array< _Tp > & *__sa*) [inline]

Construct an array with the same size and values in *sa*.

Definition at line 664 of file valarray.

2.57.2.16 template<typename _Tp> std::valarray< _Tp >::valarray (const gslice_array< _Tp > & *__ga*) [inline]

Construct an array with the same size and values in *ga*.

Definition at line 673 of file valarray.

2.57.2.17 template<typename _Tp> std::valarray< _Tp >::valarray (const mask_array< _Tp > & *__ma*) [inline]

Construct an array with the same size and values in *ma*.

Definition at line 684 of file valarray.

2.57.2.18 template<typename _Tp> std::valarray< _Tp >::valarray (const indirect_array< _Tp > & __ia) [inline]

Construct an array with the same size and values in *ia*.

Definition at line 693 of file valarray.

2.57.2.19 template<typename _Tp> std::valarray< _Tp >::valarray (initializer_list< _Tp > __l) [inline]

Construct an array with an initializer_list of values.

Definition at line 703 of file valarray.

2.57.2.20 std::gslice::~gslice ( ) [inline]

Destructor.

Definition at line 163 of file gslice.h.

2.57.2.21 template<class _Tp> _Expr< _ValFunClos< _ValArray, _Tp >, _Tp > std::valarray< _Tp >::apply (_Tp *func_Tp*) const [inline]

Apply a function to the array.

Returns a new valarray with elements assigned to the result of applying func to the corresponding element of this array. The new array has the same size as this one.

Parameters

func	Function of Tp returning Tp to apply.

Returns

New valarray with transformed elements.

Definition at line 1065 of file valarray.

2.57.2.22 template<class _Tp> _Expr< _RefFunClos< _ValArray, _Tp >, _Tp > std::valarray< _Tp >::apply (_Tp *funcconst _Tp &*) const [inline]

Apply a function to the array.

Returns a new valarray with elements assigned to the result of applying func to the corresponding element of this array. The new array has the same size as this one.

Parameters

func	Function of const Tp& returning Tp to apply.

Returns

New valarray with transformed elements.

Definition at line 1073 of file valarray.

2.57.2.23 template<class _Tp > _Tp * std::begin (valarray< _Tp > & __va) [inline]

Return an iterator pointing to the first element of the valarray.

Parameters

__va	valarray.

Definition at line 1214 of file valarray.

References std::__addressof().

Referenced by std::cbegin(), __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_child(), std::vector< _Tp, _Alloc >::insert(), std::list< _Tp, _Alloc >::merge(), std::vector< _Tp, _Alloc >::operator=(), std::list< _Tp, _Alloc >::remove(), std::list< _Tp, _Alloc >::sort(), and std::list< _Tp, _Alloc >::unique().

2.57.2.24 template<class _Tp > const _Tp * std::begin (const valarray< _Tp > & *__va*) [inline]

Return an iterator pointing to the first element of the const valarray.

Parameters

__va	valarray.

Definition at line 1224 of file valarray.

References std::__addressof().

2.57.2.25 template<class _Tp > valarray< _Tp > std::valarray< _Tp >::cshift (int *__n*) const [inline]

Return a rotated array.

A new valarray is constructed as a copy of this array with elements in shifted positions. For an element with index i, the new position is (i - n) % size(). The new valarray has the same size as the current one. Elements that are shifted beyond the array bounds are shifted into the other end of the array. No elements are lost.

Positive arguments shift toward index 0, wrapping around the top. Negative arguments shift towards the top, wrapping around to 0.

Parameters

__n	Number of element positions to rotate.

Returns

New valarray with elements in shifted positions.

Definition at line 991 of file valarray.

2.57.2.26 template<class _Tp > _Tp * std::end (valarray< _Tp > & *__va*) [inline]

Return an iterator pointing to one past the last element of the valarray.

Parameters

__va	valarray.

Definition at line 1234 of file valarray.

References std::__addressof(), and std::valarray< _Tp >::size().

Referenced by std::cend(), std::vector< _Tp, _Alloc >::insert(), std::list< _Tp, _Alloc >::merge(), std::vector< _Tp, _Alloc >::operator=(), std::list< _Tp, _Alloc >::remove(), std::list< _Tp, _Alloc >::resize(), std::list< _Tp, _Alloc >::sort(), and std::list< _Tp, _Alloc >::unique().

2.57.2.27 template<class _Tp > const _Tp * std::end (const valarray< _Tp > & __va) [inline]

Return an iterator pointing to one past the last element of the const valarray.

Parameters

__va	valarray.

Definition at line 1244 of file valarray.

References std::__addressof(), and std::valarray< _Tp >::size().

2.57.2.28 template<typename _Tp > _Tp std::valarray< _Tp >::max ( ) const [inline]

Return the maximum element using operator<().

Definition at line 1057 of file valarray.

References std::max_element().

2.57.2.29 template<typename _Tp > _Tp std::valarray< _Tp >::min ( ) const [inline]

Return the minimum element using operator<().

Definition at line 1049 of file valarray.

References std::min_element().

2.57.2.30 template<typename _Tp > valarray< _Tp >::template _UnaryOp< __logical_not >::_Rt std::valarray< _Tp >::operator! ( ) const [inline]

Return a new valarray by applying unary ! to each element.

Definition at line 1092 of file valarray.

2.57.2.31 template<typename _Tp > void std::gslice_array< _Tp >::operator%= (const valarray< _Tp > & __v) const [inline]

Modulo slice elements by corresponding elements of *v*.

Definition at line 207 of file gslice_array.h.

2.57.2.32 template<typename _Tp > void std::mask_array< _Tp >::operator%= (const valarray< _Tp > & __v) const [inline]

Modulo slice elements by corresponding elements of *v*.

Definition at line 197 of file mask_array.h.

2.57.2.33 template<typename _Tp > void std::indirect_array< _Tp >::operator%= (const valarray< _Tp > & __v) const [inline]

Modulo slice elements by corresponding elements of *v*.

Definition at line 196 of file indirect_array.h.

2.57.2.34 template<typename _Tp > void std::slice_array< _Tp >::operator%= (const valarray< _Tp > & __v) const [inline]

Modulo slice elements by corresponding elements of *v*.

Definition at line 268 of file slice_array.h.

2.57.2.35 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator%= (const _Tp & __t) [inline]

Set each element e of array to e % *t*.

Definition at line 1119 of file valarray.

2.57.2.36 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator%= (const valarray< _Tp > & __v) [inline]

Modulo elements of array by corresponding elements of *v*.

Definition at line 1119 of file valarray.

2.57.2.37 template<typename _Tp > void std::gslice_array< _Tp >::operator&= (const valarray< _Tp > & __v) const [inline]

Logical and slice elements with corresponding elements of *v*.

Definition at line 211 of file gslice_array.h.

2.57.2.38 template<typename _Tp > void std::mask_array< _Tp >::operator&= (const valarray< _Tp > & __v) const [inline]

Logical and slice elements with corresponding elements of *v*.

Definition at line 201 of file mask_array.h.

2.57.2.39 template<typename _Tp > void std::indirect_array< _Tp >::operator&= (const valarray< _Tp > & __v) const [inline]

Logical and slice elements with corresponding elements of *v*.

Definition at line 200 of file indirect_array.h.

2.57.2.40 template<typename _Tp > void std::slice_array< _Tp >::operator&= (const valarray< _Tp > & __v) const [inline]

Logical and slice elements with corresponding elements of *v*.

Definition at line 272 of file slice_array.h.

2.57.2.41 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator&= (const _Tp & __t) [inline]

Set each element e of array to e & *t*.

Definition at line 1121 of file valarray.

2.57.2.42 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator&= (const valarray< _Tp > & __v) [inline]

Logical and corresponding elements of *v* with elements of array.

Definition at line 1121 of file valarray.

2.57.2.43 template<typename _Tp > void std::gslice_array< _Tp >::operator*= (const valarray< _Tp > & __v) const [inline]

Multiply slice elements by corresponding elements of *v*.

Definition at line 205 of file gslice_array.h.

2.57.2.44 template<typename _Tp > void std::mask_array< _Tp >::operator*= (const valarray< _Tp > & __v) const [inline]

Multiply slice elements by corresponding elements of *v*.

Definition at line 195 of file mask_array.h.

2.57.2.45 template<typename _Tp > void std::indirect_array< _Tp >::operator*= (const valarray< _Tp > & __v) const [inline]

Multiply slice elements by corresponding elements of *v*.

Definition at line 194 of file indirect_array.h.

2.57.2.46 template<typename _Tp > void std::slice_array< _Tp >::operator*= (const valarray< _Tp > & __v) const [inline]

Multiply slice elements by corresponding elements of *v*.

Definition at line 266 of file slice_array.h.

2.57.2.47 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator*= (const _Tp & __t) [inline]

Multiply each element of array by *t*.

Definition at line 1117 of file valarray.

2.57.2.48 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator*= (const valarray< _Tp > & __v) [inline]

Multiply elements of array by corresponding elements of *v*.

Definition at line 1117 of file valarray.

2.57.2.49 template<typename _Tp > valarray< _Tp >::template _UnaryOp< __unary_plus >::_Rt std::valarray< _Tp >::operator+ ( ) const [inline]

Return a new valarray by applying unary + to each element.

Definition at line 1089 of file valarray.

2.57.2.50 template<typename _Tp > void std::gslice_array< _Tp >::operator+= (const valarray< _Tp > & __v) const [inline]

Add corresponding elements of *v* to slice elements.

Definition at line 208 of file gslice_array.h.

2.57.2.51 template<typename _Tp > void std::mask_array< _Tp >::operator+= (const valarray< _Tp > & __v) const [inline]

Add corresponding elements of *v* to slice elements.

Definition at line 198 of file mask_array.h.

2.57.2.52 template<typename _Tp > void std::indirect_array< _Tp >::operator+= (const valarray< _Tp > & __v) const [inline]

Add corresponding elements of *v* to slice elements.

Definition at line 197 of file indirect_array.h.

2.57.2.53 template<typename _Tp > void std::slice_array< _Tp >::operator+= (const valarray< _Tp > & __v) const [inline]

Add corresponding elements of *v* to slice elements.

Definition at line 269 of file slice_array.h.

2.57.2.54 template<class _Tp> valarray<_Tp> & std::valarray<_Tp>::operator+= (const _Tp & __t) [inline]

Add *t* to each element of array.

Definition at line 1115 of file valarray.

2.57.2.55 template<class _Tp> valarray<_Tp> & std::valarray<_Tp>::operator+= (const valarray<_Tp> & __v) [inline]

Add corresponding elements of *v* to elements of array.

Definition at line 1115 of file valarray.

2.57.2.56 template<typename _Tp> valarray<_Tp>::template _UnaryOp<__negate>::_Rt std::valarray<_Tp>::operator- ( ) const [inline]

Return a new valarray by applying unary - to each element.

Definition at line 1090 of file valarray.

2.57.2.57 template<typename _Tp> void std::gslice_array<_Tp>::operator-= (const valarray<_Tp> & __v) const [inline]

Subtract corresponding elements of *v* from slice elements.

Definition at line 209 of file gslice_array.h.

2.57.2.58 template<typename _Tp> void std::mask_array<_Tp>::operator-= (const valarray<_Tp> & __v) const [inline]

Subtract corresponding elements of *v* from slice elements.

Definition at line 199 of file mask_array.h.

2.57.2.59 template<typename _Tp> void std::indirect_array<_Tp>::operator-= (const valarray<_Tp> & __v) const [inline]

Subtract corresponding elements of *v* from slice elements.

Definition at line 198 of file indirect_array.h.

2.57.2.60 template<typename _Tp> void std::slice_array<_Tp>::operator-= (const valarray<_Tp> & __v) const [inline]

Subtract corresponding elements of *v* from slice elements.

Definition at line 270 of file slice_array.h.

2.57.2.61 template<class _Tp> valarray<_Tp> & std::valarray<_Tp>::operator-= (const _Tp & __t) [inline]

Subtract *t* to each element of array.

Definition at line 1116 of file valarray.

2.57.2.62 template<class _Tp> valarray<_Tp> & std::valarray<_Tp>::operator-= (const valarray<_Tp> & __v) [inline]

Subtract corresponding elements of *v* from elements of array.

Definition at line 1116 of file valarray.

2.57.2.63 template<typename _Tp > void std::gslice_array< _Tp >::operator/= (const valarray< _Tp > & __v) const [inline]

Divide slice elements by corresponding elements of *v*.

Definition at line 206 of file gslice_array.h.

2.57.2.64 template<typename _Tp > void std::mask_array< _Tp >::operator/= (const valarray< _Tp > & __v) const [inline]

Divide slice elements by corresponding elements of *v*.

Definition at line 196 of file mask_array.h.

2.57.2.65 template<typename _Tp > void std::indirect_array< _Tp >::operator/= (const valarray< _Tp > & __v) const [inline]

Divide slice elements by corresponding elements of *v*.

Definition at line 195 of file indirect_array.h.

2.57.2.66 template<typename _Tp > void std::slice_array< _Tp >::operator/= (const valarray< _Tp > & __v) const [inline]

Divide slice elements by corresponding elements of *v*.

Definition at line 267 of file slice_array.h.

2.57.2.67 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator/= (const _Tp & __t) [inline]

Divide each element of array by *t*.

Definition at line 1118 of file valarray.

2.57.2.68 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator/= (const valarray< _Tp > & __v) [inline]

Divide elements of array by corresponding elements of *v*.

Definition at line 1118 of file valarray.

2.57.2.69 template<typename _Tp > void std::gslice_array< _Tp >::operator<<= (const valarray< _Tp > & __v) const [inline]

Left shift slice elements by corresponding elements of *v*.

Definition at line 213 of file gslice_array.h.

2.57.2.70 template<typename _Tp > void std::mask_array< _Tp >::operator<<= (const valarray< _Tp > & __v) const [inline]

Left shift slice elements by corresponding elements of *v*.

Definition at line 203 of file mask_array.h.

2.57.2.71 template<typename _Tp > void std::indirect_array< _Tp >::operator<<= (const valarray< _Tp > & __v) const [inline]

Left shift slice elements by corresponding elements of *v*.

Definition at line 202 of file indirect_array.h.

2.57.2.72 template<typename _Tp > void std::slice_array< _Tp >::operator<<= (const valarray< _Tp > & __v) const [inline]

Left shift slice elements by corresponding elements of *v*.

Definition at line 274 of file slice_array.h.

2.57.2.73 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator<<= (const _Tp & __t) [inline]

Left shift each element e of array by *t* bits.

Definition at line 1123 of file valarray.

2.57.2.74 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator<<= (const valarray< _Tp > & __v) [inline]

Left shift elements of array by corresponding elements of *v*.

Definition at line 1123 of file valarray.

2.57.2.75 template<typename _Tp > gslice_array< _Tp > & std::gslice_array< _Tp >::operator= (const gslice_array< _Tp > & __a) [inline]

Assignment operator. Assigns slice elements to corresponding elements of *a*.

Definition at line 153 of file gslice_array.h.

2.57.2.76 template<typename _Tp > indirect_array< _Tp > & std::indirect_array< _Tp >::operator= (const indirect_array< _Tp > & __a) [inline]

Assignment operator. Assigns elements to corresponding elements of *a*.

Definition at line 154 of file indirect_array.h.

2.57.2.77 template<typename _Tp > mask_array< _Tp > & std::mask_array< _Tp >::operator= (const mask_array< _Tp > & __a) [inline]

Assignment operator. Assigns elements to corresponding elements of *a*.

Definition at line 154 of file mask_array.h.

2.57.2.78 template<typename _Tp > void std::gslice_array< _Tp >::operator= (const valarray< _Tp > & __v) const [inline]

Assign slice elements to corresponding elements of *v*.

Definition at line 171 of file gslice_array.h.

References std::valarray< _Tp >::size().

2.57.2.79 template<typename _Tp > void std::indirect_array< _Tp >::operator= (const valarray< _Tp > & __v) const [inline]

Assign slice elements to corresponding elements of *v*.

Definition at line 168 of file indirect_array.h.

2.57.2.80 gslice & std::gslice::operator= (const gslice & __g) [inline]

Assignment operator.

Definition at line 170 of file gslice.h.

2.57.2.81 template<typename _Tp > void std::gslice_array< _Tp >::operator= (const _Tp & __t) const [inline]

Assign all slice elements to *t*.

Definition at line 163 of file gslice_array.h.

2.57.2.82 template<typename _Tp > void std::mask_array< _Tp >::operator= (const _Tp & __t) const [inline]

Assign all slice elements to *t*.

Definition at line 163 of file mask_array.h.

2.57.2.83 template<typename _Tp > void std::indirect_array< _Tp >::operator= (const _Tp & __t) const [inline]

Assign all slice elements to *t*.

Definition at line 163 of file indirect_array.h.

2.57.2.84 template<typename _Tp > slice_array< _Tp > & std::slice_array< _Tp >::operator= (const slice_array< _Tp > & __a) [inline]

Assignment operator. Assigns slice elements to corresponding elements of *a*.

Definition at line 225 of file slice_array.h.

2.57.2.85 template<typename _Tp > void std::slice_array< _Tp >::operator= (const valarray< _Tp > & __v) const [inline]

Assign slice elements to corresponding elements of *v*.

Definition at line 239 of file slice_array.h.

2.57.2.86 template<typename _Tp > void std::slice_array< _Tp >::operator= (const _Tp & __t) const [inline]

Assign all slice elements to *t*.

Definition at line 234 of file slice_array.h.

2.57.2.87 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const valarray< _Tp > & __v) [inline]

Assign elements to an array.

Assign elements of array to values in *v*.

Parameters

__v	Valarray to get values from.

Definition at line 724 of file valarray.

2.57.2.88 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (valarray< _Tp > && __v) [inline], [noexcept]

Move assign elements to an array.

Move assign elements of array to values in *v*.

Parameters

__v	Valarray to get values from.

Definition at line 748 of file valarray.

2.57.2.89 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const _Tp & __t) [inline]

Assign elements to a value.

Assign all elements of array to *t*.

Parameters

__t	Value for elements.

Definition at line 788 of file valarray.

2.57.2.90 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const slice_array< _Tp > & __sa) [inline]

Assign elements to an array subset.

Assign elements of array to values in *sa*. Results are undefined if *sa* does not have the same size as this array.

Parameters

__sa	Array slice to get values from.

Definition at line 796 of file valarray.

2.57.2.91 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const gslice_array< _Tp > & __ga) [inline]

Assign elements to an array subset.

Assign elements of array to values in *ga*. Results are undefined if *ga* does not have the same size as this array.

Parameters

__ga	Array slice to get values from.

Definition at line 806 of file valarray.

References std::valarray< _Tp >::size().

2.57.2.92 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const mask_array< _Tp > & __ma) [inline]

Assign elements to an array subset.

Assign elements of array to values in *ma*. Results are undefined if *ma* does not have the same size as this array.

Parameters

__ma	Array slice to get values from.

Definition at line 816 of file valarray.

2.57.2.93 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (const indirect_array< _Tp > & __ia) [inline]

Assign elements to an array subset.

Assign elements of array to values in *ia*. Results are undefined if *ia* does not have the same size as this array.

Parameters

__ia	Array slice to get values from.

Definition at line 826 of file valarray.

2.57.2.94 template<typename _Tp> valarray< _Tp > & std::valarray< _Tp >::operator= (initializer_list< _Tp > __l) [inline]

Assign elements to an initializer_list.

Assign elements of array to values in *__l*. Results are undefined if *__l* does not have the same size as this array.

Parameters

__l	initializer_list to get values from.

Definition at line 764 of file valarray.

2.57.2.95 template<typename _Tp > void std::gslice_array< _Tp >::operator>>= (const valarray< _Tp > & __v) const [inline]

Right shift slice elements by corresponding elements of *v*.

Definition at line 214 of file gslice_array.h.

2.57.2.96 template<typename _Tp > void std::mask_array< _Tp >::operator>>= (const valarray< _Tp > & __v) const [inline]

Right shift slice elements by corresponding elements of *v*.

Definition at line 204 of file mask_array.h.

2.57.2.97 template<typename _Tp > void std::indirect_array< _Tp >::operator>>= (const valarray< _Tp > & __v) const [inline]

Right shift slice elements by corresponding elements of *v*.

Definition at line 203 of file indirect_array.h.

2.57.2.98 template<typename _Tp > void std::slice_array< _Tp >::operator>>= (const valarray< _Tp > & __v) const [inline]

Right shift slice elements by corresponding elements of *v*.

Definition at line 275 of file slice_array.h.

2.57.2.99 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator>>= (const _Tp & __t) [inline]

Right shift each element e of array by *t* bits.

Definition at line 1124 of file valarray.

2.57.2.100 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator>>= (const valarray< _Tp > & __v) [inline]

Right shift elements of array by corresponding elements of *v*.

Definition at line 1124 of file valarray.

2.57.2.101 template<typename _Tp > _Tp & std::valarray< _Tp >::operator[] (size_t __i) [inline]

Return a reference to the i'th array element.

Parameters

__i	Index of element to return.

Returns

Reference to the i'th element.

Definition at line 592 of file valarray.

2.57.2.102 template<typename _Tp > _Expr< _SClos< _ValArray, _Tp >, _Tp > std::valarray< _Tp >::operator[] (slice __s) const [inline]

Return an array subset.

Returns a new valarray containing the elements of the array indicated by the slice argument. The new valarray has the same size as the input slice.

See Also

slice.

Parameters

__s	The source slice.

Returns

New valarray containing elements in *__s*.

Definition at line 858 of file valarray.

2.57.2.103 template<typename _Tp > slice_array< _Tp > std::valarray< _Tp >::operator[] (slice __s) [inline]

Return a reference to an array subset.

Returns a new valarray containing the elements of the array indicated by the slice argument. The new valarray has the same size as the input slice.

See Also

slice.

Parameters

__s	The source slice.

Returns

New valarray containing elements in *__s*.

Definition at line 866 of file valarray.

2.57.2.104 template<typename _Tp > _Expr< _GClos< _ValArray, _Tp >, _Tp > std::valarray< _Tp >::operator[] (const gslice & __s) const [inline]

Return an array subset.

Returns a slice_array referencing the elements of the array indicated by the slice argument.

See Also

gslice.

Parameters

__s	The source slice.

Returns

Slice_array referencing elements indicated by *__s*.

Definition at line 871 of file valarray.

2.57.2.105 template<typename _Tp > gslice_array< _Tp > std::valarray< _Tp >::operator[] (const gslice & __s) [inline]

Return a reference to an array subset.

Returns a new valarray containing the elements of the array indicated by the gslice argument. The new valarray has the same size as the input gslice.

See Also

gslice.

Parameters

__s	The source gslice.

Returns

New valarray containing elements in *__s*.

Definition at line 880 of file valarray.

2.57.2.106 template<typename _Tp > valarray< _Tp > std::valarray< _Tp >::operator[] (const valarray< bool > & __m) const [inline]

Return an array subset.

Returns a new valarray containing the elements of the array indicated by the argument. The input is a valarray of bool which represents a bitmask indicating which elements should be copied into the new valarray. Each element of the array is added to the return valarray if the corresponding element of the argument is true.

Parameters

__m	The valarray bitmask.

Returns

New valarray containing elements indicated by *__m*.

Definition at line 888 of file valarray.

References std::valarray< _Tp >::size().

2.57.2.107 template<typename _Tp > mask_array< _Tp > std::valarray< _Tp >::operator[] (const valarray< bool > & __m) [inline]

Return a reference to an array subset.

Returns a new mask_array referencing the elements of the array indicated by the argument. The input is a valarray of bool which represents a bitmask indicating which elements are part of the subset. Elements of the array are part of the subset if the corresponding element of the argument is true.

Parameters

__m	The valarray bitmask.

Returns

New valarray containing elements indicated by *__m*.

Definition at line 900 of file valarray.

References std::valarray< _Tp >::size().

2.57.2.108 template<typename _Tp > _Expr< _IClos< _ValArray, _Tp >, _Tp > std::valarray< _Tp >::operator[] (const valarray< size_t > & __i) const [inline]

Return an array subset.

Returns a new valarray containing the elements of the array indicated by the argument. The elements in the argument are interpreted as the indices of elements of this valarray to copy to the return valarray.

Parameters

__i	The valarray element index list.

Returns

New valarray containing elements in *__s*.

Definition at line 911 of file valarray.

2.57.2.109 template<typename _Tp > indirect_array< _Tp > std::valarray< _Tp >::operator[] (const valarray< size_t > & __i) [inline]

Return a reference to an array subset.

Returns an indirect_array referencing the elements of the array indicated by the argument. The elements in the argument are interpreted as the indices of elements of this valarray to include in the subset. The returned indirect_array refers to these elements.

Parameters

__i	The valarray element index list.

Returns

Indirect_array referencing elements in *__i*.

Definition at line 919 of file valarray.

References std::valarray< _Tp >::size().

2.57.2.110 template<typename _Tp > void std::gslice_array< _Tp >::operator^= (const valarray< _Tp > & __v) const [inline]

Logical xor slice elements with corresponding elements of *v*.

Definition at line 210 of file gslice_array.h.

2.57.2.111 template<typename _Tp > void std::mask_array< _Tp >::operator^= (const valarray< _Tp > & __v) const [inline]

Logical xor slice elements with corresponding elements of *v*.

Definition at line 200 of file mask_array.h.

2.57.2.112 template<typename _Tp > void std::indirect_array< _Tp >::operator^= (const valarray< _Tp > & __v) const [inline]

Logical xor slice elements with corresponding elements of *v*.

Definition at line 199 of file indirect_array.h.

2.57.2.113 template<typename _Tp > void std::slice_array< _Tp >::operator^= (const valarray< _Tp > & __v) const [inline]

Logical xor slice elements with corresponding elements of *v*.

Definition at line 271 of file slice_array.h.

2.57.2.114 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator^= (const _Tp & __t) [inline]

Set each element e of array to e ^ *t*.

Definition at line 1120 of file valarray.

2.57.2.115 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator^= (const valarray< _Tp > & __v) [inline]

Logical xor corresponding elements of *v* with elements of array.

Definition at line 1120 of file valarray.

2.57.2.116 template<typename _Tp > void std::gslice_array< _Tp >::operator|= (const valarray< _Tp > & __v) const [inline]

Logical or slice elements with corresponding elements of *v*.

Definition at line 212 of file gslice_array.h.

2.57.2.117 template<typename _Tp > void std::mask_array< _Tp >::operator|= (const valarray< _Tp > & __v) const [inline]

Logical or slice elements with corresponding elements of *v*.

Definition at line 202 of file mask_array.h.

2.57.2.118 template<typename _Tp > void std::indirect_array< _Tp >::operator|= (const valarray< _Tp > & __v) const [inline]

Logical or slice elements with corresponding elements of *v*.

Definition at line 201 of file indirect_array.h.

2.57.2.119 template<typename _Tp > void std::slice_array< _Tp >::operator|= (const valarray< _Tp > & __v) const [inline]

Logical or slice elements with corresponding elements of *v*.

Definition at line 273 of file slice_array.h.

2.57.2.120 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator|= (const _Tp & __t) [inline]

Set each element e of array to e | *t*.

Definition at line 1122 of file valarray.

2.57.2.121 template<class _Tp> valarray< _Tp > & std::valarray< _Tp >::operator|= (const valarray< _Tp > & __v) [inline]

Logical or corresponding elements of *v* with elements of array.

Definition at line 1122 of file valarray.

2.57.2.122 template<typename _Tp > valarray< _Tp >::template _UnaryOp< __bitwise_not >::_Rt std::valarray< _Tp >::operator~ ( ) const [inline]

Return a new valarray by applying unary ~ to each element.

Definition at line 1091 of file valarray.

2.57.2.123 template<class _Tp> void std::valarray< _Tp >::resize (size_t __size, _Tp __c = _Tp()) [inline]

Resize array.

Resize this array to *size* and set all elements to *c*. All references and iterators are invalidated.

Parameters

__size	New array size.
__c	New value for all elements.

Definition at line 1032 of file valarray.

2.57.2.124 template<class _Tp > valarray< _Tp > std::valarray< _Tp >::shift (int __n) const [inline]

Return a shifted array.

A new valarray is constructed as a copy of this array with elements in shifted positions. For an element with index i, the new position is i - n. The new valarray has the same size as the current one. New elements without a value are set to 0. Elements whose new position is outside the bounds of the array are discarded.

Positive arguments shift toward index 0, discarding elements [0, n). Negative arguments discard elements from the top of the array.

Parameters

__n	Number of element positions to shift.

Returns

New valarray with elements in shifted positions.

Definition at line 950 of file valarray.

2.57.2.125 size_t std::slice::size ( ) const [inline]

Return size of slice.

Definition at line 107 of file slice_array.h.

2.57.2.126 valarray< size_t > std::gslice::size ( ) const [inline]

Return array of sizes of slice dimensions.

Definition at line 139 of file gslice.h.

2.57.2.127 template<class _Tp > size_t std::valarray< _Tp >::size ( ) const [inline]

Return the number of elements in array.

Definition at line 937 of file valarray.

Referenced by std::end(), std::gslice_array< _Tp >::operator=(), std::valarray< _Tp >::operator=(), and std::valarray< _Tp >::operator[]().

2.57.2.128 size_t std::slice::start ( ) const [inline]

Return array offset of first slice element.

Definition at line 103 of file slice_array.h.

2.57.2.129 size_t std::gslice::start ( ) const [inline]

Return array offset of first slice element.

Definition at line 135 of file gslice.h.

2.57.2.130 size_t std::slice::stride ( ) const [inline]

Return array stride of slice.

Definition at line 111 of file slice_array.h.

2.57.2.131 valarray< size_t > std::gslice::stride ( ) const [inline]

Return array of array strides for each dimension.

Definition at line 143 of file gslice.h.

2.57.2.132 template<class _Tp > _Tp std::valarray< _Tp >::sum ( ) const [inline]

Return the sum of all elements in the array.

Accumulates the sum of all elements into a Tp using +=. The order of adding the elements is unspecified.

Definition at line 942 of file valarray.

2.57.2.133 template<class _Tp> void std::valarray< _Tp >::swap (valarray< _Tp > & __v) [inline], [noexcept]

Swap.

Definition at line 928 of file valarray.

2.58 Numerics

Collaboration diagram for Numerics:

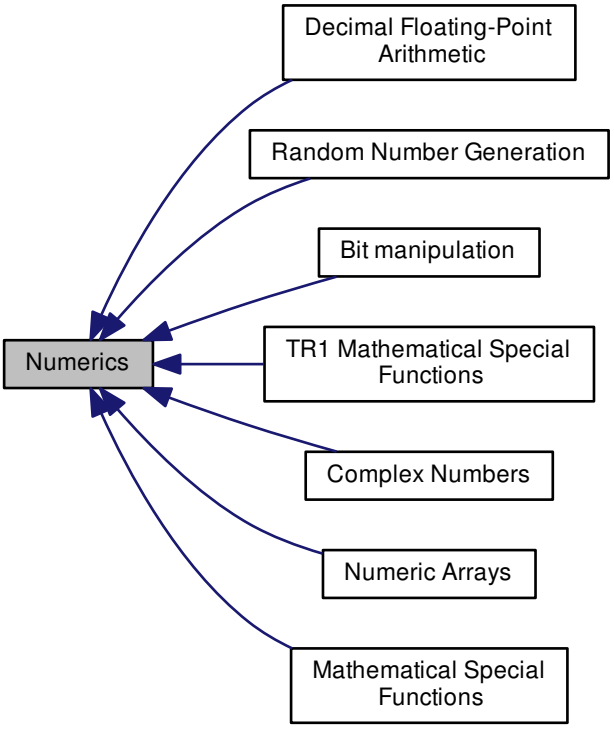

Modules

- Bit manipulation
- Complex Numbers
- Decimal Floating-Point Arithmetic
- Mathematical Special Functions
- Numeric Arrays
- Random Number Generation
- TR1 Mathematical Special Functions

2.58.1 Detailed Description

Components for performing numeric operations. Includes support for complex number types, random number generation, numeric (n-at-a-time) arrays, generalized numeric algorithms, and mathematical special functions.

2.59 Optional values

Collaboration diagram for Optional values:



Classes

- class std::experimental::fundamentals_v1::bad_optional_access
- struct std::experimental::fundamentals_v1::in_place_t
- struct std::experimental::fundamentals_v1::nullopt_t
- class std::experimental::fundamentals_v1::optional< _Tp >

Macros

- #define **__cpp_lib_experimental_optional**

Variables

- constexpr in_place_t std::experimental::fundamentals_v1::in_place
- constexpr nullopt_t std::experimental::fundamentals_v1::nullopt

2.59.1 Detailed Description

Class template for optional values and surrounding facilities, as described in n3793 "A proposal to add a utility class to represent optional objects (Revision 5)".

2.59.2 Variable Documentation

2.59.2.1 constexpr in_place_t std::experimental::fundamentals_v1::in_place

Tag for in-place construction.

Definition at line 77 of file experimental/optional.

2.59.2.2 constexpr nullopt_t std::experimental::fundamentals_v1::nullopt

Tag to disengage optional objects.

Definition at line 96 of file experimental/optional.

2.60 Pointer Abstractions

Collaboration diagram for Pointer Abstractions:



Classes

- struct std::default_delete< _Tp >
- struct std::default_delete< _Tp[]>
- class std::enable_shared_from_this< _Tp >
- struct std::hash< shared_ptr< _Tp > >
- struct std::hash< unique_ptr< _Tp, _Dp > >
- struct std::owner_less< _Tp >
- struct std::owner_less< shared_ptr< _Tp > >
- struct std::owner_less< void >
- struct std::owner_less< weak_ptr< _Tp > >
- struct std::pointer_traits< _Ptr >
- struct std::pointer_traits< _Tp * >
- class std::shared_ptr< _Tp >
- class std::unique_ptr< _Tp, _Dp >
- class std::unique_ptr< _Tp[], _Dp >
- class std::weak_ptr< _Tp >

Functions

- template<typename _Del , typename _Tp , _Lock_policy _Lp>
  _Del * **std::get_deleter** (const __shared_ptr< _Tp, _Lp > &__p) noexcept
- template<typename _Del , typename _Tp >
  _Del * get_deleter (const shared_ptr< _Tp > &__p) noexcept
- template<typename _Ch , typename _Tr , typename _Tp , _Lock_policy _Lp>
  std::basic_ostream< _Ch, _Tr > & operator<< (std::basic_ostream< _Ch, _Tr > &__os, const __shared_ptr< _Tp, _Lp > &__p)
- template<typename _Tp >
  void swap (weak_ptr< _Tp > &__a, weak_ptr< _Tp > &__b) noexcept

- template<typename _Tp , typename _Up >
  bool operator== (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator== (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator== (nullptr_t, const shared_ptr< _Tp > &__a) noexcept

- template<typename _Tp , typename _Up >
  bool operator!= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator!= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator!= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator< (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator< (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator< (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator<= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator<= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator<= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator> (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator> (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator> (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator>= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator>= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator>= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp >
  void swap (shared_ptr< _Tp > &__a, shared_ptr< _Tp > &__b) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > static_pointer_cast (const shared_ptr< _Up > &__r) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > const_pointer_cast (const shared_ptr< _Up > &__r) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > dynamic_pointer_cast (const shared_ptr< _Up > &__r) noexcept

- template<typename _Tp , typename _Alloc , typename... _Args>
  shared_ptr< _Tp > allocate_shared (const _Alloc &__a, _Args &&...__args)
- template<typename _Tp , typename... _Args>
  shared_ptr< _Tp > make_shared (_Args &&...__args)

- template<typename _Tp , _Lock_policy _Lp>
  bool atomic_is_lock_free (const __shared_ptr< _Tp, _Lp > *__p)

- template<typename _Tp >
  shared_ptr< _Tp > atomic_load_explicit (const shared_ptr< _Tp > *__p, memory_order)

- template<typename _Tp >
  void atomic_store_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order)

- template<typename _Tp >
  shared_ptr< _Tp > atomic_exchange_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order)

- template<typename _Tp >
  bool atomic_compare_exchange_strong_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w, memory_order, memory_order)

- template<typename _Tp , typename _Dp >
  enable_if< __is_swappable< _Dp >
  ::value >::type swap (unique_ptr< _Tp, _Dp > &__x, unique_ptr< _Tp, _Dp > &__y) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator== (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator== (const unique_ptr< _Tp, _Dp > &__x, nullptr_t) noexcept
- template<typename _Tp , typename _Dp >
  bool operator== (nullptr_t, const unique_ptr< _Tp, _Dp > &__x) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator!= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator!= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t) noexcept
- template<typename _Tp , typename _Dp >
  bool operator!= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator< (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator< (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator< (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator<= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator<= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator<= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator> (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator> (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator> (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator>= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator>= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator>= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)

- template<typename _Tp , typename... _Args>
  _MakeUniq< _Tp >::__single_object make_unique (_Args &&...__args)
- template<typename _Tp >
  _MakeUniq< _Tp >::__array make_unique (size_t __num)

- template<typename _Tp , typename... _Args>
  _MakeUniq< _Tp >::__invalid_type make_unique (_Args &&...)=delete
- #define __cpp_lib_make_unique

2.60.1 Detailed Description

Smart pointers, etc.

2.60.2 Macro Definition Documentation

2.60.2.1 #define __cpp_lib_make_unique

Definition at line 940 of file unique_ptr.h.

2.60.3 Function Documentation

2.60.3.1 template<typename _Tp , typename _Alloc , typename... _Args> shared_ptr< _Tp > allocate_shared (const _Alloc & *__a*, _Args &&... *__args*) [related]

Create an object that is owned by a shared_ptr.

Parameters

__a	An allocator.
__args	Arguments for the *_Tp* object's constructor.

Returns

A shared_ptr that owns the newly created object.

Exceptions

An	exception thrown from *_Alloc::allocate* or from the constructor of *_Tp*.

A copy of *__a* will be used to allocate memory for the shared_ptr and the new object.

Definition at line 857 of file bits/shared_ptr.h.

2.60.3.2 template<typename _Tp > bool atomic_compare_exchange_strong_explicit (shared_ptr< _Tp > * *__p*, shared_ptr< _Tp > * *__v*, shared_ptr< _Tp > *__w*, memory_order , memory_order) [related]

Atomic compare-and-swap for shared_ptr objects.

Parameters

__p	A non-null pointer to a shared_ptr object.
__v	A non-null pointer to a shared_ptr object.
__w	A non-null pointer to a shared_ptr object.

Returns

True if `*__p` was equivalent to `*__v`, false otherwise.

The memory order for failure shall not be `memory_order_release` or `memory_order_acq_rel`, or stronger than the memory order for success.

Definition at line 225 of file shared_ptr_atomic.h.

References std::move().

2.60.3.3 template<typename _Tp > shared_ptr< _Tp > atomic_exchange_explicit (shared_ptr< _Tp > * __p, shared_ptr< _Tp > __r, memory_order) [related]

Atomic exchange for shared_ptr objects.

Parameters

__p	A non-null pointer to a shared_ptr object.
__r	New value to store in *__p.

Returns

The original value of *__p

Definition at line 176 of file shared_ptr_atomic.h.

References std::shared_ptr< _Tp >::swap().

2.60.3.4 template<typename _Tp , _Lock_policy _Lp> bool atomic_is_lock_free (const __shared_ptr< _Tp, _Lp > * __p) [related]

Report whether shared_ptr atomic operations are lock-free.

Parameters

__p	A non-null pointer to a shared_ptr object.

Returns

True if atomic access to *__p is lock-free, false otherwise.

Definition at line 76 of file shared_ptr_atomic.h.

2.60.3.5 template<typename _Tp > shared_ptr< _Tp > atomic_load_explicit (const shared_ptr< _Tp > * __p, memory_order) [related]

Atomic load for shared_ptr objects.

Parameters

__p	A non-null pointer to a shared_ptr object.

Returns

*__p

The memory order shall not be memory_order_release or memory_order_acq_rel.

Definition at line 103 of file shared_ptr_atomic.h.

2.60.3.6 template<typename _Tp > void atomic_store_explicit (shared_ptr< _Tp > * __p, shared_ptr< _Tp > __r, memory_order) [related]

Atomic store for shared_ptr objects.

Parameters

__p	A non-null pointer to a shared_ptr object.
__r	The value to store.

The memory order shall not be `memory_order_acquire` or `memory_order_acq_rel`.

Definition at line 139 of file shared_ptr_atomic.h.

References std::shared_ptr< _Tp >::swap().

2.60.3.7 template<typename _Tp , typename _Up > shared_ptr< _Tp > const_pointer_cast (const shared_ptr< _Up > & *__r*) [related]

Convert type of `shared_ptr`, via `const_cast`

Definition at line 590 of file bits/shared_ptr.h.

2.60.3.8 template<typename _Tp , typename _Up > shared_ptr< _Tp > dynamic_pointer_cast (const shared_ptr< _Up > & *__r*) [related]

Convert type of `shared_ptr`, via `dynamic_cast`

Definition at line 599 of file bits/shared_ptr.h.

2.60.3.9 template<typename _Del , typename _Tp > _Del * get_deleter (const shared_ptr< _Tp > & *__p*) [related]

20.7.2.2.10 shared_ptr get_deleter

If `__p` has a deleter of type `_Del`, return a pointer to it.

Definition at line 93 of file bits/shared_ptr.h.

2.60.3.10 template<typename _Tp , typename... _Args> shared_ptr< _Tp > make_shared (_Args &&... *__args*) [related]

Create an object that is owned by a shared_ptr.

Parameters

__args	Arguments for the *_Tp* object's constructor.

Returns

A shared_ptr that owns the newly created object.

Exceptions

std::bad_alloc,or	an exception thrown from the constructor of *_Tp*.

Definition at line 872 of file bits/shared_ptr.h.

2.60.3.11 template<typename _Tp , typename... _Args> _MakeUniq< _Tp >::__single_object make_unique (_Args &&... *__args*) [related]

std::make_unique for single objects

Definition at line 961 of file unique_ptr.h.

2.60.3.12 template<typename _Tp > _MakeUniq< _Tp >::__array make_unique (size_t *__num*) [related]

std::make_unique for arrays of unknown bound

Definition at line 967 of file unique_ptr.h.

2.60.3.13 template<typename _Tp , typename... _Args> _MakeUniq< _Tp >::__invalid_type make_unique (_Args && ...) [related]

Disable std::make_unique for arrays of known bound.

2.60.3.14 template<typename _Tp , typename _Up > bool operator!= (const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Inequality operator for shared_ptr objects, compares the stored pointers.

Definition at line 469 of file bits/shared_ptr.h.

2.60.3.15 template<typename _Tp > bool operator!= (const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 475 of file bits/shared_ptr.h.

2.60.3.16 template<typename _Tp > bool operator!= (nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 481 of file bits/shared_ptr.h.

2.60.3.17 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator!= (const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Inequality operator for unique_ptr objects, compares the owned pointers.

Definition at line 774 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get().

2.60.3.18 template<typename _Tp , typename _Dp > bool operator!= (const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 781 of file unique_ptr.h.

2.60.3.19 template<typename _Tp , typename _Dp > bool operator!= (nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 787 of file unique_ptr.h.

2.60.3.20 template<typename _Tp , typename _Up > bool operator< (const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Relational operator for shared_ptr objects, compares the stored pointers.

Definition at line 487 of file bits/shared_ptr.h.

2.60.3.21 template<typename _Tp > bool operator< (const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 498 of file bits/shared_ptr.h.

2.60.3.22 template<typename _Tp > bool operator<(nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 507 of file bits/shared_ptr.h.

2.60.3.23 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator<(const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Relational operator for unique_ptr objects, compares the owned pointers.

Definition at line 795 of file unique_ptr.h.

2.60.3.24 template<typename _Tp , typename _Dp > bool operator<(const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 807 of file unique_ptr.h.

2.60.3.25 template<typename _Tp , typename _Dp > bool operator<(nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 816 of file unique_ptr.h.

2.60.3.26 template<typename _Ch , typename _Tr , typename _Tp , _Lock_policy _Lp> std::basic_ostream< _Ch, _Tr > & operator<<(std::basic_ostream< _Ch, _Tr > & __os, const __shared_ptr< _Tp, _Lp > & __p) [related]

Write the stored pointer to an ostream.

Definition at line 69 of file bits/shared_ptr.h.

2.60.3.27 template<typename _Tp , typename _Up > bool operator<=(const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Relational operator for shared_ptr objects, compares the stored pointers.

Definition at line 516 of file bits/shared_ptr.h.

2.60.3.28 template<typename _Tp > bool operator<=(const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 522 of file bits/shared_ptr.h.

2.60.3.29 template<typename _Tp > bool operator<=(nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 528 of file bits/shared_ptr.h.

2.60.3.30 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator<=(const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Relational operator for unique_ptr objects, compares the owned pointers.

Definition at line 826 of file unique_ptr.h.

2.60.3.31 template<typename _Tp , typename _Dp > bool operator<= (const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 833 of file unique_ptr.h.

2.60.3.32 template<typename _Tp , typename _Dp > bool operator<= (nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 839 of file unique_ptr.h.

2.60.3.33 template<typename _Tp , typename _Up > bool operator== (const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Equality operator for shared_ptr objects, compares the stored pointers.

Definition at line 436 of file bits/shared_ptr.h.

2.60.3.34 template<typename _Tp > bool operator== (const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 442 of file bits/shared_ptr.h.

2.60.3.35 template<typename _Tp > bool operator== (nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 463 of file bits/shared_ptr.h.

2.60.3.36 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator== (const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Equality operator for unique_ptr objects, compares the owned pointers.

Definition at line 753 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get().

2.60.3.37 template<typename _Tp , typename _Dp > bool operator== (const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 760 of file unique_ptr.h.

2.60.3.38 template<typename _Tp , typename _Dp > bool operator== (nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 767 of file unique_ptr.h.

2.60.3.39 template<typename _Tp , typename _Up > bool operator> (const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Relational operator for shared_ptr objects, compares the stored pointers.

Definition at line 534 of file bits/shared_ptr.h.

2.60.3.40 template<typename _Tp > bool operator>(const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 540 of file bits/shared_ptr.h.

2.60.3.41 template<typename _Tp > bool operator>(nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 546 of file bits/shared_ptr.h.

2.60.3.42 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator>(const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Relational operator for unique_ptr objects, compares the owned pointers.

Definition at line 846 of file unique_ptr.h.

2.60.3.43 template<typename _Tp , typename _Dp > bool operator>(const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 853 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get().

2.60.3.44 template<typename _Tp , typename _Dp > bool operator>(nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 862 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get().

2.60.3.45 template<typename _Tp , typename _Up > bool operator>=(const shared_ptr< _Tp > & __a, const shared_ptr< _Up > & __b) [related]

Relational operator for shared_ptr objects, compares the stored pointers.

Definition at line 552 of file bits/shared_ptr.h.

2.60.3.46 template<typename _Tp > bool operator>=(const shared_ptr< _Tp > & __a, nullptr_t) [related]

shared_ptr comparison with nullptr

Definition at line 558 of file bits/shared_ptr.h.

2.60.3.47 template<typename _Tp > bool operator>=(nullptr_t , const shared_ptr< _Tp > & __a) [related]

shared_ptr comparison with nullptr

Definition at line 564 of file bits/shared_ptr.h.

2.60.3.48 template<typename _Tp , typename _Dp , typename _Up , typename _Ep > bool operator>=(const unique_ptr< _Tp, _Dp > & __x, const unique_ptr< _Up, _Ep > & __y) [related]

Relational operator for unique_ptr objects, compares the owned pointers.

Definition at line 872 of file unique_ptr.h.

2.60.3.49 template<typename _Tp , typename _Dp > bool operator>= (const unique_ptr< _Tp, _Dp > & __x, nullptr_t) [related]

unique_ptr comparison with nullptr

Definition at line 879 of file unique_ptr.h.

2.60.3.50 template<typename _Tp , typename _Dp > bool operator>= (nullptr_t , const unique_ptr< _Tp, _Dp > & __x) [related]

unique_ptr comparison with nullptr

Definition at line 885 of file unique_ptr.h.

2.60.3.51 template<typename _Tp , typename _Up > shared_ptr< _Tp > static_pointer_cast (const shared_ptr< _Up > & __r) [related]

Convert type of `shared_ptr`, via `static_cast`

Definition at line 581 of file bits/shared_ptr.h.

2.60.3.52 template<typename _Tp > void swap (shared_ptr< _Tp > & __a, shared_ptr< _Tp > & __b) [related]

Swap overload for shared_ptr.

Definition at line 573 of file bits/shared_ptr.h.

Referenced by std::shared_ptr< _Tp >::atomic_exchange_explicit(), and std::shared_ptr< _Tp >::atomic_store_explicit().

2.60.3.53 template<typename _Tp , typename _Dp > enable_if< __is_swappable< _Dp >::value >::type swap (unique_ptr< _Tp, _Dp > & __x, unique_ptr< _Tp, _Dp > & __y) [related]

Swap overload for unique_ptr.

Definition at line 738 of file unique_ptr.h.

2.60.3.54 template<typename _Tp > void swap (weak_ptr< _Tp > & __a, weak_ptr< _Tp > & __b) [related]

Swap overload for weak_ptr.

Definition at line 762 of file bits/shared_ptr.h.

2.61 Pointer Safety and Garbage Collection

Collaboration diagram for Pointer Safety and Garbage Collection:



Enumerations

- enum std::pointer_safety { **relaxed**, **preferred**, **strict** }

Functions

- void std::declare_no_pointers (char *, size_t)
- void std::declare_reachable (void *)
- pointer_safety std::get_pointer_safety () noexcept
- void std::undeclare_no_pointers (char *, size_t)
- template<typename _Tp >
  _Tp * std::undeclare_reachable (_Tp *__p)

2.61.1 Detailed Description

Utilities to assist with garbage collection in an implementation that supports *strict pointer safety*. This implementation only supports *relaxed pointer safety* and so these functions have no effect.

C++11 20.6.4 [util.dynamic.safety], Pointer safety

2.61.2 Enumeration Type Documentation

2.61.2.1 enum std::pointer_safety [strong]

Constants representing the different types of pointer safety.

Definition at line 158 of file memory.

2.61.3 Function Documentation

2.61.3.1 void std::declare_no_pointers (char *, size_t) [inline]

Inform a garbage collector that a region of memory need not be traced.

Definition at line 171 of file memory.

2.61.3.2 void std::declare_reachable (void *) [inline]

Inform a garbage collector that an object is still in use.

Definition at line 162 of file memory.

2.61.3.3 pointer_safety std::get_pointer_safety ( ) [inline],[noexcept]

The type of pointer safety supported by the implementation.

Definition at line 179 of file memory.

2.61.3.4 void std::undeclare_no_pointers (char *, size_t) [inline]

Unregister a range previously registered with declare_no_pointers.

Definition at line 175 of file memory.

2.61.3.5 template<typename _Tp > _Tp* std::undeclare_reachable (_Tp * __p) [inline]

Unregister an object previously registered with declare_reachable.

Definition at line 167 of file memory.

2.62 Poisson Distributions

Collaboration diagram for Poisson Distributions:



Classes

- class std::discrete_distribution< _IntType >
- class std::exponential_distribution< _RealType >
- class std::extreme_value_distribution< _RealType >
- class std::piecewise_constant_distribution< _RealType >
- class std::piecewise_linear_distribution< _RealType >
- class std::poisson_distribution< _IntType >
- class std::weibull_distribution< _RealType >

Functions

- template<typename _IntType >
  bool std::operator!= (const std::poisson_distribution< _IntType > &__d1, const std::poisson_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::exponential_distribution< _RealType > &__d1, const std::exponential_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::weibull_distribution< _RealType > &__d1, const std::weibull_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::extreme_value_distribution< _RealType > &__d1, const std::extreme_value_distribution< _RealType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::discrete_distribution< _IntType > &__d1, const std::discrete_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::piecewise_constant_distribution< _RealType > &__d1, const std::piecewise_constant_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::piecewise_linear_distribution< _RealType > &__d1, const std::piecewise_linear_distribution< _RealType > &__d2)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::exponential_distribution< _RealType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::weibull_distribution< _-
  RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::extreme_value_-
  distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::exponential_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::weibull_distribution< _RealType
  > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::extreme_value_distribution< _-
  RealType > &__x)

2.62.1 Detailed Description

2.62.2 Function Documentation

2.62.2.1 template<typename _IntType > bool std::operator!= (const std::poisson_distribution< _IntType > & *__d1*, const std::poisson_distribution< _IntType > & *__d2*) [inline]

Return true if two Poisson distributions are different.

Definition at line 4615 of file random.h.

2.62.2.2 template<typename _RealType > bool std::operator!= (const std::exponential_distribution< _RealType > & *__d1*, const std::exponential_distribution< _RealType > & *__d2*) [inline]

Return true if two exponential distributions have different parameters.

Definition at line 4806 of file random.h.

2.62.2.3 template<typename _RealType > bool std::operator!= (const std::weibull_distribution< _RealType > & *__d1*, const std::weibull_distribution< _RealType > & *__d2*) [inline]

Return true if two Weibull distributions have different parameters.

Definition at line 5016 of file random.h.

2.62.2.4 template<typename _RealType > bool std::operator!= (const std::extreme_value_distribution< _RealType > & *__d1*, const std::extreme_value_distribution< _RealType > & *__d2*) [inline]

Return true if two extreme value distributions have different parameters.

Definition at line 5226 of file random.h.

2.62.2.5 template<typename _IntType > bool std::operator!= (const std::discrete_distribution< _IntType > & *__d1*, const std::discrete_distribution< _IntType > & *__d2*) [inline]

Return true if two discrete distributions have different parameters.

Definition at line 5491 of file random.h.

2.62.2.6 template<typename _RealType > bool std::operator!= (const std::piecewise_constant_distribution< _RealType > & __d1, const std::piecewise_constant_distribution< _RealType > & __d2) [inline]

Return true if two piecewise constant distributions have different parameters.

Definition at line 5762 of file random.h.

2.62.2.7 template<typename _RealType > bool std::operator!= (const std::piecewise_linear_distribution< _RealType > & __d1, const std::piecewise_linear_distribution< _RealType > & __d2) [inline]

Return true if two piecewise linear distributions have different parameters.

Definition at line 6035 of file random.h.

2.62.2.8 template<typename _RealType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::exponential_distribution< _RealType > & __x)

Inserts a exponential_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A exponential_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 1719 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.62.2.9 template<typename _RealType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::weibull_distribution< _RealType > & __x)

Inserts a weibull_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A weibull_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 2504 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.62.2.10 template<typename _RealType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::extreme_value_distribution< _RealType > & __x)

Inserts a extreme_value_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A extreme_value_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 2578 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.62.2.11 template<typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::exponential_distribution< _RealType > & *__x*)

Extracts a exponential_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A exponential_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 1741 of file bits/random.tcc.

References std::dec(), std::ios_base::flags(), std::exponential_distribution< _RealType >::param(), and std::skipws().

2.62.2.12 template<typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::weibull_distribution< _RealType > & *__x*)

Extracts a weibull_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A weibull_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 2527 of file bits/random.tcc.

References std::dec(), std::ios_base::flags(), std::weibull_distribution< _RealType >::param(), and std::skipws().

2.62.2.13 template<typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::extreme_value_distribution< _RealType > & *__x*)

Extracts a extreme_value_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A extreme_value_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 2601 of file bits/random.tcc.

References std::dec(), std::ios_base::flags(), std::extreme_value_distribution< _RealType >::param(), and std::skipws().

2.63 Policy-Based Data Structures

Collaboration diagram for Policy-Based Data Structures:

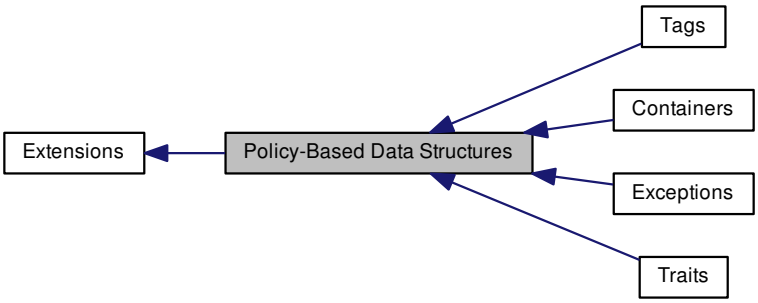

Modules

- Containers
- Exceptions
- Tags
- Traits

2.63.1 Detailed Description

This is a library of policy-based elementary data structures: associative containers and priority queues. It is designed for high-performance, flexibility, semantic safety, and conformance to the corresponding containers in std (except for some points where it differs by design).

For details, see: http://gcc.gnu.org/onlinedocs/libstdc++/ext/pb_ds/index.html

2.64 Random Number Distributions

Collaboration diagram for Random Number Distributions:

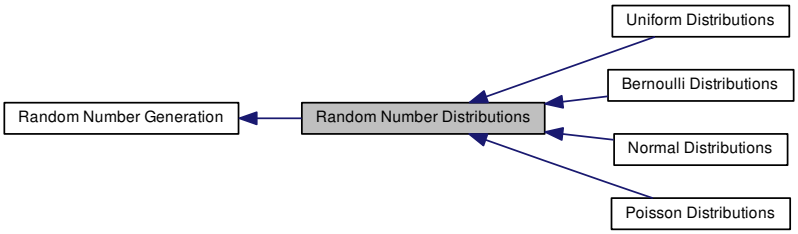

Modules

- Bernoulli Distributions
- Normal Distributions
- Poisson Distributions
- Uniform Distributions

2.64.1 Detailed Description

2.65 Random Number Generation

Collaboration diagram for Random Number Generation:

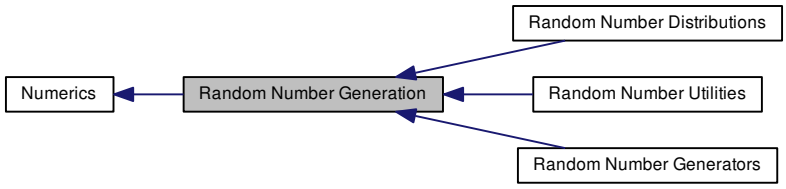

Modules

- Random Number Distributions
- Random Number Generators
- Random Number Utilities

Namespaces

- std::__detail

Functions

- template<typename _RealType , size_t __bits, typename _UniformRandomNumberGenerator >
  _RealType std::generate_canonical (_UniformRandomNumberGenerator &__g)

2.65.1 Detailed Description

A facility for generating random numbers on selected distributions.

2.65.2 Function Documentation

2.65.2.1 template<typename _RealType , size_t __bits, typename _UniformRandomNumberGenerator > _RealType std::generate_canonical (_UniformRandomNumberGenerator & *__g*)

A function template for converting the output of a (integral) uniform random number generator to a floatng point result in the range [0-1).

Definition at line 3279 of file bits/random.tcc.

References std::numeric_limits< _Tp >::epsilon(), std::log(), and std::min().

2.66 Random Number Generators

Collaboration diagram for Random Number Generators:

Classes

- class std::discard_block_engine< _RandomNumberEngine, __p, __r >
- class std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >
- class std::linear_congruential_engine< _UIntType, __a, __c, __m >
- class std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >
- class std::random_device
- class std::shuffle_order_engine< _RandomNumberEngine, __k >
- class std::subtract_with_carry_engine< _UIntType, __w, __s, __r >

Typedefs

- typedef minstd_rand0 **std::default_random_engine**
- typedef shuffle_order_engine < minstd_rand0, 256 > **std::knuth_b**
- typedef linear_congruential_engine < uint_fast32_t, 48271UL, 0UL, 2147483647UL > std::minstd_rand
- typedef linear_congruential_engine < uint_fast32_t, 16807UL, 0UL, 2147483647UL > std::minstd_rand0
- typedef mersenne_twister_engine < uint_fast32_t, 32, 624, 397, 31, 0x9908b0dfUL, 11, 0xffffffffUL, 7, 0x9d2c5680UL, 15, 0xefc60000UL, 18, 1812433253UL > std::mt19937
- typedef mersenne_twister_engine < uint_fast64_t, 64, 312, 156, 31, 0xb5026f5aa96619e9ULL, 29, 0x5555555555555555ULL, 17, 0x71d67fffeda60000ULL, 37, 0xfff7eee000000000ULL, 43, 6364136223846793005ULL > std::mt19937_64
- typedef discard_block_engine < ranlux24_base, 223, 23 > **std::ranlux24**
- typedef subtract_with_carry_engine < uint_fast32_t, 24, 10, 24 > **std::ranlux24_base**
- typedef discard_block_engine < ranlux48_base, 389, 11 > **std::ranlux48**
- typedef subtract_with_carry_engine < uint_fast64_t, 48, 5, 12 > **std::ranlux48_base**

Functions

- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m>
  bool std::operator!= (const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__lhs, const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__rhs)
- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f>
  bool std::operator!= (const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__lhs, const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__rhs)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r>
  bool std::operator!= (const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__lhs, const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__rhs)
- template<typename _RandomNumberEngine , size_t __p, size_t __r>
  bool std::operator!= (const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__lhs, const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__rhs)
- template<typename _RandomNumberEngine , size_t __w, typename _UIntType >
  bool std::operator!= (const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__lhs, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__rhs)
- template<typename _RandomNumberEngine , size_t __k>
  bool std::operator!= (const std::shuffle_order_engine< _RandomNumberEngine, __k > &__lhs, const std::shuffle_order_engine< _RandomNumberEngine, __k > &__rhs)
- template<typename _RandomNumberEngine , size_t __w, typename _UIntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__x)

2.66.1 Detailed Description

These classes define objects which provide random or pseudorandom numbers, either from a discrete or a continuous interval. The random number generator supplied as a part of this library are all uniform random number generators which provide a sequence of random number uniformly distributed over their range.

A number generator is a function object with an operator() that takes zero arguments and returns a number.

A compliant random number generator must satisfy the following requirements.

To be documented.

Table 1: Random Number Generator Requirements

2.66.2 Typedef Documentation

2.66.2.1 typedef linear_congruential_engine<uint_fast32_t, 48271UL, 0UL, 2147483647UL> std::minstd_rand

An alternative LCR (Lehmer Generator function).

Definition at line 1551 of file random.h.

2.66.2.2 typedef linear_congruential_engine<uint_fast32_t, 16807UL, 0UL, 2147483647UL> std::minstd_rand0

The classic Minimum Standard rand0 of Lewis, Goodman, and Miller.

Definition at line 1545 of file random.h.

2.66.2.3 typedef mersenne_twister_engine< uint_fast32_t, 32, 624, 397, 31, 0x9908b0dfUL, 11, 0xffffffffUL, 7, 0x9d2c5680UL, 15, 0xefc60000UL, 18, 1812433253UL> std::mt19937

The classic Mersenne Twister.

Reference: M. Matsumoto and T. Nishimura, Mersenne Twister: A 623-Dimensionally Equidistributed Uniform Pseudo--Random Number Generator, ACM Transactions on Modeling and Computer Simulation, Vol. 8, No. 1, January 1998, pp 3-30.

Definition at line 1567 of file random.h.

2.66.2.4 typedef mersenne_twister_engine< uint_fast64_t, 64, 312, 156, 31, 0xb5026f5aa96619e9ULL, 29, 0x5555555555555555ULL, 17, 0x71d67fffeda60000ULL, 37, 0xfff7eee000000000ULL, 43, 6364136223846793005ULL> std::mt19937_64

An alternative Mersenne Twister.

Definition at line 1579 of file random.h.

2.66.3 Function Documentation

2.66.3.1 template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m> bool std::operator!= (const std::linear_congruential_engine< _UIntType, __a, __c, __m > & *__lhs,* const std::linear_congruential_engine< _UIntType, __a, __c, __m > & *__rhs*) [inline]

Compares two linear congruential random number generator objects of the same type for inequality.

Parameters

__lhs	A linear congruential random number generator object.
__rhs	Another linear congruential random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 423 of file random.h.

2.66.3.2 template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> bool std::operator!= (const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > & *__lhs,* const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > & *__rhs*) [inline]

Compares two % mersenne_twister_engine random number generator objects of the same type for inequality.

Parameters

__lhs	A % mersenne_twister_engine random number generator object.
__rhs	Another % mersenne_twister_engine random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 660 of file random.h.

2.66.3.3 template<typename _UIntType , size_t __w, size_t __s, size_t __r> bool std::operator!= (const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > & *__lhs,* const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > & *__rhs*) [inline]

Compares two % subtract_with_carry_engine random number generator objects of the same type for inequality.

Parameters

__lhs	A % subtract_with_carry_engine random number generator object.
__rhs	Another % subtract_with_carry_engine random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 861 of file random.h.

2.66.3.4 template<typename _RandomNumberEngine , size_t __p, size_t __r> bool std::operator!= (const std::discard_block_engine< _RandomNumberEngine, __p, __r > & *__lhs,* const std::discard_block_engine< _RandomNumberEngine, __p, __r > & *__rhs*) [inline]

Compares two discard_block_engine random number generator objects of the same type for inequality.

Parameters

__lhs	A discard_block_engine random number generator object.
__rhs	Another discard_block_engine random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 1084 of file random.h.

2.66.3.5 template<typename _RandomNumberEngine , size_t __w, typename _UIntType > bool std::operator!= (const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__lhs,* const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__rhs*) [inline]

Compares two independent_bits_engine random number generator objects of the same type for inequality.

Parameters

__lhs	A independent_bits_engine random number generator object.
__rhs	Another independent_bits_engine random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 1281 of file random.h.

2.66.3.6 template<typename _RandomNumberEngine , size_t __k> bool std::operator!= (const std::shuffle_order_engine< _RandomNumberEngine, __k > & *__lhs,* const std::shuffle_order_engine< _RandomNumberEngine, __k > & *__rhs*) [inline]

Compares two shuffle_order_engine random number generator objects of the same type for inequality.

Parameters

__lhs	A shuffle_order_engine random number generator object.
__rhs	Another shuffle_order_engine random number generator object.

Returns

true if the infinite sequences of generated values would be different, false otherwise.

Definition at line 1534 of file random.h.

2.66.3.7 template<typename _RandomNumberEngine , size_t __w, typename _UIntType , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& std::operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__x*)

Inserts the current state of a independent_bits_engine random number generator engine __x into the output stream __os.

Parameters

__os	An output stream.
__x	A independent_bits_engine random number generator engine.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 1300 of file random.h.

References std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::base().

2.67 Random Number Utilities

Collaboration diagram for Random Number Utilities:

Classes

- class std::seed_seq

2.67.1 Detailed Description

2.68 Rational Arithmetic

Collaboration diagram for Rational Arithmetic:



Files

- file ratio

Classes

- struct std::ratio< _Num, _Den >
- struct std::ratio_equal< _R1, _R2 >
- struct std::ratio_greater< _R1, _R2 >
- struct std::ratio_greater_equal< _R1, _R2 >
- struct std::ratio_less< _R1, _R2 >
- struct std::ratio_less_equal< _R1, _R2 >
- struct std::ratio_not_equal< _R1, _R2 >

Typedefs

- typedef ratio< 1, 1000000000000000000 > **std::atto**
- typedef ratio< 1, 100 > **std::centi**
- typedef ratio< 10, 1 > **std::deca**
- typedef ratio< 1, 10 > **std::deci**
- typedef ratio< 1000000000000000000, 1 > **std::exa**
- typedef ratio< 1, 1000000000000000 > **std::femto**
- typedef ratio< 1000000000, 1 > **std::giga**
- typedef ratio< 100, 1 > **std::hecto**
- typedef ratio< 1000, 1 > **std::kilo**
- typedef ratio< 1000000, 1 > **std::mega**
- typedef ratio< 1, 1000000 > **std::micro**
- typedef ratio< 1, 1000 > **std::milli**
- typedef ratio< 1, 1000000000 > **std::nano**
- typedef ratio< 1000000000000000, 1 > **std::peta**
- typedef ratio< 1, 1000000000000 > **std::pico**
- template<typename _R1 , typename _R2 >
  using std::ratio_add = typename __ratio_add< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using std::ratio_divide = typename __ratio_divide< _R1, _R2 >::type

- template<typename _R1 , typename _R2 >
  using std::ratio_multiply = typename __ratio_multiply< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using std::ratio_subtract = typename __ratio_subtract< _R1, _R2 >::type
- typedef ratio< 1000000000000, 1 > **std::tera**

Variables

- static constexpr intmax_t **std::ratio< _Num, _Den >::den**
- static constexpr intmax_t **std::ratio< _Num, _Den >::num**

2.68.1 Detailed Description

Compile time representation of finite rational numbers.

2.68.2 Typedef Documentation

2.68.2.1 template<typename _R1 , typename _R2 > using std::ratio_add = typedef typename __ratio_add<_R1, _R2>::type

ratio_add

Definition at line 525 of file ratio.

2.68.2.2 template<typename _R1 , typename _R2 > using std::ratio_divide = typedef typename __ratio_divide<_R1, _R2>::type

ratio_divide

Definition at line 347 of file ratio.

2.68.2.3 template<typename _R1 , typename _R2 > using std::ratio_multiply = typedef typename __ratio_multiply<_R1, _R2>::type

ratio_multiply

Definition at line 320 of file ratio.

2.68.2.4 template<typename _R1 , typename _R2 > using std::ratio_subtract = typedef typename __ratio_subtract<_R1, _R2>::type

ratio_subtract

Definition at line 550 of file ratio.

2.69 Regular Expressions

Collaboration diagram for Regular Expressions:

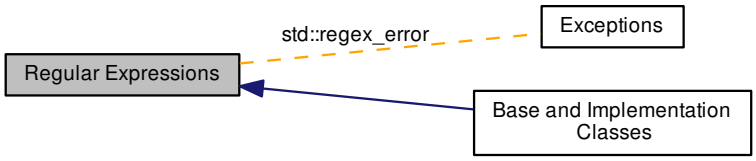

Modules

- Base and Implementation Classes

Namespaces

- std::regex_constants

Classes

- class std::basic_regex< typename, typename >
- class std::match_results< typename, typename >
- class std::regex_error
- class std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >
- class std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >
- class std::regex_traits< _Ch_type >
- class std::sub_match< _BiIter >

Typedefs

- typedef match_results< const char * > **std::cmatch**
- typedef regex_iterator< const char * > **std::cregex_iterator**
- typedef regex_token_iterator < const char * > std::cregex_token_iterator
- typedef sub_match< const char * > std::csub_match
- typedef basic_regex< char > std::regex
- typedef match_results < string::const_iterator > **std::smatch**
- typedef regex_iterator < string::const_iterator > **std::sregex_iterator**
- typedef regex_token_iterator < string::const_iterator > std::sregex_token_iterator

- typedef sub_match < string::const_iterator > std::ssub_match
- typedef match_results< const wchar_t * > **std::wcmatch**
- typedef regex_iterator< const wchar_t * > **std::wcregex_iterator**
- typedef regex_token_iterator < const wchar_t * > std::wcregex_token_iterator
- typedef sub_match< const wchar_t * > std::wcsub_match
- typedef basic_regex< wchar_t > std::wregex
- typedef match_results < wstring::const_iterator > **std::wsmatch**
- typedef regex_iterator < wstring::const_iterator > **std::wsregex_iterator**
- typedef regex_token_iterator < wstring::const_iterator > std::wsregex_token_iterator
- typedef sub_match < wstring::const_iterator > std::wssub_match

Functions

- template<typename _Bi_iter , class _Alloc >
  bool std::operator!= (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__m2)
- template<typename _Bi_iter , typename _Alloc >
  bool std::operator== (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__m2)
- template<typename _Ch_type , typename _Rx_traits >
  void swap (basic_regex< _Ch_type, _Rx_traits > &__lhs, basic_regex< _Ch_type, _Rx_traits > &__rhs)
- template<typename _Bi_iter , typename _Alloc >
  void std::swap (match_results< _Bi_iter, _Alloc > &__lhs, match_results< _Bi_iter, _Alloc > &__rhs) noexcept

- template<typename _BiIter >
  bool operator== (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator!= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator< (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator<= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator>= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator> (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator== (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi-_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator!= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_-iter > &__rhs)

- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator< (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator> (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator>= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator<= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator== (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator< (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator> (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter >
  bool operator== (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator!= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator< (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator> (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator>= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator<= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator== (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)

- template<typename _Bi_iter >
  bool operator< (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator> (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator== (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator!= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator< (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator> (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator>= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator<= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator== (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator< (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator> (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Ch_type , typename _Ch_traits , typename _Bi_iter >
  basic_ostream< _Ch_type,
  _Ch_traits > & operator<< (basic_ostream< _Ch_type, _Ch_traits > &__os, const sub_match< _Bi_iter > &__m)

Matching, Searching, and Replacing

- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , typename _Alloc , typename _Rx_traits >
  bool std::regex_match (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Ch_type , class _Rx_traits >
  bool std::regex_match (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Str_allocator , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Str_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , class _Alloc , class _Rx_traits >
  bool std::regex_search (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _String_allocator , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _String_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  _Out_iter std::regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)

- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type >
  _Out_iter std::regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa , typename _Fst , typename _Fsa >
  basic_string< _Ch_type, _St, _Sa > std::regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _Fst, _Fsa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type, _St, _Sa > std::regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type > std::regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type >
  basic_string< _Ch_type > std::regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)

Constants

std [28.8.1](1)

- static constexpr flag_type **std::basic_regex< typename, typename >::icase**
- static constexpr flag_type **std::basic_regex< typename, typename >::nosubs**
- static constexpr flag_type **std::basic_regex< typename, typename >::optimize**
- static constexpr flag_type **std::basic_regex< typename, typename >::collate**
- static constexpr flag_type **std::basic_regex< typename, typename >::ECMAScript**
- static constexpr flag_type **std::basic_regex< typename, typename >::basic**
- static constexpr flag_type **std::basic_regex< typename, typename >::extended**
- static constexpr flag_type **std::basic_regex< typename, typename >::awk**
- static constexpr flag_type **std::basic_regex< typename, typename >::grep**
- static constexpr flag_type **std::basic_regex< typename, typename >::egrep**

2.69.1 Detailed Description

A facility for performing regular expression pattern matching.

2.69.2 Typedef Documentation

2.69.2.1 typedef regex_token_iterator<const char*> std::cregex_token_iterator

Token iterator for C-style NULL-terminated strings.

Definition at line 2963 of file regex.h.

2.69.2.2 typedef sub_match<const char*> std::csub_match

Standard regex submatch over a C-style null-terminated string.

Definition at line 1010 of file regex.h.

2.69.2.3 typedef basic_regex<char> std::regex

Standard regular expressions.

Definition at line 832 of file regex.h.

2.69.2.4 typedef regex_token_iterator<string::const_iterator> std::sregex_token_iterator

Token iterator for standard strings.

Definition at line 2966 of file regex.h.

2.69.2.5 typedef sub_match<string::const_iterator> std::ssub_match

Standard regex submatch over a standard string.

Definition at line 1013 of file regex.h.

2.69.2.6 typedef regex_token_iterator<const wchar_t*> std::wcregex_token_iterator

Token iterator for C-style NULL-terminated wide strings.

Definition at line 2970 of file regex.h.

2.69.2.7 typedef sub_match<const wchar_t*> std::wcsub_match

Regex submatch over a C-style null-terminated wide string.

Definition at line 1017 of file regex.h.

2.69.2.8 typedef basic_regex<wchar_t> std::wregex

Standard wide-character regular expressions.

Definition at line 836 of file regex.h.

2.69.2.9 typedef regex_token_iterator<wstring::const_iterator> std::wsregex_token_iterator

Token iterator for standard wide-character strings.

Definition at line 2973 of file regex.h.

2.69.2.10 typedef sub_match<wstring::const_iterator> std::wssub_match

Regex submatch over a standard wide string.

Definition at line 1020 of file regex.h.

2.69.3 Function Documentation

2.69.3.1 template<typename _Bilter > bool operator!= (const sub_match< _Bilter > & *__lhs,* const sub_match< _Bilter > & *__rhs*) [related]

Tests the inequivalence of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1064 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.2 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator!= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the inequivalence of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1144 of file regex.h.

2.69.3.3 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator!= (const sub_match< _Bi_iter > & *__lhs,* const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*) [related]

Tests the inequivalence of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1237 of file regex.h.

2.69.3.4 template<typename _Bi_iter > bool operator!= (typename iterator_traits< _Bi_iter >::value_type const * *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the inequivalence of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1311 of file regex.h.

2.69.3.5 template<typename _Bi_iter > bool operator!= (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const * *__rhs*) [related]

Tests the inequivalence of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1405 of file regex.h.

2.69.3.6 template<typename _Bi_iter > bool operator!= (typename iterator_traits< _Bi_iter >::value_type const & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the inequivalence of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1479 of file regex.h.

2.69.3.7 template<typename _Bi_iter > bool operator!= (const sub_match< _Bi_iter > & *__lhs,* typename iterator_traits< _Bi_iter >::value_type const & *__rhs*) [related]

Tests the inequivalence of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* is not equivalent to *__rhs*, false otherwise.

Definition at line 1579 of file regex.h.

2.69.3.8 template<typename _Bi_iter , class _Alloc > bool std::operator!= (const match_results< _Bi_iter, _Alloc > & *__m1,* const match_results< _Bi_iter, _Alloc > & *__m2*) [inline]

Compares two match_results for inequality.

Returns

true if the two objects do not refer to the same match, false otherwise.

Definition at line 2126 of file regex.h.

2.69.3.9 template<typename _Bilter > bool operator< (const sub_match< _Bilter > & *__lhs,* const sub_match< _Bilter > & *__rhs*) [related]

Tests the ordering of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1075 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.10 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator< (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1156 of file regex.h.

2.69.3.11 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator< (const sub_match< _Bi_iter > & *__lhs,* const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1249 of file regex.h.

2.69.3.12 template<typename _Bi_iter > bool operator< (typename iterator_traits< _Bi_iter >::value_type const * *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.

__rhs	A regular expression submatch.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1323 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.13 template<typename _Bi_iter > bool operator< (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const * *__rhs*) [related]

Tests the ordering of a regular expression submatch and a C string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1417 of file regex.h.

2.69.3.14 template<typename _Bi_iter > bool operator< (typename iterator_traits< _Bi_iter >::value_type const & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1492 of file regex.h.

References std::__addressof().

2.69.3.15 template<typename _Bi_iter > bool operator< (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* precedes *__rhs*, false otherwise.

Definition at line 1592 of file regex.h.

References std::__addressof().

2.69.3.16 template<typename _Ch_type , typename _Ch_traits , typename _Bi_iter > basic_ostream< _Ch_type, _Ch_traits > & operator<< (basic_ostream< _Ch_type, _Ch_traits > & *__os,* const sub_match< _Bi_iter > & *__m*) [related]

Inserts a matched string into an output stream.

Parameters

__os	The output stream.
__m	A submatch string.

Returns

the output stream with the submatch string inserted.

Definition at line 1647 of file regex.h.

References std::sub_match< _BiIter >::str().

2.69.3.17 template<typename _BiIter > bool operator<= (const sub_match< _BiIter > & *__lhs,* const sub_match< _BiIter > & *__rhs*) [related]

Tests the ordering of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1086 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.18 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator<= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1192 of file regex.h.

2.69.3.19 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator<= (const sub_match< _Bi_iter > & *__lhs,* const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1285 of file regex.h.

2.69.3.20 template<typename _Bi_iter > bool operator<= (typename iterator_traits< _Bi_iter >::value_type const * *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1359 of file regex.h.

2.69.3.21 template<typename _Bi_iter > bool operator<= (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const * *__rhs*) [related]

Tests the ordering of a regular expression submatch and a C string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1453 of file regex.h.

2.69.3.22 template<typename _Bi_iter > bool operator<= (typename iterator_traits< _Bi_iter >::value_type const & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1531 of file regex.h.

2.69.3.23 template<typename _Bi_iter > bool operator<= (const sub_match< _Bi_iter > & *__lhs,* typename iterator_traits< _Bi_iter >::value_type const & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* does not succeed *__rhs*, false otherwise.

Definition at line 1631 of file regex.h.

2.69.3.24 template<typename _BiIter > bool operator== (const sub_match< _BiIter > & *__lhs*, const sub_match< _BiIter > & *__rhs*) [related]

Tests the equivalence of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1035 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.25 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator== (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the equivalence of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1131 of file regex.h.

2.69.3.26 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator== (const sub_match< _Bi_iter > & *__lhs*, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*) [related]

Tests the equivalence of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1206 of file regex.h.

2.69.3.27 template<typename _Bi_iter > bool operator== (typename iterator_traits< _Bi_iter >::value_type const * *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the equivalence of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1298 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.28 template<typename _Bi_iter > bool operator== (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const * *__rhs*) [related]

Tests the equivalence of a regular expression submatch and a C string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1373 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.29 template<typename _Bi_iter > bool operator== (typename iterator_traits< _Bi_iter >::value_type const & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the equivalence of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1466 of file regex.h.

References std::__addressof().

2.69.3.30 template<typename _Bi_iter > bool operator== (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const & *__rhs*) [related]

Tests the equivalence of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* is equivalent to *__rhs*, false otherwise.

Definition at line 1545 of file regex.h.

References std::__addressof().

2.69.3.31 template<typename _Bi_iter , typename _Alloc > bool std::operator== (const match_results< _Bi_iter, _Alloc > & *__m1*, const match_results< _Bi_iter, _Alloc > & *__m2*) [inline]

Compares two match_results for equality.

Returns

true if the two objects refer to the same match, false otherwise.

Definition at line 2101 of file regex.h.

References std::match_results< typename, typename >::begin(), std::match_results< typename, typename >::empty(), std::match_results< typename, typename >::end(), std::equal(), std::match_results< typename, typename >::prefix(), std::match_results< typename, typename >::ready(), std::match_results< typename, typename >::size(), and std::match_results< typename, typename >::suffix().

2.69.3.32 template<typename _BiIter > bool operator> (const sub_match< _BiIter > & *__lhs*, const sub_match< _BiIter > & *__rhs*) [related]

Tests the ordering of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1108 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.33 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator> (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1168 of file regex.h.

2.69.3.34 **template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator> (const sub_match< _Bi_iter > & *__lhs,* const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*)** `[related]`

Tests the ordering of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1261 of file regex.h.

2.69.3.35 **template<typename _Bi_iter > bool operator> (typename iterator_traits< _Bi_iter >::value_type const * *__lhs,* const sub_match< _Bi_iter > & *__rhs*)** `[related]`

Tests the ordering of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1335 of file regex.h.

2.69.3.36 **template<typename _Bi_iter > bool operator> (const sub_match< _Bi_iter > & *__lhs,* typename iterator_traits< _Bi_iter >::value_type const * *__rhs*)** `[related]`

Tests the ordering of a regular expression submatch and a C string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1429 of file regex.h.

2.69.3.37 template<typename _Bi_iter > bool operator> (typename iterator_traits< _Bi_iter >::value_type const & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1505 of file regex.h.

2.69.3.38 template<typename _Bi_iter > bool operator>(const sub_match< _Bi_iter > & *__lhs,* typename iterator_traits< _Bi_iter >::value_type const & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* succeeds *__rhs*, false otherwise.

Definition at line 1605 of file regex.h.

2.69.3.39 template<typename _BiIter > bool operator>= (const sub_match< _BiIter > & *__lhs,* const sub_match< _BiIter > & *__rhs*) [related]

Tests the ordering of two regular expression submatches.

Parameters

__lhs	First regular expression submatch.
__rhs	Second regular expression submatch.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1097 of file regex.h.

References std::sub_match< _BiIter >::compare().

2.69.3.40 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator>= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__lhs,* const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a string and a regular expression submatch.

Parameters

__lhs	A string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1180 of file regex.h.

2.69.3.41 template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc > bool operator>= (const sub_match< _Bi_iter > & *__lhs*, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > & *__rhs*) [related]

Tests the ordering of a regular expression submatch and a string.

Parameters

__lhs	A regular expression submatch.
__rhs	A string.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1273 of file regex.h.

2.69.3.42 template<typename _Bi_iter > bool operator>= (typename iterator_traits< _Bi_iter >::value_type const * *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a C string and a regular expression submatch.

Parameters

__lhs	A null-terminated string.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1347 of file regex.h.

2.69.3.43 template<typename _Bi_iter > bool operator>= (const sub_match< _Bi_iter > & *__lhs*, typename iterator_traits< _Bi_iter >::value_type const * *__rhs*) [related]

Tests the ordering of a regular expression submatch and a C string.

Parameters

__lhs	A regular expression submatch.
__rhs	A null-terminated string.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1441 of file regex.h.

2.69.3.44 template<typename _Bi_iter > bool operator>= (typename iterator_traits< _Bi_iter >::value_type const & *__lhs*, const sub_match< _Bi_iter > & *__rhs*) [related]

Tests the ordering of a character and a regular expression submatch.

Parameters

__lhs	A character.
__rhs	A regular expression submatch.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1518 of file regex.h.

2.69.3.45 **template<typename _Bi_iter > bool operator>= (const sub_match< _Bi_iter > & *__lhs,* typename iterator_traits< _Bi_iter >::value_type const & *__rhs*)** `[related]`

Tests the ordering of a regular expression submatch and a character.

Parameters

__lhs	A regular expression submatch.
__rhs	A character.

Returns

true if *__lhs* does not precede *__rhs*, false otherwise.

Definition at line 1618 of file regex.h.

2.69.3.46 **template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_match (_Bi_iter *__s,* _Bi_iter *__e,* match_results< _Bi_iter, _Alloc > & *__m,* const basic_regex< _Ch_type, _Rx_traits > & *__re,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`)** `[inline]`

Determines if there is a match between the regular expression `e` and all of the character sequence [first, last).

Parameters

__s	Start of the character sequence to match.
__e	One-past-the-end of the character sequence to match.
__m	The match results.
__re	The regular expression.
__flags	Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2171 of file regex.h.

Referenced by std::regex_match().

2.69.3.47 **template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits > bool std::regex_match (_Bi_iter *__first,* _Bi_iter *__last,* const basic_regex< _Ch_type, _Rx_traits > & *__re,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`)** `[inline]`

Indicates if there is a match between the regular expression `e` and all of the character sequence [first, last).

Parameters

__first	Beginning of the character sequence to match.
__last	One-past-the-end of the character sequence to match.
__re	The regular expression.
__flags	Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2199 of file regex.h.

References std::regex_match().

2.69.3.48 **template<typename _Ch_type , typename _Alloc , typename _Rx_traits > bool std::regex_match (const _Ch_type * *__s,* match_results< const _Ch_type *, _Alloc > & *__m,* const basic_regex< _Ch_type, _Rx_traits > & *__re,* regex_constants::match_flag_type *__f =* `regex_constants::match_default`) [inline]**

Determines if there is a match between the regular expression `e` and a C-style null-terminated string.

Parameters

__s	The C-style null-terminated string to match.
__m	The match results.
__re	The regular expression.
__f	Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2224 of file regex.h.

References std::regex_match().

2.69.3.49 **template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > & *__s,* match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > & *__m,* const basic_regex< _Ch_type, _Rx_traits > & *__re,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`) [inline]**

Determines if there is a match between the regular expression `e` and a string.

Parameters

__s	The string to match.
__m	The match results.
__re	The regular expression.
__flags	Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2248 of file regex.h.

References std::basic_string< _CharT, _Traits, _Alloc >::begin(), std::basic_string< _CharT, _Traits, _Alloc >::end(), and std::regex_match().

2.69.3.50 **template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > && , match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > & , const basic_regex< _Ch_type, _Rx_traits > & , regex_constants::match_flag_type = regex_constants::match_default) [delete]**

Prevent unsafe attempts to get match_results from a temporary string.

2.69.3.51 **template<typename _Ch_type , class _Rx_traits > bool std::regex_match (const _Ch_type * *__s*, const basic_regex< _Ch_type, _Rx_traits > & *__re*, regex_constants::match_flag_type *__f* = regex_constants::match_default) [inline]**

Indicates if there is a match between the regular expression `e` and a C-style null-terminated string.

Parameters

__s	The C-style null-terminated string to match.
__re	The regular expression.
__f	Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2284 of file regex.h.

References std::regex_match().

2.69.3.52 **template<typename _Ch_traits , typename _Str_allocator , typename _Ch_type , typename _Rx_traits > bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Str_allocator > & *__s*, const basic_regex< _Ch_type, _Rx_traits > & *__re*, regex_constants::match_flag_type *__flags* = regex_constants::match_default) [inline]**

Indicates if there is a match between the regular expression `e` and a string.

Parameters

__s	[IN] The string to match.
__re	[IN] The regular expression.
__flags	[IN] Controls how the regular expression is matched.

Return values

true	A match exists.
false	Otherwise.

Exceptions

an	exception of type regex_error.

Definition at line 2306 of file regex.h.

References std::basic_string< _CharT, _Traits, _Alloc >::begin(), std::basic_string< _CharT, _Traits, _Alloc >::end(), and std::regex_match().

2.69.3.53 template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa > _Out_iter std::regex_replace (_Out_iter *__out,* _Bi_iter *__first,* _Bi_iter *__last,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* const basic_string< _Ch_type, _St, _Sa > & *__fmt,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`) [inline]

Search for a regular expression within a range for multiple times, and replace the matched parts through filling a format string.

Parameters

__out	[OUT] The output iterator.
__first	[IN] The start of the string to search.
__last	[IN] One-past-the-end of the string to search.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format string.
__flags	[IN] Search and replace policy flags.

Returns

__out

Exceptions

an	exception of type regex_error.

Definition at line 2477 of file regex.h.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str().

Referenced by std::regex_replace().

2.69.3.54 template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type > _Out_iter std::regex_replace (_Out_iter *__out,* _Bi_iter *__first,* _Bi_iter *__last,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* const _Ch_type * *__fmt,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`)

Search for a regular expression within a range for multiple times, and replace the matched parts through filling a format C-string.

Parameters

__out	[OUT] The output iterator.
__first	[IN] The start of the string to search.
__last	[IN] One-past-the-end of the string to search.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format C-string.
__flags	[IN] Search and replace policy flags.

Returns

__out

Exceptions

an	exception of type regex_error.

2.69.3.55 template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa , typename _Fst , typename _Fsa > basic_string<_Ch_type, _St, _Sa> std::regex_replace (const basic_string< _Ch_type, _St, _Sa > & *__s,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* const basic_string< _Ch_type, _Fst, _Fsa > & *__fmt,* regex_constants::match_flag_type *__flags* = regex_constants::match_default) [inline]

Search for a regular expression within a string for multiple times, and replace the matched parts through filling a format string.

Parameters

__s	[IN] The string to search and replace.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format string.
__flags	[IN] Search and replace policy flags.

Returns

The string after replacing.

Exceptions

an	exception of type regex_error.

Definition at line 2522 of file regex.h.

References std::back_inserter(), std::basic_string< _CharT, _Traits, _Alloc >::begin(), std::basic_string< _CharT, _Traits, _Alloc >::end(), and std::regex_replace().

2.69.3.56 template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa > basic_string<_Ch_type, _St, _Sa> std::regex_replace (const basic_string< _Ch_type, _St, _Sa > & *__s,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* const _Ch_type * *__fmt,* regex_constants::match_flag_type *__flags* = regex_constants::match_default) [inline]

Search for a regular expression within a string for multiple times, and replace the matched parts through filling a format C-string.

Parameters

__s	[IN] The string to search and replace.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format C-string.
__flags	[IN] Search and replace policy flags.

Returns

The string after replacing.

Exceptions

an	exception of type regex_error.

Definition at line 2548 of file regex.h.

References std::back_inserter(), std::basic_string< _CharT, _Traits, _Alloc >::begin(), std::basic_string< _CharT, _Traits, _Alloc >::end(), and std::regex_replace().

2.69.3.57 template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa > basic_string<_Ch_type> std::regex_replace (const _Ch_type * __s, const basic_regex< _Ch_type, _Rx_traits > & __e, const basic_string< _Ch_type, _St, _Sa > & __fmt, regex_constants::match_flag_type __flags = regex_constants::match_default) [inline]

Search for a regular expression within a C-string for multiple times, and replace the matched parts through filling a format string.

Parameters

__s	[IN] The C-string to search and replace.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format string.
__flags	[IN] Search and replace policy flags.

Returns

The string after replacing.

Exceptions

an	exception of type regex_error.

Definition at line 2574 of file regex.h.

References std::back_inserter(), and std::regex_replace().

2.69.3.58 template<typename _Rx_traits , typename _Ch_type > basic_string<_Ch_type> std::regex_replace (const _Ch_type * __s, const basic_regex< _Ch_type, _Rx_traits > & __e, const _Ch_type * __fmt, regex_constants::match_flag_type __flags = regex_constants::match_default) [inline]

Search for a regular expression within a C-string for multiple times, and replace the matched parts through filling a format C-string.

Parameters

__s	[IN] The C-string to search and replace.
__e	[IN] The regular expression to search for.
__fmt	[IN] The format C-string.
__flags	[IN] Search and replace policy flags.

Returns

The string after replacing.

Exceptions

an	exception of type regex_error.

Definition at line 2600 of file regex.h.

References std::back_inserter(), and std::regex_replace().

2.69.3.59 template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_search (_Bi_iter *__s*, _Bi_iter *__e*, match_results< _Bi_iter, _Alloc > & *__m*, const basic_regex< _Ch_type, _Rx_traits > & *__re*, regex_constants::match_flag_type *__flags* = regex_constants::match_default) [inline]

Searches for a regular expression within a range.

Parameters

__s	[IN] The start of the string to search.
__e	[IN] One-past-the-end of the string to search.
__m	[OUT] The match results.
__re	[IN] The regular expression to search for.
__flags	[IN] Search policy flags.

Return values

true	A match was found within the string.
false	No match was found within the string, the content of m is undefined.

Exceptions

an	exception of type regex_error.

Definition at line 2329 of file regex.h.

Referenced by std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator(), and std::regex_search().

2.69.3.60 template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits > bool std::regex_search (_Bi_iter *__first*, _Bi_iter *__last*, const basic_regex< _Ch_type, _Rx_traits > & *__re*, regex_constants::match_flag_type *__flags* = regex_constants::match_default) [inline]

Searches for a regular expression within a range.

Parameters

__first	[IN] The start of the string to search.
__last	[IN] One-past-the-end of the string to search.
__re	[IN] The regular expression to search for.
__flags	[IN] Search policy flags.

Return values

true	A match was found within the string.
false	No match was found within the string.

Exceptions

an	exception of type regex_error.

Definition at line 2353 of file regex.h.

References std::regex_search().

2.69.3.61 template<typename _Ch_type , class _Alloc , class _Rx_traits > bool std::regex_search (const _Ch_type * __s, match_results< const _Ch_type *, _Alloc > & __m, const basic_regex< _Ch_type, _Rx_traits > & __e, regex_constants::match_flag_type __f = regex_constants::match_default) [inline]

Searches for a regular expression within a C-string.

Parameters

__s	[IN] A C-string to search for the regex.
__m	[OUT] The set of regex matches.
__e	[IN] The regex to search for in `s`.
__f	[IN] The search flags.

Return values

true	A match was found within the string.
false	No match was found within the string, the content of m is undefined.

Exceptions

an	exception of type regex_error.

Definition at line 2376 of file regex.h.

References std::regex_search().

2.69.3.62 template<typename _Ch_type , typename _Rx_traits > bool std::regex_search (const _Ch_type * __s, const basic_regex< _Ch_type, _Rx_traits > & __e, regex_constants::match_flag_type __f = regex_constants::match_default) [inline]

Searches for a regular expression within a C-string.

Parameters

__s	[IN] The C-string to search.
__e	[IN] The regular expression to search for.
__f	[IN] Search policy flags.

Return values

true	A match was found within the string.
false	No match was found within the string.

Exceptions

an	exception of type regex_error.

Definition at line 2395 of file regex.h.

References std::regex_search().

2.69.3.63 **template<typename _Ch_traits , typename _String_allocator , typename _Ch_type , typename _Rx_traits > bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _String_allocator > & *__s,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* regex_constants::match_flag_type *__flags =* `regex_constants::match_default`) [inline]**

Searches for a regular expression within a string.

Parameters

__s	[IN] The string to search.
__e	[IN] The regular expression to search for.
__flags	[IN] Search policy flags.

Return values

true	A match was found within the string.
false	No match was found within the string.

Exceptions

an	exception of type regex_error.

Definition at line 2414 of file regex.h.

References std::regex_search().

2.69.3.64 **template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > & *__s,* match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > & *__m,* const basic_regex< _Ch_type, _Rx_traits > & *__e,* regex_constants::match_flag_type *__f =* `regex_constants::match_default`) [inline]**

Searches for a regular expression within a string.

Parameters

__s	[IN] A C++ string to search for the regex.
__m	[OUT] The set of regex matches.
__e	[IN] The regex to search for in `s`.
__f	[IN] The search flags.

Return values

true	A match was found within the string.
false	No match was found within the string, the content of m is undefined.

Exceptions

an	exception of type regex_error.

Definition at line 2437 of file regex.h.

References std::basic_string< _CharT, _Traits, _Alloc >::begin(), std::basic_string< _CharT, _Traits, _Alloc >::end(),

and std::regex_search().

2.69.3.65 template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits > bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > && , match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > & , const basic_regex< _Ch_type, _Rx_traits > & , regex_constants::match_flag_type = regex_constants::match_default) [delete]

Prevent unsafe attempts to get match_results from a temporary string.

2.69.3.66 template<typename _Ch_type , typename _Rx_traits > void swap (basic_regex< _Ch_type, _Rx_traits > & *__lhs*, basic_regex< _Ch_type, _Rx_traits > & *__rhs*) [related]

Swaps the contents of two regular expression objects.

Parameters

__lhs	First regular expression.
__rhs	Second regular expression.

Definition at line 849 of file regex.h.

2.69.3.67 template<typename _Bi_iter , typename _Alloc > void std::swap (match_results< _Bi_iter, _Alloc > & *__lhs*, match_results< _Bi_iter, _Alloc > & *__rhs*) [inline], [noexcept]

Swaps two match results.

Parameters

__lhs	A match result.
__rhs	A match result.

The contents of the two match_results objects are swapped.

Definition at line 2141 of file regex.h.

2.70 SGI

Collaboration diagram for SGI:



Classes

- class __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 >
- struct __gnu_cxx::constant_binary_fun< _Result, _Arg1, _Arg2 >
- struct __gnu_cxx::constant_unary_fun< _Result, _Argument >
- struct __gnu_cxx::constant_void_fun< _Result >
- class __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc >
- class __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc >
- class __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc >
- class __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc >
- struct __gnu_cxx::project1st< _Arg1, _Arg2 >
- struct __gnu_cxx::project2nd< _Arg1, _Arg2 >
- struct __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc >
- class __gnu_cxx::rope< _CharT, _Alloc >
- struct __gnu_cxx::select1st< _Pair >
- struct __gnu_cxx::select2nd< _Pair >
- class __gnu_cxx::slist< _Tp, _Alloc >
- class __gnu_cxx::subtractive_rng
- struct __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >
- class __gnu_cxx::unary_compose< _Operation1, _Operation2 >

Functions

- template<typename _Tp >
  const _Tp & __gnu_cxx::__median (const _Tp &__a, const _Tp &__b, const _Tp &__c)
- template<typename _Tp , typename _Compare >
  const _Tp & __gnu_cxx::__median (const _Tp &__a, const _Tp &__b, const _Tp &__c, _Compare __comp)
- size_t std::bitset< _Nb >::_Find_first () const noexcept
- size_t std::bitset< _Nb >::_Find_next (size_t __prev) const noexcept
- template<class _Operation1 , class _Operation2 >
  unary_compose< _Operation1, _Operation2 > __gnu_cxx::compose1 (const _Operation1 &__fn1, const _Operation2 &__fn2)
- template<class _Operation1 , class _Operation2 , class _Operation3 >
  binary_compose< _Operation1, _Operation2, _Operation3 > __gnu_cxx::compose2 (const _Operation1 &__fn1, const _Operation2 &__fn2, const _Operation3 &__fn3)

- template<class _Result >
  constant_void_fun< _Result > __gnu_cxx::constant0 (const _Result &__val)
- template<class _Result >
  constant_unary_fun< _Result,
  _Result > __gnu_cxx::constant1 (const _Result &__val)
- template<class _Result >
  constant_binary_fun< _Result,
  _Result, _Result > __gnu_cxx::constant2 (const _Result &__val)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  std::pair< _InputIterator,
  _OutputIterator > __gnu_cxx::copy_n (_InputIterator __first, _Size __count, _OutputIterator __result)
- template<typename _InputIterator , typename _Distance >
  void __gnu_cxx::distance (_InputIterator __first, _InputIterator __last, _Distance &__n)
- template<class _Tp >
  _Tp __gnu_cxx::identity_element (std::plus< _Tp >)
- template<class _Tp >
  _Tp __gnu_cxx::identity_element (std::multiplies< _Tp >)
- template<typename _InputIterator1 , typename _InputIterator2 >
  int __gnu_cxx::lexicographical_compare_3way (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _Tp , typename _Integer , typename _MonoidOperation >
  _Tp __gnu_cxx::power (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)
- template<typename _Tp , typename _Integer >
  _Tp __gnu_cxx::power (_Tp __x, _Integer __n)
- template<typename _InputIterator , typename _RandomAccessIterator >
  _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator >
  _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last, _RandomNumberGenerator &__rand)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance >
  _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance , typename _RandomNumberGenerator >
  _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n, _RandomNumberGenerator &__rand)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter,
  _ForwardIter > __gnu_cxx::uninitialized_copy_n (_InputIter __first, _Size __count, _ForwardIter __result)

- bitset< _Nb > & std::bitset< _Nb >::_Unchecked_set (size_t __pos) noexcept
- bitset< _Nb > & std::bitset< _Nb >::_Unchecked_set (size_t __pos, int __val) noexcept
- bitset< _Nb > & std::bitset< _Nb >::_Unchecked_reset (size_t __pos) noexcept
- bitset< _Nb > & std::bitset< _Nb >::_Unchecked_flip (size_t __pos) noexcept
- constexpr bool std::bitset< _Nb >::_Unchecked_test (size_t __pos) const noexcept

2.70.1 Detailed Description

Because libstdc++ based its implementation of the STL subsections of the library on the SGI 3.3 implementation, we inherited their extensions as well.

They are additionally documented in the online documentation, a copy of which is also shipped with the library source code (in .../docs/html/documentation.html). You can also read the documentation on SGI's site, which is still running even though the code is not maintained.

NB that the following notes are pulled from various comments all over the place, so they may seem stilted.

The identity_element functions are not part of the C++ standard; SGI provided them as an extension. Its argument is an operation, and its return value is the identity element for that operation. It is overloaded for addition and multiplication, and you can overload it for your own nefarious operations.

As an extension to the binders, SGI provided composition functors and wrapper functions to aid in their creation. The unary_compose functor is constructed from two functions/functors, f and g. Calling operator() with a single argument x returns f(g(x)). The function compose1 takes the two functions and constructs a unary_compose variable for you.

binary_compose is constructed from three functors, f, g1, and g2. Its operator() returns f(g1(x),g2(x)). The function compose2 takes f, g1, and g2, and constructs the binary_compose instance for you. For example, if f returns an int, then

```
int answer = (compose2(f,g1,g2))(x);
```

is equivalent to

```
int temp1 = g1(x);
int temp2 = g2(x);
int answer = f(temp1,temp2);
```

But the first form is more compact, and can be passed around as a functor to other algorithms.

As an extension, SGI provided a functor called identity. When a functor is required but no operations are desired, this can be used as a pass-through. Its operator() returns its argument unchanged.

select1st and select2nd are extensions provided by SGI. Their operator()s take a std::pair as an argument, and return either the first member or the second member, respectively. They can be used (especially with the composition functors) to *strip* data from a sequence before performing the remainder of an algorithm.

The operator() of the project1st functor takes two arbitrary arguments and returns the first one, while project2nd returns the second one. They are extensions provided by SGI.

These three functors are each constructed from a single arbitrary variable/value. Later, their operator()s completely ignore any arguments passed, and return the stored value.

- constant_void_fun's operator() takes no arguments
- constant_unary_fun's operator() takes one argument (ignored)
- constant_binary_fun's operator() takes two arguments (ignored)

The helper creator functions constant0, constant1, and constant2 each take a *result* argument and construct variables of the appropriate functor type.

2.70.2 Function Documentation

2.70.2.1 template<typename _Tp > const _Tp& __gnu_cxx::__median (const _Tp & *__a,* const _Tp & *__b,* const _Tp & *__c*)

Find the median of three values.

Parameters

__a	A value.
__b	A value.
__c	A value.

Returns

One of a, b or c.

If {l,m,n} is some convolution of {a,b,c} such that l<=m<=n then the value returned will be m. This is an SGI extension.

Definition at line 539 of file ext/algorithm.

2.70.2.2 template<typename _Tp , typename _Compare > const _Tp& __gnu_cxx::__median (const _Tp & *__a,* const _Tp & *__b,* const _Tp & *__c,* _Compare *__comp*)

Find the median of three values using a predicate for comparison.

Parameters

__a	A value.
__b	A value.
__c	A value.
__comp	A binary predicate.

Returns

One of a, b or c.

If {l,m,n} is some convolution of {a,b,c} such that comp(l,m) and comp(m,n) are both true then the value returned will be m. This is an SGI extension.

Definition at line 573 of file ext/algorithm.

2.70.2.3 template<size_t _Nb> size_t std::bitset< _Nb >::_Find_first ( ) const [inline],[noexcept]

Finds the index of the first "on" bit.

Returns

The index of the first bit set, or size() if not found.

See Also

_Find_next

Definition at line 1373 of file bitset.

2.70.2.4 template<size_t _Nb> size_t std::bitset< _Nb >::_Find_next (size_t *__prev*) const [inline],[noexcept]

Finds the index of the next "on" bit after prev.

Returns

The index of the next bit set, or size() if not found.

Parameters

__prev	Where to start searching.

See Also

_Find_first

Definition at line 1384 of file bitset.

2.70.2.5 **template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::_Unchecked_flip (size_t *__pos*)** [inline], [noexcept]

These versions of single-bit set, reset, flip, and test are extensions from the SGI version. They do no range checking.

Definition at line 1058 of file bitset.

2.70.2.6 **template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::_Unchecked_reset (size_t *__pos*)** [inline], [noexcept]

These versions of single-bit set, reset, flip, and test are extensions from the SGI version. They do no range checking.

Definition at line 1051 of file bitset.

2.70.2.7 **template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::_Unchecked_set (size_t *__pos*)** [inline], [noexcept]

These versions of single-bit set, reset, flip, and test are extensions from the SGI version. They do no range checking.

Definition at line 1034 of file bitset.

2.70.2.8 **template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::_Unchecked_set (size_t *__pos,* int *__val*)** [inline], [noexcept]

These versions of single-bit set, reset, flip, and test are extensions from the SGI version. They do no range checking.

Definition at line 1041 of file bitset.

2.70.2.9 **template<size_t _Nb> constexpr bool std::bitset< _Nb >::_Unchecked_test (size_t *__pos*) const** [inline], [noexcept]

These versions of single-bit set, reset, flip, and test are extensions from the SGI version. They do no range checking.

Definition at line 1065 of file bitset.

2.70.2.10 **template<class _Operation1 , class _Operation2 > unary_compose<_Operation1, _Operation2> __gnu_cxx::compose1 (const _Operation1 & *__fn1,* const _Operation2 & *__fn2*)** [inline]

An SGI extension .

Definition at line 137 of file ext/functional.

2.70.2.11 **template<class _Operation1 , class _Operation2 , class _Operation3 > binary_compose<_Operation1, _Operation2, _Operation3> __gnu_cxx::compose2 (const _Operation1 & *__fn1,* const _Operation2 & *__fn2,* const _Operation3 & *__fn3*)** [inline]

An SGI extension .

Definition at line 164 of file ext/functional.

2.70.2.12 template<class _Result > constant_void_fun<_Result> __gnu_cxx::constant0 (const _Result & *__val*) [inline]

An SGI extension .

Definition at line 322 of file ext/functional.

2.70.2.13 template<class _Result > constant_unary_fun<_Result, _Result> __gnu_cxx::constant1 (const _Result & *__val*) [inline]

An SGI extension .

Definition at line 328 of file ext/functional.

2.70.2.14 template<class _Result > constant_binary_fun<_Result,_Result,_Result> __gnu_cxx::constant2 (const _Result & *__val*) [inline]

An SGI extension .

Definition at line 334 of file ext/functional.

2.70.2.15 template<typename _InputIterator , typename _Size , typename _OutputIterator > std::pair<_InputIterator, _OutputIterator> __gnu_cxx::copy_n (_InputIterator *__first,* _Size *__count,* _OutputIterator *__result*) [inline]

Copies the range [first,first+count) into [result,result+count).

Parameters

__first	An input iterator.
__count	The number of elements to copy.
__result	An output iterator.

Returns

A std::pair composed of first+count and result+count.

This is an SGI extension. This inline function will boil down to a call to `memmove` whenever possible. Failing that, if random access iterators are passed, then the loop count will be known (and therefore a candidate for compiler optimizations such as unrolling).

Definition at line 113 of file ext/algorithm.

References std::__iterator_category().

2.70.2.16 template<typename _InputIterator , typename _Distance > void __gnu_cxx::distance (_InputIterator *__first,* _InputIterator *__last,* _Distance & *__n*) [inline]

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 105 of file ext/iterator.

References std::__iterator_category().

2.70.2.17 template<class _Tp > _Tp __gnu_cxx::identity_element (std::plus< _Tp >) [inline]

An SGI extension .

Definition at line 79 of file ext/functional.

2.70.2.18 template<class _Tp > _Tp __gnu_cxx::identity_element (std::multiplies< _Tp >) [inline]

An SGI extension .

Definition at line 85 of file ext/functional.

2.70.2.19 template<typename _InputIterator1 , typename _InputIterator2 > int __gnu_cxx::lexicographical_compare_3way (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2*)

memcmp on steroids.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.

Returns

An int, as with memcmp.

The return value will be less than zero if the first range is *lexigraphically less than* the second, greater than zero if the second range is *lexigraphically less than* the first, and zero otherwise. This is an SGI extension.

Definition at line 194 of file ext/algorithm.

2.70.2.20 template<typename _Tp , typename _Integer , typename _MonoidOperation > _Tp __gnu_cxx::power (_Tp *__x,* _Integer *__n,* _MonoidOperation *__monoid_op*) [inline]

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 113 of file ext/numeric.

2.70.2.21 template<typename _Tp , typename _Integer > _Tp __gnu_cxx::power (_Tp *__x,* _Integer *__n*) [inline]

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 123 of file ext/numeric.

2.70.2.22 template<typename _InputIterator , typename _RandomAccessIterator > _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator *__first,* _InputIterator *__last,* _RandomAccessIterator *__out_first,* _RandomAccessIterator *__out_last*) [inline]

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 381 of file ext/algorithm.

2.70.2.23 template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator > _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator *__first,* _InputIterator *__last,* _RandomAccessIterator *__out_first,* _RandomAccessIterator *__out_last,* _RandomNumberGenerator & *__rand*) [inline]

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 404 of file ext/algorithm.

2.70.2.24 template<typename _ForwardIterator , typename _OutputIterator , typename _Distance > _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator *__first,* _ForwardIterator *__last,* _OutputIterator *__out,* const _Distance *__n*)

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 260 of file ext/algorithm.

References std::distance(), and std::min().

2.70.2.25 template<typename _ForwardIterator , typename _OutputIterator , typename _Distance , typename _RandomNumberGenerator > _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator *__first,* _ForwardIterator *__last,* _OutputIterator *__out,* const _Distance *__n,* _RandomNumberGenerator & *__rand*)

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 294 of file ext/algorithm.

References std::distance(), and std::min().

2.70.2.26 template<typename _InputIter , typename _Size , typename _ForwardIter > **std::pair**<_InputIter, _ForwardIter> __gnu_cxx::uninitialized_copy_n (_InputIter *__first,* _Size *__count,* _ForwardIter *__result*) [inline]

Copies the range [first,last) into result.

Parameters

__first	An input iterator.
__count	Length
__result	An output iterator.

Returns

__result + (__first + __count)

Like copy(), but does not require an initialized output range.

Definition at line 121 of file ext/memory.

References std::__iterator_category().

2.71 Sequences

Collaboration diagram for Sequences:

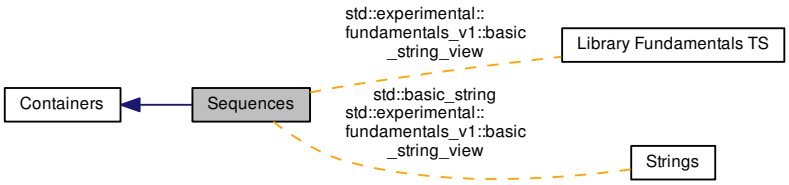

Classes

- struct std::array< _Tp, _Nm >
- class std::basic_string< _CharT, _Traits, _Alloc >
- class std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >
- class std::deque< _Tp, _Alloc >
- class std::forward_list< _Tp, _Alloc >
- class std::list< _Tp, _Alloc >
- class std::priority_queue< _Tp, _Sequence, _Compare >
- class std::queue< _Tp, _Sequence >
- class std::stack< _Tp, _Sequence >
- class std::vector< _Tp, _Alloc >
- class std::vector< bool, _Alloc >

2.71.1 Detailed Description

Sequences arrange a collection of objects into a strictly linear order.

The differences between sequences are usually due to one or both of the following:

- memory management
- algorithmic complexity

As an example of the first case, `vector` is required to use a contiguous memory layout, while other sequences such as `deque` are not.

The prime reason for choosing one sequence over another should be based on the second category of differences, algorithmic complexity. For example, if you need to perform many inserts and removals from the middle of a sequence, `list` would be ideal. But if you need to perform constant-time access to random elements of the sequence, then `list` should not be used.

All sequences must meet certain requirements, summarized in `tables`.

2.72 Set Operations

Collaboration diagram for Set Operations:



Functions

- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr bool std::includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare >
  constexpr bool std::includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)

2.72.1 Detailed Description

These algorithms are common set operations performed on sequences that are already sorted. The number of comparisons will be linear.

2.72.2 Function Documentation

2.72.2.1 template<typename _InputIterator1 , typename _InputIterator2 > constexpr bool std::includes (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2*) [inline]

Determines whether all elements of a sequence exists in a range.

Parameters

__first1	Start of search range.
__last1	End of search range.
__first2	Start of sequence
__last2	End of sequence.

Returns

True if each element in [__first2,__last2) is contained in order within [__first1,__last1). False otherwise.

This operation expects both [__first1,__last1) and [__first2,__last2) to be sorted. Searches for the presence of each element in [__first2,__last2) within [__first1,__last1). The iterators over each range only move forward, so this is a linear algorithm. If an element in [__first2,__last2) is not found before the search iterator reaches `__last2`, false is returned.

Definition at line 2840 of file stl_algo.h.

2.72.2.2 template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare > constexpr bool std::includes (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _Compare *__comp*) [inline]

Determines whether all elements of a sequence exists in a range using comparison.

Parameters

__first1	Start of search range.
__last1	End of search range.
__first2	Start of sequence
__last2	End of sequence.
__comp	Comparison function to use.

Returns

True if each element in [__first2,__last2) is contained in order within [__first1,__last1) according to comp. False otherwise.

This operation expects both [__first1,__last1) and [__first2,__last2) to be sorted. Searches for the presence of each element in [__first2,__last2) within [__first1,__last1), using comp to decide. The iterators over each range only move forward, so this is a linear algorithm. If an element in [__first2,__last2) is not found before the search iterator reaches `__last2`, false is returned.

Definition at line 2886 of file stl_algo.h.

2.72.2.3 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator > constexpr _OutputIterator std::set_difference (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result*) [inline]

Return the difference of two sorted ranges.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in the first range but not the second in order to the output range. Iterators increment for each range. When the current element of the first range is less than the second, that element is copied and the iterator advances. If the current element of the second range is less, the iterator advances, but no element is copied. If an element is contained in both ranges, no elements are copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5415 of file stl_algo.h.

2.72.2.4 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > constexpr _OutputIterator std::set_difference (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*) [inline]

Return the difference of two sorted ranges using comparison functor.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.
__comp	The comparison functor.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in the first range but not the second in order to the output range. Iterators increment for each range. When the current element of the first range is less than the second according to __comp, that element is copied and the iterator advances. If the current element of the second range is less, no element is copied and the iterator advances. If an element is contained in both ranges according to __comp, no elements are copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5467 of file stl_algo.h.

2.72.2.5 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator > constexpr _OutputIterator std::set_intersection (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result*) [inline]

Return the intersection of two sorted ranges.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in both ranges in order to the output range. Iterators increment for each range. When the current element of one range is less than the other, that iterator advances. If an element is contained in both ranges, the element from the first range is copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5290 of file stl_algo.h.

2.72.2.6 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > constexpr _OutputIterator std::set_intersection (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*) [inline]

Return the intersection of two sorted ranges using comparison functor.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.
__comp	The comparison functor.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in both ranges in order to the output range. Iterators increment for each range. When the current element of one range is less than the other according to `__comp`, that iterator advances. If an element is contained in both ranges according to `__comp`, the element from the first range is copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5340 of file stl_algo.h.

2.72.2.7 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator > constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result*) [inline]

Return the symmetric difference of two sorted ranges.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in one range but not the other in order to the output range. Iterators increment for each range. When the current element of one range is less than the other, that element is copied and the iterator advances. If an element is contained in both ranges, no elements are copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5548 of file stl_algo.h.

2.72.2.8 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*) [inline]

Return the symmetric difference of two sorted ranges using comparison functor.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.
__comp	The comparison functor.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in one range but not the other in order to the output range. Iterators increment for each range. When the current element of one range is less than the other according to `comp`, that element is copied and the iterator advances. If an element is contained in both ranges according to `__comp`, no elements are copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5600 of file stl_algo.h.

2.72.2.9 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator > constexpr _OutputIterator std::set_union (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result*) [inline]

Return the union of two sorted ranges.

Parameters

__first1	Start of first range.

__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in each range in order to the output range. Iterators increment for each range. When the current element of one range is less than the other, that element is copied and the iterator advanced. If an element is contained in both ranges, the element from the first range is copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5166 of file stl_algo.h.

2.72.2.10 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > constexpr _OutputIterator std::set_union (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*) [inline]

Return the union of two sorted ranges using a comparison functor.

Parameters

__first1	Start of first range.
__last1	End of first range.
__first2	Start of second range.
__last2	End of second range.
__result	Start of output range.
__comp	The comparison functor.

Returns

End of the output range.

This operation iterates over both ranges, copying elements present in each range in order to the output range. Iterators increment for each range. When the current element of one range is less than the other according to `__comp`, that element is copied and the iterator advanced. If an equivalent element according to `__comp` is contained in both ranges, the element from the first range is copied and both ranges advance. The output range may not overlap either input range.

Definition at line 5217 of file stl_algo.h.

2.73 Sorting

Collaboration diagram for Sorting:

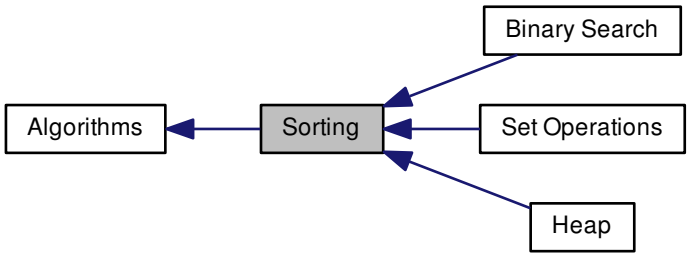

Modules

- Binary Search
- Heap
- Set Operations

Functions

- template<typename _BidirectionalIterator >
  void std::inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  void std::inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Compare __comp)
- template<typename _ForwardIterator >
  constexpr bool std::is_sorted (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr bool std::is_sorted (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _II1 , typename _II2 >
  constexpr bool std::lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _Compare >
  constexpr bool std::lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _Compare __comp)
- template<typename _Tp >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b, _Compare __comp)

- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::max_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::max_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _Tp >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::min_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::min_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Tp >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _ForwardIterator >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::minmax_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::minmax_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _BidirectionalIterator >
  constexpr bool std::next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool std::next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _RandomAccessIterator >
  constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last)

- template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last, _Compare __comp)
- template<typename _BidirectionalIterator >
  constexpr bool std::prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool std::prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  void std::stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  void std::stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)

2.73.1 Detailed Description

2.73.2 Function Documentation

2.73.2.1 template<typename _BidirectionalIterator > void std::inplace_merge (_BidirectionalIterator *__first,* _BidirectionalIterator *__middle,* _BidirectionalIterator *__last*) [inline]

Merges two sorted ranges in place.

Parameters

__first	An iterator.
__middle	Another iterator.
__last	Another iterator.

Returns

Nothing.

Merges two sorted and consecutive ranges, [__first,__middle) and [__middle,__last), and puts the result in [__first,__last). The output will be sorted. The sort is *stable*, that is, for equivalent elements in the two ranges, elements from the first range will always come before elements from the second.

If enough additional memory is available, this takes (__last-__first)-1 comparisons. Otherwise an NlogN algorithm is used, where N is distance(__first,__last).

Definition at line 2585 of file stl_algo.h.

2.73.2.2 template<typename _BidirectionalIterator , typename _Compare > void std::inplace_merge (_BidirectionalIterator *__first,* _BidirectionalIterator *__middle,* _BidirectionalIterator *__last,* _Compare *__comp*) [inline]

Merges two sorted ranges in place.

Parameters

__first	An iterator.
__middle	Another iterator.
__last	Another iterator.
__comp	A functor to use for comparisons.

Returns

Nothing.

Merges two sorted and consecutive ranges, [__first,__middle) and [middle,last), and puts the result in [__first,__last). The output will be sorted. The sort is *stable*, that is, for equivalent elements in the two ranges, elements from the first range will always come before elements from the second.

If enough additional memory is available, this takes (__last-__first)-1 comparisons. Otherwise an NlogN algorithm is used, where N is distance(__first,__last).

The comparison function should have the same effects on ordering as the function used for the initial sort.

Definition at line 2626 of file stl_algo.h.

2.73.2.3 template<typename _ForwardIterator > constexpr bool std::is_sorted (_ForwardIterator *__first,* _ForwardIterator *__last*) [inline]

Determines whether the elements of a sequence are sorted.

Parameters

__first	An iterator.
__last	Another iterator.

Returns

True if the elements are sorted, false otherwise.

Definition at line 3223 of file stl_algo.h.

References std::is_sorted_until().

2.73.2.4 template<typename _ForwardIterator , typename _Compare > constexpr bool std::is_sorted (_ForwardIterator *__first,* _ForwardIterator *__last,* _Compare *__comp*) [inline]

Determines whether the elements of a sequence are sorted according to a comparison functor.

Parameters

__first	An iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

True if the elements are sorted, false otherwise.

Definition at line 3238 of file stl_algo.h.

References std::is_sorted_until().

2.73.2.5 template<typename _ForwardIterator > constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Determines the end of a sorted sequence.

Parameters

__first	An iterator.
__last	Another iterator.

Returns

An iterator pointing to the last iterator i in [__first, __last) for which the range [__first, i) is sorted.

Definition at line 3269 of file stl_algo.h.

2.73.2.6 template<typename _ForwardIterator , typename _Compare > constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator *__first,* _ForwardIterator *__last,* _Compare *__comp*) [inline]

Determines the end of a sorted sequence using comparison functor.

Parameters

__first	An iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

An iterator pointing to the last iterator i in [__first, __last) for which the range [__first, i) is sorted.

Definition at line 3294 of file stl_algo.h.

Referenced by std::is_sorted().

2.73.2.7 template<typename _II1 , typename _II2 > constexpr bool std::lexicographical_compare (_II1 *__first1,* _II1 *__last1,* _II2 *__first2,* _II2 *__last2*) [inline]

Performs **dictionary** comparison on ranges.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.

Returns

A boolean true or false.

Returns true if the sequence of elements defined by the range [first1,last1) is lexicographically less than the sequence of elements defined by the range [first2,last2). Returns false otherwise. (Quoted from [25.3.8]/1.) If the iterators are all character pointers, then this is an inline call to `memcmp`.

Definition at line 1590 of file stl_algobase.h.

2.73.2.8 template<typename _II1 , typename _II2 , typename _Compare > constexpr bool std::lexicographical_compare (_II1 *__first1,* _II1 *__last1,* _II2 *__first2,* _II2 *__last2,* _Compare *__comp*) [inline]

Performs **dictionary** comparison on ranges.

Parameters

__first1	An input iterator.
__last1	An input iterator.
__first2	An input iterator.
__last2	An input iterator.
__comp	A comparison functor.

Returns

A boolean true or false.

The same as the four-parameter `lexicographical_compare`, but uses the comp parameter instead of <.

Definition at line 1627 of file stl_algobase.h.

Referenced by std::operator<().

2.73.2.9 template<typename _Tp > constexpr const _Tp & std::max (const _Tp & *__a*, const _Tp & *__b*) [inline]

This does what you think it does.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.

Returns

The greater of the parameters.

This is the simple classic generic implementation. It will work on temporary expressions, since they are only evaluated once, unlike a preprocessor macro.

Definition at line 254 of file stl_algobase.h.

Referenced by __gnu_parallel::__parallel_nth_element(), std::_Deque_base< _Tp, _Alloc >::_M_initialize_map(), std::deque< _Tp, _Alloc >::_M_reallocate_map(), std::discard_block_engine< _RandomNumberEngine, __p, __r >::max(), std::shuffle_order_engine< _RandomNumberEngine, __k >::max(), __gnu_parallel::multiseq_partition(), __gnu_parallel::multiseq_selection(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow().

2.73.2.10 template<typename _Tp , typename _Compare > constexpr const _Tp & std::max (const _Tp & *__a*, const _Tp & *__b*, _Compare *__comp*) [inline]

This does what you think it does.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.
__comp	A comparison functor.

Returns

The greater of the parameters.

This will work on temporary expressions, since they are only evaluated once, unlike a preprocessor macro.

Definition at line 300 of file stl_algobase.h.

2.73.2.11 template<typename _ForwardIterator > constexpr _ForwardIterator std::max_element (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Return the maximum element in a range.

Parameters

__first	Start of range.
__last	End of range.

Returns

Iterator referencing the first instance of the largest value.

Definition at line 5717 of file stl_algo.h.

2.73.2.12 template<typename _ForwardIterator , typename _Compare > constexpr _ForwardIterator std::max_element (_ForwardIterator *__first*, _ForwardIterator *__last*, _Compare *__comp*) [inline]

Return the maximum element in a range using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	Comparison functor.

Returns

Iterator referencing the first instance of the largest value according to __comp.

Definition at line 5742 of file stl_algo.h.

Referenced by std::valarray< _Tp >::max().

2.73.2.13 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator > constexpr _OutputIterator std::merge (_InputIterator1 *__first1*, _InputIterator1 *__last1*, _InputIterator2 *__first2*, _InputIterator2 *__last2*, _OutputIterator *__result*) [inline]

Merges two sorted ranges.

Parameters

__first1	An iterator.
__first2	Another iterator.
__last1	Another iterator.
__last2	Another iterator.
__result	An iterator pointing to the end of the merged range.

Returns

An output iterator equal to `__result` + (__last1 - __first1)

- (__last2 - __first2).

Merges the ranges [__first1,__last1) and [__first2,__last2) into the sorted range [__result, __result + (__last1-__first1) + (__last2-__first2)). Both input ranges must be sorted, and the output range must not overlap with either of the input ranges. The sort is *stable*, that is, for equivalent elements in the two ranges, elements from the first range will always come before elements from the second.

Definition at line 4946 of file stl_algo.h.

2.73.2.14 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > constexpr _OutputIterator std::merge (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*) [inline]

Merges two sorted ranges.

Parameters

__first1	An iterator.
__first2	Another iterator.
__last1	Another iterator.
__last2	Another iterator.
__result	An iterator pointing to the end of the merged range.
__comp	A functor to use for comparisons.

Returns

An output iterator equal to __result + (__last1 - __first1)

- (__last2 - __first2).

Merges the ranges [__first1,__last1) and [__first2,__last2) into the sorted range [__result, __result + (__last1-__first1) + (__last2-__first2)). Both input ranges must be sorted, and the output range must not overlap with either of the input ranges. The sort is *stable*, that is, for equivalent elements in the two ranges, elements from the first range will always come before elements from the second.

The comparison function should have the same effects on ordering as the function used for the initial sort.

Definition at line 4997 of file stl_algo.h.

2.73.2.15 template<typename _Tp > constexpr const _Tp & std::min (const _Tp & *__a,* const _Tp & *__b*) [inline]

This does what you think it does.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.

Returns

The lesser of the parameters.

This is the simple classic generic implementation. It will work on temporary expressions, since they are only evaluated once, unlike a preprocessor macro.

Definition at line 230 of file stl_algobase.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), __gnu_parallel::__parallel_sort_qs_divide(), std::__sample(), __gnu_parallel::__search_template(), __gnu_parallel::__sequential_random_shuffle(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare(), std::basic_string< char >::compare(), std::basic_string< _CharT, _Traits, _Alloc >::compare(), std::generate_canonical(), std::discard_block_engine< _RandomNumberEngine, __p, __r >::min(), std::shuffle_order_engine< _RandomNumberEngine, __k >::min(), __gnu_parallel::multiseq_partition(), __gnu_parallel::multiseq_selection(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), __gnu_cxx::random_sample_n(), std::basic_istream< _CharT, _Traits >::readsome(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind(), std::basic_string< _CharT, _Traits, _Alloc >::rfind(), std::basic_filebuf< _CharT, _Traits >::underflow(), std::basic_streambuf< _CharT, _Traits >::xsgetn(), std::basic_filebuf< _CharT, _Traits >::xsputn(), and std::basic_streambuf< _CharT, _Traits >::xsputn().

2.73.2.16 template<typename _Tp , typename _Compare > constexpr const _Tp & std::min (const _Tp & *__a,* const _Tp & *__b,* _Compare *__comp*) [inline]

This does what you think it does.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.
__comp	A comparison functor.

Returns

The lesser of the parameters.

This will work on temporary expressions, since they are only evaluated once, unlike a preprocessor macro.

Definition at line 278 of file stl_algobase.h.

2.73.2.17 template<typename _ForwardIterator > constexpr _ForwardIterator std::min_element (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Return the minimum element in a range.

Parameters

__first	Start of range.
__last	End of range.

Returns

Iterator referencing the first instance of the smallest value.

Definition at line 5653 of file stl_algo.h.

2.73.2.18 template<typename _ForwardIterator , typename _Compare > constexpr _ForwardIterator std::min_element (_ForwardIterator *__first*, _ForwardIterator *__last*, _Compare *__comp*) [inline]

Return the minimum element in a range using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	Comparison functor.

Returns

Iterator referencing the first instance of the smallest value according to __comp.

Definition at line 5678 of file stl_algo.h.

Referenced by std::valarray< _Tp >::min().

2.73.2.19 template<typename _Tp > constexpr pair< const _Tp &, const _Tp & > std::minmax (const _Tp & *__a*, const _Tp & *__b*) [inline]

Determines min and max at once as an ordered pair.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.

Returns

A pair(__b, __a) if __b is smaller than __a, pair(__a, __b) otherwise.

Definition at line 3320 of file stl_algo.h.

2.73.2.20 template<typename _Tp , typename _Compare > constexpr pair< const _Tp &, const _Tp & > std::minmax (const _Tp & *__a*, const _Tp & *__b*, _Compare *__comp*) [inline]

Determines min and max at once as an ordered pair.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.
__comp	A comparison functor .

Returns

A pair(__b, __a) if __b is smaller than __a, pair(__a, __b) otherwise.

Definition at line 3341 of file stl_algo.h.

2.73.2.21 template<typename _ForwardIterator > constexpr pair<_ForwardIterator, _ForwardIterator> std::minmax_element (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Return a pair of iterators pointing to the minimum and maximum elements in a range.

Parameters

__first	Start of range.
__last	End of range.

Returns

make_pair(m, M), where m is the first iterator i in [__first, __last) such that no other element in the range is smaller, and where M is the last iterator i in [__first, __last) such that no other element in the range is larger.

Definition at line 3421 of file stl_algo.h.

2.73.2.22 template<typename _ForwardIterator , typename _Compare > constexpr pair<_ForwardIterator, _ForwardIterator> std::minmax_element (_ForwardIterator *__first*, _ForwardIterator *__last*, _Compare *__comp*) [inline]

Return a pair of iterators pointing to the minimum and maximum elements in a range.

Parameters

__first	Start of range.

__last	End of range.
__comp	Comparison functor.

Returns

make_pair(m, M), where m is the first iterator i in [__first, __last) such that no other element in the range is smaller, and where M is the last iterator i in [__first, __last) such that no other element in the range is larger.

Definition at line 3449 of file stl_algo.h.

2.73.2.23 template<typename _BidirectionalIterator > constexpr bool std::next_permutation (_BidirectionalIterator *__first,* _BidirectionalIterator *__last*) [inline]

Permute range into the next *dictionary* ordering.

Parameters

__first	Start of range.
__last	End of range.

Returns

False if wrapped to first permutation, true otherwise.

Treats all permutations of the range as a set of *dictionary* sorted sequences. Permutes the current sequence into the next one of this set. Returns true if there are more sequences to generate. If the sequence is the largest of the set, the smallest is generated and false returned.

Definition at line 2971 of file stl_algo.h.

2.73.2.24 template<typename _BidirectionalIterator , typename _Compare > constexpr bool std::next_permutation (_BidirectionalIterator *__first,* _BidirectionalIterator *__last,* _Compare *__comp*) [inline]

Permute range into the next *dictionary* ordering using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	A comparison functor.

Returns

False if wrapped to first permutation, true otherwise.

Treats all permutations of the range [__first,__last) as a set of *dictionary* sorted sequences ordered by `__comp`. Permutes the current sequence into the next one of this set. Returns true if there are more sequences to generate. If the sequence is the largest of the set, the smallest is generated and false returned.

Definition at line 3004 of file stl_algo.h.

2.73.2.25 template<typename _RandomAccessIterator > constexpr void std::nth_element (_RandomAccessIterator *__first,* _RandomAccessIterator *__nth,* _RandomAccessIterator *__last*) [inline]

Sort a sequence just enough to find a particular position.

Parameters

__first	An iterator.
__nth	Another iterator.
__last	Another iterator.

Returns

Nothing.

Rearranges the elements in the range [__first,__last) so that *__nth is the same element that would have been in that position had the whole sequence been sorted. The elements either side of *__nth are not completely sorted, but for any iterator *i* in the range [__first,__nth) and any iterator *j* in the range [__nth,__last) it holds that *j < *i is false.

Definition at line 4773 of file stl_algo.h.

References std::__lg().

2.73.2.26 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::nth_element (_RandomAccessIterator *__first,* _RandomAccessIterator *__nth,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Sort a sequence just enough to find a particular position using a predicate for comparison.

Parameters

__first	An iterator.
__nth	Another iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

Nothing.

Rearranges the elements in the range [__first,__last) so that *__nth is the same element that would have been in that position had the whole sequence been sorted. The elements either side of *__nth are not completely sorted, but for any iterator *i* in the range [__first,__nth) and any iterator *j* in the range [__nth,__last) it holds that __comp(*j,*i) is false.

Definition at line 4813 of file stl_algo.h.

References std::__lg().

2.73.2.27 template<typename _RandomAccessIterator > constexpr void std::partial_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__middle,* _RandomAccessIterator *__last*) [inline]

Sort the smallest elements of a sequence.

Parameters

__first	An iterator.
__middle	Another iterator.
__last	Another iterator.

Returns

Nothing.

Sorts the smallest (__middle-__first) elements in the range [first,last) and moves them to the range [__first,__middle). The order of the remaining elements in the range [__middle,__last) is undefined. After the sort if *i* and *j* are iterators in the range [__first,__middle) such that i precedes j and *k* is an iterator in the range [__middle,__last) then ∗j<∗i and ∗k<∗i are both false.

Definition at line 4697 of file stl_algo.h.

2.73.2.28 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::partial_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__middle,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Sort the smallest elements of a sequence using a predicate for comparison.

Parameters

__first	An iterator.
__middle	Another iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

Nothing.

Sorts the smallest (__middle-__first) elements in the range [__first,__last) and moves them to the range [__first,__middle). The order of the remaining elements in the range [__middle,__last) is undefined. After the sort if *i* and *j* are iterators in the range [__first,__middle) such that i precedes j and *k* is an iterator in the range [__middle,__last) then ∗__comp(j,∗i) and __comp(∗k,∗i) are both false.

Definition at line 4736 of file stl_algo.h.

2.73.2.29 template<typename _InputIterator , typename _RandomAccessIterator > constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator *__first,* _InputIterator *__last,* _RandomAccessIterator *__result_first,* _RandomAccessIterator *__result_last*) [inline]

Copy the smallest elements of a sequence.

Parameters

__first	An iterator.
__last	Another iterator.
__result_first	A random-access iterator.
__result_last	Another random-access iterator.

Returns

An iterator indicating the end of the resulting sequence.

Copies and sorts the smallest N values from the range [__first,__last) to the range beginning at __result_first, where the number of elements to be copied, N, is the smaller of (__last-__first) and (__result_last-__result_first). After the sort if *i* and *j* are iterators in the range [__result_first,__result_first+N) such that i precedes j then ∗j<∗i is false. The value returned is __result_first+N.

Definition at line 1733 of file stl_algo.h.

2.73.2.30 template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare > constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator *__first,* _InputIterator *__last,* _RandomAccessIterator *__result_first,* _RandomAccessIterator *__result_last,* _Compare *__comp*) [inline]

Copy the smallest elements of a sequence using a predicate for comparison.

Parameters

__first	An input iterator.
__last	Another input iterator.
__result_first	A random-access iterator.
__result_last	Another random-access iterator.
__comp	A comparison functor.

Returns

An iterator indicating the end of the resulting sequence.

Copies and sorts the smallest N values from the range [__first,__last) to the range beginning at `result_first`, where the number of elements to be copied, `N`, is the smaller of (__last-__first) and (__result_last-__result_first). After the sort if *i* and *j* are iterators in the range [__result_first,__result_first+N) such that i precedes j then `__comp(*j,*i)` is false. The value returned is `__result_first+N`.

Definition at line 1784 of file stl_algo.h.

2.73.2.31 template<typename _BidirectionalIterator > constexpr bool std::prev_permutation (_BidirectionalIterator *__first*, _BidirectionalIterator *__last*) [inline]

Permute range into the previous *dictionary* ordering.

Parameters

__first	Start of range.
__last	End of range.

Returns

False if wrapped to last permutation, true otherwise.

Treats all permutations of the range as a set of *dictionary* sorted sequences. Permutes the current sequence into the previous one of this set. Returns true if there are more sequences to generate. If the sequence is the smallest of the set, the largest is generated and false returned.

Definition at line 3074 of file stl_algo.h.

2.73.2.32 template<typename _BidirectionalIterator , typename _Compare > constexpr bool std::prev_permutation (_BidirectionalIterator *__first*, _BidirectionalIterator *__last*, _Compare *__comp*) [inline]

Permute range into the previous *dictionary* ordering using comparison functor.

Parameters

__first	Start of range.
__last	End of range.
__comp	A comparison functor.

Returns

False if wrapped to last permutation, true otherwise.

Treats all permutations of the range [__first,__last) as a set of *dictionary* sorted sequences ordered by `__comp`. Permutes the current sequence into the previous one of this set. Returns true if there are more sequences to generate. If the sequence is the smallest of the set, the largest is generated and false returned.

Definition at line 3107 of file stl_algo.h.

2.73.2.33 template<typename _RandomAccessIterator > constexpr void std::sort (_RandomAccessIterator *__first*, _RandomAccessIterator *__last*) [inline]

Sort the elements of a sequence.

Parameters

__first	An iterator.
__last	Another iterator.

Returns

Nothing.

Sorts the elements in the range [__first,__last) in ascending order, such that for each iterator *i* in the range [__first,__last-1), ∗(i+1)<∗i is false.

The relative ordering of equivalent elements is not preserved, use `stable_sort()` if this is needed.

Definition at line 4851 of file stl_algo.h.

2.73.2.34 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Sort the elements of a sequence using a predicate for comparison.

Parameters

__first	An iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

Nothing.

Sorts the elements in the range [__first,__last) in ascending order, such that `__comp`(∗(i+1),∗i) is false for every iterator *i* in the range [__first,__last-1).

The relative ordering of equivalent elements is not preserved, use `stable_sort()` if this is needed.

Definition at line 4882 of file stl_algo.h.

2.73.2.35 template<typename _RandomAccessIterator > void std::stable_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last*) [inline]

Sort the elements of a sequence, preserving the relative order of equivalent elements.

Parameters

__first	An iterator.
__last	Another iterator.

Returns

Nothing.

Sorts the elements in the range [__first,__last) in ascending order, such that for each iterator `i` in the range [__first,__last-1), ∗(i+1)<∗i is false.

The relative ordering of equivalent elements is preserved, so any two elements `x` and `y` in the range [__first,__last) such that `x<y` is false and `y<x` is false will have the same relative ordering after calling `stable_sort()`.

Definition at line 5060 of file stl_algo.h.

2.73.2.36 template<typename _RandomAccessIterator , typename _Compare > void std::stable_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

Sort the elements of a sequence using a predicate for comparison, preserving the relative order of equivalent elements.

Parameters

__first	An iterator.
__last	Another iterator.
__comp	A comparison functor.

Returns

Nothing.

Sorts the elements in the range [__first,__last) in ascending order, such that for each iterator `i` in the range [__first,__last-1), `__comp(*(i+1),*i)` is false.

The relative ordering of equivalent elements is preserved, so any two elements `x` and `y` in the range [__first,__last) such that `__comp(x,y)` is false and `__comp(y,x)` is false will have the same relative ordering after calling `stable_sort()`.

Definition at line 5094 of file stl_algo.h.

2.74 Strings

Collaboration diagram for Strings:

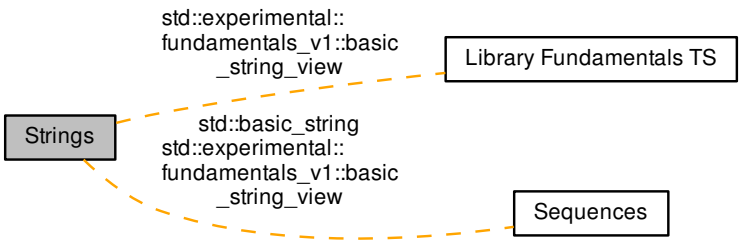

Classes

- class std::basic_string< _CharT, _Traits, _Alloc >
- class std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >
- struct std::char_traits< _CharT >

Typedefs

- typedef basic_string< char > std::string
- typedef basic_string< char16_t > std::u16string
- typedef basic_string< char32_t > std::u32string
- typedef basic_string< wchar_t > std::wstring

2.74.1 Detailed Description

2.74.2 Typedef Documentation

2.74.2.1 typedef basic_string<char> std::string

A string of `char`.

Definition at line 74 of file stringfwd.h.

2.74.2.2 typedef basic_string<char16_t> std::u16string

A string of `char16_t`.

Definition at line 93 of file stringfwd.h.

2.74.2.3 typedef basic_string<char32_t> std::u32string

A string of `char32_t`.

Definition at line 96 of file stringfwd.h.

2.74.2.4 typedef basic_string<wchar_t> std::wstring

A string of `wchar_t`.

Definition at line 83 of file stringfwd.h.

2.75 TR1 Mathematical Special Functions

Collaboration diagram for TR1 Mathematical Special Functions:

Functions

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float **std::tr1::assoc_laguerref** (unsigned int __n, unsigned int __m, float __x)
- long double **std::tr1::assoc_laguerrel** (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float **std::tr1::assoc_legendref** (unsigned int __l, unsigned int __m, float __x)
- long double **std::tr1::assoc_legendrel** (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Tpx , typename _Tpy >
  __gnu_cxx::__promote_2< _Tpx,
  _Tpy >::__type std::tr1::beta (_Tpx __x, _Tpy __y)
- float **std::tr1::betaf** (float __x, float __y)
- long double **std::tr1::betal** (long double __x, long double __y)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::comp_ellint_1 (_Tp __k)
- float **std::tr1::comp_ellint_1f** (float __k)
- long double **std::tr1::comp_ellint_1l** (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::comp_ellint_2 (_Tp __k)
- float **std::tr1::comp_ellint_2f** (float __k)
- long double **std::tr1::comp_ellint_2l** (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type std::tr1::comp_ellint_3 (_Tp __k, _Tpn __nu)
- float **std::tr1::comp_ellint_3f** (float __k, float __nu)
- long double **std::tr1::comp_ellint_3l** (long double __k, long double __nu)
- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type std::tr1::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float **std::tr1::conf_hypergf** (float __a, float __c, float __x)
- long double **std::tr1::conf_hypergl** (long double __a, long double __c, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_if** (float __nu, float __x)

- long double **std::tr1::cyl_bessel_il** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_jf** (float __nu, float __x)
- long double **std::tr1::cyl_bessel_jl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_kf** (float __nu, float __x)
- long double **std::tr1::cyl_bessel_kl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_neumann (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_neumannf** (float __nu, float __x)
- long double **std::tr1::cyl_neumannl** (long double __nu, long double __x)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::tr1::ellint_1 (_Tp __k, _Tpp __phi)
- float **std::tr1::ellint_1f** (float __k, float __phi)
- long double **std::tr1::ellint_1l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::tr1::ellint_2 (_Tp __k, _Tpp __phi)
- float **std::tr1::ellint_2f** (float __k, float __phi)
- long double **std::tr1::ellint_2l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type std::tr1::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float **std::tr1::ellint_3f** (float __k, float __nu, float __phi)
- long double **std::tr1::ellint_3l** (long double __k, long double __nu, long double __phi)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::expint (_Tp __x)
- float **std::tr1::expintf** (float __x)
- long double **std::tr1::expintl** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::hermite (unsigned int __n, _Tp __x)
- float **std::tr1::hermitef** (unsigned int __n, float __x)
- long double **std::tr1::hermitel** (unsigned int __n, long double __x)
- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type std::tr1::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float **std::tr1::hypergf** (float __a, float __b, float __c, float __x)
- long double **std::tr1::hypergl** (long double __a, long double __b, long double __c, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::laguerre (unsigned int __n, _Tp __x)
- float **std::tr1::laguerref** (unsigned int __n, float __x)
- long double **std::tr1::laguerrel** (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::legendre (unsigned int __n, _Tp __x)
- float **std::tr1::legendref** (unsigned int __n, float __x)
- long double **std::tr1::legendrel** (unsigned int __n, long double __x)

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::riemann_zeta (_Tp __x)
- float **std::tr1::riemann_zetaf** (float __x)
- long double **std::tr1::riemann_zetal** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_bessel (unsigned int __n, _Tp __x)
- float **std::tr1::sph_besself** (unsigned int __n, float __x)
- long double **std::tr1::sph_bessell** (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float **std::tr1::sph_legendref** (unsigned int __l, unsigned int __m, float __theta)
- long double **std::tr1::sph_legendrel** (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_neumann (unsigned int __n, _Tp __x)
- float **std::tr1::sph_neumannf** (unsigned int __n, float __x)
- long double **std::tr1::sph_neumannl** (unsigned int __n, long double __x)

2.75.1 Detailed Description

A collection of advanced mathematical special functions.

2.75.2 Function Documentation

2.75.2.1 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x) [inline]

5.2.1.1 Associated Laguerre polynomials.

Definition at line 1275 of file tr1/cmath.

2.75.2.2 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x) [inline]

5.2.1.2 Associated Legendre functions.

Definition at line 1292 of file tr1/cmath.

2.75.2.3 template<typename _Tpx , typename _Tpy > __gnu_cxx::__promote_2<_Tpx, _Tpy>::__type std::tr1::beta (_Tpx __x, _Tpy __y) [inline]

5.2.1.3 Beta functions.

Definition at line 1309 of file tr1/cmath.

2.75.2.4 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::comp_ellint_1 (_Tp __k) [inline]

5.2.1.4 Complete elliptic integrals of the first kind.

Definition at line 1326 of file tr1/cmath.

2.75.2.5 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::comp_ellint_2 (_Tp __k) [inline]

5.2.1.5 Complete elliptic integrals of the second kind.

Definition at line 1343 of file tr1/cmath.

2.75.2.6 template<typename _Tp , typename _Tpn > __gnu_cxx::__promote_2<_Tp, _Tpn>::__type std::tr1::comp_ellint_3 (_Tp __k, _Tpn __nu) [inline]

5.2.1.6 Complete elliptic integrals of the third kind.

Definition at line 1360 of file tr1/cmath.

2.75.2.7 template<typename _Tpa , typename _Tpc , typename _Tp > __gnu_cxx::__promote_3<_Tpa, _Tpc, _Tp>::__type std::tr1::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x) [inline]

5.2.1.7 Confluent hypergeometric functions.

Definition at line 1678 of file tr1/cmath.

2.75.2.8 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::tr1::cyl_bessel_i (_Tpnu __nu, _Tp __x) [inline]

5.2.1.8 Regular modified cylindrical Bessel functions.

Definition at line 1377 of file tr1/cmath.

2.75.2.9 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::tr1::cyl_bessel_j (_Tpnu __nu, _Tp __x) [inline]

5.2.1.9 Cylindrical Bessel functions (of the first kind).

Definition at line 1394 of file tr1/cmath.

2.75.2.10 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::tr1::cyl_bessel_k (_Tpnu __nu, _Tp __x) [inline]

5.2.1.10 Irregular modified cylindrical Bessel functions.

Definition at line 1411 of file tr1/cmath.

2.75.2.11 template<typename _Tpnu , typename _Tp > __gnu_cxx::__promote_2<_Tpnu, _Tp>::__type std::tr1::cyl_neumann (_Tpnu __nu, _Tp __x) [inline]

5.2.1.11 Cylindrical Neumann functions.

Definition at line 1428 of file tr1/cmath.

2.75.2.12 template<typename _Tp , typename _Tpp > __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::tr1::ellint_1 (_Tp __k, _Tpp __phi) [inline]

5.2.1.12 Incomplete elliptic integrals of the first kind.

Definition at line 1445 of file tr1/cmath.

2.75.2.13 template<typename _Tp , typename _Tpp > __gnu_cxx::__promote_2<_Tp, _Tpp>::__type std::tr1::ellint_2 (_Tp __k, _Tpp __phi) [inline]

5.2.1.13 Incomplete elliptic integrals of the second kind.

Definition at line 1462 of file tr1/cmath.

2.75.2.14 template<typename _Tp , typename _Tpn , typename _Tpp > __gnu_cxx::__promote_3<_Tp, _Tpn, _Tpp>::__type std::tr1::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi) [inline]

5.2.1.14 Incomplete elliptic integrals of the third kind.

Definition at line 1479 of file tr1/cmath.

2.75.2.15 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::expint (_Tp __x) [inline]

5.2.1.15 Exponential integrals.

Definition at line 1496 of file tr1/cmath.

2.75.2.16 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::hermite (unsigned int __n, _Tp __x) [inline]

5.2.1.16 Hermite polynomials.

Definition at line 1513 of file tr1/cmath.

2.75.2.17 template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp > __gnu_cxx::__promote_4<_Tpa, _Tpb, _Tpc, _Tp>::__type std::tr1::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x) [inline]

5.2.1.17 Hypergeometric functions.

Definition at line 1695 of file tr1/cmath.

2.75.2.18 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::laguerre (unsigned int __n, _Tp __x) [inline]

5.2.1.18 Laguerre polynomials.

Definition at line 1530 of file tr1/cmath.

2.75.2.19 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::legendre (unsigned int __n, _Tp __x) [inline]

5.2.1.19 Legendre polynomials.

Definition at line 1547 of file tr1/cmath.

2.75.2.20 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::riemann_zeta (_Tp __x) [inline]

5.2.1.20 Riemann zeta function.

Definition at line 1564 of file tr1/cmath.

2.75.2.21 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::sph_bessel (unsigned int __n, _Tp __x) [inline]

5.2.1.21 Spherical Bessel functions.

Definition at line 1581 of file tr1/cmath.

2.75.2.22 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta) [inline]

5.2.1.22 Spherical associated Legendre functions.

Definition at line 1598 of file tr1/cmath.

2.75.2.23 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::tr1::sph_neumann (unsigned int __n, _Tp __x) [inline]

5.2.1.23 Spherical Neumann functions.

Definition at line 1615 of file tr1/cmath.

2.76 Tags

Collaboration diagram for Tags:



Modules

- Data Structure Type
- Invalidation Guarantees

Classes

- struct __gnu_pbds::trivial_iterator_tag

Typedefs

- typedef void __gnu_pbds::trivial_iterator_difference_type

2.76.1 Detailed Description

2.76.2 Typedef Documentation

2.76.2.1 typedef void __gnu_pbds::trivial_iterator_difference_type

Prohibit moving trivial iterators.

Definition at line 79 of file tag_and_trait.hpp.

2.77 Technical Specifications

Collaboration diagram for Technical Specifications:

Modules

- Library Fundamentals TS

2.77.1 Detailed Description

Components specified by various Technical Specifications.

As indicated by the std::experimental namespace and the header paths, the contents of these Technical Specifications are experimental and not part of the C++ standard. As such the interfaces and implementations may change in the future, and there is **no guarantee of compatibility between different GCC releases** for these features.

2.78 Threads

Collaboration diagram for Threads:



Namespaces

- std::this_thread

Classes

- struct std::hash< thread::id >
- class std::thread

Functions

- bool **std::operator!=** (thread::id __x, thread::id __y) noexcept
- bool **std::operator**< (thread::id __x, thread::id __y) noexcept
- template<class _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__out, thread::id __id)
- bool **std::operator**<= (thread::id __x, thread::id __y) noexcept
- bool **std::operator==** (thread::id __x, thread::id __y) noexcept
- bool **std::operator**> (thread::id __x, thread::id __y) noexcept
- bool **std::operator**>= (thread::id __x, thread::id __y) noexcept
- void **std::swap** (thread &__x, thread &__y) noexcept

2.78.1 Detailed Description

Classes for thread support.

2.79 Time

Collaboration diagram for Time:

Files

- file chrono

Namespaces

- std::chrono
- std::literals::chrono_literals

Classes

- struct std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > >
- struct std::common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > >
- struct std::chrono::duration< _Rep, _Period >
- struct std::chrono::duration_values< _Rep >
- struct std::chrono::_V2::steady_clock
- struct std::chrono::_V2::system_clock
- struct std::chrono::time_point< _Clock, _Dur >
- struct std::chrono::treat_as_floating_point< _Rep >

Macros

- #define **_GLIBCXX_CHRONO_INT64_T**

Typedefs

- using std::chrono::_V2::high_resolution_clock = system_clock
- using std::chrono::hours = duration< int64_t, ratio< 3600 >>
- using std::chrono::microseconds = duration< int64_t, micro >
- using std::chrono::milliseconds = duration< int64_t, milli >
- using std::chrono::minutes = duration< int64_t, ratio< 60 >>
- using std::chrono::nanoseconds = duration< int64_t, nano >
- using std::chrono::seconds = duration< int64_t >

Functions

- template<typename _ToDur , typename _Rep , typename _Period >
  constexpr
  __enable_if_is_duration
  < _ToDur > std::chrono::duration_cast (const duration< _Rep, _Period > &__d)
- template<typename _ToDur , typename _Clock , typename _Dur >
  constexpr enable_if
  < __is_duration< _ToDur >
  ::value, time_point< _Clock,
  _ToDur > >::type std::chrono::time_point_cast (const time_point< _Clock, _Dur > &__t)

- template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 >
  constexpr common_type
  < duration< _Rep1, _Period1 >
  , duration< _Rep2, _Period2 >
  >::type operator+ (const duration< _Rep1, _Period1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)
- template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 >
  constexpr common_type
  < duration< _Rep1, _Period1 >
  , duration< _Rep2, _Period2 >
  >::type operator- (const duration< _Rep1, _Period1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)

- template<typename _Rep1 , typename _Period , typename _Rep2 >
  constexpr duration
  < __common_rep_t< _Rep1, _Rep2 >
  , _Period > operator* (const duration< _Rep1, _Period > &__d, const _Rep2 &__s)
- template<typename _Rep1 , typename _Rep2 , typename _Period >
  constexpr duration
  < __common_rep_t< _Rep2, _Rep1 >
  , _Period > operator* (const _Rep1 &__s, const duration< _Rep2, _Period > &__d)

- template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 >
  constexpr time_point< _Clock,
  typename common_type< _Dur1,
  duration< _Rep2, _Period2 >
  >::type > operator+ (const time_point< _Clock, _Dur1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)
- template<typename _Rep1 , typename _Period1 , typename _Clock , typename _Dur2 >
  constexpr time_point< _Clock,
  typename common_type< duration
  < _Rep1, _Period1 >, _Dur2 >
  ::type > operator+ (const duration< _Rep1, _Period1 > &__lhs, const time_point< _Clock, _Dur2 > &__rhs)
- template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 >
  constexpr time_point< _Clock,
  typename common_type< _Dur1,
  duration< _Rep2, _Period2 >
  >::type > operator- (const time_point< _Clock, _Dur1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)

- template<typename _Clock , typename _Dur1 , typename _Dur2 >
  constexpr common_type< _Dur1,
  _Dur2 >::type operator- (const time_point< _Clock, _Dur1 > &__lhs, const time_point< _Clock, _Dur2 > &__-
  rhs)

2.79.1 Detailed Description

Classes and functions for time.

2.79.2 Typedef Documentation

2.79.2.1 using std::chrono::_V2::high_resolution_clock = typedef system_clock

Highest-resolution clock.

This is the clock "with the shortest tick period." Alias to std::system_clock until higher-than-nanosecond definitions become feasible.

Definition at line 1050 of file chrono.

2.79.2.2 using std::chrono::hours = typedef duration< int64_t , ratio<3600>>

hours

Definition at line 742 of file chrono.

2.79.2.3 using std::chrono::microseconds = typedef duration< int64_t , micro>

microseconds

Definition at line 730 of file chrono.

2.79.2.4 using std::chrono::milliseconds = typedef duration< int64_t , milli>

milliseconds

Definition at line 733 of file chrono.

2.79.2.5 using std::chrono::minutes = typedef duration< int64_t , ratio< 60>>

minutes

Definition at line 739 of file chrono.

2.79.2.6 using std::chrono::nanoseconds = typedef duration< int64_t , nano>

nanoseconds

Definition at line 727 of file chrono.

2.79.2.7 using std::chrono::seconds = typedef duration< int64_t >

seconds

Definition at line 736 of file chrono.

2.79.3 Function Documentation

2.79.3.1 template<typename _ToDur , typename _Rep , typename _Period > constexpr __enable_if_is_duration<_ToDur> std::chrono::duration_cast (const duration< _Rep, _Period > & *__d*)

duration_cast

Definition at line 224 of file chrono.

Referenced by std::this_thread::sleep_for().

2.79.3.2 template<typename _Rep1 , typename _Period , typename _Rep2 > constexpr duration< __common_rep_t< _Rep1, _Rep2 >, _Period > operator* (const duration< _Rep1, _Period > & __d, const _Rep2 & __s) [related]

Multiply a duration by a scalar value.

Definition at line 587 of file chrono.

2.79.3.3 template<typename _Rep1 , typename _Rep2 , typename _Period > constexpr duration< __common_rep_t< _Rep2, _Rep1 >, _Period > operator* (const _Rep1 & __s, const duration< _Rep2, _Period > & __d) [related]

Multiply a duration by a scalar value.

Definition at line 597 of file chrono.

2.79.3.4 template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 > constexpr common_type< duration< _Rep1, _Period1 >, duration< _Rep2, _Period2 > >::type operator+ (const duration< _Rep1, _Period1 > & __lhs, const duration< _Rep2, _Period2 > & __rhs) [related]

The sum of two durations.

Definition at line 544 of file chrono.

2.79.3.5 template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 > constexpr time_point< _Clock, typename common_type< _Dur1, duration< _Rep2, _Period2 > >::type > operator+ (const time_point< _Clock, _Dur1 > & __lhs, const duration< _Rep2, _Period2 > & __rhs) [related]

Adjust a time point forwards by the given duration.

Definition at line 867 of file chrono.

2.79.3.6 template<typename _Rep1 , typename _Period1 , typename _Clock , typename _Dur2 > constexpr time_point< _Clock, typename common_type< duration< _Rep1, _Period1 >, _Dur2 >::type > operator+ (const duration< _Rep1, _Period1 > & __lhs, const time_point< _Clock, _Dur2 > & __rhs) [related]

Adjust a time point forwards by the given duration.

Definition at line 881 of file chrono.

2.79.3.7 template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 > constexpr common_type< duration< _Rep1, _Period1 >, duration< _Rep2, _Period2 > >::type operator- (const duration< _Rep1, _Period1 > & __lhs, const duration< _Rep2, _Period2 > & __rhs) [related]

The difference between two durations.

Definition at line 558 of file chrono.

2.79.3.8 template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 > constexpr time_point< _Clock, typename common_type< _Dur1, duration< _Rep2, _Period2 > >::type > operator- (const time_point< _Clock, _Dur1 > & __lhs, const duration< _Rep2, _Period2 > & __rhs) [related]

Adjust a time point backwards by the given duration.

Definition at line 895 of file chrono.

2.79.3.9 template<typename _Clock , typename _Dur1 , typename _Dur2 > constexpr common_type< _Dur1, _Dur2 >::type operator- (const time_point< _Clock, _Dur1 > & *__lhs,* const time_point< _Clock, _Dur2 > & *__rhs*) [related]

The difference between two time points (as a duration)

Definition at line 911 of file chrono.

2.79.3.10 template<typename _ToDur , typename _Clock , typename _Dur > constexpr enable_if<__is_duration<_ToDur>::value, time_point<_Clock, _ToDur> >::type std::chrono::time_point_cast (const time_point< _Clock, _Dur > & *__t*)

time_point_cast

Definition at line 823 of file chrono.

2.80 Traits

Collaboration diagram for Traits:



Classes

- struct __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc >
- struct __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_Update, Node, _Alloc >
- struct __gnu_pbds::container_traits< Cntnr >
- struct __gnu_pbds::container_traits_base< _Tag >
- struct __gnu_pbds::container_traits_base< binary_heap_tag >
- struct __gnu_pbds::container_traits_base< binomial_heap_tag >
- struct __gnu_pbds::container_traits_base< cc_hash_tag >
- struct __gnu_pbds::container_traits_base< gp_hash_tag >
- struct __gnu_pbds::container_traits_base< list_update_tag >
- struct __gnu_pbds::container_traits_base< ov_tree_tag >
- struct __gnu_pbds::container_traits_base< pairing_heap_tag >
- struct __gnu_pbds::container_traits_base< pat_trie_tag >
- struct __gnu_pbds::container_traits_base< rb_tree_tag >
- struct __gnu_pbds::container_traits_base< rc_binomial_heap_tag >
- struct __gnu_pbds::container_traits_base< splay_tree_tag >
- struct __gnu_pbds::container_traits_base< thin_heap_tag >
- struct __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash >
- struct __gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash >
- struct __gnu_pbds::detail::no_throw_copies< Key, Mapped >
- struct __gnu_pbds::detail::no_throw_copies< Key, null_type >
- struct __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 >
- struct __gnu_pbds::null_type
- struct __gnu_pbds::detail::rebind_traits< _Alloc, T >
- struct __gnu_pbds::detail::select_value_type< Key, Mapped >
- struct __gnu_pbds::detail::select_value_type< Key, null_type >
- struct __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash >
- struct __gnu_pbds::detail::stored_data< _Tv, _Th, false >
- struct __gnu_pbds::detail::stored_hash< _Th >
- struct __gnu_pbds::detail::stored_value< _Tv >
- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp >
- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, false >
- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, true >
- struct __gnu_pbds::detail::tree_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >

- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >
- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp >
- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, false >
- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, true >
- struct __gnu_pbds::detail::trie_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >
- struct __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >
- struct __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >
- struct __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash >

Variables

- static null_type **__gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash >::s_null_type**

2.80.1 Detailed Description

2.81 Type-safe container of any type

Collaboration diagram for Type-safe container of any type:



Classes

- class std::experimental::fundamentals_v1::any
- class std::experimental::fundamentals_v1::bad_any_cast

Macros

- #define **__cpp_lib_experimental_any**

Functions

- static void **std::experimental::fundamentals_v1::any::_Manager_internal< _Tp >::_S_manage** (_Op __which, const any *__anyp, _Arg *__arg)
- static void **std::experimental::fundamentals_v1::any::_Manager_external< _Tp >::_S_manage** (_Op __which, const any *__anyp, _Arg *__arg)
- template<typename _ValueType >
  _ValueType std::experimental::fundamentals_v1::any_cast (const any &__any)
- void std::experimental::fundamentals_v1::swap (any &__x, any &__y) noexcept

- template<typename _ValueType >
  _ValueType std::experimental::fundamentals_v1::any_cast (any &__any)
- template<typename _ValueType , typename enable_if<!is_move_constructible< _ValueType >::value||is_lvalue_reference< _ValueType >::value, bool >::type = true>
  _ValueType std::experimental::fundamentals_v1::any_cast (any &&__any)

- template<typename _ValueType >
  const _ValueType * std::experimental::fundamentals_v1::any_cast (const any *__any) noexcept
- template<typename _ValueType >
  _ValueType * std::experimental::fundamentals_v1::any_cast (any *__any) noexcept

2.81.1 Detailed Description

A type-safe container for single values of value types, as described in n3804 "Any Library Proposal (Revision 3)".

2.81.2 Function Documentation

2.81.2.1 template<typename _ValueType > _ValueType std::experimental::fundamentals_v1::any_cast (const any & *__any*) [inline]

Access the contained object.

Template Parameters

_ValueType	A const-reference or CopyConstructible type.

Parameters

__any	The object to access.

Returns

The contained object.

Exceptions

bad_any_cast	If `__any.type() != typeid(remove_reference_t<_ValueType>)`

Definition at line 355 of file experimental/any.

References std::experimental::fundamentals_v1::any_cast().

2.81.2.2 template<typename _ValueType > _ValueType std::experimental::fundamentals_v1::any_cast (any & *__any*) [inline]

Access the contained object.

Template Parameters

_ValueType	A reference or CopyConstructible type.

Parameters

__any	The object to access.

Returns

The contained object.

Exceptions

bad_any_cast	If `__any.type() != typeid(remove_reference_t<_ValueType>)`

Definition at line 378 of file experimental/any.

References std::experimental::fundamentals_v1::any_cast().

2.81.2.3 template<typename _ValueType , typename enable_if<!is_move_constructible< _ValueType >::value||is_lvalue_reference< _ValueType >::value, bool >::type = true> _ValueType std::experimental::fundamentals_v1::any_cast (any && *__any*) [inline]

Access the contained object.

Template Parameters

_ValueType	A reference or CopyConstructible type.

Parameters

__any	The object to access.

Returns

The contained object.

Exceptions

bad_any_cast	If `__any.type() != typeid(remove_reference_t<_ValueType>)`

Definition at line 392 of file experimental/any.

References std::experimental::fundamentals_v1::any_cast().

2.81.2.4 template<typename _ValueType > const _ValueType* std::experimental::fundamentals_v1::any_cast (const any * *__any*) [inline], [noexcept]

Access the contained object.

Template Parameters

_ValueType	The type of the contained object.

Parameters

__any	A pointer to the object to access.

Returns

The address of the contained object if `__any != nullptr && __any.type() == typeid(_ValueType)` , otherwise a null pointer.

Definition at line 468 of file experimental/any.

2.81.2.5 template<typename _ValueType > _ValueType* std::experimental::fundamentals_v1::any_cast (any * *__any*) [inline], [noexcept]

Access the contained object.

Template Parameters

_ValueType	The type of the contained object.

Parameters

__any	A pointer to the object to access.

Returns

The address of the contained object if `__any != nullptr && __any.type() == typeid(_ValueType)` , otherwise a null pointer.

Definition at line 476 of file experimental/any.

Referenced by std::experimental::fundamentals_v1::any_cast().

2.81.2.6 void std::experimental::fundamentals_v1::swap (any & __x, any & __y) [inline],[noexcept]

Exchange the states of two `any` objects.

Definition at line 342 of file experimental/any.

2.82 Uniform Distributions

Collaboration diagram for Uniform Distributions:



Classes

- class std::uniform_real_distribution< _RealType >

Functions

- template<typename _IntType >
  bool std::operator!= (const std::uniform_int_distribution< _IntType > &__d1, const std::uniform_int_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::uniform_real_distribution< _IntType > &__d1, const std::uniform_real_distribution< _IntType > &__d2)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_real_distribution< _RealType > &)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_real_distribution< _RealType > &)

2.82.1 Detailed Description

2.82.2 Function Documentation

2.82.2.1 template<typename _IntType > bool std::operator!= (const std::uniform_int_distribution< _IntType > & *__d1*, const std::uniform_int_distribution< _IntType > & *__d2*) [inline]

Return true if two uniform integer distributions have different parameters.

Definition at line 1689 of file random.h.

2.82.2.2 template<typename _IntType > bool std::operator!= (const std::uniform_real_distribution< _IntType > & __d1, const std::uniform_real_distribution< _IntType > & __d2) [inline]

Return true if two uniform real distributions have different parameters.

Definition at line 1910 of file random.h.

2.82.2.3 template<typename _IntType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::uniform_int_distribution< _IntType > & __x)

Inserts a uniform_int_distribution random number distribution __x into the output stream os.

Parameters

__os	An output stream.
__x	A uniform_int_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 867 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.82.2.4 template<typename _RealType , typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::uniform_real_distribution< _RealType > & __x)

Inserts a uniform_real_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A uniform_real_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

Definition at line 925 of file bits/random.tcc.

References std::ios_base::flags(), and std::left().

2.82.2.5 template<typename _IntType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & __is, std::uniform_int_distribution< _IntType > & __x)

Extracts a uniform_int_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.

__x	A uniform_int_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 887 of file bits/random.tcc.

References std::dec(), std::ios_base::flags(), std::uniform_int_distribution< _IntType >::param(), and std::skipws().

2.82.2.6 template<typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > & __is, std::uniform_real_distribution< _RealType > & __x)

Extracts a uniform_real_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A uniform_real_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

Definition at line 948 of file bits/random.tcc.

References std::ios_base::flags(), std::uniform_real_distribution< _RealType >::param(), and std::skipws().

2.83 Unordered Associative

Collaboration diagram for Unordered Associative:



Modules

- Base and Implementation Classes

Classes

- class std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >
- class std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >
- class std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >
- class std::unordered_set< _Value, _Hash, _Pred, _Alloc >

2.83.1 Detailed Description

Unordered associative containers allow fast retrieval of data based on keys.

Each container type is parameterized on a `Key` type, a `Hash` type providing a hashing functor, and an ordering relation used to sort the elements of the container.

All unordered associative containers must meet certain requirements, summarized in `tables`.

2.84 Utilities

Collaboration diagram for Utilities:

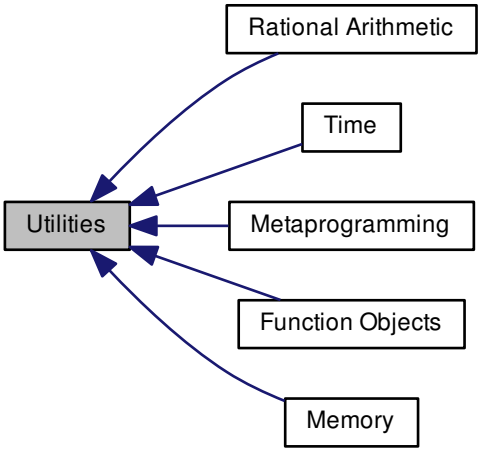

Modules

- Function Objects
- Memory
- Metaprogramming
- Rational Arithmetic
- Time

Classes

- struct std::_Tuple_impl< _Idx, _Elements >
- struct std::_Tuple_impl< _Idx, _Head, _Tail...>
- class std::bitset< _Nb >
- struct std::pair< _T1, _T2 >
- struct std::piecewise_construct_t
- class std::tuple< _Elements >
- class std::tuple< _T1, _T2 >
- struct std::tuple_element< 0, tuple< _Head, _Tail...> >
- struct std::tuple_element< __i, tuple< _Head, _Tail...> >
- struct std::tuple_element< __i, tuple<> >
- struct std::tuple_size< tuple< _Elements...> >
- struct std::type_index
- struct std::uses_allocator< tuple< _Types...>, _Alloc >

Macros

- #define **__cpp_lib_tuples_by_type**

Typedefs

- template<typename _Res , typename _Callable , typename... _Args>
  using **std::__can_invoke_as_nonvoid** = __enable_if_t< __and_< __not_< is_void< _Res >>, is_convertible< typename __invoke_result< _Callable, _Args...>::type, _Res > >::value, _Res >
- template<typename _Res , typename _Callable , typename... _Args>
  using **std::__can_invoke_as_void** = __enable_if_t< __and_< is_void< _Res >, __is_invocable< _Callable, _Args...>>::value, _Res >
- template<typename _Tp >
  using **std::__empty_not_final** = typename conditional< __is_final(_Tp), false_type, __is_empty_non_tuple< _Tp >>::type

Functions

- template<typename... _Args1, typename... _Args2>
  constexpr std::pair< _T1, _T2 >::pair (piecewise_construct_t, tuple< _Args1...>, tuple< _Args2...>)
- template<typename _Tp >
  constexpr _Tp * std::__addressof (_Tp &__r) noexcept
- template<typename _Tp , typename _Up = _Tp>
  constexpr _Tp **std::__exchange** (_Tp &__obj, _Up &&__new_val)
- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr _Head & **std::__get_helper** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr const _Head & **std::__get_helper** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr _Head & **std::__get_helper2** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr const _Head & **std::__get_helper2** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Tp , typename _Up = typename __inv_unwrap<_Tp>::type>
  constexpr _Up && **std::__invfwd** (typename remove_reference< _Tp >::type &__t) noexcept
- template<typename _Callable , typename... _Args>
  constexpr __invoke_result
  < _Callable, _Args...>::type std::__invoke (_Callable &&__fn, _Args &&...__args) noexcept(__is_nothrow_invocable< _Callable, _Args...>::value)
- template<typename _Res , typename _Fn , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_other, _Fn &&__f, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_memfun_ref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_memfun_deref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)
- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **std::__invoke_impl** (__invoke_memobj_ref, _MemPtr &&__f, _Tp &&__t)
- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **std::__invoke_impl** (__invoke_memobj_deref, _MemPtr &&__f, _Tp &&__t)
- template<typename _Res , typename _Callable , typename... _Args>
  constexpr
  __can_invoke_as_nonvoid< _Res,
  _Callable, _Args...> **std::__invoke_r** (_Callable &&__fn, _Args &&...__args)

- template<typename _Tp >
  constexpr _Tp * std::addressof (_Tp &__r) noexcept
- template<typename _Tp >
  const _Tp * **std::addressof** (const _Tp &&)=delete
- template<typename _Tp >
  constexpr _Tp && std::forward (typename std::remove_reference< _Tp >::type &__t) noexcept
- template<typename _Tp >
  constexpr _Tp && std::forward (typename std::remove_reference< _Tp >::type &&__t) noexcept
- template<typename... _Elements>
  constexpr tuple< _Elements &&...> std::forward_as_tuple (_Elements &&...__args) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > & std::get (tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > & std::get (const tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > && std::get (tuple< _Elements...> &&__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > && std::get (const tuple< _Elements...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp & std::get (tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp && std::get (tuple< _Types...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp & std::get (const tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp && std::get (const tuple< _Types...> &&__t) noexcept
- template<typename _T1 , typename _T2 >
  constexpr pair< typename
  __decay_and_strip< _T1 >
  ::__type, typename
  __decay_and_strip< _T2 >
  ::__type > make_pair (_T1 &&__x, _T2 &&__y)
- template<typename... _Elements>
  constexpr tuple< typename
  __decay_and_strip< _Elements >
  ::__type...> **std::make_tuple** (_Elements &&...__args)
- template<typename _Tp >
  constexpr
  std::remove_reference< _Tp >
  ::type && std::move (_Tp &&__t) noexcept
- template<typename _Tp >
  constexpr conditional
  < __move_if_noexcept_cond< _Tp >
  ::value, const _Tp &, _Tp && >
  ::type std::move_if_noexcept (_Tp &__x) noexcept
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator!=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)

- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator<** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator<=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator==** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator>** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator>=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp >
  constexpr enable_if< __and_
  < __not_< __is_tuple_like< _Tp >
  >, is_move_constructible< _Tp >
  , is_move_assignable< _Tp >
  >::value >::type std::swap (_Tp &__a, _Tp &__b) noexcept(/*conditional */) is_nothrow_move_assignable< _Tp
  >>
- template<typename _Tp , size_t _Nm>
  constexpr enable_if
  < __is_swappable< _Tp >::value >
  ::type std::swap (_Tp(&__a)[_Nm], _Tp(&__b)[_Nm]) noexcept(/*conditional */)
- template<typename... _Elements>
  constexpr enable_if< __and_
  < __is_swappable< _Elements >
  ...>::value >::type std::swap (tuple< _Elements...> &__x, tuple< _Elements...> &__y) noexcept(noexcept(__-
  x.swap(__y)))
- template<typename... _Elements>
  constexpr tuple< _Elements &...> std::tie (_Elements &...__args) noexcept
- template<typename... _Tpls, typename = typename enable_if<__and_<__is_tuple_like<_Tpls>...>::value>::type>
  constexpr auto std::tuple_cat (_Tpls &&...__tpls) -> typename __tuple_cat_result< _Tpls...>::__type

Variables

- constexpr _Swallow_assign **std::ignore**
- constexpr piecewise_construct_t std::piecewise_construct

- template<typename _T1 , typename _T2 >
  constexpr bool operator== (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator< (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator!= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator> (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator<= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator>= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr enable_if< __and_
  < __is_swappable< _T1 >
  , __is_swappable< _T2 >
  >::value >::type swap (pair< _T1, _T2 > &__x, pair< _T1, _T2 > &__y) noexcept(noexcept(__x.swap(__y)))

2.84.1 Detailed Description

Components deemed generally useful. Includes pair, tuple, forward/move helpers, ratio, function object, metaprogramming and type traits, time, date, and memory functions.

2.84.2 Function Documentation

2.84.2.1 template<class _T1, class _T2> template<typename... _Args1, typename... _Args2> constexpr std::pair< _T1, _T2 >::pair (piecewise_construct_t , tuple< _Args1...> __first, tuple< _Args2...> __second) [inline]

"piecewise construction" using a tuple of arguments for each member.

Parameters

__first	Arguments for the first member of the pair.
__second	Arguments for the second member of the pair.

The elements of each tuple will be used as the constructor arguments for the data members of the pair.

Definition at line 1674 of file tuple.

2.84.2.2 template<typename _Tp > constexpr _Tp* std::__addressof (_Tp & __r) [inline], [noexcept]

Same as C++11 std::addressof.

Definition at line 49 of file move.h.

Referenced by std::_Destroy(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), std::addressof(), std::begin(), std::call_once(), std::end(), std::list< _Tp, _Alloc >::merge(), std::sub_match< _BiIter >::operator<(), std::forward_list< _Tp, _Alloc >::operator=(), std::list< _Tp, _Alloc >::operator=(), std::sub_match< _BiIter >::operator==(), std::forward_list< _Tp, _Alloc >::remove(), std::list< _Tp, _Alloc >::remove(), std::rethrow_if_nested(), and std::list< __inp, __rebind_inp >::splice().

2.84.2.3 template<typename _Callable , typename... _Args> constexpr __invoke_result<_Callable, _Args...>::type std::__invoke (_Callable && __fn, _Args &&... __args) [noexcept]

Invoke a callable object.

Definition at line 89 of file invoke.h.

Referenced by std::call_once().

2.84.2.4 template<typename _Tp > constexpr _Tp* std::addressof (_Tp & __r) [inline], [noexcept]

Returns the actual address of the object or function referenced by r, even in the presence of an overloaded operator&.

Parameters

__r	Reference to an object or function.

Returns

The actual address.

Definition at line 140 of file move.h.

References std::__addressof().

Referenced by std::pointer_traits< _Tp * >::pointer_to().

2.84.2.5 template<typename _Tp > constexpr _Tp&& std::forward (typename std::remove_reference< _Tp >::type & __t) [noexcept]

Forward an lvalue.

Returns

The parameter cast to the specified type.

This function is used to implement "perfect forwarding".

Definition at line 76 of file move.h.

2.84.2.6 template<typename _Tp > constexpr _Tp&& std::forward (typename std::remove_reference< _Tp >::type && __t) [noexcept]

Forward an rvalue.

Returns

The parameter cast to the specified type.

This function is used to implement "perfect forwarding".

Definition at line 87 of file move.h.

2.84.2.7 template<typename... _Elements> constexpr tuple<_Elements&&...> std::forward_as_tuple (_Elements &&... __args) [noexcept]

std::forward_as_tuple

Definition at line 1486 of file tuple.

2.84.2.8 template<std::size_t __i, typename... _Elements> constexpr __tuple_element_t<__i, tuple<_Elements...> >& std::get (tuple< _Elements...> & __t) [noexcept]

Return a reference to the ith element of a tuple.

Definition at line 1294 of file tuple.

2.84.2.9 template<std::size_t __i, typename... _Elements> constexpr const __tuple_element_t<__i, tuple<_Elements...> >& std::get (const tuple< _Elements...> & __t) [noexcept]

Return a const reference to the ith element of a const tuple.

Definition at line 1300 of file tuple.

2.84.2.10 template<std::size_t __i, typename... _Elements> constexpr __tuple_element_t<__i, tuple<_Elements...> >&& std::get (tuple< _Elements...> && __t) [noexcept]

Return an rvalue reference to the ith element of a tuple rvalue.

Definition at line 1306 of file tuple.

2.84.2.11 template<std::size_t __i, typename... _Elements> constexpr const __tuple_element_t<__i, tuple<_Elements...> >&& std::get (const tuple< _Elements...> && __t) [noexcept]

Return a const rvalue reference to the ith element of a const tuple rvalue.

Definition at line 1315 of file tuple.

2.84.2.12 template<typename _Tp , typename... _Types> constexpr _Tp& std::get (tuple< _Types...> & __t) [noexcept]

Return a reference to the unique element of type _Tp of a tuple.

Definition at line 1338 of file tuple.

2.84.2.13 template<typename _Tp , typename... _Types> constexpr _Tp&& std::get (tuple< _Types...> && __t) [noexcept]

Return a reference to the unique element of type _Tp of a tuple rvalue.

Definition at line 1344 of file tuple.

2.84.2.14 template<typename _Tp , typename... _Types> constexpr const _Tp& std::get (const tuple< _Types...> & __t) [noexcept]

Return a const reference to the unique element of type _Tp of a tuple.

Definition at line 1350 of file tuple.

2.84.2.15 template<typename _Tp , typename... _Types> constexpr const _Tp&& std::get (const tuple< _Types...> && __t) [noexcept]

Return a const reference to the unique element of type _Tp of a const tuple rvalue.

Definition at line 1357 of file tuple.

2.84.2.16 template<typename _T1 , typename _T2 > constexpr pair< typename __decay_and_strip< _T1 >::__type, typename __decay_and_strip< _T2 >::__type > make_pair (_T1 && __x, _T2 && __y) [related]

A convenience wrapper for creating a pair from two objects.

Parameters

__x	The first object.
__y	The second object.

Returns

A newly-constructed pair<> object of the appropriate type.

The C++98 standard says the objects are passed by reference-to-const, but C++03 says they are passed by value (this was LWG issue #181).

Since C++11 they have been passed by forwarding reference and then forwarded to the new members of the pair. To create a pair with a member of reference type, pass a `reference_wrapper` to this function.

Definition at line 567 of file stl_pair.h.

2.84.2.17 template<typename _Tp > constexpr std::remove_reference<_Tp>::type&& std::move (_Tp && __t) [noexcept]

Convert a value to an rvalue.

Parameters

__t	A thing of arbitrary type.

Returns

The parameter cast to an rvalue-reference to allow moving it.

Definition at line 101 of file move.h.

Referenced by std::basic_regex< typename, typename >::assign(), std::shared_ptr< _Tp >::atomic_compare_exchange_strong_explicit(), std::function< _Res(_ArgTypes...)>::function(), std::future< _Res >::get(), std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert(), std::multimap< _Key, _Tp, _Compare, _Alloc >::insert(), std::unordered_map< _Key, _Tp, _Hash, _Pred >::insert(), std::map< _Key, _Tp, _Compare, _Alloc >::insert(), std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert(), std::vector< _Tp, _Alloc >::insert(), std::vector< block_type, allocator_type >::insert(), std::list< __inp, __rebind_inp >::insert(), std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert(), std::deque< _StateSeqT >::insert(), std::forward_list< _Tp, _Alloc >::merge(), std::move_if_noexcept(), std::tr2::dynamic_bitset< _WordT, _Alloc >::operator&=(), std::function< _Res(_ArgTypes...)>::operator=(), std::basic_regex< typename, typename >::operator=(), std::forward_list< _Tp, _Alloc >::operator=(), std::vector< block_type, allocator_type >::operator=(), std::list< __inp, __rebind_inp >::operator=(), std::deque< _StateSeqT >::operator=(), std::unordered_map< _Key, _Tp, _Hash, _Pred >::operator[](), std::unique_ptr< _Result< _Res > >::reset(), std::unique_ptr< _Tp[], _Dp >::reset(), std::list< __inp, __rebind_inp >::splice(), and std::unique_ptr< _Result< _Res > >::~unique_ptr().

2.84.2.18 template<typename _Tp > constexpr conditional<__move_if_noexcept_cond<_Tp>::value, const _Tp&, _Tp&&>::type std::move_if_noexcept (_Tp & __x) [noexcept]

Conditionally convert a value to an rvalue.

Parameters

__x	A thing of arbitrary type.

Returns

The parameter, possibly cast to an rvalue-reference.

Same as std::move unless the type's move constructor could throw and the type is copyable, in which case an lvalue-reference is returned instead.

Definition at line 121 of file move.h.

References std::move().

2.84.2.19 template<typename _T1 , typename _T2 > constexpr bool operator!= (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Uses `operator==` to find the result.

Definition at line 496 of file stl_pair.h.

2.84.2.20 template<typename _T1 , typename _T2 > constexpr bool operator< (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Defines a lexicographical order for pairs.

For two pairs of the same type, `P` is ordered before `Q` if `P.first` is less than `Q.first`, or if `P.first` and `Q.first` are equivalent (neither is less than the other) and `P.second` is less than `Q.second`.

Definition at line 489 of file stl_pair.h.

References std::pair< _T1, _T2 >::first, and std::pair< _T1, _T2 >::second.

2.84.2.21 template<typename _T1 , typename _T2 > constexpr bool operator<= (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Uses operator< to find the result.

Definition at line 508 of file stl_pair.h.

2.84.2.22 template<typename _T1 , typename _T2 > constexpr bool operator== (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Two pairs of the same type are equal iff their members are equal.

Definition at line 466 of file stl_pair.h.

References std::pair< _T1, _T2 >::first, and std::pair< _T1, _T2 >::second.

2.84.2.23 template<typename _T1 , typename _T2 > constexpr bool operator> (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Uses operator< to find the result.

Definition at line 502 of file stl_pair.h.

2.84.2.24 template<typename _T1 , typename _T2 > constexpr bool operator>= (const pair< _T1, _T2 > & __x, const pair< _T1, _T2 > & __y) [related]

Uses operator< to find the result.

Definition at line 514 of file stl_pair.h.

2.84.2.25 template<typename _Tp > constexpr enable_if<__and_<__not_<__is_tuple_like<_Tp> >, is_move_constructible<_Tp>, is_move_assignable<_Tp> >::value>::type std::swap (_Tp & __a, _Tp & __b) [inline], [noexcept]

Swaps two values.

Parameters

__a	A thing of arbitrary type.
__b	Another thing of arbitrary type.

Returns

Nothing.

Definition at line 189 of file move.h.

2.84.2.26 template<typename _Tp , size_t _Nm> constexpr enable_if<__is_swappable<_Tp>::value>::type std::swap (_Tp(&) __a[_Nm], _Tp(&) __b[_Nm]) [inline], [noexcept]

Swap the contents of two arrays.

Definition at line 213 of file move.h.

2.84.2.27 template<typename _T1 , typename _T2 > constexpr enable_if< __and_< __is_swappable< _T1 >, __is_swappable< _T2 > >::value >::type swap (pair< _T1, _T2 > & __x, pair< _T1, _T2 > & __y) [related]

Swap overload for pairs. Calls std::pair::swap().

Note

This std::swap overload is not declared in C++03 mode, which has performance implications, e.g. see https://gcc.gnu.org/PR38466

Definition at line 533 of file stl_pair.h.

References std::pair< _T1, _T2 >::swap().

2.84.2.28 template<typename... _Elements> constexpr enable_if<__and_<__is_swappable<_Elements>...>::value >::type std::swap (tuple< _Elements...> & *__x*, tuple< _Elements...> & *__y*) [inline], [delete], [noexcept]

swap

Definition at line 1629 of file tuple.

2.84.2.29 template<typename... _Elements> constexpr tuple<_Elements&...> std::tie (_Elements &... *__args*) [noexcept]

tie

Definition at line 1615 of file tuple.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::lock(), and std::try_lock().

2.84.2.30 template<typename... _Tpls, typename = typename enable_if<__and_<__is_tuple_like<_Tpls>...>::value>::type> constexpr auto std::tuple_cat (_Tpls &&... *__tpls*) -> typename __tuple_cat_result<_Tpls...>::__type

tuple_cat

Definition at line 1601 of file tuple.

2.84.3 Variable Documentation

2.84.3.1 constexpr piecewise_construct_t std::piecewise_construct [inline]

Tag for piecewise construction of std::pair objects.

Definition at line 83 of file stl_pair.h.

Referenced by std::map< _Key, _Tp, _Compare, _Alloc >::operator[]().

3 Namespace Documentation

3.1 __gnu_cxx Namespace Reference

Namespaces

- __detail
- typelist

Classes

- struct __alloc_traits
- struct __common_pool_policy
- class __mt_alloc
- class __mt_alloc_base
- struct __per_type_pool_policy
- class __pool
- class __pool< false >
- class __pool< true >
- class __pool_alloc
- class __pool_alloc_base
- struct __pool_base
- class __rc_string_base
- class __scoped_lock
- class __versa_string
- struct _Caster
- struct _Char_types
- class _ExtPtr_allocator
- struct _Invalid_type
- class _Pointer_adapter
- class _Relative_pointer_impl
- class _Relative_pointer_impl< const _Tp >
- class _Std_pointer_impl
- struct _Unqualified_type
- struct annotate_base
- class binary_compose
- class bitmap_allocator
- struct char_traits
- struct character
- struct condition_base
- struct constant_binary_fun
- struct constant_unary_fun
- struct constant_void_fun
- class debug_allocator
- class enc_filebuf
- struct encoding_char_traits
- class encoding_state
- struct forced_error
- class free_list
- class hash_map

- class hash_multimap
- class hash_multiset
- class hash_set
- struct limit_condition
- class malloc_allocator
- class new_allocator
- struct project1st
- struct project2nd
- struct random_condition
- struct rb_tree
- class recursive_init_error
- class rope
- struct select1st
- struct select2nd
- class slist
- class stdio_filebuf
- class stdio_sync_filebuf
- class subtractive_rng
- struct temporary_buffer
- class throw_allocator_base
- struct throw_allocator_limit
- struct throw_allocator_random
- struct throw_value_base
- struct throw_value_limit
- struct throw_value_random
- class unary_compose

Typedefs

- typedef void(* **__destroy_handler**)(void *)
- template<typename _Tp >
  using **__int_traits** = __numeric_traits_integer< _Tp >
- typedef __versa_string< char,
  std::char_traits< char >
  , std::allocator< char >
  , __rc_string_base > **__rc_string**
- typedef __vstring **__sso_string**
- typedef __versa_string
  < char16_t, std::char_traits
  < char16_t >, std::allocator
  < char16_t >, __rc_string_base > **__u16rc_string**
- typedef __u16vstring **__u16sso_string**
- typedef __versa_string< char16_t > **__u16vstring**
- typedef __versa_string
  < char32_t, std::char_traits
  < char32_t >, std::allocator
  < char32_t >, __rc_string_base > **__u32rc_string**
- typedef __u32vstring **__u32sso_string**
- typedef __versa_string< char32_t > **__u32vstring**
- typedef __versa_string< char > **__vstring**

- typedef __versa_string < wchar_t, std::char_traits < wchar_t >, std::allocator < wchar_t >, __rc_string_base > **__wrc_string**
- typedef __wvstring **__wsso_string**
- typedef __versa_string< wchar_t > **__wvstring**
- typedef rope< char > **crope**
- typedef rope< wchar_t > **wrope**

Enumerations

- enum { **_S_num_primes** }
- enum **_Lock_policy** { **_S_single**, **_S_mutex**, **_S_atomic** }

Functions

- void **__atomic_add** (volatile _Atomic_word *, int) noexcept
- void **__atomic_add_dispatch** (_Atomic_word *__mem, int __val)
- void **__atomic_add_single** (_Atomic_word *__mem, int __val)
- template<class _Tp >
  void **__aux_require_boolean_expr** (const _Tp &__t)
- template<typename _ToType , typename _FromType >
  _ToType **__const_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__const_pointer_cast** (_FromType *__arg)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  std::pair< _InputIterator, _OutputIterator > **__copy_n** (_InputIterator __first, _Size __count, _OutputIterator __result, std::input_iterator_tag)
- template<typename _RAIterator , typename _Size , typename _OutputIterator >
  std::pair< _RAIterator, _OutputIterator > **__copy_n** (_RAIterator __first, _Size __count, _OutputIterator __result, std::random_access_iterator_tag)
- template<typename _InputIterator , typename _Distance >
  void **__distance** (_InputIterator __first, _InputIterator __last, _Distance &__n, std::input_iterator_tag)
- template<typename _RandomAccessIterator , typename _Distance >
  void **__distance** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Distance &__n, std::random_access_iterator_tag)
- template<typename _ToType , typename _FromType >
  _ToType **__dynamic_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__dynamic_pointer_cast** (_FromType *__arg)
- void **__error_type_must_be_a_signed_integer_type** ()
- void **__error_type_must_be_an_integer_type** ()
- void **__error_type_must_be_an_unsigned_integer_type** ()
- _Atomic_word **__exchange_and_add** (volatile _Atomic_word *, int) noexcept
- _Atomic_word **__exchange_and_add_dispatch** (_Atomic_word *__mem, int __val)
- _Atomic_word **__exchange_and_add_single** (_Atomic_word *__mem, int __val)
- template<class _Concept >
  constexpr void **__function_requires** ()

- template<typename _Type >
  bool **__is_null_pointer** (_Type *__ptr)
- template<typename _Type >
  bool **__is_null_pointer** (_Type)
- bool **__is_null_pointer** (std::nullptr_t)
- template<typename _InputIterator1 , typename _InputIterator2 >
  int **__lexicographical_compare_3way** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- int **__lexicographical_compare_3way** (const unsigned char *__first1, const unsigned char *__last1, const unsigned char *__first2, const unsigned char *__last2)
- int **__lexicographical_compare_3way** (const char *__first1, const char *__last1, const char *__first2, const char *__last2)
- template<typename _Tp >
  const _Tp & __median (const _Tp &__a, const _Tp &__b, const _Tp &__c)
- template<typename _Tp , typename _Compare >
  const _Tp & __median (const _Tp &__a, const _Tp &__b, const _Tp &__c, _Compare __comp)
- crope::reference **__mutable_reference_at** (crope &__c, std::size_t __i)
- template<typename _Tp , typename _Integer , typename _MonoidOperation >
  _Tp **__power** (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)
- template<typename _Tp , typename _Integer >
  _Tp **__power** (_Tp __x, _Integer __n)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Distance >
  _RandomAccessIterator **__random_sample** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out, const _Distance __n)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator , typename _Distance >
  _RandomAccessIterator **__random_sample** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out, _RandomNumberGenerator &__rand, const _Distance __n)
- template<typename _ToType , typename _FromType >
  _ToType **__reinterpret_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__reinterpret_pointer_cast** (_FromType *__arg)
- _Slist_node_base * **__slist_make_link** (_Slist_node_base *__prev_node, _Slist_node_base *__new_node)
- _Slist_node_base * **__slist_previous** (_Slist_node_base *__head, const _Slist_node_base *__node)
- const _Slist_node_base * **__slist_previous** (const _Slist_node_base *__head, const _Slist_node_base *__node)
- _Slist_node_base * **__slist_reverse** (_Slist_node_base *__node)
- std::size_t **__slist_size** (_Slist_node_base *__node)
- void **__slist_splice_after** (_Slist_node_base *__pos, _Slist_node_base *__before_first, _Slist_node_base *__before_last)
- void **__slist_splice_after** (_Slist_node_base *__pos, _Slist_node_base *__head)
- template<typename _ToType , typename _FromType >
  _ToType __static_pointer_cast (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType __static_pointer_cast (_FromType *__arg)
- size_t **__stl_hash_string** (const char *__s)
- unsigned long **__stl_next_prime** (unsigned long __n)
- template<typename _TRet , typename _Ret = _TRet, typename _CharT , typename... _Base>
  _Ret **__stoa** (_TRet(*__convf)(const _CharT *, _CharT **, _Base...), const char *__name, const _CharT *__str, std::size_t *__idx, _Base...__base)
- void **__throw_concurrence_lock_error** ()
- void **__throw_concurrence_unlock_error** ()
- void **__throw_forced_error** ()

- template<typename _String , typename _CharT = typename _String::value_type>
  _String **__to_xstring** (int(*__convf)(_CharT *, std::size_t, const _CharT *, __builtin_va_list), std::size_t __n, const _CharT *__fmt,...)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter, _ForwardIter > **__uninitialized_copy_n** (_InputIter __first, _Size __count, _ForwardIter __result, std::input_iterator_tag)
- template<typename _RandomAccessIter , typename _Size , typename _ForwardIter >
  std::pair< _RandomAccessIter, _ForwardIter > **__uninitialized_copy_n** (_RandomAccessIter __first, _Size __count, _ForwardIter __result, std::random_access_iterator_tag)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter, _ForwardIter > **__uninitialized_copy_n** (_InputIter __first, _Size __count, _ForwardIter __result)
- template<typename _InputIter , typename _Size , typename _ForwardIter , typename _Allocator >
  std::pair< _InputIter, _ForwardIter > **__uninitialized_copy_n_a** (_InputIter __first, _Size __count, _ForwardIter __result, _Allocator __alloc)
- template<typename _InputIter , typename _Size , typename _ForwardIter , typename _Tp >
  std::pair< _InputIter, _ForwardIter > **__uninitialized_copy_n_a** (_InputIter __first, _Size __count, _ForwardIter __result, std::allocator< _Tp >)
- void __verbose_terminate_handler ()
- std::size_t _Bit_scan_forward (std::size_t __num)
- template<typename _ForwardIterator , typename _Allocator >
  void **_Destroy_const** (_ForwardIterator __first, _ForwardIterator __last, _Allocator __alloc)
- template<typename _ForwardIterator , typename _Tp >
  void **_Destroy_const** (_ForwardIterator __first, _ForwardIterator __last, std::allocator< _Tp >)
- template<class _CharT , class _Traits >
  void **_Rope_fill** (std::basic_ostream< _CharT, _Traits > &__o, std::size_t __n)
- template<class _CharT >
  bool **_Rope_is_simple** (_CharT *)
- bool **_Rope_is_simple** (char *)
- bool **_Rope_is_simple** (wchar_t *)
- template<class _Rope_iterator >
  void **_Rope_rotate** (_Rope_iterator __first, _Rope_iterator __middle, _Rope_iterator __last)
- template<class _CharT >
  void **_S_cond_store_eos** (_CharT &)
- void **_S_cond_store_eos** (char &__c)
- void **_S_cond_store_eos** (wchar_t &__c)
- template<class _CharT >
  _CharT **_S_eos** (_CharT *)
- template<class _CharT >
  bool **_S_is_basic_char_type** (_CharT *)
- bool **_S_is_basic_char_type** (char *)
- bool **_S_is_basic_char_type** (wchar_t *)
- template<class _CharT >
  bool **_S_is_one_byte_char_type** (_CharT *)
- bool **_S_is_one_byte_char_type** (char *)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type airy_ai (_Tp __x)
- float airy_aif (float __x)

- long double airy_ail (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type airy_bi (_Tp __x)
- float airy_bif (float __x)
- long double airy_bil (long double __x)
- template<class _Operation1 , class _Operation2 >
  unary_compose< _Operation1,
  _Operation2 > compose1 (const _Operation1 &__fn1, const _Operation2 &__fn2)
- template<class _Operation1 , class _Operation2 , class _Operation3 >
  binary_compose< _Operation1,
  _Operation2, _Operation3 > compose2 (const _Operation1 &__fn1, const _Operation2 &__fn2, const _Operation3 &__fn3)
- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float conf_hypergf (float __a, float __c, float __x)
- long double conf_hypergl (long double __a, long double __c, long double __x)
- template<class _Result >
  constant_void_fun< _Result > constant0 (const _Result &__val)
- template<class _Result >
  constant_unary_fun< _Result,
  _Result > constant1 (const _Result &__val)
- template<class _Result >
  constant_binary_fun< _Result,
  _Result, _Result > constant2 (const _Result &__val)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  std::pair< _InputIterator,
  _OutputIterator > copy_n (_InputIterator __first, _Size __count, _OutputIterator __result)
- template<typename _InputIterator , typename _Tp , typename _Size >
  void **count** (_InputIterator __first, _InputIterator __last, const _Tp &__value, _Size &__n)
- template<typename _InputIterator , typename _Predicate , typename _Size >
  void **count_if** (_InputIterator __first, _InputIterator __last, _Predicate __pred, _Size &__n)
- template<typename _InputIterator , typename _Distance >
  void distance (_InputIterator __first, _InputIterator __last, _Distance &__n)
- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float hypergf (float __a, float __b, float __c, float __x)
- long double hypergl (long double __a, long double __b, long double __c, long double __x)
- template<class _Tp >
  _Tp identity_element (std::plus< _Tp >)
- template<class _Tp >
  _Tp identity_element (std::multiplies< _Tp >)
- template<typename _InputIterator1 , typename _InputIterator2 >
  int lexicographical_compare_3way (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<class _Ret , class _Tp , class _Arg >
  std::mem_fun1_t< _Ret, _Tp, _Arg > **mem_fun1** (_Ret(_Tp::*__f)(_Arg))
- template<class _Ret , class _Tp , class _Arg >
  std::const_mem_fun1_t< _Ret,
  _Tp, _Arg > **mem_fun1** (_Ret(_Tp::*__f)(_Arg) const)

- template<class _Ret , class _Tp , class _Arg >
  std::mem_fun1_ref_t< _Ret, _Tp,
  _Arg > **mem_fun1_ref** (_Ret(_Tp::*__f)(_Arg))
- template<class _Ret , class _Tp , class _Arg >
  std::const_mem_fun1_ref_t
  < _Ret, _Tp, _Arg > **mem_fun1_ref** (_Ret(_Tp::*__f)(_Arg) const)
- template<typename _Tp >
  bool **operator!=** (const __pool_alloc< _Tp > &, const __pool_alloc< _Tp > &)
- template<class _Value , class _HashFcn , class _EqualKey , class _Alloc >
  bool **operator!=** (const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  bool **operator!=** (const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  bool **operator!=** (const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Key , class _Tp , class _HF , class _EqKey , class _Alloc >
  bool **operator!=** (const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm1, const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm2)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator!=** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator!=** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator!=** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **operator!=** (const _Pointer_adapter< _Tp > &__lhs, int __rhs)
- template<typename _Tp >
  bool **operator!=** (int __lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp >
  bool **operator!=** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<class _Val , class _Key , class _HF , class _Ex , class _Eq , class _All >
  bool **operator!=** (const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht1, const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht2)
- template<typename _Tp , typename _Poolp >
  bool **operator!=** (const __mt_alloc< _Tp, _Poolp > &, const __mt_alloc< _Tp, _Poolp > &)
- template<class _Tp , class _Alloc >
  bool **operator!=** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<typename _Tp , typename _Cond >
  bool **operator!=** (const throw_allocator_base< _Tp, _Cond > &, const throw_allocator_base< _Tp, _Cond > &)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator!=** (const bitmap_allocator< _Tp1 > &, const bitmap_allocator< _Tp2 > &) throw ()
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr bool **operator!=** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator!=** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator!= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<class _CharT , class _Alloc >
  bool **operator!=** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator!=** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator!=** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator!=** (const _Rope_char_ptr_proxy< _CharT, _Alloc > &__x, const _Rope_char_ptr_proxy< _CharT, _Alloc > &__y)
- template<typename _Cond >
  throw_value_base< _Cond > **operator*** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<class _CharT , class _Alloc >
  _Rope_const_iterator< _CharT,
  _Alloc > **operator+** (const _Rope_const_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  _Rope_const_iterator< _CharT,
  _Alloc > **operator+** (std::ptrdiff_t __n, const _Rope_const_iterator< _CharT, _Alloc > &__x)
- template<class _CharT , class _Alloc >
  _Rope_iterator< _CharT, _Alloc > **operator+** (const _Rope_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  _Rope_iterator< _CharT, _Alloc > **operator+** (std::ptrdiff_t __n, const _Rope_iterator< _CharT, _Alloc > &__x)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **operator+** (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__-
  right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **operator+** (const rope< _CharT, _Alloc > &__left, const _CharT *__right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **operator+** (const rope< _CharT, _Alloc > &__left, _CharT __right)
- template<typename _Cond >
  throw_value_base< _Cond > **operator+** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Iterator , typename _Container >
  constexpr __normal_iterator
  < _Iterator, _Container > **operator+** (typename __normal_iterator< _Iterator, _Container >::difference_type _-
  _n, const __normal_iterator< _Iterator, _Container > &__i) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  __versa_string< _CharT,
  _Traits, _Alloc, _Base > operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __-
  versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  __versa_string< _CharT,
  _Traits, _Alloc, _Base > operator+ (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base
  > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  __versa_string< _CharT,
  _Traits, _Alloc, _Base > operator+ (_CharT __lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__-
  rhs)

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (const _CharT *__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (_CharT __lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, _CharT __rhs)
- template<class _CharT , class _Alloc > rope< _CharT, _Alloc > & **operator+=** (rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<class _CharT , class _Alloc > rope< _CharT, _Alloc > & **operator+=** (rope< _CharT, _Alloc > &__left, const _CharT *__right)
- template<class _CharT , class _Alloc > rope< _CharT, _Alloc > & **operator+=** (rope< _CharT, _Alloc > &__left, _CharT __right)
- template<class _CharT , class _Alloc > _Rope_const_iterator< _CharT, _Alloc > **operator-** (const _Rope_const_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc > std::ptrdiff_t **operator-** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc > _Rope_iterator< _CharT, _Alloc > **operator-** (const _Rope_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc > std::ptrdiff_t **operator-** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<typename _Cond > throw_value_base< _Cond > **operator-** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)

- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr auto **operator-** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept-> decltype(__lhs.base()-__rhs.base())
- template<typename _Iterator , typename _Container >
  constexpr __normal_iterator
  < _Iterator, _Container >
  ::difference_type **operator-** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _Value , typename _Int , typename _St >
  bool **operator**< (const character< _Value, _Int, _St > &lhs, const character< _Value, _Int, _St > &rhs)
- template<class _CharT , class _Alloc >
  bool **operator**< (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator**< (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**< (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**< (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**< (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Cond >
  bool **operator**< (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<class _Tp , class _Alloc >
  bool **operator**< (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **operator**< (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator**< (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator< (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<class _CharT , class _Alloc >
  bool **operator**< (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__x)
- std::ostream & **operator**<< (std::ostream &os, const annotate_base &__b)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::beta_distribution< _RealType > &__x)

- template<typename _CharT , typename _Traits , typename _StoreT >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const _Pointer_adapter< _StoreT >
  &__p)
- template<size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::normal_mv_-
  distribution< _Dimen, _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const rice_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const nakagami_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const pareto_distribution< _RealType
  > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const k_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const arcsine_distribution< _RealType
  > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const hoyt_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::triangular_-
  distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::von_mises_-
  distribution< _RealType > &__x)
- template<typename _UIntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::hypergeometric_-
  distribution< _UIntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const logistic_distribution< _RealType
  > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::uniform_on_sphere-
  _distribution< _Dimen, _RealType > &__x)

- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::uniform_inside_-sphere_distribution< _Dimen, _RealType > &__x)
- template<class _CharT , class _Traits , class _Alloc >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__o, const rope< _CharT, _Alloc > &__r)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**<= (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**<= (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator**<= (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **operator**<= (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<class _Tp , class _Alloc >
  bool **operator**<= (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **operator**<= (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _-IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator**<= (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _Char-T, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator<= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<class _CharT , class _Alloc >
  bool **operator**<= (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator**<= (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator**<= (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<typename _Value , typename _Int , typename _St >
  bool **operator==** (const character< _Value, _Int, _St > &lhs, const character< _Value, _Int, _St > &rhs)
- template<typename _Tp >
  bool **operator==** (const __pool_alloc< _Tp > &, const __pool_alloc< _Tp > &)
- template<class _Val , class _Key , class _HF , class _Ex , class _Eq , class _All >
  bool **operator==** (const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht1, const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht2)
- template<class _Value , class _HashFcn , class _EqualKey , class _Alloc >
  bool **operator==** (const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  bool **operator==** (const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4>

bool **operator==** (const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__lhs, const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__rhs)

- template<class _CharT , class _Alloc >
  bool **operator==** (const _Rope_char_ptr_proxy< _CharT, _Alloc > &__x, const _Rope_char_ptr_proxy< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator==** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator==** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  bool **operator==** (const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Key , class _Tp , class _HF , class _EqKey , class _Alloc >
  bool **operator==** (const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm1, const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm2)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator==** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator==** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator==** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **operator==** (const _Pointer_adapter< _Tp > &__lhs, int __rhs)
- template<typename _Tp >
  bool **operator==** (int __lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp >
  bool operator== (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<size_t _Dimen, typename _RealType >
  bool **operator==** (const __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__d1, const __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__d2)
- template<typename _Cond >
  bool **operator==** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Tp , typename _Poolp >
  bool **operator==** (const __mt_alloc< _Tp, _Poolp > &, const __mt_alloc< _Tp, _Poolp > &)
- template<class _Tp , class _Alloc >
  bool **operator==** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<typename _Tp , typename _Cond >
  bool **operator==** (const throw_allocator_base< _Tp, _Cond > &, const throw_allocator_base< _Tp, _Cond > &)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr bool **operator==** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator==** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **operator==** (const bitmap_allocator< _Tp1 > &, const bitmap_allocator< _Tp2 > &) throw ()
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)

- template<typename _CharT , template< typename, typename, typename > class _Base>
  __enable_if< std::__is_char
  < _CharT >::__value, bool >
  ::__type **operator==** (const __versa_string< _CharT, std::char_traits< _CharT >, std::allocator< _CharT >, _-
  Base > &__lhs, const __versa_string< _CharT, std::char_traits< _CharT >, std::allocator< _CharT >, _Base >
  &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator== (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<class _CharT , class _Alloc >
  bool **operator==** (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **operator>** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<class _Tp , class _Alloc >
  bool **operator>** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **operator>** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _Iterator-
  R, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator>** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator<
  _Iterator, _Container > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT,
  _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator> (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<class _CharT , class _Alloc >
  bool **operator>** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT,
  _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator>** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator>** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>=** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>=** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **operator>=** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp >
  bool **operator>=** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<class _Tp , class _Alloc >
  bool **operator>=** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)

- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **operator>=** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **operator>=** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator>= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator>= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool operator>= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<class _CharT , class _Alloc >
  bool **operator>=** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator>=** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **operator>=** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4, typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::beta_distribution< _RealType > &__x)
- template<size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, rice_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, nakagami_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, pareto_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, k_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, arcsine_distribution< _RealType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, hoyt_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::triangular_distribution< _-
RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::von_mises_distribution<
_RealType > &__x)
- template<typename _UIntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::hypergeometric_-
distribution< _UIntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, logistic_distribution< _RealType > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::uniform_on_sphere_-
distribution< _Dimen, _RealType > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::uniform_inside_sphere_-
distribution< _Dimen, _RealType > &__x)
- template<typename _Tp , typename _Integer , typename _MonoidOperation >
_Tp power (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)
- template<typename _Tp , typename _Integer >
_Tp power (_Tp __x, _Integer __n)
- template<typename _InputIterator , typename _RandomAccessIterator >
_RandomAccessIterator random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator _-
_out_first, _RandomAccessIterator __out_last)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator >
_RandomAccessIterator random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator _-
_out_first, _RandomAccessIterator __out_last, _RandomNumberGenerator &__rand)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance >
_OutputIterator random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const
_Distance __n)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance , typename _RandomNumberGenerator >
_OutputIterator random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const
_Distance __n, _RandomNumberGenerator &__rand)
- void **rotate** (_Rope_iterator< char, __STL_DEFAULT_ALLOCATOR(char)> __first, _Rope_iterator< char, __S-
TL_DEFAULT_ALLOCATOR(char)> __middle, _Rope_iterator< char, __STL_DEFAULT_ALLOCATOR(char)>
__last)
- template<typename _Tp >
void **swap** (_ExtPtr_allocator< _Tp > &__larg, _ExtPtr_allocator< _Tp > &__rarg)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
void **swap** (hash_set< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, hash_set< _Val, _HashFcn, _EqualKey,
_Alloc > &__hs2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
void **swap** (hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, hash_map< _Key, _Tp, _HashFn,
_EqlKey, _Alloc > &__hm2)

- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  void **swap** (hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  void **swap** (hash_multimap< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, hash_multimap< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<typename _Cond >
  void **swap** (throw_value_base< _Cond > &__a, throw_value_base< _Cond > &__b)
- template<class _Val , class _Key , class _HF , class _Extract , class _EqKey , class _All >
  void **swap** (hashtable< _Val, _Key, _HF, _Extract, _EqKey, _All > &__ht1, hashtable< _Val, _Key, _HF, _Extract, _EqKey, _All > &__ht2)
- template<class _Tp , class _Alloc >
  void **swap** (slist< _Tp, _Alloc > &__x, slist< _Tp, _Alloc > &__y)
- template<class _CharT , class __Alloc >
  void **swap** (_Rope_char_ref_proxy< _CharT, __Alloc > __a, _Rope_char_ref_proxy< _CharT, __Alloc > __b)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  void swap (__versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<class _CharT , class _Alloc >
  void **swap** (rope< _CharT, _Alloc > &__x, rope< _CharT, _Alloc > &__y)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter,
  _ForwardIter > uninitialized_copy_n (_InputIter __first, _Size __count, _ForwardIter __result)

Variables

- static const _Lock_policy **__default_lock_policy**
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **identity_element** (_Rope_Concat_fn< _CharT, _Alloc >)

3.1.1 Detailed Description

GNU extensions for public use.

3.1.2 Function Documentation

3.1.2.1 template<typename _ToType , typename _FromType > _ToType __gnu_cxx::__static_pointer_cast (const _FromType & *__arg*) [inline]

Casting operations for cases where _FromType is not a standard pointer. _ToType can be a standard or non-standard pointer. Given that _FromType is not a pointer, it must have a get() method that returns the standard pointer equivalent of the address it points to, and must have an element_type typedef which names the type it points to.

Definition at line 68 of file cast.h.

3.1.2.2 template<typename _ToType , typename _FromType > _ToType __gnu_cxx::__static_pointer_cast (_FromType * *__arg*) [inline]

Casting operations for cases where _FromType is a standard pointer. _ToType can be a standard or non-standard pointer.

Definition at line 96 of file cast.h.

3.1.2.3 std::size_t __gnu_cxx::_Bit_scan_forward (std::size_t *__num*) [inline]

Generic Version of the bsf instruction.

Definition at line 508 of file bitmap_allocator.h.

Referenced by __gnu_cxx::bitmap_allocator< _Tp >::_M_allocate_single_object().

3.1.2.4 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test difference of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs.compare*(*__rhs*) != 0. False otherwise.

Definition at line 2389 of file vstring.h.

3.1.2.5 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator!= (const _CharT * *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test difference of C string and string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__rhs.compare*(*__lhs*) != 0. False otherwise.

Definition at line 2402 of file vstring.h.

3.1.2.6 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const _CharT * *__rhs*) [inline]

Test difference of string and C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs.compare*(*__rhs*) != 0. False otherwise.

Definition at line 2415 of file vstring.h.

3.1.2.7 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*)

Concatenate two strings.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with value of *__lhs* followed by *__rhs*.

Definition at line 181 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::reserve(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.1.2.8 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const _CharT * *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*)

Concatenate C string and string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with value of *__lhs* followed by *__rhs*.

Definition at line 194 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.1.2.9 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (_CharT *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*)

Concatenate character and string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 211 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::reserve(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.1.2.10 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const _CharT * *__rhs*)

Concatenate string and C string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 224 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.1.2.11 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, _CharT *__rhs*)

Concatenate string and character.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 241 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::reserve(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.1.2.12 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if string precedes string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 2429 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.13 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const _CharT * *__rhs*) [inline]

Test if string precedes C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 2442 of file vstring.h.

3.1.2.14 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const _CharT * *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if C string precedes string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 2455 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.15 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if string doesn't follow string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 2509 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.16 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const _CharT * *__rhs*) [inline]

Test if string doesn't follow C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 2522 of file vstring.h.

3.1.2.17 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const _CharT * *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if C string doesn't follow string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 2535 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.18 template<typename _Tp > bool __gnu_cxx::operator== (const _Pointer_adapter< _Tp > & *__lhs*, const _Pointer_adapter< _Tp > & *__rhs*) [inline]

Comparison operators for _Pointer_adapter defer to the base class' comparison operators, when possible.

Definition at line 546 of file pointer.h.

3.1.2.19 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test equivalence of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs.compare*(*__rhs*) == 0. False otherwise.

Definition at line 2338 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.20 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const _CharT * *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test equivalence of C string and string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__rhs.compare*(*__lhs*) == 0. False otherwise.

Definition at line 2362 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.21 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const _CharT * *__rhs*) [inline]

Test equivalence of string and C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs.compare*(*__rhs*) == 0. False otherwise.

Definition at line 2375 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.22 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if string follows string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 2469 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.23 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs,* const _CharT * *__rhs*) [inline]

Test if string follows C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 2482 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.24 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>(const _CharT * *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if C string follows string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 2495 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.25 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>=(const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if string doesn't precede string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 2549 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.26 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>=(const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, const _CharT * *__rhs*) [inline]

Test if string doesn't precede C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 2562 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.27 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>= (const _CharT * *__lhs*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Test if C string doesn't precede string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 2575 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare().

3.1.2.28 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> void __gnu_cxx::swap (__versa_string< _CharT, _Traits, _Alloc, _Base > & *__lhs*, __versa_string< _CharT, _Traits, _Alloc, _Base > & *__rhs*) [inline]

Swap contents of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Exchanges the contents of *__lhs* and *__rhs* in constant time.

Definition at line 2589 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::swap().

3.2 __gnu_cxx::__detail Namespace Reference

Classes

- class __mini_vector
- class _Bitmap_counter
- class _Ffit_finder

Enumerations

- enum { **_S_max_rope_depth** }
- enum { **bits_per_byte**, **bits_per_block** }
- enum **_Tag** { **_S_leaf**, **_S_concat**, **_S_substringfn**, **_S_function** }

Functions

- void __bit_allocate (std::size_t *__pbmap, std::size_t __pos) throw ()
- void __bit_free (std::size_t *__pbmap, std::size_t __pos) throw ()
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  _ForwardIterator **__lower_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _AddrPair >
  std::size_t __num_bitmaps (_AddrPair __ap)
- template<typename _AddrPair >
  std::size_t __num_blocks (_AddrPair __ap)

3.2.1 Detailed Description

Implementation details not part of the namespace __gnu_cxx interface.

3.2.2 Function Documentation

3.2.2.1 void __gnu_cxx::__detail::__bit_allocate (std::size_t * *__pbmap*, std::size_t *__pos*) throw) [inline]

Mark a memory address as allocated by re-setting the corresponding bit in the bit-map.

Definition at line 487 of file bitmap_allocator.h.

Referenced by __gnu_cxx::bitmap_allocator< _Tp >::_M_allocate_single_object().

3.2.2.2 void __gnu_cxx::__detail::__bit_free (std::size_t * *__pbmap*, std::size_t *__pos*) throw) [inline]

Mark a memory address as free by setting the corresponding bit in the bit-map.

Definition at line 498 of file bitmap_allocator.h.

Referenced by __gnu_cxx::bitmap_allocator< _Tp >::_M_deallocate_single_object().

3.2.2.3 template<typename _AddrPair > std::size_t __gnu_cxx::__detail::__num_bitmaps (_AddrPair *__ap*) [inline]

The number of Bit-maps pointed to by the address pair passed to the function.

Definition at line 274 of file bitmap_allocator.h.

References __num_blocks().

Referenced by __gnu_cxx::bitmap_allocator< _Tp >::_M_allocate_single_object(), and __gnu_cxx::bitmap_allocator< _Tp >::_M_deallocate_single_object().

3.2.2.4 template<typename _AddrPair > std::size_t __gnu_cxx::__detail::__num_blocks (_AddrPair *__ap*) [inline]

The number of Blocks pointed to by the address pair passed to the function.

Definition at line 266 of file bitmap_allocator.h.

Referenced by __num_bitmaps().

3.3 __gnu_cxx::typelist Namespace Reference

Functions

- template<typename Fn , typename Typelist >
  void **apply** (Fn &, Typelist)
- template<typename Gn , typename Typelist >
  void apply_generator (Gn &, Typelist)
- template<typename Gn , typename TypelistT , typename TypelistV >
  void **apply_generator** (Gn &, TypelistT, TypelistV)
- template<typename Fn , typename Typelist >
  void **apply_generator** (Fn &fn, Typelist)
- template<typename Fn , typename TypelistT , typename TypelistV >
  void **apply_generator** (Fn &fn, TypelistT, TypelistV)

3.3.1 Detailed Description

GNU typelist extensions for public compile-time use.

3.3.2 Function Documentation

3.3.2.1 template<typename Gn , typename Typelist > void __gnu_cxx::typelist::apply_generator (Gn & , Typelist)

Apply all typelist types to generator functor.

3.4 __gnu_debug Namespace Reference

Classes

- class _After_nth_from
- struct _BeforeBeginHelper
- class _Equal_to
- class _Not_equal_to
- class _Safe_container
- class _Safe_forward_list
- class _Safe_iterator
- class _Safe_iterator_base
- class _Safe_local_iterator
- class _Safe_local_iterator_base
- class _Safe_node_sequence
- class _Safe_sequence
- class _Safe_sequence_base
- class _Safe_unordered_container
- class _Safe_unordered_container_base
- class _Safe_vector
- struct _Sequence_traits
- class basic_string

Typedefs

- typedef basic_string< char > **string**
- typedef basic_string< wchar_t > **wstring**

Enumerations

- enum **_Debug_msg_id** {
  __msg_valid_range, **__msg_insert_singular**, **__msg_insert_different**, **__msg_erase_bad**,
  __msg_erase_different, **__msg_subscript_oob**, **__msg_empty**, **__msg_unpartitioned**,
  __msg_unpartitioned_pred, **__msg_unsorted**, **__msg_unsorted_pred**, **__msg_not_heap**,
  __msg_not_heap_pred, **__msg_bad_bitset_write**, **__msg_bad_bitset_read**, **__msg_bad_bitset_flip**,
  __msg_self_splice, **__msg_splice_alloc**, **__msg_splice_bad**, **__msg_splice_other**,
  __msg_splice_overlap, **__msg_init_singular**, **__msg_init_copy_singular**, **__msg_init_const_singular**,
  __msg_copy_singular, **__msg_bad_deref**, **__msg_bad_inc**, **__msg_bad_dec**,
  __msg_iter_subscript_oob, **__msg_advance_oob**, **__msg_retreat_oob**, **__msg_iter_compare_bad**,
  __msg_compare_different, **__msg_iter_order_bad**, **__msg_order_different**, **__msg_distance_bad**,
  __msg_distance_different, **__msg_deref_istream**, **__msg_inc_istream**, **__msg_output_ostream**,
  __msg_deref_istreambuf, **__msg_inc_istreambuf**, **__msg_insert_after_end**, **__msg_erase_after_bad**,
  __msg_valid_range2, **__msg_local_iter_compare_bad**, **__msg_non_empty_range**, **__msg_self_move_-assign**,
  __msg_bucket_index_oob, **__msg_valid_load_factor**, **__msg_equal_allocs**, **__msg_insert_range_from_-self**,
  __msg_irreflexive_ordering }
- enum _Distance_precision {
  __dp_none, **__dp_equality**, **__dp_sign**, **__dp_sign_max_size**,
  __dp_exact }

Functions

- template<typename _Iterator , typename _Sequence >
  std::reverse_iterator< _Iterator > **__base** (const std::reverse_iterator< _Safe_iterator< _Iterator, _Sequence, std::random_access_iterator_tag > > &__it)
- template<typename _Iterator >
  auto **__base** (const std::move_iterator< _Iterator > &__it) -> decltype(std::make_move_iterator(__base(__it.-base())))
- template<typename _Iterator >
  constexpr _Iterator __base (_Iterator __it)
- template<typename _Iterator , typename _Sequence >
  _Iterator **__base** (const _Safe_iterator< _Iterator, _Sequence, std::random_access_iterator_tag > &__it)
- template<typename _Iterator , typename _Size >
  bool **__can_advance** (const std::reverse_iterator< _Iterator > &__it, _Size __n)
- template<typename _Iterator , typename _Size >
  bool **__can_advance** (const std::move_iterator< _Iterator > &__it, _Size __n)
- template<typename _InputIterator , typename _Size >
  constexpr bool **__can_advance** (_InputIterator, _Size)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _Size >
  bool **__can_advance** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, _Size)
- template<typename _ForwardIterator , typename _Tp >
  constexpr bool **__check_partitioned_lower** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__-value)

- template<typename _ForwardIterator , typename _Tp , typename _Pred >
  constexpr bool **__check_partitioned_lower** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value, _Pred __pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr bool **__check_partitioned_upper** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _ForwardIterator , typename _Tp , typename _Pred >
  constexpr bool **__check_partitioned_upper** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value, _Pred __pred)
- template<typename _Iterator >
  bool **__check_singular** (const _Iterator &)
- template<typename _Tp >
  bool __check_singular (_Tp *const &__ptr)
- bool **__check_singular_aux** (const void *)
- bool __check_singular_aux (const _Safe_iterator_base *__x)
- template<typename _InputIterator >
  constexpr bool **__check_sorted** (const _InputIterator &__first, const _InputIterator &__last)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__check_sorted** (const _InputIterator &__first, const _InputIterator &__last, _Predicate __pred)
- template<typename _InputIterator >
  constexpr bool **__check_sorted_aux** (const _InputIterator &, const _InputIterator &, std::input_iterator_tag)
- template<typename _ForwardIterator >
  constexpr bool **__check_sorted_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__check_sorted_aux** (const _InputIterator &, const _InputIterator &, _Predicate, std::input_iterator_tag)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr bool **__check_sorted_aux** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, std::forward_iterator_tag)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr bool **__check_sorted_set** (const _InputIterator1 &__first, const _InputIterator1 &__last, const _InputIterator2 &)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Predicate >
  constexpr bool **__check_sorted_set** (const _InputIterator1 &__first, const _InputIterator1 &__last, const _InputIterator2 &, _Predicate __pred)
- template<typename _InputIterator >
  constexpr bool **__check_sorted_set_aux** (const _InputIterator &__first, const _InputIterator &__last, std::__true_type)
- template<typename _InputIterator >
  constexpr bool **__check_sorted_set_aux** (const _InputIterator &, const _InputIterator &, std::__false_type)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__check_sorted_set_aux** (const _InputIterator &__first, const _InputIterator &__last, _Predicate __pred, std::__true_type)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__check_sorted_set_aux** (const _InputIterator &, const _InputIterator &, _Predicate, std::__false_type)
- template<typename _CharT , typename _Integer >
  const _CharT * __check_string (const _CharT *__s, _Integer __n, const char *__file, unsigned int __line, const char *__function)
- template<typename _CharT >
  const _CharT * __check_string (const _CharT *__s, const char *__file, unsigned int __line, const char *__function)

- template<typename _InputIterator >
  _InputIterator **__check_valid_range** (const _InputIterator &__first, const _InputIterator &__last, const char *__file, unsigned int __line, const char *__function)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__foreign_iterator** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, _InputIterator __other, _InputIterator __other_end)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _Integral >
  bool **__foreign_iterator_aux** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, _Integral, _Integral, std::__true_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__foreign_iterator_aux** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, _InputIterator __other, _InputIterator __other_end, std::__false_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator >
  bool __foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _Safe_iterator< _OtherIterator, _Sequence, _Category > &__other, const _Safe_iterator< _OtherIterator, _Sequence, _Category > &)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator , typename _OtherSequence , typename _OtherCategory >
  bool __foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > &, const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > &)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__foreign_iterator_aux2** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _InputIterator &__other, const _InputIterator &__other_end)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__foreign_iterator_aux3** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _InputIterator &__other, const _InputIterator &__other_end, std::__true_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__foreign_iterator_aux3** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _InputIterator &, const _InputIterator &, std::__false_type)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__foreign_iterator_aux4** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const typename _Sequence::value_type *__other)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__foreign_iterator_aux4** (const _Safe_iterator< _Iterator, _Sequence, _Category > &,...)
- template<typename _Iterator >
  _Distance_traits< _Iterator >
  ::__type **__get_distance** (const std::reverse_iterator< _Iterator > &__first, const std::reverse_iterator< _Iterator > &__last)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type __get_distance (_Iterator __lhs, _Iterator __rhs, std::random_access_iterator_tag)
- template<typename _Iterator >
  _Distance_traits< _Iterator >
  ::__type **__get_distance** (const std::move_iterator< _Iterator > &__first, const std::move_iterator< _Iterator > &__last)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type **__get_distance** (_Iterator __lhs, _Iterator __rhs, std::input_iterator_tag)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type **__get_distance** (_Iterator __lhs, _Iterator __rhs)

- template<typename _Iterator >
  constexpr bool **__is_irreflexive** (_Iterator __it)
- template<typename _Iterator , typename _Pred >
  constexpr bool **__is_irreflexive_pred** (_Iterator __it, _Pred __pred)
- template<typename _Iterator >
  auto **__unsafe** (const std::reverse_iterator< _Iterator > &__it) -> decltype(std::__make_reverse_iterator(__unsafe(__it.base())))
- template<typename _Iterator >
  auto **__unsafe** (const std::move_iterator< _Iterator > &__it) -> decltype(std::make_move_iterator(__unsafe(__it.base())))
- template<typename _Iterator >
  _Iterator **__unsafe** (_Iterator __it)
- template<typename _Iterator , typename _Sequence >
  _Iterator **__unsafe** (const _Safe_local_iterator< _Iterator, _Sequence > &__it)
- template<typename _Iterator , typename _Sequence >
  _Iterator **__unsafe** (const _Safe_iterator< _Iterator, _Sequence > &__it)
- template<typename _Iterator >
  bool **__valid_range** (const std::reverse_iterator< _Iterator > &__first, const std::reverse_iterator< _Iterator > &__last, typename _Distance_traits< _Iterator >::__type &__dist)
- template<typename _Iterator >
  bool **__valid_range** (const std::move_iterator< _Iterator > &__first, const std::move_iterator< _Iterator > &__last, typename _Distance_traits< _Iterator >::__type &__dist)
- template<typename _InputIterator >
  constexpr bool __valid_range (_InputIterator __first, _InputIterator __last, typename _Distance_traits< _InputIterator >::__type &__dist)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool __valid_range (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _Iterator, _Sequence, _Category > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _Iterator , typename _Sequence >
  bool __valid_range (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _InputIterator >
  constexpr bool **__valid_range** (_InputIterator __first, _InputIterator __last)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__valid_range** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _Iterator, _Sequence, _Category > &)
- template<typename _Iterator , typename _Sequence >
  bool **__valid_range** (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &)
- template<typename _Integral >
  constexpr bool __valid_range_aux (_Integral, _Integral, std::__true_type)
- template<typename _Integral >
  constexpr bool **__valid_range_aux** (_Integral, _Integral, typename _Distance_traits< _Integral >::__type &__dist, std::__true_type)
- template<typename _InputIterator >
  constexpr bool **__valid_range_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _InputIterator >
  constexpr bool **__valid_range_aux** (_InputIterator __first, _InputIterator __last, std::random_access_iterator_tag)
- template<typename _InputIterator >
  constexpr bool __valid_range_aux (_InputIterator __first, _InputIterator __last, std::__false_type)

- template<typename _InputIterator >
constexpr bool **__valid_range_aux** (_InputIterator __first, _InputIterator __last, typename _Distance_traits< _-InputIterator >::__type &__dist, std::__false_type)
- template<typename _CharT , typename _Traits , typename _Allocator >
std::basic_istream< _CharT,
_Traits > & **getline** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Allocator >
std::basic_istream< _CharT,
_Traits > & **getline** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator!=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator!=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator!=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **operator+** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **operator+** (_CharT __lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
std::basic_ostream< _CharT,
_Traits > & **operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const basic_string< _CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **operator<=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)

- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator==** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator==** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator==** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **operator>=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
  void **swap** (basic_string< _CharT, _Traits, _Allocator > &__lhs, basic_string< _CharT, _Traits, _Allocator > &__rhs)

3.4.1 Detailed Description

GNU debug classes for public use.

3.4.2 Enumeration Type Documentation

3.4.2.1 enum __gnu_debug::_Distance_precision

The precision to which we can calculate the distance between two iterators.

Definition at line 52 of file helper_functions.h.

3.4.3 Function Documentation

3.4.3.1 template<typename _Iterator > constexpr _Iterator __gnu_debug::__base (_Iterator __*it*) [inline]

Helper function to extract base iterator of random access safe iterator in order to reduce performance impact of debug mode. Limited to random access iterator because it is the only category for which it is possible to check for correct iterators order in the __valid_range function thanks to the < operator.

Definition at line 299 of file helper_functions.h.

Referenced by __gnu_parallel::__for_each_template_random_access_workstealing(), std::__detail::__from_chars_digit(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_before_dereferenceable(),

std::boolalpha(), std::dec(), std::defaultfloat(), std::fixed(), std::hex(), std::hexfloat(), std::internal(), std::left(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), std::nouppercase(), std::oct(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

3.4.3.2 template<typename _Tp > bool __gnu_debug::__check_singular (_Tp *const & *__ptr*) [inline]

Non-NULL pointers are nonsingular.

Definition at line 130 of file helper_functions.h.

3.4.3.3 bool __gnu_debug::__check_singular_aux (const _Safe_iterator_base * *__x*) [inline]

Iterators that derive from _Safe_iterator_base can be determined singular or non-singular.

Definition at line 168 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_singular().

3.4.3.4 template<typename _CharT , typename _Integer > const _CharT* __gnu_debug::__check_string (const _CharT * *__s,* _Integer *__n,* const char * *__file,* unsigned int *__line,* const char * *__function*) [inline]

Checks that __s is non-NULL or __n == 0, and then returns __s.

Definition at line 49 of file debug/string.

3.4.3.5 template<typename _CharT > const _CharT* __gnu_debug::__check_string (const _CharT * *__s,* const char * *__file,* unsigned int *__line,* const char * *__function*) [inline]

Checks that __s is non-NULL and then returns __s.

Definition at line 65 of file debug/string.

3.4.3.6 template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator > bool __gnu_debug::__foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > & *__it,* const _Safe_iterator< _OtherIterator, _Sequence, _Category > & *__other,* const _Safe_iterator< _OtherIterator, _Sequence, _Category > &) [inline]

Handle debug iterators from the same type of container.

Definition at line 127 of file functions.h.

3.4.3.7 template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator , typename _OtherSequence , typename _OtherCategory > bool __gnu_debug::__foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > & , const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > & , const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > &) [inline]

Handle debug iterators from different types of container.

Definition at line 138 of file functions.h.

3.4.3.8 template<typename _Iterator > constexpr _Distance_traits<_Iterator>::__type __gnu_debug::__get_distance (_Iterator *__lhs,* _Iterator *__rhs,* **std::random_access_iterator_tag**) [inline]

Determine the distance between two iterators with some known precision.

Definition at line 94 of file helper_functions.h.

3.4.3.9 template<typename _InputIterator > constexpr bool __gnu_debug::__valid_range (_InputIterator *__first,* _InputIterator *__last,* typename _Distance_traits< _InputIterator >::__type & *__dist*) [inline]

Don't know what these iterators are, or if they are even iterators (we may get an integral type for InputIterator), so see if they are integral and pass them on to the next phase otherwise.

Definition at line 225 of file helper_functions.h.

References __valid_range_aux().

3.4.3.10 template<typename _Iterator , typename _Sequence , typename _Category > bool __gnu_debug::__valid_range (const _Safe_iterator< _Iterator, _Sequence, _Category > & *__first,* const _Safe_iterator< _Iterator, _Sequence, _Category > & *__last,* typename _Distance_traits< _Iterator >::__type & *__dist*) [inline]

Safe iterators know how to check if they form a valid range.

Definition at line 934 of file safe_iterator.h.

3.4.3.11 template<typename _Iterator , typename _Sequence > bool __gnu_debug::__valid_range (const _Safe_local_iterator< _Iterator, _Sequence > & *__first,* const _Safe_local_iterator< _Iterator, _Sequence > & *__last,* typename _Distance_traits< _Iterator >::__type & *__dist_info*) [inline]

Safe local iterators know how to check if they form a valid range.

Definition at line 407 of file safe_local_iterator.h.

3.4.3.12 template<typename _Integral > constexpr bool __gnu_debug::__valid_range_aux (_Integral , _Integral , std::__true_type) [inline]

We say that integral types for a valid range, and defer to other routines to realize what to do with integral types instead of iterators.

Definition at line 140 of file helper_functions.h.

Referenced by __valid_range(), and __valid_range_aux().

3.4.3.13 template<typename _InputIterator > constexpr bool __gnu_debug::__valid_range_aux (_InputIterator *__first,* _InputIterator *__last,* std::__false_type) [inline]

We have iterators, so figure out what kind of iterators they are to see if we can check the range ahead of time.

Definition at line 181 of file helper_functions.h.

References std::__iterator_category(), and __valid_range_aux().

3.5 __gnu_internal Namespace Reference

3.5.1 Detailed Description

GNU implemenation details, not for public use or export. Used only when anonymous namespaces cannot be substituted.

3.6 __gnu_parallel Namespace Reference

Classes

- struct __accumulate_binop_reduct
- struct __accumulate_selector

- struct __adjacent_difference_selector
- struct __adjacent_find_selector
- class __binder1st
- class __binder2nd
- struct __count_if_selector
- struct __count_selector
- struct __fill_selector
- struct __find_first_of_selector
- struct __find_if_selector
- struct __for_each_selector
- struct __generate_selector
- struct __generic_find_selector
- struct __generic_for_each_selector
- struct __identity_selector
- struct __inner_product_selector
- struct __max_element_reduct
- struct __min_element_reduct
- struct __mismatch_selector
- struct __multiway_merge_3_variant_sentinel_switch
- struct __multiway_merge_3_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __multiway_merge_4_variant_sentinel_switch
- struct __multiway_merge_4_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __multiway_merge_k_variant_sentinel_switch
- struct __multiway_merge_k_variant_sentinel_switch< false, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __replace_if_selector
- struct __replace_selector
- struct __transform1_selector
- struct __transform2_selector
- class __unary_negate
- struct _DRandomShufflingGlobalData
- struct _DRSSorterPU
- struct _DummyReduct
- class _EqualFromLess
- struct _EqualTo
- class _GuardedIterator
- class _IteratorPair
- class _IteratorTriple
- struct _Job
- struct _Less
- class _Lexicographic
- class _LexicographicReverse
- class _LoserTree
- class _LoserTree< false, _Tp, _Compare >
- class _LoserTreeBase
- class _LoserTreePointer
- class _LoserTreePointer< false, _Tp, _Compare >
- class _LoserTreePointerBase
- class _LoserTreePointerUnguarded

- class _LoserTreePointerUnguarded< false, _Tp, _Compare >
- class _LoserTreePointerUnguardedBase
- struct _LoserTreeTraits
- class _LoserTreeUnguarded
- class _LoserTreeUnguarded< false, _Tp, _Compare >
- class _LoserTreeUnguardedBase
- struct _Multiplies
- struct _Nothing
- struct _Piece
- struct _Plus
- struct _PMWMSSortingData
- class _PseudoSequence
- class _PseudoSequenceIterator
- struct _QSBThreadLocal
- class _RandomNumber
- class _RestrictedBoundedConcurrentQueue
- struct _SamplingSorter
- struct _SamplingSorter< false, _RAIter, _StrictWeakOrdering >
- struct _Settings
- struct _SplitConsistently
- struct _SplitConsistently< false, _RAIter, _Compare, _SortingPlacesIterator >
- struct _SplitConsistently< true, _RAIter, _Compare, _SortingPlacesIterator >
- struct balanced_quicksort_tag
- struct balanced_tag
- struct constant_size_blocks_tag
- struct default_parallel_tag
- struct equal_split_tag
- struct exact_tag
- struct find_tag
- struct growing_blocks_tag
- struct multiway_mergesort_exact_tag
- struct multiway_mergesort_sampling_tag
- struct multiway_mergesort_tag
- struct omp_loop_static_tag
- struct omp_loop_tag
- struct parallel_tag
- struct quicksort_tag
- struct sampling_tag
- struct sequential_tag
- struct unbalanced_tag

Typedefs

- typedef unsigned short _BinIndex
- typedef int64_t _CASable
- typedef uint64_t _SequenceIndex
- typedef uint16_t _ThreadIndex

Enumerations

- enum _AlgorithmStrategy { **heuristic**, **force_sequential**, **force_parallel** }
- enum _FindAlgorithm { **GROWING_BLOCKS**, **CONSTANT_SIZE_BLOCKS**, **EQUAL_SPLIT** }
- enum _MultiwayMergeAlgorithm { **LOSER_TREE** }
- enum _Parallelism {
  sequential, parallel_unbalanced, parallel_balanced, parallel_omp_loop,
  parallel_omp_loop_static, parallel_taskqueue }
- enum _PartialSumAlgorithm { **RECURSIVE**, **LINEAR** }
- enum _SortAlgorithm { **MWMS**, **QS**, **QS_BALANCED** }
- enum _SplittingAlgorithm { **SAMPLING**, **EXACT** }

Functions

- template<typename _Tp >
  _Tp **__add_omp** (volatile _Tp *__ptr, _Tp __addend)
- template<typename _RAIter , typename _DifferenceTp >
  void __calc_borders (_RAIter __elements, _DifferenceTp __length, _DifferenceTp *__off)
- template<typename _Tp >
  bool **__cas_omp** (volatile _Tp *__ptr, _Tp __comparand, _Tp __replacement)
- template<typename _Tp >
  bool __compare_and_swap (volatile _Tp *__ptr, _Tp __comparand, _Tp __replacement)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **__copy_tail** (std::pair< _IIter, _IIter > __b, std::pair< _IIter, _IIter > __e, _OutputIterator __r)
- void __decode2 (_CASable __x, int &__a, int &__b)
- template<typename _RAIter , typename _DifferenceTp >
  void __determine_samples (_PMWMSSortingData< _RAIter > *__sd, _DifferenceTp __num_samples)
- _CASable __encode2 (int __a, int __b)
- template<typename _DifferenceType , typename _OutputIterator >
  _OutputIterator __equally_split (_DifferenceType __n, _ThreadIndex __num_threads, _OutputIterator __s)
- template<typename _DifferenceType >
  _DifferenceType __equally_split_point (_DifferenceType __n, _ThreadIndex __num_threads, _ThreadIndex __thread_no)
- template<typename _Tp >
  _Tp __fetch_and_add (volatile _Tp *__ptr, _Tp __addend)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector >
  std::pair< _RAIter1, _RAIter2 > __find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector >
  std::pair< _RAIter1, _RAIter2 > __find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, equal_split_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector >
  std::pair< _RAIter1, _RAIter2 > __find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, growing_blocks_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector >
  std::pair< _RAIter1, _RAIter2 > __find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, constant_size_blocks_tag)
- template<typename _IIter , typename _UserOp , typename _Functionality , typename _Red , typename _Result >
  _UserOp __for_each_template_random_access (_IIter __begin, _IIter __end, _UserOp __user_op, _Functionality &__functionality, _Red __reduction, _Result __reduction_start, _Result &__output, typename std::iterator_traits< _IIter >::difference_type __bound, _Parallelism __parallelism_tag)

- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __for_each_template_random_access_ed (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)
- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __for_each_template_random_access_omp_loop (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)
- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __for_each_template_random_access_omp_loop_static (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)
- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __for_each_template_random_access_workstealing (_RAIter __begin, _RAIter __end, _Op __op, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)
- _ThreadIndex **__get_max_threads** ()
- bool **__is_parallel** (const _Parallelism __p)
- template<typename _IIter , typename _Compare >
  bool __is_sorted (_IIter __begin, _IIter __end, _Compare __comp)
- template<typename _RAIter , typename _Compare >
  _RAIter __median_of_three_iterators (_RAIter __a, _RAIter __b, _RAIter __c, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __merge_advance_movc (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __merge_advance_usual (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _Compare >
  _RAIter3 __parallel_merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _RAIter3 __target, typename std::iterator_traits< _RAIter1 >::difference_type __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter3 , typename _Compare >
  _RAIter3 __parallel_merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter1 &__begin2, _RAIter1 __end2, _RAIter3 __target, typename std::iterator_traits< _RAIter1 >::difference_type __max_length, _Compare __comp)
- template<typename _RAIter , typename _Compare >
  void __parallel_nth_element (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp)
- template<typename _RAIter , typename _Compare >
  void __parallel_partial_sort (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __parallel_partial_sum (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __parallel_partial_sum_basecase (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, typename std::iterator_traits< _IIter >::value_type __value)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __parallel_partial_sum_linear (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, typename std::iterator_traits< _IIter >::difference_type __n)
- template<typename _RAIter , typename _Predicate >
  std::iterator_traits< _RAIter >
  ::difference_type __parallel_partition (_RAIter __begin, _RAIter __end, _Predicate __pred, _ThreadIndex __num_threads)

- template<typename _RAIter , typename _RandomNumberGenerator >
  void __parallel_random_shuffle (_RAIter __begin, _RAIter __end, _RandomNumberGenerator __rng=_Random-Number())
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __parallel_random_shuffle_drs (_RAIter __begin, _RAIter __end, typename std::iterator_traits< _RAIter >-::difference_type __n, _ThreadIndex __num_threads, _RandomNumberGenerator &__rng)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __parallel_random_shuffle_drs_pu (_DRSSorterPU< _RAIter, _RandomNumberGenerator > *__pus)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__parallel_set_difference** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _-OutputIterator __result, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__parallel_set_intersection** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _-OutputIterator __result, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _Operation >
  _OutputIterator **__parallel_set_operation** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _-OutputIterator __result, _Operation __op)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__parallel_set_symmetric_difference** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter _-_end2, _OutputIterator __result, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__parallel_set_union** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _Output-Iterator __result, _Compare __comp)
- template<bool __stable, typename _RAIter , typename _Compare , typename _Parallelism >
  void **__parallel_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_tag __-parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_exact_tag __-parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_sampling_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, quicksort_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, balanced_quicksort_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, default_parallel_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, parallel_tag __parallelism)
- template<typename _RAIter , typename _Compare >
  void __parallel_sort_qs (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _RAIter , typename _Compare >
  void __parallel_sort_qs_conquer (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_-threads)
- template<typename _RAIter , typename _Compare >
  std::iterator_traits< _RAIter >
  ::difference_type __parallel_sort_qs_divide (_RAIter __begin, _RAIter __end, _Compare __comp, typename std-::iterator_traits< _RAIter >::difference_type __pivot_rank, typename std::iterator_traits< _RAIter >::difference_-type __num_samples, _ThreadIndex __num_threads)

- template<typename _RAIter , typename _Compare >
  void __parallel_sort_qsb (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _IIter , class _OutputIterator , class _BinaryPredicate >
  _OutputIterator __parallel_unique_copy (_IIter __first, _IIter __last, _OutputIterator __result, _BinaryPredicate __binary_pred)
- template<typename _IIter , class _OutputIterator >
  _OutputIterator __parallel_unique_copy (_IIter __first, _IIter __last, _OutputIterator __result)
- template<typename _RAIter , typename _Compare >
  void __qsb_conquer (_QSBThreadLocal< _RAIter > **__tls, _RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __iam, _ThreadIndex __num_threads, bool __parent_wait)
- template<typename _RAIter , typename _Compare >
  std::iterator_traits< _RAIter >
  ::difference_type __qsb_divide (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _RAIter , typename _Compare >
  void __qsb_local_sort_with_helping (_QSBThreadLocal< _RAIter > **__tls, _Compare &__comp, _ThreadIndex __iam, bool __wait)
- template<typename _RandomNumberGenerator >
  int __random_number_pow2 (int __logp, _RandomNumberGenerator &__rng)
- template<typename _Size >
  _Size __rd_log2 (_Size __n)
- template<typename _Tp >
  _Tp __round_up_to_pow2 (_Tp __x)
- template<typename __RAIter1 , typename __RAIter2 , typename _Pred >
  __RAIter1 __search_template (__RAIter1 __begin1, __RAIter1 __end1, __RAIter2 __begin2, __RAIter2 __end2, _Pred __pred)
- template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __sequential_multiway_merge (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __sequential_random_shuffle (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &__rng)
- template<typename _IIter >
  void __shrink (std::vector< _IIter > &__os_starts, size_t &__count_to_two, size_t &__range_length)
- template<typename _IIter >
  void __shrink_and_double (std::vector< _IIter > &__os_starts, size_t &__count_to_two, size_t &__range_length, const bool __make_twice)
- void __yield ()
- template<typename _IIter , typename _FunctorType >
  size_t list_partition (const _IIter __begin, const _IIter __end, _IIter *__starts, size_t *__lengths, const int __num_parts, _FunctorType &__f, int __oversampling=0)
- template<typename _Tp >
  const _Tp & max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp >
  const _Tp & min (const _Tp &__a, const _Tp &__b)
- template<typename _RanSeqs , typename _RankType , typename _RankIterator , typename _Compare >
  void multiseq_partition (_RanSeqs __begin_seqs, _RanSeqs __end_seqs, _RankType __rank, _RankIterator __begin_offsets, _Compare __comp=std::less< typename std::iterator_traits< typename std::iterator_traits< _RanSeqs >::value_type::first_type >::value_type >())
- template<typename _Tp , typename _RanSeqs , typename _RankType , typename _Compare >
  _Tp multiseq_selection (_RanSeqs __begin_seqs, _RanSeqs __end_seqs, _RankType __rank, _RankType &__offset, _Compare __comp=std::less< _Tp >())

- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut multiway_merge (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 multiway_merge_3_variant (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 multiway_merge_4_variant (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType >
  void multiway_merge_exact_splitting (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _DifferenceType __length, _DifferenceType __total_length, _Compare __comp, std::vector< std::pair< _DifferenceType, _DifferenceType > > *__pieces)
- template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 multiway_merge_loser_tree (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<typename _UnguardedLoserTree , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 multiway_merge_loser_tree_sentinel (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 multiway_merge_loser_tree_unguarded (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType >
  void multiway_merge_sampling_splitting (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _DifferenceType __length, _DifferenceType __total_length, _Compare __comp, std::vector< std::pair< _DifferenceType, _DifferenceType > > *__pieces)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut multiway_merge_sentinels (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)

- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Splitter , typename _Compare >
  _RAIter3 parallel_multiway_merge (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _Splitter __splitter, _DifferenceTp __length, _Compare __comp, _ThreadIndex __num_threads)
- template<bool __stable, bool __exact, typename _RAIter , typename _Compare >
  void parallel_sort_mwms (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<bool __stable, bool __exact, typename _RAIter , typename _Compare >
  void parallel_sort_mwms_pu (_PMWMSSortingData< _RAIter > *__sd, _Compare &__comp)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)

Variables

- static const int _CASable_bits
- static const _CASable _CASable_mask

3.6.1 Detailed Description

GNU parallel code for public use.

3.6.2 Typedef Documentation

3.6.2.1 typedef unsigned short __gnu_parallel::_BinIndex

Type to hold the index of a bin.

Since many variables of this type are allocated, it should be chosen as small as possible.

Definition at line 47 of file random_shuffle.h.

3.6.2.2 typedef int64_t __gnu_parallel::_CASable

Longest compare-and-swappable integer type on this platform.

Definition at line 127 of file types.h.

3.6.2.3 typedef uint64_t __gnu_parallel::_SequenceIndex

Unsigned integer to index __elements. The total number of elements for each algorithm must fit into this type.

Definition at line 117 of file types.h.

3.6.2.4 typedef uint16_t __gnu_parallel::_ThreadIndex

Unsigned integer to index a thread number. The maximum thread number (for each processor) must fit into this type.

Definition at line 123 of file types.h.

3.6.3 Enumeration Type Documentation

3.6.3.1 enum __gnu_parallel::_AlgorithmStrategy

Strategies for run-time algorithm selection:

Definition at line 67 of file types.h.

3.6.3.2 enum __gnu_parallel::_FindAlgorithm

Find algorithms:

Definition at line 106 of file types.h.

3.6.3.3 enum __gnu_parallel::_MultiwayMergeAlgorithm

Merging algorithms:

Definition at line 85 of file types.h.

3.6.3.4 enum __gnu_parallel::_Parallelism

Run-time equivalents for the compile-time tags.

Enumerator

sequential Not parallel.

parallel_unbalanced Parallel unbalanced (equal-sized chunks).

parallel_balanced Parallel balanced (work-stealing).

parallel_omp_loop Parallel with OpenMP dynamic load-balancing.

parallel_omp_loop_static Parallel with OpenMP static load-balancing.

parallel_taskqueue Parallel with OpenMP taskqueue construct.

Definition at line 44 of file types.h.

3.6.3.5 enum __gnu_parallel::_PartialSumAlgorithm

Partial sum algorithms: recursive, linear.

Definition at line 91 of file types.h.

3.6.3.6 enum __gnu_parallel::_SortAlgorithm

Sorting algorithms:

Definition at line 76 of file types.h.

3.6.3.7 enum __gnu_parallel::_SplittingAlgorithm

Sorting/merging algorithms: sampling, __exact.

Definition at line 98 of file types.h.

3.6.4 Function Documentation

3.6.4.1 template<typename _RAIter , typename _DifferenceTp > void __gnu_parallel::__calc_borders (_RAIter *__elements,* _DifferenceTp *__length,* _DifferenceTp * *__off*)

Precalculate __advances for Knuth-Morris-Pratt algorithm.

Parameters

__elements	Begin iterator of sequence to search for.
__length	Length of sequence to search for.
__off	Returned __offsets.

Definition at line 51 of file search.h.

Referenced by __search_template().

3.6.4.2 template<typename _Tp > bool __gnu_parallel::__compare_and_swap (volatile _Tp * *__ptr,* _Tp *__comparand,* _Tp *__replacement*) [inline]

Compare-and-swap.

Compare `*__ptr` and `__comparand`. If equal, let `*__ptr=__replacement` and return `true`, return `false` otherwise.

Parameters

__ptr	Pointer to signed integer.
__comparand	Compare value.
__replacement	Replacement value.

Definition at line 108 of file parallel/compatibility.h.

Referenced by __parallel_partition(), __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_back(), and __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_front().

3.6.4.3 void __gnu_parallel::__decode2 (_CASable __x, int & __a, int & __b) [inline]

Decode two integers from one gnu_parallel::_CASable.

Parameters

__x	__gnu_parallel::_CASable to decode integers from.
__a	First integer, to be decoded from the most-significant _CASable_bits/2 bits of __x.
__b	Second integer, to be encoded in the least-significant _CASable_bits/2 bits of __x.

See Also

__encode2

Definition at line 133 of file base.h.

References _CASable_bits, and _CASable_mask.

Referenced by __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_back(), __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_front(), and __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::push_front().

3.6.4.4 template<typename _RAIter , typename _DifferenceTp > void __gnu_parallel::__determine_samples (_PMWMSSortingData< _RAIter > * *__sd,* _DifferenceTp *__num_samples*)

Select _M_samples from a sequence.

Parameters

__sd	Pointer to algorithm data. _Result will be placed in __sd->_M_samples.
__num_samples	Number of _M_samples to select.

Definition at line 97 of file multiway_mergesort.h.

References __equally_split(), __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_samples, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_source, and __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_starts.

3.6.4.5 _CASable __gnu_parallel::__encode2 (int *__a,* int *__b*) [inline]

Encode two integers into one gnu_parallel::_CASable.

Parameters

__a	First integer, to be encoded in the most-significant _CASable_bits/2 bits.
__b	Second integer, to be encoded in the least-significant _CASable_bits/2 bits.

Returns

value encoding __a and __b.

See Also

__decode2

Definition at line 119 of file base.h.

References _CASable_bits.

Referenced by __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::_RestrictedBoundedConcurrentQueue(), __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_back(), __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::pop_front(), and __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::push_front().

3.6.4.6 template<typename _DifferenceType , typename _OutputIterator > _OutputIterator __gnu_parallel::__equally_split (_DifferenceType __n, _ThreadIndex __num_threads, _OutputIterator __s)

function to split a sequence into parts of almost equal size.

The resulting sequence __s of length __num_threads+1 contains the splitting positions when splitting the range [0,__n) into parts of almost equal size (plus minus 1). The first entry is 0, the last one n. There may result empty parts.

Parameters

__n	Number of elements
__num_threads	Number of parts
__s	Splitters

Returns

End of __splitter sequence, i.e. `__s+__num_threads+1`

Definition at line 48 of file equally_split.h.

Referenced by __determine_samples(), __find_template(), __parallel_partial_sum_linear(), __parallel_unique_copy(), __search_template(), and multiway_merge_exact_splitting().

3.6.4.7 template<typename _DifferenceType > _DifferenceType __gnu_parallel::__equally_split_point (_DifferenceType __n, _ThreadIndex __num_threads, _ThreadIndex __thread_no)

function to split a sequence into parts of almost equal size.

Returns the position of the splitting point between thread number __thread_no (included) and thread number __thread_no+1 (excluded).

Parameters

__n	Number of elements
__num_threads	Number of parts
__thread_no	Number of threads

Returns

splitting point

Definition at line 75 of file equally_split.h.

Referenced by __for_each_template_random_access_ed().

3.6.4.8 template<typename _Tp > _Tp __gnu_parallel::__fetch_and_add (volatile _Tp * __ptr, _Tp __addend) [inline]

Add a value to a variable, atomically.

Parameters

__ptr	Pointer to a signed integer.
__addend	Value to add.

Definition at line 74 of file parallel/compatibility.h.

Referenced by __parallel_partition(), and __gnu_parallel::_RestrictedBoundedConcurrentQueue< pair< _RAIter, _RAIter > >::push_front().

3.6.4.9 template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_template (_RAIter1 *__begin1,* _RAIter1 *__end1,* _RAIter2 *__begin2,* _Pred *__pred,* _Selector *__selector*) [inline]

Parallel std::find, switch for different algorithms.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence. Must have same length as first sequence.
__pred	Find predicate.
__selector	_Functionality (e. g. std::find_if(), std::equal(),...)

Returns

Place of finding in both sequences.

Definition at line 60 of file find.h.

References __gnu_parallel::_Settings::get().

3.6.4.10 template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_template (_RAIter1 *__begin1,* _RAIter1 *__end1,* _RAIter2 *__begin2,* _Pred *__pred,* _Selector *__selector,* equal_split_tag)

Parallel std::find, equal splitting variant.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence. Second __sequence must have same length as first sequence.
__pred	Find predicate.
__selector	_Functionality (e. g. std::find_if(), std::equal(),...)

Returns

Place of finding in both sequences.

Definition at line 97 of file find.h.

References __equally_split(), and _GLIBCXX_CALL.

3.6.4.11 template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_template (_RAIter1 *__begin1,* _RAIter1 *__end1,* _RAIter2 *__begin2,* _Pred *__pred,* _Selector *__selector,* growing_blocks_tag)

Parallel std::find, growing block size variant.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence. Second __sequence must have same length as first sequence.
__pred	Find predicate.

__selector	_Functionality (e. g. std::find_if(), std::equal(),...)

Returns

Place of finding in both sequences.

See Also

__gnu_parallel::_Settings::find_sequential_search_size
__gnu_parallel::_Settings::find_scale_factor

There are two main differences between the growing blocks and the constant-size blocks variants.

1. For GB, the block size grows; for CSB, the block size is fixed.
2. For GB, the blocks are allocated dynamically; for CSB, the blocks are allocated in a predetermined manner, namely spacial round-robin.

Definition at line 185 of file find.h.

References _GLIBCXX_CALL, __gnu_parallel::_Settings::find_scale_factor, __gnu_parallel::_Settings::find_sequential_search_size, and __gnu_parallel::_Settings::get().

3.6.4.12 template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_template (_RAIter1 *__begin1,* _RAIter1 *__end1,* _RAIter2 *__begin2,* _Pred *__pred,* _Selector *__selector,* constant_size_blocks_tag)

Parallel std::find, constant block size variant.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence. Second __sequence must have same length as first sequence.
__pred	Find predicate.
__selector	_Functionality (e. g. std::find_if(), std::equal(),...)

Returns

Place of finding in both sequences.

See Also

__gnu_parallel::_Settings::find_sequential_search_size
__gnu_parallel::_Settings::find_block_size There are two main differences between the growing blocks and the constant-size blocks variants.

1. For GB, the block size grows; for CSB, the block size is fixed.
2. For GB, the blocks are allocated dynamically; for CSB, the blocks are allocated in a predetermined manner, namely spacial round-robin.

Definition at line 315 of file find.h.

References _GLIBCXX_CALL, __gnu_parallel::_Settings::find_initial_block_size, __gnu_parallel::_Settings::find_sequential_search_size, and __gnu_parallel::_Settings::get().

3.6.4.13 template<typename _IIter , typename _UserOp , typename _Functionality , typename _Red , typename _Result > _UserOp __gnu_parallel::__for_each_template_random_access (_IIter *__begin,* _IIter *__end,* _UserOp *__user_op,* _Functionality & *__functionality,* _Red *__reduction,* _Result *__reduction_start,* _Result & *__output,* typename std::iterator_traits< _IIter >::difference_type *__bound,* _Parallelism *__parallelism_tag*)

Chose the desired algorithm by evaluating `__parallelism_tag`.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__user_op	A user-specified functor (comparator, predicate, associative operator,...)
__functionality	functor to *process* an element with __user_op (depends on desired functionality, e. g. accumulate, for_each,...
__reduction	Reduction functor.
__reduction_start	Initial value for reduction.
__output	Output iterator.
__bound	Maximum number of elements processed.
__parallelism_tag	Parallelization method

Definition at line 61 of file for_each.h.

References __for_each_template_random_access_ed(), __for_each_template_random_access_omp_loop(), __for_each_template_random_access_workstealing(), parallel_omp_loop, parallel_omp_loop_static, and parallel_unbalanced.

3.6.4.14 template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result > _Op __gnu_parallel::__for_each_template_random_access_ed (_RAIter *__begin*, _RAIter *__end*, _Op *__o*, _Fu & *__f*, _Red *__r*, _Result *__base*, _Result & *__output*, typename std::iterator_traits< _RAIter >::difference_type *__bound*)

Embarrassingly parallel algorithm for random access iterators, using hand-crafted parallelization by equal splitting the work.

Parameters

__begin	Begin iterator of element sequence.
__end	End iterator of element sequence.
__o	User-supplied functor (comparator, predicate, adding functor, ...)
__f	Functor to "process" an element with __op (depends on desired functionality, e. g. for std::for_each(), ...).
__r	Functor to "add" a single __result to the already processed elements (depends on functionality).
__base	Base value for reduction.
__output	Pointer to position where final result is written to
__bound	Maximum number of elements processed (e. g. for std::count_n()).

Returns

User-supplied functor (that may contain a part of the result).

Definition at line 67 of file par_loop.h.

References __equally_split_point().

Referenced by __for_each_template_random_access().

3.6.4.15 template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result > _Op __gnu_parallel::__for_each_template_random_access_omp_loop (_RAIter *__begin*, _RAIter *__end*, _Op *__o*, _Fu & *__f*, _Red *__r*, _Result *__base*, _Result & *__output*, typename std::iterator_traits< _RAIter >::difference_type *__bound*)

Embarrassingly parallel algorithm for random access iterators, using an OpenMP for loop.

Parameters

__begin	Begin iterator of element sequence.
__end	End iterator of element sequence.
__o	User-supplied functor (comparator, predicate, adding functor, etc.).
__f	Functor to *process* an element with __op (depends on desired functionality, e. g. for std::for_each(), ...).
__r	Functor to *add* a single __result to the already processed elements (depends on functionality).
__base	Base value for reduction.
__output	Pointer to position where final result is written to
__bound	Maximum number of elements processed (e. g. for std::count_n()).

Returns

User-supplied functor (that may contain a part of the result).

Definition at line 67 of file omp_loop.h.

Referenced by __for_each_template_random_access().

3.6.4.16 template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result > _Op __gnu_parallel::__for_each_template_random_access_omp_loop_static (_RAIter *__begin,* _RAIter *__end,* _Op *__o,* _Fu & *__f,* _Red *__r,* _Result *__base,* _Result & *__output,* typename std::iterator_traits< _RAIter >::difference_type *__bound*)

Embarrassingly parallel algorithm for random access iterators, using an OpenMP for loop with static scheduling.

Parameters

__begin	Begin iterator of element sequence.
__end	End iterator of element sequence.
__o	User-supplied functor (comparator, predicate, adding functor, ...).
__f	Functor to *process* an element with __op (depends on desired functionality, e. g. for std::for_each(), ...).
__r	Functor to *add* a single __result to the already processed __elements (depends on functionality).
__base	Base value for reduction.
__output	Pointer to position where final result is written to
__bound	Maximum number of elements processed (e. g. for std::count_n()).

Returns

User-supplied functor (that may contain a part of the result).

Definition at line 66 of file omp_loop_static.h.

3.6.4.17 template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result > _Op __gnu_parallel::__for_each_template_random_access_workstealing (_RAIter *__begin,* _RAIter *__end,* _Op *__op,* _Fu & *__f,* _Red *__r,* _Result *__base,* _Result & *__output,* typename std::iterator_traits< _RAIter >::difference_type *__bound*)

Work stealing algorithm for random access iterators.

Uses O(1) additional memory. Synchronization at job lists is done with atomic operations.

Parameters

__begin	Begin iterator of element sequence.
__end	End iterator of element sequence.
__op	User-supplied functor (comparator, predicate, adding functor, ...).
__f	Functor to *process* an element with __op (depends on desired functionality, e. g. for std::for_each(), ...).
__r	Functor to *add* a single __result to the already processed elements (depends on functionality).
__base	Base value for reduction.
__output	Pointer to position where final result is written to
__bound	Maximum number of elements processed (e. g. for std::count_n()).

Returns

User-supplied functor (that may contain a part of the result).

Definition at line 99 of file workstealing.h.

References __gnu_debug::__base(), __yield(), _GLIBCXX_CALL, __gnu_parallel::_Job< _DifferenceTp >::_M_first, __gnu_parallel::_Job< _DifferenceTp >::_M_last, __gnu_parallel::_Job< _DifferenceTp >::_M_load, __gnu_parallel::_Settings::cache_line_size, __gnu_parallel::_Settings::get(), and min().

Referenced by __for_each_template_random_access().

3.6.4.18 template<typename _IIter , typename _Compare > bool __gnu_parallel::__is_sorted (_IIter *__begin*, _IIter *__end*, _Compare *__comp*)

Check whether [__begin, __end) is sorted according to __comp.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__comp	Comparator.

Returns

`true` if sorted, `false` otherwise.

Definition at line 51 of file checkers.h.

Referenced by __sequential_multiway_merge(), multiway_merge_loser_tree_sentinel(), and parallel_multiway_merge().

3.6.4.19 template<typename _RAIter , typename _Compare > _RAIter __gnu_parallel::__median_of_three_iterators (_RAIter *__a*, _RAIter *__b*, _RAIter *__c*, _Compare *__comp*)

Compute the median of three referenced elements, according to __comp.

Parameters

__a	First iterator.
__b	Second iterator.
__c	Third iterator.

__comp	Comparator.

Definition at line 398 of file base.h.

Referenced by __qsb_divide().

3.6.4.20 template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare > _OutputIterator __gnu_parallel::__merge_advance (_RAIter1 & *__begin1,* _RAIter1 *__end1,* _RAIter2 & *__begin2,* _RAIter2 *__end2,* _OutputIterator *__target,* _DifferenceTp *__max_length,* _Compare *__comp*) [inline]

Merge routine being able to merge only the __max_length smallest elements.

The __begin iterators are advanced accordingly, they might not reach __end, in contrast to the usual variant. Static switch on whether to use the conditional-move variant.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__target	Target begin iterator.
__max_length	Maximum number of elements to merge.
__comp	Comparator.

Returns

Output end iterator.

Definition at line 171 of file merge.h.

References __merge_advance_movc(), and _GLIBCXX_CALL.

Referenced by __parallel_merge_advance(), and __sequential_multiway_merge().

3.6.4.21 template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare > _OutputIterator __gnu_parallel::__merge_advance_movc (_RAIter1 & *__begin1,* _RAIter1 *__end1,* _RAIter2 & *__begin2,* _RAIter2 *__end2,* _OutputIterator *__target,* _DifferenceTp *__max_length,* _Compare *__comp*)

Merge routine being able to merge only the __max_length smallest elements.

The __begin iterators are advanced accordingly, they might not reach __end, in contrast to the usual variant. Specially designed code should allow the compiler to generate conditional moves instead of branches.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__target	Target begin iterator.
__max_length	Maximum number of elements to merge.
__comp	Comparator.

Returns

Output end iterator.

Definition at line 105 of file merge.h.

Referenced by __merge_advance().

3.6.4.22 template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare > _OutputIterator __gnu_parallel::__merge_advance_usual (_RAIter1 & *__begin1,* _RAIter1 *__end1,* _RAIter2 & *__begin2,* _RAIter2 *__end2,* _OutputIterator *__target,* _DifferenceTp *__max_length,* _Compare *__comp*)

Merge routine being able to merge only the `__max_length` smallest elements.

The `__begin` iterators are advanced accordingly, they might not reach `__end`, in contrast to the usual variant.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__target	Target begin iterator.
__max_length	Maximum number of elements to merge.
__comp	Comparator.

Returns

Output end iterator.

Definition at line 57 of file merge.h.

3.6.4.23 template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _Compare > _RAIter3 __gnu_parallel::__parallel_merge_advance (_RAIter1 & *__begin1,* _RAIter1 *__end1,* _RAIter2 & *__begin2,* _RAIter2 *__end2,* _RAIter3 *__target,* typename **std::iterator_traits**< _RAIter1 >::difference_type *__max_length,* _Compare *__comp*) [inline]

Merge routine fallback to sequential in case the iterators of the two input sequences are of different type.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__target	Target begin iterator.
__max_length	Maximum number of elements to merge.
__comp	Comparator.

Returns

Output end iterator.

Definition at line 195 of file merge.h.

References __merge_advance().

3.6.4.24 template<typename _RAIter1 , typename _RAIter3 , typename _Compare > _RAIter3 __gnu_parallel::__parallel_merge_advance (_RAIter1 & *__begin1,* _RAIter1 *__end1,* _RAIter1 & *__begin2,* _RAIter1 *__end2,* _RAIter3 *__target,* typename **std::iterator_traits**< _RAIter1 >::difference_type *__max_length,* _Compare *__comp*) [inline]

Parallel merge routine being able to merge only the `__max_length` smallest elements.

The `__begin` iterators are advanced accordingly, they might not reach `__end`, in contrast to the usual variant. The functionality is projected onto parallel_multiway_merge.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__target	Target begin iterator.
__max_length	Maximum number of elements to merge.
__comp	Comparator.

Returns

Output end iterator.

Definition at line 223 of file merge.h.

References multiway_merge_exact_splitting(), and parallel_multiway_merge().

3.6.4.25 template<typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_nth_element (_RAIter *__begin*, _RAIter *__nth*, _RAIter *__end*, _Compare *__comp*)

Parallel implementation of std::nth_element().

Parameters

__begin	Begin iterator of input sequence.
__nth	_Iterator of element that must be in position afterwards.
__end	End iterator of input sequence.
__comp	Comparator.

Definition at line 332 of file partition.h.

References __parallel_partition(), _GLIBCXX_CALL, __gnu_parallel::_Settings::get(), std::max(), __gnu_parallel::_Settings::nth_element_minimal_n, and __gnu_parallel::_Settings::partition_minimal_n.

Referenced by __parallel_partial_sort().

3.6.4.26 template<typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_partial_sort (_RAIter *__begin*, _RAIter *__middle*, _RAIter *__end*, _Compare *__comp*)

Parallel implementation of std::partial_sort().

Parameters

__begin	Begin iterator of input sequence.
__middle	Sort until this position.
__end	End iterator of input sequence.
__comp	Comparator.

Definition at line 422 of file partition.h.

References __parallel_nth_element().

3.6.4.27 template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator __gnu_parallel::__parallel_partial_sum (_IIter *__begin*, _IIter *__end*, _OutputIterator *__result*, _BinaryOperation *__bin_op*)

Parallel partial sum front-__end.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__result	Begin iterator of output sequence.
__bin_op	Associative binary function.

Returns

End iterator of output sequence.

Definition at line 205 of file partial_sum.h.

References __parallel_partial_sum_linear(), _GLIBCXX_CALL, and __gnu_parallel::_Settings::get().

3.6.4.28 template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator __gnu_parallel::__parallel_partial_sum_basecase (_IIter *__begin*, _IIter *__end*, _OutputIterator *__result*, _BinaryOperation *__bin_op*, typename std::iterator_traits< _IIter >::value_type *__value*)

Base case prefix sum routine.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__result	Begin iterator of output sequence.
__bin_op	Associative binary function.
__value	Start value. Must be passed since the neutral element is unknown in general.

Returns

End iterator of output sequence.

Definition at line 58 of file partial_sum.h.

Referenced by __parallel_partial_sum_linear().

3.6.4.29 template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator __gnu_parallel::__parallel_partial_sum_linear (_IIter *__begin*, _IIter *__end*, _OutputIterator *__result*, _BinaryOperation *__bin_op*, typename std::iterator_traits< _IIter >::difference_type *__n*)

Parallel partial sum implementation, two-phase approach, no recursion.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__result	Begin iterator of output sequence.
__bin_op	Associative binary function.
__n	Length of sequence.

Returns

End iterator of output sequence.

Definition at line 89 of file partial_sum.h.

References __equally_split(), __parallel_partial_sum_basecase(), std::accumulate(), __gnu_parallel::_Settings::get(), and __gnu_parallel::_Settings::partial_sum_dilation.

Referenced by __parallel_partial_sum().

3.6.4.30 template<typename _RAIter , typename _Predicate > std::iterator_traits<_RAIter>::difference_type __gnu_parallel::__parallel_partition (_RAIter __begin, _RAIter __end, _Predicate __pred, _ThreadIndex __num_threads)

Parallel implementation of std::partition.

Parameters

__begin	Begin iterator of input sequence to split.
__end	End iterator of input sequence to split.
__pred	Partition predicate, possibly including some kind of pivot.
__num_threads	Maximum number of threads to use for this task.

Returns

Number of elements not fulfilling the predicate.

Definition at line 56 of file partition.h.

References __compare_and_swap(), __fetch_and_add(), _GLIBCXX_CALL, _GLIBCXX_VOLATILE, __gnu_parallel::_Settings::get(), __gnu_parallel::_Settings::partition_chunk_share, and __gnu_parallel::_Settings::partition_chunk_size.

Referenced by __parallel_nth_element(), __parallel_sort_qs_divide(), and __qsb_divide().

3.6.4.31 template<typename _RAIter , typename _RandomNumberGenerator > void __gnu_parallel::__parallel_random_shuffle (_RAIter __begin, _RAIter __end, _RandomNumberGenerator __rng = _RandomNumber()) [inline]

Parallel random public call.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__rng	Random number generator to use.

Definition at line 522 of file random_shuffle.h.

References __parallel_random_shuffle_drs().

3.6.4.32 template<typename _RAIter , typename _RandomNumberGenerator > void __gnu_parallel::__parallel_random_shuffle_drs (_RAIter __begin, _RAIter __end, typename std::iterator_traits< _RAIter >::difference_type __n, _ThreadIndex __num_threads, _RandomNumberGenerator & __rng)

Main parallel random shuffle step.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__n	Length of sequence.
__num_threads	Number of threads to use.
__rng	Random number generator to use.

Definition at line 265 of file random_shuffle.h.

References __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::__bins_end, __parallel_random_shuffle_drs_pu(), __rd_log2(), __round_up_to_pow2(), __sequential_random_shuffle(), _GLIBCXX_CALL, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_bin_proc, __gnu_parallel::_DRSSorterPU< _RAIter, _

RandomNumberGenerator >::_M_bins_begin, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_dist, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bins, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bits, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_num_threads, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_sd, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_seed, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_starts, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_temporaries, __gnu_parallel::_Settings::get(), __gnu_parallel::_Settings::L2_cache_size, std::min(), and __gnu_parallel::_Settings::TLB_size.

Referenced by __parallel_random_shuffle().

3.6.4.33 template<typename _RAIter , typename _RandomNumberGenerator > void __gnu_parallel::__parallel_random_shuffle_drs_pu (_DRSSorterPU< _RAIter, _RandomNumberGenerator > * *__pus*)

Random shuffle code executed by each thread.

Parameters

__pus	Array of thread-local data records.

Definition at line 122 of file random_shuffle.h.

References __random_number_pow2(), __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_dist, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bins, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bits, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_num_threads, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_sd, __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_seed, __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_starts, and std::partial_sum().

Referenced by __parallel_random_shuffle_drs().

3.6.4.34 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, multiway_mergesort_tag *__parallelism*) [inline]

Choose multiway mergesort, splitting variant at run-time, for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 75 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), _GLIBCXX_CALL, and __gnu_parallel::_Settings::get().

Here is the call graph for this function:

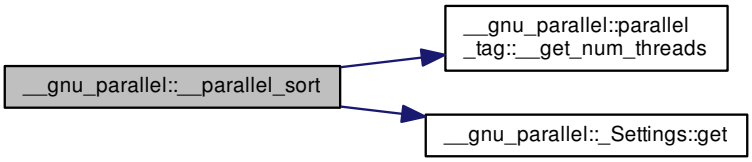

3.6.4.35 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_exact_tag __parallelism) [inline]

Choose multiway mergesort with exact splitting, for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 99 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), and _GLIBCXX_CALL.

Here is the call graph for this function:



3.6.4.36 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_sampling_tag __parallelism) [inline]

Choose multiway mergesort with splitting by sampling, for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 120 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), and _GLIBCXX_CALL.

Here is the call graph for this function:



3.6.4.37 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, quicksort_tag *__parallelism*) [inline]

Choose quicksort for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 140 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), __parallel_sort_qs(), and _GLIBCXX_CALL.

Here is the call graph for this function:



3.6.4.38 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, balanced_quicksort_tag *__parallelism*) [inline]

Choose balanced quicksort for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 161 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), __parallel_sort_qsb(), and _GLIBCXX_CALL.

Here is the call graph for this function:

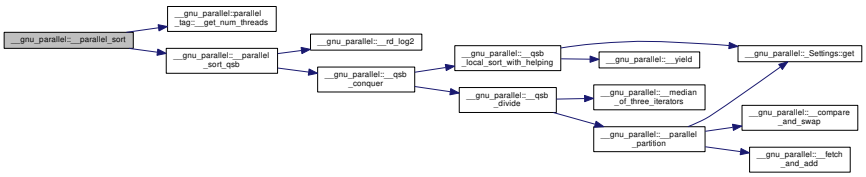

3.6.4.39 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, default_parallel_tag *__parallelism*) [inline]

Choose multiway mergesort with exact splitting, for parallel sorting.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 183 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), and _GLIBCXX_CALL.

Here is the call graph for this function:



3.6.4.40 template<bool __stable, typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort (_RAIter *__begin,* _RAIter *__end,* _Compare *__comp,* parallel_tag *__parallelism*) [inline]

Choose a parallel sorting algorithm.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__comp	Comparator.

Template Parameters

__stable	Sort stable.

Definition at line 203 of file sort.h.

References __gnu_parallel::parallel_tag::__get_num_threads(), __parallel_sort_qs(), __parallel_sort_qsb(), _GLIBCXX_CALL, and __gnu_parallel::_Settings::get().

Here is the call graph for this function:

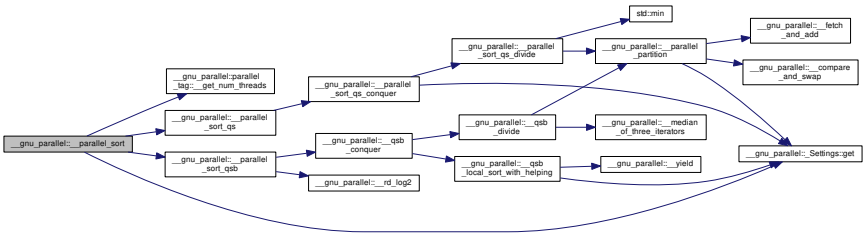

3.6.4.41 template<typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort_qs (_RAIter *__begin,* _RAIter *__end,* _Compare *__comp,* _ThreadIndex *__num_threads*)

Unbalanced quicksort main call.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator input sequence, ignored.
__comp	Comparator.
__num_threads	Number of threads that are allowed to work on this part.

Definition at line 154 of file quicksort.h.

References __parallel_sort_qs_conquer(), and _GLIBCXX_CALL.

Referenced by __parallel_sort().

3.6.4.42 template<typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort_qs_conquer (_RAIter *__begin,* _RAIter *__end,* _Compare *__comp,* _ThreadIndex *__num_threads*)

Unbalanced quicksort conquer step.

Parameters

__begin	Begin iterator of subsequence.

__end	End iterator of subsequence.
__comp	Comparator.
__num_threads	Number of threads that are allowed to work on this part.

Definition at line 101 of file quicksort.h.

References __parallel_sort_qs_divide(), and __gnu_parallel::_Settings::get().

Referenced by __parallel_sort_qs().

3.6.4.43 template<typename _RAIter , typename _Compare > std::iterator_traits<_RAIter>::difference_type __gnu_parallel::__parallel_sort_qs_divide (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, typename std::iterator_traits< _RAIter >::difference_type *__pivot_rank*, typename std::iterator_traits< _RAIter >::difference_type *__num_samples*, _ThreadIndex *__num_threads*)

Unbalanced quicksort divide step.

Parameters

__begin	Begin iterator of subsequence.
__end	End iterator of subsequence.
__comp	Comparator.
__pivot_rank	Desired __rank of the pivot.
__num_samples	Choose pivot from that many samples.
__num_threads	Number of threads that are allowed to work on this part.

Definition at line 51 of file quicksort.h.

References __parallel_partition(), and std::min().

Referenced by __parallel_sort_qs_conquer().

3.6.4.44 template<typename _RAIter , typename _Compare > void __gnu_parallel::__parallel_sort_qsb (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, _ThreadIndex *__num_threads*)

Top-level quicksort routine.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__comp	Comparator.
__num_threads	Number of threads that are allowed to work on this part.

Definition at line 433 of file balanced_quicksort.h.

References __qsb_conquer(), __rd_log2(), _GLIBCXX_CALL, and __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_elements_leftover.

Referenced by __parallel_sort().

3.6.4.45 template<typename _IIter , class _OutputIterator , class _BinaryPredicate > _OutputIterator __gnu_parallel::__parallel_unique_copy (_IIter *__first*, _IIter *__last*, _OutputIterator *__result*, _BinaryPredicate *__binary_pred*)

Parallel std::unique_copy(), w/__o explicit equality predicate.

Parameters

__first	Begin iterator of input sequence.
__last	End iterator of input sequence.
__result	Begin iterator of result __sequence.
__binary_pred	Equality predicate.

Returns

End iterator of result __sequence.

Definition at line 50 of file unique_copy.h.

References __equally_split(), and _GLIBCXX_CALL.

Referenced by __parallel_unique_copy().

3.6.4.46 template<typename _IIter , class _OutputIterator > _OutputIterator __gnu_parallel::__parallel_unique_copy (_IIter *__first*, _IIter *__last*, _OutputIterator *__result*) [inline]

Parallel std::unique_copy(), without explicit equality predicate.

Parameters

__first	Begin iterator of input sequence.
__last	End iterator of input sequence.
__result	Begin iterator of result __sequence.

Returns

End iterator of result __sequence.

Definition at line 186 of file unique_copy.h.

References __parallel_unique_copy().

3.6.4.47 template<typename _RAIter , typename _Compare > void __gnu_parallel::__qsb_conquer (_QSBThreadLocal< _RAIter > ** *__tls*, _RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, _ThreadIndex *__iam*, _ThreadIndex *__num_threads*, bool *__parent_wait*)

Quicksort conquer step.

Parameters

__tls	Array of thread-local storages.
__begin	Begin iterator of subsequence.
__end	End iterator of subsequence.
__comp	Comparator.
__iam	Number of the thread processing this function.
__num_threads	Number of threads that are allowed to work on this part.

Definition at line 174 of file balanced_quicksort.h.

References __qsb_divide(), __qsb_local_sort_with_helping(), __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_elements_leftover, and __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_initial.

Referenced by __parallel_sort_qsb().

3.6.4.48 template<typename _RAIter , typename _Compare > std::iterator_traits<_RAIter>::difference_type __gnu_parallel::__qsb_divide (_RAIter *__begin*, _RAIter *__end*, _Compare *__comp*, _ThreadIndex *__num_threads*)

Balanced quicksort divide step.

Parameters

__begin	Begin iterator of subsequence.
__end	End iterator of subsequence.
__comp	Comparator.
__num_threads	Number of threads that are allowed to work on this part.

Precondition

(__end-__begin)>=1

Definition at line 103 of file balanced_quicksort.h.

References __median_of_three_iterators(), and __parallel_partition().

Referenced by __qsb_conquer().

3.6.4.49 template<typename _RAIter , typename _Compare > void __gnu_parallel::__qsb_local_sort_with_helping (_QSBThreadLocal< _RAIter > ** *__tls,* _Compare & *__comp,* _ThreadIndex *__iam,* bool *__wait*)

Quicksort step doing load-balanced local sort.

Parameters

__tls	Array of thread-local storages.
__comp	Comparator.
__iam	Number of the thread processing this function.

Definition at line 250 of file balanced_quicksort.h.

References __yield(), _GLIBCXX_PARALLEL_ASSERTIONS, __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_elements_leftover, __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_initial, __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_leftover_parts, __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_num_threads, __gnu_parallel::_Settings::get(), and __gnu_parallel::_Settings::sort_qsb_base_case_maximal_n.

Referenced by __qsb_conquer().

3.6.4.50 template<typename _RandomNumberGenerator > int __gnu_parallel::__random_number_pow2 (int *__logp,* _RandomNumberGenerator & *__rng*) [inline]

Generate a random number in [0,2^__logp).

Parameters

__logp	Logarithm (basis 2) of the upper range __bound.
__rng	Random number generator to use.

Definition at line 115 of file random_shuffle.h.

Referenced by __parallel_random_shuffle_drs_pu(), and __sequential_random_shuffle().

3.6.4.51 template<typename _Size > _Size __gnu_parallel::__rd_log2 (_Size *__n*) [inline]

Calculates the rounded-down logarithm of __n for base 2.

Parameters

__n	Argument.

Returns

Returns 0 for any argument <1.

Definition at line 102 of file base.h.

Referenced by __parallel_random_shuffle_drs(), __parallel_sort_qsb(), __round_up_to_pow2(), __sequential_random_shuffle(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase(), multiseq_partition(), and multiseq_selection().

3.6.4.52 template<typename _Tp > _Tp __gnu_parallel::__round_up_to_pow2 (_Tp *__x*)

Round up to the next greater power of 2.

Parameters

__x	_Integer to round up

Definition at line 248 of file random_shuffle.h.

References __rd_log2().

Referenced by __parallel_random_shuffle_drs(), __sequential_random_shuffle(), and multiseq_selection().

3.6.4.53 template<typename __RAIter1 , typename __RAIter2 , typename _Pred > __RAIter1 __gnu_parallel::__search_template (__RAIter1 *__begin1,* __RAIter1 *__end1,* __RAIter2 *__begin2,* __RAIter2 *__end2,* _Pred *__pred*)

Parallel std::search.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__end2	End iterator of second sequence.
__pred	Find predicate.

Returns

Place of finding in first sequences.

Definition at line 81 of file search.h.

References __calc_borders(), __equally_split(), _GLIBCXX_CALL, and std::min().

3.6.4.54 template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::__sequential_multiway_merge (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type & *__sentinel,* _DifferenceTp *__length,* _Compare *__comp*)

Sequential multi-way merging switch.

The _GLIBCXX_PARALLEL_DECISION is based on the branching factor and runtime settings.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, possibly larger than the number of elements available.
__sentinel	The sequences have __a __sentinel element.

Returns

End iterator of output sequence.

Definition at line 920 of file multiway_merge.h.

References __is_sorted(), __merge_advance(), _GLIBCXX_CALL, and _GLIBCXX_PARALLEL_LENGTH.

Referenced by multiway_merge(), and multiway_merge_sentinels().

3.6.4.55 template<typename _RAIter , typename _RandomNumberGenerator > void __gnu_parallel::__sequential_random_shuffle (_RAIter *__begin*, _RAIter *__end*, _RandomNumberGenerator & *__rng*)

Sequential cache-efficient random shuffle.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__rng	Random number generator to use.

Definition at line 410 of file random_shuffle.h.

References __random_number_pow2(), __rd_log2(), __round_up_to_pow2(), __gnu_parallel::_Settings::get(), __gnu_parallel::_Settings::L2_cache_size, std::min(), std::partial_sum(), and __gnu_parallel::_Settings::TLB_size.

Referenced by __parallel_random_shuffle_drs().

3.6.4.56 template<typename _IIter > void __gnu_parallel::__shrink (std::vector< _IIter > & *__os_starts*, size_t & *__count_to_two*, size_t & *__range_length*)

Combines two ranges into one and thus halves the number of ranges.

Parameters

__os_starts	Start positions worked on (oversampled).
__count_to_two	Counts up to 2.
__range_length	Current length of a chunk.

Definition at line 70 of file list_partition.h.

References std::vector< _Tp, _Alloc >::size().

Referenced by __shrink_and_double().

3.6.4.57 template<typename _IIter > void __gnu_parallel::__shrink_and_double (std::vector< _IIter > & *__os_starts*, size_t & *__count_to_two*, size_t & *__range_length*, const bool *__make_twice*)

Shrinks and doubles the ranges.

Parameters

__os_starts	Start positions worked on (oversampled).
__count_to_two	Counts up to 2.
__range_length	Current length of a chunk.
__make_twice	Whether the __os_starts is allowed to be grown or not

Definition at line 50 of file list_partition.h.

References __shrink(), std::vector< _Tp, _Alloc >::resize(), and std::vector< _Tp, _Alloc >::size().

Referenced by list_partition().

3.6.4.58 void __gnu_parallel::__yield ( ) [inline]

Yield control to another thread, without waiting for the end of the time slice.

Definition at line 121 of file parallel/compatibility.h.

Referenced by __for_each_template_random_access_workstealing(), and __qsb_local_sort_with_helping().

3.6.4.59 template<typename _IIter , typename _FunctorType > size_t __gnu_parallel::list_partition (const _IIter *__begin,* const _IIter *__end,* _IIter * *__starts,* size_t * *__lengths,* const int *__num_parts,* _FunctorType & *__f,* int *__oversampling* = 0)

Splits a sequence given by input iterators into parts of almost equal size.

The function needs only one pass over the sequence.

Parameters

__begin	Begin iterator of input sequence.
__end	End iterator of input sequence.
__starts	Start iterators for the resulting parts, dimension __num_parts+1. For convenience, __starts [__num_parts] contains the end iterator of the sequence.
__lengths	Length of the resulting parts.
__num_parts	Number of parts to split the sequence into.
__f	Functor to be applied to each element by traversing __it
__oversampling	Oversampling factor. If 0, then the partitions will differ in at most $\sqrt{\text{end} - \text{begin}}$ elements. Otherwise, the ratio between the longest and the shortest part is bounded by $1/(\text{oversampling} \cdot \text{num_parts})$

Returns

Length of the whole sequence.

Definition at line 101 of file list_partition.h.

References __shrink_and_double(), and std::vector< _Tp, _Alloc >::size().

3.6.4.60 template<typename _Tp > const _Tp& __gnu_parallel::max (const _Tp & *__a,* const _Tp & *__b*) [inline]

Equivalent to std::max.

Definition at line 150 of file base.h.

3.6.4.61 template<typename _Tp > const _Tp& __gnu_parallel::min (const _Tp & *__a,* const _Tp & *__b*) [inline]

Equivalent to std::min.

Definition at line 144 of file base.h.

Referenced by __for_each_template_random_access_workstealing().

3.6.4.62 template<typename _RanSeqs , typename _RankType , typename _RankIterator , typename _Compare > void __gnu_parallel::multiseq_partition (_RanSeqs *__begin_seqs*, _RanSeqs *__end_seqs*, _RankType *__rank*, _RankIterator *__begin_offsets*, _Compare *__comp* = std::less< typename std::iterator_traits<typename std::iterator_traits<_RanSeqs>::value_type:: first_type>::value_type>())

Splits several sorted sequences at a certain global __rank, resulting in a splitting point for each sequence. The sequences are passed via a sequence of random-access iterator pairs, none of the sequences may be empty. If there are several equal elements across the split, the ones on the __left side will be chosen from sequences with smaller number.

Parameters

__begin_seqs	Begin of the sequence of iterator pairs.
__end_seqs	End of the sequence of iterator pairs.
__rank	The global rank to partition at.
__begin_offsets	A random-access __sequence __begin where the __result will be stored in. Each element of the sequence is an iterator that points to the first element on the greater part of the respective __sequence.
__comp	The ordering functor, defaults to std::less<_Tp>.

Definition at line 122 of file multiseq_selection.h.

References __rd_log2(), std::__sample(), _GLIBCXX_CALL, std::vector< _Tp, _Alloc >::begin(), std::distance(), std::priority_queue< _Tp, _Sequence, _Compare >::empty(), std::vector< _Tp, _Alloc >::end(), std::max(), std::min(), std::priority_queue< _Tp, _Sequence, _Compare >::pop(), std::priority_queue< _Tp, _Sequence, _Compare >::push(), std::vector< _Tp, _Alloc >::push_back(), and std::priority_queue< _Tp, _Sequence, _Compare >::top().

Referenced by multiway_merge_exact_splitting().

3.6.4.63 template<typename _Tp , typename _RanSeqs , typename _RankType , typename _Compare > _Tp __gnu_parallel::multiseq_selection (_RanSeqs *__begin_seqs*, _RanSeqs *__end_seqs*, _RankType *__rank*, _RankType & *__offset*, _Compare *__comp* = std::less<_Tp>())

Selects the element at a certain global __rank from several sorted sequences.

The sequences are passed via a sequence of random-access iterator pairs, none of the sequences may be empty.

Parameters

__begin_seqs	Begin of the sequence of iterator pairs.
__end_seqs	End of the sequence of iterator pairs.
__rank	The global rank to partition at.
__offset	The rank of the selected element in the global subsequence of elements equal to the selected element. If the selected element is unique, this number is 0.
__comp	The ordering functor, defaults to std::less.

Definition at line 388 of file multiseq_selection.h.

References __rd_log2(), __round_up_to_pow2(), std::__sample(), _GLIBCXX_CALL, std::vector< _Tp, _Alloc >::begin(), std::distance(), std::priority_queue< _Tp, _Sequence, _Compare >::empty(), std::vector< _Tp, _Alloc >::end(), std::max(), std::min(), std::priority_queue< _Tp, _Sequence, _Compare >::pop(), std::priority_queue< _Tp, _Sequence, _Compare >::push(), std::vector< _Tp, _Alloc >::push_back(), and std::priority_queue< _Tp, _Sequence, _Compare >::top().

3.6.4.64 template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut __gnu_parallel::multiway_merge (_RAIterPairIterator *__seqs_begin*, _RAIterPairIterator *__seqs_end*, _RAIterOut *__target*, _DifferenceTp *__length*, _Compare *__comp*, __gnu_parallel::sequential_tag)

Multiway Merge Frontend.

Merge the sequences specified by seqs_begin and __seqs_end into __target. __seqs_begin and __seqs_end must point to a sequence of pairs. These pairs must contain an iterator to the beginning of a sequence in their first entry and an iterator the _M_end of the same sequence in their second entry.

Ties are broken arbitrarily. See stable_multiway_merge for a variant that breaks ties by sequence number but is slower.

The first entries of the pairs (i.e. the begin iterators) will be moved forward.

The output sequence has to provide enough space for all elements that are written to it.

This function will merge the input sequences:

- not stable
- parallel, depending on the input size and Settings
- using sampling for splitting
- not using sentinels

Example:

```
int sequences[10][10];
for (int __i = 0; __i < 10; ++__i)
  for (int __j = 0; __i < 10; ++__j)
    sequences[__i][__j] = __j;

int __out[33];
std::vector<std::pair<int*> > seqs;
for (int __i = 0; __i < 10; ++__i)
  { seqs.push(std::make_pair<int*>(sequences[__i],
                                   sequences[__i] + 10)) }

multiway_merge(seqs.begin(), seqs.end(), __target, std::less<int>(), 33);
```

See Also

stable_multiway_merge

Precondition

All input sequences must be sorted.
Target must provide enough space to merge out length elements or the number of elements in all sequences, whichever is smaller.

Postcondition

[__target, return __value) contains merged __elements from the input sequences.
return __value - __target = min(__length, number of elements in all sequences).

Template Parameters

_RAIterPairIterator	iterator over sequence of pairs of iterators
_RAIterOut	iterator over target sequence
_DifferenceTp	difference type for the sequence
_Compare	strict weak ordering type to compare elements in sequences

Parameters

__seqs_begin	__begin of sequence __sequence
__seqs_end	_M_end of sequence __sequence
__target	target sequence to merge to.
__comp	strict weak ordering to use for element comparison.
__length	Maximum length to merge, possibly larger than the number of elements available.

Returns

_M_end iterator of output sequence

Definition at line 1418 of file multiway_merge.h.

References __sequential_multiway_merge(), and _GLIBCXX_CALL.

3.6.4.65 template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::multiway_merge_3_variant (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* _DifferenceTp *__length,* _Compare *__comp*)

Highly efficient 3-way merging procedure.

Merging is done with the algorithm implementation described by Peter Sanders. Basically, the idea is to minimize the number of necessary comparison after merging an element. The implementation trick that makes this fast is that the order of the sequences is stored in the instruction pointer (translated into labels in C++).

This works well for merging up to 4 sequences.

Note that making the merging stable does *not* come at a performance hit.

Whether the merging is done guarded or unguarded is selected by the used iterator class.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, less equal than the total number of elements available.

Returns

End iterator of output sequence.

Definition at line 241 of file multiway_merge.h.

References _GLIBCXX_CALL.

3.6.4.66 template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::multiway_merge_4_variant (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* _DifferenceTp *__length,* _Compare *__comp*)

Highly efficient 4-way merging procedure.

Merging is done with the algorithm implementation described by Peter Sanders. Basically, the idea is to minimize the number of necessary comparison after merging an element. The implementation trick that makes this fast is that the order of the sequences is stored in the instruction pointer (translated into goto labels in C++).

This works well for merging up to 4 sequences.

Note that making the merging stable does *not* come at a performance hit.

Whether the merging is done guarded or unguarded is selected by the used iterator class.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, less equal than the total number of elements available.

Returns

End iterator of output sequence.

Definition at line 360 of file multiway_merge.h.

References _GLIBCXX_CALL.

3.6.4.67 template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType > void __gnu_parallel::multiway_merge_exact_splitting (_RAIterIterator *__seqs_begin*, _RAIterIterator *__seqs_end*, _DifferenceType *__length*, _DifferenceType *__total_length*, _Compare *__comp*, std::vector< std::pair< _DifferenceType, _DifferenceType > > * *__pieces*)

Exact splitting for parallel multiway-merge routine.

None of the passed sequences may be empty.

Definition at line 1120 of file multiway_merge.h.

References __equally_split(), _GLIBCXX_PARALLEL_LENGTH, std::vector< _Tp, _Alloc >::begin(), std::vector< _Tp, _Alloc >::end(), multiseq_partition(), and std::vector< _Tp, _Alloc >::resize().

Referenced by __parallel_merge_advance().

3.6.4.68 template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::multiway_merge_loser_tree (_RAIterIterator *__seqs_begin*, _RAIterIterator *__seqs_end*, _RAIter3 *__target*, _DifferenceTp *__length*, _Compare *__comp*)

Multi-way merging procedure for a high branching factor, guarded case.

This merging variant uses a LoserTree class as selected by `_LT`.

Stability is selected through the used LoserTree class `_LT`.

At least one non-empty sequence is required.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.

__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, less equal than the total number of elements available.

Returns

End iterator of output sequence.

Definition at line 491 of file multiway_merge.h.

References _GLIBCXX_CALL, and _GLIBCXX_PARALLEL_LENGTH.

3.6.4.69 template<typename _UnguardedLoserTree , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::multiway_merge_loser_tree_sentinel (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type & *__sentinel,* _DifferenceTp *__length,* _Compare *__comp*)

Multi-way merging procedure for a high branching factor, requiring sentinels to exist.

Template Parameters

_UnguardedLoserTree	Loser Tree variant to use for the unguarded merging.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, less equal than the total number of elements available.

Returns

End iterator of output sequence.

Definition at line 662 of file multiway_merge.h.

References __is_sorted(), and _GLIBCXX_CALL.

3.6.4.70 template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare > _RAIter3 __gnu_parallel::multiway_merge_loser_tree_unguarded (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type & *__sentinel,* _DifferenceTp *__length,* _Compare *__comp*)

Multi-way merging procedure for a high branching factor, unguarded case.

Merging is done using the LoserTree class `_LT`.

Stability is selected by the used LoserTrees.

Precondition

No input will run out of elements during the merge.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, less equal than the total number of elements available.

Returns

End iterator of output sequence.

Definition at line 574 of file multiway_merge.h.

References _GLIBCXX_CALL.

3.6.4.71 template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType > void __gnu_parallel::multiway_merge_sampling_splitting (_RAIterIterator *__seqs_begin*, _RAIterIterator *__seqs_end*, _DifferenceType *__length*, _DifferenceType *__total_length*, _Compare *__comp*, std::vector< std::pair< _DifferenceType, _DifferenceType > > * *__pieces*)

Sampling based splitting for parallel multiway-merge routine.

Definition at line 1035 of file multiway_merge.h.

References _GLIBCXX_PARALLEL_LENGTH, __gnu_parallel::_Settings::get(), and __gnu_parallel::_Settings::merge_oversampling.

3.6.4.72 template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut __gnu_parallel::multiway_merge_sentinels (_RAIterPairIterator *__seqs_begin*, _RAIterPairIterator *__seqs_end*, _RAIterOut *__target*, _DifferenceTp *__length*, _Compare *__comp*, __gnu_parallel::sequential_tag)

Multiway Merge Frontend.

Merge the sequences specified by seqs_begin and __seqs_end into __target. __seqs_begin and __seqs_end must point to a sequence of pairs. These pairs must contain an iterator to the beginning of a sequence in their first entry and an iterator the _M_end of the same sequence in their second entry.

Ties are broken arbitrarily. See stable_multiway_merge for a variant that breaks ties by sequence number but is slower.

The first entries of the pairs (i.e. the begin iterators) will be moved forward accordingly.

The output sequence has to provide enough space for all elements that are written to it.

This function will merge the input sequences:

- not stable
- parallel, depending on the input size and Settings
- using sampling for splitting
- using sentinels

You have to take care that the element the _M_end iterator points to is readable and contains a value that is greater than any other non-sentinel value in all sequences.

Example:

```
int sequences[10][11];
```

```
for (int __i = 0; __i < 10; ++__i)
  for (int __j = 0; __i < 11; ++__j)
    sequences[__i][__j] = __j; // __last one is sentinel!


int __out[33];
std::vector<std::pair<int*> > seqs;
for (int __i = 0; __i < 10; ++__i)
  { seqs.push(std::make_pair<int*>(sequences[__i],
                                   sequences[__i] + 10)) }


multiway_merge(seqs.begin(), seqs.end(), __target, std::less<int>(), 33);
```

Precondition

All input sequences must be sorted.
Target must provide enough space to merge out length elements or the number of elements in all sequences, whichever is smaller.
For each __i, __seqs_begin[__i].second must be the end marker of the sequence, but also reference the one more __sentinel element.

Postcondition

[__target, return __value) contains merged __elements from the input sequences.
return __value - __target = min(__length, number of elements in all sequences).

See Also

stable_multiway_merge_sentinels

Template Parameters

_RAIterPairIterator	iterator over sequence of pairs of iterators
_RAIterOut	iterator over target sequence
_DifferenceTp	difference type for the sequence
_Compare	strict weak ordering type to compare elements in sequences

Parameters

__seqs_begin	__begin of sequence __sequence
__seqs_end	_M_end of sequence __sequence
__target	target sequence to merge to.
__comp	strict weak ordering to use for element comparison.
__length	Maximum length to merge, possibly larger than the number of elements available.

Returns

_M_end iterator of output sequence

Definition at line 1782 of file multiway_merge.h.

References __sequential_multiway_merge(), and _GLIBCXX_CALL.

3.6.4.73 template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Splitter , typename _Compare > _RAIter3 __gnu_parallel::parallel_multiway_merge (_RAIterIterator *__seqs_begin,* _RAIterIterator *__seqs_end,* _RAIter3 *__target,* _Splitter *__splitter,* _DifferenceTp *__length,* _Compare *__comp,* _ThreadIndex *__num_threads*)

Parallel multi-way merge routine.

The _GLIBCXX_PARALLEL_DECISION is based on the branching factor and runtime settings.

Must not be called if the number of sequences is 1.

Template Parameters

_Splitter	functor to split input (either __exact or sampling based)
__stable	Stable merging incurs a performance penalty.
__sentinel	Ignored.

Parameters

__seqs_begin	Begin iterator of iterator pair input sequence.
__seqs_end	End iterator of iterator pair input sequence.
__target	Begin iterator of output sequence.
__comp	Comparator.
__length	Maximum length to merge, possibly larger than the number of elements available.

Returns

End iterator of output sequence.

Definition at line 1225 of file multiway_merge.h.

References __is_sorted(), _GLIBCXX_CALL, _GLIBCXX_PARALLEL_LENGTH, __gnu_parallel::_Settings::get(), and __gnu_parallel::_Settings::merge_oversampling.

Referenced by __parallel_merge_advance().

3.6.4.74 template<bool __stable, bool __exact, typename _RAIter , typename _Compare > void __gnu_parallel::parallel_sort_mwms (_RAIter *__begin,* _RAIter *__end,* _Compare *__comp,* _ThreadIndex *__num_threads*)

PMWMS main call.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__comp	Comparator.
__num_threads	Number of threads to use.

Definition at line 395 of file multiway_mergesort.h.

References _GLIBCXX_CALL, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_num_threads, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_offsets, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_pieces, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_samples, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_source, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_starts, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_temporary, __gnu_parallel::_Settings::get(), and __gnu_parallel::_Settings::sort_mwms_oversampling.

3.6.4.75 template<bool __stable, bool __exact, typename _RAIter , typename _Compare > void __gnu_parallel::parallel_sort_mwms_pu (_PMWMSSortingData< _RAIter > * *__sd*, _Compare & *__comp*)

PMWMS code executed by each thread.

Parameters

__sd	Pointer to algorithm data.
__comp	Comparator.

Definition at line 308 of file multiway_mergesort.h.

References __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_num_threads, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_pieces, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_source, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_starts, __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_temporary, __gnu_parallel::_Settings::get(), __gnu_parallel::_Settings::sort_mwms_oversampling, and std::uninitialized_copy().

3.6.5 Variable Documentation

3.6.5.1 const int __gnu_parallel::_CASable_bits [static]

Number of bits of _CASable.

Definition at line 130 of file types.h.

Referenced by __decode2(), and __encode2().

3.6.5.2 const _CASable __gnu_parallel::_CASable_mask [static]

_CASable with the right half of bits set to 1.

Definition at line 133 of file types.h.

Referenced by __decode2().

3.7 __gnu_pbds Namespace Reference

Classes

- struct associative_tag
- class basic_branch
- struct basic_branch_tag
- class basic_hash_table
- struct basic_hash_tag
- struct basic_invalidation_guarantee
- struct binary_heap_tag
- struct binomial_heap_tag
- class cc_hash_max_collision_check_resize_trigger
- class cc_hash_table
- struct cc_hash_tag
- struct container_error
- struct container_tag
- struct container_traits
- struct container_traits_base
- struct container_traits_base< binary_heap_tag >
- struct container_traits_base< binomial_heap_tag >
- struct container_traits_base< cc_hash_tag >
- struct container_traits_base< gp_hash_tag >
- struct container_traits_base< list_update_tag >
- struct container_traits_base< ov_tree_tag >

- struct container_traits_base< pairing_heap_tag >
- struct container_traits_base< pat_trie_tag >
- struct container_traits_base< rb_tree_tag >
- struct container_traits_base< rc_binomial_heap_tag >
- struct container_traits_base< splay_tree_tag >
- struct container_traits_base< thin_heap_tag >
- class direct_mask_range_hashing
- class direct_mod_range_hashing
- class gp_hash_table
- struct gp_hash_tag
- class hash_exponential_size_policy
- class hash_load_check_resize_trigger
- class hash_prime_size_policy
- class hash_standard_resize_policy
- struct insert_error
- struct join_error
- class linear_probe_fn
- class list_update
- struct list_update_tag
- class lu_counter_policy
- class lu_move_to_front_policy
- struct null_node_update
- struct null_type
- struct ov_tree_tag
- struct pairing_heap_tag
- struct pat_trie_tag
- struct point_invalidation_guarantee
- class priority_queue
- struct priority_queue_tag
- class quadratic_probe_fn
- struct range_invalidation_guarantee
- struct rb_tree_tag
- struct rc_binomial_heap_tag
- struct resize_error
- class sample_probe_fn
- class sample_range_hashing
- class sample_ranged_hash_fn
- class sample_ranged_probe_fn
- class sample_resize_policy
- class sample_resize_trigger
- class sample_size_policy
- class sample_tree_node_update
- struct sample_trie_access_traits
- class sample_trie_node_update
- struct sample_update_policy
- struct sequence_tag
- struct splay_tree_tag
- struct string_tag
- struct thin_heap_tag
- class tree
- class tree_order_statistics_node_update

- struct tree_tag
- class trie
- class trie_order_statistics_node_update
- class trie_prefix_search_node_update
- struct trie_string_access_traits
- struct trie_tag
- struct trivial_iterator_tag

Typedefs

- typedef void trivial_iterator_difference_type

Functions

- void **__throw_container_error** ()
- void **__throw_insert_error** ()
- void **__throw_join_error** ()
- void **__throw_resize_error** ()

3.7.1 Detailed Description

GNU extensions for policy-based data structures for public use.

3.8 __gnu_sequential Namespace Reference

3.8.1 Detailed Description

GNU sequential classes for public use.

3.9 abi Namespace Reference

3.9.1 Detailed Description

The cross-vendor C++ Application Binary Interface. A namespace alias to __cxxabiv1, but user programs should use the alias 'abi'. A brief overview of an ABI is given in the libstdc++ FAQ, question 5.8 (you may have a copy of the FAQ locally, or you can view the online version at http://gcc.gnu.org/onlinedocs/libstdc++/faq.html#5_8).

GCC subscribes to a cross-vendor ABI for C++, sometimes called the IA64 ABI because it happens to be the native ABI for that platform. It is summarized at http://www.codesourcery.com/cxx-abi/ along with the current specification.

For users of GCC greater than or equal to 3.x, entry points are available in <cxxabi.h>, which notes, *'It is not normally necessary for user programs to include this header, or use the entry points directly. However, this header is available should that be needed.'*

3.10 std Namespace Reference

Namespaces

- __debug

- __detail
- __parallel
- chrono
- decimal
- experimental
- placeholders
- regex_constants
- rel_ops
- this_thread
- tr1
- tr2

Classes

- struct __add_pointer_helper
- struct __allocated_ptr
- struct __atomic_base
- struct __atomic_base< _PTp * >
- struct __atomic_flag_base
- class __basic_future
- class __codecvt_abstract_base
- class __ctype_abstract_base
- struct __detector
- struct __detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...>
- struct __future_base
- struct __is_location_invariant
- struct __is_nullptr_t
- struct __is_tuple_like_impl< std::pair< _T1, _T2 > >
- struct __numeric_limits_base
- struct _Base_bitset
- struct _Base_bitset< 0 >
- struct _Base_bitset< 1 >
- struct _Bind
- struct _Bind_result
- class _Deque_base
- struct _Deque_iterator
- struct _Enable_copy_move
- struct _Enable_default_constructor
- struct _Enable_destructor
- struct _Enable_special_members
- class _Function_base
- struct _Fwd_list_base
- struct _Fwd_list_const_iterator
- struct _Fwd_list_iterator
- struct _Fwd_list_node
- struct _Fwd_list_node_base
- class _Hashtable
- class _List_base
- struct _List_const_iterator
- struct _List_iterator

- struct _List_node
- class _Mu
- class _Mu< _Arg, false, false >
- class _Mu< _Arg, false, true >
- class _Mu< _Arg, true, false >
- class _Mu< reference_wrapper< _Tp >, false, false >
- class _Not_fn
- struct _Placeholder
- struct _Sp_ebo_helper< _Nm, _Tp, false >
- struct _Sp_ebo_helper< _Nm, _Tp, true >
- class _Temporary_buffer
- struct _Tuple_impl
- struct _Tuple_impl< _Idx, _Head, _Tail...>
- struct _Vector_base
- struct add_const
- struct add_cv
- struct add_lvalue_reference
- struct add_rvalue_reference
- struct add_volatile
- struct adopt_lock_t
- struct aligned_storage
- struct aligned_union
- struct alignment_of
- class allocator
- class allocator< void >
- struct allocator_arg_t
- struct allocator_traits
- struct allocator_traits< allocator< _Tp > >
- struct array
- struct atomic
- struct atomic< _Tp * >
- struct atomic< bool >
- struct atomic< char >
- struct atomic< char16_t >
- struct atomic< char32_t >
- struct atomic< int >
- struct atomic< long >
- struct atomic< long long >
- struct atomic< short >
- struct atomic< signed char >
- struct atomic< unsigned char >
- struct atomic< unsigned int >
- struct atomic< unsigned long >
- struct atomic< unsigned long long >
- struct atomic< unsigned short >
- struct atomic< wchar_t >
- struct atomic_flag
- class auto_ptr
- struct auto_ptr_ref
- class back_insert_iterator
- class bad_alloc

- class bad_cast
- class bad_exception
- class bad_function_call
- class bad_typeid
- class bad_weak_ptr
- class basic_filebuf
- class basic_fstream
- class basic_ifstream
- class basic_ios
- class basic_iostream
- class basic_istream
- class basic_istringstream
- class basic_ofstream
- class basic_ostream
- class basic_ostringstream
- class basic_regex
- class basic_streambuf
- class basic_string
- class basic_stringbuf
- class basic_stringstream
- class bernoulli_distribution
- struct bidirectional_iterator_tag
- struct binary_function
- class binary_negate
- class binder1st
- class binder2nd
- class binomial_distribution
- class bitset
- class cauchy_distribution
- struct char_traits
- struct char_traits< __gnu_cxx::character< _Value, _Int, _St > >
- struct char_traits< char >
- struct char_traits< wchar_t >
- class chi_squared_distribution
- class codecvt
- class codecvt< _InternT, _ExternT, encoding_state >
- class codecvt< char, char, mbstate_t >
- class codecvt< char16_t, char, mbstate_t >
- class codecvt< char32_t, char, mbstate_t >
- class codecvt< wchar_t, char, mbstate_t >
- class codecvt_base
- class codecvt_byname
- class collate
- class collate_byname
- struct common_type
- struct common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > >
- struct common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > >
- struct complex
- struct complex< double >
- struct complex< float >
- struct complex< long double >

- class condition_variable
- struct conditional
- class const_mem_fun1_ref_t
- class const_mem_fun1_t
- class const_mem_fun_ref_t
- class const_mem_fun_t
- class ctype
- class ctype< char >
- class ctype< wchar_t >
- struct ctype_base
- class ctype_byname
- class ctype_byname< char >
- class decay
- struct default_delete
- struct default_delete< _Tp[]>
- struct defer_lock_t
- class deque
- class discard_block_engine
- class discrete_distribution
- struct divides
- struct divides< void >
- class domain_error
- struct enable_if
- class enable_shared_from_this
- struct equal_to
- struct equal_to< void >
- struct error_code
- struct error_condition
- class exception
- class exponential_distribution
- struct extent
- class extreme_value_distribution
- class fisher_f_distribution
- struct forward_iterator_tag
- class forward_list
- class fpos
- struct from_chars_result
- class front_insert_iterator
- class function< _Res(_ArgTypes...)>
- class future
- class future< _Res & >
- class future< void >
- class future_error
- class gamma_distribution
- class geometric_distribution
- struct greater
- struct greater< void >
- struct greater_equal
- struct greater_equal< void >
- class gslice
- class gslice_array

- struct has_virtual_destructor
- struct hash
- struct hash< __debug::bitset< _Nb > >
- struct hash< __debug::vector< bool, _Alloc > >
- struct hash< __gnu_cxx::__u16vstring >
- struct hash< __gnu_cxx::__u32vstring >
- struct hash< __gnu_cxx::__vstring >
- struct hash< __gnu_cxx::__wvstring >
- struct hash< __gnu_cxx::throw_value_limit >
- struct hash< __gnu_cxx::throw_value_random >
- struct hash< __shared_ptr< _Tp, _Lp > >
- struct hash< _Tp * >
- struct hash< bool >
- struct hash< char >
- struct hash< char16_t >
- struct hash< char32_t >
- struct hash< double >
- struct hash< error_code >
- struct hash< experimental::optional< _Tp > >
- struct hash< experimental::shared_ptr< _Tp > >
- struct hash< float >
- struct hash< int >
- struct hash< long >
- struct hash< long double >
- struct hash< long long >
- struct hash< shared_ptr< _Tp > >
- struct hash< short >
- struct hash< signed char >
- struct hash< string >
- struct hash< thread::id >
- struct hash< type_index >
- struct hash< u16string >
- struct hash< u32string >
- struct hash< unique_ptr< _Tp, _Dp > >
- struct hash< unsigned char >
- struct hash< unsigned int >
- struct hash< unsigned long >
- struct hash< unsigned long long >
- struct hash< unsigned short >
- struct hash< wchar_t >
- struct hash< wstring >
- struct hash<::bitset< _Nb > >
- struct hash<::vector< bool, _Alloc > >
- class independent_bits_engine
- class indirect_array
- class initializer_list
- struct input_iterator_tag
- class insert_iterator
- struct integer_sequence
- struct integral_constant
- class invalid_argument

- class ios_base
- struct is_abstract
- struct is_arithmetic
- struct is_array
- struct is_assignable
- struct is_base_of
- struct is_bind_expression
- struct is_bind_expression< _Bind< _Signature > >
- struct is_bind_expression< _Bind_result< _Result, _Signature > >
- struct is_bind_expression< const _Bind< _Signature > >
- struct is_bind_expression< const _Bind_result< _Result, _Signature > >
- struct is_bind_expression< const volatile _Bind< _Signature > >
- struct is_bind_expression< const volatile _Bind_result< _Result, _Signature > >
- struct is_bind_expression< volatile _Bind< _Signature > >
- struct is_bind_expression< volatile _Bind_result< _Result, _Signature > >
- struct is_class
- struct is_compound
- struct is_const
- struct is_constructible
- struct is_convertible
- struct is_copy_assignable
- struct is_copy_constructible
- struct is_default_constructible
- struct is_destructible
- struct is_empty
- struct is_enum
- struct is_error_code_enum
- struct is_error_code_enum< future_errc >
- struct is_error_condition_enum
- struct is_final
- struct is_floating_point
- struct is_function
- struct is_fundamental
- struct is_integral
- struct is_literal_type
- struct is_lvalue_reference
- struct is_member_function_pointer
- struct is_member_object_pointer
- struct is_member_pointer
- struct is_move_assignable
- struct is_move_constructible
- struct is_nothrow_assignable
- struct is_nothrow_constructible
- struct is_nothrow_copy_assignable
- struct is_nothrow_copy_constructible
- struct is_nothrow_default_constructible
- struct is_nothrow_destructible
- struct is_nothrow_move_assignable
- struct is_nothrow_move_constructible
- struct is_nothrow_swappable
- struct is_nothrow_swappable_with

- struct is_null_pointer
- struct is_object
- struct is_placeholder
- struct is_placeholder< _Placeholder< _Num > >
- struct is_pod
- struct is_pointer
- struct is_polymorphic
- struct is_reference
- struct is_rvalue_reference
- struct is_same
- struct is_scalar
- struct is_standard_layout
- struct is_swappable
- struct is_swappable_with
- struct is_trivial
- struct is_trivially_assignable
- struct is_trivially_constructible
- struct is_trivially_copy_assignable
- struct is_trivially_copy_constructible
- struct is_trivially_default_constructible
- struct is_trivially_destructible
- struct is_trivially_move_assignable
- struct is_trivially_move_constructible
- struct is_union
- struct is_void
- struct is_volatile
- class istream_iterator
- class istreambuf_iterator
- struct iterator
- struct iterator_traits
- struct iterator_traits< _Tp * >
- struct iterator_traits< const _Tp * >
- class length_error
- struct less
- struct less< void >
- struct less_equal
- struct less_equal< void >
- class linear_congruential_engine
- class list
- class locale
- class lock_guard
- class logic_error
- struct logical_and
- struct logical_and< void >
- struct logical_not
- struct logical_not< void >
- struct logical_or
- struct logical_or< void >
- class lognormal_distribution
- struct make_signed
- struct make_unsigned

- class map
- class mask_array
- class match_results
- class mem_fun1_ref_t
- class mem_fun1_t
- class mem_fun_ref_t
- class mem_fun_t
- class mersenne_twister_engine
- class messages
- struct messages_base
- class messages_byname
- struct minus
- struct minus< void >
- struct modulus
- struct modulus< void >
- class money_base
- class money_get
- class money_put
- class moneypunct
- class moneypunct_byname
- class move_iterator
- class multimap
- struct multiplies
- struct multiplies< void >
- class multiset
- class mutex
- struct negate
- struct negate< void >
- class negative_binomial_distribution
- class nested_exception
- class normal_distribution
- struct not_equal_to
- struct not_equal_to< void >
- class num_get
- class num_put
- struct numeric_limits
- struct numeric_limits< bool >
- struct numeric_limits< char >
- struct numeric_limits< char16_t >
- struct numeric_limits< char32_t >
- struct numeric_limits< double >
- struct numeric_limits< float >
- struct numeric_limits< int >
- struct numeric_limits< long >
- struct numeric_limits< long double >
- struct numeric_limits< long long >
- struct numeric_limits< short >
- struct numeric_limits< signed char >
- struct numeric_limits< unsigned char >
- struct numeric_limits< unsigned int >
- struct numeric_limits< unsigned long >

- struct numeric_limits< unsigned long long >
- struct numeric_limits< unsigned short >
- struct numeric_limits< wchar_t >
- class numpunct
- class numpunct_byname
- struct once_flag
- class ostream_iterator
- class ostreambuf_iterator
- class out_of_range
- struct output_iterator_tag
- class overflow_error
- struct owner_less
- struct owner_less< shared_ptr< _Tp > >
- struct owner_less< void >
- struct owner_less< weak_ptr< _Tp > >
- class packaged_task< _Res(_ArgTypes...)>
- struct pair
- class piecewise_constant_distribution
- struct piecewise_construct_t
- class piecewise_linear_distribution
- struct plus
- class pointer_to_binary_function
- class pointer_to_unary_function
- struct pointer_traits
- struct pointer_traits< _Tp * >
- class poisson_distribution
- class priority_queue
- class promise
- class promise< _Res & >
- class promise< void >
- class queue
- struct random_access_iterator_tag
- class random_device
- class range_error
- struct rank
- struct ratio
- struct ratio_equal
- struct ratio_greater
- struct ratio_greater_equal
- struct ratio_less
- struct ratio_less_equal
- struct ratio_not_equal
- class raw_storage_iterator
- class recursive_mutex
- class recursive_timed_mutex
- class reference_wrapper
- class regex_error
- class regex_iterator
- class regex_token_iterator
- class regex_traits
- struct remove_all_extents

- struct remove_const
- struct remove_cv
- struct remove_extent
- struct remove_pointer
- struct remove_reference
- struct remove_volatile
- class result_of
- class reverse_iterator
- class runtime_error
- class scoped_allocator_adaptor
- class seed_seq
- class set
- class shared_future
- class shared_future< _Res & >
- class shared_future< void >
- class shared_lock
- class shared_ptr
- class shared_timed_mutex
- class shuffle_order_engine
- class slice
- class slice_array
- class stack
- class student_t_distribution
- class sub_match
- class subtract_with_carry_engine
- class system_error
- class thread
- class time_base
- class time_get
- class time_get_byname
- class time_put
- class time_put_byname
- class timed_mutex
- struct to_chars_result
- struct try_to_lock_t
- class tuple
- class tuple< _T1, _T2 >
- struct tuple_element
- struct tuple_element< 0, std::pair< _Tp1, _Tp2 > >
- struct tuple_element< 0, tuple< _Head, _Tail...> >
- struct tuple_element< 1, std::pair< _Tp1, _Tp2 > >
- struct tuple_element< __i, tuple< _Head, _Tail...> >
- struct tuple_element< __i, tuple<> >
- struct tuple_element< _Int, std::__debug::array< _Tp, _Nm > >
- struct tuple_element< _Int,::array< _Tp, _Nm > >
- struct tuple_size
- struct tuple_size< std::__debug::array< _Tp, _Nm > >
- struct tuple_size< std::pair< _Tp1, _Tp2 > >
- struct tuple_size< tuple< _Elements...> >
- struct tuple_size<::array< _Tp, _Nm > >
- struct type_index

- class type_info
- struct unary_function
- class unary_negate
- class underflow_error
- struct underlying_type
- class uniform_int_distribution
- class uniform_real_distribution
- class unique_lock
- class unique_ptr
- class unique_ptr< _Tp[], _Dp >
- class unordered_map
- class unordered_multimap
- class unordered_multiset
- class unordered_set
- struct uses_allocator
- struct uses_allocator< tuple< _Types...>, _Alloc >
- class valarray
- class vector
- class vector< bool, _Alloc >
- class wbuffer_convert
- class weak_ptr
- class weibull_distribution
- class wstring_convert

Typedefs

- template<typename _Alloc , typename _Up >
  using **__alloc_rebind** = typename __allocator_traits_base::template __rebind< _Alloc, _Up >::type
- template<typename _Tp >
  using __allocator_base = __gnu_cxx::new_allocator< _Tp >
- template<typename _Fn , typename... _Args>
  using **__async_result_of** = typename __invoke_result< typename decay< _Fn >::type, typename decay< _-Args >::type...>::type
- template<typename _Tp >
  using **__atomic_diff_t** = typename atomic< _Tp >::difference_type
- typedef unsigned char **__atomic_flag_data_type**
- template<typename _Tp >
  using **__atomic_val_t** = typename atomic< _Tp >::value_type
- template<bool __v>
  using **__bool_constant** = integral_constant< bool, __v >
- typedef FILE **__c_file**
- typedef int * **__c_locale**
- typedef __gthread_mutex_t **__c_lock**
- template<typename _Tp , typename _Hash >
  using **__cache_default** = __not_< __and_< __is_fast_hash< _Hash >, __is_nothrow_invocable< const _Hash &, const _Tp & >>>
- template<typename _Fn , typename... _Args>
  using **__call_is_nothrow_** = __call_is_nothrow< __invoke_result< _Fn, _Args...>, _Fn, _Args...>
- template<typename _Res , typename _Callable , typename... _Args>
  using **__can_invoke_as_nonvoid** = __enable_if_t< __and_< __not_< is_void< _Res >>, is_convertible< typename __invoke_result< _Callable, _Args...>::type, _Res > >::value, _Res >

- template<typename _Res , typename _Callable , typename... _Args>
  using **__can_invoke_as_void** = __enable_if_t< __and_< is_void< _Res >, __is_invocable< _Callable, _Args...>>::value, _Res >
- typedef basic_string< char > **__cow_string**
- template<typename _Tp >
  using **__decay_and_strip** = __strip_reference_wrapper< __decay_t< _Tp >>
- template<typename _Tp >
  using **__decay_t** = typename decay< _Tp >::type
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **__detected_or** = __detector< _Default, void, _Op, _Args...>
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **__detected_or_t** = typename __detected_or< _Default, _Op, _Args...>::type
- template<typename _Tp >
  using **__do_is_convertible_to_basic_istream_impl** = decltype(__is_convertible_to_basic_istream_test(declval< typename remove_reference< _Tp >::type * >()))
- template<typename _Tp >
  using **__do_is_convertible_to_basic_ostream_impl** = decltype(__is_convertible_to_basic_ostream_test(declval< typename remove_reference< _Tp >::type * >()))
- template<typename _Tp >
  using **__empty_not_final** = typename conditional< __is_final(_Tp), false_type, __is_empty_non_tuple< _Tp >>::type
- template<typename _Tp , typename _Up = typename remove_cv<_Tp>::type, typename = typename enable_if<is_same<_Tp, _Up>::value>::type, size_t = tuple_size<_Tp>::value>
  using **__enable_if_has_tuple_size** = _Tp
- template<bool _Cond, typename _Tp = void>
  using **__enable_if_t** = typename enable_if< _Cond, _Tp >::type
- template<typename _Tp >
  using **__get_first_arg_t** = typename __get_first_arg< _Tp >::type
- template<typename _Cmp , typename _SfinaeType >
  using **__has_is_transparent_t** = typename __has_is_transparent< _Cmp, _SfinaeType >::type
- template<typename _ToElementType , typename _FromElementType >
  using **__is_array_convertible** = is_convertible< _FromElementType(*)[], _ToElementType(*)[]>
- template<typename _Alloc , typename _Tp >
  using **__is_erased_or_convertible** = __or_< is_convertible< _Alloc, _Tp >, is_same< _Tp, __erased_type >>
- template<typename _Tp , typename... _Args>
  using **__is_nothrow_constructible_impl** = __is_nt_constructible_impl< __is_constructible(_Tp, _Args...), _Tp, _Args...>
- template<typename _Tp , typename... _Types>
  using **__is_one_of** = __or_< is_same< _Tp, _Types >...>
- template<typename _Tp >
  using **__is_signed_integer** = __is_one_of< __remove_cv_t< _Tp >, signed char, signed short, signed int, signed long, signed long long >
- template<typename _Tp , typename _Tp2 = typename decay<_Tp>::type>
  using **__is_socketlike** = __or_< is_integral< _Tp2 >, is_enum< _Tp2 >>
- template<typename _Tp >
  using **__is_standard_integer** = __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >>
- template<typename _Tp >
  using **__is_unsigned_integer** = __is_one_of< __remove_cv_t< _Tp >, unsigned char, unsigned short, unsigned int, unsigned long, unsigned long long >
- template<typename _Iter >
  using **__iterator_category_t** = typename iterator_traits< _Iter >::iterator_category

- template<typename _Tp >
  using **__make_not_void** = typename conditional< is_void< _Tp >::value, __undefined, _Tp >::type
- template<typename _Ptr , typename _Tp >
  using __ptr_rebind = typename pointer_traits< _Ptr >::template rebind< _Tp >
- template<typename _Tp >
  using **__remove_cv_t** = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using **__remove_cvref_t** = typename remove_cv< typename remove_reference< _Tp >::type >::type
- template<typename _Tp , typename _Up >
  using **__replace_first_arg_t** = typename __replace_first_arg< _Tp, _Up >::type
- template<typename _Istream >
  using **__rvalue_istream_type** = typename __is_convertible_to_basic_istream< _Istream >::__istream_type
- template<typename _Ostream >
  using **__rvalue_ostream_type** = typename __is_convertible_to_basic_ostream< _Ostream >::__ostream_type
- typedef basic_string< char > **__sso_string**
- template<std::size_t __i, typename _Tp >
  using **__tuple_element_t** = typename tuple_element< __i, _Tp >::type
- template<typename _Tp >
  using **__type_identity_t** = typename __type_identity< _Tp >::type
- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = std::equal_to<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >, typename _Tr = __umap_traits<__cache_default<_Key, _Hash>::value>>
  using **__umap_hashtable** = _Hashtable< _Key, std::pair< const _Key, _Tp >, _Alloc, __detail::_Select1st, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using __umap_traits = __detail::_Hashtable_traits< _Cache, false, true >
- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = std::equal_to<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >, typename _Tr = __ummap_traits<__cache_default<_Key, _Hash>::value>>
  using **__ummap_hashtable** = _Hashtable< _Key, std::pair< const _Key, _Tp >, _Alloc, __detail::_Select1st, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using __ummap_traits = __detail::_Hashtable_traits< _Cache, false, false >
- template<typename _Value , typename _Hash = hash<_Value>, typename _Pred = std::equal_to<_Value>, typename _Alloc = std::allocator<_Value>, typename _Tr = __umset_traits<__cache_default<_Value, _Hash>::value>>
  using **__umset_hashtable** = _Hashtable< _Value, _Value, _Alloc, __detail::_Identity, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using __umset_traits = __detail::_Hashtable_traits< _Cache, true, false >
- template<typename _Tp , typename _Alloc , typename... _Args>
  using **__uses_alloc_t** = __uses_alloc< uses_allocator< _Tp, _Alloc >::value, _Tp, _Alloc, _Args...>
- template<typename _Value , typename _Hash = hash<_Value>, typename _Pred = std::equal_to<_Value>, typename _Alloc = std::allocator<_Value>, typename _Tr = __uset_traits<__cache_default<_Value, _Hash>::value>>
  using **__uset_hashtable** = _Hashtable< _Value, _Value, _Alloc, __detail::_Identity, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using __uset_traits = __detail::_Hashtable_traits< _Cache, true, true >
- template<typename... >
  using **__void_t** = void
- typedef unsigned long **_Bit_type**
- template<typename... _Cond>
  using **_Require** = __enable_if_t< __and_< _Cond...>::value >

- template<typename _Alloc >
  using **_RequireAllocator** = typename enable_if< __is_allocator< _Alloc >::value, _Alloc >::type
- template<typename _InIter >
  using **_RequireInputIter** = __enable_if_t< is_convertible< __iterator_category_t< _InIter >, input_iterator_tag >::value >
- template<typename _Alloc >
  using **_RequireNotAllocator** = typename enable_if<!__is_allocator< _Alloc >::value, _Alloc >::type
- template<std::size_t __i, typename _Tuple >
  using **_Safe_tuple_element_t** = typename enable_if<(__i< tuple_size< _Tuple >::value), tuple_element< __i, _Tuple >>::type::type
- template<typename _Tp >
  using add_const_t = typename add_const< _Tp >::type
- template<typename _Tp >
  using add_cv_t = typename add_cv< _Tp >::type
- template<typename _Tp >
  using add_lvalue_reference_t = typename add_lvalue_reference< _Tp >::type
- template<typename _Tp >
  using add_pointer_t = typename add_pointer< _Tp >::type
- template<typename _Tp >
  using add_rvalue_reference_t = typename add_rvalue_reference< _Tp >::type
- template<typename _Tp >
  using add_volatile_t = typename add_volatile< _Tp >::type
- template<size_t _Len, size_t _Align = __alignof__(typename __aligned_storage_msa<_Len>::__type)>
  using aligned_storage_t = typename aligned_storage< _Len, _Align >::type
- template<size_t _Len, typename... _Types>
  using **aligned_union_t** = typename aligned_union< _Len, _Types...>::type
- typedef atomic< bool > atomic_bool
- typedef atomic< char > atomic_char
- typedef atomic< char16_t > atomic_char16_t
- typedef atomic< char32_t > atomic_char32_t
- typedef atomic< int > atomic_int
- typedef atomic< int16_t > atomic_int16_t
- typedef atomic< int32_t > atomic_int32_t
- typedef atomic< int64_t > atomic_int64_t
- typedef atomic< int8_t > atomic_int8_t
- typedef atomic< int_fast16_t > atomic_int_fast16_t
- typedef atomic< int_fast32_t > atomic_int_fast32_t
- typedef atomic< int_fast64_t > atomic_int_fast64_t
- typedef atomic< int_fast8_t > atomic_int_fast8_t
- typedef atomic< int_least16_t > atomic_int_least16_t
- typedef atomic< int_least32_t > atomic_int_least32_t
- typedef atomic< int_least64_t > atomic_int_least64_t
- typedef atomic< int_least8_t > atomic_int_least8_t
- typedef atomic< intmax_t > atomic_intmax_t
- typedef atomic< intptr_t > atomic_intptr_t
- typedef atomic< long long > atomic_llong
- typedef atomic< long > atomic_long
- typedef atomic< ptrdiff_t > atomic_ptrdiff_t
- typedef atomic< signed char > atomic_schar
- typedef atomic< short > atomic_short
- typedef atomic< size_t > atomic_size_t
- typedef atomic< unsigned char > atomic_uchar

- typedef atomic< unsigned int > atomic_uint
- typedef atomic< uint16_t > atomic_uint16_t
- typedef atomic< uint32_t > atomic_uint32_t
- typedef atomic< uint64_t > atomic_uint64_t
- typedef atomic< uint8_t > atomic_uint8_t
- typedef atomic< uint_fast16_t > atomic_uint_fast16_t
- typedef atomic< uint_fast32_t > atomic_uint_fast32_t
- typedef atomic< uint_fast64_t > atomic_uint_fast64_t
- typedef atomic< uint_fast8_t > atomic_uint_fast8_t
- typedef atomic< uint_least16_t > atomic_uint_least16_t
- typedef atomic< uint_least32_t > atomic_uint_least32_t
- typedef atomic< uint_least64_t > atomic_uint_least64_t
- typedef atomic< uint_least8_t > atomic_uint_least8_t
- typedef atomic< uintmax_t > atomic_uintmax_t
- typedef atomic< uintptr_t > atomic_uintptr_t
- typedef atomic< unsigned long long > atomic_ullong
- typedef atomic< unsigned long > atomic_ulong
- typedef atomic< unsigned short > atomic_ushort
- typedef atomic< wchar_t > atomic_wchar_t
- typedef ratio< 1, 1000000000000000000 > **atto**
- typedef ratio< 1, 100 > **centi**
- typedef match_results< const char * > **cmatch**
- template<typename... _Tp>
  using common_type_t = typename common_type< _Tp...>::type
- template<bool _Cond, typename _Iftrue , typename _Iffalse >
  using conditional_t = typename conditional< _Cond, _Iftrue, _Iffalse >::type
- typedef regex_iterator< const char * > **cregex_iterator**
- typedef regex_token_iterator < const char * > cregex_token_iterator
- typedef sub_match< const char * > csub_match
- typedef ratio< 10, 1 > **deca**
- template<typename _Tp >
  using decay_t = typename decay< _Tp >::type
- typedef ratio< 1, 10 > **deci**
- typedef minstd_rand0 **default_random_engine**
- template<bool _Cond, typename _Tp = void>
  using enable_if_t = typename enable_if< _Cond, _Tp >::type
- typedef ratio< 1000000000000000000, 1 > **exa**
- typedef integral_constant < bool, false > false_type
- typedef ratio< 1, 1000000000000000 > **femto**
- typedef basic_filebuf< char > filebuf
- typedef basic_fstream< char > fstream
- typedef ratio< 1000000000, 1 > **giga**
- typedef ratio< 100, 1 > **hecto**
- typedef basic_ifstream< char > ifstream
- template<size_t... _Idx>
  using index_sequence = integer_sequence< size_t, _Idx...>

- template<typename... _Types>
  using index_sequence_for = make_index_sequence< sizeof...(_Types)>
- typedef basic_ios< char > ios
- typedef basic_iostream< char > iostream
- typedef basic_istream< char > istream
- typedef basic_istringstream< char > istringstream
- typedef ratio< 1000, 1 > **kilo**
- typedef shuffle_order_engine
  < minstd_rand0, 256 > **knuth_b**
- template<size_t _Num>
  using make_index_sequence = make_integer_sequence< size_t, _Num >
- template<typename _Tp , _Tp _Num>
  using make_integer_sequence = integer_sequence< _Tp, __integer_pack(_Num)...>
- template<typename _Tp >
  using make_signed_t = typename make_signed< _Tp >::type
- template<typename _Tp >
  using make_unsigned_t = typename make_unsigned< _Tp >::type
- typedef ratio< 1000000, 1 > **mega**
- typedef enum std::memory_order memory_order
- typedef ratio< 1, 1000000 > **micro**
- typedef ratio< 1, 1000 > **milli**
- typedef
  linear_congruential_engine
  < uint_fast32_t, 48271UL, 0UL, 2147483647UL > minstd_rand
- typedef
  linear_congruential_engine
  < uint_fast32_t, 16807UL, 0UL, 2147483647UL > minstd_rand0
- typedef
  mersenne_twister_engine
  < uint_fast32_t, 32, 624, 397, 31, 0x9908b0dfUL, 11, 0xffffffffUL, 7, 0x9d2c5680UL, 15, 0xefc60000UL, 18, 1812433253UL > mt19937
- typedef
  mersenne_twister_engine
  < uint_fast64_t, 64, 312, 156, 31, 0xb5026f5aa96619e9ULL, 29, 0x5555555555555555ULL, 17, 0x71d67fffeda60000-ULL, 37, 0xfff7eee000000000ULL, 43, 6364136223846793005ULL > mt19937_64
- typedef ratio< 1, 1000000000 > **nano**
- typedef void(* new_handler)()
- typedef basic_ofstream< char > ofstream
- typedef basic_ostream< char > ostream
- typedef basic_ostringstream< char > ostringstream
- typedef ratio< 1000000000000000, 1 > **peta**
- typedef ratio< 1, 1000000000000 > **pico**
- typedef __PTRDIFF_TYPE__ **ptrdiff_t**
- typedef discard_block_engine
  < ranlux24_base, 223, 23 > **ranlux24**
- typedef
  subtract_with_carry_engine
  < uint_fast32_t, 24, 10, 24 > **ranlux24_base**
- typedef discard_block_engine
  < ranlux48_base, 389, 11 > **ranlux48**
- typedef
  subtract_with_carry_engine
  < uint_fast64_t, 48, 5, 12 > **ranlux48_base**

- template<typename _R1 , typename _R2 >
  using ratio_add = typename __ratio_add< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using ratio_divide = typename __ratio_divide< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using ratio_multiply = typename __ratio_multiply< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using ratio_subtract = typename __ratio_subtract< _R1, _R2 >::type
- typedef basic_regex< char > regex
- template<typename _Tp >
  using remove_all_extents_t = typename remove_all_extents< _Tp >::type
- template<typename _Tp >
  using remove_const_t = typename remove_const< _Tp >::type
- template<typename _Tp >
  using remove_cv_t = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using remove_extent_t = typename remove_extent< _Tp >::type
- template<typename _Tp >
  using remove_pointer_t = typename remove_pointer< _Tp >::type
- template<typename _Tp >
  using remove_reference_t = typename remove_reference< _Tp >::type
- template<typename _Tp >
  using remove_volatile_t = typename remove_volatile< _Tp >::type
- template<typename _Tp >
  using result_of_t = typename result_of< _Tp >::type
- typedef __SIZE_TYPE__ **size_t**
- typedef match_results
  < string::const_iterator > **smatch**
- typedef regex_iterator
  < string::const_iterator > **sregex_iterator**
- typedef regex_token_iterator
  < string::const_iterator > sregex_token_iterator
- typedef sub_match
  < string::const_iterator > ssub_match
- typedef basic_streambuf< char > streambuf
- typedef long long streamoff
- typedef fpos< mbstate_t > streampos
- typedef ptrdiff_t streamsize
- typedef basic_string< char > string
- typedef basic_stringbuf< char > stringbuf
- typedef basic_stringstream< char > stringstream
- typedef ratio< 1000000000000, 1 > **tera**
- typedef void(* terminate_handler)()
- typedef integral_constant
  < bool, true > true_type
- template<std::size_t __i, typename _Tp >
  using **tuple_element_t** = typename tuple_element< __i, _Tp >::type
- typedef fpos< mbstate_t > u16streampos
- typedef basic_string< char16_t > u16string
- typedef fpos< mbstate_t > u32streampos
- typedef basic_string< char32_t > u32string

- template<typename _Tp >
  using underlying_type_t = typename underlying_type< _Tp >::type
- typedef void(* unexpected_handler)()
- template<typename... >
  using void_t = void
- typedef match_results< const
  wchar_t * > **wcmatch**
- typedef regex_iterator< const
  wchar_t * > **wcregex_iterator**
- typedef regex_token_iterator
  < const wchar_t * > wcregex_token_iterator
- typedef sub_match< const
  wchar_t * > wcsub_match
- typedef basic_filebuf< wchar_t > wfilebuf
- typedef basic_fstream< wchar_t > wfstream
- typedef basic_ifstream< wchar_t > wifstream
- typedef basic_ios< wchar_t > wios
- typedef basic_iostream< wchar_t > wiostream
- typedef basic_istream< wchar_t > wistream
- typedef basic_istringstream
  < wchar_t > wistringstream
- typedef basic_ofstream< wchar_t > wofstream
- typedef basic_ostream< wchar_t > wostream
- typedef basic_ostringstream
  < wchar_t > wostringstream
- typedef basic_regex< wchar_t > wregex
- typedef match_results
  < wstring::const_iterator > **wsmatch**
- typedef regex_iterator
  < wstring::const_iterator > **wsregex_iterator**
- typedef regex_token_iterator
  < wstring::const_iterator > wsregex_token_iterator
- typedef sub_match
  < wstring::const_iterator > wssub_match
- typedef basic_streambuf< wchar_t > wstreambuf
- typedef fpos< mbstate_t > wstreampos
- typedef basic_string< wchar_t > wstring
- typedef basic_stringbuf< wchar_t > wstringbuf
- typedef basic_stringstream
  < wchar_t > wstringstream

Enumerations

- enum { **_S_threshold** }
- enum { **_S_chunk_size** }
- enum { **_S_word_bit** }
- enum **__memory_order_modifier** { **__memory_order_mask**, **__memory_order_modifier_mask**, **__memory_order_hle_acquire**, **__memory_order_hle_release** }

- enum **_Ios_Fmtflags** {
  _S_boolalpha, **_S_dec**, **_S_fixed**, **_S_hex**,
  _S_internal, **_S_left**, **_S_oct**, **_S_right**,
  _S_scientific, **_S_showbase**, **_S_showpoint**, **_S_showpos**,
  _S_skipws, **_S_unitbuf**, **_S_uppercase**, **_S_adjustfield**,
  _S_basefield, **_S_floatfield**, **_S_ios_fmtflags_end**, **_S_ios_fmtflags_max**,
  _S_ios_fmtflags_min }
- enum **_Ios_Iostate** {
  _S_goodbit, **_S_badbit**, **_S_eofbit**, **_S_failbit**,
  _S_ios_iostate_end, **_S_ios_iostate_max**, **_S_ios_iostate_min** }
- enum **_Ios_Openmode** {
  _S_app, **_S_ate**, **_S_bin**, **_S_in**,
  _S_out, **_S_trunc**, **_S_ios_openmode_end**, **_S_ios_openmode_max**,
  _S_ios_openmode_min }
- enum **_Ios_Seekdir** { **_S_beg**, **_S_cur**, **_S_end**, **_S_ios_seekdir_end** }
- enum **_Manager_operation** { **__get_type_info**, **__get_functor_ptr**, **__clone_functor**, **__destroy_functor** }
- enum **_Rb_tree_color** { **_S_red**, **_S_black** }
- enum chars_format { **scientific**, **fixed**, **hex**, **general** }
- enum **codecvt_mode** { **consume_header**, **generate_header**, **little_endian** }
- enum cv_status { **no_timeout**, **timeout** }
- enum **errc** {
  address_family_not_supported, **address_in_use**, **address_not_available**, **already_connected**,
  argument_list_too_long, **argument_out_of_domain**, **bad_address**, **bad_file_descriptor**,
  broken_pipe, **connection_aborted**, **connection_already_in_progress**, **connection_refused**,
  connection_reset, **cross_device_link**, **destination_address_required**, **device_or_resource_busy**,
  directory_not_empty, **executable_format_error**, **file_exists**, **file_too_large**,
  filename_too_long, **function_not_supported**, **host_unreachable**, **illegal_byte_sequence**,
  inappropriate_io_control_operation, **interrupted**, **invalid_argument**, **invalid_seek**,
  io_error, **is_a_directory**, **message_size**, **network_down**,
  network_reset, **network_unreachable**, **no_buffer_space**, **no_child_process**,
  no_lock_available, **no_message**, **no_protocol_option**, **no_space_on_device**,
  no_such_device_or_address, **no_such_device**, **no_such_file_or_directory**, **no_such_process**,
  not_a_directory, **not_a_socket**, **not_connected**, **not_enough_memory**,
  operation_in_progress, **operation_not_permitted**, **operation_not_supported**, **operation_would_block**,
  permission_denied, **protocol_not_supported**, **read_only_file_system**, **resource_deadlock_would_occur**,
  resource_unavailable_try_again, **result_out_of_range**, **timed_out**, **too_many_files_open_in_system**,
  too_many_files_open, **too_many_links**, **too_many_symbolic_link_levels**, **wrong_protocol_type** }
- enum float_denorm_style { denorm_indeterminate, denorm_absent, denorm_present }
- enum float_round_style {
  round_indeterminate, round_toward_zero, round_to_nearest, round_toward_infinity,
  round_toward_neg_infinity }
- enum future_errc { **future_already_retrieved**, **promise_already_satisfied**, **no_state**, **broken_promise** }
- enum future_status { **ready**, **timeout**, **deferred** }
- enum io_errc { **stream** }
- enum launch { **async**, **deferred** }
- enum memory_order {
  memory_order_relaxed, **memory_order_consume**, **memory_order_acquire**, **memory_order_release**,
  memory_order_acq_rel, **memory_order_seq_cst** }
- enum pointer_safety { **relaxed**, **preferred**, **strict** }

Functions

- template<typename _CharT >
  _CharT * **__add_grouping** (_CharT *__s, _CharT __sep, const char *__gbeg, size_t __gsize, const _CharT *__first, const _CharT *__last)
- template<typename _Tp >
  constexpr _Tp * __addressof (_Tp &__r) noexcept
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator **__adjacent_find** (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _RandomAccessIterator , typename _Distance , typename _Tp , typename _Compare >
  constexpr void **__adjust_heap** (_RandomAccessIterator __first, _Distance __holeIndex, _Distance __len, _Tp __value, _Compare __comp)
- template<typename _InputIterator , typename _Distance >
  constexpr void **__advance** (_InputIterator &__i, _Distance __n, input_iterator_tag)
- template<typename _BidirectionalIterator , typename _Distance >
  constexpr void **__advance** (_BidirectionalIterator &__i, _Distance __n, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator , typename _Distance >
  constexpr void **__advance** (_RandomAccessIterator &__i, _Distance __n, random_access_iterator_tag)
- template<typename _Alloc >
  constexpr void **__alloc_on_copy** (_Alloc &__one, const _Alloc &__two)
- template<typename _Alloc >
  constexpr _Alloc **__alloc_on_copy** (const _Alloc &__a)
- template<typename _Alloc >
  constexpr void **__alloc_on_move** (_Alloc &__one, _Alloc &__two)
- template<typename _Alloc >
  constexpr void **__alloc_on_swap** (_Alloc &__one, _Alloc &__two)
- template<typename _Alloc >
  __allocated_ptr< _Alloc > __allocate_guarded (_Alloc &__a)
- template<typename _Tp , _Lock_policy _Lp = __default_lock_policy, typename _Alloc , typename... _Args>
  __shared_ptr< _Tp, _Lp > **__allocate_shared** (const _Alloc &__a, _Args &&...__args)
- template<typename _Fn , typename _Tp , typename... _Args>
  constexpr bool **__call_is_nt** (__invoke_memfun_ref)
- template<typename _Fn , typename _Tp , typename... _Args>
  constexpr bool **__call_is_nt** (__invoke_memfun_deref)
- template<typename _Fn , typename _Tp >
  constexpr bool **__call_is_nt** (__invoke_memobj_ref)
- template<typename _Fn , typename _Tp >
  constexpr bool **__call_is_nt** (__invoke_memobj_deref)
- template<typename _Fn , typename... _Args>
  constexpr bool **__call_is_nt** (__invoke_other)
- template<typename _Facet >
  const _Facet & **__check_facet** (const _Facet *__f)
- template<typename _RandomAccessIterator , typename _Distance , typename _Compare >
  constexpr void **__chunk_insertion_sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Distance __chunk_size, _Compare __comp)
- constexpr memory_order **__cmpexch_failure_order** (memory_order __m) noexcept
- constexpr memory_order **__cmpexch_failure_order2** (memory_order __m) noexcept
- template<typename _Tp >
  _Tp **__complex_abs** (const complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **__complex_acos** (const std::complex< _Tp > &__z)

- template<typename _Tp >
  std::complex< _Tp > **__complex_acosh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  _Tp **__complex_arg** (const complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **__complex_asin** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **__complex_asinh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **__complex_atan** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **__complex_atanh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_cos** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_cosh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_exp** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_log** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_pow** (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  complex< _Tp > **__complex_pow_unsigned** (complex< _Tp > __x, unsigned __n)
- template<typename _Tp >
  std::complex< _Tp > **__complex_proj** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_sin** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_sinh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_sqrt** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_tan** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **__complex_tanh** (const complex< _Tp > &__z)
- int **__convert_from_v** (const __c_locale &, char *__out, const int __size, const char *__fmt,...)
- template<typename _Tp >
  void **__convert_to_v** (const char *, _Tp &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **__convert_to_v** (const char *, float &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **__convert_to_v** (const char *, double &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **__convert_to_v** (const char *, long double &, ios_base::iostate &, const __c_locale &) throw ()
- template<bool _IsMove, typename _II , typename _OI >
  constexpr _OI **__copy_move_a** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _OI >
  _OI **__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _OI)
- template<bool _IsMove, typename _II , typename _Ite , typename _Seq , typename _Cat >
  __gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **__copy_move_a** (_II, _II, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)

- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat > ::__gnu_debug::_Safe_iterator < _OIte, _OSeq, _OCat > **__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)
- template<bool _IsMove, typename _II , typename _OI > constexpr _OI **__copy_move_a1** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI > _OI **__copy_move_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp > ::_Deque_iterator< _OTp, _OTp &, _OTp * > **__copy_move_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp > __gnu_cxx::__enable_if < __is_random_access_iter< _II > ::__value,::_Deque_iterator < _Tp, _Tp &, _Tp * > >::__type **__copy_move_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT > >::__type **__copy_move_a2** (_CharT *__first, _CharT *__last, ostreambuf_iterator< _CharT > __result)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT > >::__type **__copy_move_a2** (const _CharT *__first, const _CharT *__last, ostreambuf_iterator< _CharT > __result)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, _CharT * >::__type **__copy_move_a2** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, _CharT *__result)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT, char_traits< _CharT > > >::__type **__copy_move_a2** (_CharT *, _CharT *, ostreambuf_iterator< _CharT, char_traits< _CharT > >)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT, char_traits< _CharT > > >::__type **__copy_move_a2** (const _CharT *, const _CharT *, ostreambuf_iterator< _CharT, char_traits< _CharT > >)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, _CharT * >::__type **__copy_move_a2** (istreambuf_iterator< _CharT, char_traits< _CharT > >, istreambuf_iterator< _CharT, char_traits< _CharT > >, _CharT *)

- template<bool _IsMove, typename _II , typename _OI >
constexpr _OI **__copy_move_a2** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _II , typename _OI >
constexpr _OI **__copy_move_backward_a** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _OI >
_OI **__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _OI)
- template<bool _IsMove, typename _II , typename _Ite , typename _Seq , typename _Cat >
__gnu_debug::_Safe_iterator
< _Ite, _Seq, _Cat > **__copy_move_backward_a** (_II, _II, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)
- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat >
::__gnu_debug::_Safe_iterator
< _OIte, _OSeq, _OCat > **__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)
- template<bool _IsMove, typename _BI1 , typename _BI2 >
constexpr _BI2 **__copy_move_backward_a1** (_BI1 __first, _BI1 __last, _BI2 __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
_OI **__copy_move_backward_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp >
::_Deque_iterator< _OTp, _OTp
&, _OTp * > **__copy_move_backward_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp >
__gnu_cxx::__enable_if
< __is_random_access_iter< _II >
::__value,::_Deque_iterator
< _Tp, _Tp &, _Tp * >
>::__type **__copy_move_backward_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _BI1 , typename _BI2 >
constexpr _BI2 **__copy_move_backward_a2** (_BI1 __first, _BI1 __last, _BI2 __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
_OI **__copy_move_backward_dit** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
_OI **__copy_move_dit** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
constexpr _OutputIterator **__copy_n** (_InputIterator __first, _Size __n, _OutputIterator __result, input_iterator_tag)
- template<typename _RandomAccessIterator , typename _Size , typename _OutputIterator >
constexpr _OutputIterator **__copy_n** (_RandomAccessIterator __first, _Size __n, _OutputIterator __result, random_access_iterator_tag)
- template<typename _CharT , typename _Size >
__enable_if_t< __is_char
< _CharT >::__value, _CharT * > **__copy_n_a** (istreambuf_iterator< _CharT > __it, _Size __n, _CharT *__result)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
constexpr _OutputIterator **__copy_n_a** (_InputIterator __first, _Size __n, _OutputIterator __result)

- template<typename _CharT , typename _Size >
  __enable_if_t< __is_char
  < _CharT >::__value, _CharT * > **__copy_n_a** (istreambuf_iterator< _CharT, char_traits< _CharT >>, _Size, _CharT *)
- template<typename _CharT , typename _Traits >
  streamsize **__copy_streambufs** (basic_streambuf< _CharT, _Traits > *__sbin, basic_streambuf< _CharT, _Traits > *__sbout)
- template<typename _CharT , typename _Traits >
  streamsize **__copy_streambufs_eof** (basic_streambuf< _CharT, _Traits > *, basic_streambuf< _CharT, _Traits > *, bool &)
- template<>
  streamsize **__copy_streambufs_eof** (basic_streambuf< char > *__sbin, basic_streambuf< char > *__sbout, bool &__ineof)
- template<>
  streamsize **__copy_streambufs_eof** (basic_streambuf< wchar_t > *__sbin, basic_streambuf< wchar_t > *_-_sbout, bool &__ineof)
- template<typename _InputIterator , typename _Predicate >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type **__count_if** (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _Signature , typename _Fn , typename _Alloc = std::allocator<int>>
  static shared_ptr
  < __future_base::_Task_state_base
  < _Signature > > **__create_task_state** (_Fn &&__fn, const _Alloc &__a=_Alloc())
- constexpr size_t **__deque_buf_size** (size_t __size)
- template<typename _InputIterator >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type **__distance** (_InputIterator __first, _InputIterator __last, input_iterator_tag)
- template<typename _RandomAccessIterator >
  constexpr iterator_traits
  < _RandomAccessIterator >
  ::difference_type **__distance** (_RandomAccessIterator __first, _RandomAccessIterator __last, random_access-_iterator_tag)
- template<typename _Alloc >
  void **__do_alloc_on_copy** (_Alloc &__one, const _Alloc &__two, true_type)
- template<typename _Alloc >
  void **__do_alloc_on_copy** (_Alloc &, const _Alloc &, false_type)
- template<typename _Alloc >
  void **__do_alloc_on_move** (_Alloc &__one, _Alloc &__two, true_type)
- template<typename _Alloc >
  void **__do_alloc_on_move** (_Alloc &, _Alloc &, false_type)
- template<typename _Alloc >
  void **__do_alloc_on_swap** (_Alloc &__one, _Alloc &__two, true_type)
- template<typename _Alloc >
  void **__do_alloc_on_swap** (_Alloc &, _Alloc &, false_type)
- template<typename _OutStr , typename _InChar , typename _Codecvt , typename _State , typename _Fn >
  bool **__do_str_codecvt** (const _InChar *__first, const _InChar *__last, _OutStr &__outstr, const _Codecvt &__-cvt, _State &__state, size_t &__count, _Fn __fn)
- template<typename _II1 , typename _II2 >
  constexpr bool **__equal4** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _BinaryPredicate >
  constexpr bool **__equal4** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _BinaryPredicate __binary_pred)

- template<typename _II1 , typename _II2 >
  constexpr bool **__equal_aux** (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 >
  bool **__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, _II2)
- template<typename _II1 , typename _II2 , typename _Seq2 , typename _Cat2 >
  bool **__equal_aux** (_II1, _II1, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 , typename _Seq2 , typename _Cat2 >
  bool **__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)
- template<typename _II1 , typename _II2 >
  constexpr bool **__equal_aux1** (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _Tp , typename _Ref , typename _Ptr , typename _II >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value, bool >::__type **__equal_aux1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first1,::_Deque_iterator< _Tp, _Ref, _Ptr > __last1, _II __first2)
- template<typename _Tp1 , typename _Ref1 , typename _Ptr1 , typename _Tp2 , typename _Ref2 , typename _Ptr2 >
  bool **__equal_aux1** (::_Deque_iterator< _Tp1, _Ref1, _Ptr1 > __first1,::_Deque_iterator< _Tp1, _Ref1, _Ptr1 > __last1,::_Deque_iterator< _Tp2, _Ref2, _Ptr2 > __first2)
- template<typename _II , typename _Tp , typename _Ref , typename _Ptr >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value, bool >::__type **__equal_aux1** (_II __first1, _II __last1,::_Deque_iterator< _Tp, _Ref, _Ptr > __first2)
- template<typename _Tp , typename _Ref , typename _Ptr , typename _II >
  bool **__equal_dit** (const ::_Deque_iterator< _Tp, _Ref, _Ptr > &__first1, const ::_Deque_iterator< _Tp, _Ref, _Ptr > &__last1, _II __first2)
- template<typename _ForwardIterator , typename _Tp , typename _CompareItTp , typename _CompareTpIt >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > **__equal_range** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _CompareItTp __comp_it_val, _CompareTpIt __comp_val_it)
- template<typename _Tp , typename _Up = _Tp>
  constexpr _Tp **__exchange** (_Tp &__obj, _Up &&__new_val)
- template<typename _FIte , typename _Tp >
  constexpr void **__fill_a** (_FIte __first, _FIte __last, const _Tp &__value)
- template<typename _Ite , typename _Seq , typename _Cat , typename _Tp >
  void **__fill_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const _Tp &)
- template<typename _ForwardIterator , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  <!__is_scalar< _Tp >::__value,
  void >::__type **__fill_a1** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _ForwardIterator , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_scalar< _Tp >::__value,
  void >::__type **__fill_a1** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_byte< _Tp >::__value,
  void >::__type **__fill_a1** (_Tp *__first, _Tp *__last, const _Tp &__c)

- template<typename _Ite , typename _Cont , typename _Tp >
  constexpr void **__fill_a1** (::__gnu_cxx::__normal_iterator< _Ite, _Cont > __first,::__gnu_cxx::__normal_iterator< _Ite, _Cont > __last, const _Tp &__value)
- template<typename _Tp , typename _VTp >
  void **__fill_a1** (const ::_Deque_iterator< _Tp, _Tp &, _Tp * > &__first, const ::_Deque_iterator< _Tp, _Tp &, _Tp * > &__last, const _VTp &__value)
- void **__fill_bvector** (_Bit_type *__v, unsigned int __first, unsigned int __last, bool __x)
- template<typename _Ite , typename _Seq , typename _Cat , typename _Size , typename _Tp >
  ::__gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **__fill_n_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &__first, _Size __n, const _Tp &__value, std::input_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::output_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::input_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::random_access_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  <!__is_scalar< _Tp >::__value,
  _OutputIterator >::__type **__fill_n_a1** (_OutputIterator __first, _Size __n, const _Tp &__value)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_scalar< _Tp >::__value,
  _OutputIterator >::__type **__fill_n_a1** (_OutputIterator __first, _Size __n, const _Tp &__value)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void __final_insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 **__find_end** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, forward_iterator_tag, forward_iterator_tag, _BinaryPredicate __comp)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _BinaryPredicate >
  constexpr _BidirectionalIterator1 **__find_end** (_BidirectionalIterator1 __first1, _BidirectionalIterator1 __last1, _BidirectionalIterator2 __first2, _BidirectionalIterator2 __last2, bidirectional_iterator_tag, bidirectional_iterator_tag, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator __find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred, input_iterator_tag)
- template<typename _RandomAccessIterator , typename _Predicate >
  constexpr _RandomAccessIterator __find_if (_RandomAccessIterator __first, _RandomAccessIterator __last, _Predicate __pred, random_access_iterator_tag)
- template<typename _Iterator , typename _Predicate >
  constexpr _Iterator **__find_if** (_Iterator __first, _Iterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator __find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate , typename _Distance >
  constexpr _InputIterator __find_if_not_n (_InputIterator __first, _Distance &__len, _Predicate __pred)

- template<typename _EuclideanRingElement >
  constexpr _EuclideanRingElement __gcd (_EuclideanRingElement __m, _EuclideanRingElement __n)
- template<typename _IntType , typename _UniformRandomBitGenerator >
  pair< _IntType, _IntType > __gen_two_uniform_ints (_IntType __b0, _IntType __b1, _UniformRandomBitGenerator &&__g)
- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr _Head & **__get_helper** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr const _Head & **__get_helper** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr _Head & **__get_helper2** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr const _Head & **__get_helper2** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void __heap_select (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _Tp >
  size_t **__iconv_adaptor** (size_t(*__func)(iconv_t, _Tp, size_t *, char **, size_t *), iconv_t __cd, char **__inbuf, size_t *__inbytes, char **__outbuf, size_t *__outbytes)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare >
  constexpr bool **__includes** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Compare >
  void **__inplace_merge** (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  void __inplace_stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void __insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _CharT , typename _ValueT >
  int **__int_to_char** (_CharT *__bufend, _ValueT __v, const _CharT *__lit, ios_base::fmtflags __flags, bool __dec)
- template<typename _RandomAccessIterator , typename _Size , typename _Compare >
  constexpr void **__introselect** (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last, _Size __depth_limit, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Size , typename _Compare >
  constexpr void __introsort_loop (_RandomAccessIterator __first, _RandomAccessIterator __last, _Size __depth_limit, _Compare __comp)
- template<typename _Tp , typename _Up = typename __inv_unwrap<_Tp>::type>
  constexpr _Up && **__invfwd** (typename remove_reference< _Tp >::type &__t) noexcept
- template<typename _Callable , typename... _Args>
  constexpr __invoke_result
  < _Callable, _Args...>::type __invoke (_Callable &&__fn, _Args &&...__args) noexcept(__is_nothrow_invocable< _Callable, _Args...>::value)
- template<typename _Res , typename _Fn , typename... _Args>
  constexpr _Res **__invoke_impl** (__invoke_other, _Fn &&__f, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **__invoke_impl** (__invoke_memfun_ref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **__invoke_impl** (__invoke_memfun_deref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)
- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **__invoke_impl** (__invoke_memobj_ref, _MemPtr &&__f, _Tp &&__t)

- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **__invoke_impl** (__invoke_memobj_deref, _MemPtr &&__f, _Tp &&__t)
- template<typename _Res , typename _Callable , typename... _Args>
  constexpr
  __can_invoke_as_nonvoid< _Res,
  _Callable, _Args...> **__invoke_r** (_Callable &&__fn, _Args &&...__args)
- template<typename _Res , typename _Callable , typename... _Args>
  constexpr __can_invoke_as_void
  < _Res, _Callable, _Args...> **__invoke_r** (_Callable &&__fn, _Args &&...__args)
- template<typename _Tp , size_t = sizeof(_Tp)>
  constexpr true_type **__is_complete_or_unbounded** (__type_identity< _Tp >)
- template<typename _TypeIdentity , typename _NestedType = typename _TypeIdentity::type>
  constexpr __or_< is_reference
  < _NestedType >, is_function
  < _NestedType >, is_void
  < _NestedType >
  , __is_array_unknown_bounds
  < _NestedType > >::type **__is_complete_or_unbounded** (_TypeIdentity)
- template<typename _Ch , typename _Up >
  basic_istream< _Ch, _Up > & **__is_convertible_to_basic_istream_test** (basic_istream< _Ch, _Up > *)
- template<typename _Ch , typename _Up >
  basic_ostream< _Ch, _Up > & **__is_convertible_to_basic_ostream_test** (basic_ostream< _Ch, _Up > *)
- template<typename _RandomAccessIterator , typename _Distance >
  constexpr bool **__is_heap** (_RandomAccessIterator __first, _Distance __n)
- template<typename _RandomAccessIterator , typename _Compare , typename _Distance >
  constexpr bool **__is_heap** (_RandomAccessIterator __first, _Compare __comp, _Distance __n)
- template<typename _RandomAccessIterator >
  constexpr bool **__is_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr bool **__is_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Distance , typename _Compare >
  constexpr _Distance **__is_heap_until** (_RandomAccessIterator __first, _Distance __n, _Compare &__comp)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool **__is_permutation** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _BinaryPredicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool **__is_permutation** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __pred)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **__is_sorted_until** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Iter >
  constexpr iterator_traits
  < _Iter >::iterator_category __iterator_category (const _Iter &)
- template<typename _II1 , typename _II2 >
  constexpr bool **__lexicographical_compare_aux** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _Compare >
  constexpr bool **__lexicographical_compare_impl** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _Compare __comp)
- constexpr int __lg (int __n)
- constexpr unsigned **__lg** (unsigned __n)
- constexpr long **__lg** (long __n)
- constexpr unsigned long **__lg** (unsigned long __n)

- constexpr long long **__lg** (long long __n)
- constexpr unsigned long long **__lg** (unsigned long long __n)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator **__lower_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **__make_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare &__comp)
- template<typename _Iterator , typename _ReturnType = typename conditional<__move_if_noexcept_cond <typename iterator_traits<_Iterator>::value_type>::value, _Iterator, move_iterator<_Iterator>>::type>
  constexpr _ReturnType **__make_move_if_noexcept_iterator** (_Iterator __i)
- template<typename _Tp , typename _ReturnType = typename conditional<__move_if_noexcept_cond<_Tp>::value, const _Tp*, move_iterator<_Tp*>>::type>
  constexpr _ReturnType **__make_move_if_noexcept_iterator** (_Tp *__i)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > **__make_reverse_iterator** (_Iterator __i)
- template<typename _Tp , _Lock_policy _Lp = __default_lock_policy, typename... _Args>
  __shared_ptr< _Tp, _Lp > **__make_shared** (_Args &&...__args)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **__max_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Tp , typename _Up >
  constexpr int **__memcmp** (const _Tp *__first1, const _Up *__first2, size_t __num)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator **__merge** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Distance , typename _Pointer , typename _Compare >
  void __merge_adaptive (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Distance __len1, _Distance __len2, _Pointer __buffer, _Distance __buffer_size, _Compare __comp)
- template<typename _RandomAccessIterator1 , typename _RandomAccessIterator2 , typename _Distance , typename _Compare >
  void **__merge_sort_loop** (_RandomAccessIterator1 __first, _RandomAccessIterator1 __last, _RandomAccessIterator2 __result, _Distance __step_size, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Pointer , typename _Compare >
  void **__merge_sort_with_buffer** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Pointer __buffer, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Distance , typename _Compare >
  void __merge_without_buffer (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Distance __len1, _Distance __len2, _Compare __comp)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **__min_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > **__minmax_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > **__mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _BinaryPredicate __binary_pred)

- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > **__mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred)
- template<typename _Iterator >
  constexpr _Iterator **__miter_base** (_Iterator __it)
- template<typename _Iterator >
  constexpr auto **__miter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__miter_base(__it.base())))
- template<typename _Iterator >
  auto **__miter_base** (move_iterator< _Iterator > __it) -> decltype(__miter_base(__it.base()))
- template<typename _Iterator , typename _Compare >
  constexpr void __move_median_to_first (_Iterator __result, _Iterator __a, _Iterator __b, _Iterator __c, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator , typename _Compare >
  _OutputIterator __move_merge (_InputIterator __first1, _InputIterator __last1, _InputIterator __first2, _InputIterator __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  void __move_merge_adaptive (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _BidirectionalIterator3 , typename _Compare >
  void __move_merge_adaptive_backward (_BidirectionalIterator1 __first1, _BidirectionalIterator1 __last1, _BidirectionalIterator2 __first2, _BidirectionalIterator2 __last2, _BidirectionalIterator3 __result, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool **__next_permutation** (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _Iterator >
  constexpr _Iterator **__niter_base** (_Iterator __it) noexcept(/*conditional */)
- template<typename _Iterator >
  constexpr auto **__niter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__niter_base(__it.base())))
- template<typename _Iterator , typename _Container >
  constexpr _Iterator **__niter_base** (__gnu_cxx::__normal_iterator< _Iterator, _Container > __it) noexcept(/*conditional */)
- template<typename _Iterator >
  auto **__niter_base** (move_iterator< _Iterator > __it) -> decltype(make_move_iterator(__niter_base(__it.base())))
- template<typename _From , typename _To >
  constexpr _From **__niter_wrap** (_From __from, _To __res)
- template<typename _Iterator >
  constexpr _Iterator **__niter_wrap** (const _Iterator &, _Iterator __res)
- template<typename _CharT , typename _Traits >
  void **__ostream_fill** (basic_ostream< _CharT, _Traits > &__out, streamsize __n)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **__ostream_insert** (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s, streamsize __n)
- template<typename _CharT , typename _Traits >
  void **__ostream_write** (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s, streamsize __n)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **__partial_sort** (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)

- template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator **__partial_sort_copy** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last, _Compare __comp)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator __partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, forward_iterator_tag)
- template<typename _BidirectionalIterator , typename _Predicate >
  constexpr _BidirectionalIterator __partition (_BidirectionalIterator __first, _BidirectionalIterator __last, _Predicate __pred, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **__pop_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomAccessIterator __result, _Compare &__comp)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool **__prev_permutation** (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Distance , typename _Tp , typename _Compare >
  constexpr void **__push_heap** (_RandomAccessIterator __first, _Distance __holeIndex, _Distance __topIndex, _Tp __value, _Compare &__comp)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator **__remove_copy_if** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator **__remove_if** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp >
  constexpr _OutputIterator **__replace_copy_if** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred, const _Tp &__new_value)
- template<typename _BidirectionalIterator >
  constexpr void __reverse (_BidirectionalIterator __first, _BidirectionalIterator __last, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator >
  constexpr void __reverse (_RandomAccessIterator __first, _RandomAccessIterator __last, random_access_iterator_tag)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _Distance >
  _BidirectionalIterator1 __rotate_adaptive (_BidirectionalIterator1 __first, _BidirectionalIterator1 __middle, _BidirectionalIterator1 __last, _Distance __len1, _Distance __len2, _BidirectionalIterator2 __buffer, _Distance __buffer_size)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Size , typename _UniformRandomBitGenerator >
  _RandomAccessIterator __sample (_InputIterator __first, _InputIterator __last, input_iterator_tag, _RandomAccessIterator __out, random_access_iterator_tag, _Size __n, _UniformRandomBitGenerator &&__g)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Cat , typename _Size , typename _UniformRandomBitGenerator >
  _OutputIterator __sample (_ForwardIterator __first, _ForwardIterator __last, forward_iterator_tag, _OutputIterator __out, _Cat, _Size __n, _UniformRandomBitGenerator &&__g)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 **__search** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __predicate)
- template<typename _ForwardIterator , typename _Integer , typename _UnaryPredicate >
  constexpr _ForwardIterator **__search_n** (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, _UnaryPredicate __unary_pred)
- template<typename _ForwardIterator , typename _Integer , typename _UnaryPredicate >
  constexpr _ForwardIterator __search_n_aux (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, _UnaryPredicate __unary_pred, std::forward_iterator_tag)
- template<typename _RandomAccessIter , typename _Integer , typename _UnaryPredicate >
  constexpr _RandomAccessIter __search_n_aux (_RandomAccessIter __first, _RandomAccessIter __last, _Integer __count, _UnaryPredicate __unary_pred, std::random_access_iterator_tag)

- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
constexpr _OutputIterator **__set_difference** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
constexpr _OutputIterator **__set_intersection** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
constexpr _OutputIterator **__set_symmetric_difference** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
constexpr _OutputIterator **__set_union** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- constexpr int **__size_to_integer** (int __n)
- constexpr unsigned **__size_to_integer** (unsigned __n)
- constexpr long **__size_to_integer** (long __n)
- constexpr unsigned long **__size_to_integer** (unsigned long __n)
- constexpr long long **__size_to_integer** (long long __n)
- constexpr unsigned long long **__size_to_integer** (unsigned long long __n)
- constexpr long long **__size_to_integer** (float __n)
- constexpr long long **__size_to_integer** (double __n)
- constexpr long long **__size_to_integer** (long double __n)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void **__sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void **__sort_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare &__comp)
- template<typename _ForwardIterator , typename _Predicate >
_ForwardIterator **__stable_partition** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Pointer , typename _Predicate , typename _Distance >
_ForwardIterator __stable_partition_adaptive (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, _Distance __len, _Pointer __buffer, _Distance __buffer_size)
- template<typename _RandomAccessIterator , typename _Compare >
void **__stable_sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Pointer , typename _Distance , typename _Compare >
void **__stable_sort_adaptive** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Pointer __buffer, _Distance __buffer_size, _Compare __comp)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
bool **__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
bool **__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
bool **__str_codecvt_in_all** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &_outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
bool **__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
bool **__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)

- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **__str_codecvt_out_all** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- void **__throw_bad_alloc** (void)
- void **__throw_bad_cast** (void)
- void **__throw_bad_exception** (void)
- void **__throw_bad_function_call** ()
- void **__throw_bad_typeid** (void)
- void **__throw_bad_weak_ptr** ()
- void **__throw_domain_error** (const char *)
- void **__throw_future_error** (int)
- void **__throw_invalid_argument** (const char *)
- void **__throw_ios_failure** (const char *)
- void **__throw_ios_failure** (const char *, int)
- void **__throw_length_error** (const char *)
- void **__throw_logic_error** (const char *)
- void **__throw_out_of_range** (const char *)
- void **__throw_out_of_range_fmt** (const char *,...)
- void **__throw_overflow_error** (const char *)
- void **__throw_range_error** (const char *)
- void **__throw_regex_error** (regex_constants::error_type __ecode)
- void **__throw_regex_error** (regex_constants::error_type __ecode, const char *__what)
- void **__throw_runtime_error** (const char *)
- void **__throw_system_error** (int)
- void **__throw_underflow_error** (const char *)
- template<typename _Tp >
  constexpr _Tp * **__to_address** (_Tp *__ptr) noexcept
- template<typename _Ptr >
  constexpr std::pointer_traits
  < _Ptr >::element_type * **__to_address** (const _Ptr &__ptr)
- template<typename _Tp >
  __detail::__integer_to_chars_result_type
  < _Tp > **__to_chars_i** (char *__first, char *__last, _Tp __value, int __base=10)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void __unguarded_insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void __unguarded_linear_insert (_RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator __unguarded_partition (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomAccessIterator __pivot, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator __unguarded_partition_pivot (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _Pointer , typename _ForwardIterator >
  void **__uninitialized_construct_buf** (_Pointer __first, _Pointer __last, _ForwardIterator __seed)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator **__unique** (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _ForwardIterator , typename _OutputIterator , typename _BinaryPredicate >
  constexpr _OutputIterator __unique_copy (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred, forward_iterator_tag, output_iterator_tag)

- template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate >
  constexpr _OutputIterator __unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred, input_iterator_tag, output_iterator_tag)
- template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator __unique_copy (_InputIterator __first, _InputIterator __last, _ForwardIterator __result, _BinaryPredicate __binary_pred, input_iterator_tag, forward_iterator_tag)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator **__upper_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _Tp , typename _Alloc , typename... _Args>
  constexpr __uses_alloc_t< _Tp, _Alloc, _Args...> **__use_alloc** (const _Alloc &__a)
- template<typename _Tp , typename _Alloc , typename... _Args>
  void **__use_alloc** (const _Alloc &&)=delete
- template<typename _Tp , typename _Alloc , typename... _Args>
  void **__uses_allocator_construct** (const _Alloc &__a, _Tp *__ptr, _Args &&...__args)
- template<typename _Tp , typename... _Args>
  void **__uses_allocator_construct_impl** (__uses_alloc0 __a, _Tp *__ptr, _Args &&...__args)
- template<typename _Tp , typename _Alloc , typename... _Args>
  void **__uses_allocator_construct_impl** (__uses_alloc1< _Alloc > __a, _Tp *__ptr, _Args &&...__args)
- template<typename _Tp , typename _Alloc , typename... _Args>
  void **__uses_allocator_construct_impl** (__uses_alloc2< _Alloc > __a, _Tp *__ptr, _Args &&...__args)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, _Array< bool > __m, size_t __n, _Array< _Tp > __b, _Array< bool > __k)
- template<typename _Tp , class _Dom >
  void **__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a)
- template<typename _Tp , class _Dom >
  void **__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, size_t __s)
- template<typename _Tp , class _Dom >
  void **__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, _Array< size_t > __i)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __e, _Array< size_t > __f, size_t __n, _Array< _Tp > __a, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, _Array< bool > __m)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, _Tp *__restrict__ __b)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, size_t __s, _Tp *__restrict__ __b)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __a, _Tp *__restrict__ __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __src, size_t __n, size_t __s1, _Tp *__restrict__ __dst, size_t __s2)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __a, const size_t *__restrict__ __i, _Tp *__restrict__ __b, size_t __n)

- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, _Tp *__restrict__ __b, const size_t *__restrict__ __i)
- template<typename _Tp >
  void **__valarray_copy** (const _Tp *__restrict__ __src, size_t __n, const size_t *__restrict__ __i, _Tp *__restrict__ __dst, const size_t *__restrict__ __j)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, size_t __n, size_t __s1, _Array< _Tp > __b, size_t __s2)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp >
  void **__valarray_copy** (_Array< _Tp > __src, size_t __n, _Array< size_t > __i, _Array< _Tp > __dst, _Array< size_t > __j)
- template<typename _Tp >
  void **__valarray_copy_construct** (const _Tp *__b, const _Tp *__e, _Tp *__restrict__ __o)
- template<typename _Tp >
  void **__valarray_copy_construct** (const _Tp *__restrict__ __a, size_t __n, size_t __s, _Tp *__restrict__ __o)
- template<typename _Tp >
  void **__valarray_copy_construct** (const _Tp *__restrict__ __a, const size_t *__restrict__ __i, _Tp *__restrict__ __o, size_t __n)
- template<typename _Tp , class _Dom >
  void **__valarray_copy_construct** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a)
- template<typename _Tp >
  void **__valarray_copy_construct** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **__valarray_copy_construct** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **__valarray_copy_construct** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **__valarray_default_construct** (_Tp *__b, _Tp *__e)
- template<typename _Tp >
  void **__valarray_destroy_elements** (_Tp *__b, _Tp *__e)
- template<typename _Tp >
  void **__valarray_fill** (_Array< _Tp > __a, size_t __n, _Array< bool > __m, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill** (_Tp *__restrict__ __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill** (_Tp *__restrict__ __a, size_t __n, size_t __s, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill** (_Tp *__restrict__ __a, const size_t *__restrict__ __i, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill** (_Array< _Tp > __a, size_t __n, size_t __s, const _Tp &__t)

- template<typename _Tp >
  void **__valarray_fill** (_Array< _Tp > __a, _Array< size_t > __i, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **__valarray_fill_construct** (_Tp *__b, _Tp *__e, const _Tp __t)
- template<typename _Tp >
  _Tp * **__valarray_get_storage** (size_t)
- template<typename _Ta >
  _Ta::value_type **__valarray_max** (const _Ta &__a)
- template<typename _Ta >
  _Ta::value_type **__valarray_min** (const _Ta &__a)
- void **__valarray_release_memory** (void *__p)
- template<typename _Tp >
  _Tp **__valarray_sum** (const _Tp *__f, const _Tp *__l)
- bool **__verify_grouping** (const char *__grouping, size_t __grouping_size, const string &__grouping_tmp) throw ()
- template<std::size_t _Ind, typename... _Tp>
  auto **__volget** (volatile tuple< _Tp...> &__tuple) -> __tuple_element_t< _Ind, tuple< _Tp...>> volatile &
- template<std::size_t _Ind, typename... _Tp>
  auto **__volget** (const volatile tuple< _Tp...> &__tuple) -> __tuple_element_t< _Ind, tuple< _Tp...>> const volatile &
- template<typename _CharT >
  ostreambuf_iterator< _CharT > **__write** (ostreambuf_iterator< _CharT > __s, const _CharT *__ws, int __len)
- template<typename _CharT , typename _OutIter >
  _OutIter **__write** (_OutIter __s, const _CharT *__ws, int __len)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)

- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)

- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp >
  void **_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___divides** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___divides** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___divides** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___divides** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___minus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)

- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___minus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___minus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___modulus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)

- template<typename _Tp , class _Dom >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___plus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___plus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___plus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)

- template<typename _Tp >
  void **_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)

- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , typename... _Args>
  void _Construct (_Tp *__p, _Args &&...__args)
- template<typename _T1 >
  void **_Construct_novalue** (_T1 *__p)
- template<typename _ForwardIterator >
  constexpr void _Destroy (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _Tp >
  constexpr void _Destroy (_Tp *__pointer)
- template<typename _ForwardIterator , typename _Allocator >
  void _Destroy (_ForwardIterator __first, _ForwardIterator __last, _Allocator &__alloc)
- template<typename _ForwardIterator , typename _Tp >
  void **_Destroy** (_ForwardIterator __first, _ForwardIterator __last, allocator< _Tp > &)
- template<typename _ForwardIterator , typename _Size >
  constexpr _ForwardIterator _Destroy_n (_ForwardIterator __first, _Size __count)
- size_t **_Fnv_hash_bytes** (const void *__ptr, size_t __len, size_t __seed)
- template<typename _Tp >
  std::__is_nullptr_t is_null_pointer **_GLIBCXX_DEPRECATED_SUGGEST** ("std::is_null_pointer")
- size_t **_Hash_bytes** (const void *__ptr, size_t __len, size_t __seed)
- unsigned int **_Rb_tree_black_count** (const _Rb_tree_node_base *__node, const _Rb_tree_node_base *__root) throw ()
- _Rb_tree_node_base * **_Rb_tree_decrement** (_Rb_tree_node_base *__x) throw ()
- const _Rb_tree_node_base * **_Rb_tree_decrement** (const _Rb_tree_node_base *__x) throw ()
- _Rb_tree_node_base * **_Rb_tree_increment** (_Rb_tree_node_base *__x) throw ()
- const _Rb_tree_node_base * **_Rb_tree_increment** (const _Rb_tree_node_base *__x) throw ()
- void **_Rb_tree_insert_and_rebalance** (const bool __insert_left, _Rb_tree_node_base *__x, _Rb_tree_node_base *__p, _Rb_tree_node_base &__header) throw ()
- _Rb_tree_node_base * **_Rb_tree_rebalance_for_erase** (_Rb_tree_node_base *const __z, _Rb_tree_node_base &__header) throw ()
- void **abort** (void) throw ()
- long **abs** (long __i)
- long long **abs** (long long __x)
- constexpr double **abs** (double __x)
- template<typename _Tp >
  _Tp abs (const complex< _Tp > &)
- constexpr float **abs** (float __x)
- constexpr long double **abs** (long double __x)
- template<class _Dom >
  _Expr< _UnClos< _Abs, _Expr, _Dom >, typename _Dom::value_type > **abs** (const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<typename _Tp >
  _Expr< _UnClos< _Abs,
  _ValArray, _Tp >, _Tp > **abs** (const valarray< _Tp > &__v)
- template<typename _InputIterator , typename _Tp >
  constexpr _Tp accumulate (_InputIterator __first, _InputIterator __last, _Tp __init)
- template<typename _InputIterator , typename _Tp , typename _BinaryOperation >
  constexpr _Tp accumulate (_InputIterator __first, _InputIterator __last, _Tp __init, _BinaryOperation __binary_op)
- constexpr float **acos** (float __x)
- constexpr long double **acos** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **acos** (_Tp __x)
- template<class _Dom >
  _Expr< _UnClos< _Acos, _Expr,
  _Dom >, typename
  _Dom::value_type > **acos** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Acos,
  _ValArray, _Tp >, _Tp > **acos** (const valarray< _Tp > &__v)
- template<typename _Tp >
  std::complex< _Tp > acos (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > acosh (const std::complex< _Tp > &__z)
- template<typename _Tp >
  constexpr _Tp * addressof (_Tp &__r) noexcept
- template<typename _Tp >
  const _Tp * **addressof** (const _Tp &&)=delete
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _FIter >
  constexpr _FIter **adjacent_find** (_FIter, _FIter)
- template<typename _FIter , typename _BinaryPredicate >
  constexpr _FIter **adjacent_find** (_FIter, _FIter, _BinaryPredicate)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator adjacent_find (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator adjacent_find (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _Distance >
  constexpr void advance (_InputIterator &__i, _Distance __n)
- template<typename _CharT , typename _Distance >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  void >::__type **advance** (istreambuf_iterator< _CharT > &__i, _Distance __n)
- void * align (size_t __align, size_t __size, void *&__ptr, size_t &__space) noexcept
- template<typename _IIter , typename _Predicate >
  constexpr bool **all_of** (_IIter, _IIter, _Predicate)

- template<typename _InputIterator , typename _Predicate >
  constexpr bool all_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _IIter , typename _Predicate >
  constexpr bool **any_of** (_IIter, _IIter, _Predicate)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool any_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _Tp >
  _Tp arg (const complex< _Tp > &)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type arg (_Tp __x)
- constexpr float **asin** (float __x)
- constexpr long double **asin** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **asin** (_Tp __x)
- template<class _Dom >
  _Expr< _UnClos< _Asin, _Expr,
  _Dom >, typename
  _Dom::value_type > **asin** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Asin,
  _ValArray, _Tp >, _Tp > **asin** (const valarray< _Tp > &__v)
- template<typename _Tp >
  std::complex< _Tp > asin (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > asinh (const std::complex< _Tp > &__z)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float assoc_laguerref (unsigned int __n, unsigned int __m, float __x)
- long double assoc_laguerrel (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float assoc_legendref (unsigned int __l, unsigned int __m, float __x)
- long double assoc_legendrel (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > async (launch __policy, _Fn &&__fn, _Args &&...__args)
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > async (_Fn &&__fn, _Args &&...__args)
- constexpr float **atan** (float __x)
- constexpr long double **atan** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **atan** (_Tp __x)
- template<class _Dom >
  _Expr< _UnClos< _Atan, _Expr,
  _Dom >, typename
  _Dom::value_type > **atan** (const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<typename _Tp >
  _Expr< _UnClos< _Atan,
  _ValArray, _Tp >, _Tp > **atan** (const valarray< _Tp > &__v)
- template<typename _Tp >
  std::complex< _Tp > atan (const std::complex< _Tp > &__z)
- constexpr float **atan2** (float __y, float __x)
- constexpr long double **atan2** (long double __y, long double __x)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **atan2** (_Tp __y, _Up __x)
- template<class _Dom >
  _Expr< _BinClos< _Atan2, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **atan2** (const _Expr< _Dom, typename _Dom::value_type > &__e, const typename _Dom-
  ::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _ValArray, _ValArray, _Tp, _Tp >
  , _Tp > **atan2** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< _Atan2, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename _Dom1::value_type > **atan2** (const _Expr< _Dom1, typename _Dom1::value_type > &__e1, const
  _Expr< _Dom2, typename _Dom2::value_type > &__e2)
- template<class _Dom >
  _Expr< _BinClos< _Atan2, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **atan2** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< _Atan2,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **atan2** (const valarray< typename _Dom::valarray > &__v, const _Expr< _Dom,
  typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _ValArray, _Constant, _Tp, _Tp >
  , _Tp > **atan2** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _Constant, _ValArray, _Tp, _Tp >
  , _Tp > **atan2** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _BinClos< _Atan2,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **atan2** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename
  _Dom::value_type > &__e)
- template<typename _Tp >
  std::complex< _Tp > atanh (const std::complex< _Tp > &__z)

- int **atexit** (void(*)(void)) throw ()
- template<typename _ITp >
  bool **atomic_compare_exchange_strong** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_strong** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_strong_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_strong_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_weak** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_weak** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_weak_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **atomic_compare_exchange_weak_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  _ITp **atomic_exchange** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_exchange** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_exchange_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_exchange_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_add** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_add** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_add_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_add_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_and** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_and** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_and_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept

- template<typename _ITp >
  _ITp **atomic_fetch_and_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_or** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_or** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_or_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_or_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_sub** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_sub** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_sub_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_sub_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_xor** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_xor** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_xor_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_fetch_xor_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- void **atomic_flag_clear** (atomic_flag *__a) noexcept
- void **atomic_flag_clear** (volatile atomic_flag *__a) noexcept
- void **atomic_flag_clear_explicit** (atomic_flag *__a, memory_order __m) noexcept
- void **atomic_flag_clear_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- bool **atomic_flag_test_and_set** (atomic_flag *__a) noexcept
- bool **atomic_flag_test_and_set** (volatile atomic_flag *__a) noexcept
- bool **atomic_flag_test_and_set_explicit** (atomic_flag *__a, memory_order __m) noexcept
- bool **atomic_flag_test_and_set_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- template<typename _ITp >
  void **atomic_init** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **atomic_init** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  bool **atomic_is_lock_free** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  bool **atomic_is_lock_free** (const volatile atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **atomic_load** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **atomic_load** (const volatile atomic< _ITp > *__a) noexcept

- template<typename _ITp >
  _ITp **atomic_load_explicit** (const atomic< _ITp > *__a, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **atomic_load_explicit** (const volatile atomic< _ITp > *__a, memory_order __m) noexcept
- void **atomic_signal_fence** (memory_order __m) noexcept
- template<typename _ITp >
  void **atomic_store** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **atomic_store** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **atomic_store_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  void **atomic_store_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- void **atomic_thread_fence** (memory_order __m) noexcept
- template<typename _Container >
  constexpr back_insert_iterator
  < _Container > back_inserter (_Container &__x)
- template<typename _Container >
  constexpr auto begin (_Container &__cont) -> decltype(__cont.begin())
- template<typename _Container >
  constexpr auto begin (const _Container &__cont) -> decltype(__cont.begin())
- template<typename _Tp , size_t _Nm>
  constexpr _Tp * begin (_Tp(&__arr)[_Nm])
- template<class _Tp >
  _Tp * begin (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * begin (const valarray< _Tp > &__va)
- template<typename _Tpa , typename _Tpb >
  __gnu_cxx::__promote_2< _Tpa,
  _Tpb >::__type beta (_Tpa __a, _Tpb __b)
- float betaf (float __a, float __b)
- long double betal (long double __a, long double __b)
- template<typename _FIter , typename _Tp >
  constexpr bool **binary_search** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr bool **binary_search** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _ForwardIterator , typename _Tp >
  constexpr bool binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr bool binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _Func , typename... _BoundArgs>
  constexpr _Bind_helper
  < __is_socketlike< _Func >
  ::value, _Func, _BoundArgs...>
  ::type bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Result , typename _Func , typename... _BoundArgs>
  constexpr _Bindres_helper
  < _Result, _Func,
  _BoundArgs...>::type bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Operation , typename _Tp >
  binder1st< _Operation > bind1st (const _Operation &__fn, const _Tp &__x)

- template<typename _Operation , typename _Tp >
  binder2nd< _Operation > bind2nd (const _Operation &__fn, const _Tp &__x)
- ios_base & boolalpha (ios_base &__base)
- template<typename _Callable , typename... _Args>
  void call_once (once_flag &__once, _Callable &&__f, _Args &&...__args)
- template<typename _Container >
  constexpr auto cbegin (const _Container &__cont) noexcept(noexcept(std::begin(__cont))) -> decltype(std::begin(__cont))
- constexpr float **ceil** (float __x)
- constexpr long double **ceil** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **ceil** (_Tp __x)
- template<typename _Container >
  constexpr auto cend (const _Container &__cont) noexcept(noexcept(std::end(__cont))) -> decltype(std::end(__cont))
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type comp_ellint_1 (_Tp __k)
- float comp_ellint_1f (float __k)
- long double comp_ellint_1l (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type comp_ellint_2 (_Tp __k)
- float comp_ellint_2f (float __k)
- long double comp_ellint_2l (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type comp_ellint_3 (_Tp __k, _Tpn __nu)
- float comp_ellint_3f (float __k, float __nu)
- long double comp_ellint_3l (long double __k, long double __nu)
- template<typename _Tp >
  constexpr complex< _Tp > conj (const complex< _Tp > &)
- template<typename _Tp >
  constexpr std::complex
  < typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **conj** (_Tp __x)
- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > const_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept
- template<typename _IIter , typename _OIter >
  constexpr _OIter **copy** (_IIter, _IIter, _OIter)
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  ostreambuf_iterator< _CharT >
  >::__type **copy** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, ostreambuf_iterator< _CharT > __result)
- template<typename _II , typename _OI >
  constexpr _OI copy (_II __first, _II __last, _OI __result)
- template<typename _BIter1 , typename _BIter2 >
  constexpr _BIter2 **copy_backward** (_BIter1, _BIter1, _BIter2)

- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 copy_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _IIter , typename _OIter , typename _Predicate >
  constexpr _OIter **copy_if** (_IIter, _IIter, _OIter, _Predicate)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _IIter , typename _Size , typename _OIter >
  constexpr _OIter **copy_n** (_IIter, _Size, _OIter)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator copy_n (_InputIterator __first, _Size __n, _OutputIterator __result)
- template<typename _Tp >
  complex< _Tp > cos (const complex< _Tp > &)
- constexpr float **cos** (float __x)
- constexpr long double **cos** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **cos** (_Tp __x)
- template<typename _Tp >
  _Expr< _UnClos< _Cos,
  _ValArray, _Tp >, _Tp > **cos** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Cos, _Expr,
  _Dom >, typename
  _Dom::value_type > **cos** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  complex< _Tp > cosh (const complex< _Tp > &)
- constexpr float **cosh** (float __x)
- constexpr long double **cosh** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **cosh** (_Tp __x)
- template<typename _Tp >
  _Expr< _UnClos< _Cosh,
  _ValArray, _Tp >, _Tp > **cosh** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Cosh, _Expr,
  _Dom >, typename
  _Dom::value_type > **cosh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _IIter , typename _Tp >
  constexpr iterator_traits
  < _IIter >::difference_type **count** (_IIter, _IIter, const _Tp &)
- template<typename _InputIterator , typename _Tp >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type count (_InputIterator __first, _InputIterator __last, const _Tp &__value)
- template<typename _IIter , typename _Predicate >
  constexpr iterator_traits
  < _IIter >::difference_type **count_if** (_IIter, _IIter, _Predicate)

- template<typename _InputIterator , typename _Predicate >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type count_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _Container >
  constexpr auto crbegin (const _Container &__cont) -> decltype(std::rbegin(__cont))
- template<typename _Container >
  constexpr auto crend (const _Container &__cont) -> decltype(std::rend(__cont))
- exception_ptr current_exception () noexcept
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float cyl_bessel_if (float __nu, float __x)
- long double cyl_bessel_il (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float cyl_bessel_jf (float __nu, float __x)
- long double cyl_bessel_jl (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float cyl_bessel_kf (float __nu, float __x)
- long double cyl_bessel_kl (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_neumann (_Tpnu __nu, _Tp __x)
- float cyl_neumannf (float __nu, float __x)
- long double cyl_neumannl (long double __nu, long double __x)
- ios_base & dec (ios_base &__base)
- void declare_no_pointers (char *, size_t)
- void declare_reachable (void *)
- template<typename _Tp >
  auto **declval** () noexcept-> decltype(__declval< _Tp >(0))
- ios_base & defaultfloat (ios_base &__base)
- template<typename _InputIterator >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type distance (_InputIterator __first, _InputIterator __last)
- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > dynamic_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type ellint_1 (_Tp __k, _Tpp __phi)
- float ellint_1f (float __k, float __phi)
- long double ellint_1l (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type ellint_2 (_Tp __k, _Tpp __phi)
- float ellint_2f (float __k, float __phi)
- long double ellint_2l (long double __k, long double __phi)

- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float ellint_3f (float __k, float __nu, float __phi)
- long double ellint_3l (long double __k, long double __nu, long double __phi)
- template<typename _Container >
  constexpr auto end (_Container &__cont) -> decltype(__cont.end())
- template<typename _Container >
  constexpr auto end (const _Container &__cont) -> decltype(__cont.end())
- template<typename _Tp , size_t _Nm>
  constexpr _Tp * end (_Tp(&__arr)[_Nm])
- template<class _Tp >
  _Tp * end (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * end (const valarray< _Tp > &__va)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & endl (basic_ostream< _CharT, _Traits > &__os)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & ends (basic_ostream< _CharT, _Traits > &__os)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **equal** (_IIter1, _IIter1, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _BinaryPredicate __binary_pred)
- template<typename _II1 , typename _II2 >
  constexpr bool equal (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _II1 , typename _II2 >
  constexpr bool equal (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _IIter2 __last2, _BinaryPredicate __binary-
  _pred)
- template<typename _FIter , typename _Tp >
  constexpr pair< _FIter, _FIter > **equal_range** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr pair< _FIter, _FIter > **equal_range** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _ForwardIterator , typename _Tp >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare
  __comp)
- template<typename _Tp , typename _Up = _Tp>
  constexpr _Tp exchange (_Tp &__obj, _Up &&__new_val)
- void **exit** (int) throw ()
- template<typename _Tp >
  complex< _Tp > exp (const complex< _Tp > &)
- constexpr float **exp** (float __x)
- constexpr long double **exp** (long double __x)

- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **exp** (_Tp __x)
- template<typename _Tp >
  _Expr< _UnClos< _Exp,
  _ValArray, _Tp >, _Tp > **exp** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Exp, _Expr,
  _Dom >, typename
  _Dom::value_type > **exp** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type expint (_Tp __x)
- float expintf (float __x)
- long double expintl (long double __x)
- constexpr float **fabs** (float __x)
- constexpr long double **fabs** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **fabs** (_Tp __x)
- template<typename _Tp >
  _Tp fabs (const std::complex< _Tp > &__z)
- template<typename _FIter , typename _Tp >
  constexpr void **fill** (_FIter, _FIter, const _Tp &)
- void **fill** (_Bit_iterator __first, _Bit_iterator __last, const bool &__x)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _OIter , typename _Size , typename _Tp >
  constexpr _OIter **fill_n** (_OIter, _Size, const _Tp &)
- template<typename _OI , typename _Size , typename _Tp >
  constexpr _OI fill_n (_OI __first, _Size __n, const _Tp &__value)
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  istreambuf_iterator< _CharT >
  >::__type **find** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, const _CharT &__val)
- template<typename _IIter , typename _Tp >
  constexpr _IIter **find** (_IIter, _IIter, const _Tp &)
- template<typename _InputIterator , typename _Tp >
  constexpr _InputIterator find (_InputIterator __first, _InputIterator __last, const _Tp &__val)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **find_end** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **find_end** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)

- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __comp)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **find_first_of** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **find_first_of** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _InputIterator , typename _ForwardIterator >
  constexpr _InputIterator find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2)
- template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _InputIterator find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2, _BinaryPredicate __comp)
- template<typename _IIter , typename _Predicate >
  constexpr _IIter **find_if** (_IIter, _IIter, _Predicate)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _IIter , typename _Predicate >
  constexpr _IIter **find_if_not** (_IIter, _IIter, _Predicate)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- ios_base & fixed (ios_base &__base)
- constexpr float **floor** (float __x)
- constexpr long double **floor** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **floor** (_Tp __x)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & flush (basic_ostream< _CharT, _Traits > &__os)
- constexpr float **fmod** (float __x, float __y)
- constexpr long double **fmod** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **fmod** (_Tp __x, _Up __y)
- template<typename _IIter , typename _Funct >
  constexpr _Funct **for_each** (_IIter, _IIter, _Funct)
- template<typename _InputIterator , typename _Function >
  constexpr _Function for_each (_InputIterator __first, _InputIterator __last, _Function __f)
- template<typename _Tp >
  constexpr _Tp && forward (typename std::remove_reference< _Tp >::type &__t) noexcept
- template<typename _Tp >
  constexpr _Tp && forward (typename std::remove_reference< _Tp >::type &&__t) noexcept
- template<typename... _Elements>
  constexpr tuple< _Elements &&...> forward_as_tuple (_Elements &&...__args) noexcept
- float **frexp** (float __x, int *__exp)
- long double **frexp** (long double __x, int *__exp)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **frexp** (_Tp __x, int *__exp)

- template<typename _Tp >
  __detail::__integer_from_chars_result_type
  < _Tp > from_chars (const char *__first, const char *__last, _Tp &__value, int __base=10)
- template<typename _Container >
  constexpr
  front_insert_iterator
  < _Container > front_inserter (_Container &__x)
- const error_category & future_category () noexcept
- template<typename _FIter , typename _Generator >
  constexpr void **generate** (_FIter, _FIter, _Generator)
- template<typename _ForwardIterator , typename _Generator >
  constexpr void generate (_ForwardIterator __first, _ForwardIterator __last, _Generator __gen)
- template<typename _RealType , size_t __bits, typename _UniformRandomNumberGenerator >
  _RealType generate_canonical (_UniformRandomNumberGenerator &__g)
- template<typename _OIter , typename _Size , typename _Generator >
  constexpr _OIter **generate_n** (_OIter, _Size, _Generator)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  constexpr _OutputIterator generate_n (_OutputIterator __first, _Size __n, _Generator __gen)
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr tuple_element< _Int,
  std::pair< _Tp1, _Tp2 >
  >::type & **get** (std::pair< _Tp1, _Tp2 > &__in) noexcept
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr tuple_element< _Int,
  std::pair< _Tp1, _Tp2 >
  >::type && **get** (std::pair< _Tp1, _Tp2 > &&__in) noexcept
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr const tuple_element
  < _Int, std::pair< _Tp1, _Tp2 >
  >::type & **get** (const std::pair< _Tp1, _Tp2 > &__in) noexcept
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr const tuple_element
  < _Int, std::pair< _Tp1, _Tp2 >
  >::type && **get** (const std::pair< _Tp1, _Tp2 > &&__in) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp & **get** (pair< _Tp, _Up > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp & **get** (const pair< _Tp, _Up > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp && **get** (pair< _Tp, _Up > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp && **get** (const pair< _Tp, _Up > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp & **get** (pair< _Up, _Tp > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp & **get** (const pair< _Up, _Tp > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp && **get** (pair< _Up, _Tp > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp && **get** (const pair< _Up, _Tp > &&__p) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp & **get** (array< _Tp, _Nm > &__arr) noexcept

- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp && **get** (array< _Tp, _Nm > &&__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp & **get** (const array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp && **get** (const array< _Tp, _Nm > &&__arr) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > & get (tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > & get (const tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > && get (tuple< _Elements...> &&__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > && get (const tuple< _Elements...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp & get (tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp && get (tuple< _Types...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp & get (const tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp && get (const tuple< _Types...> &&__t) noexcept
- template<typename _Del , typename _Tp , _Lock_policy _Lp>
  _Del * **get_deleter** (const __shared_ptr< _Tp, _Lp > &__p) noexcept
- template<typename _MoneyT >
  _Get_money< _MoneyT > get_money (_MoneyT &__mon, bool __intl=false)
- new_handler get_new_handler () noexcept
- pointer_safety get_pointer_safety () noexcept
- template<typename _Tp >
  pair< _Tp *, ptrdiff_t > get_temporary_buffer (ptrdiff_t __len) noexcept
- terminate_handler get_terminate () noexcept
- template<typename _CharT >
  _Get_time< _CharT > get_time (std::tm *__tmb, const _CharT *__fmt)
- unexpected_handler get_unexpected () noexcept
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa_-
  string< _CharT, _Traits, _Alloc, _Base > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa_-
  string< _CharT, _Traits, _Alloc, _Base > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT,
  _Traits, _Alloc > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT,
  _Traits, _Alloc > &__str)

- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &&__is, basic_string< _CharT, _Traits, _Alloc > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & getline (basic_istream< _CharT, _Traits > &&__is, basic_string< _CharT, _Traits, _Alloc > &__str)
- template<>
  basic_istream< char > & **getline** (basic_istream< char > &__in, basic_string< char > &__str, char __delim)
- template<>
  basic_istream< wchar_t > & **getline** (basic_istream< wchar_t > &__in, basic_string< wchar_t > &__str, wchar_t __delim)
- template<typename _Facet >
  bool has_facet (const locale &__loc) throw ()
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type hermite (unsigned int __n, _Tp __x)
- float hermitef (unsigned int __n, float __x)
- long double hermitel (unsigned int __n, long double __x)
- ios_base & hex (ios_base &__base)
- ios_base & hexfloat (ios_base &__base)
- template<typename _Tp >
  constexpr _Tp **imag** (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote
  < _Tp >::__type **imag** (_Tp)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **includes** (_IIter1, _IIter1, _IIter2, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _Compare >
  constexpr bool **includes** (_IIter1, _IIter1, _IIter2, _IIter2, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr bool includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare >
  constexpr bool includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp >
  constexpr _Tp inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp , typename _BinaryOperation1 , typename _BinaryOperation2 >
  constexpr _Tp inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init, _BinaryOperation1 __binary_op1, _BinaryOperation2 __binary_op2)
- template<typename _BIter >
  void **inplace_merge** (_BIter, _BIter, _BIter)
- template<typename _BIter , typename _Compare >
  void **inplace_merge** (_BIter, _BIter, _BIter, _Compare)
- template<typename _BidirectionalIterator >
  void inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  void inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Compare __comp)
- template<typename _Container , typename _Iterator >
  insert_iterator< _Container > inserter (_Container &__x, _Iterator __i)
- ios_base & internal (ios_base &__base)

- const error_category & **iostream_category** () noexcept
- template<typename _ForwardIterator , typename _Tp >
  constexpr void iota (_ForwardIterator __first, _ForwardIterator __last, _Tp __value)
- template<typename _RAIter >
  constexpr bool **is_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr bool **is_heap** (_RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
  constexpr bool is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr bool is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RAIter >
  constexpr _RAIter **is_heap_until** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr _RAIter **is_heap_until** (_RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
  constexpr _RandomAccessIterator is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __-last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __-last, _Compare __comp)
- template<typename _IIter , typename _Predicate >
  constexpr bool **is_partitioned** (_IIter, _IIter, _Predicate)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool is_partitioned (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _FIter1 , typename _FIter2 >
  constexpr bool **is_permutation** (_FIter1, _FIter1, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr bool **is_permutation** (_FIter1, _FIter1, _FIter2, _BinaryPredicate)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _BinaryPredicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __pred)
- template<typename _FIter >
  constexpr bool **is_sorted** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr bool **is_sorted** (_FIter, _FIter, _Compare)
- template<typename _ForwardIterator >
  constexpr bool is_sorted (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr bool is_sorted (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _FIter >
  constexpr _FIter **is_sorted_until** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **is_sorted_until** (_FIter, _FIter, _Compare)

- template<typename _ForwardIterator >
  constexpr _ForwardIterator is_sorted_until (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator is_sorted_until (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _CharT >
  bool isalnum (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isalpha (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isblank (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool iscntrl (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isdigit (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isgraph (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool islower (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isprint (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool ispunct (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isspace (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isupper (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool isxdigit (_CharT __c, const locale &__loc)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr void iter_swap (_ForwardIterator1 __a, _ForwardIterator2 __b)
- template<typename _FIter1 , typename _FIter2 >
  constexpr void **iter_swap** (_FIter1, _FIter2)
- template<typename _Tp >
  _Tp kill_dependency (_Tp __y) noexcept
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type laguerre (unsigned int __n, _Tp __x)
- float laguerref (unsigned int __n, float __x)
- long double laguerrel (unsigned int __n, long double __x)
- constexpr float **ldexp** (float __x, int __exp)
- constexpr long double **ldexp** (long double __x, int __exp)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **ldexp** (_Tp __x, int __exp)
- ios_base & left (ios_base &__base)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type legendre (unsigned int __l, _Tp __x)
- float legendref (unsigned int __l, float __x)
- long double legendrel (unsigned int __l, long double __x)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **lexicographical_compare** (_IIter1, _IIter1, _IIter2, _IIter2)

- template<typename _IIter1 , typename _IIter2 , typename _Compare >
  constexpr bool **lexicographical_compare** (_IIter1, _IIter1, _IIter2, _IIter2, _Compare)
- template<typename _II1 , typename _II2 >
  constexpr bool lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _Compare >
  constexpr bool lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _Compare __comp)
- template<typename _L1 , typename _L2 , typename... _L3>
  void lock (_L1 &__l1, _L2 &__l2, _L3 &...__l3)
- template<typename _Tp >
  complex< _Tp > log (const complex< _Tp > &)
- constexpr float **log** (float __x)
- constexpr long double **log** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **log** (_Tp __x)
- template<typename _Tp >
  _Expr< _UnClos< _Log,
  _ValArray, _Tp >, _Tp > **log** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Log, _Expr,
  _Dom >, typename
  _Dom::value_type > **log** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  complex< _Tp > log10 (const complex< _Tp > &)
- constexpr float **log10** (float __x)
- constexpr long double **log10** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **log10** (_Tp __x)
- template<class _Dom >
  _Expr< _UnClos< _Log10, _Expr,
  _Dom >, typename
  _Dom::value_type > **log10** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Log10,
  _ValArray, _Tp >, _Tp > **log10** (const valarray< _Tp > &__v)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **lower_bound** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr _FIter **lower_bound** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _-
  Compare __comp)
- error_code make_error_code (future_errc __errc) noexcept
- error_code **make_error_code** (io_errc __e) noexcept
- error_condition make_error_condition (future_errc __errc) noexcept
- error_condition **make_error_condition** (io_errc __e) noexcept

- template<typename _Ex >
  exception_ptr make_exception_ptr (_Ex __ex) noexcept
- template<typename _RandomAccessIterator >
  constexpr void make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RAIter >
  constexpr void **make_heap** (_RAIter, _RAIter)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RAIter , typename _Compare >
  constexpr void **make_heap** (_RAIter, _RAIter, _Compare)
- template<typename _Iterator >
  constexpr move_iterator
  < _Iterator > **make_move_iterator** (_Iterator __i)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > make_reverse_iterator (_Iterator __i)
- template<typename... _Elements>
  constexpr tuple< typename
  __decay_and_strip< _Elements >
  ::__type...> **make_tuple** (_Elements &&...__args)
- template<typename _Tp >
  constexpr const _Tp & max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & max (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **max** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **max** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr _FIter **max_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **max_element** (_FIter, _FIter, _Compare)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator max_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator max_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Tp , typename _Class >
  constexpr _Mem_fn< _Tp _Class::* > mem_fn (_Tp _Class::*__pm) noexcept
- template<typename _Ret , typename _Tp >
  mem_fun_t< _Ret, _Tp > **mem_fun** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp >
  const_mem_fun_t< _Ret, _Tp > **mem_fun** (_Ret(_Tp::*__f)() const)
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_t< _Ret, _Tp, _Arg > **mem_fun** (_Ret(_Tp::*__f)(_Arg))
- template<typename _Ret , typename _Tp , typename _Arg >
  const_mem_fun1_t< _Ret, _Tp, _Arg > **mem_fun** (_Ret(_Tp::*__f)(_Arg) const)
- template<typename _Ret , typename _Tp >
  mem_fun_ref_t< _Ret, _Tp > **mem_fun_ref** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp >
  const_mem_fun_ref_t< _Ret, _Tp > **mem_fun_ref** (_Ret(_Tp::*__f)() const)
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_ref_t< _Ret, _Tp, _Arg > **mem_fun_ref** (_Ret(_Tp::*__f)(_Arg))

- template<typename _Ret , typename _Tp , typename _Arg >
  const_mem_fun1_ref_t< _Ret,
  _Tp, _Arg > **mem_fun_ref** (_Ret(_Tp::*__f)(_Arg) const)
- void * **memchr** (void *__s, int __c, size_t __n)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _Tp >
  constexpr const _Tp & min (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & min (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **min** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **min** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr _FIter **min_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **min_element** (_FIter, _FIter, _Compare)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator min_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator min_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Tp >
  constexpr pair< const _Tp
  &, const _Tp & > minmax (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr pair< const _Tp
  &, const _Tp & > minmax (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr pair< _Tp, _Tp > **minmax** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr pair< _Tp, _Tp > **minmax** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr pair< _FIter, _FIter > **minmax_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr pair< _FIter, _FIter > **minmax_element** (_FIter, _FIter, _Compare)
- template<typename _ForwardIterator >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > minmax_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > minmax_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)

- template<typename _IIter1 , typename _IIter2 >
  constexpr pair< _IIter1, _IIter2 > **mismatch** (_IIter1, _IIter1, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr pair< _IIter1, _IIter2 > **mismatch** (_IIter1, _IIter1, _IIter2, _BinaryPredicate)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Binary-Predicate __binary_pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Input-Iterator2 __last2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Input-Iterator2 __last2, _BinaryPredicate __binary_pred)
- float **modf** (float __x, float *__iptr)
- long double **modf** (long double __x, long double *__iptr)
- template<typename _Tp >
  constexpr
  std::remove_reference< _Tp >
  ::type && move (_Tp &&__t) noexcept
- template<typename _II , typename _OI >
  constexpr _OI move (_II __first, _II __last, _OI __result)
- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 move_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _Tp >
  constexpr conditional
  < __move_if_noexcept_cond< _Tp >
  ::value, const _Tp &, _Tp && >
  ::type move_if_noexcept (_Tp &__x) noexcept
- template<typename _InputIterator >
  constexpr _InputIterator **next** (_InputIterator __x, typename iterator_traits< _InputIterator >::difference_type __-n=1)
- template<typename _BIter >
  constexpr bool **next_permutation** (_BIter, _BIter)
- template<typename _BIter , typename _Compare >
  constexpr bool **next_permutation** (_BIter, _BIter, _Compare)
- template<typename _BidirectionalIterator >
  constexpr bool next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- ios_base & noboolalpha (ios_base &__base)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool none_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)

- template<typename _IIter , typename _Predicate >
  constexpr bool **none_of** (_IIter, _IIter, _Predicate)
- template<typename _Tp >
  _Tp constexpr norm (const complex< _Tp > &)
- template<typename _Tp >
  constexpr _Tp norm (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote
  < _Tp >::__type **norm** (_Tp __x)
- ios_base & noshowbase (ios_base &__base)
- ios_base & noshowpoint (ios_base &__base)
- ios_base & noshowpos (ios_base &__base)
- ios_base & noskipws (ios_base &__base)
- template<typename _Predicate >
  constexpr unary_negate
  < _Predicate > not1 (const _Predicate &__pred)
- template<typename _Predicate >
  constexpr binary_negate
  < _Predicate > not2 (const _Predicate &__pred)
- void **notify_all_at_thread_exit** (condition_variable &, unique_lock< mutex >)
- ios_base & nounitbuf (ios_base &__base)
- ios_base & nouppercase (ios_base &__base)
- template<typename _RAIter >
  constexpr void **nth_element** (_RAIter, _RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **nth_element** (_RAIter, _RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
  constexpr void nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccess-
  Iterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccess-
  Iterator __last, _Compare __comp)
- ios_base & oct (ios_base &__base)
- template<typename _T1 , typename _T2 >
  constexpr bool **operator!=** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept
- template<typename _StateT >
  bool **operator!=** (const fpos< _StateT > &__lhs, const fpos< _StateT > &__rhs)
- template<typename _CharT , typename _Traits >
  bool **operator!=** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT, _Traits
  > &__b)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator!=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- bool **operator!=** (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator!= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator!= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool **operator!=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)

- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  __fun< __not_equal_to,
  typename _Dom::value_type >
  ::result_type > **operator!=** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos
  < __not_equal_to, _Expr, _Expr,
  _Dom1, _Dom2 >, typename __fun
  < __not_equal_to, typename
  _Dom1::value_type >
  ::result_type > **operator!=** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Constant,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __not_equal_to, typename
  _Dom::value_type >
  ::result_type > **operator!=** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __not_equal_to, typename
  _Dom::value_type >
  ::result_type > **operator!=** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  __fun< __not_equal_to,
  typename _Dom::value_type >
  ::result_type > **operator!=** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m>
  bool operator!= (const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__lhs, const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__rhs)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator!=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f>

bool operator!= (const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__lhs, const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__rhs)

- template<typename _Res , typename... _Args>
  bool operator!= (const function< _Res(_Args...)> &__f, nullptr_t) noexcept
- template<typename _Res , typename... _Args>
  bool operator!= (nullptr_t, const function< _Res(_Args...)> &__f) noexcept
- template<typename _UIntType , size_t __w, size_t __s, size_t __r>
  bool operator!= (const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__lhs, const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__rhs)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator!= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator!= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _RandomNumberEngine , size_t __p, size_t __r>
  bool operator!= (const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__lhs, const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator!= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **operator!=** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _Constant, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **operator!=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _Constant,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **operator!=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _RandomNumberEngine , size_t __w, typename _UIntType >
  bool operator!= (const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__lhs, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__rhs)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **operator!=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **operator!=** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , typename _Alloc >
  bool operator!= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator!=** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept

- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator!=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator!=** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator!= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _RandomNumberEngine , size_t __k>
  bool operator!= (const std::shuffle_order_engine< _RandomNumberEngine, __k > &__lhs, const std::shuffle_order_engine< _RandomNumberEngine, __k > &__rhs)
- template<typename _Iterator >
  constexpr bool **operator!=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _IntType >
  bool operator!= (const std::uniform_int_distribution< _IntType > &__d1, const std::uniform_int_distribution< _IntType > &__d2)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **operator!=** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **operator!=** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _IntType >
  bool operator!= (const std::uniform_real_distribution< _IntType > &__d1, const std::uniform_real_distribution< _IntType > &__d2)
- template<typename _Tp , typename _Alloc >
  bool operator!= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator!= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **operator!=** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **operator!=** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Bi_iter , class _Alloc >
  bool operator!= (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__m2)
- template<typename _RealType >
  bool operator!= (const std::normal_distribution< _RealType > &__d1, const std::normal_distribution< _RealType > &__d2)
- template<typename _Tp , typename _Alloc >
  bool operator!= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _RealType >
  bool operator!= (const std::lognormal_distribution< _RealType > &__d1, const std::lognormal_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::gamma_distribution< _RealType > &__d1, const std::gamma_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::chi_squared_distribution< _RealType > &__d1, const std::chi_squared_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::cauchy_distribution< _RealType > &__d1, const std::cauchy_distribution< _RealType > &__d2)

- template<typename _RealType >
  bool operator!= (const std::fisher_f_distribution< _RealType > &__d1, const std::fisher_f_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::student_t_distribution< _RealType > &__d1, const std::student_t_distribution< _RealType > &__d2)
- bool operator!= (const std::bernoulli_distribution &__d1, const std::bernoulli_distribution &__d2)
- template<typename _IntType >
  bool operator!= (const std::binomial_distribution< _IntType > &__d1, const std::binomial_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool operator!= (const std::geometric_distribution< _IntType > &__d1, const std::geometric_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool operator!= (const std::negative_binomial_distribution< _IntType > &__d1, const std::negative_binomial_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool operator!= (const std::poisson_distribution< _IntType > &__d1, const std::poisson_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::exponential_distribution< _RealType > &__d1, const std::exponential_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::weibull_distribution< _RealType > &__d1, const std::weibull_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::extreme_value_distribution< _RealType > &__d1, const std::extreme_value_distribution< _RealType > &__d2)
- template<typename _IntType >
  bool operator!= (const std::discrete_distribution< _IntType > &__d1, const std::discrete_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::piecewise_constant_distribution< _RealType > &__d1, const std::piecewise_constant_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool operator!= (const std::piecewise_linear_distribution< _RealType > &__d1, const std::piecewise_linear_distribution< _RealType > &__d2)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator!= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator!= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator!= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __modulus,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __modulus,
  typename _Dom1::value_type >
  ::result_type > **operator%** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **operator%** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **operator%** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
  ::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **operator%** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-
  name _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **operator%** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **operator%** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **operator%** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **operator%** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- constexpr _Ios_Fmtflags **operator&** (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr memory_order **operator&** (memory_order __m, __memory_order_modifier __mod)
- constexpr _Ios_Openmode **operator&** (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr launch **operator&** (launch __x, launch __y)
- constexpr _Ios_Iostate **operator&** (_Ios_Iostate __a, _Ios_Iostate __b)

- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __bitwise_and,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun
  < __bitwise_and, typename
  _Dom1::value_type >
  ::result_type > **operator&** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_and,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __bitwise_and, typename
  _Dom::value_type >
  ::result_type > **operator&** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __bitwise_and, typename
  _Dom::value_type >
  ::result_type > **operator&** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_and,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __bitwise_and, typename
  _Dom::value_type >
  ::result_type > **operator&** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_and,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __bitwise_and, typename
  _Dom::value_type >
  ::result_type > **operator&** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- constexpr chars_format **operator&** (chars_format __lhs, chars_format __rhs) noexcept
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **operator&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >

_Expr< _BinClos< __bitwise_and,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun
< __bitwise_and, _Tp >
::result_type > **operator&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
_Expr< _BinClos< __bitwise_and,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun
< __bitwise_and, _Tp >
::result_type > **operator&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<class _Dom >
_Expr< _BinClos< __logical_and,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **operator&&** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
_Expr< _BinClos< __logical_and,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **operator&&** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
_Expr< _BinClos< __logical_and,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **operator&&** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __logical_and,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun
< __logical_and, typename
_Dom1::value_type >
::result_type > **operator&&** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
_Expr< _BinClos< __logical_and,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **operator&&** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-

::value_type > &__v)

- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **operator&&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **operator&&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **operator&&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- const _Ios_Fmtflags & **operator&=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **operator&=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- launch & **operator&=** (launch &__x, launch __y)
- const _Ios_Iostate & **operator&=** (_Ios_Iostate &__a, _Ios_Iostate __b)
- constexpr chars_format & **operator&=** (chars_format &__lhs, chars_format __rhs) noexcept
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __multiplies,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __multiplies,
  typename _Dom1::value_type >
  ::result_type > **operator*** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2,
  typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __multiplies,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __multiplies,
  typename _Dom::value_type >
  ::result_type > **operator*** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename
  _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __multiplies,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __multiplies,
  typename _Dom::value_type >
  ::result_type > **operator*** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
  ::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __multiplies,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __multiplies,
  typename _Dom::value_type >
  ::result_type > **operator*** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-

::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __multiplies,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __multiplies,
  typename _Dom::value_type >
  ::result_type > **operator*** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **operator*** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **operator*** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __multiplies,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __multiplies,
  _Tp >::result_type > **operator*** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _BinClos< __plus,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __plus,
  typename _Dom::value_type >
  ::result_type > **operator+** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __plus,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __plus,
  typename _Dom::value_type >
  ::result_type > **operator+** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __plus, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  __fun< __plus, typename
  _Dom::value_type >
  ::result_type > **operator+** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >

_Expr< _BinClos< __plus, _Expr, _Expr, _Dom1, _Dom2 > , typename __fun< __plus, typename _Dom1::value_type > ::result_type > **operator+** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __plus, _Expr, _Constant, _Dom, typename _Dom::value_type >, typename __fun< __plus, typename _Dom::value_type > ::result_type > **operator+** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<typename _Tp >
  constexpr complex< _Tp > operator+ (const complex< _Tp > &__x)
- template<typename _Iterator >
  constexpr reverse_iterator < _Iterator > **operator+** (typename reverse_iterator< _Iterator >::difference_type __n, const reverse_iterator< _Iterator > &__x)
- template<typename _Tp >
  _Expr< _BinClos< __plus, _ValArray, _ValArray, _Tp, _Tp > , typename __fun< __plus, _Tp > ::result_type > **operator+** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __plus, _ValArray, _Constant, _Tp, _Tp > , typename __fun< __plus, _Tp > ::result_type > **operator+** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __plus, _Constant, _ValArray, _Tp, _Tp > , typename __fun< __plus, _Tp > ::result_type > **operator+** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Iterator >
  constexpr move_iterator < _Iterator > **operator+** (typename move_iterator< _Iterator >::difference_type __n, const move_iterator< _Iterator > &__x)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits, _Alloc > operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits, _Alloc > operator+ (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits, _Alloc > operator+ (_CharT __lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits, _Alloc > operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, const basic_string< _CharT, _Traits, _-
Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (const basic_string< _CharT, _Traits, _Alloc > &__lhs, basic_string< _CharT, _Traits, _Alloc
> &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, basic_string< _CharT, _Traits, _Alloc >
&&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (const _CharT *__lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (_CharT __lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, _CharT __rhs)
- template<class _Dom >
_Expr< _BinClos< __minus,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun< __minus,
typename _Dom::value_type >
::result_type > **operator-** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename
_Dom::value_type > &__v)
- template<class _Dom >
_Expr< _BinClos< __minus,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun< __minus,
typename _Dom::value_type >
::result_type > **operator-** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
::value_type &__t)
- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __minus,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun< __minus,
typename _Dom1::value_type >
::result_type > **operator-** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2,
typename _Dom2::value_type > &__w)
- template<class _Dom >

_Expr< _BinClos< __minus,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun< __minus,
typename _Dom::value_type >
::result_type > **operator-** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value-
_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __minus,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __minus,
  typename _Dom::value_type >
  ::result_type > **operator-** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename
  _Dom::value_type > &__e)
- template<typename _Tp >
  constexpr complex< _Tp > operator- (const complex< _Tp > &__x)
- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **operator-** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
  -> decltype(__y.base()-__x.base())
- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **operator-** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **operator-** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **operator-** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **operator-** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y) ->
  decltype(__x.base()-__y.base())
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __divides,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __divides,
  typename _Dom1::value_type >
  ::result_type > **operator/** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2,
  typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **operator/** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename
  _Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **operator**/ (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
  ::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **operator**/ (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename
  _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **operator**/ (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value-
  _type > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **operator**/ (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **operator**/ (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **operator**/ (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator**< (const array< _Tp, _Nm > &__a, const array< _Tp, _Nm > &__b)
- bool **operator**< (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator< (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator< (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool **operator**< (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<class _Dom1 , class _Dom2 >

_Expr< _BinClos< __less, _Expr, _Expr, _Dom1, _Dom2 > , typename __fun< __less, typename _Dom1::value_type > ::result_type > **operator**< (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __less, _Constant, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __less, typename _Dom::value_type > ::result_type > **operator**< (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __less, _Expr, _Constant, _Dom, typename _Dom::value_type >, typename __fun< __less, typename _Dom::value_type > ::result_type > **operator**< (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __less, _ValArray, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __less, typename _Dom::value_type > ::result_type > **operator**< (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __less, _Expr, _ValArray, _Dom, typename _Dom::value_type >, typename __fun< __less, typename _Dom::value_type > ::result_type > **operator**< (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator**< (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator< (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator< (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator< (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp >
  _Expr< _BinClos< __less, _ValArray, _ValArray, _Tp, _Tp > , typename __fun< __less, _Tp > ::result_type > **operator**< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __less,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **operator**< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **operator**< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **operator**< (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp , typename _Alloc >
  bool operator< (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator**< (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Tp , typename _Up , _Lock_policy _Lp>
  bool **operator**< (const __shared_ptr< _Tp, _Lp > &__a, const __shared_ptr< _Up, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**< (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator< (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**< (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Iterator >
  constexpr bool **operator**< (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator< (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator< (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator< (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator< (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator< (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator< (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Resetiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setiosflags __f)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const linear_congruential_engine< _UIntType, __a, __c, __m > &__lcr)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setbase __f)

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setfill< _CharT > __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setprecision __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setw __f)
- template<typename _CharT , typename _Traits , typename _MoneyT >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Put_money< _MoneyT > __f)
- template<class _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__out, thread::id __id)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__os, _Put_time< _CharT > __f)
- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **operator**<< (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **operator**<< (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __shift_left,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __shift_left,
  typename _Dom1::value_type >
  ::result_type > **operator**<< (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **operator**<< (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **operator**<< (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-

name _Dom::value_type > &__e)

- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f, typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__x)
- template<typename _Tp , typename _CharT , class _Traits >
basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__os, const complex< _Tp > &__x)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r, typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const subtract_with_carry_engine< _UIntType, __w, __s, __r > &__x)
- template<typename _RandomNumberEngine , size_t __p, size_t __r, typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const discard_block_engine< _RandomNumberEngine, __p, __r > &__x)
- template<typename _Ostream , typename _Tp >
enable_if< __and_< __not_
< is_lvalue_reference
< _Ostream >
>, __is_convertible_to_basic_ostream
< _Ostream >, __is_insertable
< __rvalue_ostream_type
< _Ostream >, const _Tp & >
>::value,
__rvalue_ostream_type
< _Ostream > >::type operator<< (_Ostream &&__os, const _Tp &__x)
- template<typename _RandomNumberEngine , size_t __k, typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const shuffle_order_engine< _RandomNumberEngine, __k > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const negative_binomial_distribution< _IntType > &__x)
- template<typename _Tp >
_Expr< _BinClos< __shift_left,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __shift_left,
_Tp >::result_type > **operator**<< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __shift_left,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __shift_left,
_Tp >::result_type > **operator**<< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
_Expr< _BinClos< __shift_left,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __shift_left,
_Tp >::result_type > **operator**<< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- template<typename _RandomNumberEngine , size_t __w, typename _UIntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const poisson_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const binomial_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const normal_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_real_distribution< _RealType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const lognormal_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const chi_squared_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const fisher_f_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const student_t_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const gamma_distribution< _RealType > &__x)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > &__str)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const discrete_distribution< _IntType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const piecewise_constant_-
  distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::cauchy_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const piecewise_linear_distribution<
  _RealType > &__x)
- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::geometric_distribution< _Int-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::exponential_distribution<
  _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::weibull_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::extreme_value_distribution<
  _RealType > &__x)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__os, const basic_-
  string< _CharT, _Traits, _Alloc > &__str)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator**<= (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- bool **operator**<= (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator<= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator<= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool **operator**<= (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<class _Dom >
  _Expr< _BinClos< __less_equal,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __less_equal,
  typename _Dom::value_type >
  ::result_type > **operator**<= (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-
  name _Dom::value_type > &__e)

- template<class _Dom >
  _Expr< _BinClos< __less_equal,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __less_equal,
  typename _Dom::value_type >
  ::result_type > **operator**<= (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
  ::value_type &__t)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __less_equal,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __less_equal,
  typename _Dom1::value_type >
  ::result_type > **operator**<= (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _-
  Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __less_equal,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __less_equal,
  typename _Dom::value_type >
  ::result_type > **operator**<= (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __less_equal,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __less_equal,
  typename _Dom::value_type >
  ::result_type > **operator**<= (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator**<= (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR >
  &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator<= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc >
  &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator<= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator<= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _-
  Compare, _Alloc > &__y)
- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **operator**<= (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **operator**<= (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
  _Expr< _BinClos< __less_equal,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __less_equal,
  _Tp >::result_type > **operator**<= (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **operator**<= (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator**<= (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator<= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **operator**<= (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**<= (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator<= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**<= (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Iterator >
  constexpr bool **operator**<= (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator<= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator<= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator<= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator<= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator<= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator<= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _T1 , typename _T2 >
  constexpr bool **operator==** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept
- template<typename _StateT >
  bool operator== (const fpos< _StateT > &__lhs, const fpos< _StateT > &__rhs)
- template<typename _CharT , typename _Traits >
  bool **operator==** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT, _Traits > &__b)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator==** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- bool **operator==** (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator== (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator== (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool operator== (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)

- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **operator==** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **operator==** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __equal_to,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __equal_to,
  typename _Dom1::value_type >
  ::result_type > **operator==** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **operator==** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **operator==** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator==** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _Res , typename... _Args>
  bool operator== (const function< _Res(_Args...)> &__f, nullptr_t) noexcept
- template<typename _Res , typename... _Args>
  bool operator== (nullptr_t, const function< _Res(_Args...)> &__f) noexcept
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator== (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool operator== (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator== (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)

- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **operator==** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **operator==** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos< __equal_to,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __equal_to,
  _Tp >::result_type > **operator==** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **operator==** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp , typename _Alloc >
  bool operator== (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **operator==** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator==** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator==** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator== (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc
  > &__y)
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator==** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Iterator >
  constexpr bool **operator==** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **operator==** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value,
  _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **operator==** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset<
  _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _RealType >
  bool **operator==** (const std::normal_distribution< _RealType > &__d1, const std::normal_distribution< _Real-
  Type > &__d2)
- template<typename _Tp , typename _Alloc >
  bool operator== (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator== (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **operator==** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map<
  _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Bi_iter , typename _Alloc >
  bool operator== (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__-
  m2)

- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **operator==** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator== (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator== (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  bool >::__type **operator==** (const basic_string< _CharT > &__lhs, const basic_string< _CharT > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator== (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator== (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator>** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- bool **operator>** (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator> (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator> (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool **operator>** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **operator>** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **operator>** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **operator>** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >

_Expr< _BinClos< __greater, _Expr, _ValArray, _Dom, typename _Dom::value_type > , typename __fun< __greater, typename _Dom::value_type > ::result_type > **operator**> (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom1 , class _Dom2 > _Expr< _BinClos< __greater, _Expr, _Expr, _Dom1, _Dom2 > , typename __fun< __greater, typename _Dom1::value_type > ::result_type > **operator**> (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<typename _IteratorL , typename _IteratorR > constexpr bool **operator**> (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &_-_y)
- template<typename _Key , typename _Compare , typename _Alloc > bool operator> (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc > bool operator> (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool operator> (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp > _Expr< _BinClos< __greater, _ValArray, _Constant, _Tp, _Tp > , typename __fun< __greater, _Tp >::result_type > **operator**> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp > _Expr< _BinClos< __greater, _Constant, _ValArray, _Tp, _Tp > , typename __fun< __greater, _Tp >::result_type > **operator**> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp > _Expr< _BinClos< __greater, _ValArray, _ValArray, _Tp, _Tp > , typename __fun< __greater, _Tp >::result_type > **operator**> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename... _TElements, typename... _UElements> constexpr bool **operator**> (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp , typename _Alloc > bool operator> (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _IteratorL , typename _IteratorR > constexpr bool **operator**> (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool operator> (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp> bool **operator**> (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept

- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**> (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator**> (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Iterator >
  constexpr bool **operator**> (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator> (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator> (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator> (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator> (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator> (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator> (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator**>= (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- bool **operator**>= (thread::id __x, thread::id __y) noexcept
- template<typename _Tp , typename _Seq >
  bool operator>= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool operator>= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Iterator >
  constexpr bool **operator**>= (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  __fun< __greater_equal,
  typename _Dom::value_type >
  ::result_type > **operator**>= (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _Constant,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __greater_equal, typename
  _Dom::value_type >
  ::result_type > **operator**>= (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >

_Expr< _BinClos
< __greater_equal, _ValArray,
_Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __greater_equal, typename
_Dom::value_type >
::result_type > **operator>=** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos
< __greater_equal, _Expr,
_Expr, _Dom1, _Dom2 >
, typename __fun
< __greater_equal, typename
_Dom1::value_type >
::result_type > **operator>=** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
_Expr< _BinClos
< __greater_equal, _Expr,
_ValArray, _Dom, typename
_Dom::value_type >, typename
__fun< __greater_equal,
typename _Dom::value_type >
::result_type > **operator>=** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<typename _IteratorL , typename _IteratorR >
constexpr bool **operator>=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
bool operator>= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
bool operator>= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
bool operator>= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp >
_Expr< _BinClos
< __greater_equal, _ValArray,
_Constant, _Tp, _Tp >
, typename __fun
< __greater_equal, _Tp >
::result_type > **operator>=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
_Expr< _BinClos
< __greater_equal, _ValArray,
_ValArray, _Tp, _Tp >
, typename __fun
< __greater_equal, _Tp >
::result_type > **operator>=** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >

_Expr< _BinClos
< __greater_equal, _Constant,
_ValArray, _Tp, _Tp >
, typename __fun
< __greater_equal, _Tp >
::result_type > **operator>=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- template<typename... _TElements, typename... _UElements>
  constexpr bool **operator>=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename _Tp , typename _Alloc >
  bool operator>= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **operator>=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool operator>= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **operator>=** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator>=** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **operator>=** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Iterator >
  constexpr bool **operator>=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator>= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator>= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool operator>= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator>= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator>= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool operator>= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Resetiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Setiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Setbase __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Setfill< _CharT > __f)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m, typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator>>** (std::basic_istream< _CharT, _Traits > &__is, linear_congruential_engine< _UIntType, __a, __c, __m > &__lcr)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Setprecision __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **operator>>** (basic_istream< _CharT, _Traits > &__is, _Setw __f)

- template<typename _CharT , typename _Traits , typename _MoneyT >
basic_istream< _CharT, _Traits > & **operator**>> (basic_istream< _CharT, _Traits > &__is, _Get_money< _MoneyT > __f)
- template<class _Dom >
_Expr< _BinClos< __shift_right,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun
< __shift_right, typename
_Dom::value_type >
::result_type > **operator**>> (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __shift_right,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun
< __shift_right, typename
_Dom1::value_type >
::result_type > **operator**>> (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
_Expr< _BinClos< __shift_right,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __shift_right, typename
_Dom::value_type >
::result_type > **operator**>> (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
_Expr< _BinClos< __shift_right,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __shift_right, typename
_Dom::value_type >
::result_type > **operator**>> (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
_Expr< _BinClos< __shift_right,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun
< __shift_right, typename
_Dom::value_type >
::result_type > **operator**>> (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<typename _CharT , typename _Traits >
basic_istream< _CharT, _Traits > & **operator**>> (basic_istream< _CharT, _Traits > &__is, _Get_time< _CharT > __f)
- template<typename _Tp , typename _CharT , class _Traits >
basic_istream< _CharT, _Traits > & operator>> (basic_istream< _CharT, _Traits > &__is, complex< _Tp > &__x)

- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__x)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, subtract_with_carry_engine< _UIntType, __w, __s, __r > &__x)
- template<typename _RandomNumberEngine , size_t __p, size_t __r, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, discard_block_engine< _RandomNumberEngine, __p, __r > &__x)
- template<typename _RandomNumberEngine , size_t __k, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, shuffle_order_engine< _RandomNumberEngine, __k > &__x)
- template<typename _Istream , typename _Tp >
enable_if< __and_< __not_
< is_lvalue_reference
< _Istream >
>, __is_convertible_to_basic_istream
< _Istream >, __is_extractable
< __rvalue_istream_type
< _Istream >, _Tp && >
>::value,
__rvalue_istream_type
< _Istream > >::type operator>> (_Istream &&__is, _Tp &&__x)
- template<typename _Tp >
_Expr< _BinClos< __shift_right,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun
< __shift_right, _Tp >
::result_type > **operator**>> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
_Expr< _BinClos< __shift_right,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun
< __shift_right, _Tp >
::result_type > **operator**>> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __shift_right,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun
< __shift_right, _Tp >
::result_type > **operator**>> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, negative_binomial_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, poisson_distribution< _IntType > &__x)

- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, binomial_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, normal_distribution< _RealType > &_-
  _x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_real_distribution< _RealType >
  &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, lognormal_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, chi_squared_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, fisher_f_distribution< _RealType > &_-
  _x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, student_t_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, gamma_distribution< _RealType > &_-
  _x)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_istream< _CharT, _Traits > & operator>> (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa-
  _string< _CharT, _Traits, _Alloc, _Base > &__str)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, discrete_distribution< _IntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, piecewise_constant_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::cauchy_distribution< _RealType >
  &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, piecewise_linear_distribution< _Real-
  Type > &__x)

- template<typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::geometric_distribution< _IntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::exponential_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::weibull_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::extreme_value_distribution< _RealType > &__x)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & operator>> (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str)
- template<>
  basic_istream< char > & **operator**>> (basic_istream< char > &__is, basic_string< char > &__str)
- constexpr _Ios_Fmtflags **operator**^ (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr _Ios_Openmode **operator**^ (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr launch **operator**^ (launch __x, launch __y)
- constexpr _Ios_Iostate **operator**^ (_Ios_Iostate __a, _Ios_Iostate __b)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __bitwise_xor,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun
  < __bitwise_xor, typename
  _Dom1::value_type >
  ::result_type > **operator**^ (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_xor,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __bitwise_xor, typename
  _Dom::value_type >
  ::result_type > **operator**^ (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_xor,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __bitwise_xor, typename
  _Dom::value_type >
  ::result_type > **operator**^ (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom >
  _Expr< _BinClos< __bitwise_xor,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __bitwise_xor, typename
  _Dom::value_type >
  ::result_type > **operator^** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_xor,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __bitwise_xor, typename
  _Dom::value_type >
  ::result_type > **operator^** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- constexpr chars_format **operator^** (chars_format __lhs, chars_format __rhs) noexcept
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **operator^** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **operator^** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **operator^** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- const _Ios_Fmtflags & **operator^=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **operator^=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- launch & **operator^=** (launch &__x, launch __y)
- const _Ios_Iostate & **operator^=** (_Ios_Iostate &__a, _Ios_Iostate __b)
- constexpr chars_format & **operator^=** (chars_format &__lhs, chars_format __rhs) noexcept
- constexpr _Ios_Fmtflags **operator|** (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr memory_order **operator|** (memory_order __m, __memory_order_modifier __mod)
- constexpr _Ios_Openmode **operator|** (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr launch **operator|** (launch __x, launch __y)
- constexpr _Ios_Iostate **operator|** (_Ios_Iostate __a, _Ios_Iostate __b)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __bitwise_or,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __bitwise_or,
  typename _Dom1::value_type >
  ::result_type > **operator|** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __bitwise_or,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __bitwise_or,
  typename _Dom::value_type >
  ::result_type > **operator|** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_or,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __bitwise_or,
  typename _Dom::value_type >
  ::result_type > **operator|** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_or,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __bitwise_or,
  typename _Dom::value_type >
  ::result_type > **operator|** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __bitwise_or,
  typename _Dom::value_type >
  ::result_type > **operator|** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- constexpr chars_format **operator|** (chars_format __lhs, chars_format __rhs) noexcept
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **operator|** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **operator|** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **operator|** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- const _Ios_Fmtflags & **operator|=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **operator|=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- launch & **operator|=** (launch &__x, launch __y)
- const _Ios_Iostate & **operator|=** (_Ios_Iostate &__a, _Ios_Iostate __b)

- constexpr chars_format & **operator|=** (chars_format &__lhs, chars_format __rhs) noexcept
- template<class _Dom >
  _Expr< _BinClos< __logical_or,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __logical_or,
  typename _Dom::value_type >
  ::result_type > **operator||** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom-
  ::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __logical_or,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __logical_or,
  typename _Dom::value_type >
  ::result_type > **operator||** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __logical_or,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __logical_or,
  typename _Dom1::value_type >
  ::result_type > **operator||** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2,
  typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __logical_or,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __logical_or,
  typename _Dom::value_type >
  ::result_type > **operator||** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename
  _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __logical_or,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __logical_or,
  typename _Dom::value_type >
  ::result_type > **operator||** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **operator||** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **operator||** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >

_Expr< _BinClos< __logical_or,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __logical_or,
_Tp >::result_type > **operator||** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- constexpr _Ios_Fmtflags **operator~** (_Ios_Fmtflags __a)
- constexpr _Ios_Openmode **operator~** (_Ios_Openmode __a)
- constexpr launch **operator~** (launch __x)
- constexpr _Ios_Iostate **operator~** (_Ios_Iostate __a)
- constexpr chars_format **operator~** (chars_format __fmt) noexcept
- template<typename _RAIter >
constexpr void **partial_sort** (_RAIter, _RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
constexpr void **partial_sort** (_RAIter, _RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
constexpr void partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _IIter , typename _RAIter >
constexpr _RAIter **partial_sort_copy** (_IIter, _IIter, _RAIter, _RAIter)
- template<typename _IIter , typename _RAIter , typename _Compare >
constexpr _RAIter **partial_sort_copy** (_IIter, _IIter, _RAIter, _RAIter, _Compare)
- template<typename _InputIterator , typename _RandomAccessIterator >
constexpr _RandomAccessIterator partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare >
constexpr _RandomAccessIterator partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator >
constexpr _OutputIterator partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
constexpr _OutputIterator partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _BIter , typename _Predicate >
constexpr _BIter **partition** (_BIter, _BIter, _Predicate)
- template<typename _ForwardIterator , typename _Predicate >
constexpr _ForwardIterator partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _IIter , typename _OIter1 , typename _OIter2 , typename _Predicate >
constexpr pair< _OIter1, _OIter2 > **partition_copy** (_IIter, _IIter, _OIter1, _OIter2, _Predicate)
- template<typename _InputIterator , typename _OutputIterator1 , typename _OutputIterator2 , typename _Predicate >
constexpr pair
< _OutputIterator1,
_OutputIterator2 > partition_copy (_InputIterator __first, _InputIterator __last, _OutputIterator1 __out_true, _OutputIterator2 __out_false, _Predicate __pred)
- template<typename _FIter , typename _Predicate >
constexpr _FIter **partition_point** (_FIter, _FIter, _Predicate)
- template<typename _ForwardIterator , typename _Predicate >
constexpr _ForwardIterator partition_point (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _Tp >
complex< _Tp > polar (const _Tp &, const _Tp &=0)

- template<typename _RandomAccessIterator >
  constexpr void pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RAIter >
  constexpr void **pop_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **pop_heap** (_RAIter, _RAIter, _Compare)
- template<typename _Tp >
  complex< _Tp > pow (const complex< _Tp > &, int)
- template<typename _Tp >
  complex< _Tp > pow (const complex< _Tp > &, const _Tp &)
- template<typename _Tp >
  complex< _Tp > pow (const complex< _Tp > &, const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > pow (const _Tp &, const complex< _Tp > &)
- constexpr float **pow** (float __x, float __y)
- constexpr long double **pow** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **pow** (_Tp __x, _Up __y)
- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _ValArray, _ValArray, _Tp, _Tp >
  , _Tp > **pow** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<class _Dom >
  _Expr< _BinClos< _Pow,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **pow** (const valarray< typename _Dom::valarray > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _ValArray, _Constant, _Tp, _Tp >
  , _Tp > **pow** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< _Pow, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **pow** (const _Expr< _Dom, typename _Dom::value_type > &__e, const typename _Dom-::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< _Pow,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **pow** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< _Pow, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **pow** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< _Pow, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename _Dom1::value_type > **pow** (const _Expr< _Dom1, typename _Dom1::value_type > &__e1, const _Expr< _Dom2, typename _Dom2::value_type > &__e2)
- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _Constant, _ValArray, _Tp, _Tp >
  , _Tp > **pow** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **pow** (const std::complex< _Tp > &__x, const _Up &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **pow** (const _Tp &__x, const std::complex< _Up > &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **pow** (const std::complex< _Tp > &__x, const std::complex< _Up > &__y)
- template<typename _BidirectionalIterator >
  constexpr _BidirectionalIterator **prev** (_BidirectionalIterator __x, typename iterator_traits< _BidirectionalIterator >::difference_type __n=1)
- template<typename _BIter >
  constexpr bool **prev_permutation** (_BIter, _BIter)
- template<typename _BIter , typename _Compare >
  constexpr bool **prev_permutation** (_BIter, _BIter, _Compare)
- template<typename _BidirectionalIterator >
  constexpr bool prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _Tp >
  std::complex< _Tp > **proj** (const std::complex< _Tp > &)
- template<typename _Tp >
  std::complex< typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **proj** (_Tp __x)
- template<typename _Arg , typename _Result >
  pointer_to_unary_function
  < _Arg, _Result > ptr_fun (_Result(*__x)(_Arg))
- template<typename _Arg1 , typename _Arg2 , typename _Result >
  pointer_to_binary_function
  < _Arg1, _Arg2, _Result > ptr_fun (_Result(*__x)(_Arg1, _Arg2))
- template<typename _RandomAccessIterator >
  constexpr void push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RAIter >
  constexpr void **push_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **push_heap** (_RAIter, _RAIter, _Compare)

- template<typename _MoneyT >
  _Put_money< _MoneyT > put_money (const _MoneyT &__mon, bool __intl=false)
- template<typename _CharT >
  _Put_time< _CharT > put_time (const std::tm *__tmb, const _CharT *__fmt)
- template<typename _CharT >
  auto quoted (const _CharT *__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- template<typename _CharT , typename _Traits , typename _Alloc >
  auto **quoted** (const basic_string< _CharT, _Traits, _Alloc > &__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- template<typename _CharT , typename _Traits , typename _Alloc >
  auto **quoted** (basic_string< _CharT, _Traits, _Alloc > &__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- template<typename _RAIter >
  void **random_shuffle** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Generator >
  void **random_shuffle** (_RAIter, _RAIter, _Generator &&)
- template<typename _RandomAccessIterator , typename _RandomNumberGenerator >
  void random_shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomNumberGenerator &&__rand)
- template<typename _Container >
  constexpr auto rbegin (_Container &__cont) -> decltype(__cont.rbegin())
- template<typename _Container >
  constexpr auto rbegin (const _Container &__cont) -> decltype(__cont.rbegin())
- template<typename _Tp , size_t _Nm>
  constexpr reverse_iterator< _Tp * > rbegin (_Tp(&__arr)[_Nm])
- template<typename _Tp >
  constexpr reverse_iterator
  < const _Tp * > rbegin (initializer_list< _Tp > __il)
- template<typename _Tp >
  constexpr _Tp **real** (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote
  < _Tp >::__type **real** (_Tp __x)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **remove** (_FIter, _FIter, const _Tp &)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator remove (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _IIter , typename _OIter , typename _Tp >
  constexpr _OIter **remove_copy** (_IIter, _IIter, _OIter, const _Tp &)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  constexpr _OutputIterator remove_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__value)
- template<typename _IIter , typename _OIter , typename _Predicate >
  constexpr _OIter **remove_copy_if** (_IIter, _IIter, _OIter, _Predicate)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator remove_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _FIter , typename _Predicate >
  constexpr _FIter **remove_if** (_FIter, _FIter, _Predicate)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator remove_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _Container >
  constexpr auto rend (_Container &__cont) -> decltype(__cont.rend())

- template<typename _Container >
  constexpr auto rend (const _Container &__cont) -> decltype(__cont.rend())
- template<typename _Tp , size_t _Nm>
  constexpr reverse_iterator< _Tp * > rend (_Tp(&__arr)[_Nm])
- template<typename _Tp >
  constexpr reverse_iterator
  < const _Tp * > rend (initializer_list< _Tp > __il)
- template<typename _FIter , typename _Tp >
  constexpr void **replace** (_FIter, _FIter, const _Tp &, const _Tp &)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void replace (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _IIter , typename _OIter , typename _Tp >
  constexpr _OIter **replace_copy** (_IIter, _IIter, _OIter, const _Tp &, const _Tp &)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  constexpr _OutputIterator replace_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _Iter , typename _OIter , typename _Predicate , typename _Tp >
  constexpr _OIter **replace_copy_if** (_Iter, _Iter, _OIter, _Predicate, const _Tp &)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp >
  constexpr _OutputIterator replace_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred, const _Tp &__new_value)
- template<typename _FIter , typename _Predicate , typename _Tp >
  constexpr void **replace_if** (_FIter, _FIter, _Predicate, const _Tp &)
- template<typename _ForwardIterator , typename _Predicate , typename _Tp >
  constexpr void replace_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, const _Tp &__new_value)
- _Resetiosflags resetiosflags (ios_base::fmtflags __mask)
- void rethrow_exception (exception_ptr)
- template<typename _Ex >
  void rethrow_if_nested (const _Ex &__ex)
- template<typename _Tp >
  void return_temporary_buffer (_Tp *__p)
- template<typename _BIter >
  constexpr void **reverse** (_BIter, _BIter)
- template<typename _BidirectionalIterator >
  constexpr void reverse (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BIter , typename _OIter >
  constexpr _OIter **reverse_copy** (_BIter, _BIter, _OIter)
- template<typename _BidirectionalIterator , typename _OutputIterator >
  constexpr _OutputIterator reverse_copy (_BidirectionalIterator __first, _BidirectionalIterator __last, _OutputIterator __result)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type riemann_zeta (_Tp __s)
- float riemann_zetaf (float __s)
- long double riemann_zetal (long double __s)
- ios_base & right (ios_base &__base)
- template<typename _FIter , typename _OIter >
  constexpr _OIter **rotate_copy** (_FIter, _FIter, _FIter, _OIter)
- template<typename _ForwardIterator , typename _OutputIterator >
  constexpr _OutputIterator rotate_copy (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last, _OutputIterator __result)

- ios_base & scientific (ios_base &__base)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __predicate)
- template<typename _FIter , typename _Size , typename _Tp >
  constexpr _FIter **search_n** (_FIter, _FIter, _Size, const _Tp &)
- template<typename _FIter , typename _Size , typename _Tp , typename _BinaryPredicate >
  constexpr _FIter **search_n** (_FIter, _FIter, _Size, const _Tp &, _BinaryPredicate)
- template<typename _ForwardIterator , typename _Integer , typename _Tp >
  constexpr _ForwardIterator search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val)
- template<typename _ForwardIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  constexpr _ForwardIterator search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- new_handler set_new_handler (new_handler) throw ()
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- terminate_handler set_terminate (terminate_handler) noexcept

- unexpected_handler set_unexpected (unexpected_handler) noexcept
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- _Setbase setbase (int __base)
- template<typename _CharT >
  _Setfill< _CharT > setfill (_CharT __c)
- _Setiosflags setiosflags (ios_base::fmtflags __mask)
- _Setprecision setprecision (int __n)
- _Setw setw (int __n)
- ios_base & showbase (ios_base &__base)
- ios_base & showpoint (ios_base &__base)
- ios_base & showpos (ios_base &__base)
- template<typename _RAIter , typename _UGenerator >
  void **shuffle** (_RAIter, _RAIter, _UGenerator &&)
- template<typename _RandomAccessIterator , typename _UniformRandomNumberGenerator >
  void shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _UniformRandomNumberGenerator &&__g)
- template<typename _Tp >
  complex< _Tp > sin (const complex< _Tp > &)
- constexpr float **sin** (float __x)
- constexpr long double **sin** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **sin** (_Tp __x)
- template<typename _Tp >
  _Expr< _UnClos< _Sin,
  _ValArray, _Tp >, _Tp > **sin** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Sin, _Expr,
  _Dom >, typename
  _Dom::value_type > **sin** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  complex< _Tp > sinh (const complex< _Tp > &)
- constexpr float **sinh** (float __x)
- constexpr long double **sinh** (long double __x)
- template<class _Dom >
  _Expr< _UnClos< _Sinh, _Expr,
  _Dom >, typename
  _Dom::value_type > **sinh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Sinh,
  _ValArray, _Tp >, _Tp > **sinh** (const valarray< _Tp > &__v)

- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **sinh** (_Tp __x)
- ios_base & skipws (ios_base &__base)
- template<typename _RAIter >
  constexpr void **sort** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **sort** (_RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
  constexpr void sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RAIter >
  constexpr void **sort_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **sort_heap** (_RAIter, _RAIter, _Compare)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_bessel (unsigned int __n, _Tp __x)
- float sph_besself (unsigned int __n, float __x)
- long double sph_bessell (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float sph_legendref (unsigned int __l, unsigned int __m, float __theta)
- long double sph_legendrel (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_neumann (unsigned int __n, _Tp __x)
- float sph_neumannf (unsigned int __n, float __x)
- long double sph_neumannl (unsigned int __n, long double __x)
- template<typename _Tp >
  complex< _Tp > sqrt (const complex< _Tp > &)
- template<class _Dom >
  _Expr< _UnClos< _Sqrt, _Expr,
  _Dom >, typename
  _Dom::value_type > **sqrt** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Sqrt,
  _ValArray, _Tp >, _Tp > **sqrt** (const valarray< _Tp > &__v)
- constexpr float **sqrt** (float __x)
- constexpr long double **sqrt** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **sqrt** (_Tp __x)
- template<typename _BIter , typename _Predicate >
  _BIter **stable_partition** (_BIter, _BIter, _Predicate)

- template<typename _ForwardIterator , typename _Predicate >
  _ForwardIterator stable_partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _RAIter >
  void **stable_sort** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  void **stable_sort** (_RAIter, _RAIter, _Compare)
- template<typename _RandomAccessIterator >
  void stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  void stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > static_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept
- char * **strchr** (char *__s, int __n)
- char * **strpbrk** (char *__s1, const char *__s2)
- char * **strrchr** (char *__s, int __n)
- char * **strstr** (char *__s1, const char *__s2)
- void **swap** (_Bit_reference __x, _Bit_reference __y) noexcept
- void **swap** (_Bit_reference __x, bool &__y) noexcept
- void **swap** (bool &__x, _Bit_reference __y) noexcept
- template<typename _Tp >
  constexpr enable_if< __and_
  < __not_< __is_tuple_like< _Tp >
  >, is_move_constructible< _Tp >
  , is_move_assignable< _Tp >
  >::value >::type swap (_Tp &__a, _Tp &__b) noexcept(/*conditional */) is_nothrow_move_assignable< _Tp >>
- template<typename _Tp , size_t _Nm>
  constexpr enable_if
  < __is_swappable< _Tp >::value >
  ::type swap (_Tp(&__a)[_Nm], _Tp(&__b)[_Nm]) noexcept(/*conditional */)
- void **swap** (thread &__x, thread &__y) noexcept
- template<typename _Tp , std::size_t _Nm>
  constexpr enable_if
  < ::__array_traits< _Tp, _Nm >
  ::_Is_swappable::value >::type **swap** (array< _Tp, _Nm > &__one, array< _Tp, _Nm > &__two) noexcept(noexcept(__one.swap(__two)))
- template<typename _Tp , std::size_t _Nm>
  enable_if< !::__array_traits
  < _Tp, _Nm >
  ::_Is_swappable::value >::type **swap** (array< _Tp, _Nm > &, array< _Tp, _Nm > &)=delete
- template<typename _Tp , typename _Seq >
  enable_if< __is_swappable
  < _Seq >::value >::type **swap** (stack< _Tp, _Seq > &__x, stack< _Tp, _Seq > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Tp , typename _Seq >
  enable_if< __is_swappable
  < _Seq >::value >::type **swap** (queue< _Tp, _Seq > &__x, queue< _Tp, _Seq > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Res , typename... _Args>
  void swap (function< _Res(_Args...)> &__x, function< _Res(_Args...)> &__y) noexcept

- template<typename _Tp , typename _Sequence , typename _Compare >
  enable_if< __and_
  < __is_swappable< _Sequence >
  , __is_swappable< _Compare >
  >::value >::type **swap** (priority_queue< _Tp, _Sequence, _Compare > &__x, priority_queue< _Tp, _Sequence, _Compare > &__y) noexcept(noexcept(__x.swap(__y)))
- template<class _CharT , class _Traits , class _Allocator >
  void swap (basic_stringbuf< _CharT, _Traits, _Allocator > &__x, basic_stringbuf< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void swap (basic_istringstream< _CharT, _Traits, _Allocator > &__x, basic_istringstream< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void swap (basic_ostringstream< _CharT, _Traits, _Allocator > &__x, basic_ostringstream< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void swap (basic_stringstream< _CharT, _Traits, _Allocator > &__x, basic_stringstream< _CharT, _Traits, _Allocator > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  void swap (multiset< _Key, _Compare, _Alloc > &__x, multiset< _Key, _Compare, _Alloc > &__y) noexcept(/*conditional */)
- template<typename _Key , typename _Compare , typename _Alloc >
  void swap (set< _Key, _Compare, _Alloc > &__x, set< _Key, _Compare, _Alloc > &__y) noexcept(/*conditional */)
- template<typename _Res >
  void **swap** (promise< _Res > &__x, promise< _Res > &__y) noexcept
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  void swap (multimap< _Key, _Tp, _Compare, _Alloc > &__x, multimap< _Key, _Tp, _Compare, _Alloc > &__y) noexcept(/*conditional */)
- template<class _CharT , class _Traits >
  void swap (basic_filebuf< _CharT, _Traits > &__x, basic_filebuf< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void swap (basic_ifstream< _CharT, _Traits > &__x, basic_ifstream< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void swap (basic_ofstream< _CharT, _Traits > &__x, basic_ofstream< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void swap (basic_fstream< _CharT, _Traits > &__x, basic_fstream< _CharT, _Traits > &__y)
- template<typename _Tp , typename _Alloc >
  void swap (forward_list< _Tp, _Alloc > &__lx, forward_list< _Tp, _Alloc > &__ly) noexcept(noexcept(__lx.swap(__ly)))
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  void swap (map< _Key, _Tp, _Compare, _Alloc > &__x, map< _Key, _Tp, _Compare, _Alloc > &__y) noexcept(/*conditional */)
- template<typename _Tp , _Lock_policy _Lp>
  void **swap** (__shared_ptr< _Tp, _Lp > &__a, __shared_ptr< _Tp, _Lp > &__b) noexcept
- template<typename _Res , typename... _ArgTypes>
  void swap (packaged_task< _Res(_ArgTypes...)> &__x, packaged_task< _Res(_ArgTypes...)> &__y) noexcept
- template<typename... _Elements>
  constexpr enable_if< __and_
  < __is_swappable< _Elements >
  ...>::value >::type swap (tuple< _Elements...> &__x, tuple< _Elements...> &__y) noexcept(noexcept(__x.swap(__y)))

- template<typename... _Elements>
  constexpr enable_if<!__and_
  < __is_swappable< _Elements >
  ...>::value >::type swap (tuple< _Elements...> &, tuple< _Elements...> &)=delete
- template<typename _Key , typename _Val , typename _KeyOfValue , typename _Compare , typename _Alloc >
  void **swap** (_Rb_tree< _Key, _Val, _KeyOfValue, _Compare, _Alloc > &__x, _Rb_tree< _Key, _Val, _KeyOfValue, _Compare, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  void **swap** (unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, unordered_set< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  void **swap** (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Tp , _Lock_policy _Lp>
  void **swap** (__weak_ptr< _Tp, _Lp > &__a, __weak_ptr< _Tp, _Lp > &__b) noexcept
- template<typename _Tp , typename _Alloc >
  void swap (vector< _Tp, _Alloc > &__x, vector< _Tp, _Alloc > &__y) noexcept(/*conditional */)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  void **swap** (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Tp , typename _Alloc >
  void swap (list< _Tp, _Alloc > &__x, list< _Tp, _Alloc > &__y) noexcept(/*conditional */)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  void **swap** (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Bi_iter , typename _Alloc >
  void swap (match_results< _Bi_iter, _Alloc > &__lhs, match_results< _Bi_iter, _Alloc > &__rhs) noexcept
- template<typename _Tp , typename _Alloc >
  void swap (deque< _Tp, _Alloc > &__x, deque< _Tp, _Alloc > &__y) noexcept(/*conditional */)
- template<typename _Tp >
  constexpr _Require< __not_
  < __is_tuple_like< _Tp >
  >, is_move_constructible< _Tp >
  , is_move_assignable< _Tp > > swap (_Tp &, _Tp &) noexcept(__and_< is_nothrow_move_constructible< _Tp >, is_nothrow_move_assignable< _Tp >>::value)
- template<typename _Tp , size_t _Nm>
  constexpr __enable_if_t
  < __is_swappable< _Tp >::value > swap (_Tp(&__a)[_Nm], _Tp(&__b)[_Nm]) noexcept(__is_nothrow_swappable< _Tp >::value)
- template<typename _CharT , typename _Traits , typename _Alloc >
  void swap (basic_string< _CharT, _Traits, _Alloc > &__lhs, basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept(/*conditional */)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator2 swap_ranges (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter2 **swap_ranges** (_FIter1, _FIter1, _FIter2)
- template<typename _Tp >
  complex< _Tp > tan (const complex< _Tp > &)
- template<class _Dom >
  _Expr< _UnClos< _Tan, _Expr,
  _Dom >, typename
  _Dom::value_type > **tan** (const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<typename _Tp >
  _Expr< _UnClos< _Tan,
  _ValArray, _Tp >, _Tp > **tan** (const valarray< _Tp > &__v)
- constexpr float **tan** (float __x)
- constexpr long double **tan** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **tan** (_Tp __x)
- template<typename _Tp >
  complex< _Tp > tanh (const complex< _Tp > &)
- template<typename _Tp >
  _Expr< _UnClos< _Tanh,
  _ValArray, _Tp >, _Tp > **tanh** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Tanh, _Expr,
  _Dom >, typename
  _Dom::value_type > **tanh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- constexpr float **tanh** (float __x)
- constexpr long double **tanh** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **tanh** (_Tp __x)
- void terminate () noexcept
- template<typename _Tp >
  void throw_with_nested (_Tp &&__t)
- template<typename... _Elements>
  constexpr tuple< _Elements &...> tie (_Elements &...__args) noexcept
- to_chars_result **to_chars** (char *__first, char *__last, char __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, signed char __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, unsigned char __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, signed short __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, unsigned short __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, signed int __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, unsigned int __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, signed long __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, unsigned long __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, signed long long __value, int __base=10)
- to_chars_result **to_chars** (char *__first, char *__last, unsigned long long __value, int __base=10)
- to_chars_result **to_chars** (char *, char *, bool, int=10)=delete
- string **to_string** (int __val)
- string **to_string** (unsigned __val)
- string **to_string** (long __val)
- string **to_string** (unsigned long __val)
- string **to_string** (long long __val)
- string **to_string** (unsigned long long __val)
- template<typename _CharT >
  _CharT tolower (_CharT __c, const locale &__loc)

- template<typename _CharT >
  _CharT toupper (_CharT __c, const locale &__loc)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  constexpr _OIter **transform** (_IIter, _IIter, _OIter, _UnaryOperation)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BinaryOperation >
  constexpr _OIter **transform** (_IIter1, _IIter1, _IIter2, _OIter, _BinaryOperation)
- template<typename _InputIterator , typename _OutputIterator , typename _UnaryOperation >
  constexpr _OutputIterator transform (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _UnaryOperation __unary_op)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator transform (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _Lock1 , typename _Lock2 , typename... _Lock3>
  int try_lock (_Lock1 &__l1, _Lock2 &__l2, _Lock3 &...__l3)
- template<typename... _Tpls, typename = typename enable_if<__and_<__is_tuple_like<_Tpls>...>::value>::type>
  constexpr auto tuple_cat (_Tpls &&...__tpls) -> typename __tuple_cat_result< _Tpls...>::__type
- bool uncaught_exception () noexcept
- int uncaught_exceptions () noexcept
- void undeclare_no_pointers (char *, size_t)
- template<typename _Tp >
  _Tp * undeclare_reachable (_Tp *__p)
- void unexpected ()
- template<typename _InputIterator , typename _ForwardIterator >
  _ForwardIterator uninitialized_copy (_InputIterator __first, _InputIterator __last, _ForwardIterator __result)
- template<typename _InputIterator , typename _Size , typename _ForwardIterator >
  _ForwardIterator uninitialized_copy_n (_InputIterator __first, _Size __n, _ForwardIterator __result)
- template<typename _ForwardIterator , typename _Tp >
  void uninitialized_fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__x)
- template<typename _ForwardIterator , typename _Size , typename _Tp >
  _ForwardIterator uninitialized_fill_n (_ForwardIterator __first, _Size __n, const _Tp &__x)
- template<typename _FIter >
  constexpr _FIter **unique** (_FIter, _FIter)
- template<typename _FIter , typename _BinaryPredicate >
  constexpr _FIter **unique** (_FIter, _FIter, _BinaryPredicate)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator unique (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator unique (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _IIter , typename _OIter >
  constexpr _OIter **unique_copy** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _BinaryPredicate >
  constexpr _OIter **unique_copy** (_IIter, _IIter, _OIter, _BinaryPredicate)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate >
  constexpr _OutputIterator unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred)
- ios_base & unitbuf (ios_base &__base)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **upper_bound** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr _FIter **upper_bound** (_FIter, _FIter, const _Tp &, _Compare)

- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- ios_base & uppercase (ios_base &__base)
- template<typename _Facet >
  const _Facet & use_facet (const locale &__loc)
- wchar_t * **wcschr** (wchar_t *__p, wchar_t __c)
- wchar_t * **wcspbrk** (wchar_t *__s1, const wchar_t *__s2)
- wchar_t * **wcsrchr** (wchar_t *__p, wchar_t __c)
- wchar_t * **wcsstr** (wchar_t *__s1, const wchar_t *__s2)
- wchar_t * **wmemchr** (wchar_t *__p, wchar_t __c, size_t __n)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & ws (basic_istream< _CharT, _Traits > &__is)

- template<size_t _Nb>
  bitset< _Nb > operator& (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > operator| (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > operator^ (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept

- template<class _CharT , class _Traits , size_t _Nb>
  std::basic_istream< _CharT, _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, bitset< _Nb > &__x)
- template<class _CharT , class _Traits , size_t _Nb>
  std::basic_ostream< _CharT, _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const bitset< _Nb > &__x)

- template<typename _Tp >
  constexpr complex< _Tp > operator+ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator+ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator+ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > operator- (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator- (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator- (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > operator* (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator* (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator* (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > operator/ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator/ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > operator/ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool operator== (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool operator== (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool operator== (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool operator!= (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool operator!= (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool operator!= (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & operator>> (basic_istream< _CharT, _Traits > &__in, _CharT &__c)
- template<class _Traits >
  basic_istream< char, _Traits > & operator>> (basic_istream< char, _Traits > &__in, unsigned char &__c)
- template<class _Traits >
  basic_istream< char, _Traits > & operator>> (basic_istream< char, _Traits > &__in, signed char &__c)

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & operator>> (basic_istream< _CharT, _Traits > &__in, _CharT *__s)
- template<>
  basic_istream< char > & operator>> (basic_istream< char > &__in, char *__s)
- template<class _Traits >
  basic_istream< char, _Traits > & operator>> (basic_istream< char, _Traits > &__in, unsigned char *__s)
- template<class _Traits >
  basic_istream< char, _Traits > & operator>> (basic_istream< char, _Traits > &__in, signed char *__s)

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__out, _CharT __c)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__out, char __c)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, char __c)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, signed char __c)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, unsigned char __c)

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s)

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & operator<< (basic_ostream< _CharT, _Traits > &__out, const char *__s)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, const char *__s)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, const signed char *__s)
- template<typename _Traits >
  basic_ostream< char, _Traits > & operator<< (basic_ostream< char, _Traits > &__out, const unsigned char *__s)

Matching, Searching, and Replacing

- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_match (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool regex_match (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , typename _Alloc , typename _Rx_traits >
  bool regex_match (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Ch_type , class _Rx_traits >
  bool regex_match (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Str_allocator , typename _Ch_type , typename _Rx_traits >
  bool regex_match (const basic_string< _Ch_type, _Ch_traits, _Str_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_search (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool regex_search (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , class _Alloc , class _Rx_traits >
  bool regex_search (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_type , typename _Rx_traits >
  bool regex_search (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _String_allocator , typename _Ch_type , typename _Rx_traits >
  bool regex_search (const basic_string< _Ch_type, _Ch_traits, _String_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)

- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  _Out_iter regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type >
  _Out_iter regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa , typename _Fst , typename _Fsa >
  basic_string< _Ch_type, _St, _Sa > regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _Fst, _Fsa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type, _St, _Sa > regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type > regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type >
  basic_string< _Ch_type > regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)

Variables

- static ios_base::Init __ioinit
- template<typename _Tp , typename _Alloc , typename... _Args>
  constexpr bool **__is_nothrow_uses_allocator_constructible_v**
- template<typename _Tp , typename _Alloc , typename... _Args>
  constexpr bool **__is_uses_allocator_constructible_v**
- std::is_reference **_GLIBCXX_DEPRECATED_SUGGEST**
- constexpr adopt_lock_t adopt_lock
- constexpr allocator_arg_t **allocator_arg**
- constexpr defer_lock_t defer_lock
- constexpr _Swallow_assign **ignore**
- template<typename _Tp >
  constexpr bool is_nothrow_swappable_v
- template<typename _Tp , typename _Up >
  constexpr bool is_nothrow_swappable_with_v
- template<typename _Tp >
  constexpr bool is_swappable_v
- template<typename _Tp , typename _Up >
  constexpr bool is_swappable_with_v
- error_code **make_error_code** (errc) noexcept
- const nothrow_t **nothrow**
- decltype(nullptr) typedef **nullptr_t**
- constexpr piecewise_construct_t piecewise_construct
- constexpr try_to_lock_t try_to_lock

Standard Stream Objects

The <iostream> header declares the eight standard stream objects. For other declarations, see http://gcc.gnu.org/onlinedocs/libstdc++/manual/io.html *and the I/O forward declarations*

They are required by default to cooperate with the global C library's `FILE` *streams, and to be available during program startup and termination. For more information, see the section of the manual linked to above.*

- istream cin
- ostream cout
- ostream cerr
- ostream clog
- wistream wcin
- wostream wcout
- wostream wcerr
- wostream wclog

3.10.1 Detailed Description

ISO C++ entities toplevel namespace is std. ISO C++ inline namespace for literal suffixes.

3.10.2 Typedef Documentation

3.10.2.1 template<typename _Ptr , typename _Tp > using std::__ptr_rebind = typedef typename pointer_traits<_Ptr>::template rebind<_Tp>

Convenience alias for rebinding pointers.

Definition at line 152 of file ptr_traits.h.

3.10.2.2 template<bool _Cache> using std::__umap_traits = typedef __detail::_Hashtable_traits<_Cache, false, true>

Base types for unordered_map.

Definition at line 40 of file unordered_map.h.

3.10.2.3 template<bool _Cache> using std::__ummap_traits = typedef __detail::_Hashtable_traits<_Cache, false, false>

Base types for unordered_multimap.

Definition at line 57 of file unordered_map.h.

3.10.2.4 template<bool _Cache> using std::__umset_traits = typedef __detail::_Hashtable_traits<_Cache, true, false>

Base types for unordered_multiset.

Definition at line 55 of file unordered_set.h.

3.10.2.5 template<bool _Cache> using std::__uset_traits = typedef __detail::_Hashtable_traits<_Cache, true, true>

Base types for unordered_set.

Definition at line 40 of file unordered_set.h.

3.10.2.6 template<size_t... _Idx> using std::index_sequence = typedef integer_sequence<size_t, _Idx...>

Alias template index_sequence.

Definition at line 345 of file utility.

3.10.2.7 template<typename... _Types> using std::index_sequence_for = typedef make_index_sequence<sizeof...(_Types)>

Alias template index_sequence_for.

Definition at line 353 of file utility.

3.10.2.8 template<size_t _Num> using std::make_index_sequence = typedef make_integer_sequence<size_t, _Num>

Alias template make_index_sequence.

Definition at line 349 of file utility.

3.10.2.9 template<typename _Tp , _Tp _Num> using std::make_integer_sequence = typedef integer_sequence<_Tp, __integer_pack(_Num)...>

Alias template make_integer_sequence.

Definition at line 338 of file utility.

3.10.2.10 typedef void(* std::new_handler)()

If you write your own error handler to be called by `new`, it must be of this type.

Definition at line 103 of file new.

3.10.2.11 typedef long long std::streamoff

Type used by fpos, char_traits<char>, and char_traits<wchar_t>.

In clauses 21.1.3.1 and 27.4.1 streamoff is described as an implementation defined type. Note: In versions of GCC up to and including GCC 3.3, streamoff was typedef long.

Definition at line 94 of file postypes.h.

3.10.2.12 typedef fpos<mbstate_t> std::streampos

File position for char streams.

Definition at line 234 of file postypes.h.

3.10.2.13 typedef ptrdiff_t std::streamsize

Integral type for I/O operation counts and buffer sizes.

Definition at line 98 of file postypes.h.

3.10.2.14 typedef fpos<mbstate_t> std::u16streampos

File position for char16_t streams.

Definition at line 245 of file postypes.h.

3.10.2.15 typedef fpos<mbstate_t> std::u32streampos

File position for char32_t streams.

Definition at line 247 of file postypes.h.

3.10.2.16 typedef fpos<mbstate_t> std::wstreampos

File position for wchar_t streams.

Definition at line 236 of file postypes.h.

3.10.3 Enumeration Type Documentation

3.10.3.1 anonymous enum

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html This controls some aspect of the sort routines.

Definition at line 1875 of file stl_algo.h.

3.10.3.2 enum std::chars_format [strong]

floating-point format for primitive numerical conversion

Definition at line 658 of file charconv.

3.10.3.3 enum std::float_denorm_style

Describes the denormalization for floating-point types.

These values represent the presence or absence of a variable number of exponent bits. This type is used in the std::numeric_limits class.

Enumerator

denorm_indeterminate Indeterminate at compile time whether denormalized values are allowed.

denorm_absent The type does not allow denormalized values.

denorm_present The type allows denormalized values.

Definition at line 182 of file limits.

3.10.3.4 enum std::float_round_style

Describes the rounding style for floating-point types.

This is used in the std::numeric_limits class.

Enumerator

round_toward_zero Intermediate.

round_to_nearest To zero.

round_toward_infinity To the nearest representable value.

round_toward_neg_infinity To infinity.

Definition at line 167 of file limits.

3.10.3.5 enum std::io_errc [strong]

I/O error code.

Definition at line 203 of file ios_base.h.

3.10.4 Function Documentation

3.10.4.1 template<typename _Alloc > __allocated_ptr<_Alloc> std::__allocate_guarded (_Alloc & __a)

Allocate space for a single object using __a.

Definition at line 95 of file allocated_ptr.h.

References std::allocator_traits< _Alloc >::allocate().

3.10.4.2 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::__final_insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)

This is a helper function for the sort routine.

Definition at line 1881 of file stl_algo.h.

References __insertion_sort(), and __unguarded_insertion_sort().

3.10.4.3 template<typename _InputIterator , typename _Predicate > constexpr _InputIterator std::__find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred, input_iterator_tag) [inline]

This is an overload used by find algos for the Input Iterator case.

Definition at line 1909 of file stl_algobase.h.

Referenced by __find_if_not(), __search_n_aux(), find(), and find_if().

3.10.4.4 template<typename _RandomAccessIterator , typename _Predicate > constexpr _RandomAccessIterator std::__find_if (_RandomAccessIterator __first, _RandomAccessIterator __last, _Predicate __pred, random_access_iterator_tag)

This is an overload used by find algos for the RAI case.

Definition at line 1921 of file stl_algobase.h.

3.10.4.5 template<typename _InputIterator , typename _Predicate > constexpr _InputIterator std::__find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred) [inline]

Provided for stable_partition to use.

Definition at line 103 of file stl_algo.h.

References __find_if(), and __iterator_category().

Referenced by find_if_not().

3.10.4.6 template<typename _InputIterator , typename _Predicate , typename _Distance > constexpr _InputIterator std::__find_if_not_n (_InputIterator __first, _Distance & __len, _Predicate __pred)

Like find_if_not(), but uses and updates a count of the remaining range length instead of comparing against an end iterator.

Definition at line 117 of file stl_algo.h.

Referenced by __stable_partition_adaptive().

3.10.4.7 template<typename _EuclideanRingElement > constexpr _EuclideanRingElement std::__gcd (_EuclideanRingElement __m, _EuclideanRingElement __n)

This is a helper function for the rotate algorithm specialized on RAIs. It returns the greatest common divisor of two integer values.

Definition at line 1219 of file stl_algo.h.

3.10.4.8 template<typename _IntType , typename _UniformRandomBitGenerator > pair<_IntType, _IntType> std::__gen_two_uniform_ints (_IntType __b0, _IntType __b1, _UniformRandomBitGenerator && __g)

Generate two uniformly distributed integers using a single distribution invocation.

Parameters

__b0	The upper bound for the first integer.
__b1	The upper bound for the second integer.
__g	A UniformRandomBitGenerator.

Returns

A pair (i, j) with i and j uniformly distributed over [0, __b0) and [0, __b1), respectively.

Requires: __b0 * __b1 <= __g.max() - __g.min().

Using uniform_int_distribution with a range that is very small relative to the range of the generator ends up wasting potentially expensively generated randomness, since uniform_int_distribution does not store leftover randomness between invocations.

If we know we want two integers in ranges that are sufficiently small, we can compose the ranges, use a single distribution invocation, and significantly reduce the waste.

Definition at line 3725 of file stl_algo.h.

Referenced by __sample(), and shuffle().

3.10.4.9 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::__heap_select (_RandomAccessIterator *__first,* _RandomAccessIterator *__middle,* _RandomAccessIterator *__last,* _Compare *__comp*)

This is a helper function for the sort routines.

Definition at line 1662 of file stl_algo.h.

3.10.4.10 template<typename _RandomAccessIterator , typename _Compare > void std::__inplace_stable_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*)

This is a helper function for the stable sorting routines.

Definition at line 2773 of file stl_algo.h.

References __insertion_sort(), and __merge_without_buffer().

3.10.4.11 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::__insertion_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*)

This is a helper function for the sort routine.

Definition at line 1839 of file stl_algo.h.

References __unguarded_linear_insert().

Referenced by __final_insertion_sort(), and __inplace_stable_sort().

3.10.4.12 template<typename _RandomAccessIterator , typename _Size , typename _Compare > constexpr void std::__introsort_loop (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Size *__depth_limit,* _Compare *__comp*)

This is a helper function for the sort routine.

Definition at line 1945 of file stl_algo.h.

References __unguarded_partition_pivot().

3.10.4.13 constexpr int std::__lg (int *__n*) [inline]

This is a helper function for the sort routines and for random.tcc.

Definition at line 1364 of file stl_algobase.h.

Referenced by nth_element(), std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >-::operator()(), and std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed().

3.10.4.14 template<typename _BidirectionalIterator , typename _Distance , typename _Pointer , typename _Compare > void std::__merge_adaptive (_BidirectionalIterator *__first,* _BidirectionalIterator *__middle,* _BidirectionalIterator *__last,* _Distance *__len1,* _Distance *__len2,* _Pointer *__buffer,* _Distance *__buffer_size,* _Compare *__comp*)

This is a helper function for the merge routines.

Definition at line 2427 of file stl_algo.h.

References __move_merge_adaptive(), __move_merge_adaptive_backward(), __rotate_adaptive(), advance(), and distance().

3.10.4.15 template<typename _BidirectionalIterator , typename _Distance , typename _Compare > void std::__merge_without_buffer (_BidirectionalIterator *__first,* _BidirectionalIterator *__middle,* _BidirectionalIterator *__last,* _Distance *__len1,* _Distance *__len2,* _Compare *__comp*)

This is a helper function for the merge routines.

Definition at line 2488 of file stl_algo.h.

References advance(), distance(), iter_swap(), and std::_V2::rotate().

Referenced by __inplace_stable_sort().

3.10.4.16 template<typename _Iterator , typename _Compare > constexpr void std::__move_median_to_first (_Iterator *__result,* _Iterator *__a,* _Iterator *__b,* _Iterator *__c,* _Compare *__comp*)

Swaps the median value of ∗__a, ∗__b and ∗__c under __comp to ∗__result.

Definition at line 79 of file stl_algo.h.

References iter_swap().

Referenced by __unguarded_partition_pivot().

3.10.4.17 template<typename _InputIterator , typename _OutputIterator , typename _Compare > _OutputIterator std::__move_merge (_InputIterator *__first1,* _InputIterator *__last1,* _InputIterator *__first2,* _InputIterator *__last2,* _OutputIterator *__result,* _Compare *__comp*)

This is a helper function for the __merge_sort_loop routines.

Definition at line 2650 of file stl_algo.h.

3.10.4.18 template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare > void std::__move_merge_adaptive (_InputIterator1 *__first1,* _InputIterator1 *__last1,* _InputIterator2 *__first2,* _InputIterator2 *__last2,* _OutputIterator *__result,* _Compare *__comp*)

This is a helper function for the __merge_adaptive routines.

Definition at line 2320 of file stl_algo.h.

Referenced by __merge_adaptive().

3.10.4.19 template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _BidirectionalIterator3 , typename _Compare > void std::__move_merge_adaptive_backward (_BidirectionalIterator1 *__first1,* _BidirectionalIterator1 *__last1,* _BidirectionalIterator2 *__first2,* _BidirectionalIterator2 *__last2,* _BidirectionalIterator3 *__result,* _Compare *__comp*)

This is a helper function for the __merge_adaptive routines.

Definition at line 2346 of file stl_algo.h.

Referenced by __merge_adaptive().

3.10.4.20 template<typename _ForwardIterator , typename _Predicate > constexpr _ForwardIterator std::__partition (_ForwardIterator *__first,* _ForwardIterator *__last,* _Predicate *__pred,* forward_iterator_tag)

This is a helper function...

Definition at line 1481 of file stl_algo.h.

References iter_swap().

Referenced by partition().

3.10.4.21 template<typename _BidirectionalIterator , typename _Predicate > constexpr _BidirectionalIterator std::__partition (_BidirectionalIterator *__first,* _BidirectionalIterator *__last,* _Predicate *__pred,* bidirectional_iterator_tag)

This is a helper function...

Definition at line 1507 of file stl_algo.h.

References iter_swap().

3.10.4.22 template<typename _BidirectionalIterator > constexpr void std::__reverse (_BidirectionalIterator *__first,* _BidirectionalIterator *__last,* bidirectional_iterator_tag)

This is an uglified reverse(_BidirectionalIterator, _BidirectionalIterator) overloaded for bidirectional iterators.

Definition at line 1115 of file stl_algo.h.

References iter_swap().

Referenced by reverse().

3.10.4.23 template<typename _RandomAccessIterator > constexpr void std::__reverse (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* random_access_iterator_tag)

This is an uglified reverse(_BidirectionalIterator, _BidirectionalIterator) overloaded for random access iterators.

Definition at line 1136 of file stl_algo.h.

References iter_swap().

3.10.4.24 template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _Distance > _BidirectionalIterator1 std::__rotate_adaptive (_BidirectionalIterator1 *__first,* _BidirectionalIterator1 *__middle,* _BidirectionalIterator1 *__last,* _Distance *__len1,* _Distance *__len2,* _BidirectionalIterator2 *__buffer,* _Distance *__buffer_size*)

This is a helper function for the merge routines.

Definition at line 2389 of file stl_algo.h.

References std::_V2::rotate().

Referenced by __merge_adaptive().

3.10.4.25 template<typename _InputIterator , typename _RandomAccessIterator , typename _Size , typename _UniformRandomBitGenerator > _RandomAccessIterator std::__sample (_InputIterator *__first,* _InputIterator *__last,* input_iterator_tag , _RandomAccessIterator *__out,* random_access_iterator_tag , _Size *__n,* _UniformRandomBitGenerator && *__g*)

Reservoir sampling algorithm.

Definition at line 5762 of file stl_algo.h.

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

3.10.4.26 template<typename _ForwardIterator , typename _OutputIterator , typename _Cat , typename _Size , typename _UniformRandomBitGenerator > _OutputIterator std::__sample (_ForwardIterator *__first,* _ForwardIterator *__last,* forward_iterator_tag , _OutputIterator *__out,* _Cat , _Size *__n,* _UniformRandomBitGenerator && *__g*)

Selection sampling algorithm.

Definition at line 5789 of file stl_algo.h.

References __gen_two_uniform_ints(), distance(), std::pair< _T1, _T2 >::first, min(), and std::pair< _T1, _T2 >::second.

3.10.4.27 template<typename _ForwardIterator , typename _Integer , typename _UnaryPredicate > constexpr _ForwardIterator std::__search_n_aux (_ForwardIterator *__first,* _ForwardIterator *__last,* _Integer *__count,* _UnaryPredicate *__unary_pred,* **std::forward_iterator_tag**)

This is an helper function for search_n overloaded for forward iterators.

Definition at line 194 of file stl_algo.h.

References __find_if().

3.10.4.28 template<typename _RandomAccessIter , typename _Integer , typename _UnaryPredicate > constexpr _RandomAccessIter std::__search_n_aux (_RandomAccessIter *__first,* _RandomAccessIter *__last,* _Integer *__count,* _UnaryPredicate *__unary_pred,* **std::random_access_iterator_tag**)

This is an helper function for search_n overloaded for random access iterators.

Definition at line 227 of file stl_algo.h.

3.10.4.29 template<typename _ForwardIterator , typename _Pointer , typename _Predicate , typename _Distance > _ForwardIterator std::__stable_partition_adaptive (_ForwardIterator *__first,* _ForwardIterator *__last,* _Predicate *__pred,* _Distance *__len,* _Pointer *__buffer,* _Distance *__buffer_size*)

This is a helper function... Requires __first != __last and !__pred(__first) and __len == distance(__first, __last).

!__pred(__first) allows us to guarantee that we don't move-assign an element onto itself.

Definition at line 1543 of file stl_algo.h.

References __find_if_not_n(), advance(), and std::_V2::rotate().

3.10.4.30 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::__unguarded_insertion_sort (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

This is a helper function for the sort routine.

Definition at line 1863 of file stl_algo.h.

References __unguarded_linear_insert().

Referenced by __final_insertion_sort().

3.10.4.31 template<typename _RandomAccessIterator , typename _Compare > constexpr void std::__unguarded_linear_insert (_RandomAccessIterator *__last,* _Compare *__comp*)

This is a helper function for the sort routine.

Definition at line 1819 of file stl_algo.h.

Referenced by __insertion_sort(), and __unguarded_insertion_sort().

3.10.4.32 template<typename _RandomAccessIterator , typename _Compare > constexpr _RandomAccessIterator std::__unguarded_partition (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _RandomAccessIterator *__pivot,* _Compare *__comp*)

This is a helper function...

Definition at line 1898 of file stl_algo.h.

References iter_swap().

Referenced by __unguarded_partition_pivot().

3.10.4.33 template<typename _RandomAccessIterator , typename _Compare > constexpr _RandomAccessIterator std::__unguarded_partition_pivot (_RandomAccessIterator *__first,* _RandomAccessIterator *__last,* _Compare *__comp*) [inline]

This is a helper function...

Definition at line 1920 of file stl_algo.h.

References __move_median_to_first(), and __unguarded_partition().

Referenced by __introsort_loop().

3.10.4.34 template<typename _ForwardIterator , typename _OutputIterator , typename _BinaryPredicate > constexpr _OutputIterator std::__unique_copy (_ForwardIterator *__first,* _ForwardIterator *__last,* _OutputIterator *__result,* _BinaryPredicate *__binary_pred,* forward_iterator_tag , output_iterator_tag)

This is an uglified unique_copy(_InputIterator, _InputIterator, _OutputIterator, _BinaryPredicate) overloaded for forward iterators and output iterator as result.

Definition at line 1029 of file stl_algo.h.

Referenced by unique_copy().

3.10.4.35 template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate > constexpr _OutputIterator std::__unique_copy (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* _BinaryPredicate *__binary_pred,* input_iterator_tag , output_iterator_tag)

This is an uglified unique_copy(_InputIterator, _InputIterator, _OutputIterator, _BinaryPredicate) overloaded for input iterators and output iterator as result.

Definition at line 1059 of file stl_algo.h.

3.10.4.36 template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate > constexpr _ForwardIterator std::__unique_copy (_InputIterator *__first,* _InputIterator *__last,* _ForwardIterator *__result,* _BinaryPredicate *__binary_pred,* input_iterator_tag , forward_iterator_tag)

This is an uglified unique_copy(_InputIterator, _InputIterator, _OutputIterator, _BinaryPredicate) overloaded for input iterators and forward iterator as result.

Definition at line 1092 of file stl_algo.h.

3.10.4.37 template<typename _Tp , typename... _Args> void std::_Construct (_Tp * *__p,* _Args &&... *__args*) [inline]

Constructs an object in existing memory by invoking an allocated object's constructor with an initializer.

Definition at line 108 of file stl_construct.h.

3.10.4.38 template<typename _ForwardIterator > constexpr void std::_Destroy (_ForwardIterator *__first,* _ForwardIterator *__last*) [inline]

Destroy a range of objects. If the value_type of the object has a trivial destructor, the compiler should optimize all of this away, otherwise the objects' destructors must be invoked.

Definition at line 171 of file stl_construct.h.

3.10.4.39 template<typename _Tp > constexpr void std::_Destroy (_Tp * *__pointer*) [inline]

Destroy the object pointed to by a pointer type.

Definition at line 135 of file stl_construct.h.

3.10.4.40 template<typename _ForwardIterator , typename _Allocator > void std::_Destroy (_ForwardIterator *__first,* _ForwardIterator *__last,* _Allocator & *__alloc*)

Destroy a range of objects using the supplied allocator. For non-default allocators we do not optimize away invocation of destroy() even if _Tp has a trivial destructor.

Definition at line 721 of file bits/alloc_traits.h.

References __addressof(), and std::allocator_traits< _Alloc >::destroy().

Referenced by std::deque< _Tp, _Alloc >::_M_fill_initialize(), std::deque< _Tp, _Alloc >::_M_range_initialize(), std::vector< _Tp, _Alloc >::operator=(), std::vector< _Tp, _Alloc >::reserve(), and std::vector< block_type, allocator_type >::~vector().

3.10.4.41 template<typename _ForwardIterator , typename _Size > constexpr _ForwardIterator std::_Destroy_n (_ForwardIterator *__first,* _Size *__count*) [inline]

Destroy a range of objects. If the value_type of the object has a trivial destructor, the compiler should optimize all of this away, otherwise the objects' destructors must be invoked.

Definition at line 220 of file stl_construct.h.

3.10.4.42 template<typename _Tp > std::complex< _Tp > std::acos (const std::complex< _Tp > & *__z*) [inline]

acos(__z) [8.1.2].

Definition at line 1634 of file complex.

3.10.4.43 template<typename _Tp > std::complex< _Tp > std::acosh (const std::complex< _Tp > & *__z*) [inline]

acosh(__z) [8.1.5].

Definition at line 1750 of file complex.

3.10.4.44 template<typename _InputIterator , typename _Distance > constexpr void std::advance (_InputIterator & *__i,* _Distance *__n*) [inline]

A generalization of pointer arithmetic.

Parameters

__i	An input iterator.
__n	The *delta* by which to change __i.

Returns

Nothing.

This increments i by n. For bidirectional and random access iterators, __n may be negative, in which case __i is decremented.

For random access iterators, this uses their + and − operations and are constant time. For other iterator classes they are linear time.

Definition at line 202 of file stl_iterator_base_funcs.h.

References __iterator_category().

Referenced by __merge_adaptive(), __merge_without_buffer(), __stable_partition_adaptive(), std::deque< _Tp, _Alloc >::_M_range_initialize(), __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_child(), __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_child(), and partition_point().

3.10.4.45 template<typename _Tp > __gnu_cxx::__promote<_Tp>::__type std::arg (_Tp __x) [inline]

Additional overloads [8.1.9].

Definition at line 1848 of file complex.

References arg().

3.10.4.46 template<typename _Tp > std::complex< _Tp > std::asin (const std::complex< _Tp > & __z) [inline]

asin(__z) [8.1.3].

Definition at line 1670 of file complex.

3.10.4.47 template<typename _Tp > std::complex< _Tp > std::asinh (const std::complex< _Tp > & __z) [inline]

asinh(__z) [8.1.6].

Definition at line 1789 of file complex.

3.10.4.48 template<typename _Tp > std::complex< _Tp > std::atan (const std::complex< _Tp > & __z) [inline]

atan(__z) [8.1.4].

Definition at line 1714 of file complex.

3.10.4.49 template<typename _Tp > std::complex< _Tp > std::atanh (const std::complex< _Tp > & __z) [inline]

atanh(__z) [8.1.7].

Definition at line 1833 of file complex.

3.10.4.50 template<typename _Container > constexpr auto std::begin (_Container & __cont) -> decltype(__cont.begin()) [inline]

Return an iterator pointing to the first element of the container.

Parameters

__cont	Container.

Definition at line 51 of file range_access.h.

3.10.4.51 template<typename _Container > constexpr auto std::begin (const _Container & *__cont*) -> decltype(__cont.begin()) [inline]

Return an iterator pointing to the first element of the const container.

Parameters

__cont	Container.

Definition at line 61 of file range_access.h.

3.10.4.52 template<typename _Tp , size_t _Nm> constexpr _Tp* std::begin (_Tp(&) *__arr[_Nm]*) [inline]

Return an iterator pointing to the first element of the array.

Parameters

__arr	Array.

Definition at line 90 of file range_access.h.

3.10.4.53 ios_base& std::boolalpha (ios_base & *__base*) [inline]

Calls base.setf(ios_base::boolalpha).

Definition at line 908 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::boolalpha, and std::ios_base::setf().

3.10.4.54 template<typename _Container > constexpr auto std::cbegin (const _Container & *__cont*) -> decltype(std::begin(__cont)) [inline], [noexcept]

Return an iterator pointing to the first element of the const container.

Parameters

__cont	Container.

Definition at line 119 of file range_access.h.

References begin().

Referenced by std::vector< _Tp, _Alloc >::insert().

3.10.4.55 template<typename _Container > constexpr auto std::cend (const _Container & *__cont*) -> decltype(std::end(__cont)) [inline], [noexcept]

Return an iterator pointing to one past the last element of the const container.

Parameters

__cont	Container.

Definition at line 130 of file range_access.h.

References end().

3.10.4.56 template<typename _Tp , typename _Tp1 , _Lock_policy _Lp> __shared_ptr<_Tp, _Lp> std::const_pointer_cast (const __shared_ptr< _Tp1, _Lp > & *__r*) [inline], [noexcept]

const_pointer_cast

Definition at line 1588 of file shared_ptr_base.h.

3.10.4.57 template<typename _Container > constexpr auto std::crbegin (const _Container & *__cont*) -> decltype(std::rbegin(__cont)) [inline]

Return a reverse iterator pointing to the last element of the const container.

Parameters

__cont	Container.

Definition at line 221 of file range_access.h.

References rbegin().

3.10.4.58 template<typename _Container > constexpr auto std::crend (const _Container & *__cont*) -> decltype(std::rend(__cont)) [inline]

Return a reverse iterator pointing one past the first element of the const container.

Parameters

__cont	Container.

Definition at line 231 of file range_access.h.

References rend().

3.10.4.59 ios_base& std::dec (ios_base & *__base*) [inline]

Calls base.setf(ios_base::dec, ios_base::basefield).

Definition at line 1046 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::basefield, std::ios_base::dec, and std::ios_base::setf().

Referenced by operator>>().

3.10.4.60 ios_base& std::defaultfloat (ios_base & *__base*) [inline]

Calls `base.unsetf(ios_base::floatfield)`

Definition at line 1099 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::floatfield, and std::ios_base::unsetf().

3.10.4.61 template<typename _InputIterator > constexpr iterator_traits<_InputIterator>::difference_type std::distance (_InputIterator *__first,* _InputIterator *__last*) [inline]

A generalization of pointer arithmetic.

Parameters

__first	An input iterator.

__last	An input iterator.

Returns

The distance between them.

Returns n such that __first + n == __last. This requires that __last must be reachable from __first. Note that n may be negative.

For random access iterators, this uses their + and − operations and are constant time. For other iterator classes they are linear time.

Definition at line 138 of file stl_iterator_base_funcs.h.

References __iterator_category().

Referenced by __merge_adaptive(), __merge_without_buffer(), __sample(), std::deque< _Tp, _Alloc >::_M_range_initialize(), is_heap(), is_heap_until(), std::sub_match< _Bi_iter >::length(), std::list< _Tp, _Alloc >::merge(), __gnu_parallel::multiseq_partition(), __gnu_parallel::multiseq_selection(), __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::num_children(), partition_point(), std::match_results< _Bi_iter >::position(), and __gnu_cxx::random_sample_n().

3.10.4.62 template<typename _Tp , typename _Tp1 , _Lock_policy _Lp> __shared_ptr<_Tp, _Lp> std::dynamic_pointer_cast (const __shared_ptr< _Tp1, _Lp > & *__r*) [inline], [noexcept]

dynamic_pointer_cast

Definition at line 1601 of file shared_ptr_base.h.

3.10.4.63 template<typename _Container > constexpr auto std::end (_Container & *__cont*) -> decltype(__cont.end()) [inline]

Return an iterator pointing to one past the last element of the container.

Parameters

__cont	Container.

Definition at line 71 of file range_access.h.

3.10.4.64 template<typename _Container > constexpr auto std::end (const _Container & *__cont*) -> decltype(__cont.end()) [inline]

Return an iterator pointing to one past the last element of the const container.

Parameters

__cont	Container.

Definition at line 81 of file range_access.h.

3.10.4.65 template<typename _Tp , size_t _Nm> constexpr _Tp* std::end (_Tp(&) *__arr[_Nm]*) [inline]

Return an iterator pointing to one past the last element of the array.

Parameters

__arr	Array.

Definition at line 100 of file range_access.h.

3.10.4.66 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::endl (basic_ostream< _CharT, _Traits > & *__os*) [inline]

Write a newline and flush the stream.

This manipulator is often mistakenly used when a simple newline is desired, leading to poor buffering performance. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more on this subject.

Definition at line 681 of file ostream.

References flush().

3.10.4.67 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::ends (basic_ostream< _CharT, _Traits > & *__os*) [inline]

Write a null character into the output sequence.

Null character is `CharT()` by definition. For CharT of `char`, this correctly writes the ASCII `NUL` character string terminator.

Definition at line 693 of file ostream.

3.10.4.68 template<typename _Tp , typename _Up = _Tp> constexpr _Tp std::exchange (_Tp & *__obj*, _Up && *__new_val*) [inline]

Assign `__new_val` to `__obj` and return its previous value.

Definition at line 291 of file utility.

3.10.4.69 template<typename _Tp > _Tp std::fabs (const std::complex< _Tp > & *__z*) [inline]

fabs(__z) [8.1.8].

Definition at line 1842 of file complex.

References abs().

Referenced by std::tr1::fabs().

3.10.4.70 ios_base& std::fixed (ios_base & *__base*) [inline]

Calls base.setf(ios_base::fixed, ios_base::floatfield).

Definition at line 1071 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::fixed, std::ios_base::floatfield, and std::ios_base::setf().

3.10.4.71 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::flush (basic_ostream< _CharT, _Traits > & *__os*) [inline]

Flushes the output stream.

This manipulator simply calls the stream's `flush()` member function.

Definition at line 703 of file ostream.

Referenced by endl().

3.10.4.72 template<typename _Tp > __detail::__integer_from_chars_result_type<_Tp> std::from_chars (const char * __first, const char * __last, _Tp & __value, int __base = 10)

std::from_chars for integral types.

Definition at line 595 of file charconv.

References std::__detail::__from_chars_alnum(), std::__detail::__from_chars_binary(), and std::__detail::__from_chars_digit().

3.10.4.73 template<typename _MoneyT > _Get_money<_MoneyT> std::get_money (_MoneyT & __mon, bool __intl = false) [inline]

Extended manipulator for extracting money.

Parameters

__mon	Either long double or a specialization of `basic_string`.
__intl	A bool indicating whether international format is to be used.

Sent to a stream object, this manipulator extracts *__mon*.

Definition at line 259 of file iomanip.

3.10.4.74 new_handler std::get_new_handler ( ) [noexcept]

Return the current new handler.

3.10.4.75 template<typename _Tp > pair<_Tp*, ptrdiff_t> std::get_temporary_buffer (ptrdiff_t __len) [noexcept]

Allocates a temporary buffer.

Parameters

__len	The number of objects of type Tp.

Returns

See full description.

Reinventing the wheel, but this time with prettier spokes!

This function tries to obtain storage for `__len` adjacent Tp objects. The objects themselves are not constructed, of course. A pair<> is returned containing *the buffer s address and capacity (in the units of sizeof(_Tp)), or a pair of 0 values if no storage can be obtained.* Note that the capacity obtained may be less than that requested if the memory is unavailable; you should compare len with the .second return value.

Provides the nothrow exception guarantee.

Definition at line 100 of file stl_tempbuf.h.

3.10.4.76 template<typename _CharT > _Get_time<_CharT> std::get_time (std::tm * __tmb, const _CharT * __fmt) [inline]

Extended manipulator for extracting time.

This manipulator uses time_get::get to extract time. [ext.manip]

Parameters

__tmb	struct to extract the time data to.
__fmt	format string.

Definition at line 413 of file iomanip.

3.10.4.77 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > & *__is*, __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, _CharT *__delim*)

Read a line from stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.
__delim	Character marking end of line.

Returns

Reference to the input stream.

Stores characters from *__is* into *__str* until *__delim* is found, the end of the stream is encountered, or str.max_size() is reached. If is.width() is non-zero, that is the limit on the number of characters stored into *__str*. Any previous contents of *__str* are erased. If *delim* was encountered, it is extracted but not stored into *__str*.

Definition at line 627 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::erase(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::max_size(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

3.10.4.78 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream<_CharT, _Traits>& std::getline (basic_istream< _CharT, _Traits > & *__is*, __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Read a line from stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.

Returns

Reference to the input stream.

Stores characters from is into *__str* until '

' is found, the end of the stream is encountered, or str.max_size() is reached. If is.width() is non-zero, that is the limit on the number of characters stored into *__str*. Any previous contents of *__str* are erased. If end of line was encountered, it is extracted but not stored into *__str*.

Definition at line 2677 of file vstring.h.

References getline(), and std::basic_ios< _CharT, _Traits >::widen().

3.10.4.79 template<typename _CharT , typename _Traits , typename _Alloc > basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > & *__is,* basic_string< _CharT, _Traits, _Alloc > & *__str,* _CharT *__delim*)

Read a line from stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.
__delim	Character marking end of line.

Returns

Reference to the input stream.

Stores characters from *__is* into *__str* until *__delim* is found, the end of the stream is encountered, or str.max_size() is reached. Any previous contents of *__str* are erased. If *__delim* is encountered, it is extracted but not stored into *__str*.

Definition at line 1540 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::erase(), std::basic_string< _CharT, _Traits, _Alloc >::max_size(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

Referenced by getline().

3.10.4.80 template<typename _CharT , typename _Traits , typename _Alloc > basic_istream<_CharT, _Traits>& std::getline (basic_istream< _CharT, _Traits > & *__is,* basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Read a line from stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.

Returns

Reference to the input stream.

Stores characters from is into *__str* until '

' is found, the end of the stream is encountered, or str.max_size() is reached. Any previous contents of *__str* are erased. If end of line is encountered, it is extracted but not stored into *__str*.

Definition at line 6508 of file basic_string.h.

References getline(), and std::basic_ios< _CharT, _Traits >::widen().

3.10.4.81 template<typename _CharT , typename _Traits , typename _Alloc > basic_istream<_CharT, _Traits>& std::getline (basic_istream< _CharT, _Traits > && *__is,* basic_string< _CharT, _Traits, _Alloc > & *__str,* _CharT *__delim*) [inline]

Read a line from an rvalue stream into a string.

Definition at line 6516 of file basic_string.h.

References getline().

3.10.4.82 template<typename _CharT , typename _Traits , typename _Alloc > basic_istream<_CharT, _Traits>& std::getline (basic_istream< _CharT, _Traits > && *__is,* basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Read a line from an rvalue stream into a string.

Definition at line 6523 of file basic_string.h.

References getline().

3.10.4.83 ios_base& std::hex (ios_base & *__base*) [inline]

Calls base.setf(ios_base::hex, ios_base::basefield).

Definition at line 1054 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::basefield, std::ios_base::hex, and std::ios_base::setf().

3.10.4.84 ios_base& std::hexfloat (ios_base & *__base*) [inline]

Calls base.setf(ios_base::fixed|ios_basescientific, ios_base::floatfield)

Definition at line 1091 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::fixed, std::ios_base::floatfield, std::ios_base::scientific, and std::ios_base::setf().

3.10.4.85 ios_base& std::internal (ios_base & *__base*) [inline]

Calls base.setf(ios_base::internal, ios_base::adjustfield).

Definition at line 1021 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::adjustfield, and std::ios_base::internal.

3.10.4.86 template<typename _CharT > bool std::isalnum (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::alnum, __c).

Definition at line 2623 of file locale_facets.h.

3.10.4.87 template<typename _CharT > bool std::isalpha (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::alpha, __c).

Definition at line 2599 of file locale_facets.h.

3.10.4.88 template<typename _CharT > bool std::isblank (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::blank, __c).

Definition at line 2636 of file locale_facets.h.

3.10.4.89 template<typename _CharT > bool std::iscntrl (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::cntrl, __c).

Definition at line 2581 of file locale_facets.h.

3.10.4.90 template<typename _CharT > bool std::isdigit (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::digit, __c).

Definition at line 2605 of file locale_facets.h.

Referenced by std::__detail::__from_chars_alnum().

3.10.4.91 template<typename _CharT > bool std::isgraph (_CharT *__c,* const locale & *__loc*) [inline]

Convenience interface to ctype.is(ctype_base::graph, __c).

Definition at line 2629 of file locale_facets.h.

3.10.4.92 template<typename _CharT > bool std::islower (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::lower, __c).

Definition at line 2593 of file locale_facets.h.

3.10.4.93 template<typename _CharT > bool std::isprint (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::print, __c).

Definition at line 2575 of file locale_facets.h.

3.10.4.94 template<typename _CharT > bool std::ispunct (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::punct, __c).

Definition at line 2611 of file locale_facets.h.

3.10.4.95 template<typename _CharT > bool std::isspace (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::space, __c).

Definition at line 2569 of file locale_facets.h.

3.10.4.96 template<typename _CharT > bool std::isupper (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::upper, __c).

Definition at line 2587 of file locale_facets.h.

3.10.4.97 template<typename _CharT > bool std::isxdigit (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.is(ctype_base::xdigit, __c).

Definition at line 2617 of file locale_facets.h.

3.10.4.98 ios_base& std::left (ios_base & __base) [inline]

Calls base.setf(ios_base::left, ios_base::adjustfield).

Definition at line 1029 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::adjustfield, std::ios_base::left, and std::ios_base::setf().

Referenced by operator<<().

3.10.4.99 ios_base& std::noboolalpha (ios_base & __base) [inline]

Calls base.unsetf(ios_base::boolalpha).

Definition at line 916 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::boolalpha, and std::ios_base::unsetf().

3.10.4.100 ios_base& std::noshowbase (ios_base & __base) [inline]

Calls base.unsetf(ios_base::showbase).

Definition at line 932 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::showbase, and std::ios_base::unsetf().

3.10.4.101 ios_base& std::noshowpoint (ios_base & __base) [inline]

Calls base.unsetf(ios_base::showpoint).

Definition at line 948 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::showpoint, and std::ios_base::unsetf().

3.10.4.102 ios_base& std::noshowpos (ios_base & __base) [inline]

Calls base.unsetf(ios_base::showpos).

Definition at line 964 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::showpos, and std::ios_base::unsetf().

3.10.4.103 ios_base& std::noskipws (ios_base & __base) [inline]

Calls base.unsetf(ios_base::skipws).

Definition at line 980 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::skipws, and std::ios_base::unsetf().

3.10.4.104 ios_base& std::nounitbuf (ios_base & __base) [inline]

Calls base.unsetf(ios_base::unitbuf).

Definition at line 1012 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::unitbuf, and std::ios_base::unsetf().

3.10.4.105 ios_base& std::nouppercase (ios_base & __base) [inline]

Calls base.unsetf(ios_base::uppercase).

Definition at line 996 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::unsetf(), and std::ios_base::uppercase.

3.10.4.106 ios_base& std::oct (ios_base & __base) [inline]

Calls base.setf(ios_base::oct, ios_base::basefield).

Definition at line 1062 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::basefield, std::ios_base::oct, and std::ios_base::setf().

3.10.4.107 template<typename _Tp , typename _Seq > bool std::operator!= (const stack< _Tp, _Seq > & __x, const stack< _Tp, _Seq > & __y) [inline]

Based on operator==.

Definition at line 343 of file stl_stack.h.

3.10.4.108 template<typename _Tp , typename _Seq > bool std::operator!= (const queue< _Tp, _Seq > & __x, const queue< _Tp, _Seq > & __y) [inline]

Based on operator==.

Definition at line 368 of file stl_queue.h.

3.10.4.109 template<typename _Res , typename... _Args> bool std::operator!= (const function< _Res(_Args...)> & __f, nullptr_t) [inline], [noexcept]

Compares a polymorphic function object wrapper against 0 (the NULL pointer).

Returns

`false` if the wrapper has no target, `true` otherwise

This function will not throw an exception.

Definition at line 699 of file std_function.h.

3.10.4.110 template<typename _Res , typename... _Args> bool std::operator!= (nullptr_t , const function< _Res(_Args...)> & __f) [inline], [noexcept]

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

Definition at line 705 of file std_function.h.

3.10.4.111 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator!= (const multiset< _Key, _Compare, _Alloc > & __x, const multiset< _Key, _Compare, _Alloc > & __y) [inline]

Returns !(x == y).

Definition at line 1016 of file stl_multiset.h.

3.10.4.112 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator!= (const set< _Key, _Compare, _Alloc > & __x, const set< _Key, _Compare, _Alloc > & __y) [inline]

Returns !(x == y).

Definition at line 1030 of file stl_set.h.

3.10.4.113 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator!= (const multimap< _Key, _Tp, _Compare, _Alloc > & __x, const multimap< _Key, _Tp, _Compare, _Alloc > & __y) [inline]

Based on operator==.

Definition at line 1173 of file stl_multimap.h.

3.10.4.114 template<typename _Tp , typename _Alloc > bool std::operator!= (const forward_list< _Tp, _Alloc > & __lx, const forward_list< _Tp, _Alloc > & __ly) [inline]

Based on operator==.

Definition at line 1476 of file forward_list.h.

3.10.4.115 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator!= (const map< _Key, _Tp, _Compare, _Alloc > & __x, const map< _Key, _Tp, _Compare, _Alloc > & __y) [inline]

Based on operator==.

Definition at line 1508 of file stl_map.h.

3.10.4.116 template<typename _Tp , typename _Alloc > bool std::operator!= (const vector< _Tp, _Alloc > & __x, const vector< _Tp, _Alloc > & __y) [inline]

Based on operator==.

Definition at line 1937 of file stl_vector.h.

3.10.4.117 template<typename _Tp , typename _Alloc > bool std::operator!= (const list< _Tp, _Alloc > & __x, const list< _Tp, _Alloc > & __y) [inline]

Based on operator==.

Definition at line 2057 of file stl_list.h.

3.10.4.118 template<typename _Tp , typename _Alloc > bool std::operator!= (const deque< _Tp, _Alloc > & __x, const deque< _Tp, _Alloc > & __y) [inline]

Based on operator==.

Definition at line 2286 of file stl_deque.h.

3.10.4.119 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator!= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline], [noexcept]

Test difference of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs.compare*(*__rhs*) != 0. False otherwise.

Definition at line 6239 of file basic_string.h.

3.10.4.120 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator!= (const _CharT * __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline]

Test difference of C string and string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__rhs.compare*(*__lhs*) != 0. False otherwise.

Definition at line 6252 of file basic_string.h.

3.10.4.121 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator!= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const _CharT * __rhs) [inline]

Test difference of string and C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs.compare*(*__rhs*) != 0. False otherwise.

Definition at line 6264 of file basic_string.h.

3.10.4.122 template<size_t _Nb> bitset<_Nb> std::operator& (const bitset< _Nb > & *__x*, const bitset< _Nb > & *__y*) [inline], [noexcept]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1435 of file bitset.

3.10.4.123 template<typename _CharT , typename _Traits , typename _Alloc > basic_string<_CharT, _Traits, _Alloc> std::operator+ (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*)

Concatenate two strings.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with value of *__lhs* followed by *__rhs*.

Definition at line 6032 of file basic_string.h.

3.10.4.124 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > std::operator+ (const _CharT * *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*)

Concatenate C string and string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with value of *__lhs* followed by *__rhs*.

Definition at line 1152 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::get_allocator(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

3.10.4.125 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > std::operator+ (_CharT *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*)

Concatenate character and string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 1172 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::get_allocator(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

3.10.4.126 template<typename _CharT , typename _Traits , typename _Alloc > basic_string<_CharT, _Traits, _Alloc> std::operator+ (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const _CharT * *__rhs*) [inline]

Concatenate string and C string.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 6069 of file basic_string.h.

3.10.4.127 template<typename _CharT , typename _Traits , typename _Alloc > basic_string<_CharT, _Traits, _Alloc> std::operator+ (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, _CharT *__rhs*) [inline]

Concatenate string and character.

Parameters

__lhs	First string.
__rhs	Last string.

Returns

New string with *__lhs* followed by *__rhs*.

Definition at line 6085 of file basic_string.h.

3.10.4.128 template<typename _Tp , typename _Seq > bool std::operator< (const stack< _Tp, _Seq > & __x, const stack< _Tp, _Seq > & __y) [inline]

Stack ordering relation.

Parameters

__x	A stack.
__y	A stack of the same type as *x*.

Returns

True iff *x* is lexicographically less than *__y*.

This is an total ordering relation. Complexity and semantics depend on the underlying sequence type, but the expected rules are: this relation is linear in the size of the sequences, the elements must be comparable with <, and std-::lexicographical_compare() is usually used to make the determination.

Definition at line 337 of file stl_stack.h.

3.10.4.129 template<typename _Tp , typename _Seq > bool std::operator< (const queue< _Tp, _Seq > & *__x*, const queue< _Tp, _Seq > & *__y*) [inline]

Queue ordering relation.

Parameters

__x	A queue.
__y	A queue of the same type as *x*.

Returns

True iff *__x* is lexicographically less than *__y*.

This is an total ordering relation. Complexity and semantics depend on the underlying sequence type, but the expected rules are: this relation is linear in the size of the sequences, the elements must be comparable with <, and std-::lexicographical_compare() is usually used to make the determination.

Definition at line 362 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

3.10.4.130 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator< (const multiset< _Key, _Compare, _Alloc > & *__x*, const multiset< _Key, _Compare, _Alloc > & *__y*) [inline]

Multiset ordering relation.

Parameters

__x	A multiset.
__y	A multiset of the same type as *__x*.

Returns

True iff *__x* is lexicographically less than *__y*.

This is a total ordering relation. It is linear in the size of the sets. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1009 of file stl_multiset.h.

3.10.4.131 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator< (const set< _Key, _Compare, _Alloc > & *__x*, const set< _Key, _Compare, _Alloc > & *__y*) [inline]

Set ordering relation.

Parameters

__x	A set.
__y	A set of the same type as *x*.

Returns

True iff *__x* is lexicographically less than *__y*.

This is a total ordering relation. It is linear in the size of the sets. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1023 of file stl_set.h.

3.10.4.132 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator< (const multimap< _Key, _Tp, _Compare, _Alloc > & *__x*, const multimap< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Multimap ordering relation.

Parameters

__x	A multimap.
__y	A multimap of the same type as *__x*.

Returns

True iff *x* is lexicographically less than *y*.

This is a total ordering relation. It is linear in the size of the multimaps. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1166 of file stl_multimap.h.

3.10.4.133 template<typename _Tp , typename _Alloc > bool std::operator< (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*) [inline]

Forward list ordering relation.

Parameters

__lx	A forward_list.
__ly	A forward_list of the same type as *__lx*.

Returns

True iff *__lx* is lexicographically less than *__ly*.

This is a total ordering relation. It is linear in the number of elements of the forward lists. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1468 of file forward_list.h.

References lexicographical_compare().

3.10.4.134 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator< (const map< _Key, _Tp, _Compare, _Alloc > & __x, const map< _Key, _Tp, _Compare, _Alloc > & __y) [inline]

Map ordering relation.

Parameters

__x	A map.
__y	A map of the same type as *x*.

Returns

True iff *x* is lexicographically less than *y*.

This is a total ordering relation. It is linear in the size of the maps. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1501 of file stl_map.h.

3.10.4.135 template<typename _Tp , typename _Alloc > bool std::operator< (const vector< _Tp, _Alloc > & *__x*, const vector< _Tp, _Alloc > & *__y*) [inline]

Vector ordering relation.

Parameters

__x	A vector.
__y	A vector of the same type as *__x*.

Returns

True iff *__x* is lexicographically less than *__y*.

This is a total ordering relation. It is linear in the size of the vectors. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 1930 of file stl_vector.h.

References lexicographical_compare().

3.10.4.136 template<typename _Tp , typename _Alloc > bool std::operator< (const list< _Tp, _Alloc > & *__x*, const list< _Tp, _Alloc > & *__y*) [inline]

List ordering relation.

Parameters

__x	A list.
__y	A list of the same type as *__x*.

Returns

True iff *__x* is lexicographically less than *__y*.

This is a total ordering relation. It is linear in the size of the lists. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 2050 of file stl_list.h.

References lexicographical_compare().

3.10.4.137 template<typename _Tp , typename _Alloc > bool std::operator< (const deque< _Tp, _Alloc > & *__x*, const deque< _Tp, _Alloc > & *__y*) [inline]

Deque ordering relation.

Parameters

__x	A deque.
__y	A deque of the same type as *__x*.

Returns

True iff *x* is lexicographically less than *__y*.

This is a total ordering relation. It is linear in the size of the deques. The elements must be comparable with <.

See std::lexicographical_compare() for how the determination is made.

Definition at line 2279 of file stl_deque.h.

References lexicographical_compare().

3.10.4.138 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator< (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*) [inline], [noexcept]

Test if string precedes string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 6277 of file basic_string.h.

References std::basic_string< _CharT, _Traits, _Alloc >::compare().

3.10.4.139 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator< (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const _CharT * *__rhs*) [inline]

Test if string precedes C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 6290 of file basic_string.h.

3.10.4.140 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator< (const _CharT * *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*) [inline]

Test if C string precedes string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* precedes *__rhs*. False otherwise.

Definition at line 6302 of file basic_string.h.

3.10.4.141 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & *__out,* char *__c*) [inline]

Character inserters.

Parameters

__out	An output stream.
__c	A character.

Returns

out

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts a single character and any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

If `__c` is of type `char` and the character type of the stream is not `char`, the character is widened before insertion.

Definition at line 511 of file ostream.

3.10.4.142 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & *__out,* char *__c*) [inline]

Character inserters.

Parameters

__out	An output stream.
__c	A character.

Returns

out

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts a single character and any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

If `__c` is of type `char` and the character type of the stream is not `char`, the character is widened before insertion.

Definition at line 517 of file ostream.

3.10.4.143 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & *__out,* signed char *__c*) [inline]

Character inserters.

Parameters

__out	An output stream.
__c	A character.

Returns

out

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts a single character and any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

If `__c` is of type `char` and the character type of the stream is not `char`, the character is widened before insertion.

Definition at line 523 of file ostream.

3.10.4.144 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & *__out,* unsigned char *__c*) [inline]

Character inserters.

Parameters

__out	An output stream.
__c	A character.

Returns

out

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts a single character and any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

If `__c` is of type `char` and the character type of the stream is not `char`, the character is widened before insertion.

Definition at line 528 of file ostream.

3.10.4.145 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > & *__out,* const char * *__s*)

String inserters.

Parameters

__out	An output stream.
__s	A character string.

Returns

out

Precondition

`__s` must be a non-NULL pointer

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts `traits::length(__s)` characters starting at `__s`, widened if necessary, followed by any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

Definition at line 321 of file ostream.tcc.

References std::ios_base::badbit, and std::basic_ios< _CharT, _Traits >::setstate().

3.10.4.146 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & __out, const char * __s) [inline]

String inserters.

Parameters

__out	An output stream.
__s	A character string.

Returns

out

Precondition

__s must be a non-NULL pointer

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts `traits::length(__s)` characters starting at __s, widened if necessary, followed by any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

Definition at line 606 of file ostream.

References std::ios_base::badbit.

3.10.4.147 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & __out, const signed char * __s) [inline]

String inserters.

Parameters

__out	An output stream.
__s	A character string.

Returns

out

Precondition

__s must be a non-NULL pointer

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts `traits::length(__s)` characters starting at __s, widened if necessary, followed by any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

Definition at line 619 of file ostream.

3.10.4.148 template<typename _Traits > basic_ostream<char, _Traits>& std::operator<< (basic_ostream< char, _Traits > & __out, const unsigned char * __s) [inline]

String inserters.

Parameters

__out	An output stream.
__s	A character string.

Returns

out

Precondition

__s must be a non-NULL pointer

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts `traits::length(__s)` characters starting at __s, widened if necessary, followed by any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

Definition at line 624 of file ostream.

3.10.4.149 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & *__out,* _CharT *__c*) [inline]

Character inserters.

Parameters

__out	An output stream.
__c	A character.

Returns

out

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts a single character and any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

If __c is of type `char` and the character type of the stream is not `char`, the character is widened before insertion.

Definition at line 506 of file ostream.

3.10.4.150 template<typename _CharT , typename _Traits > basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & *__out,* const _CharT * *__s*) [inline]

String inserters.

Parameters

__out	An output stream.
__s	A character string.

Returns

out

Precondition

__s must be a non-NULL pointer

Behaves like one of the formatted arithmetic inserters described in std::basic_ostream. After constructing a sentry object with good status, this function inserts `traits::length(__s)` characters starting at __s, widened if necessary, followed by any required padding (as determined by [22.2.2.2.2]). `__out.width(0)` is then called.

Definition at line 589 of file ostream.

References std::ios_base::badbit.

3.10.4.151 template<typename _Ostream , typename _Tp > enable_if<__and_<__not_<is_lvalue_reference<_Ostream> >, __is_convertible_to_basic_ostream<_Ostream>, __is_insertable< __rvalue_ostream_type<_Ostream>, const _Tp&> >::value, __rvalue_ostream_type<_Ostream> >::type std::operator<< (_Ostream && __os, const _Tp & __x) [inline]

Generic inserter for rvalue stream.

Parameters

__os	An input stream.
__x	A reference to the object being inserted.

Returns

os

This is just a forwarding function to allow insertion to rvalue streams since they won't bind to the inserter functions that take an lvalue reference.

Definition at line 773 of file ostream.

3.10.4.152 template<class _CharT , class _Traits , size_t _Nb> std::basic_ostream<_CharT, _Traits>& std::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const bitset< _Nb > & __x)

Global I/O operators for bitsets.

Direct I/O between streams and bitsets is supported. Output is straightforward. Input will skip whitespace, only accept *0* and *1* characters, and will only extract as many digits as the bitset will hold.

Definition at line 1540 of file bitset.

References std::__ctype_abstract_base< _CharT >::widen().

3.10.4.153 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & __os, const __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > & __str) [inline]

Write string to a stream.

Parameters

__os	Output stream.
__str	String to write out.

Returns

Reference to the output stream.

Output characters of *__str* into os following the same rules as for writing a C string.

Definition at line 2631 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

3.10.4.154 template<typename _CharT , typename _Traits , typename _Alloc > basic_ostream<_CharT, _Traits>& std::operator<< (basic_ostream< _CharT, _Traits > & *__os,* const basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Write string to a stream.

Parameters

__os	Output stream.
__str	String to write out.

Returns

Reference to the output stream.

Output characters of *__str* into os following the same rules as for writing a C string.

Definition at line 6468 of file basic_string.h.

3.10.4.155 template<typename _Tp , typename _Seq > bool std::operator<= (const stack< _Tp, _Seq > & *__x,* const stack< _Tp, _Seq > & *__y*) [inline]

Based on operator<.

Definition at line 355 of file stl_stack.h.

3.10.4.156 template<typename _Tp , typename _Seq > bool std::operator<= (const queue< _Tp, _Seq > & *__x,* const queue< _Tp, _Seq > & *__y*) [inline]

Based on operator<.

Definition at line 380 of file stl_queue.h.

3.10.4.157 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator<= (const multiset< _Key, _Compare, _Alloc > & *__x,* const multiset< _Key, _Compare, _Alloc > & *__y*) [inline]

Returns !(y < x)

Definition at line 1030 of file stl_multiset.h.

3.10.4.158 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator<= (const set< _Key, _Compare, _Alloc > & *__x,* const set< _Key, _Compare, _Alloc > & *__y*) [inline]

Returns !(y < x)

Definition at line 1044 of file stl_set.h.

3.10.4.159 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator<= (const multimap< _Key, _Tp, _Compare, _Alloc > & *__x,* const multimap< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Based on operator<.

Definition at line 1187 of file stl_multimap.h.

3.10.4.160 template<typename _Tp , typename _Alloc > bool std::operator<= (const forward_list< _Tp, _Alloc > & __lx, const forward_list< _Tp, _Alloc > & __ly) [inline]

Based on operator<.

Definition at line 1497 of file forward_list.h.

3.10.4.161 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator<= (const map< _Key, _Tp, _Compare, _Alloc > & __x, const map< _Key, _Tp, _Compare, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 1522 of file stl_map.h.

3.10.4.162 template<typename _Tp , typename _Alloc > bool std::operator<= (const vector< _Tp, _Alloc > & __x, const vector< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 1949 of file stl_vector.h.

3.10.4.163 template<typename _Tp , typename _Alloc > bool std::operator<= (const list< _Tp, _Alloc > & __x, const list< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2069 of file stl_list.h.

3.10.4.164 template<typename _Tp , typename _Alloc > bool std::operator<= (const deque< _Tp, _Alloc > & __x, const deque< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2298 of file stl_deque.h.

3.10.4.165 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator<= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline], [noexcept]

Test if string doesn't follow string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 6353 of file basic_string.h.

References std::basic_string< _CharT, _Traits, _Alloc >::compare().

3.10.4.166 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator<= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const _CharT * __rhs) [inline]

Test if string doesn't follow C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 6366 of file basic_string.h.

3.10.4.167 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator<= (const _CharT * *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*) [inline]

Test if C string doesn't follow string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* doesn't follow *__rhs*. False otherwise.

Definition at line 6378 of file basic_string.h.

3.10.4.168 template<typename _StateT > bool std::operator== (const fpos< _StateT > & *__lhs*, const fpos< _StateT > & *__rhs*) [inline]

Test if equivalent to another position.

Definition at line 222 of file postypes.h.

3.10.4.169 template<typename _Tp , typename _Seq > bool std::operator== (const stack< _Tp, _Seq > & *__x*, const stack< _Tp, _Seq > & *__y*) [inline]

Stack equality comparison.

Parameters

__x	A stack.
__y	A stack of the same type as *__x*.

Returns

True iff the size and elements of the stacks are equal.

This is an equivalence relation. Complexity and semantics depend on the underlying sequence type, but the expected rules are: this relation is linear in the size of the sequences, and stacks are considered equivalent if their sequences compare equal.

Definition at line 319 of file stl_stack.h.

3.10.4.170 template<typename _Tp , typename _Seq > bool std::operator== (const queue< _Tp, _Seq > & *__x*, const queue< _Tp, _Seq > & *__y*) [inline]

Queue equality comparison.

Parameters

__x	A queue.
__y	A queue of the same type as *__x*.

Returns

True iff the size and elements of the queues are equal.

This is an equivalence relation. Complexity and semantics depend on the underlying sequence type, but the expected rules are: this relation is linear in the size of the sequences, and queues are considered equivalent if their sequences compare equal.

Definition at line 344 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

3.10.4.171 template<typename _Res , typename... _Args> bool std::operator== (const function< _Res(_Args...)> & *__f*, nullptr_t) [inline], [noexcept]

Compares a polymorphic function object wrapper against 0 (the NULL pointer).

Returns

`true` if the wrapper has no target, `false` otherwise

This function will not throw an exception.

Definition at line 680 of file std_function.h.

3.10.4.172 template<typename _Res , typename... _Args> bool std::operator== (nullptr_t , const function< _Res(_Args...)> & *__f*) [inline], [noexcept]

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

Definition at line 687 of file std_function.h.

3.10.4.173 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator== (const multiset< _Key, _Compare, _Alloc > & *__x*, const multiset< _Key, _Compare, _Alloc > & *__y*) [inline]

Multiset equality comparison.

Parameters

__x	A multiset.
__y	A multiset of the same type as *__x*.

Returns

True iff the size and elements of the multisets are equal.

This is an equivalence relation. It is linear in the size of the multisets. Multisets are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 971 of file stl_multiset.h.

3.10.4.174 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator== (const set< _Key, _Compare, _Alloc > & *__x*, const set< _Key, _Compare, _Alloc > & *__y*) [inline]

Set equality comparison.

Parameters

__x	A set.
__y	A set of the same type as *x*.

Returns

True iff the size and elements of the sets are equal.

This is an equivalence relation. It is linear in the size of the sets. Sets are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 985 of file stl_set.h.

3.10.4.175 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator== (const multimap< _Key, _Tp, _Compare, _Alloc > & *__x*, const multimap< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Multimap equality comparison.

Parameters

__x	A multimap.
__y	A multimap of the same type as *__x*.

Returns

True iff the size and elements of the maps are equal.

This is an equivalence relation. It is linear in the size of the multimaps. Multimaps are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 1128 of file stl_multimap.h.

3.10.4.176 template<typename _Tp , typename _Alloc > bool std::operator== (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*)

Forward list equality comparison.

Parameters

__lx	A forward_list
__ly	A forward_list of the same type as *__lx*.

Returns

True iff the elements of the forward lists are equal.

This is an equivalence relation. It is linear in the number of elements of the forward lists. Deques are considered equivalent if corresponding elements compare equal.

Definition at line 393 of file forward_list.tcc.

References std::forward_list< _Tp, _Alloc >::cbegin(), and std::forward_list< _Tp, _Alloc >::cend().

3.10.4.177 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator== (const map< _Key, _Tp, _Compare, _Alloc > & *__x*, const map< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Map equality comparison.

Parameters

__x	A map.
__y	A map of the same type as *x*.

Returns

True iff the size and elements of the maps are equal.

This is an equivalence relation. It is linear in the size of the maps. Maps are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 1463 of file stl_map.h.

3.10.4.178 template<typename _Tp , typename _Alloc > bool std::operator== (const vector< _Tp, _Alloc > & __x, const vector< _Tp, _Alloc > & __y) [inline]

Vector equality comparison.

Parameters

__x	A vector.
__y	A vector of the same type as *__x*.

Returns

True iff the size and elements of the vectors are equal.

This is an equivalence relation. It is linear in the size of the vectors. Vectors are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 1892 of file stl_vector.h.

References std::vector< _Tp, _Alloc >::begin(), std::vector< _Tp, _Alloc >::end(), equal(), and std::vector< _Tp, _Alloc >::size().

3.10.4.179 template<typename _Tp , typename _Alloc > bool std::operator== (const list< _Tp, _Alloc > & __x, const list< _Tp, _Alloc > & __y) [inline]

List equality comparison.

Parameters

__x	A list.
__y	A list of the same type as *__x*.

Returns

True iff the size and elements of the lists are equal.

This is an equivalence relation. It is linear in the size of the lists. Lists are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 1995 of file stl_list.h.

References std::list< _Tp, _Alloc >::begin(), std::list< _Tp, _Alloc >::end(), and std::list< _Tp, _Alloc >::size().

3.10.4.180 template<typename _Tp , typename _Alloc > bool std::operator== (const deque< _Tp, _Alloc > & __x, const deque< _Tp, _Alloc > & __y) [inline]

Deque equality comparison.

Parameters

__x	A deque.
__y	A deque of the same type as *__x*.

Returns

True iff the size and elements of the deques are equal.

This is an equivalence relation. It is linear in the size of the deques. Deques are considered equivalent if their sizes are equal, and if corresponding elements compare equal.

Definition at line 2241 of file stl_deque.h.

References std::deque< _Tp, _Alloc >::begin(), std::deque< _Tp, _Alloc >::end(), equal(), and std::deque< _Tp, _Alloc >::size().

3.10.4.181 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator== (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*) [inline], [noexcept]

Test equivalence of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs.compare*(*__rhs*) == 0. False otherwise.

Definition at line 6163 of file basic_string.h.

3.10.4.182 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator== (const basic_string< _CharT, _Traits, _Alloc > & *__lhs*, const _CharT * *__rhs*) [inline]

Test equivalence of string and C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs.compare*(*__rhs*) == 0. False otherwise.

Definition at line 6185 of file basic_string.h.

3.10.4.183 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator== (const _CharT * *__lhs*, const basic_string< _CharT, _Traits, _Alloc > & *__rhs*) [inline]

Test equivalence of C string and string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__rhs.compare*(*__lhs*) == 0. False otherwise.

Definition at line 6226 of file basic_string.h.

3.10.4.184 **template<typename _Tp , typename _Seq > bool std::operator>(const stack< _Tp, _Seq > & *__x,* const stack< _Tp, _Seq > & *__y*)** `[inline]`

Based on operator<.

Definition at line 349 of file stl_stack.h.

3.10.4.185 **template<typename _Tp , typename _Seq > bool std::operator>(const queue< _Tp, _Seq > & *__x,* const queue< _Tp, _Seq > & *__y*)** `[inline]`

Based on operator<.

Definition at line 374 of file stl_queue.h.

3.10.4.186 **template<typename _Key , typename _Compare , typename _Alloc > bool std::operator>(const multiset< _Key, _Compare, _Alloc > & *__x,* const multiset< _Key, _Compare, _Alloc > & *__y*)** `[inline]`

Returns y < x.

Definition at line 1023 of file stl_multiset.h.

3.10.4.187 **template<typename _Key , typename _Compare , typename _Alloc > bool std::operator>(const set< _Key, _Compare, _Alloc > & *__x,* const set< _Key, _Compare, _Alloc > & *__y*)** `[inline]`

Returns y < x.

Definition at line 1037 of file stl_set.h.

3.10.4.188 **template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator>(const multimap< _Key, _Tp, _Compare, _Alloc > & *__x,* const multimap< _Key, _Tp, _Compare, _Alloc > & *__y*)** `[inline]`

Based on operator<.

Definition at line 1180 of file stl_multimap.h.

3.10.4.189 **template<typename _Tp , typename _Alloc > bool std::operator>(const forward_list< _Tp, _Alloc > & *__lx,* const forward_list< _Tp, _Alloc > & *__ly*)** `[inline]`

Based on operator<.

Definition at line 1483 of file forward_list.h.

3.10.4.190 **template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator>(const map< _Key, _Tp, _Compare, _Alloc > & *__x,* const map< _Key, _Tp, _Compare, _Alloc > & *__y*)** `[inline]`

Based on operator<.

Definition at line 1515 of file stl_map.h.

3.10.4.191 template<typename _Tp , typename _Alloc > bool std::operator>(const vector< _Tp, _Alloc > & __x, const vector< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 1943 of file stl_vector.h.

3.10.4.192 template<typename _Tp , typename _Alloc > bool std::operator>(const list< _Tp, _Alloc > & __x, const list< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2063 of file stl_list.h.

3.10.4.193 template<typename _Tp , typename _Alloc > bool std::operator>(const deque< _Tp, _Alloc > & __x, const deque< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2292 of file stl_deque.h.

3.10.4.194 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>(const basic_string< _CharT, _Traits, _Alloc > & __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline], [noexcept]

Test if string follows string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 6315 of file basic_string.h.

3.10.4.195 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>(const basic_string< _CharT, _Traits, _Alloc > & __lhs, const _CharT * __rhs) [inline]

Test if string follows C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 6328 of file basic_string.h.

3.10.4.196 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>(const _CharT * __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline]

Test if C string follows string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* follows *__rhs*. False otherwise.

Definition at line 6340 of file basic_string.h.

3.10.4.197 template<typename _Tp , typename _Seq > bool std::operator>= (const stack< _Tp, _Seq > & *__x*, const stack< _Tp, _Seq > & *__y*) [inline]

Based on operator<.

Definition at line 361 of file stl_stack.h.

3.10.4.198 template<typename _Tp , typename _Seq > bool std::operator>= (const queue< _Tp, _Seq > & *__x*, const queue< _Tp, _Seq > & *__y*) [inline]

Based on operator<.

Definition at line 386 of file stl_queue.h.

3.10.4.199 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator>= (const multiset< _Key, _Compare, _Alloc > & *__x*, const multiset< _Key, _Compare, _Alloc > & *__y*) [inline]

Returns !(x < y)

Definition at line 1037 of file stl_multiset.h.

3.10.4.200 template<typename _Key , typename _Compare , typename _Alloc > bool std::operator>= (const set< _Key, _Compare, _Alloc > & *__x*, const set< _Key, _Compare, _Alloc > & *__y*) [inline]

Returns !(x < y)

Definition at line 1051 of file stl_set.h.

3.10.4.201 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator>= (const multimap< _Key, _Tp, _Compare, _Alloc > & *__x*, const multimap< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Based on operator<.

Definition at line 1194 of file stl_multimap.h.

3.10.4.202 template<typename _Tp , typename _Alloc > bool std::operator>= (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*) [inline]

Based on operator<.

Definition at line 1490 of file forward_list.h.

3.10.4.203 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::operator>= (const map< _Key, _Tp, _Compare, _Alloc > & *__x*, const map< _Key, _Tp, _Compare, _Alloc > & *__y*) [inline]

Based on operator<.

Definition at line 1529 of file stl_map.h.

3.10.4.204 template<typename _Tp , typename _Alloc > bool std::operator>= (const vector< _Tp, _Alloc > & __x, const vector< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 1955 of file stl_vector.h.

3.10.4.205 template<typename _Tp , typename _Alloc > bool std::operator>= (const list< _Tp, _Alloc > & __x, const list< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2075 of file stl_list.h.

3.10.4.206 template<typename _Tp , typename _Alloc > bool std::operator>= (const deque< _Tp, _Alloc > & __x, const deque< _Tp, _Alloc > & __y) [inline]

Based on operator<.

Definition at line 2304 of file stl_deque.h.

3.10.4.207 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline], [noexcept]

Test if string doesn't precede string.

Parameters

__lhs	First string.
__rhs	Second string.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 6391 of file basic_string.h.

3.10.4.208 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>= (const basic_string< _CharT, _Traits, _Alloc > & __lhs, const _CharT * __rhs) [inline]

Test if string doesn't precede C string.

Parameters

__lhs	String.
__rhs	C string.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 6404 of file basic_string.h.

3.10.4.209 template<typename _CharT , typename _Traits , typename _Alloc > bool std::operator>= (const _CharT * __lhs, const basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline]

Test if C string doesn't precede string.

Parameters

__lhs	C string.
__rhs	String.

Returns

True if *__lhs* doesn't precede *__rhs*. False otherwise.

Definition at line 6416 of file basic_string.h.

3.10.4.210 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > & *__in*, _CharT & *__c*)

Character extractors.

Parameters

__in	An input stream.
__c	A character reference.

Returns

in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts a character (if one is available) and stores it in *__c*. Otherwise, sets failbit in the input stream.

Definition at line 931 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

3.10.4.211 template<class _Traits > basic_istream<char, _Traits>& std::operator>> (basic_istream< char, _Traits > & *__in*, unsigned char & *__c*) [inline]

Character extractors.

Parameters

__in	An input stream.
__c	A character reference.

Returns

in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts a character (if one is available) and stores it in *__c*. Otherwise, sets failbit in the input stream.

Definition at line 756 of file istream.

3.10.4.212 template<class _Traits > basic_istream<char, _Traits>& std::operator>> (basic_istream< char, _Traits > & *__in*, signed char & *__c*) [inline]

Character extractors.

Parameters

__in	An input stream.
__c	A character reference.

Returns

in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts a character (if one is available) and stores it in *__c*. Otherwise, sets failbit in the input stream.

Definition at line 761 of file istream.

3.10.4.213 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > & *__in*, _CharT * *__s*)

Character string extractors.

Parameters

__in	An input stream.
__s	A pointer to a character array.

Returns

__in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts up to `n` characters and stores them into the array starting at *__s*. `n` is defined as:

- if `width()` is greater than zero, `n` is width() otherwise
- `n` is *the number of elements of the largest array of* `*`
- *`char_type` that can store a terminating `eos`.*
- [27.6.1.2.3]/6

Characters are extracted and stored until one of the following happens:

- `n-1` characters are stored
- EOF is reached
- the next character is whitespace according to the current locale
- the next character is a null byte (i.e., `charT()`)

`width(0)` is then called for the input stream.

If no characters are extracted, sets failbit.

Definition at line 963 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::getloc(), std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), and std::ios_base::width().

3.10.4.214 template<> basic_istream<char>& std::operator>> (basic_istream< char > & *__in,* char * *__s*)

Character string extractors.

Parameters

__in	An input stream.
__s	A pointer to a character array.

Returns

__in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts up to `n` characters and stores them into the array starting at *__s*. `n` is defined as:

- if `width()` is greater than zero, `n` is width() otherwise
- `n` is *the number of elements of the largest array of* `*`
- `char_type` *that can store a terminating* `eos`.
- [27.6.1.2.3]/6

Characters are extracted and stored until one of the following happens:

- `n-1` characters are stored
- EOF is reached
- the next character is whitespace according to the current locale
- the next character is a null byte (i.e., `charT()`)

`width(0)` is then called for the input stream.

If no characters are extracted, sets failbit.

3.10.4.215 template<class _Traits > basic_istream<char, _Traits>& std::operator>> (basic_istream< char, _Traits > & *__in*, unsigned char * *__s*) [inline]

Character string extractors.

Parameters

__in	An input stream.
__s	A pointer to a character array.

Returns

__in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts up to `n` characters and stores them into the array starting at *__s*. `n` is defined as:

- if `width()` is greater than zero, `n` is width() otherwise
- `n` is *the number of elements of the largest array of* `*`
- `char_type` *that can store a terminating* `eos`.

- [27.6.1.2.3]/6

Characters are extracted and stored until one of the following happens:

- `n-1` characters are stored
- EOF is reached
- the next character is whitespace according to the current locale
- the next character is a null byte (i.e., `charT()`)

`width(0)` is then called for the input stream.

If no characters are extracted, sets failbit.

Definition at line 803 of file istream.

3.10.4.216 template<class _Traits > basic_istream<char, _Traits>& std::operator>> (basic_istream< char, _Traits > & *__in*, signed char * *__s*) [inline]

Character string extractors.

Parameters

__in	An input stream.
__s	A pointer to a character array.

Returns

__in

Behaves like one of the formatted arithmetic extractors described in std::basic_istream. After constructing a sentry object with good status, this function extracts up to `n` characters and stores them into the array starting at *__s*. `n` is defined as:

- if `width()` is greater than zero, `n` is width() otherwise
- `n` is *the number of elements of the largest array of* `*`
- *`char_type` that can store a terminating `eos`.*
- [27.6.1.2.3]/6

Characters are extracted and stored until one of the following happens:

- `n-1` characters are stored
- EOF is reached
- the next character is whitespace according to the current locale
- the next character is a null byte (i.e., `charT()`)

`width(0)` is then called for the input stream.

If no characters are extracted, sets failbit.

Definition at line 808 of file istream.

3.10.4.217 template<typename _Istream , typename _Tp > enable_if<__and_<__not_<is_lvalue_reference<_Istream> >, __is_convertible_to_basic_istream<_Istream>, __is_extractable< __rvalue_istream_type<_Istream>, _Tp&&> >::value, __rvalue_istream_type<_Istream> >::type std::operator>> (_Istream && *__is,* _Tp && *__x*) [inline]

Generic extractor for rvalue stream.

Parameters

__is	An input stream.
__x	A reference to the extraction target.

Returns

is

This is just a forwarding function to allow extraction from rvalue streams since they won't bind to the extractor functions that take an lvalue reference.

Definition at line 980 of file istream.

3.10.4.218 template<class _CharT , class _Traits , size_t _Nb> std::basic_istream<_CharT, _Traits>& std::operator>> (std::basic_istream< _CharT, _Traits > & *__is,* bitset< _Nb > & *__x*)

Global I/O operators for bitsets.

Direct I/O between streams and bitsets is supported. Output is straightforward. Input will skip whitespace, only accept *0* and *1* characters, and will only extract as many digits as the bitset will hold.

Definition at line 1472 of file bitset.

References std::basic_string< _CharT, _Traits, _Alloc >::empty(), std::basic_string< _CharT, _Traits, _Alloc >::push_back(), std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_string< _CharT, _Traits, _Alloc >::reserve(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_ios< _CharT, _Traits >::widen().

3.10.4.219 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > & *__is,* __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*)

Read stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.

Returns

Reference to the input stream.

Stores characters from *__is* into *__str* until whitespace is found, the end of the stream is encountered, or str.max_size() is reached. If is.width() is non-zero, that is the limit on the number of characters stored into *__str*. Any previous contents of *__str* are erased.

Definition at line 552 of file vstring.tcc.

References std::ios_base::getloc(), std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), and std::ios_base::width().

3.10.4.220 template<typename _CharT , typename _Traits , typename _Alloc > basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > & *__is,* basic_string< _CharT, _Traits, _Alloc > & *__str*)

Read stream into a string.

Parameters

__is	Input stream.
__str	Buffer to store into.

Returns

Reference to the input stream.

Stores characters from *__is* into *__str* until whitespace is found, the end of the stream is encountered, or str.max_size() is reached. If is.width() is non-zero, that is the limit on the number of characters stored into *__str*. Any previous contents of *__str* are erased.

Definition at line 1468 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::append(), std::basic_string< _CharT, _Traits, _Alloc >::erase(), std::ios_base::getloc(), std::basic_string< _CharT, _Traits, _Alloc >::max_size(), std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), and std::ios_base::width().

3.10.4.221 template<size_t _Nb> bitset<_Nb> std::operator^ (const bitset< _Nb > & *__x*, const bitset< _Nb > & *__y*) [inline], [noexcept]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1453 of file bitset.

3.10.4.222 template<size_t _Nb> bitset<_Nb> std::operator| (const bitset< _Nb > & *__x*, const bitset< _Nb > & *__y*) [inline], [noexcept]

Global bitwise operations on bitsets.

Parameters

__x	A bitset.
__y	A bitset of the same size as *__x*.

Returns

A new bitset.

These should be self-explanatory.

Definition at line 1444 of file bitset.

3.10.4.223 template<typename _MoneyT > _Put_money<_MoneyT> std::put_money (const _MoneyT & *__mon*, bool *__intl* = false) [inline]

Extended manipulator for inserting money.

Parameters

__mon	Either long double or a specialization of `basic_string`.
__intl	A bool indicating whether international format is to be used.

Sent to a stream object, this manipulator inserts *__mon*.

Definition at line 306 of file iomanip.

3.10.4.224 template<typename _CharT > _Put_time<_CharT> std::put_time (const std::tm * *__tmb*, const _CharT * *__fmt*) [inline]

Extended manipulator for formatting time.

This manipulator uses time_put::put to format time. [ext.manip]

Parameters

__tmb	struct tm time data to format.
__fmt	format string.

Definition at line 358 of file iomanip.

3.10.4.225 template<typename _CharT > auto std::quoted (const _CharT * *__string*, _CharT *__delim* = `_CharT('"')`, _CharT *__escape* = `_CharT('\\')`) [inline]

Manipulator for quoted strings.

Parameters

__string	String to quote.
__delim	Character to quote string with.
__escape	Escape character to escape itself or quote character.

Definition at line 461 of file iomanip.

3.10.4.226 template<typename _Container > constexpr auto std::rbegin (_Container & *__cont*) -> decltype(__cont.rbegin()) [inline]

Return a reverse iterator pointing to the last element of the container.

Parameters

__cont	Container.

Definition at line 141 of file range_access.h.

Referenced by crbegin().

3.10.4.227 template<typename _Container > constexpr auto std::rbegin (const _Container & *__cont*) -> decltype(__cont.rbegin()) [inline]

Return a reverse iterator pointing to the last element of the const container.

Parameters

__cont	Container.

Definition at line 151 of file range_access.h.

3.10.4.228 template<typename _Tp , size_t _Nm> constexpr reverse_iterator<_Tp*> std::rbegin (_Tp(&) *__arr[_Nm]*) [inline]

Return a reverse iterator pointing to the last element of the array.

Parameters

__arr	Array.

Definition at line 181 of file range_access.h.

3.10.4.229 template<typename _Tp > constexpr reverse_iterator<const _Tp*> std::rbegin (initializer_list< _Tp > __il) [inline]

Return a reverse iterator pointing to the last element of the initializer_list.

Parameters

__il	initializer_list.

Definition at line 201 of file range_access.h.

3.10.4.230 template<typename _Container > constexpr auto std::rend (_Container & __cont) -> decltype(__cont.rend()) [inline]

Return a reverse iterator pointing one past the first element of the container.

Parameters

__cont	Container.

Definition at line 161 of file range_access.h.

Referenced by crend().

3.10.4.231 template<typename _Container > constexpr auto std::rend (const _Container & __cont) -> decltype(__cont.rend()) [inline]

Return a reverse iterator pointing one past the first element of the const container.

Parameters

__cont	Container.

Definition at line 171 of file range_access.h.

3.10.4.232 template<typename _Tp , size_t _Nm> constexpr reverse_iterator<_Tp*> std::rend (_Tp(&) __arr[_Nm]) [inline]

Return a reverse iterator pointing one past the first element of the array.

Parameters

__arr	Array.

Definition at line 191 of file range_access.h.

3.10.4.233 template<typename _Tp > constexpr reverse_iterator<const _Tp*> std::rend (initializer_list< _Tp > __il) [inline]

Return a reverse iterator pointing one past the first element of the initializer_list.

Parameters

__il	initializer_list.

Definition at line 211 of file range_access.h.

3.10.4.234 template<typename _InputIterator , typename _OutputIterator , typename _Tp > constexpr _OutputIterator std::replace_copy (_InputIterator *__first,* _InputIterator *__last,* _OutputIterator *__result,* const _Tp & *__old_value,* const _Tp & *__new_value*) [inline]

Copy a sequence, replacing each element of one value with another value.

Parameters

__first	An input iterator.
__last	An input iterator.
__result	An output iterator.
__old_value	The value to be replaced.
__new_value	The replacement value.

Returns

The end of the output sequence, `result+`(last-first).

Copies each element in the input range [__first,__last) to the output range [__result,__result+(__last-__first)) replacing elements equal to `__old_value` with `__new_value`.

Definition at line 3159 of file stl_algo.h.

3.10.4.235 _Resetiosflags std::resetiosflags (ios_base::fmtflags *__mask*) [inline]

Manipulator for `setf`.

Parameters

__mask	A format flags mask.

Sent to a stream object, this manipulator resets the specified flags, via *stream.setf(0,__mask)*.

Definition at line 66 of file iomanip.

3.10.4.236 template<typename _Tp > void std::return_temporary_buffer (_Tp * *__p*) [inline]

The companion to get_temporary_buffer().

Parameters

__p	A buffer previously allocated by get_temporary_buffer.

Returns

None.

Frees the memory pointed to by __p.

Definition at line 127 of file stl_tempbuf.h.

3.10.4.237 ios_base& std::right (ios_base & *__base*) [inline]

Calls base.setf(ios_base::right, ios_base::adjustfield).

Definition at line 1037 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::adjustfield, std::ios_base::right, and std::ios_base::setf().

3.10.4.238 ios_base& std::scientific (ios_base & __base) [inline]

Calls base.setf(ios_base::scientific, ios_base::floatfield).

Definition at line 1079 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::floatfield, std::ios_base::scientific, and std::ios_base::setf().

3.10.4.239 new_handler std::set_new_handler (new_handler) throw)

Takes a replacement handler as the argument, returns the previous handler.

3.10.4.240 _Setbase std::setbase (int __base) [inline]

Manipulator for `setf`.

Parameters

__base	A numeric base.

Sent to a stream object, this manipulator changes the `ios_base::basefield` flags to `oct`, `dec`, or `hex` when *base* is 8, 10, or 16, accordingly, and to 0 if *__base* is any other value.

Definition at line 127 of file iomanip.

3.10.4.241 template<typename _CharT > _Setfill<_CharT> std::setfill (_CharT __c) [inline]

Manipulator for `fill`.

Parameters

__c	The new fill character.

Sent to a stream object, this manipulator calls `fill(__c)` for that object.

Definition at line 165 of file iomanip.

3.10.4.242 _Setiosflags std::setiosflags (ios_base::fmtflags __mask) [inline]

Manipulator for `setf`.

Parameters

__mask	A format flags mask.

Sent to a stream object, this manipulator sets the format flags to *__mask*.

Definition at line 96 of file iomanip.

3.10.4.243 _Setprecision std::setprecision (int __n) [inline]

Manipulator for `precision`.

Parameters

__n	The new precision.

Sent to a stream object, this manipulator calls `precision(__n)` for that object.

Definition at line 195 of file iomanip.

3.10.4.244 _Setw std::setw (int __n) [inline]

Manipulator for `width`.

Parameters

__n	The new width.

Sent to a stream object, this manipulator calls `width(__n)` for that object.

Definition at line 225 of file iomanip.

3.10.4.245 ios_base& std::showbase (ios_base & *__base*) [inline]

Calls base.setf(ios_base::showbase).

Definition at line 924 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::showbase.

3.10.4.246 ios_base& std::showpoint (ios_base & *__base*) [inline]

Calls base.setf(ios_base::showpoint).

Definition at line 940 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::showpoint.

3.10.4.247 ios_base& std::showpos (ios_base & *__base*) [inline]

Calls base.setf(ios_base::showpos).

Definition at line 956 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::showpos.

3.10.4.248 ios_base& std::skipws (ios_base & *__base*) [inline]

Calls base.setf(ios_base::skipws).

Definition at line 972 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::skipws.

Referenced by std::__detail::operator>>(), and operator>>().

3.10.4.249 template<typename _Tp , typename _Tp1 , _Lock_policy _Lp> __shared_ptr<_Tp, _Lp> std::static_pointer_cast (const __shared_ptr< _Tp1, _Lp > & *__r*) [inline], [noexcept]

static_pointer_cast

Definition at line 1575 of file shared_ptr_base.h.

3.10.4.250 template<typename _Res , typename... _Args> void std::swap (function< _Res(_Args...)> & *__x*, function< _Res(_Args...)> & *__y*) [inline], [noexcept]

Swap the targets of two polymorphic function object wrappers.

This function will not throw an exception.

Definition at line 720 of file std_function.h.

3.10.4.251 template<class _CharT , class _Traits , class _Allocator > void std::swap (basic_stringbuf< _CharT, _Traits, _Allocator > & *__x*, basic_stringbuf< _CharT, _Traits, _Allocator > & *__y*) [inline]

Swap specialization for stringbufs.

Definition at line 849 of file sstream.

3.10.4.252 template<class _CharT , class _Traits , class _Allocator > void std::swap (basic_istringstream< _CharT, _Traits, _Allocator > & __x, basic_istringstream< _CharT, _Traits, _Allocator > & __y) [inline]

Swap specialization for istringstreams.

Definition at line 856 of file sstream.

3.10.4.253 template<class _CharT , class _Traits , class _Allocator > void std::swap (basic_ostringstream< _CharT, _Traits, _Allocator > & __x, basic_ostringstream< _CharT, _Traits, _Allocator > & __y) [inline]

Swap specialization for ostringstreams.

Definition at line 863 of file sstream.

3.10.4.254 template<class _CharT , class _Traits , class _Allocator > void std::swap (basic_stringstream< _CharT, _Traits, _Allocator > & __x, basic_stringstream< _CharT, _Traits, _Allocator > & __y) [inline]

Swap specialization for stringstreams.

Definition at line 870 of file sstream.

3.10.4.255 template<typename _Key , typename _Compare , typename _Alloc > void std::swap (multiset< _Key, _Compare, _Alloc > & __x, multiset< _Key, _Compare, _Alloc > & __y) [inline], [noexcept]

See std::multiset::swap().

Definition at line 1045 of file stl_multiset.h.

3.10.4.256 template<typename _Key , typename _Compare , typename _Alloc > void std::swap (set< _Key, _Compare, _Alloc > & __x, set< _Key, _Compare, _Alloc > & __y) [inline], [noexcept]

See std::set::swap().

Definition at line 1059 of file stl_set.h.

3.10.4.257 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > void std::swap (multimap< _Key, _Tp, _Compare, _Alloc > & __x, multimap< _Key, _Tp, _Compare, _Alloc > & __y) [inline], [noexcept]

See std::multimap::swap().

Definition at line 1202 of file stl_multimap.h.

3.10.4.258 template<class _CharT , class _Traits > void std::swap (basic_filebuf< _CharT, _Traits > & __x, basic_filebuf< _CharT, _Traits > & __y) [inline]

Swap specialization for filebufs.

Definition at line 1264 of file fstream.

3.10.4.259 template<class _CharT , class _Traits > void std::swap (basic_ifstream< _CharT, _Traits > & __x, basic_ifstream< _CharT, _Traits > & __y) [inline]

Swap specialization for ifstreams.

Definition at line 1271 of file fstream.

3.10.4.260 template<class _CharT , class _Traits > void std::swap (basic_ofstream< _CharT, _Traits > & __x, basic_ofstream< _CharT, _Traits > & __y) [inline]

Swap specialization for ofstreams.

Definition at line 1278 of file fstream.

3.10.4.261 template<class _CharT , class _Traits > void std::swap (basic_fstream< _CharT, _Traits > & __x, basic_fstream< _CharT, _Traits > & __y) [inline]

Swap specialization for fstreams.

Definition at line 1285 of file fstream.

3.10.4.262 template<typename _Tp , typename _Alloc > void std::swap (forward_list< _Tp, _Alloc > & __lx, forward_list< _Tp, _Alloc > & __ly) [inline], [noexcept]

See std::forward_list::swap().

Definition at line 1505 of file forward_list.h.

3.10.4.263 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > void std::swap (map< _Key, _Tp, _Compare, _Alloc > & __x, map< _Key, _Tp, _Compare, _Alloc > & __y) [inline], [noexcept]

See std::map::swap().

Definition at line 1537 of file stl_map.h.

3.10.4.264 template<typename _Tp , typename _Alloc > void std::swap (vector< _Tp, _Alloc > & __x, vector< _Tp, _Alloc > & __y) [inline], [noexcept]

See std::vector::swap().

Definition at line 1962 of file stl_vector.h.

3.10.4.265 template<typename _Tp , typename _Alloc > void std::swap (list< _Tp, _Alloc > & __x, list< _Tp, _Alloc > & __y) [inline], [noexcept]

See std::list::swap().

Definition at line 2082 of file stl_list.h.

3.10.4.266 template<typename _Tp , typename _Alloc > void std::swap (deque< _Tp, _Alloc > & __x, deque< _Tp, _Alloc > & __y) [inline], [noexcept]

See std::deque::swap().

Definition at line 2311 of file stl_deque.h.

3.10.4.267 template<typename _CharT , typename _Traits , typename _Alloc > void std::swap (basic_string< _CharT, _Traits, _Alloc > & __lhs, basic_string< _CharT, _Traits, _Alloc > & __rhs) [inline], [noexcept]

Swap contents of two strings.

Parameters

__lhs	First string.
__rhs	Second string.

Exchanges the contents of *__lhs* and *__rhs* in constant time.

Definition at line 6430 of file basic_string.h.

3.10.4.268 template<typename _CharT > _CharT std::tolower (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.tolower(__c).

Definition at line 2649 of file locale_facets.h.

3.10.4.269 template<typename _CharT > _CharT std::toupper (_CharT __c, const locale & __loc) [inline]

Convenience interface to ctype.toupper(__c).

Definition at line 2643 of file locale_facets.h.

3.10.4.270 ios_base& std::unitbuf (ios_base & __base) [inline]

Calls base.setf(ios_base::unitbuf).

Definition at line 1004 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::unitbuf.

3.10.4.271 ios_base& std::uppercase (ios_base & __base) [inline]

Calls base.setf(ios_base::uppercase).

Definition at line 988 of file ios_base.h.

References __gnu_debug::__base(), std::ios_base::setf(), and std::ios_base::uppercase.

3.10.4.272 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::ws (basic_istream< _CharT, _Traits > & __is)

Quick and easy way to eat whitespace.

This manipulator extracts whitespace characters, stopping when the next character is non-whitespace, or when the input sequence is empty. If the sequence is empty, `eofbit` is set in the stream, but not `failbit`.

The current locale is used to distinguish whitespace characters.

Example:

```
MyClass  mc;

std::cin >> std::ws >> mc;
```

will skip leading whitespace before calling operator>> on cin and your object. Note that the same effect can be achieved by creating a std::basic_istream::sentry inside your definition of operator>>.

Definition at line 1024 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::getloc(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

3.10.5 Variable Documentation

3.10.5.1 ios_base::Init std::__ioinit [static]

Linked to standard error (buffered)

Definition at line 74 of file iostream.

3.10.5.2 ostream std::cerr

Linked to standard output.

3.10.5.3 istream std::cin

Linked to standard input.

3.10.5.4 ostream std::clog

Linked to standard error (unbuffered)

3.10.5.5 ostream std::cout

Linked to standard input.

3.10.5.6 template<typename _Tp > constexpr bool std::is_nothrow_swappable_v [inline]

is_nothrow_swappable_v

Definition at line 2744 of file type_traits.

3.10.5.7 template<typename _Tp , typename _Up > constexpr bool std::is_nothrow_swappable_with_v [inline]

is_nothrow_swappable_with_v

Definition at line 2828 of file type_traits.

3.10.5.8 template<typename _Tp > constexpr bool std::is_swappable_v [inline]

is_swappable_v

Definition at line 2739 of file type_traits.

3.10.5.9 template<typename _Tp , typename _Up > constexpr bool std::is_swappable_with_v [inline]

is_swappable_with_v

Definition at line 2823 of file type_traits.

3.10.5.10 wostream std::wcerr

Linked to standard output.

3.10.5.11 wistream std::wcin

Linked to standard error (buffered)

3.10.5.12 wostream std::wclog

Linked to standard error (unbuffered)

3.10.5.13 wostream std::wcout

Linked to standard input.

3.11 std::__debug Namespace Reference

Classes

- class bitset
- class deque

- class forward_list
- class list
- class map
- class multimap
- class multiset
- class set
- class unordered_map
- class unordered_multimap
- class unordered_multiset
- class unordered_set
- class vector

Functions

- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp & **get** (array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp && **get** (array< _Tp, _Nm > &&__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp & **get** (const array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp && **get** (const array< _Tp, _Nm > &&__arr) noexcept
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator!=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator!=** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator!=** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator!=** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator!=** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator!=** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator!=** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator!=** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator!=** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator!=** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **operator!=** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)

- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator!=** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator!=** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<size_t _Nb>
  bitset< _Nb > **operator&** (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator<** (const array< _Tp, _Nm > &__a, const array< _Tp, _Nm > &__b)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator<** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator<** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator<** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator<** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator<** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator<** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator<** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **operator<** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , size_t _Nb>
  std::basic_ostream< _CharT, _Traits > & **operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const bitset< _Nb > &__x)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator<=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator<=** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator<=** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator<=** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator<=** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator<=** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator<=** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool operator<= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)

- template<typename _Tp , typename _Alloc >
  bool **operator<=** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator==** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator==** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator==** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator==** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator==** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator==** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator==** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator==** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator==** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool **operator==** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **operator==** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator==** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **operator==** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator>** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator>** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator>** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator>** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator>** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator>** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)

- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator**> (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool operator> (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **operator**> (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **operator**>= (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator**>= (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **operator**>= (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator**>= (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator**>= (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **operator**>= (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **operator**>= (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool operator>= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **operator**>= (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , size_t _Nb>
  std::basic_istream< _CharT,
  _Traits > & **operator**>> (std::basic_istream< _CharT, _Traits > &__is, bitset< _Nb > &__x)
- template<size_t _Nb>
  bitset< _Nb > **operator**^ (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > **operator**| (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<typename _Tp , size_t _Nm>
  enable_if< !::__array_traits
  < _Tp, _Nm >
  ::_Is_swappable::value >::type **swap** (array< _Tp, _Nm > &, array< _Tp, _Nm > &)=delete
- template<typename _Tp , std::size_t _Nm>
  constexpr void **swap** (array< _Tp, _Nm > &__one, array< _Tp, _Nm > &__two) noexcept(noexcept(__one.swap(__two)))
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  void **swap** (unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, unordered_set< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Key , typename _Compare , typename _Allocator >
  void **swap** (multiset< _Key, _Compare, _Allocator > &__x, multiset< _Key, _Compare, _Allocator > &__y) noexcept(/*conditional */)
- template<typename _Key , typename _Compare , typename _Allocator >
  void **swap** (set< _Key, _Compare, _Allocator > &__x, set< _Key, _Compare, _Allocator > &__y) noexcept(/*conditional */)

- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  void **swap** (multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, multimap< _Key, _Tp, _Compare, _Allocator > &__rhs) noexcept(/*conditional */)
- template<typename _Tp , typename _Alloc >
  void **swap** (deque< _Tp, _Alloc > &__lhs, deque< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  void **swap** (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Tp , typename _Alloc >
  void **swap** (vector< _Tp, _Alloc > &__lhs, vector< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  void **swap** (map< _Key, _Tp, _Compare, _Allocator > &__lhs, map< _Key, _Tp, _Compare, _Allocator > &__rhs) noexcept(/*conditional */)
- template<typename _Tp , typename _Alloc >
  void swap (forward_list< _Tp, _Alloc > &__lx, forward_list< _Tp, _Alloc > &__ly) noexcept(noexcept(__lx.swap(__ly)))
- template<typename _Tp , typename _Alloc >
  void **swap** (list< _Tp, _Alloc > &__lhs, list< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  void **swap** (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  void **swap** (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))

3.11.1 Detailed Description

GNU debug code, replaces standard behavior with debug behavior. Macros and namespaces used by the implementation outside of debug wrappers to verify certain properties. The __glibcxx_requires_xxx macros are merely wrappers around the __glibcxx_check_xxx wrappers when we are compiling with debug mode, but disappear when we are in release mode so that there is no checking performed in, e.g., the standard library algorithms.

3.11.2 Function Documentation

3.11.2.1 template<typename _Tp , typename _Alloc > bool std::__debug::operator<= (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*) [inline]

Based on operator<.

Definition at line 877 of file debug/forward_list.

3.11.2.2 template<typename _Tp , typename _Alloc > bool std::__debug::operator> (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*) [inline]

Based on operator<.

Definition at line 863 of file debug/forward_list.

3.11.2.3 template<typename _Tp , typename _Alloc > bool std::__debug::operator>= (const forward_list< _Tp, _Alloc > & *__lx*, const forward_list< _Tp, _Alloc > & *__ly*) [inline]

Based on operator<.

Definition at line 870 of file debug/forward_list.

3.11.2.4 template<typename _Tp , typename _Alloc > void std::__debug::swap (forward_list< _Tp, _Alloc > & *__lx*, forward_list< _Tp, _Alloc > & *__ly*) [inline], [noexcept]

See std::forward_list::swap().

Definition at line 885 of file debug/forward_list.

3.12 std::__detail Namespace Reference

Classes

- struct _BracketMatcher
- class _Compiler
- struct _Default_ranged_hash
- struct _Equality
- struct _Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct _Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- class _Executor
- struct _Hash_code_base
- struct _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >
- struct _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >
- struct _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >
- struct _Hash_node
- struct _Hash_node< _Value, false >
- struct _Hash_node< _Value, true >
- struct _Hash_node_base
- struct _Hash_node_value_base
- struct _Hashtable_alloc
- struct _Hashtable_base
- struct _Hashtable_ebo_helper
- struct _Hashtable_ebo_helper< _Nm, _Tp, false >
- struct _Hashtable_ebo_helper< _Nm, _Tp, true >
- struct _Hashtable_traits
- struct _Insert
- struct _Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct _Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct _Insert_base
- struct _List_node_base
- struct _List_node_header
- struct _Local_const_iterator
- struct _Local_iterator
- struct _Local_iterator_base
- struct _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >
- struct _Map_base
- struct _Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct _Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct _Mask_range_hashing
- struct _Mod_range_hashing
- struct _Node_const_iterator
- struct _Node_iterator
- struct _Node_iterator_base

- struct _Power2_rehash_policy
- struct _Prime_rehash_policy
- struct _Quoted_string
- struct _Rehash_base
- struct _Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type >
- struct _Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type >
- class _Scanner
- class _StateSeq

Typedefs

- template<typename _Iter , typename _TraitsT >
  using **__disable_if_contiguous_iter** = __enable_if_t< !__is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >
- template<typename _Iter , typename _TraitsT >
  using **__enable_if_contiguous_iter** = __enable_if_t< __is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >
- template<typename _Policy >
  using **__has_load_factor** = typename _Policy::__has_load_factor
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash >
  using **__hash_code_for_local_iter** = _Hash_code_storage< _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >>
- template<typename _Tp >
  using **__integer_from_chars_result_type** = enable_if_t< __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >, is_same< char, remove_cv_t< _Tp >>>::value, from_chars_result >
- template<typename _Tp >
  using **__integer_to_chars_result_type** = enable_if_t< __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >, is_same< char, remove_cv_t< _Tp >>>::value, to_chars_result >
- template<typename _Tp >
  using **__unsigned_least_t** = typename __to_chars_unsigned_type< _Tp >::type
- template<typename _CharT >
  using **_Matcher** = std::function< bool(_CharT)>
- typedef long **_StateIdT**

Enumerations

- enum _Opcode : int {
  _S_opcode_unknown, **_S_opcode_alternative**, **_S_opcode_repeat**, **_S_opcode_backref**, **_S_opcode_line_begin_assertion**, **_S_opcode_line_end_assertion**, **_S_opcode_word_boundary**, **_S_opcode_subexpr_lookahead**, **_S_opcode_subexpr_begin**, **_S_opcode_subexpr_end**, **_S_opcode_dummy**, **_S_opcode_match**, **_S_opcode_accept** }
- enum **_RegexExecutorPolicy** : int { **_S_auto**, **_S_alternate** }

Functions

- template<typename _Up , typename _Tp >
  constexpr _Up **__absu** (_Tp __val)

- template<typename _Up >
  void **__absu** (bool)=delete
- std::size_t __clp2 (std::size_t __n) noexcept
- template<typename _TraitsT , typename _FwdIter >
  __enable_if_contiguous_iter
  < _FwdIter, _TraitsT > **__compile_nfa** (_FwdIter __first, _FwdIter __last, const typename _TraitsT::locale_type &__loc, regex_constants::syntax_option_type __flags)
- template<typename _TraitsT , typename _FwdIter >
  __disable_if_contiguous_iter
  < _FwdIter, _TraitsT > **__compile_nfa** (_FwdIter __first, _FwdIter __last, const typename _TraitsT::locale_type &__loc, regex_constants::syntax_option_type __flags)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **__distance_fw** (_Iterator __first, _Iterator __last, std::input_iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **__distance_fw** (_Iterator __first, _Iterator __last, std::forward_iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **__distance_fw** (_Iterator __first, _Iterator __last)
- template<typename _Container , typename _Predicate >
  _Container::size_type **__erase_nodes_if** (_Container &__cont, _Predicate __pred)
- template<typename _ValT , typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **__extract_params** (basic_istream< _CharT, _Traits > &__is, vector< _ValT > &__vals, size_t __n)
- template<typename _Tp >
  bool __from_chars_alnum (const char *&__first, const char *__last, _Tp &__val, int __base)
- constexpr unsigned char **__from_chars_alpha_to_num** (char __c)
- template<typename _Tp >
  bool __from_chars_binary (const char *&__first, const char *__last, _Tp &__val)
- template<typename _Tp >
  bool __from_chars_digit (const char *&__first, const char *__last, _Tp &__val, int __base)
- template<typename _Tp >
  constexpr _Tp **__gcd** (_Tp __m, _Tp __n)
- template<typename _Tp >
  constexpr _Tp **__lcm** (_Tp __m, _Tp __n)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  _OutputIterator **__normalize** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &_-
  _factor)
- template<typename _Tp >
  bool **__raise_and_add** (_Tp &__val, int __base, unsigned char __c)
- template<typename _BiIter , typename _Alloc , typename _CharT , typename _TraitsT , _RegexExecutorPolicy __policy, bool __match_-
  mode>
  bool **__regex_algo_impl** (_BiIter __s, _BiIter __e, match_results< _BiIter, _Alloc > &__m, const basic_regex<
  _CharT, _TraitsT > &__re, regex_constants::match_flag_type __flags)
- template<typename _Tp >
  void **__return_temporary_buffer** (_Tp *__p, size_t __len)
- template<typename _Tp >
  to_chars_result **__to_chars** (char *__first, char *__last, _Tp __val, int __base) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **__to_chars_10** (char *__first, char *__last, _Tp __val) noexcept

- template<typename _Tp >
  void **__to_chars_10_impl** (char *__first, unsigned __len, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **__to_chars_16** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **__to_chars_2** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **__to_chars_8** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  constexpr unsigned **__to_chars_len** (_Tp __value, int __base) noexcept
- template<typename _Tp >
  constexpr unsigned **__to_chars_len_2** (_Tp __value) noexcept
- template<typename _Tp >
  bool **_Power_of_2** (_Tp __x)
- template<typename _Value , bool _Cache_hash_code>
  bool **operator!=** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _Node_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **operator!=** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)
- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const _Quoted_string< const _CharT *, _CharT > &__str)
- template<typename _CharT , typename _Traits , typename _String >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const _Quoted_string< _String, _CharT > &__str)
- template<typename _Value , bool _Cache_hash_code>
  bool **operator==** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _Node_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **operator==** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)
- template<typename _CharT , typename _Traits , typename _Alloc >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, const _Quoted_string< basic_string< _CharT, _Traits, _Alloc > &, _CharT > &__str)

Variables

- static const _StateIdT **_S_invalid_state_id**

3.12.1 Detailed Description

Implementation details not part of the namespace std interface.

3.12.2 Function Documentation

3.12.2.1 template<typename _Tp > bool std::__detail::__from_chars_alnum (const char *& __first, const char * __last, _Tp & __val, int __base)

std::from_chars implementation for integers in bases 11 to 26.

Definition at line 560 of file charconv.

References std::isdigit().

Referenced by std::from_chars().

3.12.2.2 template<typename _Tp > bool std::__detail::__from_chars_binary (const char *& __first, const char * __last, _Tp & __val)

std::from_chars implementation for integers in base 2.

Definition at line 414 of file charconv.

Referenced by std::from_chars().

3.12.2.3 template<typename _Tp > bool std::__detail::__from_chars_digit (const char *& __first, const char * __last, _Tp & __val, int __base)

std::from_chars implementation for integers in bases 3 to 10.

Definition at line 441 of file charconv.

References __gnu_debug::__base().

Referenced by std::from_chars().

3.12.2.4 template<typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& std::__detail::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const _Quoted_string< const _CharT *, _CharT > & __str)

Inserter for quoted strings.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 2344 quoted()'s interaction with padding is unclear

Definition at line 93 of file quoted_string.h.

References std::basic_ostringstream< _CharT, _Traits, _Alloc >::str().

3.12.2.5 template<typename _CharT , typename _Traits , typename _String > std::basic_ostream<_CharT, _Traits>& std::__detail::operator<< (std::basic_ostream< _CharT, _Traits > & __os, const _Quoted_string< _String, _CharT > & __str)

Inserter for quoted strings.

_GLIBCXX_RESOLVE_LIB_DEFECTS DR 2344 quoted()'s interaction with padding is unclear

Definition at line 117 of file quoted_string.h.

References std::basic_ostringstream< _CharT, _Traits, _Alloc >::str().

3.12.2.6 template<typename _CharT , typename _Traits , typename _Alloc > std::basic_istream<_CharT, _Traits>& std::__detail::operator>> (std::basic_istream< _CharT, _Traits > & __is, const _Quoted_string< basic_string< _CharT, _Traits, _Alloc > &, _CharT > & __str)

Extractor for delimited strings. The left and right delimiters can be different.

Definition at line 139 of file quoted_string.h.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::flags(), std::basic_ios< _CharT, _Traits >::good(), std::ios_base::setf(), std::skipws(), and std::basic_istream< _CharT, _Traits >::unget().

3.13 std::__parallel Namespace Reference

Classes

- struct _CRandNumber

Functions

- template<typename _IIter , typename _Tp , typename _Tag >
  _Tp **__accumulate_switch** (_IIter, _IIter, _Tp, _Tag)
- template<typename _IIter , typename _Tp , typename _IteratorTag >
  _Tp **__accumulate_switch** (_IIter __begin, _IIter __end, _Tp __init, _IteratorTag)
- template<typename _IIter , typename _Tp , typename _BinaryOper , typename _Tag >
  _Tp **__accumulate_switch** (_IIter, _IIter, _Tp, _BinaryOper, _Tag)
- template<typename _IIter , typename _Tp , typename _BinaryOperation , typename _IteratorTag >
  _Tp **__accumulate_switch** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, _IteratorTag)
- template<typename _RAIter , typename _Tp , typename _BinaryOper >
  _Tp **__accumulate_switch** (_RAIter, _RAIter, _Tp, _BinaryOper, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename __RAIter , typename _Tp , typename _BinaryOperation >
  _Tp **__accumulate_switch** (__RAIter __begin, __RAIter __end, _Tp __init, _BinaryOperation __binary_op, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OIter , typename _BinaryOper , typename _Tag1 , typename _Tag2 >
  _OIter **__adjacent_difference_switch** (_IIter, _IIter, _OIter, _BinaryOper, _Tag1, _Tag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **__adjacent_difference_switch** (_IIter, _IIter, _OIter, _BinaryOper, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
  _OutputIterator **__adjacent_difference_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **__adjacent_difference_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _IterTag >
  _FIter **__adjacent_find_switch** (_FIter, _FIter, _IterTag)
- template<typename _FIter , typename _BiPredicate , typename _IterTag >
  _FIter **__adjacent_find_switch** (_FIter, _FIter, _BiPredicate, _IterTag)
- template<typename _RAIter , typename _BiPredicate >
  _RAIter **__adjacent_find_switch** (_RAIter, _RAIter, _BiPredicate, random_access_iterator_tag)
- template<typename _RAIter >
  _RAIter **__adjacent_find_switch** (_RAIter __begin, _RAIter __end, random_access_iterator_tag)
- template<typename _FIterator , typename _IteratorTag >
  _FIterator **__adjacent_find_switch** (_FIterator __begin, _FIterator __end, _IteratorTag)
- template<typename _FIterator , typename _BinaryPredicate , typename _IteratorTag >
  _FIterator **__adjacent_find_switch** (_FIterator __begin, _FIterator __end, _BinaryPredicate __pred, _IteratorTag)

- template<typename _RAIter , typename _BinaryPredicate >
  _RAIter **__adjacent_find_switch** (_RAIter __begin, _RAIter __end, _BinaryPredicate __pred, random_access_iterator_tag)
- template<typename _IIter , typename _Predicate , typename _IterTag >
  iterator_traits< _IIter >
  ::difference_type **__count_if_switch** (_IIter, _IIter, _Predicate, _IterTag)
- template<typename _RAIter , typename _Predicate >
  iterator_traits< _RAIter >
  ::difference_type **__count_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Predicate , typename _IteratorTag >
  iterator_traits< _IIter >
  ::difference_type **__count_if_switch** (_IIter __begin, _IIter __end, _Predicate __pred, _IteratorTag)
- template<typename _IIter , typename _Tp , typename _IterTag >
  iterator_traits< _IIter >
  ::difference_type **__count_switch** (_IIter, _IIter, const _Tp &, _IterTag)
- template<typename _RAIter , typename _Tp >
  iterator_traits< _RAIter >
  ::difference_type **__count_switch** (_RAIter __begin, _RAIter __end, const _Tp &__value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp , typename _IteratorTag >
  iterator_traits< _IIter >
  ::difference_type **__count_switch** (_IIter __begin, _IIter __end, const _Tp &__value, _IteratorTag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  bool **__equal_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  bool **__equal_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _FIter , typename _IterTag1 , typename _IterTag2 >
  _IIter **__find_first_of_switch** (_IIter, _IIter, _FIter, _FIter, _IterTag1, _IterTag2)
- template<typename _RAIter , typename _FIter , typename _BiPredicate , typename _IterTag >
  _RAIter **__find_first_of_switch** (_RAIter, _RAIter, _FIter, _FIter, _BiPredicate, random_access_iterator_tag, _IterTag)
- template<typename _IIter , typename _FIter , typename _BiPredicate , typename _IterTag1 , typename _IterTag2 >
  _IIter **__find_first_of_switch** (_IIter, _IIter, _FIter, _FIter, _BiPredicate, _IterTag1, _IterTag2)
- template<typename _IIter , typename _FIterator , typename _IteratorTag1 , typename _IteratorTag2 >
  _IIter **__find_first_of_switch** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter , typename _FIterator , typename _BinaryPredicate , typename _IteratorTag >
  _RAIter **__find_first_of_switch** (_RAIter __begin1, _RAIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp, random_access_iterator_tag, _IteratorTag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate , typename _IteratorTag1 , typename _IteratorTag2 >
  _IIter **__find_first_of_switch** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _Predicate , typename _IterTag >
  _IIter **__find_if_switch** (_IIter, _IIter, _Predicate, _IterTag)
- template<typename _IIter , typename _Predicate , typename _IteratorTag >
  _IIter **__find_if_switch** (_IIter __begin, _IIter __end, _Predicate __pred, _IteratorTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **__find_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)
- template<typename _IIter , typename _Tp , typename _IteratorTag >
  _IIter **__find_switch** (_IIter __begin, _IIter __end, const _Tp &__val, _IteratorTag)

- template<typename _RAIter , typename _Tp >
  _RAIter **__find_switch** (_RAIter __begin, _RAIter __end, const _Tp &__val, random_access_iterator_tag)
- template<typename _IIter , typename _Tp , typename _IterTag >
  _IIter **__find_switch** (_IIter, _IIter, const _Tp &, _IterTag)
- template<typename _IIter , typename _Function , typename _IteratorTag >
  _Function **__for_each_switch** (_IIter __begin, _IIter __end, _Function __f, _IteratorTag)
- template<typename _RAIter , typename _Function >
  _Function **__for_each_switch** (_RAIter __begin, _RAIter __end, _Function __f, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Function , typename _IterTag >
  _Function **__for_each_switch** (_IIter, _IIter, _Function, _IterTag)
- template<typename _OIter , typename _Size , typename _Generator , typename _IterTag >
  _OIter **__generate_n_switch** (_OIter, _Size, _Generator, _IterTag)
- template<typename _OutputIterator , typename _Size , typename _Generator , typename _IteratorTag >
  _OutputIterator **__generate_n_switch** (_OutputIterator __begin, _Size __n, _Generator __gen, _IteratorTag)
- template<typename _RAIter , typename _Size , typename _Generator >
  _RAIter **__generate_n_switch** (_RAIter __begin, _Size __n, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _Generator , typename _IterTag >
  void **__generate_switch** (_FIter, _FIter, _Generator, _IterTag)
- template<typename _FIterator , typename _Generator , typename _IteratorTag >
  void **__generate_switch** (_FIterator __begin, _FIterator __end, _Generator __gen, _IteratorTag)
- template<typename _RAIter , typename _Generator >
  void **__generate_switch** (_RAIter __begin, _RAIter __end, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **__inner_product_switch** (_RAIter1, _RAIter1, _RAIter2, _Tp, _BinaryFunction1, _BinaryFunction2, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 , typename _Tag1 , typename _Tag2 >
  _Tp **__inner_product_switch** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, _Tag1, _Tag2)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 , typename _IteratorTag1 , typename _IteratorTag2 >
  _Tp **__inner_product_switch** (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _Tp __init, _BinaryFunction1 __binary_op1, _BinaryFunction2 __binary_op2, _IteratorTag1, _IteratorTag2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  bool **__lexicographical_compare_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _Predicate, _IterTag1, _IterTag2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  bool **__lexicographical_compare_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  bool **__lexicographical_compare_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter , typename _Compare , typename _IterTag >
  _FIter **__max_element_switch** (_FIter, _FIter, _Compare, _IterTag)
- template<typename _FIterator , typename _Compare , typename _IteratorTag >
  _FIterator **__max_element_switch** (_FIterator __begin, _FIterator __end, _Compare __comp, _IteratorTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **__max_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)

- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **__merge_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **__merge_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **__merge_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **__merge_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter , typename _Compare , typename _IterTag >
  _FIter **__min_element_switch** (_FIter, _FIter, _Compare, _IterTag)
- template<typename _FIterator , typename _Compare , typename _IteratorTag >
  _FIterator **__min_element_switch** (_FIterator __begin, _FIterator __end, _Compare __comp, _IteratorTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **__min_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  pair< _IIter1, _IIter2 > **__mismatch_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  pair< _RAIter1, _RAIter2 > **__mismatch_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  pair< _IIter1, _IIter2 > **__mismatch_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  pair< _RAIter1, _RAIter2 > **__mismatch_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  pair< _IIter1, _IIter2 > **__mismatch_switch** (_IIter1, _IIter1, _IIter2, _Predicate, _IterTag1, _IterTag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper , typename _Tag1 , typename _Tag2 >
  _OIter **__partial_sum_switch** (_IIter, _IIter, _OIter, _BinaryOper, _Tag1, _Tag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **__partial_sum_switch** (_IIter, _IIter, _OIter, _BinaryOper, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
  _OutputIterator **__partial_sum_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **__partial_sum_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter , typename _Predicate , typename _IterTag >
  _FIter **__partition_switch** (_FIter, _FIter, _Predicate, _IterTag)
- template<typename _FIterator , typename _Predicate , typename _IteratorTag >
  _FIterator **__partition_switch** (_FIterator __begin, _FIterator __end, _Predicate __pred, _IteratorTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **__partition_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)

- template<typename _FIter , typename _Predicate , typename _Tp , typename _IterTag >
  void **__replace_if_switch** (_FIter, _FIter, _Predicate, const _Tp &, _IterTag)
- template<typename _FIterator , typename _Predicate , typename _Tp , typename _IteratorTag >
  void **__replace_if_switch** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, _IteratorTag)
- template<typename _RAIter , typename _Predicate , typename _Tp >
  void **__replace_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _Tp , typename _IterTag >
  void **__replace_switch** (_FIter, _FIter, const _Tp &, const _Tp &, _IterTag)
- template<typename _FIterator , typename _Tp , typename _IteratorTag >
  void **__replace_switch** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, _IteratorTag)
- template<typename _RAIter , typename _Tp >
  void **__replace_switch** (_RAIter __begin, _RAIter __end, const _Tp &__old_value, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _RAIter **__search_n_switch** (_RAIter, _RAIter, _Integer, const _Tp &, _BiPredicate, random_access_iterator_tag)
- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate , typename _IterTag >
  _FIter **__search_n_switch** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate, _IterTag)
- template<typename _RAIter , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _RAIter **__search_n_switch** (_RAIter __begin, _RAIter __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, random_access_iterator_tag)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate , typename _IteratorTag >
  _FIterator **__search_n_switch** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, _IteratorTag)
- template<typename _FIter1 , typename _FIter2 , typename _IterTag1 , typename _IterTag2 >
  _FIter1 **__search_switch** (_FIter1, _FIter1, _FIter2, _FIter2, _IterTag1, _IterTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _BiPredicate >
  _RAIter1 **__search_switch** (_RAIter1, _RAIter1, _RAIter2, _RAIter2, _BiPredicate, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate , typename _IterTag1 , typename _IterTag2 >
  _FIter1 **__search_switch** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate, _IterTag1, _IterTag2)
- template<typename _RAIter1 , typename _RAIter2 >
  _RAIter1 **__search_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _IteratorTag1 , typename _IteratorTag2 >
  _FIterator1 **__search_switch** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _BinaryPredicate >
  _RAIter1 **__search_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _BinaryPredicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate , typename _IteratorTag1 , typename _IteratorTag2 >
  _FIterator1 **__search_switch** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **__set_difference_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **__set_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)

- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **__set_difference_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **__set_intersection_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **__set_intersection_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **__set_intersection_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **__set_symmetric_difference_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **__set_symmetric_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **__set_symmetric_difference_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **__set_union_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **__set_union_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **__set_union_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter , typename _OIter , typename _UnaryOperation , typename _IterTag1 , typename _IterTag2 >
  _OIter **__transform1_switch** (_IIter, _IIter, _OIter, _UnaryOperation, _IterTag1, _IterTag2)
- template<typename _RAIIter , typename _RAOIter , typename _UnaryOperation >
  _RAOIter **__transform1_switch** (_RAIIter, _RAIIter, _RAOIter, _UnaryOperation, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_balanced)
- template<typename _RAIter1 , typename _RAIter2 , typename _UnaryOperation >
  _RAIter2 **__transform1_switch** (_RAIter1 __begin, _RAIter1 __end, _RAIter2 __result, _UnaryOperation __unary_op, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _UnaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
  _RAIter2 **__transform1_switch** (_RAIter1 __begin, _RAIter1 __end, _RAIter2 __result, _UnaryOperation __unary_op, _IteratorTag1, _IteratorTag2)

- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _BiOperation >
  _RAIter3 **__transform2_switch** (_RAIter1, _RAIter1, _RAIter2, _RAIter3, _BiOperation, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_balanced)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation , typename _Tag1 , typename _Tag2 , typename _Tag3 >
  _OIter **__transform2_switch** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, _Tag1, _Tag2, _Tag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _BinaryOperation >
  _RAIter3 **__transform2_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter3 __result, _BinaryOperation __binary_op, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation , typename _Tag1 , typename _Tag2 , typename _Tag3 >
  _OutputIterator **__transform2_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, _Tag1, _Tag2, _Tag3)
- template<typename _IIter , typename _OutputIterator , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  _OutputIterator **__unique_copy_switch** (_IIter __begin, _IIter __last, _OutputIterator __out, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter , typename _RandomAccessOutputIterator , typename _Predicate >
  _RandomAccessOutputIterator **__unique_copy_switch** (_RAIter __begin, _RAIter __last, _RandomAccessOutputIterator __out, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _OIter , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  _OIter **__unique_copy_switch** (_IIter, _IIter, _OIter, _Predicate, _IterTag1, _IterTag2)
- template<typename _RAIter , typename _RandomAccess_OIter , typename _Predicate >
  _RandomAccess_OIter **__unique_copy_switch** (_RAIter, _RAIter, _RandomAccess_OIter, _Predicate, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _Tp >
  _Tp **accumulate** (_IIter, _IIter, _Tp)
- template<typename _IIter , typename _Tp >
  _Tp **accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _Tp **accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **accumulate** (_IIter, _IIter, _Tp, _BinaryOper)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **accumulate** (_IIter, _IIter, _Tp, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **accumulate** (_IIter, _IIter, _Tp, _BinaryOper, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op)
- template<typename _IIter , typename _OIter >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper)
- template<typename _IIter , typename _OIter >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)

- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _FIter >
  _FIter **adjacent_find** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **adjacent_find** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _BiPredicate >
  _FIter **adjacent_find** (_FIter, _FIter, _BiPredicate)
- template<typename _FIter , typename _BiPredicate >
  _FIter **adjacent_find** (_FIter, _FIter, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **adjacent_find** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _BinaryPredicate >
  _FIterator **adjacent_find** (_FIterator __begin, _FIterator __end, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **adjacent_find** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _BinaryPredicate >
  _FIterator **adjacent_find** (_FIterator __begin, _FIterator __end, _BinaryPredicate __pred)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **count** (_IIter __begin, _IIter __end, const _Tp &__value)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::sequential_tag)

- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **count_if** (_IIter __begin, _IIter __end, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 >
  bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 >
  bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool **equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _BinaryPredicate __binary_pred)
- template<typename _IIter , typename _Tp >
  _IIter **find** (_IIter __begin, _IIter __end, const _Tp &__val, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _IIter **find** (_IIter __begin, _IIter __end, const _Tp &__val)
- template<typename _IIter , typename _FIter >
  _IIter **find_first_of** (_IIter, _IIter, _FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIter , typename _BiPredicate >
  _IIter **find_first_of** (_IIter, _IIter, _FIter, _FIter, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIter , typename _BiPredicate >
  _IIter **find_first_of** (_IIter, _IIter, _FIter, _FIter, _BiPredicate)
- template<typename _IIter , typename _FIter >
  _IIter **find_first_of** (_IIter, _IIter, _FIter, _FIter)
- template<typename _IIter , typename _FIterator >
  _IIter **find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate >
  _IIter **find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate >
  _IIter **find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp)
- template<typename _IIter , typename _FIterator >
  _IIter **find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2)
- template<typename _IIter , typename _Predicate >
  _IIter **find_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Predicate >
  _IIter **find_if** (_IIter __begin, _IIter __end, _Predicate __pred)

- template<typename _IIter , typename _Function >
  _Function **for_each** (_IIter __begin, _IIter __end, _Function __f, __gnu_parallel::sequential_tag)
- template<typename _Iterator , typename _Function >
  _Function **for_each** (_Iterator __begin, _Iterator __end, _Function __f, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _Iterator , typename _Function >
  _Function **for_each** (_Iterator __begin, _Iterator __end, _Function __f)
- template<typename _IIter , typename _Function >
  _Function **for_each** (_IIter, _IIter, _Function)
- template<typename _FIter , typename _Generator >
  void **generate** (_FIter, _FIter, _Generator)
- template<typename _FIter , typename _Generator >
  void **generate** (_FIter, _FIter, _Generator, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Generator >
  void **generate** (_FIter, _FIter, _Generator, __gnu_parallel::_Parallelism)
- template<typename _FIterator , typename _Generator >
  void **generate** (_FIterator __begin, _FIterator __end, _Generator __gen, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Generator >
  void **generate** (_FIterator __begin, _FIterator __end, _Generator __gen, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Generator >
  void **generate** (_FIterator __begin, _FIterator __end, _Generator __gen)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **generate_n** (_OIter, _Size, _Generator)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **generate_n** (_OIter, _Size, _Generator, __gnu_parallel::sequential_tag)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **generate_n** (_OIter, _Size, _Generator, __gnu_parallel::_Parallelism)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen, __gnu_parallel::sequential_tag)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 >
  bool **lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, __gnu_parallel::sequential_tag)

- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred)
- template<typename _FIter >
  _FIter **max_element** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **max_element** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter >
  _FIter **max_element** (_FIter, _FIter, __gnu_parallel::_Parallelism)
- template<typename _FIter , typename _Compare >
  _FIter **max_element** (_FIter, _FIter, _Compare)
- template<typename _FIter , typename _Compare >
  _FIter **max_element** (_FIter, _FIter, _Compare, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Compare >
  _FIter **max_element** (_FIter, _FIter, _Compare, __gnu_parallel::_Parallelism)
- template<typename _FIterator >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _Compare >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **max_element** (_FIterator __begin, _FIterator __end, _Compare __comp)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp)

- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result)
- template<typename _FIter >
  _FIter **min_element** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **min_element** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter >
  _FIter **min_element** (_FIter, _FIter, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _Compare >
  _FIter **min_element** (_FIter, _FIter, _Compare)
- template<typename _FIter , typename _Compare >
  _FIter **min_element** (_FIter, _FIter, _Compare, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Compare >
  _FIter **min_element** (_FIter, _FIter, _Compare, __gnu_parallel::_Parallelism)
- template<typename _FIterator >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _Compare >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **min_element** (_FIterator __begin, _FIterator __end, _Compare __comp)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  pair< _InputIterator1, _InputIterator2 > **mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, __gnu_parallel::sequential_tag)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  pair< _InputIterator1, _InputIterator2 > **mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  pair< _InputIterator1, _InputIterator2 > **mismatch** (_InputIterator1 __begin1, _InputIterator1 __end1, _InputIterator2 __begin2, _InputIterator2 __end2, _BinaryPredicate __binary_pred)

- template<typename _RAIter >
  void **nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end)
- template<typename _RAIter , typename _Compare >
  void **partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end)
- template<typename _IIter , typename _OIter >
  _OIter **partial_sum** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **partial_sum** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **partial_sum** (_IIter, _IIter, _OIter __result)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **partial_sum** (_IIter, _IIter, _OIter, _BinaryOper)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _FIter , typename _Predicate >
  _FIter **partition** (_FIter, _FIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Predicate >
  _FIter **partition** (_FIter, _FIter, _Predicate)
- template<typename _FIterator , typename _Predicate >
  _FIterator **partition** (_FIterator __begin, _FIterator __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Predicate >
  _FIterator **partition** (_FIterator __begin, _FIterator __end, _Predicate __pred)
- template<typename _RAIter >
  void **random_shuffle** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void **random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &__rand, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **random_shuffle** (_RAIter __begin, _RAIter __end)

- template<typename _RAIter , typename _RandomNumberGenerator >
  void **random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &&__rand)
- template<typename _FIter , typename _Tp >
  void **replace** (_FIter, _FIter, const _Tp &, const _Tp &)
- template<typename _FIter , typename _Tp >
  void **replace** (_FIter, _FIter, const _Tp &, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Tp >
  void **replace** (_FIter, _FIter, const _Tp &, const _Tp &, __gnu_parallel::_Parallelism)
- template<typename _FIterator , typename _Tp >
  void **replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Tp >
  void **replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Tp >
  void **replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **replace_if** (_FIter, _FIter, _Predicate, const _Tp &)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **replace_if** (_FIter, _FIter, _Predicate, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **replace_if** (_FIter, _FIter, _Predicate, const _Tp &, __gnu_parallel::_Parallelism)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value)
- template<typename _FIter1 , typename _FIter2 >
  _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2, __gnu_parallel::sequential_tag)
- template<typename _FIter1 , typename _FIter2 >
  _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate >
  _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate >
  _FIter1 **search** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate)
- template<typename _FIterator1 , typename _FIterator2 >
  _FIterator1 **search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, __gnu_parallel::sequential_tag)
- template<typename _FIterator1 , typename _FIterator2 >
  _FIterator1 **search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate >
  _FIterator1 **search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate >
  _FIterator1 **search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred)
- template<typename _FIter , typename _Integer , typename _Tp >
  _FIter **search_n** (_FIter, _FIter, _Integer, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _FIter **search_n** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate, __gnu_parallel::sequential_tag)

- template<typename _FIter , typename _Integer , typename _Tp >
  _FIter **search_n** (_FIter, _FIter, _Integer, const _Tp &)
- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _FIter **search_n** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate)
- template<typename _FIterator , typename _Integer , typename _Tp >
  _FIterator **search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _FIterator **search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Integer , typename _Tp >
  _FIterator **search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _FIterator **search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)

- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare , typename _Parallelism >
  void **sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::default_parallel_tag __parallelism)

- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::parallel_tag __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_tag __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_sampling_tag __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_exact_tag __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::quicksort_tag __parallelism)
- template<typename _RAIter >
  void **sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::balanced_quicksort_tag __parallelism)
- template<typename _RAIter , typename _Compare >
  void **sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare , typename _Parallelism >
  void **stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::default_parallel_tag __parallelism)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::parallel_tag __parallelism)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_tag __parallelism)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::quicksort_tag __parallelism)
- template<typename _RAIter >
  void **stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::balanced_quicksort_tag __parallelism)
- template<typename _RAIter , typename _Compare >
  void **stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **transform** (_IIter, _IIter, _OIter, _UnaryOperation)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **transform** (_IIter, _IIter, _OIter, _UnaryOperation, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **transform** (_IIter, _IIter, _OIter, _UnaryOperation, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op, __gnu_parallel::_Parallelism __parallelism_tag)

- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _Predicate >
  _OutputIterator **unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out)
- template<typename _IIter , typename _OutputIterator , typename _Predicate >
  _OutputIterator **unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter , typename _OIter >
  _OIter **unique_copy** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _Predicate >
  _OIter **unique_copy** (_IIter, _IIter, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **unique_copy** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _Predicate >
  _OIter **unique_copy** (_IIter, _IIter, _OIter, _Predicate)

3.13.1 Detailed Description

GNU parallel code, replaces standard behavior with parallel behavior.

3.14 std::chrono Namespace Reference

Classes

- struct duration
- struct duration_values
- struct time_point
- struct treat_as_floating_point

Typedefs

- using hours = duration< int64_t, ratio< 3600 >>
- using microseconds = duration< int64_t, micro >
- using milliseconds = duration< int64_t, milli >
- using minutes = duration< int64_t, ratio< 60 >>
- using nanoseconds = duration< int64_t, nano >
- using seconds = duration< int64_t >

Functions

- template<typename _ToDur , typename _Rep , typename _Period >
  constexpr
  __enable_if_is_duration
  < _ToDur > duration_cast (const duration< _Rep, _Period > &__d)
- template<typename _ToDur , typename _Clock , typename _Dur >
  constexpr enable_if
  < __is_duration< _ToDur >
  ::value, time_point< _Clock,
  _ToDur > >::type time_point_cast (const time_point< _Clock, _Dur > &__t)

3.14.1 Detailed Description

ISO C++ 2011 namespace for date and time utilities.

3.15 std::decimal Namespace Reference

Classes

- class decimal128
- class decimal32
- class decimal64

Functions

- double **decimal128_to_double** (decimal128 __d)
- float **decimal128_to_float** (decimal128 __d)
- long double **decimal128_to_long_double** (decimal128 __d)
- long long **decimal128_to_long_long** (decimal128 __d)
- double **decimal32_to_double** (decimal32 __d)
- float **decimal32_to_float** (decimal32 __d)
- long double **decimal32_to_long_double** (decimal32 __d)
- long long decimal32_to_long_long (decimal32 __d)
- double **decimal64_to_double** (decimal64 __d)
- float **decimal64_to_float** (decimal64 __d)
- long double **decimal64_to_long_double** (decimal64 __d)
- long long **decimal64_to_long_long** (decimal64 __d)
- double **decimal_to_double** (decimal32 __d)
- double **decimal_to_double** (decimal64 __d)
- double **decimal_to_double** (decimal128 __d)
- float **decimal_to_float** (decimal32 __d)
- float **decimal_to_float** (decimal64 __d)
- float **decimal_to_float** (decimal128 __d)
- long double **decimal_to_long_double** (decimal32 __d)
- long double **decimal_to_long_double** (decimal64 __d)
- long double **decimal_to_long_double** (decimal128 __d)
- long long **decimal_to_long_long** (decimal32 __d)
- long long **decimal_to_long_long** (decimal64 __d)
- long long **decimal_to_long_long** (decimal128 __d)

- static decimal128 **make_decimal128** (long long __coeff, int __exp)
- static decimal128 **make_decimal128** (unsigned long long __coeff, int __exp)
- static decimal32 **make_decimal32** (long long __coeff, int __exp)
- static decimal32 **make_decimal32** (unsigned long long __coeff, int __exp)
- static decimal64 **make_decimal64** (long long __coeff, int __exp)
- static decimal64 **make_decimal64** (unsigned long long __coeff, int __exp)
- bool **operator!=** (decimal32 __lhs, decimal32 __rhs)
- bool **operator!=** (decimal32 __lhs, decimal64 __rhs)
- bool **operator!=** (decimal32 __lhs, decimal128 __rhs)
- bool **operator!=** (decimal32 __lhs, int __rhs)
- bool **operator!=** (decimal32 __lhs, unsigned int __rhs)
- bool **operator!=** (decimal32 __lhs, long __rhs)
- bool **operator!=** (decimal32 __lhs, unsigned long __rhs)
- bool **operator!=** (decimal32 __lhs, long long __rhs)
- bool **operator!=** (decimal32 __lhs, unsigned long long __rhs)
- bool **operator!=** (int __lhs, decimal32 __rhs)
- bool **operator!=** (unsigned int __lhs, decimal32 __rhs)
- bool **operator!=** (long __lhs, decimal32 __rhs)
- bool **operator!=** (unsigned long __lhs, decimal32 __rhs)
- bool **operator!=** (long long __lhs, decimal32 __rhs)
- bool **operator!=** (unsigned long long __lhs, decimal32 __rhs)
- bool **operator!=** (decimal64 __lhs, decimal32 __rhs)
- bool **operator!=** (decimal64 __lhs, decimal64 __rhs)
- bool **operator!=** (decimal64 __lhs, decimal128 __rhs)
- bool **operator!=** (decimal64 __lhs, int __rhs)
- bool **operator!=** (decimal64 __lhs, unsigned int __rhs)
- bool **operator!=** (decimal64 __lhs, long __rhs)
- bool **operator!=** (decimal64 __lhs, unsigned long __rhs)
- bool **operator!=** (decimal64 __lhs, long long __rhs)
- bool **operator!=** (decimal64 __lhs, unsigned long long __rhs)
- bool **operator!=** (int __lhs, decimal64 __rhs)
- bool **operator!=** (unsigned int __lhs, decimal64 __rhs)
- bool **operator!=** (long __lhs, decimal64 __rhs)
- bool **operator!=** (unsigned long __lhs, decimal64 __rhs)
- bool **operator!=** (long long __lhs, decimal64 __rhs)
- bool **operator!=** (unsigned long long __lhs, decimal64 __rhs)
- bool **operator!=** (decimal128 __lhs, decimal32 __rhs)
- bool **operator!=** (decimal128 __lhs, decimal64 __rhs)
- bool **operator!=** (decimal128 __lhs, decimal128 __rhs)
- bool **operator!=** (decimal128 __lhs, int __rhs)
- bool **operator!=** (decimal128 __lhs, unsigned int __rhs)
- bool **operator!=** (decimal128 __lhs, long __rhs)
- bool **operator!=** (decimal128 __lhs, unsigned long __rhs)
- bool **operator!=** (decimal128 __lhs, long long __rhs)
- bool **operator!=** (decimal128 __lhs, unsigned long long __rhs)
- bool **operator!=** (int __lhs, decimal128 __rhs)
- bool **operator!=** (unsigned int __lhs, decimal128 __rhs)
- bool **operator!=** (long __lhs, decimal128 __rhs)
- bool **operator!=** (unsigned long __lhs, decimal128 __rhs)
- bool **operator!=** (long long __lhs, decimal128 __rhs)
- bool **operator!=** (unsigned long long __lhs, decimal128 __rhs)

- decimal32 **operator*** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **operator*** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **operator*** (decimal32 __lhs, int __rhs)
- decimal32 **operator*** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **operator*** (decimal32 __lhs, long __rhs)
- decimal32 **operator*** (decimal32 __lhs, long long __rhs)
- decimal32 **operator*** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **operator*** (int __lhs, decimal32 __rhs)
- decimal32 **operator*** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **operator*** (long __lhs, decimal32 __rhs)
- decimal32 **operator*** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **operator*** (long long __lhs, decimal32 __rhs)
- decimal32 **operator*** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **operator*** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **operator*** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **operator*** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **operator*** (decimal64 __lhs, int __rhs)
- decimal64 **operator*** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **operator*** (decimal64 __lhs, long __rhs)
- decimal64 **operator*** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **operator*** (decimal64 __lhs, long long __rhs)
- decimal64 **operator*** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **operator*** (int __lhs, decimal64 __rhs)
- decimal64 **operator*** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **operator*** (long __lhs, decimal64 __rhs)
- decimal64 **operator*** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **operator*** (long long __lhs, decimal64 __rhs)
- decimal64 **operator*** (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **operator*** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **operator*** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **operator*** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **operator*** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **operator*** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **operator*** (decimal128 __lhs, int __rhs)
- decimal128 **operator*** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **operator*** (decimal128 __lhs, long __rhs)
- decimal128 **operator*** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **operator*** (decimal128 __lhs, long long __rhs)
- decimal128 **operator*** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **operator*** (int __lhs, decimal128 __rhs)
- decimal128 **operator*** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **operator*** (long __lhs, decimal128 __rhs)
- decimal128 **operator*** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **operator*** (long long __lhs, decimal128 __rhs)
- decimal128 **operator*** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **operator+** (decimal32 __rhs)
- decimal64 **operator+** (decimal64 __rhs)
- decimal128 **operator+** (decimal128 __rhs)
- decimal32 **operator+** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **operator+** (decimal32 __lhs, int __rhs)
- decimal32 **operator+** (decimal32 __lhs, unsigned int __rhs)

- decimal32 **operator+** (decimal32 __lhs, long __rhs)
- decimal32 **operator+** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **operator+** (decimal32 __lhs, long long __rhs)
- decimal32 **operator+** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **operator+** (int __lhs, decimal32 __rhs)
- decimal32 **operator+** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **operator+** (long __lhs, decimal32 __rhs)
- decimal32 **operator+** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **operator+** (long long __lhs, decimal32 __rhs)
- decimal32 **operator+** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **operator+** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **operator+** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **operator+** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **operator+** (unsigned long long __lhs, decimal64 __rhs)
- decimal64 **operator+** (decimal64 __lhs, int __rhs)
- decimal64 **operator+** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **operator+** (decimal64 __lhs, long __rhs)
- decimal64 **operator+** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **operator+** (decimal64 __lhs, long long __rhs)
- decimal64 **operator+** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **operator+** (int __lhs, decimal64 __rhs)
- decimal64 **operator+** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **operator+** (long __lhs, decimal64 __rhs)
- decimal64 **operator+** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **operator+** (long long __lhs, decimal64 __rhs)
- decimal128 **operator+** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **operator+** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **operator+** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **operator+** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **operator+** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **operator+** (decimal128 __lhs, int __rhs)
- decimal128 **operator+** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **operator+** (decimal128 __lhs, long __rhs)
- decimal128 **operator+** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **operator+** (decimal128 __lhs, long long __rhs)
- decimal128 **operator+** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **operator+** (int __lhs, decimal128 __rhs)
- decimal128 **operator+** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **operator+** (long __lhs, decimal128 __rhs)
- decimal128 **operator+** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **operator+** (long long __lhs, decimal128 __rhs)
- decimal128 **operator+** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **operator-** (decimal32 __rhs)
- decimal64 **operator-** (decimal64 __rhs)
- decimal128 **operator-** (decimal128 __rhs)
- decimal32 **operator-** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **operator-** (decimal32 __lhs, int __rhs)
- decimal32 **operator-** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **operator-** (decimal32 __lhs, long __rhs)
- decimal32 **operator-** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **operator-** (decimal32 __lhs, long long __rhs)

- decimal32 **operator-** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **operator-** (int __lhs, decimal32 __rhs)
- decimal32 **operator-** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **operator-** (long __lhs, decimal32 __rhs)
- decimal32 **operator-** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **operator-** (long long __lhs, decimal32 __rhs)
- decimal32 **operator-** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **operator-** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **operator-** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **operator-** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **operator-** (decimal64 __lhs, int __rhs)
- decimal64 **operator-** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **operator-** (decimal64 __lhs, long __rhs)
- decimal64 **operator-** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **operator-** (decimal64 __lhs, long long __rhs)
- decimal64 **operator-** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **operator-** (int __lhs, decimal64 __rhs)
- decimal64 **operator-** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **operator-** (long __lhs, decimal64 __rhs)
- decimal64 **operator-** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **operator-** (long long __lhs, decimal64 __rhs)
- decimal64 **operator-** (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **operator-** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **operator-** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **operator-** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **operator-** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **operator-** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **operator-** (decimal128 __lhs, int __rhs)
- decimal128 **operator-** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **operator-** (decimal128 __lhs, long __rhs)
- decimal128 **operator-** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **operator-** (decimal128 __lhs, long long __rhs)
- decimal128 **operator-** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **operator-** (int __lhs, decimal128 __rhs)
- decimal128 **operator-** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **operator-** (long __lhs, decimal128 __rhs)
- decimal128 **operator-** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **operator-** (long long __lhs, decimal128 __rhs)
- decimal128 **operator-** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **operator/** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **operator/** (decimal32 __lhs, int __rhs)
- decimal32 **operator/** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **operator/** (decimal32 __lhs, long __rhs)
- decimal32 **operator/** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **operator/** (decimal32 __lhs, long long __rhs)
- decimal32 **operator/** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **operator/** (int __lhs, decimal32 __rhs)
- decimal32 **operator/** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **operator/** (long __lhs, decimal32 __rhs)
- decimal32 **operator/** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **operator/** (long long __lhs, decimal32 __rhs)

- decimal32 **operator**/ (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **operator**/ (decimal32 __lhs, decimal64 __rhs)
- decimal64 **operator**/ (decimal64 __lhs, decimal32 __rhs)
- decimal64 **operator**/ (decimal64 __lhs, decimal64 __rhs)
- decimal64 **operator**/ (decimal64 __lhs, int __rhs)
- decimal64 **operator**/ (decimal64 __lhs, unsigned int __rhs)
- decimal64 **operator**/ (decimal64 __lhs, long __rhs)
- decimal64 **operator**/ (decimal64 __lhs, unsigned long __rhs)
- decimal64 **operator**/ (decimal64 __lhs, long long __rhs)
- decimal64 **operator**/ (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **operator**/ (int __lhs, decimal64 __rhs)
- decimal64 **operator**/ (unsigned int __lhs, decimal64 __rhs)
- decimal64 **operator**/ (long __lhs, decimal64 __rhs)
- decimal64 **operator**/ (unsigned long __lhs, decimal64 __rhs)
- decimal64 **operator**/ (long long __lhs, decimal64 __rhs)
- decimal64 **operator**/ (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **operator**/ (decimal32 __lhs, decimal128 __rhs)
- decimal128 **operator**/ (decimal64 __lhs, decimal128 __rhs)
- decimal128 **operator**/ (decimal128 __lhs, decimal32 __rhs)
- decimal128 **operator**/ (decimal128 __lhs, decimal64 __rhs)
- decimal128 **operator**/ (decimal128 __lhs, decimal128 __rhs)
- decimal128 **operator**/ (decimal128 __lhs, long __rhs)
- decimal128 **operator**/ (long long __lhs, decimal128 __rhs)
- decimal128 **operator**/ (decimal128 __lhs, int __rhs)
- decimal128 **operator**/ (decimal128 __lhs, unsigned int __rhs)
- decimal128 **operator**/ (decimal128 __lhs, unsigned long __rhs)
- decimal128 **operator**/ (decimal128 __lhs, long long __rhs)
- decimal128 **operator**/ (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **operator**/ (int __lhs, decimal128 __rhs)
- decimal128 **operator**/ (unsigned int __lhs, decimal128 __rhs)
- decimal128 **operator**/ (long __lhs, decimal128 __rhs)
- decimal128 **operator**/ (unsigned long __lhs, decimal128 __rhs)
- decimal128 **operator**/ (unsigned long long __lhs, decimal128 __rhs)
- bool **operator**< (unsigned long __lhs, decimal32 __rhs)
- bool **operator**< (decimal32 __lhs, decimal32 __rhs)
- bool **operator**< (decimal32 __lhs, decimal64 __rhs)
- bool **operator**< (decimal32 __lhs, decimal128 __rhs)
- bool **operator**< (decimal32 __lhs, int __rhs)
- bool **operator**< (decimal32 __lhs, long __rhs)
- bool **operator**< (decimal32 __lhs, unsigned long __rhs)
- bool **operator**< (decimal32 __lhs, long long __rhs)
- bool **operator**< (int __lhs, decimal32 __rhs)
- bool **operator**< (long __lhs, decimal32 __rhs)
- bool **operator**< (decimal32 __lhs, unsigned long long __rhs)
- bool **operator**< (long long __lhs, decimal32 __rhs)
- bool **operator**< (unsigned long long __lhs, decimal32 __rhs)
- bool **operator**< (unsigned int __lhs, decimal32 __rhs)
- bool **operator**< (decimal32 __lhs, unsigned int __rhs)
- bool **operator**< (long __lhs, decimal64 __rhs)
- bool **operator**< (unsigned long __lhs, decimal64 __rhs)
- bool **operator**< (decimal64 __lhs, decimal64 __rhs)

- bool **operator**< (unsigned long long __lhs, decimal64 __rhs)
- bool **operator**< (long long __lhs, decimal64 __rhs)
- bool **operator**< (decimal64 __lhs, decimal32 __rhs)
- bool **operator**< (decimal64 __lhs, decimal128 __rhs)
- bool **operator**< (decimal64 __lhs, unsigned int __rhs)
- bool **operator**< (decimal64 __lhs, int __rhs)
- bool **operator**< (int __lhs, decimal64 __rhs)
- bool **operator**< (unsigned int __lhs, decimal64 __rhs)
- bool **operator**< (decimal64 __lhs, long long __rhs)
- bool **operator**< (decimal64 __lhs, long __rhs)
- bool **operator**< (decimal64 __lhs, unsigned long __rhs)
- bool **operator**< (decimal64 __lhs, unsigned long long __rhs)
- bool **operator**< (unsigned long __lhs, decimal128 __rhs)
- bool **operator**< (decimal128 __lhs, unsigned long long __rhs)
- bool **operator**< (decimal128 __lhs, unsigned int __rhs)
- bool **operator**< (unsigned long long __lhs, decimal128 __rhs)
- bool **operator**< (decimal128 __lhs, decimal32 __rhs)
- bool **operator**< (int __lhs, decimal128 __rhs)
- bool **operator**< (unsigned int __lhs, decimal128 __rhs)
- bool **operator**< (long long __lhs, decimal128 __rhs)
- bool **operator**< (long __lhs, decimal128 __rhs)
- bool **operator**< (decimal128 __lhs, unsigned long __rhs)
- bool **operator**< (decimal128 __lhs, int __rhs)
- bool **operator**< (decimal128 __lhs, decimal64 __rhs)
- bool **operator**< (decimal128 __lhs, long __rhs)
- bool **operator**< (decimal128 __lhs, decimal128 __rhs)
- bool **operator**< (decimal128 __lhs, long long __rhs)
- bool **operator==** (decimal32 __lhs, unsigned long __rhs)
- bool **operator==** (decimal32 __lhs, decimal128 __rhs)
- bool **operator==** (decimal32 __lhs, decimal32 __rhs)
- bool **operator==** (decimal32 __lhs, decimal64 __rhs)
- bool **operator==** (decimal32 __lhs, int __rhs)
- bool **operator==** (decimal32 __lhs, unsigned int __rhs)
- bool **operator==** (decimal32 __lhs, long __rhs)
- bool **operator==** (decimal32 __lhs, long long __rhs)
- bool **operator==** (decimal32 __lhs, unsigned long long __rhs)
- bool **operator==** (int __lhs, decimal32 __rhs)
- bool **operator==** (unsigned int __lhs, decimal32 __rhs)
- bool **operator==** (long __lhs, decimal32 __rhs)
- bool **operator==** (unsigned long __lhs, decimal32 __rhs)
- bool **operator==** (long long __lhs, decimal32 __rhs)
- bool **operator==** (unsigned long long __lhs, decimal32 __rhs)
- bool **operator==** (unsigned long long __lhs, decimal64 __rhs)
- bool **operator==** (long __lhs, decimal64 __rhs)
- bool **operator==** (decimal64 __lhs, long long __rhs)
- bool **operator==** (decimal64 __lhs, unsigned int __rhs)
- bool **operator==** (decimal64 __lhs, decimal128 __rhs)
- bool **operator==** (long long __lhs, decimal64 __rhs)
- bool **operator==** (decimal64 __lhs, int __rhs)
- bool **operator==** (decimal64 __lhs, long __rhs)
- bool **operator==** (decimal64 __lhs, decimal32 __rhs)

- bool **operator==** (decimal64 __lhs, decimal64 __rhs)
- bool **operator==** (decimal64 __lhs, unsigned long __rhs)
- bool **operator==** (decimal64 __lhs, unsigned long long __rhs)
- bool **operator==** (int __lhs, decimal64 __rhs)
- bool **operator==** (unsigned int __lhs, decimal64 __rhs)
- bool **operator==** (unsigned long __lhs, decimal64 __rhs)
- bool **operator==** (int __lhs, decimal128 __rhs)
- bool **operator==** (unsigned int __lhs, decimal128 __rhs)
- bool **operator==** (long __lhs, decimal128 __rhs)
- bool **operator==** (long long __lhs, decimal128 __rhs)
- bool **operator==** (unsigned long long __lhs, decimal128 __rhs)
- bool **operator==** (unsigned long __lhs, decimal128 __rhs)
- bool **operator==** (decimal128 __lhs, decimal32 __rhs)
- bool **operator==** (decimal128 __lhs, unsigned int __rhs)
- bool **operator==** (decimal128 __lhs, unsigned long long __rhs)
- bool **operator==** (decimal128 __lhs, unsigned long __rhs)
- bool **operator==** (decimal128 __lhs, decimal128 __rhs)
- bool **operator==** (decimal128 __lhs, long long __rhs)
- bool **operator==** (decimal128 __lhs, decimal64 __rhs)
- bool **operator==** (decimal128 __lhs, int __rhs)
- bool **operator==** (decimal128 __lhs, long __rhs)
- bool **operator>** (unsigned int __lhs, decimal32 __rhs)
- bool **operator>** (long __lhs, decimal32 __rhs)
- bool **operator>** (decimal32 __lhs, decimal128 __rhs)
- bool **operator>** (decimal32 __lhs, long long __rhs)
- bool **operator>** (decimal32 __lhs, unsigned long long __rhs)
- bool **operator>** (decimal32 __lhs, unsigned long __rhs)
- bool **operator>** (decimal32 __lhs, decimal32 __rhs)
- bool **operator>** (decimal32 __lhs, decimal64 __rhs)
- bool **operator>** (decimal32 __lhs, long __rhs)
- bool **operator>** (unsigned long __lhs, decimal32 __rhs)
- bool **operator>** (unsigned long long __lhs, decimal32 __rhs)
- bool **operator>** (long long __lhs, decimal32 __rhs)
- bool **operator>** (decimal32 __lhs, unsigned int __rhs)
- bool **operator>** (int __lhs, decimal32 __rhs)
- bool **operator>** (decimal32 __lhs, int __rhs)
- bool **operator>** (decimal64 __lhs, unsigned long long __rhs)
- bool **operator>** (decimal64 __lhs, decimal32 __rhs)
- bool **operator>** (unsigned long __lhs, decimal64 __rhs)
- bool **operator>** (unsigned long long __lhs, decimal64 __rhs)
- bool **operator>** (long long __lhs, decimal64 __rhs)
- bool **operator>** (int __lhs, decimal64 __rhs)
- bool **operator>** (decimal64 __lhs, unsigned int __rhs)
- bool **operator>** (decimal64 __lhs, unsigned long __rhs)
- bool **operator>** (decimal64 __lhs, decimal128 __rhs)
- bool **operator>** (decimal64 __lhs, long __rhs)
- bool **operator>** (decimal64 __lhs, long long __rhs)
- bool **operator>** (decimal64 __lhs, decimal64 __rhs)
- bool **operator>** (decimal64 __lhs, int __rhs)
- bool **operator>** (long __lhs, decimal64 __rhs)
- bool **operator>** (unsigned int __lhs, decimal64 __rhs)

- bool **operator**> (decimal128 __lhs, decimal128 __rhs)
- bool **operator**> (int __lhs, decimal128 __rhs)
- bool **operator**> (decimal128 __lhs, unsigned long __rhs)
- bool **operator**> (unsigned long long __lhs, decimal128 __rhs)
- bool **operator**> (decimal128 __lhs, unsigned int __rhs)
- bool **operator**> (unsigned int __lhs, decimal128 __rhs)
- bool **operator**> (decimal128 __lhs, decimal32 __rhs)
- bool **operator**> (decimal128 __lhs, unsigned long long __rhs)
- bool **operator**> (decimal128 __lhs, long __rhs)
- bool **operator**> (unsigned long __lhs, decimal128 __rhs)
- bool **operator**> (decimal128 __lhs, int __rhs)
- bool **operator**> (long long __lhs, decimal128 __rhs)
- bool **operator**> (long __lhs, decimal128 __rhs)
- bool **operator**> (decimal128 __lhs, decimal64 __rhs)
- bool **operator**> (decimal128 __lhs, long long __rhs)
- bool **operator**>= (long long __lhs, decimal32 __rhs)
- bool **operator**>= (unsigned long __lhs, decimal32 __rhs)
- bool **operator**>= (decimal32 __lhs, decimal64 __rhs)
- bool **operator**>= (decimal32 __lhs, unsigned int __rhs)
- bool **operator**>= (decimal32 __lhs, decimal32 __rhs)
- bool **operator**>= (decimal32 __lhs, int __rhs)
- bool **operator**>= (decimal32 __lhs, decimal128 __rhs)
- bool **operator**>= (unsigned long long __lhs, decimal32 __rhs)
- bool **operator**>= (unsigned int __lhs, decimal32 __rhs)
- bool **operator**>= (long __lhs, decimal32 __rhs)
- bool **operator**>= (decimal32 __lhs, unsigned long long __rhs)
- bool **operator**>= (decimal32 __lhs, long long __rhs)
- bool **operator**>= (int __lhs, decimal32 __rhs)
- bool **operator**>= (decimal32 __lhs, long __rhs)
- bool **operator**>= (decimal32 __lhs, unsigned long __rhs)
- bool **operator**>= (unsigned long long __lhs, decimal64 __rhs)
- bool **operator**>= (decimal64 __lhs, unsigned long long __rhs)
- bool **operator**>= (decimal64 __lhs, long long __rhs)
- bool **operator**>= (decimal64 __lhs, decimal64 __rhs)
- bool **operator**>= (decimal64 __lhs, decimal32 __rhs)
- bool **operator**>= (decimal64 __lhs, unsigned int __rhs)
- bool **operator**>= (decimal64 __lhs, unsigned long __rhs)
- bool **operator**>= (decimal64 __lhs, decimal128 __rhs)
- bool **operator**>= (long __lhs, decimal64 __rhs)
- bool **operator**>= (decimal64 __lhs, long __rhs)
- bool **operator**>= (unsigned int __lhs, decimal64 __rhs)
- bool **operator**>= (decimal64 __lhs, int __rhs)
- bool **operator**>= (unsigned long __lhs, decimal64 __rhs)
- bool **operator**>= (int __lhs, decimal64 __rhs)
- bool **operator**>= (long long __lhs, decimal64 __rhs)
- bool **operator**>= (decimal128 __lhs, int __rhs)
- bool **operator**>= (int __lhs, decimal128 __rhs)
- bool **operator**>= (decimal128 __lhs, unsigned long __rhs)
- bool **operator**>= (long long __lhs, decimal128 __rhs)
- bool **operator**>= (decimal128 __lhs, decimal64 __rhs)
- bool **operator**>= (unsigned long __lhs, decimal128 __rhs)

- bool **operator**>= (decimal128 __lhs, decimal32 __rhs)
- bool **operator**>= (decimal128 __lhs, long __rhs)
- bool **operator**>= (decimal128 __lhs, unsigned int __rhs)
- bool **operator**>= (decimal128 __lhs, long long __rhs)
- bool **operator**>= (decimal128 __lhs, decimal128 __rhs)
- bool **operator**>= (unsigned int __lhs, decimal128 __rhs)
- bool **operator**>= (decimal128 __lhs, unsigned long long __rhs)
- bool **operator**>= (long __lhs, decimal128 __rhs)
- bool **operator**>= (unsigned long long __lhs, decimal128 __rhs)

3.15.1 Detailed Description

ISO/IEC TR 24733 Decimal floating-point arithmetic.

3.15.2 Function Documentation

3.15.2.1 long long std::decimal::decimal32_to_long_long (decimal32 __d)

Non-conforming extension: Conversion to integral type.

3.16 std::experimental Namespace Reference

3.16.1 Detailed Description

Namespace for features defined in ISO Technical Specifications.

3.17 std::literals::chrono_literals Namespace Reference

Functions

- constexpr chrono::duration
  < long double, ratio< 3600, 1 > > operator""h (long double __hours)
- template<char... _Digits>
  constexpr chrono::hours operator""h ()
- constexpr chrono::duration
  < long double, ratio< 60, 1 > > operator""min (long double __mins)
- template<char... _Digits>
  constexpr chrono::minutes operator""min ()
- constexpr chrono::duration
  < long double, milli > operator""ms (long double __msecs)
- template<char... _Digits>
  constexpr chrono::milliseconds operator""ms ()
- constexpr chrono::duration
  < long double, nano > operator""ns (long double __nsecs)
- template<char... _Digits>
  constexpr chrono::nanoseconds operator""ns ()
- constexpr chrono::duration
  < long double > operator""s (long double __secs)
- template<char... _Digits>
  constexpr chrono::seconds operator""s ()

- constexpr chrono::duration
  < long double, micro > operator""us (long double __usecs)
- template<char... _Digits>
  constexpr chrono::microseconds operator""us ()

3.17.1 Detailed Description

ISO C++ 2014 namespace for suffixes for duration literals.

These suffixes can be used to create `chrono::duration` values with tick periods of hours, minutes, seconds, milliseconds, microseconds or nanoseconds. For example, `std::chrono::seconds(5)` can be written as `5s` after making the suffix visible in the current scope. The suffixes can be made visible by a using-directive or using-declaration such as:

- `using namespace std::chrono_literals;`
- `using namespace std::literals;`
- `using namespace std::chrono;`
- `using namespace std;`
- `using std::chrono_literals::operator""s;`

The result of these suffixes on an integer literal is one of the standard typedefs such as `std::chrono::hours`. The result on a floating-point literal is a duration type with the specified tick period and an unspecified floating-point representation, for example `1.5e2ms` might be equivalent to `chrono::duration<long double, chrono::milli>(1.5e2)`.

3.17.2 Function Documentation

3.17.2.1 constexpr chrono::duration<long double, ratio<3600,1> > std::literals::chrono_literals::operator""h (long double __hours)

Literal suffix for durations representing non-integer hours.

Definition at line 1130 of file chrono.

3.17.2.2 template<char... _Digits> constexpr chrono::hours std::literals::chrono_literals::operator""h ( )

Literal suffix for durations of type `std::chrono::hours`

Definition at line 1136 of file chrono.

3.17.2.3 constexpr chrono::duration<long double, ratio<60,1> > std::literals::chrono_literals::operator""min (long double __mins)

Literal suffix for durations representing non-integer minutes.

Definition at line 1141 of file chrono.

3.17.2.4 template<char... _Digits> constexpr chrono::minutes std::literals::chrono_literals::operator""min ( )

Literal suffix for durations of type `std::chrono::minutes`

Definition at line 1147 of file chrono.

3.17.2.5 constexpr chrono::duration<long double, milli> std::literals::chrono_literals::operator""ms (long double __msecs)

Literal suffix for durations representing non-integer milliseconds.

Definition at line 1163 of file chrono.

3.17.2.6 template<char... _Digits> constexpr chrono::milliseconds std::literals::chrono_literals::operator""ms ( )

Literal suffix for durations of type `std::chrono::milliseconds`

Definition at line 1169 of file chrono.

3.17.2.7 constexpr chrono::duration<long double, nano> std::literals::chrono_literals::operator""ns (long double __nsecs)

Literal suffix for durations representing non-integer nanoseconds.

Definition at line 1185 of file chrono.

3.17.2.8 template<char... _Digits> constexpr chrono::nanoseconds std::literals::chrono_literals::operator""ns ( )

Literal suffix for durations of type `std::chrono::nanoseconds`

Definition at line 1191 of file chrono.

3.17.2.9 constexpr chrono::duration<long double> std::literals::chrono_literals::operator""s (long double __secs)

Literal suffix for durations representing non-integer seconds.

Definition at line 1152 of file chrono.

3.17.2.10 template<char... _Digits> constexpr chrono::seconds std::literals::chrono_literals::operator""s ( )

Literal suffix for durations of type `std::chrono::seconds`

Definition at line 1158 of file chrono.

3.17.2.11 constexpr chrono::duration<long double, micro> std::literals::chrono_literals::operator""us (long double __usecs)

Literal suffix for durations representing non-integer microseconds.

Definition at line 1174 of file chrono.

3.17.2.12 template<char... _Digits> constexpr chrono::microseconds std::literals::chrono_literals::operator""us ( )

Literal suffix for durations of type `std::chrono::microseconds`

Definition at line 1180 of file chrono.

3.18 std::placeholders Namespace Reference

Variables

- const _Placeholder< 1 > **_1**
- const _Placeholder< 10 > **_10**
- const _Placeholder< 11 > **_11**
- const _Placeholder< 12 > **_12**
- const _Placeholder< 13 > **_13**
- const _Placeholder< 14 > **_14**
- const _Placeholder< 15 > **_15**

- const _Placeholder< 16 > **_16**
- const _Placeholder< 17 > **_17**
- const _Placeholder< 18 > **_18**
- const _Placeholder< 19 > **_19**
- const _Placeholder< 2 > **_2**
- const _Placeholder< 20 > **_20**
- const _Placeholder< 21 > **_21**
- const _Placeholder< 22 > **_22**
- const _Placeholder< 23 > **_23**
- const _Placeholder< 24 > **_24**
- const _Placeholder< 25 > **_25**
- const _Placeholder< 26 > **_26**
- const _Placeholder< 27 > **_27**
- const _Placeholder< 28 > **_28**
- const _Placeholder< 29 > **_29**
- const _Placeholder< 3 > **_3**
- const _Placeholder< 4 > **_4**
- const _Placeholder< 5 > **_5**
- const _Placeholder< 6 > **_6**
- const _Placeholder< 7 > **_7**
- const _Placeholder< 8 > **_8**
- const _Placeholder< 9 > **_9**

3.18.1 Detailed Description

ISO C++ 2011 namespace for std::bind placeholders.

3.19 std::regex_constants Namespace Reference

5.1 Regular Expression Syntax Options

- enum __syntax_option { **_S_icase**, **_S_nosubs**, **_S_optimize**, **_S_collate**, **_S_ECMAScript**, **_S_basic**, **_S_extended**, **_S_awk**, **_S_grep**, **_S_egrep**, **_S_polynomial**, **_S_syntax_last** }
- enum syntax_option_type : unsigned int
- constexpr syntax_option_type icase
- constexpr syntax_option_type nosubs
- constexpr syntax_option_type optimize
- constexpr syntax_option_type collate
- constexpr syntax_option_type ECMAScript
- constexpr syntax_option_type basic
- constexpr syntax_option_type extended
- constexpr syntax_option_type awk
- constexpr syntax_option_type grep
- constexpr syntax_option_type egrep
- constexpr syntax_option_type __polynomial
- constexpr syntax_option_type operator& (syntax_option_type __a, syntax_option_type __b)
- constexpr syntax_option_type operator| (syntax_option_type __a, syntax_option_type __b)
- constexpr syntax_option_type operator^ (syntax_option_type __a, syntax_option_type __b)

- constexpr syntax_option_type operator~ (syntax_option_type __a)
- syntax_option_type & operator&= (syntax_option_type &__a, syntax_option_type __b)
- syntax_option_type & operator|= (syntax_option_type &__a, syntax_option_type __b)
- syntax_option_type & operator^= (syntax_option_type &__a, syntax_option_type __b)

5.2 Matching Rules

Matching a regular expression against a sequence of characters [first, last) proceeds according to the rules of the grammar specified for the regular expression object, modified according to the effects listed below for any bitmask elements set.

- enum __match_flag {
  _S_not_bol, **_S_not_eol**, **_S_not_bow**, **_S_not_eow**,
  _S_any, **_S_not_null**, **_S_continuous**, **_S_prev_avail**,
  _S_sed, **_S_no_copy**, **_S_first_only**, **_S_match_flag_last** }
- enum match_flag_type : unsigned int
- constexpr match_flag_type match_default
- constexpr match_flag_type match_not_bol
- constexpr match_flag_type match_not_eol
- constexpr match_flag_type match_not_bow
- constexpr match_flag_type match_not_eow
- constexpr match_flag_type match_any
- constexpr match_flag_type match_not_null
- constexpr match_flag_type match_continuous
- constexpr match_flag_type match_prev_avail
- constexpr match_flag_type format_default
- constexpr match_flag_type format_sed
- constexpr match_flag_type format_no_copy
- constexpr match_flag_type format_first_only
- constexpr match_flag_type operator& (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type operator| (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type operator^ (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type operator~ (match_flag_type __a)
- match_flag_type & operator&= (match_flag_type &__a, match_flag_type __b)
- match_flag_type & operator|= (match_flag_type &__a, match_flag_type __b)
- match_flag_type & operator^= (match_flag_type &__a, match_flag_type __b)

5.3 Error Types

- enum error_type {
  _S_error_collate, **_S_error_ctype**, **_S_error_escape**, **_S_error_backref**,
  _S_error_brack, **_S_error_paren**, **_S_error_brace**, **_S_error_badbrace**,
  _S_error_range, **_S_error_space**, **_S_error_badrepeat**, **_S_error_complexity**,
  _S_error_stack }
- constexpr error_type error_collate (_S_error_collate)
- constexpr error_type error_ctype (_S_error_ctype)
- constexpr error_type error_escape (_S_error_escape)
- constexpr error_type error_backref (_S_error_backref)
- constexpr error_type error_brack (_S_error_brack)
- constexpr error_type error_paren (_S_error_paren)

- constexpr error_type error_brace (_S_error_brace)
- constexpr error_type error_badbrace (_S_error_badbrace)
- constexpr error_type error_range (_S_error_range)
- constexpr error_type error_space (_S_error_space)
- constexpr error_type error_badrepeat (_S_error_badrepeat)
- constexpr error_type error_complexity (_S_error_complexity)
- constexpr error_type error_stack (_S_error_stack)

3.19.1 Detailed Description

ISO C++ 2011 namespace for options and flags used with std::regex.

3.19.2 Enumeration Type Documentation

3.19.2.1 enum std::regex_constants::__match_flag

This is a bitmask type indicating regex matching rules.

The `match_flag_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 232 of file regex_constants.h.

3.19.2.2 enum std::regex_constants::__syntax_option

This is a bitmask type indicating how to interpret the regex.

The `syntax_option_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep` set.

Definition at line 54 of file regex_constants.h.

3.19.2.3 enum std::regex_constants::error_type

The expression contained an invalid collating element name.

Definition at line 49 of file regex_error.h.

3.19.2.4 enum std::regex_constants::match_flag_type : unsigned int

This is a bitmask type indicating regex matching rules.

The `match_flag_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 255 of file regex_constants.h.

3.19.2.5 enum std::regex_constants::syntax_option_type : unsigned int

This is a bitmask type indicating how to interpret the regex.

The `syntax_option_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep` set.

Definition at line 81 of file regex_constants.h.

3.19.3 Function Documentation

3.19.3.1 constexpr error_type std::regex_constants::error_backref (_S_error_backref)

The expression contained an invalid back reference.

3.19.3.2 constexpr error_type std::regex_constants::error_badbrace (_S_error_badbrace)

The expression contained an invalid range in a {} expression.

3.19.3.3 constexpr error_type std::regex_constants::error_badrepeat (_S_error_badrepeat)

One of $*?+\{$ was not preceded by a valid regular expression.

3.19.3.4 constexpr error_type std::regex_constants::error_brace (_S_error_brace)

The expression contained mismatched { and }

3.19.3.5 constexpr error_type std::regex_constants::error_brack (_S_error_brack)

The expression contained mismatched [and].

3.19.3.6 constexpr error_type std::regex_constants::error_collate (_S_error_collate)

The expression contained an invalid collating element name.

3.19.3.7 constexpr error_type std::regex_constants::error_complexity (_S_error_complexity)

The complexity of an attempted match against a regular expression exceeded a pre-set level.

3.19.3.8 constexpr error_type std::regex_constants::error_ctype (_S_error_ctype)

The expression contained an invalid character class name.

3.19.3.9 constexpr error_type std::regex_constants::error_escape (_S_error_escape)

The expression contained an invalid escaped character, or a trailing escape.

3.19.3.10 constexpr error_type std::regex_constants::error_paren (_S_error_paren)

The expression contained mismatched (and).

3.19.3.11 constexpr error_type std::regex_constants::error_range (_S_error_range)

The expression contained an invalid character range, such as [b-a] in most encodings.

3.19.3.12 constexpr error_type std::regex_constants::error_space (_S_error_space)

There was insufficient memory to convert the expression into a finite state machine.

3.19.3.13 constexpr error_type std::regex_constants::error_stack (_S_error_stack)

There was insufficient memory to determine whether the regular expression could match the specified character sequence.

3.19.3.14 constexpr syntax_option_type std::regex_constants::operator& (syntax_option_type __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The `syntax_option_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep` set.

Definition at line 183 of file regex_constants.h.

3.19.3.15 constexpr match_flag_type std::regex_constants::operator& (match_flag_type __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The `match_flag_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 374 of file regex_constants.h.

3.19.3.16 syntax_option_type& std::regex_constants::operator&= (syntax_option_type & __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The `syntax_option_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep` set.

Definition at line 208 of file regex_constants.h.

3.19.3.17 match_flag_type& std::regex_constants::operator&= (match_flag_type & __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The `match_flag_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 399 of file regex_constants.h.

3.19.3.18 constexpr syntax_option_type std::regex_constants::operator^ (syntax_option_type __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The `syntax_option_type` is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements `ECMAScript`, `basic`, `extended`, `awk`, `grep`, `egrep` set.

Definition at line 197 of file regex_constants.h.

3.19.3.19 constexpr match_flag_type std::regex_constants::operator^ (match_flag_type __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The match_flag_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 388 of file regex_constants.h.

3.19.3.20 syntax_option_type& std::regex_constants::operator^= (syntax_option_type & __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The syntax_option_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements ECMAScript, basic, extended, awk, grep, egrep set.

Definition at line 216 of file regex_constants.h.

3.19.3.21 match_flag_type& std::regex_constants::operator^= (match_flag_type & __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The match_flag_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 407 of file regex_constants.h.

3.19.3.22 constexpr syntax_option_type std::regex_constants::operator| (syntax_option_type __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The syntax_option_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements ECMAScript, basic, extended, awk, grep, egrep set.

Definition at line 190 of file regex_constants.h.

3.19.3.23 constexpr match_flag_type std::regex_constants::operator| (match_flag_type __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The match_flag_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 381 of file regex_constants.h.

3.19.3.24 syntax_option_type& std::regex_constants::operator|= (syntax_option_type & __a, syntax_option_type __b) [inline]

This is a bitmask type indicating how to interpret the regex.

The syntax_option_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements ECMAScript, basic, extended, awk, grep, egrep set.

Definition at line 212 of file regex_constants.h.

3.19.3.25 match_flag_type& std::regex_constants::operator|= (match_flag_type & __a, match_flag_type __b) [inline]

This is a bitmask type indicating regex matching rules.

The match_flag_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 403 of file regex_constants.h.

3.19.3.26 constexpr syntax_option_type std::regex_constants::operator~ (syntax_option_type __a) [inline]

This is a bitmask type indicating how to interpret the regex.

The syntax_option_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

A valid value of type syntax_option_type shall have exactly one of the elements ECMAScript, basic, extended, awk, grep, egrep set.

Definition at line 204 of file regex_constants.h.

3.19.3.27 constexpr match_flag_type std::regex_constants::operator~ (match_flag_type __a) [inline]

This is a bitmask type indicating regex matching rules.

The match_flag_type is implementation defined but it is valid to perform bitwise operations on these values and expect the right thing to happen.

Definition at line 395 of file regex_constants.h.

3.19.4 Variable Documentation

3.19.4.1 constexpr syntax_option_type std::regex_constants::__polynomial [inline]

Extension: Ensure both space complexity of compiled regex and time complexity execution are not exponential. If specified in a regex with back-references, the exception regex_constants::error_complexity will be thrown.

Definition at line 179 of file regex_constants.h.

3.19.4.2 constexpr syntax_option_type std::regex_constants::awk [inline]

Specifies that the grammar recognized by the regular expression engine is that used by POSIX utility awk in IEEE Std 1003.1-2001. This option is identical to syntax_option_type extended, except that C-style escape sequences are supported. These sequences are: \\, \a, \b, \f, \n, \r, \t , \v, \&apos„ &apos„ and \ddd (where ddd is one, two, or three octal digits).

Definition at line 152 of file regex_constants.h.

3.19.4.3 constexpr syntax_option_type std::regex_constants::basic [inline]

Specifies that the grammar recognized by the regular expression engine is that used by POSIX basic regular expressions in IEEE Std 1003.1-2001, Portable Operating System Interface (POSIX), Base Definitions and Headers, Section 9, Regular Expressions [IEEE, Information Technology – Portable Operating System Interface (POSIX), IEEE Standard 1003.1-2001].

Definition at line 132 of file regex_constants.h.

3.19.4.4 constexpr syntax_option_type std::regex_constants::collate [inline]

Specifies that character ranges of the form [a-b] should be locale sensitive.

Definition at line 111 of file regex_constants.h.

3.19.4.5 constexpr syntax_option_type std::regex_constants::ECMAScript [inline]

Specifies that the grammar recognized by the regular expression engine is that used by ECMAScript in ECMA-262 [Ecma International, ECMAScript Language Specification, Standard Ecma-262, third edition, 1999], as modified in section [28.13]. This grammar is similar to that defined in the PERL scripting language but extended with elements found in the POSIX regular expression grammar.

Definition at line 122 of file regex_constants.h.

3.19.4.6 constexpr syntax_option_type std::regex_constants::egrep [inline]

Specifies that the grammar recognized by the regular expression engine is that used by POSIX utility grep when given the -E option in IEEE Std 1003.1-2001. This option is identical to syntax_option_type extended, except that newlines are treated as whitespace.

Definition at line 170 of file regex_constants.h.

3.19.4.7 constexpr syntax_option_type std::regex_constants::extended [inline]

Specifies that the grammar recognized by the regular expression engine is that used by POSIX extended regular expressions in IEEE Std 1003.1-2001, Portable Operating System Interface (POSIX), Base Definitions and Headers, Section 9, Regular Expressions.

Definition at line 141 of file regex_constants.h.

3.19.4.8 constexpr match_flag_type std::regex_constants::format_default [inline]

When a regular expression match is to be replaced by a new string, the new string is constructed using the rules used by the ECMAScript replace function in ECMA- 262 [Ecma International, ECMAScript Language Specification, Standard Ecma-262, third edition, 1999], part 15.5.4.11 String.prototype.replace. In addition, during search and replace operations all non-overlapping occurrences of the regular expression are located and replaced, and sections of the input that did not match the expression are copied unchanged to the output string.

Format strings (from ECMA-262 [15.5.4.11]):

- $$ The dollar-sign itself ($)
- $& The matched substring.
- $‘ The portion of *string* that precedes the matched substring. This would be match_results::prefix().
- $’ The portion of *string* that follows the matched substring. This would be match_results::suffix().
- $n The nth capture, where n is in [1,9] and $n is not followed by a decimal digit. If n <= match_results::size() and the nth capture is undefined, use the empty string instead. If n > match_results::size(), the result is implementation-defined.
- $nn The nnth capture, where nn is a two-digit decimal number on [01, 99]. If nn <= match_results::size() and the nth capture is undefined, use the empty string instead. If nn > match_results::size(), the result is implementation-defined.

Definition at line 346 of file regex_constants.h.

3.19.4.9 constexpr match_flag_type std::regex_constants::format_first_only [inline]

When specified during a search and replace operation, only the first occurrence of the regular expression shall be replaced.

Definition at line 370 of file regex_constants.h.

3.19.4.10 constexpr match_flag_type std::regex_constants::format_no_copy [inline]

During a search and replace operation, sections of the character container sequence being searched that do not match the regular expression shall not be copied to the output string.

Definition at line 363 of file regex_constants.h.

3.19.4.11 constexpr match_flag_type std::regex_constants::format_sed [inline]

When a regular expression match is to be replaced by a new string, the new string is constructed using the rules used by the POSIX sed utility in IEEE Std 1003.1- 2001 [IEEE, Information Technology – Portable Operating System Interface (POSIX), IEEE Standard 1003.1-2001].

Definition at line 355 of file regex_constants.h.

3.19.4.12 constexpr syntax_option_type std::regex_constants::grep [inline]

Specifies that the grammar recognized by the regular expression engine is that used by POSIX utility grep in IEEE Std 1003.1-2001. This option is identical to syntax_option_type basic, except that newlines are treated as whitespace.

Definition at line 161 of file regex_constants.h.

3.19.4.13 constexpr syntax_option_type std::regex_constants::icase [inline]

Specifies that the matching of regular expressions against a character sequence shall be performed without regard to case.

Definition at line 87 of file regex_constants.h.

3.19.4.14 constexpr match_flag_type std::regex_constants::match_any [inline]

If more than one match is possible then any match is an acceptable result.

Definition at line 297 of file regex_constants.h.

3.19.4.15 constexpr match_flag_type std::regex_constants::match_continuous [inline]

The expression only matches a sub-sequence that begins at first .

Definition at line 309 of file regex_constants.h.

3.19.4.16 constexpr match_flag_type std::regex_constants::match_default [inline]

The default matching rules.

Definition at line 260 of file regex_constants.h.

3.19.4.17 constexpr match_flag_type std::regex_constants::match_not_bol [inline]

The first character in the sequence [first, last) is treated as though it is not at the beginning of a line, so the character (^) in the regular expression shall not match [first, first).

Definition at line 268 of file regex_constants.h.

3.19.4.18 constexpr match_flag_type std::regex_constants::match_not_bow [inline]

The expression \b is not matched against the sub-sequence [first,first).

Definition at line 283 of file regex_constants.h.

3.19.4.19 constexpr match_flag_type std::regex_constants::match_not_eol [inline]

The last character in the sequence [first, last) is treated as though it is not at the end of a line, so the character ($) in the regular expression shall not match [last, last).

Definition at line 276 of file regex_constants.h.

3.19.4.20 constexpr match_flag_type std::regex_constants::match_not_eow [inline]

The expression \b should not be matched against the sub-sequence [last,last).

Definition at line 290 of file regex_constants.h.

3.19.4.21 constexpr match_flag_type std::regex_constants::match_not_null [inline]

The expression does not match an empty sequence.

Definition at line 303 of file regex_constants.h.

3.19.4.22 constexpr match_flag_type std::regex_constants::match_prev_avail [inline]

–first is a valid iterator position. When this flag is set then the flags match_not_bol and match_not_bow are ignored by the regular expression algorithms 28.11 and iterators 28.12.

Definition at line 317 of file regex_constants.h.

3.19.4.23 constexpr syntax_option_type std::regex_constants::nosubs [inline]

Specifies that when a regular expression is matched against a character container sequence, no sub-expression matches are to be stored in the supplied match_results structure.

Definition at line 95 of file regex_constants.h.

3.19.4.24 constexpr syntax_option_type std::regex_constants::optimize [inline]

Specifies that the regular expression engine should pay more attention to the speed with which regular expressions are matched, and less to the speed with which regular expression objects are constructed. Otherwise it has no detectable effect on the program output.

Definition at line 104 of file regex_constants.h.

3.20 std::rel_ops Namespace Reference

Functions

- template<class _Tp >
  bool operator!= (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool operator<= (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool operator> (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool operator>= (const _Tp &__x, const _Tp &__y)

3.20.1 Detailed Description

The generated relational operators are sequestered here.

3.20.2 Function Documentation

3.20.2.1 template<class _Tp > bool std::rel_ops::operator!= (const _Tp & __x, const _Tp & __y) [inline]

Defines != for arbitrary types, in terms of ==.

Parameters

__x	A thing.
__y	Another thing.

Returns

__x != __y

This function uses == to determine its result.

Definition at line 87 of file stl_relops.h.

3.20.2.2 template<class _Tp > bool std::rel_ops::operator<= (const _Tp & __x, const _Tp & __y) [inline]

Defines <= for arbitrary types, in terms of <.

Parameters

__x	A thing.
__y	Another thing.

Returns

__x <= __y

This function uses < to determine its result.

Definition at line 113 of file stl_relops.h.

3.20.2.3 template<class _Tp > bool std::rel_ops::operator> (const _Tp & __x, const _Tp & __y) [inline]

Defines > for arbitrary types, in terms of <.

Parameters

__x	A thing.
__y	Another thing.

Returns

__x > __y

This function uses < to determine its result.

Definition at line 100 of file stl_relops.h.

3.20.2.4 template<class _Tp > bool std::rel_ops::operator>= (const _Tp & __x, const _Tp & __y) [inline]

Defines >= for arbitrary types, in terms of <.

Parameters

__x	A thing.
__y	Another thing.

Returns

__x >= __y

This function uses < to determine its result.

Definition at line 126 of file stl_relops.h.

3.21 std::this_thread Namespace Reference

Functions

- void **__sleep_for** (chrono::seconds, chrono::nanoseconds)
- thread::id get_id () noexcept
- template<typename _Rep , typename _Period >
  void sleep_for (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  void sleep_until (const chrono::time_point< _Clock, _Duration > &__atime)
- void yield () noexcept

3.21.1 Detailed Description

ISO C++ 2011 namespace for interacting with the current thread. C++11 30.3.2 [thread.thread.this] Namespace this_thread.

3.21.2 Function Documentation

3.21.2.1 thread::id std::this_thread::get_id ( ) [inline], [noexcept]

get_id

Definition at line 365 of file thread.

References get_id().

Referenced by get_id().

3.21.2.2 template<typename _Rep , typename _Period > void std::this_thread::sleep_for (const chrono::duration< _Rep, _Period > & *__rtime*) [inline]

sleep_for

Definition at line 393 of file thread.

References std::chrono::duration_cast().

Referenced by sleep_until().

3.21.2.3 template<typename _Clock , typename _Duration > void std::this_thread::sleep_until (const chrono::time_point< _Clock, _Duration > & *__atime*) [inline]

sleep_until

Definition at line 415 of file thread.

References sleep_for().

3.21.2.4 void std::this_thread::yield ( ) [inline], [noexcept]

yield

Definition at line 380 of file thread.

3.22 std::tr1 Namespace Reference

Namespaces

- __detail

Functions

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float **assoc_laguerref** (unsigned int __n, unsigned int __m, float __x)
- long double **assoc_laguerrel** (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float **assoc_legendref** (unsigned int __l, unsigned int __m, float __x)
- long double **assoc_legendrel** (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Tpx , typename _Tpy >
  __gnu_cxx::__promote_2< _Tpx,
  _Tpy >::__type beta (_Tpx __x, _Tpy __y)
- float **betaf** (float __x, float __y)
- long double **betal** (long double __x, long double __y)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type comp_ellint_1 (_Tp __k)
- float **comp_ellint_1f** (float __k)
- long double **comp_ellint_1l** (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type comp_ellint_2 (_Tp __k)
- float **comp_ellint_2f** (float __k)
- long double **comp_ellint_2l** (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type comp_ellint_3 (_Tp __k, _Tpn __nu)
- float **comp_ellint_3f** (float __k, float __nu)
- long double **comp_ellint_3l** (long double __k, long double __nu)
- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float **conf_hypergf** (float __a, float __c, float __x)

- long double **conf_hypergl** (long double __a, long double __c, long double __x)
- template<typename _Tp >
  std::complex< _Tp > **conj** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **conj** (_Tp __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float **cyl_bessel_if** (float __nu, float __x)
- long double **cyl_bessel_il** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float **cyl_bessel_jf** (float __nu, float __x)
- long double **cyl_bessel_jl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float **cyl_bessel_kf** (float __nu, float __x)
- long double **cyl_bessel_kl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type cyl_neumann (_Tpnu __nu, _Tp __x)
- float **cyl_neumannf** (float __nu, float __x)
- long double **cyl_neumannl** (long double __nu, long double __x)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type ellint_1 (_Tp __k, _Tpp __phi)
- float **ellint_1f** (float __k, float __phi)
- long double **ellint_1l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type ellint_2 (_Tp __k, _Tpp __phi)
- float **ellint_2f** (float __k, float __phi)
- long double **ellint_2l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float **ellint_3f** (float __k, float __nu, float __phi)
- long double **ellint_3l** (long double __k, long double __nu, long double __phi)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type expint (_Tp __x)
- float **expintf** (float __x)
- long double **expintl** (long double __x)
- template<typename _Tp >
  std::complex< _Tp > fabs (const std::complex< _Tp > &__z)
- float **fabs** (float __x)
- long double **fabs** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type **fabs** (_Tp __x)

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type hermite (unsigned int __n, _Tp __x)
- float **hermitef** (unsigned int __n, float __x)
- long double **hermitel** (unsigned int __n, long double __x)
- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float **hypergf** (float __a, float __b, float __c, float __x)
- long double **hypergl** (long double __a, long double __b, long double __c, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type laguerre (unsigned int __n, _Tp __x)
- float **laguerref** (unsigned int __n, float __x)
- long double **laguerrel** (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type legendre (unsigned int __n, _Tp __x)
- float **legendref** (unsigned int __n, float __x)
- long double **legendrel** (unsigned int __n, long double __x)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **polar** (const _Tp &__rho, const _Up &__theta)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > pow (const std::complex< _Tp > &__x, const _Up &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **pow** (const _Tp &__x, const std::complex< _Up > &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **pow** (const std::complex< _Tp > &__x, const std::complex< _Up > &__y)
- template<typename _Tp >
  std::complex< _Tp > **pow** (const std::complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  std::complex< _Tp > **pow** (const _Tp &__x, const std::complex< _Tp > &__y)
- template<typename _Tp >
  std::complex< _Tp > **pow** (const std::complex< _Tp > &__x, const std::complex< _Tp > &__y)
- float **pow** (float __x, float __y)
- long double **pow** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **pow** (_Tp __x, _Up __y)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type riemann_zeta (_Tp __x)
- float **riemann_zetaf** (float __x)
- long double **riemann_zetal** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_bessel (unsigned int __n, _Tp __x)
- float **sph_besself** (unsigned int __n, float __x)
- long double **sph_bessell** (unsigned int __n, long double __x)

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float **sph_legendref** (unsigned int __l, unsigned int __m, float __theta)
- long double **sph_legendrel** (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type sph_neumann (unsigned int __n, _Tp __x)
- float **sph_neumannf** (unsigned int __n, float __x)
- long double **sph_neumannl** (unsigned int __n, long double __x)

3.22.1 Detailed Description

ISO C++ TR1 entities toplevel namespace is std::tr1.

3.23 std::tr1::__detail Namespace Reference

3.23.1 Detailed Description

Implementation details not part of the namespace std::tr1 interface.

3.24 std::tr2 Namespace Reference

Namespaces

- __detail

Classes

- struct __dynamic_bitset_base
- struct __reflection_typelist
- struct __reflection_typelist< _First, _Rest...>
- struct __reflection_typelist<>
- struct bases
- class bool_set
- struct direct_bases
- class dynamic_bitset

Functions

- bool **certainly** (bool_set __b)
- bool **contains** (bool_set __s, bool_set __t)
- bool **equals** (bool_set __s, bool_set __t)
- bool **is_emptyset** (bool_set __b)
- bool **is_indeterminate** (bool_set __b)
- bool **is_singleton** (bool_set __b)
- bool_set **operator!=** (bool __s, bool_set __t)
- bool_set **operator!=** (bool_set __s, bool __t)
- bool_set **operator!=** (bool_set __s, bool_set __t)
- bool_set **operator&** (bool __s, bool_set __t)
- bool_set **operator&** (bool_set __s, bool __t)

- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const dynamic_bitset< _WordT, _Alloc > &__x)
- bool_set **operator==** (bool __s, bool_set __t)
- bool_set **operator==** (bool_set __s, bool __t)
- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, dynamic_bitset< _WordT, _Alloc > &__x)
- bool_set **operator^** (bool __s, bool_set __t)
- bool_set **operator^** (bool_set __s, bool __t)
- bool_set **operator|** (bool __s, bool_set __t)
- bool_set **operator|** (bool_set __s, bool __t)
- bool **possibly** (bool_set __b)
- bool_set **set_complement** (bool_set __b)
- bool_set **set_intersection** (bool __s, bool_set __t)
- bool_set **set_intersection** (bool_set __s, bool __t)
- bool_set **set_intersection** (bool_set __s, bool_set __t)
- bool_set **set_union** (bool __s, bool_set __t)
- bool_set **set_union** (bool_set __s, bool __t)
- bool_set **set_union** (bool_set __s, bool_set __t)

- template<typename _WordT , typename _Alloc >
  bool operator!= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool operator<= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool operator> (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool operator>= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)

- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > operator& (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > operator| (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > operator^ (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > operator- (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)

3.24.1 Detailed Description

Namespace for non-standard "TR2" extensions.

3.25 std::tr2::__detail Namespace Reference

3.25.1 Detailed Description

Implementation details not part of the namespace std::tr2 interface.

4 Class Documentation

4.1 __gnu_parallel::__accumulate_binop_reduct< _BinOp > Struct Template Reference

Public Member Functions

- **__accumulate_binop_reduct** (_BinOp &__b)
- template<typename _Result , typename _Addend >
  _Result **operator()** (const _Result &__x, const _Addend &__y)

Public Attributes

- _BinOp & **__binop**

4.1.1 Detailed Description

template<typename _BinOp>struct __gnu_parallel::__accumulate_binop_reduct< _BinOp >

General reduction, using a binary operator.

Definition at line 335 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.2 __gnu_parallel::__accumulate_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__accumulate_selector< _It >:

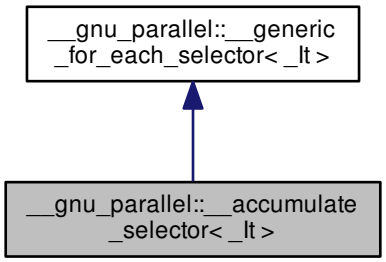

Public Member Functions

- template<typename _Op >
  std::iterator_traits< _It >
  ::value_type operator() (_Op __o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.2.1 Detailed Description

template<typename _It>struct __gnu_parallel::__accumulate_selector< _It >

std::accumulate() selector.

Definition at line 208 of file for_each_selectors.h.

4.2.2 Member Function Documentation

4.2.2.1 template<typename _It> template<typename _Op > std::iterator_traits<_It>::value_type __gnu_parallel::__accumulate_selector< _It >::operator() (_Op __o, _It __i) [inline]

Functor execution.

Parameters

__o	Operator (unused).
__i	iterator referencing object.

Returns

The current value.

Definition at line 216 of file for_each_selectors.h.

4.2.3 Member Data Documentation

4.2.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.3 std::__add_pointer_helper< _Tp, bool > Struct Template Reference

Public Types

- typedef _Tp **type**

4.3.1 Detailed Description

template<typename _Tp, bool = __or_<__is_referenceable<_Tp>, is_void<_Tp>>::value>struct std::__add_pointer_helper< _Tp, bool >

add_pointer

Definition at line 2025 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.4 __gnu_parallel::__adjacent_difference_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__adjacent_difference_selector< _It >:

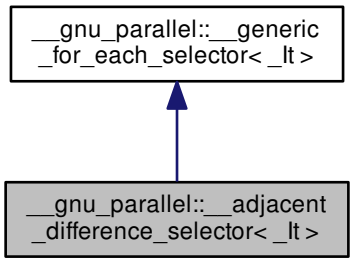

Public Member Functions

- template<typename _Op >
  bool **operator()** (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.4.1 Detailed Description

template<typename _It>struct __gnu_parallel::__adjacent_difference_selector< _It >

Selector that returns the difference between two adjacent __elements.

Definition at line 269 of file for_each_selectors.h.

4.4.2 Member Data Documentation

4.4.2.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.5 __gnu_parallel::__adjacent_find_selector Struct Reference

Inheritance diagram for __gnu_parallel::__adjacent_find_selector:



Public Member Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  std::pair< _RAIter1, _RAIter2 > _M_sequential_algorithm (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __-
  begin2, _Pred __pred)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  bool operator() (_RAIter1 __i1, _RAIter2 __i2, _Pred __pred)

4.5.1 Detailed Description

Test predicate on two adjacent elements.

Definition at line 80 of file find_selectors.h.

4.5.2 Member Function Documentation

4.5.2.1 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__adjacent_find_selector::_M_sequential_algorithm (_RAIter1 *__begin1,* _RAIter1 *__end1,* _RAIter2 *__begin2,* _Pred *__pred*) [inline]

Corresponding sequential algorithm on a sequence.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__pred	Find predicate.

Definition at line 105 of file find_selectors.h.

4.5.2.2 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > bool __gnu_parallel::__adjacent_find_selector::operator() (_RAIter1 *__i1*, _RAIter2 *__i2*, _Pred *__pred*) [inline]

Test on one position.

Parameters

__i1	_Iterator on first sequence.
__i2	_Iterator on second sequence (unused).
__pred	Find predicate.

Definition at line 90 of file find_selectors.h.

The documentation for this struct was generated from the following file:

- find_selectors.h

4.6 __gnu_cxx::__alloc_traits< _Alloc, typename > Struct Template Reference

Inheritance diagram for __gnu_cxx::__alloc_traits< _Alloc, typename >:



Public Types

- typedef std::allocator_traits < _Alloc > **_Base_type**
- typedef _Alloc **allocator_type**
- typedef _Base_type::const_pointer **const_pointer**
- typedef const value_type & **const_reference**
- using const_void_pointer = typename _Ptr< __cv_pointer, const void >::type

- typedef _Base_type::difference_type **difference_type**
- using is_always_equal = __detected_or_t< typename is_empty< _Alloc >::type, __equal, _Alloc >
- typedef _Base_type::pointer **pointer**
- using propagate_on_container_copy_assignment = __detected_or_t< false_type, __pocca, _Alloc >
- using propagate_on_container_move_assignment = __detected_or_t< false_type, __pocma, _Alloc >
- using propagate_on_container_swap = __detected_or_t< false_type, __pocs, _Alloc >
- template<typename _Tp >
  using **rebind_alloc** = __alloc_rebind< _Alloc, _Tp >
- template<typename _Tp >
  using **rebind_traits** = allocator_traits< rebind_alloc< _Tp >>
- typedef value_type & **reference**
- typedef _Base_type::size_type **size_type**
- typedef _Base_type::value_type **value_type**
- using void_pointer = typename _Ptr< __v_pointer, void >::type

Static Public Member Functions

- static constexpr bool **_S_always_equal** ()
- static constexpr bool **_S_nothrow_move** ()
- static constexpr void **_S_on_swap** (_Alloc &__a, _Alloc &__b)
- static constexpr bool **_S_propagate_on_copy_assign** ()
- static constexpr bool **_S_propagate_on_move_assign** ()
- static constexpr bool **_S_propagate_on_swap** ()
- static constexpr _Alloc **_S_select_on_copy** (const _Alloc &__a)
- static constexpr pointer allocate (_Alloc &__a, size_type __n)
- static constexpr pointer allocate (_Alloc &__a, size_type __n, const_void_pointer __hint)
- template<typename _Ptr , typename... _Args>
  static constexpr
  std::__enable_if_t
  < __is_custom_pointer< _Ptr >
  ::value > **construct** (_Alloc &__a, _Ptr __p, _Args &&...__args) noexcept(noexcept(_Base_type::construct(__a, std::__to_address(__p), std::forward< _Args >(__args)...)))
- template<typename _Tp , typename... _Args>
  static constexpr auto construct (_Alloc &__a, _Tp *__p, _Args &&...__args) noexcept(noexcept(_S_construct(__a, __p, std::forward< _Args >(__args)...))) -> decltype(_S_construct(__a, __p, std::forward< _Args >(__args)...))
- static constexpr void deallocate (_Alloc &__a, pointer __p, size_type __n)
- template<typename _Ptr >
  static constexpr
  std::__enable_if_t
  < __is_custom_pointer< _Ptr >
  ::value > **destroy** (_Alloc &__a, _Ptr __p) noexcept(noexcept(_Base_type::destroy(__a, std::__to_address(__p))))
- template<typename _Tp >
  static constexpr void destroy (_Alloc &__a, _Tp *__p) noexcept(noexcept(_S_destroy(__a, __p, 0)))
- static constexpr size_type max_size (const _Alloc &__a) noexcept
- static constexpr _Alloc select_on_container_copy_construction (const _Alloc &__rhs)

Protected Types

- template<typename _Tp >
  using **__c_pointer** = typename _Tp::const_pointer
- template<typename _Tp >
  using **__cv_pointer** = typename _Tp::const_void_pointer
- template<typename _Tp >
  using **__equal** = typename _Tp::is_always_equal
- template<typename _Tp >
  using **__pocca** = typename _Tp::propagate_on_container_copy_assignment
- template<typename _Tp >
  using **__pocma** = typename _Tp::propagate_on_container_move_assignment
- template<typename _Tp >
  using **__pocs** = typename _Tp::propagate_on_container_swap
- template<typename _Tp >
  using **__pointer** = typename _Tp::pointer
- template<typename _Tp >
  using **__v_pointer** = typename _Tp::void_pointer

4.6.1 Detailed Description

template<typename _Alloc, typename = typename _Alloc::value_type>struct __gnu_cxx::__alloc_traits< _Alloc, typename >

Uniform interface to C++98 and C++11 allocators.

Definition at line 48 of file ext/alloc_traits.h.

4.6.2 Member Typedef Documentation

4.6.2.1 template<typename _Alloc> using std::allocator_traits< _Alloc >::const_void_pointer = typename _Ptr<__cv_pointer, const void>::type [inherited]

The allocator's const void pointer type.

`Alloc::const_void_pointer` if that type exists, otherwise `pointer_traits<pointer>::rebind<const void>`

Definition at line 154 of file bits/alloc_traits.h.

4.6.2.2 template<typename _Alloc> using std::allocator_traits< _Alloc >::is_always_equal = __detected_or_t<typename is_empty<_Alloc>::type, __equal, _Alloc> [inherited]

Whether all instances of the allocator type compare equal.

`Alloc::is_always_equal` if that type exists, otherwise `is_empty<Alloc>::type`

Definition at line 206 of file bits/alloc_traits.h.

4.6.2.3 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_copy_assignment = __detected_or_t<false_type, __pocca, _Alloc> [inherited]

How the allocator is propagated on copy assignment.

`Alloc::propagate_on_container_copy_assignment` if that type exists, otherwise `false_type`

Definition at line 179 of file bits/alloc_traits.h.

4.6.2.4 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_move_assignment = __detected_or_t<false_type, __pocma, _Alloc> [inherited]

How the allocator is propagated on move assignment.

`Alloc::propagate_on_container_move_assignment` if that type exists, otherwise `false_type`

Definition at line 188 of file bits/alloc_traits.h.

4.6.2.5 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_swap = __detected_or_t<false_type, __pocs, _Alloc> [inherited]

How the allocator is propagated on swap.

`Alloc::propagate_on_container_swap` if that type exists, otherwise `false_type`

Definition at line 197 of file bits/alloc_traits.h.

4.6.2.6 template<typename _Alloc> using std::allocator_traits< _Alloc >::void_pointer = typename _Ptr<__v_pointer, void>::type [inherited]

The allocator's void pointer type.

`Alloc::void_pointer` if that type exists, otherwise `pointer_traits<pointer>::rebind<void>`

Definition at line 146 of file bits/alloc_traits.h.

4.6.3 Member Function Documentation

4.6.3.1 template<typename _Alloc> static constexpr pointer std::allocator_traits< _Alloc >::allocate (_Alloc & __a, size_type __n) [inline], [static], [inherited]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.

Calls `a.allocate(n)`

Definition at line 313 of file bits/alloc_traits.h.

Referenced by std::__allocate_guarded().

4.6.3.2 template<typename _Alloc> static constexpr pointer std::allocator_traits< _Alloc >::allocate (_Alloc & __a, size_type __n, const_void_pointer __hint) [inline], [static], [inherited]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.
__hint	Aid to locality.

Returns

Memory of suitable size and alignment for *n* objects of type `value_type`

Returns `a.allocate(n, hint)` if that expression is well-formed, otherwise returns `a.allocate(n)`

Definition at line 328 of file bits/alloc_traits.h.

4.6.3.3 template<typename _Alloc> template<typename _Tp , typename... _Args> static constexpr auto std::allocator_traits< _Alloc >::construct (_Alloc & __a, _Tp * __p, _Args &&... __args) -> decltype(_S_construct(__a, __p, std::forward<_Args>(__args)...)) [inline], [static], [noexcept], [inherited]

Construct an object of type *_Tp*.

Parameters

__a	An allocator.
__p	Pointer to memory of suitable size and alignment for Tp
__args	Constructor arguments.

Calls `__a.construct(__p, std::forward<Args>(__args)...)` if that expression is well-formed, otherwise uses placement-new to construct an object of type *_Tp* at location *__p* from the arguments *__args*...

Definition at line 356 of file bits/alloc_traits.h.

4.6.3.4 template<typename _Alloc> static constexpr void std::allocator_traits< _Alloc >::deallocate (_Alloc & __a, pointer __p, size_type __n) [inline], [static], [inherited]

Deallocate memory.

Parameters

__a	An allocator.
__p	Pointer to the memory to deallocate.
__n	The number of objects space was allocated for.

Calls `a.deallocate(p, n)`

Definition at line 340 of file bits/alloc_traits.h.

Referenced by std::__allocated_ptr< _Alloc >::~__allocated_ptr().

4.6.3.5 template<typename _Alloc> template<typename _Tp > static constexpr void std::allocator_traits< _Alloc >::destroy (_Alloc & __a, _Tp * __p) [inline], [static], [noexcept], [inherited]

Destroy an object of type *_Tp*.

Parameters

__a	An allocator.
__p	Pointer to the object to destroy

Calls `__a.destroy(__p)` if that expression is well-formed, otherwise calls `__p->~_Tp()`

Definition at line 372 of file bits/alloc_traits.h.

Referenced by std::_Destroy().

4.6.3.6 template<typename _Alloc> static constexpr size_type std::allocator_traits< _Alloc >::max_size (const _Alloc & __a) [inline], [static], [noexcept], [inherited]

The maximum supported allocation size.

Parameters

__a	An allocator.

Returns

`__a.max_size()` or `numeric_limits<size_type>::max()`

Returns `__a.max_size()` if that expression is well-formed, otherwise returns `numeric_limits<size_type>::max()`

Definition at line 385 of file bits/alloc_traits.h.

Referenced by std::forward_list< _Tp, _Alloc >::max_size(), and std::list< __inp, __rebind_inp >::max_size().

4.6.3.7 template<typename _Alloc> static constexpr _Alloc std::allocator_traits< _Alloc >::select_on_container_copy_construction (const _Alloc & *__rhs*) [inline], [static], [inherited]

Obtain an allocator to use when copying a container.

Parameters

__rhs	An allocator.

Returns

`__rhs.select_on_container_copy_construction()` or *__rhs*

Returns `__rhs.select_on_container_copy_construction()` if that expression is well-formed, otherwise returns *__rhs*

Definition at line 397 of file bits/alloc_traits.h.

The documentation for this struct was generated from the following file:

- ext/alloc_traits.h

4.7 std::__allocated_ptr< _Alloc > Struct Template Reference

Public Types

- using **pointer** = typename allocator_traits< _Alloc >::pointer
- using **value_type** = typename allocator_traits< _Alloc >::value_type

Public Member Functions

- __allocated_ptr (_Alloc &__a, pointer __ptr) noexcept
- template<typename _Ptr , typename _Req = _Require<is_same<_Ptr, value_type*>>> __allocated_ptr (_Alloc &__a, _Ptr __ptr)
- __allocated_ptr (__allocated_ptr &&__gd) noexcept
- ~__allocated_ptr ()
- value_type * get ()
- __allocated_ptr & operator= (std::nullptr_t) noexcept

4.7.1 Detailed Description

template<typename _Alloc>struct std::__allocated_ptr< _Alloc >

Non-standard RAII type for managing pointers obtained from allocators.

Definition at line 46 of file allocated_ptr.h.

4.7.2 Constructor & Destructor Documentation

4.7.2.1 template<typename _Alloc > std::__allocated_ptr< _Alloc >::__allocated_ptr (_Alloc & *__a,* pointer *__ptr*) [inline], [noexcept]

Take ownership of __ptr.

Definition at line 52 of file allocated_ptr.h.

4.7.2.2 template<typename _Alloc > template<typename _Ptr , typename _Req = _Require<is_same<_Ptr, value_type*>>> std::__allocated_ptr< _Alloc >::__allocated_ptr (_Alloc & *__a,* _Ptr *__ptr*) [inline]

Convert __ptr to allocator's pointer type and take ownership of it.

Definition at line 59 of file allocated_ptr.h.

4.7.2.3 template<typename _Alloc > std::__allocated_ptr< _Alloc >::__allocated_ptr (__allocated_ptr< _Alloc > && *__gd*) [inline], [noexcept]

Transfer ownership of the owned pointer.

Definition at line 65 of file allocated_ptr.h.

4.7.2.4 template<typename _Alloc > std::__allocated_ptr< _Alloc >::~__allocated_ptr ( ) [inline]

Deallocate the owned pointer.

Definition at line 70 of file allocated_ptr.h.

References std::allocator_traits< _Alloc >::deallocate().

4.7.3 Member Function Documentation

4.7.3.1 template<typename _Alloc > value_type* std::__allocated_ptr< _Alloc >::get (void) [inline]

Get the address that the owned pointer refers to.

Definition at line 85 of file allocated_ptr.h.

4.7.3.2 template<typename _Alloc > __allocated_ptr& std::__allocated_ptr< _Alloc >::operator= (std::nullptr_t) [inline], [noexcept]

Release ownership of the owned pointer.

Definition at line 78 of file allocated_ptr.h.

The documentation for this struct was generated from the following file:

- allocated_ptr.h

4.8 std::__atomic_base< _ItTp > Struct Template Reference

Public Types

- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **__atomic_base** (const __atomic_base &)=delete
- constexpr **__atomic_base** (__int_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept

- __int_type **operator-=** (__int_type __i) volatilenoexcept
- __atomic_base & **operator=** (const __atomic_base &)=delete
- __atomic_base & **operator=** (const __atomic_base &) volatile=delete
- __int_type **operator=** (__int_type __i) noexcept
- __int_type **operator=** (__int_type __i) volatilenoexcept
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.8.1 Detailed Description

template<typename _IntTp>struct std::__atomic_base< _IntTp >

Base class for atomic integrals.

Definition at line 140 of file atomic_base.h.

The documentation for this struct was generated from the following file:

- atomic_base.h

4.9 std::__atomic_base< _PTp * > Struct Template Reference

Public Member Functions

- **__atomic_base** (const __atomic_base &)=delete
- constexpr **__atomic_base** (__pointer_type __p) noexcept
- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) volatilenoexcept
- __pointer_type **exchange** (__pointer_type __p, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **exchange** (__pointer_type __p, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __pointer_type **fetch_add** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **fetch_add** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __pointer_type **fetch_sub** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **fetch_sub** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __pointer_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __pointer_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __pointer_type** () const noexcept
- **operator __pointer_type** () const volatilenoexcept
- __pointer_type **operator++** (int) noexcept
- __pointer_type **operator++** (int) volatilenoexcept
- __pointer_type **operator++** () noexcept
- __pointer_type **operator++** () volatilenoexcept
- __pointer_type **operator+=** (ptrdiff_t __d) noexcept

- __pointer_type **operator+=** (ptrdiff_t __d) volatilenoexcept
- __pointer_type **operator--** (int) noexcept
- __pointer_type **operator--** (int) volatilenoexcept
- __pointer_type **operator--** () noexcept
- __pointer_type **operator--** () volatilenoexcept
- __pointer_type **operator-=** (ptrdiff_t __d) noexcept
- __pointer_type **operator-=** (ptrdiff_t __d) volatilenoexcept
- __atomic_base & **operator=** (const __atomic_base &)=delete
- __atomic_base & **operator=** (const __atomic_base &) volatile=delete
- __pointer_type **operator=** (__pointer_type __p) noexcept
- __pointer_type **operator=** (__pointer_type __p) volatilenoexcept
- void **store** (__pointer_type __p, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__pointer_type __p, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.9.1 Detailed Description

template<typename _PTp>struct std::__atomic_base< _PTp * >

Partial specialization for pointer types.

Definition at line 599 of file atomic_base.h.

The documentation for this struct was generated from the following file:

- atomic_base.h

4.10 std::__atomic_flag_base Struct Reference

Inheritance diagram for std::__atomic_flag_base:



Public Attributes

- __atomic_flag_data_type **_M_i**

4.10.1 Detailed Description

Base type for atomic_flag.

Base type is POD with data, allowing atomic_flag to derive from it and meet the standard layout type requirement. In addition to compatibility with a C interface, this allows different implementations of atomic_flag to use the same atomic operation functions, via a standard conversion to the __atomic_flag_base argument.

Definition at line 176 of file atomic_base.h.

The documentation for this struct was generated from the following file:

- atomic_base.h

4.11 std::__basic_future< _Res > Class Template Reference

Inheritance diagram for std::__basic_future< _Res >:

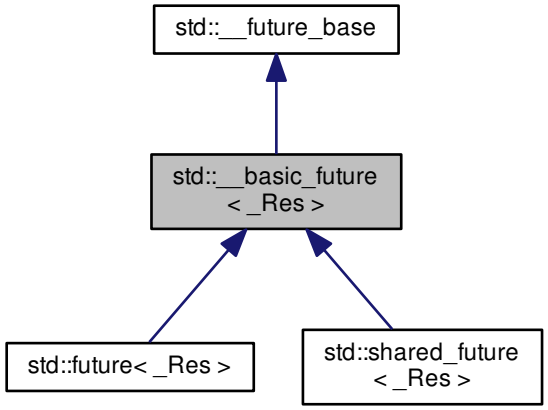

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- **__basic_future** (const __basic_future &)=delete
- __basic_future & **operator=** (const __basic_future &)=delete
- bool **valid** () const noexcept
- void **wait** () const
- template<typename _Rep , typename _Period >
  future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const

- template<typename _Clock , typename _Duration >
  future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < _Res > & **__result_type**
- typedef shared_ptr< _State_base > **__state_type**

Protected Member Functions

- **__basic_future** (const __state_type &__state)
- **__basic_future** (const shared_future< _Res > &) noexcept
- **__basic_future** (shared_future< _Res > &&) noexcept
- **__basic_future** (future< _Res > &&) noexcept
- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

4.11.1 Detailed Description

template<typename _Res>class std::__basic_future< _Res >

Common implementation for future and shared_future.

Definition at line 674 of file future.

4.11.2 Member Typedef Documentation

4.11.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.11.3 Member Function Documentation

4.11.3.1 template<typename _Res> __result_type std::__basic_future< _Res >::_M_get_result ( ) const [inline], [protected]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

Referenced by std::future< _Res >::get(), std::future< _Res & >::get(), std::future< void >::get(), std::shared_future< _Res >::get(), and std::shared_future< _Res & >::get().

The documentation for this class was generated from the following file:

- future

4.12 __gnu_parallel::__binder1st< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType > Class Template Reference

Inheritance diagram for __gnu_parallel::__binder1st< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >:

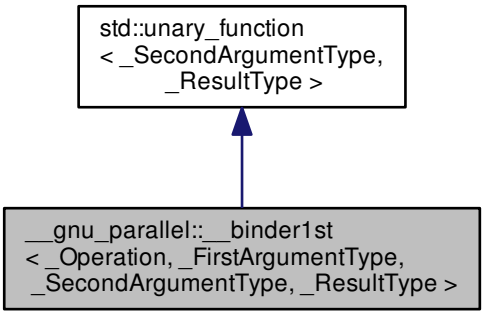

Public Types

- typedef _SecondArgumentType argument_type
- typedef _ResultType result_type

Public Member Functions

- **__binder1st** (const _Operation &__x, const _FirstArgumentType &__y)
- _ResultType **operator()** (const _SecondArgumentType &__x)
- _ResultType **operator()** (_SecondArgumentType &__x) const

Protected Attributes

- _Operation **_M_op**
- _FirstArgumentType **_M_value**

4.12.1 Detailed Description

template<typename _Operation, typename _FirstArgumentType, typename _SecondArgumentType, typename _ResultType>class __gnu_parallel::__binder1st< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >

Similar to std::binder1st, but giving the argument types explicitly.

Definition at line 192 of file base.h.

4.12.2 Member Typedef Documentation

4.12.2.1 typedef _SecondArgumentType std::unary_function< _SecondArgumentType , _ResultType >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.12.2.2 typedef _ResultType std::unary_function< _SecondArgumentType , _ResultType >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- base.h

4.13 __gnu_parallel::__binder2nd< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType > Class Template Reference

Inheritance diagram for __gnu_parallel::__binder2nd< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >:

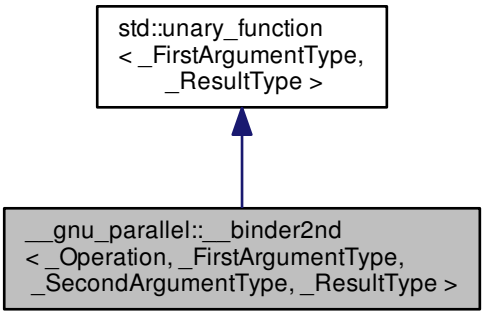

Public Types

- typedef _FirstArgumentType argument_type
- typedef _ResultType result_type

Public Member Functions

- **__binder2nd** (const _Operation &__x, const _SecondArgumentType &__y)
- _ResultType **operator()** (const _FirstArgumentType &__x) const
- _ResultType **operator()** (_FirstArgumentType &__x)

Protected Attributes

- _Operation **_M_op**
- _SecondArgumentType **_M_value**

4.13.1 Detailed Description

template<typename _Operation, typename _FirstArgumentType, typename _SecondArgumentType, typename _ResultType>class __gnu_parallel::__binder2nd< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >

Similar to std::binder2nd, but giving the argument types explicitly.

Definition at line 220 of file base.h.

4.13.2 Member Typedef Documentation

4.13.2.1 typedef _FirstArgumentType std::unary_function< _FirstArgumentType , _ResultType >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.13.2.2 typedef _ResultType std::unary_function< _FirstArgumentType , _ResultType >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- base.h

4.14 std::__codecvt_abstract_base< _InternT, _ExternT, _StateT > Class Template Reference

Inheritance diagram for std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >:

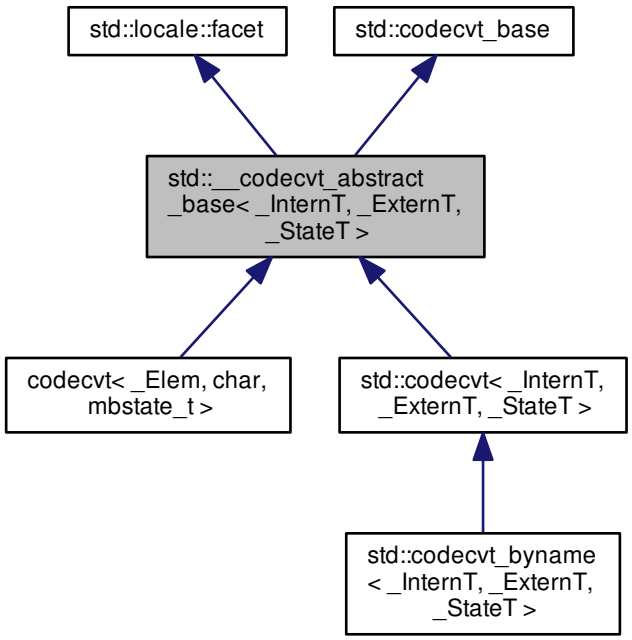

Public Types

- typedef _ExternT **extern_type**

- typedef _InternT **intern_type**
- typedef codecvt_base::result **result**
- typedef _StateT **state_type**

Public Member Functions

- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Protected Member Functions

- **__codecvt_abstract_base** (size_t __refs=0)
- virtual bool **do_always_noconv** () const =0 throw ()
- virtual int **do_encoding** () const =0 throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const =0
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const =0
- virtual int **do_max_length** () const =0 throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const =0
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const =0

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.14.1 Detailed Description

template<typename _InternT, typename _ExternT, typename _StateT>class std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >

Common base for codecvt functions.

This template class provides implementations of the public functions that forward to the protected virtual functions.

This template also provides abstract stubs for the protected virtual functions.

Definition at line 68 of file codecvt.h.

4.14.2 Member Function Documentation

4.14.2.1 template<typename _InternT, typename _ExternT, typename _StateT> virtual result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::do_out (state_type & *__state*, const intern_type * *__from*, const intern_type * *__from_end*, const intern_type *& *__from_next*, extern_type * *__to*, extern_type * *__to_end*, extern_type *& *__to_next*) const [protected], [pure virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implemented in std::codecvt< char32_t, char, mbstate_t >, std::codecvt< char16_t, char, mbstate_t >, std::codecvt< wchar_t, char, mbstate_t >, std::codecvt< char, char, mbstate_t >, std::codecvt< _InternT, _ExternT, _StateT >, std::codecvt< _Elem, char, mbstate_t >, and std::codecvt< _InternT, _ExternT, encoding_state >.

Referenced by std::__codecvt_abstract_base< char32_t, char, mbstate_t >::out().

4.14.2.2 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::in (state_type & *__state*, const extern_type * *__from*, const extern_type * *__from_end*, const extern_type *& *__from_next*, intern_type * *__to*, intern_type * *__to_end*, intern_type *& *__to_next*) const [inline]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.14.2.3 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.14.2.4 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.15 __gnu_cxx::__common_pool_policy< _PoolTp, _Thread > Struct Template Reference

Inherits __gnu_cxx::__common_pool_base< _PoolTp, _Thread >.

4.15.1 Detailed Description

template<template< bool > class _PoolTp, bool _Thread>struct __gnu_cxx::__common_pool_policy< _PoolTp, _Thread >

Policy for shared __pool objects.

Definition at line 459 of file mt_allocator.h.

The documentation for this struct was generated from the following file:

- mt_allocator.h

4.16 __gnu_parallel::__count_if_selector< _It, _Diff > Struct Template Reference

Inheritance diagram for __gnu_parallel::__count_if_selector< _It, _Diff >:



Public Member Functions

- template<typename _Op >
  _Diff operator() (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.16.1 Detailed Description

template<typename _It, typename _Diff>struct __gnu_parallel::__count_if_selector< _It, _Diff >

std::count_if () selector.

Definition at line 194 of file for_each_selectors.h.

4.16.2 Member Function Documentation

4.16.2.1 template<typename _It , typename _Diff > template<typename _Op > _Diff __gnu_parallel::__count_if_selector< _It, _Diff >::operator() (_Op & *__o*, _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Returns

1 if count, 0 if does not count.

Definition at line 202 of file for_each_selectors.h.

4.16.3 Member Data Documentation

4.16.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.17 __gnu_parallel::__count_selector< _It, _Diff > Struct Template Reference

Inheritance diagram for __gnu_parallel::__count_selector< _It, _Diff >:



Public Member Functions

- template<typename _ValueType >
  _Diff operator() (_ValueType &__v, _It __i)

Public Attributes

- _It _M_finish_iterator

4.17.1 Detailed Description

template<typename _It, typename _Diff>struct __gnu_parallel::__count_selector< _It, _Diff >

std::count() selector.

Definition at line 180 of file for_each_selectors.h.

4.17.2 Member Function Documentation

4.17.2.1 template<typename _It, typename _Diff> template<typename _ValueType > _Diff __gnu_parallel::__count_selector< _It, _Diff >::operator() (_ValueType & __v, _It __i) [inline]

Functor execution.

Parameters

__v	Current value.
__i	iterator referencing object.

Returns

1 if count, 0 if does not count.

Definition at line 188 of file for_each_selectors.h.

4.17.3 Member Data Documentation

4.17.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.18 std::__ctype_abstract_base< _CharT > Class Template Reference

Inheritance diagram for std::__ctype_abstract_base< _CharT >:

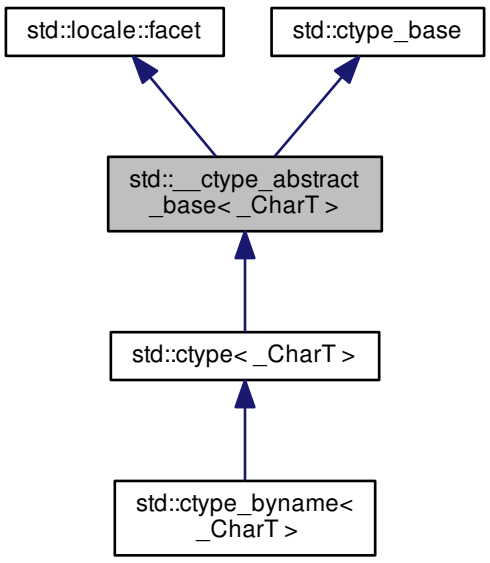

Public Types

- typedef const int * **__to_type**
- typedef _CharT char_type
- typedef char **mask**

Public Member Functions

- bool is (mask __m, char_type __c) const
- const char_type * is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char_type * scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- const char_type * scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- char_type tolower (char_type __c) const
- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- **__ctype_abstract_base** (size_t __refs=0)
- virtual bool do_is (mask __m, char_type __c) const =0
- virtual const char_type * do_is (const char_type *__lo, const char_type *__hi, mask *__vec) const =0
- virtual char do_narrow (char_type __c, char __dfault) const =0
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const =0
- virtual const char_type * do_scan_is (mask __m, const char_type *__lo, const char_type *__hi) const =0
- virtual const char_type * do_scan_not (mask __m, const char_type *__lo, const char_type *__hi) const =0
- virtual char_type do_tolower (char_type __c) const =0
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const =0
- virtual char_type do_toupper (char_type __c) const =0
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const =0
- virtual char_type do_widen (char __c) const =0
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__to) const =0

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.18.1 Detailed Description

template<typename _CharT>class std::__ctype_abstract_base< _CharT >

Common base for ctype facet.

This template class provides implementations of the public functions that forward to the protected virtual functions.

This template also provides abstract stubs for the protected virtual functions.

Definition at line 150 of file locale_facets.h.

4.18.2 Member Typedef Documentation

4.18.2.1 template<typename _CharT> typedef _CharT std::__ctype_abstract_base< _CharT >::char_type

Typedef for the template parameter.

Definition at line 155 of file locale_facets.h.

4.18.3 Member Function Documentation

4.18.3.1 template<typename _CharT> virtual bool std::__ctype_abstract_base< _CharT >::do_is (mask *__m*, char_type *__c*) const [protected], [pure virtual]

Test char_type classification.

This function finds a mask M for *c* and compares it to mask *m*.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__c	The char_type to find the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::is().

4.18.3.2 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_is (const char_type * __lo, const char_type * __hi, mask * __vec) const [protected], [pure virtual]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the input.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

4.18.3.3 template<typename _CharT> virtual char std::__ctype_abstract_base< _CharT >::do_narrow (char_type __c, char __dfault) const [protected], [pure virtual]

Narrow char_type to char.

This virtual function converts the argument to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::narrow().

4.18.3.4 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [protected], [pure virtual]

Narrow char_type array to char.

This virtual function converts each char_type in the range [__lo,__hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any element in the input that cannot be converted, *__dfault* is used instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

4.18.3.5 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_scan_is (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [protected], [pure virtual]

Find char_type matching mask.

This function searches for and returns the first char_type c in [__lo,__hi) for which is(__m,c) is true.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching char_type if found, else *__hi*.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::scan_is().

4.18.3.6 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_scan_not (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [protected], [pure virtual]

Find char_type not matching mask.

This function searches for and returns a pointer to the first char_type c of [lo,hi) for which is(m,c) is false.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching char_type if found, else *__hi*.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::scan_not().

4.18.3.7 template<typename _CharT> virtual char_type std::__ctype_abstract_base< _CharT >::do_tolower (char_type __c) const [protected], [pure virtual]

Convert to lowercase.

This virtual function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::tolower().

4.18.3.8 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_tolower (char_type * *__lo*, const char_type * *__hi*) const [protected], [pure virtual]

Convert array to lowercase.

This virtual function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

4.18.3.9 template<typename _CharT> virtual char_type std::__ctype_abstract_base< _CharT >::do_toupper (char_type __c) const [protected], [pure virtual]

Convert to uppercase.

This virtual function converts the char_type argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::toupper().

4.18.3.10 template<typename _CharT> virtual const char_type* std::__ctype_abstract_base< _CharT >::do_toupper (char_type * *__lo*, const char_type * *__hi*) const [protected], [pure virtual]

Convert array to uppercase.

This virtual function converts each char_type in the range [__lo,__hi) to uppercase if possible. Other elements remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

4.18.3.11 template<typename _CharT> virtual char_type std::__ctype_abstract_base< _CharT >::do_widen (char *__c*) const [protected], [pure virtual]

Widen char.

This virtual function converts the char to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

Referenced by std::__ctype_abstract_base< wchar_t >::widen().

4.18.3.12 template<typename _CharT> virtual const char* std::__ctype_abstract_base< _CharT >::do_widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [protected], [pure virtual]

Widen char array.

This function converts each char in the input to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Implemented in std::ctype< wchar_t >, and std::ctype< _CharT >.

4.18.3.13 template<typename _CharT> bool std::__ctype_abstract_base< _CharT >::is (mask *__m*, char_type *__c*) const [inline]

Test char_type classification.

This function finds a mask M for *__c* and compares it to mask *__m*. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__c	The char_type to compare the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Definition at line 169 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), std::ctype< char >::scan_is(), std::ctype< char >::scan_not(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.18.3.14 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::is (const char_type *__lo*, const char_type *__hi*, mask *__vec*) const [inline]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the char array. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 186 of file locale_facets.h.

4.18.3.15 template<typename _CharT> char std::__ctype_abstract_base< _CharT >::narrow (char_type __c, char __dfault) const [inline]

Narrow char_type to char.

This function converts the char_type to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. It does so by returning ctype<char_type>::do_narrow(__c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 331 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.18.3.16 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [inline]

Narrow array to char array.

This function converts each char_type in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char_type in the input that cannot be converted, *dfault* is used instead. It does so by returning ctype<char_type>::do_narrow(__lo, __hi, __dfault, __to).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 353 of file locale_facets.h.

4.18.3.17 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_is (mask __m, const char_type * __lo, const char_type * __hi) const [inline]

Find char_type matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is true. It does so by returning ctype<char_type>::do_scan_is().

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to matching char_type if found, else *__hi*.

Definition at line 202 of file locale_facets.h.

4.18.3.18 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_not (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [inline]

Find char_type not matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is false. It does so by returning ctype<char_type>::do_scan_not().

Parameters

__m	The mask to compare against.
__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

Pointer to non-matching char if found, else *__hi*.

Definition at line 218 of file locale_facets.h.

4.18.3.19 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::tolower (char_type *__c*) const [inline]

Convert to lowercase.

This function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_tolower(c).

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Definition at line 261 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.18.3.20 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::tolower (char_type * *__lo*, const char_type * *__hi*) const [inline]

Convert array to lowercase.

This function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_tolower(__lo, __hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 276 of file locale_facets.h.

4.18.3.21 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::toupper (char_type __c) const [inline]

Convert to uppercase.

This function converts the argument to uppercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_toupper().

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Definition at line 232 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.18.3.22 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::toupper (char_type * __lo, const char_type * __hi) const [inline]

Convert array to uppercase.

This function converts each char_type in the range [lo,hi) to uppercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_toupper(lo, hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 247 of file locale_facets.h.

4.18.3.23 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::widen (char __c) const [inline]

Widen char to char_type.

This function converts the char argument to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type.

Definition at line 293 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::time_put< _CharT, _OutIter >::do_put(), std::money_put< _CharT, _OutIter >::do_put(), std::tr2::operator<<(), and std::operator<<().

4.18.3.24 template<typename _CharT> const char* std::__ctype_abstract_base< _CharT >::widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [inline]

Widen array to char_type.

This function converts each char in the input to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 312 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.19 std::__detector< _Default, _AlwaysVoid, _Op, _Args > Struct Template Reference

Public Types

- using **type** = _Default
- using **value_t** = false_type

4.19.1 Detailed Description

template<typename _Default, typename _AlwaysVoid, template< typename...> class _Op, typename... _Args>struct std::__detector< _Default, _AlwaysVoid, _Op, _Args >

Implementation of the detection idiom (negative case).

Definition at line 2582 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.20 std::__detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...> Struct Template Reference

Public Types

- using **type** = _Op< _Args...>
- using **value_t** = true_type

4.20.1 Detailed Description

template<typename _Default, template< typename...> class _Op, typename... _Args>struct std::__detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...>

Implementation of the detection idiom (positive case).

Definition at line 2591 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.21 std::tr2::__dynamic_bitset_base< _WordT, _Alloc > Struct Template Reference

Inheritance diagram for std::tr2::__dynamic_bitset_base< _WordT, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef _WordT **block_type**
- typedef size_t **size_type**

Public Member Functions

- **__dynamic_bitset_base** (const allocator_type &__alloc)
- **__dynamic_bitset_base** (const __dynamic_bitset_base &)=default
- **__dynamic_bitset_base** (__dynamic_bitset_base &&__b)=default
- **__dynamic_bitset_base** (size_type __nbits, unsigned long long __val=0ULL, const allocator_type &__alloc=allocator_type())
- size_t **_M_are_all_aux** () const noexcept
- void **_M_clear** () noexcept
- void **_M_do_and** (const __dynamic_bitset_base &__x) noexcept
- void **_M_do_append_block** (block_type __block, size_type __pos)
- size_t **_M_do_count** () const noexcept
- void **_M_do_dif** (const __dynamic_bitset_base &__x) noexcept
- size_type **_M_do_find_first** (size_t __not_found) const
- size_type **_M_do_find_next** (size_t __prev, size_t __not_found) const
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t __shift)
- void **_M_do_or** (const __dynamic_bitset_base &__x) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t __shift)
- void **_M_do_set** () noexcept
- unsigned long long **_M_do_to_ullong** () const
- unsigned long **_M_do_to_ulong** () const
- void **_M_do_xor** (const __dynamic_bitset_base &__x) noexcept
- allocator_type **_M_get_allocator** () const noexcept
- block_type & **_M_getword** (size_type __pos) noexcept
- block_type **_M_getword** (size_type __pos) const noexcept
- block_type & **_M_hiword** () noexcept
- block_type **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const __dynamic_bitset_base &__x) const noexcept
- bool **_M_is_less** (const __dynamic_bitset_base &__x) const noexcept
- bool **_M_is_proper_subset_of** (const __dynamic_bitset_base &__b) const noexcept
- bool **_M_is_subset_of** (const __dynamic_bitset_base &__b) noexcept
- void **_M_resize** (size_t __nbits, bool __value)
- size_type **_M_size** () const noexcept
- void **_M_swap** (__dynamic_bitset_base &__b) noexcept
- __dynamic_bitset_base & **operator=** (const __dynamic_bitset_base &)=default
- __dynamic_bitset_base & **operator=** (__dynamic_bitset_base &&)=default

Static Public Member Functions

- static block_type **_S_maskbit** (size_type __pos) noexcept
- static size_type **_S_whichbit** (size_type __pos) noexcept
- static size_type **_S_whichbyte** (size_type __pos) noexcept
- static size_type **_S_whichword** (size_type __pos) noexcept

Public Attributes

- std::vector< block_type, allocator_type > _M_w

Static Public Attributes

- static const size_type **_S_bits_per_block**
- static const size_type **npos**

4.21.1 Detailed Description

template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>>struct std::tr2::__dynamic_bitset_base< _WordT, _Alloc >

Base class, general case.

See documentation for dynamic_bitset.

Definition at line 62 of file dynamic_bitset.

4.21.2 Member Data Documentation

4.21.2.1 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::vector<block_type, allocator_type> std::tr2::__dynamic_bitset_base< _WordT, _Alloc >::_M_w

0 is the least significant word.

Definition at line 75 of file dynamic_bitset.

The documentation for this struct was generated from the following files:

- dynamic_bitset
- dynamic_bitset.tcc

4.22 __gnu_parallel::__fill_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__fill_selector< _It >:



Public Member Functions

- template<typename _ValueType >
  bool operator() (_ValueType &__v, _It __i)

Public Attributes

- _It _M_finish_iterator

4.22.1 Detailed Description

template<typename _It>struct __gnu_parallel::__fill_selector< _It >

std::fill() selector.

Definition at line 84 of file for_each_selectors.h.

4.22.2 Member Function Documentation

4.22.2.1 template<typename _It > template<typename _ValueType > bool __gnu_parallel::__fill_selector< _It >::operator() (_ValueType & __v, _It __i) [inline]

Functor execution.

Parameters

__v	Current value.
__i	iterator referencing object.

Definition at line 91 of file for_each_selectors.h.

4.22.3 Member Data Documentation

4.22.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.23 __gnu_parallel::__find_first_of_selector< _FIterator > Struct Template Reference

Inheritance diagram for __gnu_parallel::__find_first_of_selector< _FIterator >:

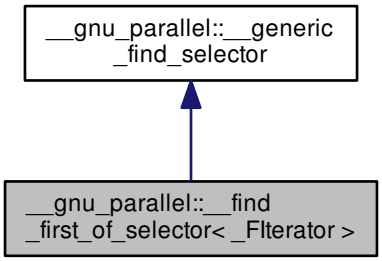

Public Member Functions

- **__find_first_of_selector** (_FIterator __begin, _FIterator __end)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  std::pair< _RAIter1, _RAIter2 > _M_sequential_algorithm (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __-
  begin2, _Pred __pred)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  bool operator() (_RAIter1 __i1, _RAIter2 __i2, _Pred __pred)

Public Attributes

- _FIterator **_M_begin**
- _FIterator **_M_end**

4.23.1 Detailed Description

template<typename _FIterator>struct __gnu_parallel::__find_first_of_selector< _FIterator >

Test predicate on several elements.

Definition at line 153 of file find_selectors.h.

4.23.2 Member Function Documentation

4.23.2.1 template<typename _FIterator > template<typename _RAIter1 , typename _RAIter2 , typename _Pred > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_first_of_selector< _FIterator >::_M_sequential_algorithm (_RAIter1 *__begin1*, _RAIter1 *__end1*, _RAIter2 *__begin2*, _Pred *__pred*) [inline]

Corresponding sequential algorithm on a sequence.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__pred	Find predicate.

Definition at line 186 of file find_selectors.h.

4.23.2.2 template<typename _FIterator > template<typename _RAIter1 , typename _RAIter2 , typename _Pred > bool __gnu_parallel::__find_first_of_selector< _FIterator >::operator() (_RAIter1 *__i1*, _RAIter2 *__i2*, _Pred *__pred*) [inline]

Test on one position.

Parameters

__i1	_Iterator on first sequence.
__i2	_Iterator on second sequence (unused).
__pred	Find predicate.

Definition at line 169 of file find_selectors.h.

The documentation for this struct was generated from the following file:

- find_selectors.h

4.24 __gnu_parallel::__find_if_selector Struct Reference

Inheritance diagram for __gnu_parallel::__find_if_selector:



Public Member Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  std::pair< _RAIter1, _RAIter2 > _M_sequential_algorithm (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __-
  begin2, _Pred __pred)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  bool operator() (_RAIter1 __i1, _RAIter2 __i2, _Pred __pred)

4.24.1 Detailed Description

Test predicate on a single element, used for std::find() and std::find_if ().

Definition at line 50 of file find_selectors.h.

4.24.2 Member Function Documentation

4.24.2.1 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__find_if_selector::_M_sequential_algorithm (_RAIter1 *__begin1*, _RAIter1 *__end1*, _RAIter2 *__begin2*, _Pred *__pred*) [inline]

Corresponding sequential algorithm on a sequence.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__pred	Find predicate.

Definition at line 72 of file find_selectors.h.

4.24.2.2 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > bool __gnu_parallel::__find_if_selector::operator() (_RAIter1 *__i1*, _RAIter2 *__i2*, _Pred *__pred*) [inline]

Test on one position.

Parameters

__i1	_Iterator on first sequence.
__i2	_Iterator on second sequence (unused).
__pred	Find predicate.

Definition at line 60 of file find_selectors.h.

The documentation for this struct was generated from the following file:

- find_selectors.h

4.25 __gnu_parallel::__for_each_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__for_each_selector< _It >:



Public Member Functions

- template<typename _Op >
  bool operator() (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.25.1 Detailed Description

template<typename _It>struct __gnu_parallel::__for_each_selector< _It >

std::for_each() selector.

Definition at line 52 of file for_each_selectors.h.

4.25.2 Member Function Documentation

4.25.2.1 template<typename _It> template<typename _Op > bool __gnu_parallel::__for_each_selector< _It >::operator() (_Op & *__o*, _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Definition at line 59 of file for_each_selectors.h.

4.25.3 Member Data Documentation

4.25.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.26 __cxxabiv1::__forced_unwind Class Reference

4.26.1 Detailed Description

Thrown as part of forced unwinding.

A magic placeholder class that can be caught by reference to recognize forced unwinding.

Definition at line 48 of file cxxabi_forced.h.

The documentation for this class was generated from the following file:

- cxxabi_forced.h

4.27 std::__future_base Struct Reference

Inheritance diagram for std::__future_base:

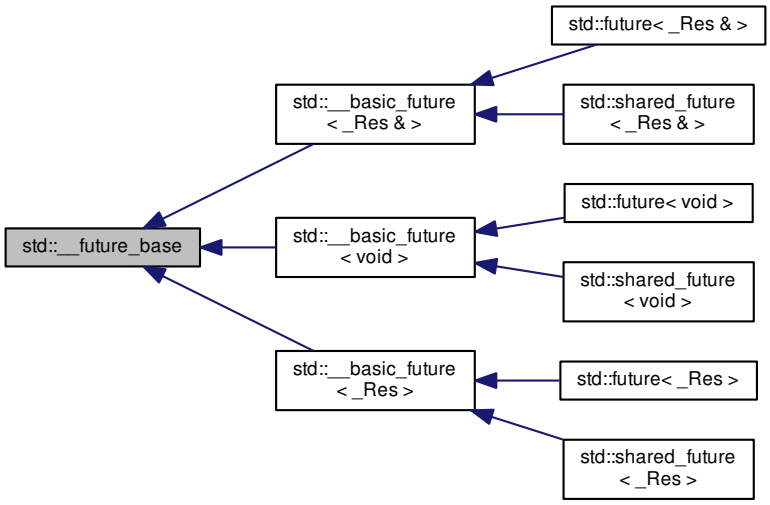

Classes

- struct _Result
- struct _Result< _Res & >
- struct _Result< void >
- struct _Result_alloc
- struct _Result_base

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

4.27.1 Detailed Description

Base class and enclosing scope.

Definition at line 198 of file future.

4.27.2 Member Typedef Documentation

4.27.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter>

A unique_ptr for result objects.

Definition at line 223 of file future.

The documentation for this struct was generated from the following file:

- future

4.28 __gnu_parallel::__generate_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__generate_selector< _It >:

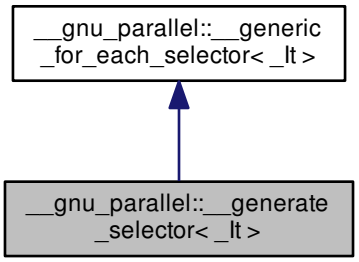

Public Member Functions

- template<typename _Op >
  bool operator() (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.28.1 Detailed Description

template<typename _It>struct __gnu_parallel::__generate_selector< _It >

std::generate() selector.

Definition at line 68 of file for_each_selectors.h.

4.28.2 Member Function Documentation

4.28.2.1 template<typename _It> template<typename _Op > bool __gnu_parallel::__generate_selector< _It >::operator() (_Op & *__o*, _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Definition at line 75 of file for_each_selectors.h.

4.28.3 Member Data Documentation

4.28.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.29 __gnu_parallel::__generic_find_selector Struct Reference

Inheritance diagram for __gnu_parallel::__generic_find_selector:

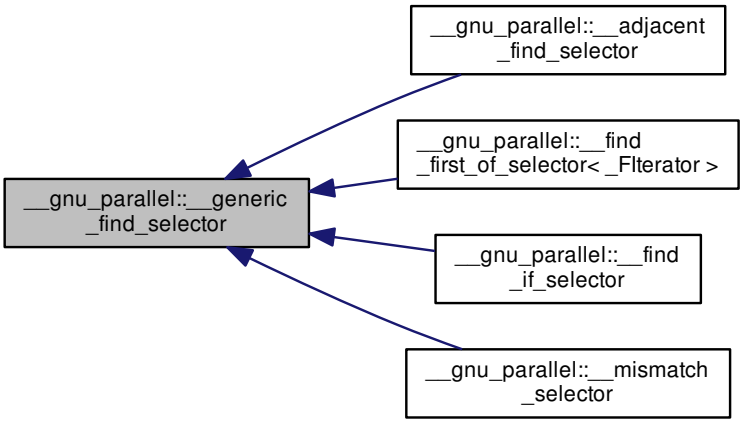

4.29.1 Detailed Description

Base class of all __gnu_parallel::__find_template selectors.

Definition at line 43 of file find_selectors.h.

The documentation for this struct was generated from the following file:

- find_selectors.h

4.30 __gnu_parallel::__generic_for_each_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__generic_for_each_selector< _It >:

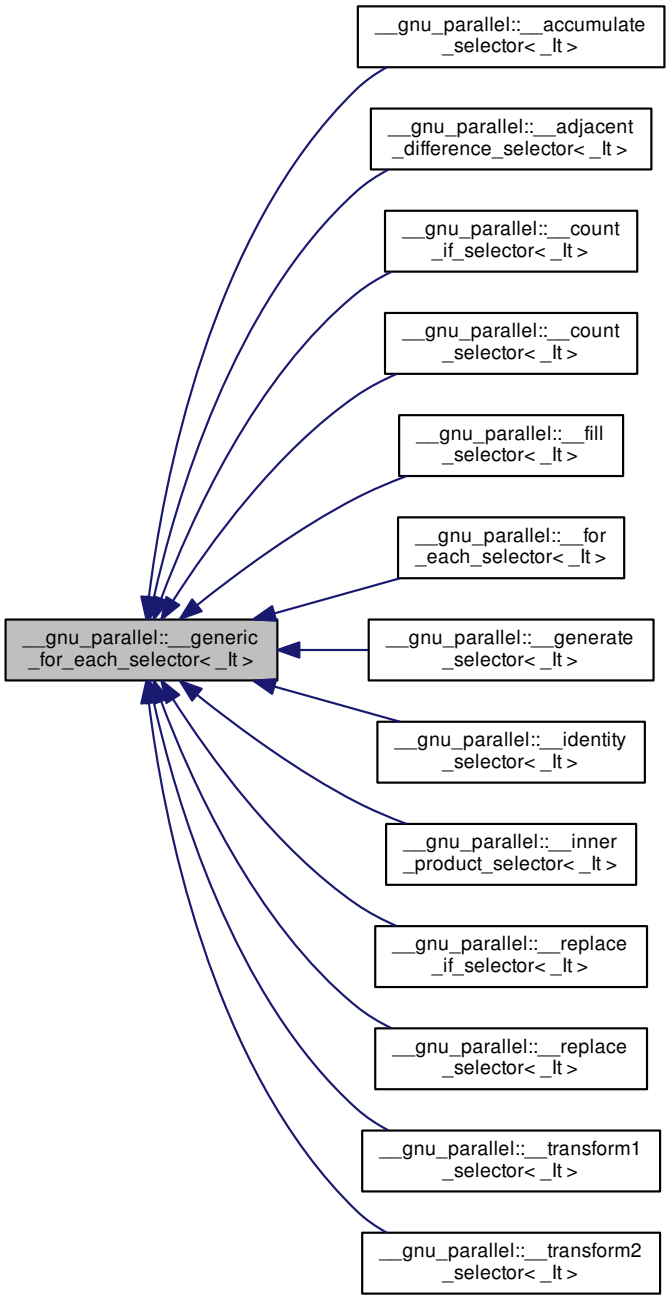

Public Attributes

- _It _M_finish_iterator

4.30.1 Detailed Description

template<typename _It>struct __gnu_parallel::__generic_for_each_selector< _It >

Generic __selector for embarrassingly parallel functions.

Definition at line 42 of file for_each_selectors.h.

4.30.2 Member Data Documentation

4.30.2.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.31 __gnu_parallel::__identity_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__identity_selector< _It >:



Public Member Functions

- template<typename _Op >
  _It operator() (_Op __o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.31.1 Detailed Description

template<typename _It>struct __gnu_parallel::__identity_selector< _It >

Selector that just returns the passed iterator.

Definition at line 253 of file for_each_selectors.h.

4.31.2 Member Function Documentation

4.31.2.1 template<typename _It> template<typename _Op > _It __gnu_parallel::__identity_selector< _It >::operator() (_Op __o, _It __i) [inline]

Functor execution.

Parameters

__o	Operator (unused).
__i	iterator referencing object.

Returns

Passed iterator.

Definition at line 261 of file for_each_selectors.h.

4.31.3 Member Data Documentation

4.31.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.32 __gnu_parallel::__inner_product_selector< _It, _It2, _Tp > Struct Template Reference

Inheritance diagram for __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >:



Public Member Functions

- __inner_product_selector (_It __b1, _It2 __b2)
- template<typename _Op >
  _Tp operator() (_Op __mult, _It __current)

Public Attributes

- _It __begin1_iterator
- _It2 __begin2_iterator
- _It _M_finish_iterator

4.32.1 Detailed Description

template<typename _It, typename _It2, typename _Tp>struct __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >

std::inner_product() selector.

Definition at line 222 of file for_each_selectors.h.

4.32.2 Constructor & Destructor Documentation

4.32.2.1 template<typename _It , typename _It2 , typename _Tp > __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::__inner_product_selector (_It __b1, _It2 __b2) [inline], [explicit]

Constructor.

Parameters

__b1	Begin iterator of first sequence.
__b2	Begin iterator of second sequence.

Definition at line 234 of file for_each_selectors.h.

4.32.3 Member Function Documentation

4.32.3.1 template<typename _It , typename _It2 , typename _Tp > template<typename _Op > _Tp __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::operator() (_Op *__mult,* _It *__current*) [inline]

Functor execution.

Parameters

__mult	Multiplication functor.
__current	iterator referencing object.

Returns

Inner product elemental __result.

Definition at line 243 of file for_each_selectors.h.

References __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::__begin1_iterator, and __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::__begin2_iterator.

4.32.4 Member Data Documentation

4.32.4.1 template<typename _It , typename _It2 , typename _Tp > _It __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::__begin1_iterator

Begin iterator of first sequence.

Definition at line 225 of file for_each_selectors.h.

Referenced by __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::operator()().

4.32.4.2 template<typename _It , typename _It2 , typename _Tp > _It2 __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::__begin2_iterator

Begin iterator of second sequence.

Definition at line 228 of file for_each_selectors.h.

Referenced by __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >::operator()().

4.32.4.3 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.33 std::__is_location_invariant< _Tp > Struct Template Reference

Inheritance diagram for std::__is_location_invariant< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.33.1 Detailed Description

template<typename _Tp>struct std::__is_location_invariant< _Tp >

Trait identifying "location-invariant" types, meaning that the address of the object (or any of its members) will not escape. Trivially copyable types are location-invariant and users can specialize this trait for other types.

Definition at line 71 of file std_function.h.

The documentation for this struct was generated from the following file:

- std_function.h

4.34 std::__is_nullptr_t< _Tp > Struct Template Reference

Inheritance diagram for std::__is_nullptr_t< _Tp >:



4.34.1 Detailed Description

template<typename _Tp>struct std::__is_nullptr_t< _Tp >

__is_nullptr_t (deprecated extension).

Definition at line 519 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.35 std::__is_tuple_like_impl< std::pair< _T1, _T2 > > Struct Template Reference

Inheritance diagram for std::__is_tuple_like_impl< std::pair< _T1, _T2 > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.35.1 Detailed Description

template<typename _T1, typename _T2>struct std::__is_tuple_like_impl< std::pair< _T1, _T2 > >

Partial specialization for std::pair.

Definition at line 152 of file utility.

The documentation for this struct was generated from the following file:

- utility

4.36 __gnu_parallel::__max_element_reduct< _Compare, _It > Struct Template Reference

Public Member Functions

- **__max_element_reduct** (_Compare &__c)
- _It **operator()** (_It __x, _It __y)

Public Attributes

- _Compare & **__comp**

4.36.1 Detailed Description

template<typename _Compare, typename _It>struct __gnu_parallel::__max_element_reduct< _Compare, _It >

Reduction for finding the maximum element, using a comparator.

Definition at line 321 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.37 __gnu_parallel::__min_element_reduct< _Compare, _It > Struct Template Reference

Public Member Functions

- **__min_element_reduct** (_Compare &__c)
- _It **operator()** (_It __x, _It __y)

Public Attributes

- _Compare & **__comp**

4.37.1 Detailed Description

template<typename _Compare, typename _It>struct __gnu_parallel::__min_element_reduct< _Compare, _It >

Reduction for finding the maximum element, using a comparator.

Definition at line 307 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.38 __gnu_cxx::__detail::__mini_vector< _Tp > Class Template Reference

Public Types

- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef pointer **iterator**
- typedef _Tp * **pointer**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- reference **back** () const throw ()
- iterator **begin** () const throw ()
- void **clear** () throw ()
- iterator **end** () const throw ()
- void **erase** (iterator __pos) throw ()
- void **insert** (iterator __pos, const_reference __x)
- reference **operator[]** (const size_type __pos) const throw ()
- void **pop_back** () throw ()
- void **push_back** (const_reference __x)
- size_type **size** () const throw ()

4.38.1 Detailed Description

template<typename _Tp>class __gnu_cxx::__detail::__mini_vector< _Tp >

__mini_vector<> is a stripped down version of the full-fledged std::vector<>.

It is to be used only for built-in types or PODs. Notable differences are:

1. Not all accessor functions are present.
2. Used ONLY for PODs.
3. No Allocator template argument. Uses operator new() to get memory, and operator delete() to free it. Caveat: The dtor does NOT free the memory allocated, so this a memory-leaking vector!

Definition at line 67 of file bitmap_allocator.h.

The documentation for this class was generated from the following file:

- bitmap_allocator.h

4.39 __gnu_parallel::__mismatch_selector Struct Reference

Inheritance diagram for __gnu_parallel::__mismatch_selector:

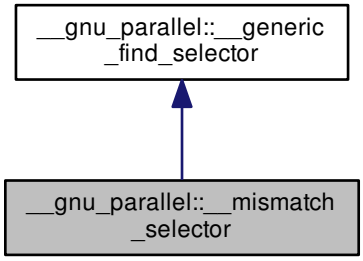

Public Member Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  std::pair< _RAIter1, _RAIter2 > _M_sequential_algorithm (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __-
  begin2, _Pred __pred)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred >
  bool operator() (_RAIter1 __i1, _RAIter2 __i2, _Pred __pred)

4.39.1 Detailed Description

Test inverted predicate on a single element.

Definition at line 119 of file find_selectors.h.

4.39.2 Member Function Documentation

4.39.2.1 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > std::pair<_RAIter1, _RAIter2> __gnu_parallel::__mismatch_selector::_M_sequential_algorithm (_RAIter1 *__begin1*, _RAIter1 *__end1*, _RAIter2 *__begin2*, _Pred *__pred*) [inline]

Corresponding sequential algorithm on a sequence.

Parameters

__begin1	Begin iterator of first sequence.
__end1	End iterator of first sequence.
__begin2	Begin iterator of second sequence.
__pred	Find predicate.

Definition at line 143 of file find_selectors.h.

4.39.2.2 template<typename _RAIter1 , typename _RAIter2 , typename _Pred > bool __gnu_parallel::__mismatch_selector::operator() (_RAIter1 *__i1*, _RAIter2 *__i2*, _Pred *__pred*) [inline]

Test on one position.

Parameters

__i1	_Iterator on first sequence.
__i2	_Iterator on second sequence (unused).
__pred	Find predicate.

Definition at line 130 of file find_selectors.h.

The documentation for this struct was generated from the following file:

- find_selectors.h

4.40 __gnu_cxx::__mt_alloc< _Tp, _Poolp > Class Template Reference

Inheritance diagram for __gnu_cxx::__mt_alloc< _Tp, _Poolp >:



Public Types

- typedef _Poolp **__policy_type**
- typedef _Poolp::pool_type **__pool_type**
- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **__mt_alloc** (const __mt_alloc &) noexcept
- template<typename _Tp1 , typename _Poolp1 >
  __mt_alloc (const __mt_alloc< _Tp1, _Poolp1 > &) noexcept
- const __pool_base::_Tune **_M_get_options** ()
- void **_M_set_options** (__pool_base::_Tune __t)
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *=0)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- template<typename _Up >
  void **destroy** (_Up *__p)
- size_type **max_size** () const noexcept

4.40.1 Detailed Description

template<typename _Tp, typename _Poolp = __common_pool_policy<__pool, true >>class __gnu_cxx::__mt_alloc< _Tp, _Poolp >

This is a fixed size (power of 2) allocator which - when compiled with thread support - will maintain one freelist per size per thread plus a *global* one. Steps are taken to limit the per thread freelist sizes (by returning excess back to the *global* list).

Further details: https://gcc.gnu.org/onlinedocs/libstdc++/manual/mt_allocator.html.

Definition at line 639 of file mt_allocator.h.

The documentation for this class was generated from the following file:

- mt_allocator.h

4.41 __gnu_cxx::__mt_alloc_base< _Tp > Class Template Reference

Inheritance diagram for __gnu_cxx::__mt_alloc_base< _Tp >:



Public Types

- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- template<typename _Up >
  void **destroy** (_Up *__p)
- size_type **max_size** () const noexcept

4.41.1 Detailed Description

template<typename _Tp>class __gnu_cxx::__mt_alloc_base< _Tp >

Base class for _Tp dependent member functions.

Definition at line 570 of file mt_allocator.h.

The documentation for this class was generated from the following file:

- mt_allocator.h

4.42 __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAIter3 **operator()** (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)

4.42.1 Detailed Description

template<bool __sentinels, typename _RAIterIterator, typename _RAIter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >

Switch for 3-way merging with __sentinels turned off.

Note that 3-way merging is always stable!

Definition at line 752 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.43 __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAIter3 **operator()** (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)

4.43.1 Detailed Description

template<typename _RAIterIterator, typename _RAIter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >

Switch for 3-way merging with __sentinels turned on.

Note that 3-way merging is always stable!

Definition at line 772 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.44 __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAIter3 **operator()** (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)

4.44.1 Detailed Description

template<bool __sentinels, typename _RAlterIterator, typename _RAlter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< __sentinels, _RAlterIterator, _RAlter3, _DifferenceTp, _Compare >

Switch for 4-way merging with __sentinels turned off.

Note that 4-way merging is always stable!

Definition at line 795 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.45 __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< true, _RAlterIterator, _RAlter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAlter3 **operator()** (_RAlterIterator __seqs_begin, _RAlterIterator __seqs_end, _RAlter3 __target, _DifferenceTp __length, _Compare __comp)

4.45.1 Detailed Description

template<typename _RAlterIterator, typename _RAlter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< true, _RAlterIterator, _RAlter3, _DifferenceTp, _Compare >

Switch for 4-way merging with __sentinels turned on.

Note that 4-way merging is always stable!

Definition at line 815 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.46 __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< __sentinels, __stable, _RAlterIterator, _RAlter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAlter3 **operator()** (_RAlterIterator __seqs_begin, _RAlterIterator __seqs_end, _RAlter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAlterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)

4.46.1 Detailed Description

template<bool __sentinels, bool __stable, typename _RAlterIterator, typename _RAlter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< __sentinels, __stable, _RAlterIterator, _RAlter3, _DifferenceTp, _Compare >

Switch for k-way merging with __sentinels turned on.

Definition at line 837 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.47 __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< false, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare > Struct Template Reference

Public Member Functions

- _RAIter3 **operator()** (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)

4.47.1 Detailed Description

template<bool __stable, typename _RAIterIterator, typename _RAIter3, typename _DifferenceTp, typename _Compare>struct __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< false, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >

Switch for k-way merging with __sentinels turned off.

Definition at line 872 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.48 std::__numeric_limits_base Struct Reference

Inheritance diagram for std::__numeric_limits_base:



Static Public Attributes

- static constexpr int digits
- static constexpr int digits10

- static constexpr float_denorm_style has_denorm
- static constexpr bool has_denorm_loss
- static constexpr bool has_infinity
- static constexpr bool has_quiet_NaN
- static constexpr bool has_signaling_NaN
- static constexpr bool is_bounded
- static constexpr bool is_exact
- static constexpr bool is_iec559
- static constexpr bool is_integer
- static constexpr bool is_modulo
- static constexpr bool is_signed
- static constexpr bool is_specialized
- static constexpr int max_digits10
- static constexpr int max_exponent
- static constexpr int max_exponent10
- static constexpr int min_exponent
- static constexpr int min_exponent10
- static constexpr int radix
- static constexpr float_round_style round_style
- static constexpr bool tinyness_before
- static constexpr bool traps

4.48.1 Detailed Description

Part of std::numeric_limits.

The `static const` members are usable as integral constant expressions.

Note

This is a separate class for purposes of efficiency; you should only access these members as part of an instantiation of the std::numeric_limits class.

Definition at line 202 of file limits.

4.48.2 Member Data Documentation

4.48.2.1 constexpr int std::__numeric_limits_base::digits [static]

The number of `radix` digits that be represented without change: for integer types, the number of non-sign bits in the mantissa; for floating types, the number of `radix` digits in the mantissa.

Definition at line 211 of file limits.

4.48.2.2 constexpr int std::__numeric_limits_base::digits10 [static]

The number of base 10 digits that can be represented without change.

Definition at line 214 of file limits.

4.48.2.3 constexpr float_denorm_style std::__numeric_limits_base::has_denorm [static]

See std::float_denorm_style for more information.

Definition at line 266 of file limits.

4.48.2.4 constexpr bool std::__numeric_limits_base::has_denorm_loss [static]

True if loss of accuracy is detected as a denormalization loss, rather than as an inexact result.

Definition at line 270 of file limits.

4.48.2.5 constexpr bool std::__numeric_limits_base::has_infinity [static]

True if the type has a representation for positive infinity.

Definition at line 255 of file limits.

4.48.2.6 constexpr bool std::__numeric_limits_base::has_quiet_NaN [static]

True if the type has a representation for a quiet (non-signaling) Not a Number.

Definition at line 259 of file limits.

4.48.2.7 constexpr bool std::__numeric_limits_base::has_signaling_NaN [static]

True if the type has a representation for a signaling Not a Number.

Definition at line 263 of file limits.

4.48.2.8 constexpr bool std::__numeric_limits_base::is_bounded [static]

True if the set of values representable by the type is finite. All built-in types are bounded, this member would be false for arbitrary precision types.

Definition at line 279 of file limits.

4.48.2.9 constexpr bool std::__numeric_limits_base::is_exact [static]

True if the type uses an exact representation. All integer types are exact, but not all exact types are integer. For example, rational and fixed-exponent representations are exact but not integer.

Definition at line 231 of file limits.

4.48.2.10 constexpr bool std::__numeric_limits_base::is_iec559 [static]

True if-and-only-if the type adheres to the IEC 559 standard, also known as IEEE 754. (Only makes sense for floating point types.)

Definition at line 274 of file limits.

4.48.2.11 constexpr bool std::__numeric_limits_base::is_integer [static]

True if the type is integer.

Definition at line 226 of file limits.

4.48.2.12 constexpr bool std::__numeric_limits_base::is_modulo [static]

True if the type is *modulo*. A type is modulo if, for any operation involving +, -, or $*$ on values of that type whose result would fall outside the range [min(),max()], the value returned differs from the true value by an integer multiple of max() - min() + 1. On most machines, this is false for floating types, true for unsigned integers, and true for signed integers. See PR22200 about signed integers.

Definition at line 288 of file limits.

4.48.2.13 constexpr bool std::__numeric_limits_base::is_signed [static]

True if the type is signed.

Definition at line 223 of file limits.

4.48.2.14 constexpr bool std::__numeric_limits_base::is_specialized [static]

This will be true for all fundamental types (which have specializations), and false for everything else.

Definition at line 206 of file limits.

4.48.2.15 constexpr int std::__numeric_limits_base::max_digits10 [static]

The number of base 10 digits required to ensure that values which differ are always differentiated.

Definition at line 219 of file limits.

4.48.2.16 constexpr int std::__numeric_limits_base::max_exponent [static]

The maximum positive integer such that `radix` raised to the power of (one less than that integer) is a representable finite floating point number.

Definition at line 248 of file limits.

4.48.2.17 constexpr int std::__numeric_limits_base::max_exponent10 [static]

The maximum positive integer such that 10 raised to that power is in the range of representable finite floating point numbers.

Definition at line 252 of file limits.

4.48.2.18 constexpr int std::__numeric_limits_base::min_exponent [static]

The minimum negative integer such that `radix` raised to the power of (one less than that integer) is a normalized floating point number.

Definition at line 239 of file limits.

4.48.2.19 constexpr int std::__numeric_limits_base::min_exponent10 [static]

The minimum negative integer such that 10 raised to that power is in the range of normalized floating point numbers.

Definition at line 243 of file limits.

4.48.2.20 constexpr int std::__numeric_limits_base::radix [static]

For integer types, specifies the base of the representation. For floating types, specifies the base of the exponent representation.

Definition at line 235 of file limits.

4.48.2.21 constexpr float_round_style std::__numeric_limits_base::round_style [static]

See std::float_round_style for more information. This is only meaningful for floating types; integer types will all be round_toward_zero.

Definition at line 299 of file limits.

4.48.2.22 constexpr bool std::__numeric_limits_base::tinyness_before [static]

True if tininess is detected before rounding. (see IEC 559)

Definition at line 294 of file limits.

4.48.2.23 constexpr bool std::__numeric_limits_base::traps [static]

True if trapping is implemented for this type.

Definition at line 291 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.49 __gnu_cxx::__per_type_pool_policy< _Tp, _PoolTp, _Thread > Struct Template Reference

Inherits __gnu_cxx::__per_type_pool_base< _Tp, _PoolTp, _Thread >.

4.49.1 Detailed Description

template<typename _Tp, template< bool > class _PoolTp, bool _Thread>struct __gnu_cxx::__per_type_pool_policy< _Tp, _PoolTp, _Thread >

Policy for individual __pool objects.

Definition at line 555 of file mt_allocator.h.

The documentation for this struct was generated from the following file:

- mt_allocator.h

4.50 __gnu_cxx::__pool< _Thread > Class Template Reference

4.50.1 Detailed Description

template<bool _Thread>class __gnu_cxx::__pool< _Thread >

Data describing the underlying memory pool, parameterized on threading support.

Definition at line 191 of file mt_allocator.h.

The documentation for this class was generated from the following file:

- mt_allocator.h

4.51 __gnu_cxx::__pool< false > Class Template Reference

Inheritance diagram for __gnu_cxx::__pool< false >:



Public Types

- typedef unsigned short int **_Binmap_type**
- typedef std::size_t **size_t**

Public Member Functions

- **__pool** (const __pool_base::_Tune &__tune)
- void **_M_adjust_freelist** (const _Bin_record &, _Block_record *, size_t)
- bool **_M_check_threshold** (size_t __bytes)
- void **_M_destroy** () throw ()
- size_t **_M_get_align** ()
- const _Bin_record & **_M_get_bin** (size_t __which)
- size_t **_M_get_binmap** (size_t __bytes)
- const _Tune & **_M_get_options** () const
- size_t **_M_get_thread_id** ()
- void **_M_initialize_once** ()
- void **_M_reclaim_block** (char *__p, size_t __bytes) throw ()
- char * **_M_reserve_block** (size_t __bytes, const size_t __thread_id)
- void **_M_set_options** (_Tune __t)

Protected Attributes

- _Binmap_type * **_M_binmap**
- bool **_M_init**
- _Tune **_M_options**

4.51.1 Detailed Description

template<>class __gnu_cxx::__pool< false >

Specialization for single thread.

Definition at line 195 of file mt_allocator.h.

The documentation for this class was generated from the following file:

- mt_allocator.h

4.52 __gnu_cxx::__pool< true > Class Template Reference

Inheritance diagram for __gnu_cxx::__pool< true >:



Public Types

- typedef unsigned short int **_Binmap_type**
- typedef std::size_t **size_t**

Public Member Functions

- **__pool** (const __pool_base::_Tune &__tune)
- void **_M_adjust_freelist** (const _Bin_record &__bin, _Block_record *__block, size_t __thread_id)
- bool **_M_check_threshold** (size_t __bytes)
- void **_M_destroy** () throw ()
- void **_M_destroy_thread_key** (void *) throw ()
- size_t **_M_get_align** ()
- const _Bin_record & **_M_get_bin** (size_t __which)
- size_t **_M_get_binmap** (size_t __bytes)
- const _Tune & **_M_get_options** () const
- size_t **_M_get_thread_id** ()
- void **_M_initialize** (__destroy_handler)
- void **_M_initialize_once** ()
- void **_M_reclaim_block** (char *__p, size_t __bytes) throw ()

- char * **_M_reserve_block** (size_t __bytes, const size_t __thread_id)
- void **_M_set_options** (_Tune __t)

Protected Attributes

- _Binmap_type * **_M_binmap**
- bool **_M_init**
- _Tune **_M_options**

4.52.1 Detailed Description

template<>class __gnu_cxx::__pool< true >

Specialization for thread enabled, via gthreads.h.

Definition at line 262 of file mt_allocator.h.

The documentation for this class was generated from the following file:

- mt_allocator.h

4.53 __gnu_cxx::__pool_alloc< _Tp > Class Template Reference

Inheritance diagram for __gnu_cxx::__pool_alloc< _Tp >:

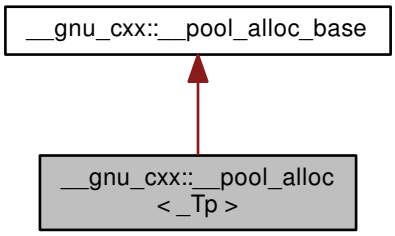

Public Types

- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **__pool_alloc** (const __pool_alloc &) noexcept
- template<typename _Tp1 >
  __pool_alloc (const __pool_alloc< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *=0)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- template<typename _Up >
  void **destroy** (_Up *__p)
- size_type **max_size** () const noexcept

Private Types

- enum { **_S_align** }
- enum { **_S_max_bytes** }
- enum { **_S_free_list_size** }

Private Member Functions

- char * **_M_allocate_chunk** (size_t __n, int &__nobjs)
- _Obj *volatile * **_M_get_free_list** (size_t __bytes) throw ()
- __mutex & **_M_get_mutex** () throw ()
- void * **_M_refill** (size_t __n)
- size_t **_M_round_up** (size_t __bytes)

Static Private Attributes

- static char * **_S_end_free**
- static _Obj *volatile **_S_free_list** [_S_free_list_size]
- static size_t **_S_heap_size**
- static char * **_S_start_free**

4.53.1 Detailed Description

template<typename _Tp>class __gnu_cxx::__pool_alloc< _Tp >

Allocator using a memory pool with a single lock.

Definition at line 124 of file pool_allocator.h.

The documentation for this class was generated from the following file:

- pool_allocator.h

4.54 __gnu_cxx::__pool_alloc_base Class Reference

Inheritance diagram for __gnu_cxx::__pool_alloc_base:

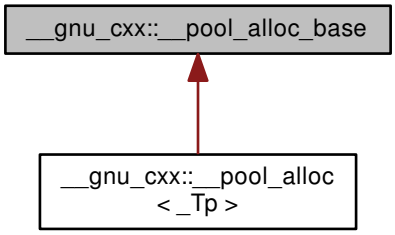

Protected Types

- enum { **_S_align** }
- enum { **_S_max_bytes** }
- enum { **_S_free_list_size** }

Protected Member Functions

- char * **_M_allocate_chunk** (size_t __n, int &__nobjs)
- _Obj *volatile * **_M_get_free_list** (size_t __bytes) throw ()
- __mutex & **_M_get_mutex** () throw ()
- void * **_M_refill** (size_t __n)
- size_t **_M_round_up** (size_t __bytes)

Static Protected Attributes

- static char * **_S_end_free**
- static _Obj *volatile **_S_free_list** [_S_free_list_size]
- static size_t **_S_heap_size**
- static char * **_S_start_free**

4.54.1 Detailed Description

Base class for __pool_alloc.

Uses various allocators to fulfill underlying requests (and makes as few requests as possible when in default high-speed pool mode).

Important implementation properties: 0. If globally mandated, then allocate objects from new

1. If the clients request an object of size > _S_max_bytes, the resulting object will be obtained directly from new

2. In all other cases, we allocate an object of size exactly _S_round_up(requested_size). Thus the client has enough size information that we can return the object to the proper free list without permanently losing part of the object.

Definition at line 75 of file pool_allocator.h.

The documentation for this class was generated from the following file:

- pool_allocator.h

4.55 __gnu_cxx::__pool_base Struct Reference

Inheritance diagram for __gnu_cxx::__pool_base:

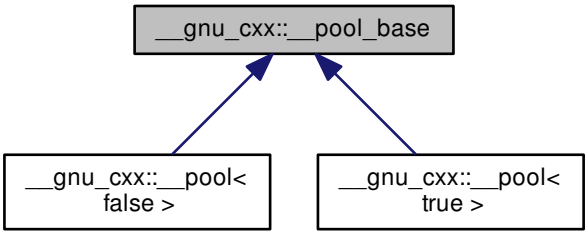

Public Types

- typedef unsigned short int **_Binmap_type**
- typedef std::size_t **size_t**

Public Member Functions

- **__pool_base** (const _Tune &__options)
- bool **_M_check_threshold** (size_t __bytes)
- size_t **_M_get_align** ()
- size_t **_M_get_binmap** (size_t __bytes)
- const _Tune & **_M_get_options** () const
- void **_M_set_options** (_Tune __t)

Protected Attributes

- _Binmap_type * **_M_binmap**
- bool **_M_init**
- _Tune **_M_options**

4.55.1 Detailed Description

Base class for pool object.

Definition at line 49 of file mt_allocator.h.

The documentation for this struct was generated from the following file:

- mt_allocator.h

4.56 __gnu_cxx::__rc_string_base< _CharT, _Traits, _Alloc > Class Template Reference

Inherits __gnu_cxx::__vstring_utility< _CharT, _Traits, _Alloc >.

Public Types

- typedef _Util_Base::_CharT_alloc_type **_CharT_alloc_type**
- typedef __vstring_utility < _CharT, _Traits, _Alloc > **_Util_Base**
- typedef _Alloc **allocator_type**
- typedef _CharT_alloc_type::size_type **size_type**
- typedef _Traits **traits_type**
- typedef _Traits::char_type **value_type**

Public Member Functions

- **__rc_string_base** (const _Alloc &__a)
- **__rc_string_base** (const __rc_string_base &__rcs)
- **__rc_string_base** (__rc_string_base &&__rcs)
- **__rc_string_base** (size_type __n, _CharT __c, const _Alloc &__a)
- template<typename _InputIterator > **__rc_string_base** (_InputIterator __beg, _InputIterator __end, const _Alloc &__a)
- void **_M_assign** (const __rc_string_base &__rcs)
- size_type **_M_capacity** () const
- void **_M_clear** ()
- bool **_M_compare** (const __rc_string_base &) const
- template<> bool **_M_compare** (const __rc_string_base &__rcs) const
- template<> bool **_M_compare** (const __rc_string_base &__rcs) const
- _CharT * **_M_data** () const
- void **_M_erase** (size_type __pos, size_type __n)
- allocator_type & **_M_get_allocator** ()
- const allocator_type & **_M_get_allocator** () const
- bool **_M_is_shared** () const
- void **_M_leak** ()
- size_type **_M_length** () const
- size_type **_M_max_size** () const
- void **_M_mutate** (size_type __pos, size_type __len1, const _CharT *__s, size_type __len2)

- void **_M_reserve** (size_type __res)
- void **_M_set_leaked** ()
- void **_M_set_length** (size_type __n)
- void **_M_swap** (__rc_string_base &__rcs)
- template<typename _InIterator >
  _CharT * **_S_construct** (_InIterator __beg, _InIterator __end, const _Alloc &__a, std::forward_iterator_tag)

Protected Types

- typedef
  __gnu_cxx::__normal_iterator
  < const_pointer,
  __gnu_cxx::__versa_string
  < _CharT, _Traits, _Alloc,
  __rc_string_base > > **__const_rc_iterator**
- typedef
  __gnu_cxx::__normal_iterator
  < const_pointer,
  __gnu_cxx::__versa_string
  < _CharT, _Traits, _Alloc,
  __sso_string_base > > **__const_sso_iterator**
- typedef
  __gnu_cxx::__normal_iterator
  < pointer,
  __gnu_cxx::__versa_string
  < _CharT, _Traits, _Alloc,
  __rc_string_base > > **__rc_iterator**
- typedef
  __gnu_cxx::__normal_iterator
  < pointer,
  __gnu_cxx::__versa_string
  < _CharT, _Traits, _Alloc,
  __sso_string_base > > **__sso_iterator**
- typedef __alloc_traits
  < _CharT_alloc_type > **_CharT_alloc_traits**
- typedef
  _CharT_alloc_traits::const_pointer **const_pointer**
- typedef
  _CharT_alloc_type::difference_type **difference_type**
- typedef
  _CharT_alloc_traits::pointer **pointer**

Static Protected Member Functions

- static void **_S_assign** (_CharT *__d, size_type __n, _CharT __c)
- static int **_S_compare** (size_type __n1, size_type __n2)
- static void **_S_copy** (_CharT *__d, const _CharT *__s, size_type __n)
- template<typename _Iterator >
  static void **_S_copy_chars** (_CharT *__p, _Iterator __k1, _Iterator __k2)
- static void **_S_copy_chars** (_CharT *__p, __sso_iterator __k1, __sso_iterator __k2)
- static void **_S_copy_chars** (_CharT *__p, __const_sso_iterator __k1, __const_sso_iterator __k2)
- static void **_S_copy_chars** (_CharT *__p, __rc_iterator __k1, __rc_iterator __k2)

- static void **_S_copy_chars** (_CharT *__p, __const_rc_iterator __k1, __const_rc_iterator __k2)
- static void **_S_copy_chars** (_CharT *__p, _CharT *__k1, _CharT *__k2)
- static void **_S_copy_chars** (_CharT *__p, const _CharT *__k1, const _CharT *__k2)
- static void **_S_move** (_CharT *__d, const _CharT *__s, size_type __n)

4.56.1 Detailed Description

template<typename _CharT, typename _Traits, typename _Alloc>class __gnu_cxx::__rc_string_base< _CharT, _Traits, _Alloc >

Documentation? What's that? Nathan Myers ncm@cantrip.org.

A string looks like this:

```
                                    [_Rep]
                                    _M_length
[__rc_string_base<char_type>]       _M_capacity
_M_dataplus                         _M_refcount
_M_p ---------------->              unnamed array of char_type
```

Where the _M_p points to the first character in the string, and you cast it to a pointer-to-_Rep and subtract 1 to get a pointer to the header.

This approach has the enormous advantage that a string object requires only one allocation. All the ugliness is confined within a single pair of inline functions, which each compile to a single *add* instruction: _Rep::_M_refdata(), and __rc_string_base::_M_rep(); and the allocation function which gets a block of raw bytes and with room enough and constructs a _Rep object at the front.

The reason you want _M_data pointing to the character array and not the _Rep is so that the debugger can see the string contents. (Probably we should add a non-inline member to get the _Rep for the debugger to use, so users can check the actual string length.)

Note that the _Rep object is a POD so that you can have a static *empty string* _Rep object already *constructed* before static constructors have run. The reference-count encoding is chosen so that a 0 indicates one reference, so you never try to destroy the empty-string _Rep object.

All but the last paragraph is considered pretty conventional for a C++ string implementation.

Definition at line 83 of file rc_string_base.h.

The documentation for this class was generated from the following file:

- rc_string_base.h

4.57 std::tr2::__reflection_typelist< _Elements > Struct Template Reference

4.57.1 Detailed Description

template<typename... _Elements>struct std::tr2::__reflection_typelist< _Elements >

See N2965: Type traits and base classes by Michael Spertus Simple typelist. Compile-time list of types.

Definition at line 56 of file tr2/type_traits.

The documentation for this struct was generated from the following file:

- tr2/type_traits

4.58 std::tr2::__reflection_typelist< _First, _Rest...> Struct Template Reference

Public Types

- typedef std::false_type **empty**

4.58.1 Detailed Description

template<typename _First, typename... _Rest>struct std::tr2::__reflection_typelist< _First, _Rest...>

Partial specialization.

Definition at line 67 of file tr2/type_traits.

The documentation for this struct was generated from the following file:

- tr2/type_traits

4.59 std::tr2::__reflection_typelist<> Struct Template Reference

Public Types

- typedef std::true_type **empty**

4.59.1 Detailed Description

template<>struct std::tr2::__reflection_typelist<>

Specialization for an empty typelist.

Definition at line 60 of file tr2/type_traits.

The documentation for this struct was generated from the following file:

- tr2/type_traits

4.60 __gnu_parallel::__replace_if_selector< _It, _Op, _Tp > Struct Template Reference

Inheritance diagram for __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >:

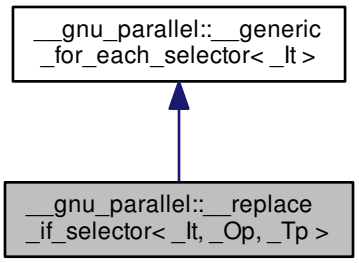

Public Member Functions

- __replace_if_selector (const _Tp &__new_val)
- bool operator() (_Op &__o, _It __i)

Public Attributes

- const _Tp & __new_val
- _It _M_finish_iterator

4.60.1 Detailed Description

template<typename _It, typename _Op, typename _Tp>struct __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >

std::replace() selector.

Definition at line 156 of file for_each_selectors.h.

4.60.2 Constructor & Destructor Documentation

4.60.2.1 template<typename _It , typename _Op , typename _Tp > __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >::__replace_if_selector (const _Tp & *__new_val*) [inline], [explicit]

Constructor.

Parameters

__new_val	Value to replace with.

Definition at line 164 of file for_each_selectors.h.

4.60.3 Member Function Documentation

4.60.3.1 template<typename _It , typename _Op , typename _Tp > bool __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >::operator() (_Op & *__o,* _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Definition at line 170 of file for_each_selectors.h.

References __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >::__new_val.

4.60.4 Member Data Documentation

4.60.4.1 template<typename _It , typename _Op , typename _Tp > const _Tp& __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >::__new_val

Value to replace with.

Definition at line 159 of file for_each_selectors.h.

Referenced by __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >::operator()().

4.60.4.2 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.61 __gnu_parallel::__replace_selector< _It, _Tp > Struct Template Reference

Inheritance diagram for __gnu_parallel::__replace_selector< _It, _Tp >:



Public Member Functions

- __replace_selector (const _Tp &__new_val)
- bool operator() (_Tp &__v, _It __i)

Public Attributes

- const _Tp & __new_val
- _It _M_finish_iterator

4.61.1 Detailed Description

template<typename _It, typename _Tp>struct __gnu_parallel::__replace_selector< _It, _Tp >

std::replace() selector.

Definition at line 132 of file for_each_selectors.h.

4.61.2 Constructor & Destructor Documentation

4.61.2.1 template<typename _It , typename _Tp > __gnu_parallel::__replace_selector< _It, _Tp >::__replace_selector (const _Tp & *__new_val*) [inline], [explicit]

Constructor.

Parameters

__new_val	Value to replace with.

Definition at line 140 of file for_each_selectors.h.

4.61.3 Member Function Documentation

4.61.3.1 template<typename _It , typename _Tp > bool __gnu_parallel::__replace_selector< _It, _Tp >::operator() (_Tp & *__v*, _It *__i*) [inline]

Functor execution.

Parameters

__v	Current value.
__i	iterator referencing object.

Definition at line 146 of file for_each_selectors.h.

References __gnu_parallel::__replace_selector< _It, _Tp >::__new_val.

4.61.4 Member Data Documentation

4.61.4.1 template<typename _It , typename _Tp > const _Tp& __gnu_parallel::__replace_selector< _It, _Tp >::__new_val

Value to replace with.

Definition at line 135 of file for_each_selectors.h.

Referenced by __gnu_parallel::__replace_selector< _It, _Tp >::operator()().

4.61.4.2 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.62 __gnu_cxx::__scoped_lock Class Reference

Public Types

- typedef __mutex **__mutex_type**

Public Member Functions

- **__scoped_lock** (__mutex_type &__name)

4.62.1 Detailed Description

Scoped lock idiom.

Definition at line 228 of file concurrence.h.

The documentation for this class was generated from the following file:

- concurrence.h

4.63 __gnu_parallel::__transform1_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__transform1_selector< _It >:

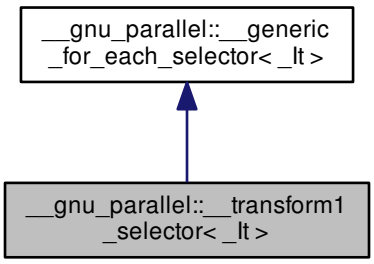

Public Member Functions

- template<typename _Op >
  bool operator() (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.63.1 Detailed Description

template<typename _It>struct __gnu_parallel::__transform1_selector< _It >

std::transform() __selector, one input sequence variant.

Definition at line 100 of file for_each_selectors.h.

4.63.2 Member Function Documentation

4.63.2.1 template<typename _It> template<typename _Op > bool __gnu_parallel::__transform1_selector< _It >::operator() (_Op & *__o*, _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Definition at line 107 of file for_each_selectors.h.

4.63.3 Member Data Documentation

4.63.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.64 __gnu_parallel::__transform2_selector< _It > Struct Template Reference

Inheritance diagram for __gnu_parallel::__transform2_selector< _It >:

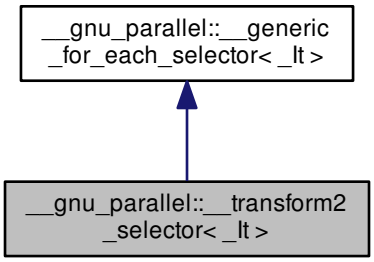

Public Member Functions

- template<typename _Op >
  bool operator() (_Op &__o, _It __i)

Public Attributes

- _It _M_finish_iterator

4.64.1 Detailed Description

template<typename _It>struct __gnu_parallel::__transform2_selector< _It >

std::transform() __selector, two input sequences variant.

Definition at line 116 of file for_each_selectors.h.

4.64.2 Member Function Documentation

4.64.2.1 template<typename _It> template<typename _Op > bool __gnu_parallel::__transform2_selector< _It >::operator() (_Op & *__o*, _It *__i*) [inline]

Functor execution.

Parameters

__o	Operator.
__i	iterator referencing object.

Definition at line 123 of file for_each_selectors.h.

4.64.3 Member Data Documentation

4.64.3.1 template<typename _It > _It __gnu_parallel::__generic_for_each_selector< _It >::_M_finish_iterator [inherited]

_Iterator on last element processed; needed for some algorithms (e. g. std::transform()).

Definition at line 47 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.65 __gnu_parallel::__unary_negate< _Predicate, argument_type > Class Template Reference

Inheritance diagram for __gnu_parallel::__unary_negate< _Predicate, argument_type >:

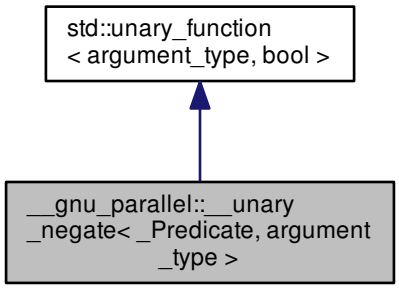

Public Types

- typedef argument_type argument_type
- typedef bool result_type

Public Member Functions

- **__unary_negate** (const _Predicate &__x)
- bool **operator()** (const argument_type &__x)

Protected Attributes

- _Predicate **_M_pred**

4.65.1 Detailed Description

template<typename _Predicate, typename argument_type>class __gnu_parallel::__unary_negate< _Predicate, argument_type >

Similar to std::unary_negate, but giving the argument types explicitly.

Definition at line 173 of file base.h.

4.65.2 Member Typedef Documentation

4.65.2.1 typedef argument_type std::unary_function< argument_type , bool >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.65.2.2 typedef bool std::unary_function< argument_type , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- base.h

4.66 __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > Class Template Reference

Inherits _Base< _CharT, _Traits, _Alloc >.

Public Types

- typedef _Alloc **allocator_type**
- typedef __gnu_cxx::__normal_iterator < const_pointer, __versa_string > **const_iterator**
- typedef _CharT_alloc_traits::const_pointer **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _CharT_alloc_type::difference_type **difference_type**
- typedef __gnu_cxx::__normal_iterator < pointer, __versa_string > **iterator**
- typedef _CharT_alloc_traits::pointer **pointer**
- typedef value_type & **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _CharT_alloc_type::size_type **size_type**
- typedef _Traits **traits_type**
- typedef _Traits::char_type **value_type**

Public Member Functions

- __versa_string (const _Alloc &__a=_Alloc()) noexcept
- __versa_string (const __versa_string &__str)
- __versa_string (__versa_string &&__str) noexcept
- __versa_string (std::initializer_list< _CharT > __l, const _Alloc &__a=_Alloc())
- __versa_string (const __versa_string &__str, size_type __pos, size_type __n=npos)
- __versa_string (const __versa_string &__str, size_type __pos, size_type __n, const _Alloc &__a)
- __versa_string (const _CharT *__s, size_type __n, const _Alloc &__a=_Alloc())
- __versa_string (const _CharT *__s, const _Alloc &__a=_Alloc())
- __versa_string (size_type __n, _CharT __c, const _Alloc &__a=_Alloc())
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  __versa_string (_InputIterator __beg, _InputIterator __end, const _Alloc &__a=_Alloc())
- ~__versa_string () noexcept
- template<typename _InputIterator >
  __versa_string< _CharT,
  _Traits, _Alloc, _Base > & **_M_replace_dispatch** (const_iterator __i1, const_iterator __i2, _InputIterator __k1, _InputIterator __k2, std::__false_type)
- __versa_string & append (const __versa_string &__str)
- __versa_string & append (const __versa_string &__str, size_type __pos, size_type __n)
- __versa_string & append (const _CharT *__s, size_type __n)
- __versa_string & append (const _CharT *__s)
- __versa_string & append (size_type __n, _CharT __c)
- __versa_string & append (std::initializer_list< _CharT > __l)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  __versa_string & append (_InputIterator __first, _InputIterator __last)
- __versa_string & assign (const __versa_string &__str)
- __versa_string & assign (__versa_string &&__str) noexcept
- __versa_string & assign (const __versa_string &__str, size_type __pos, size_type __n)
- __versa_string & assign (const _CharT *__s, size_type __n)
- __versa_string & assign (const _CharT *__s)
- __versa_string & assign (size_type __n, _CharT __c)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  __versa_string & assign (_InputIterator __first, _InputIterator __last)
- __versa_string & assign (std::initializer_list< _CharT > __l)
- const_reference at (size_type __n) const
- reference at (size_type __n)
- reference back () noexcept
- const_reference back () const noexcept
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const _CharT * c_str () const noexcept
- size_type capacity () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- int compare (const __versa_string &__str) const
- int compare (size_type __pos, size_type __n, const __versa_string &__str) const
- int compare (size_type __pos1, size_type __n1, const __versa_string &__str, size_type __pos2, size_type __n2) const
- int compare (const _CharT *__s) const

- int compare (size_type __pos, size_type __n1, const _CharT *__s) const
- int compare (size_type __pos, size_type __n1, const _CharT *__s, size_type __n2) const
- size_type copy (_CharT *__s, size_type __n, size_type __pos=0) const
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- const _CharT * data () const noexcept
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- __versa_string & erase (size_type __pos=0, size_type __n=npos)
- iterator erase (const_iterator __position)
- iterator erase (const_iterator __first, const_iterator __last)
- size_type find (const _CharT *__s, size_type __pos, size_type __n) const
- size_type find (const __versa_string &__str, size_type __pos=0) const noexcept
- size_type find (const _CharT *__s, size_type __pos=0) const
- size_type find (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_not_of (const __versa_string &__str, size_type __pos=0) const noexcept
- size_type find_first_not_of (const _CharT *__s, size_type __pos, size_type __n) const
- size_type find_first_not_of (const _CharT *__s, size_type __pos=0) const
- size_type find_first_not_of (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_of (const __versa_string &__str, size_type __pos=0) const noexcept
- size_type find_first_of (const _CharT *__s, size_type __pos, size_type __n) const
- size_type find_first_of (const _CharT *__s, size_type __pos=0) const
- size_type find_first_of (_CharT __c, size_type __pos=0) const noexcept
- size_type find_last_not_of (const __versa_string &__str, size_type __pos=npos) const noexcept
- size_type find_last_not_of (const _CharT *__s, size_type __pos, size_type __n) const
- size_type find_last_not_of (const _CharT *__s, size_type __pos=npos) const
- size_type find_last_not_of (_CharT __c, size_type __pos=npos) const noexcept
- size_type find_last_of (const __versa_string &__str, size_type __pos=npos) const noexcept
- size_type find_last_of (const _CharT *__s, size_type __pos, size_type __n) const
- size_type find_last_of (const _CharT *__s, size_type __pos=npos) const
- size_type find_last_of (_CharT __c, size_type __pos=npos) const noexcept
- reference front () noexcept
- const_reference front () const noexcept
- allocator_type get_allocator () const noexcept
- iterator insert (const_iterator __p, size_type __n, _CharT __c)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator insert (const_iterator __p, _InputIterator __beg, _InputIterator __end)
- iterator insert (const_iterator __p, std::initializer_list< _CharT > __l)
- __versa_string & insert (size_type __pos1, const __versa_string &__str)
- __versa_string & insert (size_type __pos1, const __versa_string &__str, size_type __pos2, size_type __n)
- __versa_string & insert (size_type __pos, const _CharT *__s, size_type __n)
- __versa_string & insert (size_type __pos, const _CharT *__s)
- __versa_string & insert (size_type __pos, size_type __n, _CharT __c)
- iterator insert (const_iterator __p, _CharT __c)
- size_type length () const noexcept
- size_type max_size () const noexcept
- __versa_string & operator+= (const __versa_string &__str)
- __versa_string & operator+= (const _CharT *__s)
- __versa_string & operator+= (_CharT __c)
- __versa_string & operator+= (std::initializer_list< _CharT > __l)

- __versa_string & operator= (const __versa_string &__str)
- __versa_string & operator= (__versa_string &&__str) noexcept
- __versa_string & operator= (std::initializer_list< _CharT > __l)
- __versa_string & operator= (const _CharT *__s)
- __versa_string & operator= (_CharT __c)
- const_reference operator[] (size_type __pos) const noexcept
- reference operator[] (size_type __pos) noexcept
- void pop_back ()
- void push_back (_CharT __c)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- __versa_string & replace (size_type __pos, size_type __n, const __versa_string &__str)
- __versa_string & replace (size_type __pos1, size_type __n1, const __versa_string &__str, size_type __pos2, size_type __n2)
- __versa_string & replace (size_type __pos, size_type __n1, const _CharT *__s, size_type __n2)
- __versa_string & replace (size_type __pos, size_type __n1, const _CharT *__s)
- __versa_string & replace (size_type __pos, size_type __n1, size_type __n2, _CharT __c)
- __versa_string & replace (const_iterator __i1, const_iterator __i2, const __versa_string &__str)
- __versa_string & replace (const_iterator __i1, const_iterator __i2, const _CharT *__s, size_type __n)
- __versa_string & replace (const_iterator __i1, const_iterator __i2, const _CharT *__s)
- __versa_string & replace (const_iterator __i1, const_iterator __i2, size_type __n, _CharT __c)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  __versa_string & replace (const_iterator __i1, const_iterator __i2, _InputIterator __k1, _InputIterator __k2)
- __versa_string & **replace** (const_iterator __i1, const_iterator __i2, _CharT *__k1, _CharT *__k2)
- __versa_string & **replace** (const_iterator __i1, const_iterator __i2, const _CharT *__k1, const _CharT *__k2)
- __versa_string & **replace** (const_iterator __i1, const_iterator __i2, iterator __k1, iterator __k2)
- __versa_string & **replace** (const_iterator __i1, const_iterator __i2, const_iterator __k1, const_iterator __k2)
- __versa_string & replace (const_iterator __i1, const_iterator __i2, std::initializer_list< _CharT > __l)
- void reserve (size_type __res_arg=0)
- void resize (size_type __n, _CharT __c)
- void resize (size_type __n)
- size_type rfind (const __versa_string &__str, size_type __pos=npos) const noexcept
- size_type rfind (const _CharT *__s, size_type __pos, size_type __n) const
- size_type rfind (const _CharT *__s, size_type __pos=npos) const
- size_type rfind (_CharT __c, size_type __pos=npos) const noexcept
- void shrink_to_fit () noexcept
- size_type size () const noexcept
- __versa_string substr (size_type __pos=0, size_type __n=npos) const
- void swap (__versa_string &__s) noexcept

Static Public Attributes

- static const size_type npos

4.66.1 Detailed Description

template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base>class __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >

Template class __versa_string.

Data structure managing sequences of characters and character-like objects.

Definition at line 56 of file vstring.h.

4.66.2 Constructor & Destructor Documentation

4.66.2.1 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const _Alloc & *__a* = _Alloc()) [inline], [explicit], [noexcept]

Construct an empty string using allocator *a*.

Definition at line 138 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::substr().

4.66.2.2 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Construct string with copy of value of *__str*.

Parameters

__str	Source string.

Definition at line 146 of file vstring.h.

4.66.2.3 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (__versa_string< _CharT, _Traits, _Alloc, _Base > && *__str*) [inline], [noexcept]

String move constructor.

Parameters

__str	Source string.

The newly-constructed string contains the exact contents of *__str*. The contents of *__str* are a valid, but unspecified string.

Definition at line 158 of file vstring.h.

4.66.2.4 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (std::initializer_list< _CharT > *__l*, const _Alloc & *__a* = _Alloc()) [inline]

Construct string from an initializer list.

Parameters

__l	std::initializer_list of characters.
__a	Allocator to use (default is default allocator).

Definition at line 166 of file vstring.h.

4.66.2.5 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos*, size_type *__n* = npos) [inline]

Construct string as copy of a substring.

Parameters

__str	Source string.
__pos	Index of first character to copy from.
__n	Number of characters to copy (default remainder).

Definition at line 177 of file vstring.h.

4.66.2.6 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos*, size_type *__n*, const _Alloc & *__a*) [inline]

Construct string as copy of a substring.

Parameters

__str	Source string.
__pos	Index of first character to copy from.
__n	Number of characters to copy.
__a	Allocator to use.

Definition at line 192 of file vstring.h.

4.66.2.7 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const _CharT * *__s*, size_type *__n*, const _Alloc & *__a* = _Alloc()) [inline]

Construct string initialized by a character array.

Parameters

__s	Source character array.
__n	Number of characters to copy.
__a	Allocator to use (default is default allocator).

NB: *__s* must have at least *__n* characters, '\0' has no special meaning.

Definition at line 209 of file vstring.h.

4.66.2.8 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (const _CharT * *__s*, const _Alloc & *__a* = _Alloc()) [inline]

Construct string as copy of a C string.

Parameters

__s	Source C string.
__a	Allocator to use (default is default allocator).

Definition at line 218 of file vstring.h.

4.66.2.9 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (size_type *__n,* _CharT *__c,* const _Alloc & *__a* = _Alloc()) [inline]

Construct string as multiple characters.

Parameters

__n	Number of characters.
__c	Character to use.
__a	Allocator to use (default is default allocator).

Definition at line 228 of file vstring.h.

4.66.2.10 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string (_InputIterator *__beg,* _InputIterator *__end,* const _Alloc & *__a* = _Alloc()) [inline]

Construct string as copy of a range.

Parameters

__beg	Start of range.
__end	End of range.
__a	Allocator to use (default is default allocator).

Definition at line 243 of file vstring.h.

4.66.2.11 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::~__versa_string ( ) [inline], [noexcept]

Destroy the string instance.

Definition at line 250 of file vstring.h.

4.66.3 Member Function Documentation

4.66.3.1 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

Definition at line 693 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), std::getline(), __gnu_cxx::operator+(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+=().

4.66.3.2 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos*, size_type *__n*) [inline]

Append a substring.

Parameters

__str	The string to append.
__pos	Index of the first character of str to append.
__n	The number of characters to append.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *pos* is not a valid index.

This function appends *__n* characters from *__str* starting at *__pos* to this string. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is appended.

Definition at line 710 of file vstring.h.

4.66.3.3 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (const _CharT * *__s*, size_type *__n*) [inline]

Append a C substring.

Parameters

__s	The C string to append.
__n	The number of characters to append.

Returns

Reference to this string.

Definition at line 722 of file vstring.h.

4.66.3.4 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (const _CharT * *__s*) [inline]

Append a C string.

Parameters

__s	The C string to append.

Returns

Reference to this string.

Definition at line 735 of file vstring.h.

4.66.3.5 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (size_type *__n*, _CharT *__c*) [inline]

Append multiple characters.

Parameters

__n	The number of characters to append.
__c	The character to use.

Returns

Reference to this string.

Appends n copies of c to this string.

Definition at line 752 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.6 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (std::initializer_list< _CharT > *__l*) [inline]

Append an initializer_list of characters.

Parameters

__l	The initializer_list of characters to append.

Returns

Reference to this string.

Definition at line 762 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append().

4.66.3.7 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append (_InputIterator *__first*, _InputIterator *__last*) [inline]

Append a range of characters.

Parameters

__first	Iterator referencing the first character to append.
__last	Iterator marking the end of the range.

Returns

Reference to this string.

Appends characters in the range [first,last) to this string.

Definition at line 781 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.8 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

Definition at line 804 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator=().

4.66.3.9 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (__versa_string< _CharT, _Traits, _Alloc, _Base > && *__str*) [inline], [noexcept]

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

This function sets this string to the exact contents of *__str*. *__str* is a valid, but unspecified string.

Definition at line 820 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::swap().

4.66.3.10 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str,* size_type *__pos,* size_type *__n*) [inline]

Set value to a substring of a string.

Parameters

__str	The string to use.
__pos	Index of the first character of str.
__n	Number of characters to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *__pos* is not a valid index.

This function sets this string to the substring of *__str* consisting of *__n* characters at *__pos*. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is used.

Definition at line 841 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.11 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (const _CharT * *__s*, size_type *__n*) [inline]

Set value to a C substring.

Parameters

__s	The C string to use.
__n	Number of characters to use.

Returns

Reference to this string.

This function sets the value of this string to the first *__n* characters of *__s*. If *__n* is is larger than the number of available characters in *__s*, the remainder of *__s* is used.

Definition at line 858 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.12 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (const _CharT * *__s*) [inline]

Set value to contents of a C string.

Parameters

__s	The C string to use.

Returns

Reference to this string.

This function sets the value of this string to the value of *__s*. The data is copied, so there is no dependence on *__s* once the function returns.

Definition at line 874 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.13 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (size_type __n, _CharT __c) [inline]

Set value to multiple characters.

Parameters

__n	Length of the resulting string.
__c	The character to use.

Returns

Reference to this string.

This function sets the value of this string to *__n* copies of character *__c*.

Definition at line 891 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.14 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (_InputIterator __first, _InputIterator __last) [inline]

Set value to a range of characters.

Parameters

__first	Iterator referencing the first character to append.
__last	Iterator marking the end of the range.

Returns

Reference to this string.

Sets value of string to characters in the range [first,last).

Definition at line 910 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.15 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign (std::initializer_list< _CharT > __l) [inline]

Set value to an initializer_list of characters.

Parameters

__l	The initializer_list of characters to assign.

Returns

Reference to this string.

Definition at line 920 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign().

4.66.3.16 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::at (size_type __n) const [inline]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read-only (const) reference to the character.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails.

Definition at line 578 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.17 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::at (size_type __n) [inline]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read/write reference to the character.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails. Success results in unsharing the string.

Definition at line 600 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.18 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::back ( ) [inline], [noexcept]

Returns a read/write reference to the data at the last element of the string.

Definition at line 633 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[](), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.19 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::back ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the last element of the string.

Definition at line 641 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[](), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.20 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first character in the string. Unshares the string.

Definition at line 316 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::crend(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rend().

4.66.3.21 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first character in the string.

Definition at line 327 of file vstring.h.

4.66.3.22 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const _CharT* __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::c_str ( ) const [inline], [noexcept]

Return const pointer to null-terminated contents.

This is a handle to internal data. Do not modify or dire things may happen.

Definition at line 1648 of file vstring.h.

4.66.3.23 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::capacity ( ) const [inline], [noexcept]

Returns the total number of characters that the string can hold before needing to allocate more memory.

Definition at line 487 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::shrink_to_fit().

4.66.3.24 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first character in the string.

Definition at line 391 of file vstring.h.

4.66.3.25 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last character in the string.

Definition at line 399 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.26 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::clear ( ) [inline], [noexcept]

Erases the string, making it empty.

Definition at line 515 of file vstring.h.

4.66.3.27 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) const [inline]

Compare to a string.

Parameters

__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Returns an integer < 0 if this string is ordered before *__str*, 0 if their values are equivalent, or > 0 if this string is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of size() and str.size(). The function then compares the two strings by calling traits::compare(data(), str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 2074 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), std::min(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::operator<(), __gnu_cxx::operator<=(), __gnu_cxx::operator==(), __gnu_cxx::operator>(), and __gnu_cxx::operator>=().

4.66.3.28 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (size_type *__pos,* size_type *__n,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) const

Compare substring to a string.

Parameters

__pos	Index of first character of substring.

__n	Number of characters in substring.
__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n* characters starting at *__pos*. Returns an integer < 0 if the substring is ordered before *__str*, 0 if their values are equivalent, or > 0 if the substring is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and *__str.size()*. The function then compares the two strings by calling traits::compare(substring.data(),str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 460 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), std::min(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.29 template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (size_type *__pos1*, size_type *__n1*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos2*, size_type *__n2*) const

Compare substring to a substring.

Parameters

__pos1	Index of first character of substring.
__n1	Number of characters in substring.
__str	String to compare against.
__pos2	Index of first character of substring of str.
__n2	Number of characters in substring of str.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos1*. Form the substring of *__str* from the *__n2* characters starting at *__pos2*. Returns an integer < 0 if this substring is ordered before the substring of *__str*, 0 if their values are equivalent, or > 0 if this substring is ordered after the substring of *__str*. Determines the effective length rlen of the strings to compare as the smallest of the lengths of the substrings. The function then compares the two strings by calling traits::compare(substring.data(),str.substr(pos2,n2).data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 477 of file vstring.tcc.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), and std::min().

4.66.3.30 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (const _CharT * *__s*) const

Compare to a C string.

Parameters

__s	C string to compare against.

Returns

Integer < 0, 0, or > 0.

Returns an integer < 0 if this string is ordered before __s, 0 if their values are equivalent, or > 0 if this string is ordered after __s. Determines the effective length rlen of the strings to compare as the smallest of size() and the length of a string constructed from __s. The function then compares the two strings by calling traits::compare(data(),s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 496 of file vstring.tcc.

References std::min().

4.66.3.31 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (size_type __pos, size_type __n1, const _CharT * __s) const

Compare substring to a C string.

Parameters

__pos	Index of first character of substring.
__n1	Number of characters in substring.
__s	C string to compare against.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos*. Returns an integer < 0 if the substring is ordered before __s, 0 if their values are equivalent, or > 0 if the substring is ordered after __s. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and the length of a string constructed from __s. The function then compares the two string by calling traits::compare(substring.data(),s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 512 of file vstring.tcc.

References std::min().

4.66.3.32 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> int __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare (size_type __pos, size_type __n1, const _CharT * __s, size_type __n2) const

Compare substring against a character array.

Parameters

__pos	Index of first character of substring.
__n1	Number of characters in substring.
__s	character array to compare against.
__n2	Number of characters of s.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos*. Form a string from the first *__n2* characters of __s. Returns an integer < 0 if this substring is ordered before the string from __s, 0 if their values are equivalent, or > 0 if this substring is ordered after the string from __s. Determines the effective length rlen of the strings to compare

as the smallest of the length of the substring and *__n2*. The function then compares the two strings by calling traits-::compare(substring.data(),__s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

NB: __s must have at least n2 characters, *\0* has no special meaning.

Definition at line 529 of file vstring.tcc.

References std::min().

4.66.3.33 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::copy (_CharT * *__s*, size_type *__n*, size_type *__pos* = 0) const

Copy substring into C string.

Parameters

__s	C string to copy value into.
__n	Number of characters to copy.
__pos	Index of first character to copy.

Returns

Number of characters actually copied

Exceptions

std::out_of_range	If pos > size().

Copies up to *__n* characters starting at *__pos* into the C string *s*. If *__pos* is greater than size(), out_of_range is thrown.

Definition at line 255 of file vstring.tcc.

4.66.3.34 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last character in the string. Iteration is done in reverse element order.

Definition at line 408 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end().

4.66.3.35 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order.

Definition at line 417 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::begin().

4.66.3.36 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const _CharT* __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data ( ) const [inline], [noexcept]

Return const pointer to contents.

This is a handle to internal data. Do not modify or dire things may happen.

Definition at line 1658 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of(), and std::operator<<().

4.66.3.37 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> bool __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::empty ( ) const [inline], [noexcept]

Returns true if the string is empty. Equivalent to `*this == ""`.

Definition at line 523 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.38 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last character in the string. Unshares the string.

Definition at line 335 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::crbegin(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rbegin().

4.66.3.39 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last character in the string.

Definition at line 346 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.40 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::erase (size_type __pos = 0, size_type __n = npos) [inline]

Remove characters.

Parameters

__pos	Index of first character to remove (default 0).
__n	Number of characters to remove (default remainder).

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos* is beyond the end of this string.

Removes *__n* characters from this string starting at *__pos*. The length of the string is reduced by *__n*. If there are < *__n* characters to remove, the remainder of the string is truncated. If *__p* is beyond end of string, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1174 of file vstring.h.

Referenced by std::getline().

4.66.3.41 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::erase (const_iterator *__position*) [inline]

Remove one character.

Parameters

__position	Iterator referencing the character to remove.

Returns

iterator referencing same location after removal.

Removes the character at *__position* from this string. The value of the string doesn't change if an error is thrown.

Definition at line 1191 of file vstring.h.

4.66.3.42 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Remove a range of characters.

Parameters

__first	Iterator referencing the first character to remove.
__last	Iterator referencing the end of the range.

Returns

Iterator referencing location of first after removal.

Removes the characters in the range [first,last) from this string. The value of the string doesn't change if an error is thrown.

Definition at line 1216 of file vstring.h.

4.66.3.43 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find (const _CharT * *__s,* size_type *__pos,* size_type *__n*) const

Find position of a C substring.

Parameters

__s	C string to locate.
__pos	Index of character to search from.
__n	Number of characters from *__s* to search for.

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for the first *__n* characters in *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 270 of file vstring.tcc.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of().

4.66.3.44 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search from (default 0).

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1694 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.45 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find (const _CharT * *__s*, size_type *__pos* = 0) const [inline]

Find position of a C string.

Parameters

__s	C string to locate.
__pos	Index of character to search from (default 0).

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for the value of *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1709 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find().

4.66.3.46 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find (_CharT __c, size_type __pos = 0) const [noexcept]

Find position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 294 of file vstring.tcc.

4.66.3.47 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of (const __versa_string< _CharT, _Traits, _Alloc, _Base > & __str, size_type __pos = 0) const [inline], [noexcept]

Find position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1926 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of().

4.66.3.48 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of (const _CharT * __s, size_type __pos, size_type __n) const

Find position of a character not in C substring.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search from.
__n	Number of characters from s to consider.

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 392 of file vstring.tcc.

4.66.3.49 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of (const _CharT * __s, size_type __pos = 0) const [inline]

Find position of a character not in C string.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1957 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of().

4.66.3.50 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of (_CharT __c, size_type __pos = 0) const [noexcept]

Find position of a different character.

Parameters

__c	Character to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character other than *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 405 of file vstring.tcc.

4.66.3.51 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1799 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of().

4.66.3.52 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of (const _CharT * *__s*, size_type *__pos*, size_type *__n*) const

Find position of a character of C substring.

Parameters

__s	String containing characters to locate.
__pos	Index of character to search from.
__n	Number of characters from s to search for.

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 353 of file vstring.tcc.

4.66.3.53 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of (const _CharT * *__s*, size_type *__pos* = `0`) const [inline]

Find position of a character of C string.

Parameters

__s	String containing characters to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1829 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of().

4.66.3.54 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_of (_CharT __c, size_type __pos = 0) const [inline], [noexcept]

Find position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for the character *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Note: equivalent to find(c, pos).

Definition at line 1848 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find().

4.66.3.55 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str,* size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1989 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of().

4.66.3.56 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of (const _CharT * *__s,* size_type *__pos,* size_type *__n*) const

Find last position of a character not in C substring.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search back from.
__n	Number of characters from s to consider.

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 417 of file vstring.tcc.

4.66.3.57 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of (const _CharT * __s, size_type __pos = npos) const [inline]

Find last position of a character not in C string.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 2020 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of().

4.66.3.58 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_not_of (_CharT *__c*, size_type *__pos* = npos) const [noexcept]

Find last position of a different character.

Parameters

__c	Character to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character other than *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 439 of file vstring.tcc.

4.66.3.59 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1863 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::data(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of().

4.66.3.60 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of (const _CharT * __s, size_type __pos, size_type __n) const

Find last position of a character of C substring.

Parameters

__s	C string containing characters to locate.
__pos	Index of character to search back from.
__n	Number of characters from s to search for.

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 370 of file vstring.tcc.

4.66.3.61 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of (const _CharT * __s, size_type __pos = npos) const [inline]

Find last position of a character of C string.

Parameters

__s	C string containing characters to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1893 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of().

4.66.3.62 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of (_CharT __c, size_type __pos = npos) const [inline], [noexcept]

Find last position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Note: equivalent to rfind(c, pos).

Definition at line 1912 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind().

4.66.3.63 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::front ( ) [inline], [noexcept]

Returns a read/write reference to the data at the first element of the string.

Definition at line 617 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[]().

4.66.3.64 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::front ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the first element of the string.

Definition at line 625 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[]().

4.66.3.65 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> allocator_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::get_allocator ( ) const [inline], [noexcept]

Return copy of allocator used to construct this string.

Definition at line 1665 of file vstring.h.

4.66.3.66 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (const_iterator __p, size_type __n, _CharT __c) [inline]

Insert multiple characters.

Parameters

__p	Const_iterator referencing location in string to insert at.
__n	Number of characters to insert
__c	The character to insert.

Returns

Iterator referencing the first inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts *__n* copies of character *__c* starting at the position referenced by iterator *__p*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 941 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert().

4.66.3.67 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (const_iterator *__p*, _InputIterator *__beg*, _InputIterator *__end*) [inline]

Insert a range of characters.

Parameters

__p	Const_iterator referencing location in string to insert at.
__beg	Start of range.
__end	End of range.

Returns

Iterator referencing the first inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts characters in range [beg,end). If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 985 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.68 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (const_iterator *__p*, std::initializer_list< _CharT > *__l*) [inline]

Insert an initializer_list of characters.

Parameters

__p	Const_iterator referencing location in string to insert at.
__l	The initializer_list of characters to insert.

Returns

Iterator referencing the first inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Definition at line 1021 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert().

4.66.3.69 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (size_type *__pos1*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Insert value of a string.

Parameters

__pos1	Iterator referencing location in string to insert at.
__str	The string to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts value of *__str* starting at *__pos1*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1038 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.70 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (size_type *__pos1*, const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos2*, size_type *__n*) [inline]

Insert a substring.

Parameters

__pos1	Iterator referencing location in string to insert at.
__str	The string to insert.
__pos2	Start of characters in str to insert.
__n	Number of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos1* > size() or *__pos2* > *__str.size()*.

Starting at *__pos1*, insert *__n* character of *__str* beginning with *__pos2*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos1* is beyond the end of this string or *__pos2* is beyond the end of *__str*, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1061 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.71 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (size_type *__pos*, const _CharT * *__s*, size_type *__n*) [inline]

Insert a C substring.

Parameters

__pos	Iterator referencing location in string to insert at.
__s	The C string to insert.
__n	The number of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos* is beyond the end of this string.

Inserts the first *__n* characters of *__s* starting at *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* is beyond end(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1084 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.72 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (size_type __pos, const _CharT * __s) [inline]

Insert a C string.

Parameters

__pos	Iterator referencing location in string to insert at.
__s	The C string to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos* is beyond the end of this string.

Inserts the first *__n* characters of *__s* starting at *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* is beyond end(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1103 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.73 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (size_type __pos, size_type __n, _CharT __c) [inline]

Insert multiple characters.

Parameters

__pos	Index in string to insert at.
__n	Number of characters to insert
__c	The character to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos* is beyond the end of this string.

Inserts *__n* copies of character *__c* starting at index *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* > length(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1127 of file vstring.h.

4.66.3.74 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert (const_iterator *__p*, _CharT *__c*) [inline]

Insert one character.

Parameters

__p	Iterator referencing position in string to insert at.
__c	The character to insert.

Returns

Iterator referencing newly inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts character *__c* at position referenced by *__p*. If adding character causes the length to exceed max_size(), length_error is thrown. If *__p* is beyond end of string, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1146 of file vstring.h.

4.66.3.75 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::length ( ) const [inline], [noexcept]

Returns the number of characters in the string, not including any null-termination.

Definition at line 432 of file vstring.h.

4.66.3.76 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::max_size ( ) const [inline], [noexcept]

Returns the size() of the largest possible string.

Definition at line 437 of file vstring.h.

Referenced by std::getline().

4.66.3.77 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

Definition at line 652 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append().

4.66.3.78 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+= (const _CharT * __s) [inline]

Append a C string.

Parameters

__s	The C string to append.

Returns

Reference to this string.

Definition at line 661 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append().

4.66.3.79 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+= (_CharT __c) [inline]

Append a character.

Parameters

__c	The character to append.

Returns

Reference to this string.

Definition at line 670 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back().

4.66.3.80 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+= (std::initializer_list< _CharT > __l) [inline]

Append an initializer_list of characters.

Parameters

__l	The initializer_list of characters to be appended.

Returns

Reference to this string.

Definition at line 683 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append().

4.66.3.81 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator= (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Assign the value of *str* to this string.

Parameters

__str	Source string.

Definition at line 257 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign().

4.66.3.82 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator= (__versa_string< _CharT, _Traits, _Alloc, _Base > && *__str*) [inline], [noexcept]

String move assignment operator.

Parameters

__str	Source string.

The contents of *__str* are moved into this string (without copying). *__str* is a valid, but unspecified string.

Definition at line 269 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::swap().

4.66.3.83 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator= (std::initializer_list< _CharT > *__l*) [inline]

Set value to string constructed from initializer list.

Parameters

__l	std::initializer_list.

Definition at line 281 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign().

4.66.3.84 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator= (const _CharT * *__s*) [inline]

Copy contents of *__s* into this string.

Parameters

__s	Source null-terminated string.

Definition at line 293 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign().

4.66.3.85 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator= (_CharT __c) [inline]

Set value to string of length 1.

Parameters

__c	Source character.

Assigning to a character makes this string length 1 and (*this)[0] == *__c*.

Definition at line 304 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign().

4.66.3.86 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[] (size_type *__pos*) const [inline], [noexcept]

Subscript access to the data contained in the string.

Parameters

__pos	The index of the character to access.

Returns

Read-only (constant) reference to the character.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 538 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::back(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::front().

4.66.3.87 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reference __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[] (size_type *__pos*) [inline], [noexcept]

Subscript access to the data contained in the string.

Parameters

__pos	The index of the character to access.

Returns

Read/write reference to the character.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().) Unshares the string.

Definition at line 555 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.88 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::pop_back ( ) [inline]

Remove the last character.

The string must be non-empty.

Definition at line 1236 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.89 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back (_CharT __c) [inline]

Append a single character.

Parameters

__c	Character to append.

Definition at line 789 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::capacity(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::operator+(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator+=().

4.66.3.90 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last character in the string. Iteration is done in reverse element order. Unshares the string.

Definition at line 355 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end().

4.66.3.91 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last character in the string. Iteration is done in reverse element order.

Definition at line 364 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end().

4.66.3.92 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rend ( ) [inline],[noexcept]

Returns a read/write reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order. Unshares the string.

Definition at line 373 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::begin().

4.66.3.93 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const_reverse_iterator __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rend ( ) const [inline],[noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order.

Definition at line 382 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::begin().

4.66.3.94 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (size_type __pos, size_type __n, const __versa_string< _CharT, _Traits, _Alloc, _Base > & __str) [inline]

Replace characters with value from another string.

Parameters

__pos	Index of first character to replace.
__n	Number of characters to be replaced.
__str	String to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos* is beyond the end of this string.
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos,pos+n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1258 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.95 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (size_type __pos1, size_type __n1, const __versa_string< _CharT, _Traits, _Alloc, _Base > & __str, size_type __pos2, size_type __n2) [inline]

Replace characters with value from another string.

Parameters

__pos1	Index of first character to replace.
__n1	Number of characters to be replaced.
__str	String to insert.
__pos2	Index of first character of str to use.
__n2	Number of characters from str to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos1* > size() or *__pos2* > str.size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos1,pos1 + n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1281 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.96 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (size_type *__pos*, size_type *__n1*, const _CharT * *__s*, size_type *__n2*) [inline]

Replace characters with value of a C substring.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__s	C string to insert.
__n2	Number of characters from *__s* to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos1* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos,pos + n1) from this string. In place, the first *__n2* characters of *__s* are inserted, or all of *__s* if *__n2* is too large. If *__pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1309 of file vstring.h.

4.66.3.97 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (size_type *__pos*, size_type *__n1*, const _CharT * *__s*) [inline]

Replace characters with value of a C string.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__s	C string to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos,pos + n1) from this string. In place, the characters of *__s* are inserted. If *pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1333 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.98 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (size_type *__pos,* size_type *__n1,* size_type *__n2,* _CharT *__c*) [inline]

Replace characters with multiple characters.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__n2	Number of characters to insert.
__c	Character to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos,pos + n1) from this string. In place, *__n2* copies of *__c* are inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1357 of file vstring.h.

4.66.3.99 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1,* const_iterator *__i2,* const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*) [inline]

Replace range of characters with string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__str	String value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, the value of *__str* is inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1376 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.100 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1*, const_iterator *__i2*, const _CharT * *__s*, size_type *__n*) [inline]

Replace range of characters with C substring.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.
__n	Number of characters from s to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, the first *n* characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1399 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.101 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1*, const_iterator *__i2*, const _CharT * *__s*) [inline]

Replace range of characters with C string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, the characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1425 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.102 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1*, const_iterator *__i2*, size_type *__n*, _CharT *__c*) [inline]

Replace range of characters with multiple characters.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__n	Number of characters to insert.
__c	Character to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, *__n* copies of *__c* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1450 of file vstring.h.

4.66.3.103 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1*, const_iterator *__i2*, _InputIterator *__k1*, _InputIterator *__k2*) [inline]

Replace range of characters with range.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__k1	Iterator referencing start of range to insert.
__k2	Iterator referencing end of range to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, characters in the range [k1,k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1479 of file vstring.h.

4.66.3.104 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string& __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace (const_iterator *__i1*, const_iterator *__i2*, std::initializer_list< _CharT > *__l*) [inline]

Replace range of characters with initializer_list.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__l	The initializer_list of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [i1,i2). In place, characters in the range [k1,k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 1583 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace().

4.66.3.105 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::reserve (size_type *__res_arg* = `0`) [inline]

Attempt to preallocate enough memory for specified number of characters.

Parameters

__res_arg	Number of characters required.

Exceptions

std::length_error	If *__res_arg* exceeds `max_size()`.

This function attempts to reserve enough memory for the string to hold the specified number of characters. If the number requested is more than max_size(), length_error is thrown.

The advantage of this function is that if optimal code is a necessity and the user can determine the string length that will be required, the user can reserve the memory in advance, and thus prevent a possible reallocation of memory and copying of string data.

Definition at line 508 of file vstring.h.

Referenced by __gnu_cxx::operator+(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::shrink_to_fit().

4.66.3.106 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::resize (size_type __n, _CharT __c)

Resizes the string to the specified number of characters.

Parameters

__n	Number of characters the string should contain.
__c	Character to fill any new elements.

This function will resize the string to the specified number of characters. If the number is smaller than the string's current size the string is truncated, otherwise the string is extended and new elements are set to *__c*.

Definition at line 50 of file vstring.tcc.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::resize().

4.66.3.107 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::resize (size_type __n) [inline]

Resizes the string to the specified number of characters.

Parameters

__n	Number of characters the string should contain.

This function will resize the string to the specified length. If the new size is smaller than the string's current size the string is truncated, otherwise the string is extended and new characters are default-constructed. For basic types such as char, this means setting them to 0.

Definition at line 464 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::resize().

4.66.3.108 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind (const __versa_string< _CharT, _Traits, _Alloc, _Base > & *__str*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search back from (default end).

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1739 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of(), and __gnu_cxx::__versa-_string< _CharT, _Traits, _Alloc, _Base >::rfind().

4.66.3.109 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind (const _CharT * __s, size_type __pos, size_type __n) const

Find last position of a C substring.

Parameters

__s	C string to locate.
__pos	Index of character to search back from.
__n	Number of characters from s to search for.

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for the first *__n* characters in *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 313 of file vstring.tcc.

References std::min().

4.66.3.110 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind (const _CharT * *__s*, size_type *__pos* = npos) const [inline]

Find last position of a C string.

Parameters

__s	C string to locate.
__pos	Index of character to start search at (default end).

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for the value of *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1769 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind().

4.66.3.111 template<typename _CharT, typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::rfind (_CharT *__c*, size_type *__pos* = npos) const [noexcept]

Find last position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 335 of file vstring.tcc.

4.66.3.112 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::shrink_to_fit ( ) [inline], [noexcept]

A non-binding request to reduce capacity() to size().

Definition at line 470 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::capacity(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::reserve(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size().

4.66.3.113 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::size ( ) const [inline], [noexcept]

Returns the number of characters in the string, not including any null-termination.

Definition at line 426 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::append(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::at(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::back(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::cend(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::compare(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::empty(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::end(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_first_not_of(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::find_last_of(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::insert(), __gnu_cxx::operator+(), std::operator<<(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator[](), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::pop_back(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::push_back(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::replace(), and __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::shrink_to_fit().

4.66.3.114 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> __versa_string __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::substr (size_type __pos = 0, size_type __n = npos) const [inline]

Get a substring.

Parameters

__pos	Index of first character (default 0).
__n	Number of characters in substring (default remainder).

Returns

The new string.

Exceptions

std::out_of_range	If pos > size().

Construct and return a new string using the *__n* characters starting at *__pos*. If the string is too short, use the remainder of the characters. If *__pos* is beyond the end of the string, out_of_range is thrown.

Definition at line 2053 of file vstring.h.

References __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::__versa_string().

4.66.3.115 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> void __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::swap (__versa_string< _CharT, _Traits, _Alloc, _Base > & *__s*) [inline], [noexcept]

Swap contents with another string.

Parameters

__s	String to swap with.

Exchanges the contents of this string with that of *__s* in constant time.

Definition at line 1637 of file vstring.h.

Referenced by __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::assign(), __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::operator=(), and __gnu_cxx::swap().

4.66.4 Member Data Documentation

4.66.4.1 template<typename _CharT, typename _Traits, typename _Alloc, template< typename, typename, typename > class _Base> const __versa_string< _CharT, _Traits, _Alloc, _Base >::size_type __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >::npos [static]

Value returned by various member functions when they fail.

Definition at line 82 of file vstring.h.

The documentation for this class was generated from the following files:

- vstring.h
- vstring.tcc

4.67 __gnu_debug::_After_nth_from< _Iterator > Class Template Reference

Public Member Functions

- **_After_nth_from** (const difference_type &__n, const _Iterator &__base)
- bool **operator()** (const _Iterator &__x) const

4.67.1 Detailed Description

template<typename _Iterator>class __gnu_debug::_After_nth_from< _Iterator >

A function object that returns true when the given random access iterator is at least `n` steps away from the given iterator.

Definition at line 74 of file safe_sequence.h.

The documentation for this class was generated from the following file:

- safe_sequence.h

4.68 std::_Base_bitset< _Nw > Struct Template Reference

Public Types

- typedef unsigned long **_WordT**

Public Member Functions

- constexpr **_Base_bitset** (unsigned long long __val) noexcept

- template<size_t _Nb>
  bool **_M_are_all** () const noexcept
- void **_M_do_and** (const _Base_bitset< _Nw > &__x) noexcept
- size_t **_M_do_count** () const noexcept
- size_t **_M_do_find_first** (size_t) const noexcept
- size_t **_M_do_find_next** (size_t, size_t) const noexcept
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t __shift) noexcept
- void **_M_do_or** (const _Base_bitset< _Nw > &__x) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t __shift) noexcept
- void **_M_do_set** () noexcept
- unsigned long long **_M_do_to_ullong** () const
- unsigned long **_M_do_to_ulong** () const
- void **_M_do_xor** (const _Base_bitset< _Nw > &__x) noexcept
- const _WordT * **_M_getdata** () const noexcept
- _WordT & **_M_getword** (size_t __pos) noexcept
- constexpr _WordT **_M_getword** (size_t __pos) const noexcept
- _WordT & **_M_hiword** () noexcept
- constexpr _WordT **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const _Base_bitset< _Nw > &__x) const noexcept

Static Public Member Functions

- static constexpr _WordT **_S_maskbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbyte** (size_t __pos) noexcept
- static constexpr size_t **_S_whichword** (size_t __pos) noexcept

Public Attributes

- _WordT _M_w [_Nw]

4.68.1 Detailed Description

template<size_t _Nw>struct std::_Base_bitset< _Nw >

Base class, general case. It is a class invariant that _Nw will be nonnegative.

See documentation for bitset.

Definition at line 75 of file bitset.

4.68.2 Member Data Documentation

4.68.2.1 template<size_t _Nw> _WordT std::_Base_bitset< _Nw >::_M_w[_Nw]

0 is the least significant word.

Definition at line 80 of file bitset.

The documentation for this struct was generated from the following file:

- bitset

4.69 std::_Base_bitset< 0 > Struct Template Reference

Public Types

- typedef unsigned long **_WordT**

Public Member Functions

- constexpr **_Base_bitset** (unsigned long long) noexcept
- template<size_t _Nb>
  bool **_M_are_all** () const noexcept
- void **_M_do_and** (const _Base_bitset< 0 > &) noexcept
- size_t **_M_do_count** () const noexcept
- size_t **_M_do_find_first** (size_t) const noexcept
- size_t **_M_do_find_next** (size_t, size_t) const noexcept
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t) noexcept
- void **_M_do_or** (const _Base_bitset< 0 > &) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t) noexcept
- void **_M_do_set** () noexcept
- unsigned long long **_M_do_to_ullong** () const noexcept
- unsigned long **_M_do_to_ulong** () const noexcept
- void **_M_do_xor** (const _Base_bitset< 0 > &) noexcept
- _WordT & **_M_getword** (size_t) noexcept
- constexpr _WordT **_M_getword** (size_t) const noexcept
- constexpr _WordT **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const _Base_bitset< 0 > &) const noexcept

Static Public Member Functions

- static constexpr _WordT **_S_maskbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbyte** (size_t __pos) noexcept
- static constexpr size_t **_S_whichword** (size_t __pos) noexcept

4.69.1 Detailed Description

template<><>struct std::_Base_bitset< 0 >

Base class, specialization for no storage (zero-length bitset).

See documentation for bitset.

Definition at line 523 of file bitset.

The documentation for this struct was generated from the following file:

- bitset

4.70 std::_Base_bitset< 1 > Struct Template Reference

Public Types

- typedef unsigned long **_WordT**

Public Member Functions

- constexpr **_Base_bitset** (unsigned long long __val) noexcept
- template<size_t _Nb>
  bool **_M_are_all** () const noexcept
- void **_M_do_and** (const _Base_bitset< 1 > &__x) noexcept
- size_t **_M_do_count** () const noexcept
- size_t **_M_do_find_first** (size_t __not_found) const noexcept
- size_t **_M_do_find_next** (size_t __prev, size_t __not_found) const noexcept
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t __shift) noexcept
- void **_M_do_or** (const _Base_bitset< 1 > &__x) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t __shift) noexcept
- void **_M_do_set** () noexcept
- unsigned long long **_M_do_to_ullong** () const noexcept
- unsigned long **_M_do_to_ulong** () const noexcept
- void **_M_do_xor** (const _Base_bitset< 1 > &__x) noexcept
- const _WordT * **_M_getdata** () const noexcept
- _WordT & **_M_getword** (size_t) noexcept
- constexpr _WordT **_M_getword** (size_t) const noexcept
- _WordT & **_M_hiword** () noexcept
- constexpr _WordT **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const _Base_bitset< 1 > &__x) const noexcept

Static Public Member Functions

- static constexpr _WordT **_S_maskbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbyte** (size_t __pos) noexcept
- static constexpr size_t **_S_whichword** (size_t __pos) noexcept

Public Attributes

- _WordT **_M_w**

4.70.1 Detailed Description

template<>struct std::_Base_bitset< 1 >

Base class, specialization for a single word.

See documentation for bitset.

Definition at line 376 of file bitset.

The documentation for this struct was generated from the following file:

- bitset

4.71 __gnu_debug::_BeforeBeginHelper< _Sequence > Struct Template Reference

Static Public Member Functions

- template<typename _Iterator , typename _Category >
  static bool **_S_Is** (const _Safe_iterator< _Iterator, _Sequence, _Category > &)
- template<typename _Iterator , typename _Category >
  static bool **_S_Is_Beginnest** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it)

4.71.1 Detailed Description

template<typename _Sequence>struct __gnu_debug::_BeforeBeginHelper< _Sequence >

Helper struct to deal with sequence offering a before_begin iterator.

Definition at line 70 of file safe_iterator.h.

The documentation for this struct was generated from the following file:

- safe_iterator.h

4.72 std::_Bind< _Signature > Struct Template Reference

4.72.1 Detailed Description

template<typename _Signature>struct std::_Bind< _Signature >

Type of the function object returned from bind().

Definition at line 398 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.73 std::_Bind_result< _Result, _Signature > Struct Template Reference

4.73.1 Detailed Description

template<typename _Result, typename _Signature>struct std::_Bind_result< _Result, _Signature >

Type of the function object returned from bind<R>().

Definition at line 549 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.74 __gnu_cxx::__detail::_Bitmap_counter< _Tp > Class Template Reference

Public Member Functions

- **_Bitmap_counter** (_BPVector &Rvbp, long __index=-1)
- pointer **_M_base** () const throw ()
- bool **_M_finished** () const throw ()
- std::size_t * **_M_get** () const throw ()
- _Index_type **_M_offset** () const throw ()
- void **_M_reset** (long __index=-1) throw ()
- void **_M_set_internal_bitmap** (std::size_t *__new_internal_marker) throw ()
- _Index_type **_M_where** () const throw ()
- _Bitmap_counter & **operator++** () throw ()

4.74.1 Detailed Description

template<typename _Tp>class __gnu_cxx::__detail::_Bitmap_counter< _Tp >

The bitmap counter which acts as the bitmap manipulator, and manages the bit-manipulation functions and the searching and identification functions on the bit-map.

Definition at line 395 of file bitmap_allocator.h.

The documentation for this class was generated from the following file:

- bitmap_allocator.h

4.75 std::__detail::_BracketMatcher< typename, bool, bool > Struct Template Reference

Public Types

- typedef _TraitsT::char_class_type **_CharClassT**
- typedef _TransT::_CharT **_CharT**
- typedef _TraitsT::string_type **_StringT**
- typedef _TransT::_StrTransT **_StrTransT**
- typedef _RegexTranslator < _TraitsT, __icase, __collate > **_TransT**

Public Member Functions

- **_BracketMatcher** (bool __is_non_matching, const _TraitsT &__traits)
- void **_M_add_char** (_CharT __c)
- void **_M_add_character_class** (const _StringT &__s, bool __neg)
- _StringT **_M_add_collate_element** (const _StringT &__s)
- void **_M_add_equivalence_class** (const _StringT &__s)
- void **_M_make_range** (_CharT __l, _CharT __r)
- void **_M_ready** ()
- bool **operator()** (_CharT __ch) const

4.75.1 Detailed Description

template<typename, bool, bool>struct std::__detail::_BracketMatcher< typename, bool, bool >

Matches a character range (bracket expression)

Definition at line 49 of file regex_compiler.h.

The documentation for this struct was generated from the following files:

- regex_compiler.h
- regex_compiler.tcc

4.76 __gnu_cxx::_Caster< _ToType > Struct Template Reference

Public Types

- typedef _ToType::element_type * **type**

4.76.1 Detailed Description

template<typename _ToType>struct __gnu_cxx::_Caster< _ToType >

These functions are here to allow containers to support non standard pointer types. For normal pointers, these resolve to the use of the standard cast operation. For other types the functions will perform the appropriate cast to/from the custom pointer class so long as that class meets the following conditions: 1) has a typedef element_type which names tehe type it points to. 2) has a get() const method which returns element_type*. 3) has a constructor which can take one element_type* argument. This type supports the semantics of the pointer cast operators (below.)

Definition at line 52 of file cast.h.

The documentation for this struct was generated from the following file:

- cast.h

4.77 __gnu_cxx::_Char_types< _CharT > Struct Template Reference

Public Types

- typedef unsigned long **int_type**
- typedef std::streamoff **off_type**

- typedef std::streampos **pos_type**
- typedef std::mbstate_t **state_type**

4.77.1 Detailed Description

template<typename _CharT>struct __gnu_cxx::_Char_types< _CharT >

Mapping from character type to associated types.

Note

This is an implementation class for the generic version of char_traits. It defines int_type, off_type, pos_type, and state_type. By default these are unsigned long, streamoff, streampos, and mbstate_t. Users who need a different set of types, but who don't need to change the definitions of any function defined in char_traits, can specialize __gnu_cxx::_Char_types while leaving __gnu_cxx::char_traits alone.

Definition at line 65 of file char_traits.h.

The documentation for this struct was generated from the following file:

- char_traits.h

4.78 __gnu_pbds::detail::pat_trie_base::_CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator >:



Public Types

- typedef allocator_type **_Alloc**
- typedef Node::allocator_type **allocator_type**
- typedef type_traits::const_pointer **const_pointer**
- typedef type_traits::const_reference **const_reference**
- typedef allocator_type::difference_type **difference_type**
- typedef rebind_traits< _Alloc, Head >::pointer **head_pointer**
- typedef Inode::iterator **inode_iterator**

- typedef rebind_traits< _Alloc, Inode >::pointer **inode_pointer**
- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef rebind_traits< _Alloc, Leaf >::const_pointer **leaf_const_pointer**
- typedef rebind_traits< _Alloc, Leaf >::pointer **leaf_pointer**
- typedef rebind_traits< _Alloc, Node >::pointer **node_pointer**
- typedef type_traits::pointer **pointer**
- typedef type_traits::reference **reference**
- typedef Node::type_traits **type_traits**
- typedef type_traits::value_type **value_type**

Public Member Functions

- **_CIter** (node_pointer p_nd=0)
- **_CIter** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other)
- bool **operator!=** (const _CIter &other) const
- bool **operator!=** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other) const
- const_reference **operator*** () const
- _CIter & **operator++** ()
- _CIter **operator++** (int)
- _CIter & **operator--** ()
- _CIter **operator--** (int)
- const_pointer **operator->** () const
- _CIter & **operator=** (const _CIter &other)
- _CIter & **operator=** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other)
- bool **operator==** (const _CIter &other) const
- bool **operator==** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other) const

Public Attributes

- node_pointer **m_p_nd**

Protected Member Functions

- void **dec** (false_type)
- void **dec** (true_type)
- void **inc** (false_type)
- void **inc** (true_type)

Static Protected Member Functions

- static node_pointer **get_larger_sibling** (node_pointer p_nd)
- static node_pointer **get_smaller_sibling** (node_pointer p_nd)
- static leaf_pointer **leftmost_descendant** (node_pointer p_nd)
- static leaf_pointer **rightmost_descendant** (node_pointer p_nd)

4.78.1 Detailed Description

template<typename Node, typename Leaf, typename Head, typename Inode, bool Is_Forward_Iterator>class __gnu_pbds::detail::pat-_trie_base::_CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator >

Const iterator.

Definition at line 487 of file pat_trie_base.hpp.

The documentation for this class was generated from the following file:

- pat_trie_base.hpp

4.79 std::__detail::_Compiler< _TraitsT > Class Template Reference

Public Types

- typedef _TraitsT::char_type **_CharT**
- typedef regex_constants::syntax_option_type **_FlagT**
- typedef const _CharT * **_IterT**
- typedef _NFA< _TraitsT > **_RegexT**

Public Member Functions

- **_Compiler** (_IterT __b, _IterT __e, const typename _TraitsT::locale_type &__traits, _FlagT __flags)
- shared_ptr< const _RegexT > **_M_get_nfa** ()

4.79.1 Detailed Description

template<typename _TraitsT>class std::__detail::_Compiler< _TraitsT >

Builds an NFA from an input iterator range.

The _TraitsT type should fulfill requirements [28.3].

Definition at line 57 of file regex_compiler.h.

The documentation for this class was generated from the following files:

- regex_compiler.h
- regex_compiler.tcc

4.80 std::__parallel::_CRandNumber< _MustBeInt > Struct Template Reference

Public Member Functions

- int **operator()** (int __limit)

4.80.1 Detailed Description

template<typename _MustBeInt = int>struct std::__parallel::_CRandNumber< _MustBeInt >

Functor wrapper for std::rand().

Definition at line 1529 of file algo.h.

The documentation for this struct was generated from the following file:

- algo.h

4.81 std::__detail::_Default_ranged_hash Struct Reference

4.81.1 Detailed Description

Default ranged hash function H. In principle it should be a function object composed from objects of type H1 and H2 such that h(k, N) = h2(h1(k), N), but that would mean making extra copies of h1 and h2. So instead we'll just use a tag to tell class template hashtable to do that composition.

Definition at line 441 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.82 std::_Deque_base< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::_Deque_base< _Tp, _Alloc >:



Protected Types

- enum { **_S_initial_map_size** }
- typedef
  __gnu_cxx::__alloc_traits
  < _Tp_alloc_type > **_Alloc_traits**

- typedef __gnu_cxx::__alloc_traits < _Map_alloc_type > **_Map_alloc_traits**
- typedef _Alloc_traits::template rebind < _Ptr >::other **_Map_alloc_type**
- typedef iterator::_Map_pointer **_Map_pointer**
- typedef _Alloc_traits::pointer **_Ptr**
- typedef _Alloc_traits::const_pointer **_Ptr_const**
- typedef __gnu_cxx::__alloc_traits < _Alloc >::template rebind < _Tp >::other **_Tp_alloc_type**
- typedef _Alloc **allocator_type**
- typedef _Deque_iterator< _Tp, const _Tp &, _Ptr_const > **const_iterator**
- typedef _Deque_iterator< _Tp, _Tp &, _Ptr > **iterator**

Protected Member Functions

- **_Deque_base** (size_t __num_elements)
- **_Deque_base** (const allocator_type &__a, size_t __num_elements)
- **_Deque_base** (const allocator_type &__a)
- **_Deque_base** (_Deque_base &&__x)
- **_Deque_base** (_Deque_base &&__x, const allocator_type &__a)
- **_Deque_base** (_Deque_base &&__x, const allocator_type &__a, size_t __n)
- _Map_pointer **_M_allocate_map** (size_t __n)
- _Ptr **_M_allocate_node** ()
- void **_M_create_nodes** (_Map_pointer __nstart, _Map_pointer __nfinish)
- void **_M_deallocate_map** (_Map_pointer __p, size_t __n) noexcept
- void **_M_deallocate_node** (_Ptr __p) noexcept
- void **_M_destroy_nodes** (_Map_pointer __nstart, _Map_pointer __nfinish) noexcept
- _Map_alloc_type **_M_get_map_allocator** () const noexcept
- _Tp_alloc_type & **_M_get_Tp_allocator** () noexcept
- const _Tp_alloc_type & **_M_get_Tp_allocator** () const noexcept
- void _M_initialize_map (size_t)
- allocator_type **get_allocator** () const noexcept

Protected Attributes

- _Deque_impl **_M_impl**

4.82.1 Detailed Description

template<typename _Tp, typename _Alloc>class std::_Deque_base< _Tp, _Alloc >

Deque base class. This class provides the unified face for deque's allocation. This class's constructor and destructor allocate and deallocate (but do not initialize) storage. This makes exception safety easier.

Nothing in this class ever constructs or destroys an actual Tp element. (Deque handles that itself.) Only/All memory management is performed here.

Definition at line 406 of file stl_deque.h.

4.82.2 Member Function Documentation

4.82.2.1 template<typename _Tp , typename _Alloc > void std::_Deque_base< _Tp, _Alloc >::_M_initialize_map (size_t *__num_elements*) [protected]

Layout storage.

Parameters

__num_elements	The count of T's for which to allocate space at first.

Returns

Nothing.

The initial underlying memory layout is a bit complicated...

Definition at line 615 of file stl_deque.h.

References std::max().

The documentation for this class was generated from the following file:

- stl_deque.h

4.83 std::_Deque_iterator< _Tp, _Ref, _Ptr > Struct Template Reference

Public Types

- typedef __ptr_rebind< _Ptr, _Tp > **_Elt_pointer**
- typedef __ptr_rebind< _Ptr, _Elt_pointer > **_Map_pointer**
- typedef _Deque_iterator **_Self**
- typedef __iter< const _Tp > **const_iterator**
- typedef ptrdiff_t **difference_type**
- typedef __iter< _Tp > **iterator**
- typedef std::random_access_iterator_tag **iterator_category**
- typedef _Ptr **pointer**
- typedef _Ref **reference**
- typedef size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **_Deque_iterator** (_Elt_pointer __x, _Map_pointer __y) noexcept
- template<typename _Iter , typename = _Require<is_same<_Self, const_iterator>, is_same<_Iter, iterator>>> **_Deque_iterator** (const _Iter &__x) noexcept
- **_Deque_iterator** (const _Deque_iterator &__x) noexcept

- iterator **_M_const_cast** () const noexcept
- void _M_set_node (_Map_pointer __new_node) noexcept
- reference **operator*** () const noexcept
- _Self & **operator++** () noexcept
- _Self **operator++** (int) noexcept
- _Self & **operator+=** (difference_type __n) noexcept
- _Self & **operator--** () noexcept
- _Self **operator--** (int) noexcept
- _Self & **operator-=** (difference_type __n) noexcept
- pointer **operator->** () const noexcept
- _Deque_iterator & **operator=** (const _Deque_iterator &)=default
- reference **operator[]** (difference_type __n) const noexcept

Static Public Member Functions

- static size_t **_S_buffer_size** () noexcept

Public Attributes

- _Elt_pointer **_M_cur**
- _Elt_pointer **_M_first**
- _Elt_pointer **_M_last**
- _Map_pointer **_M_node**

Friends

- bool **operator!=** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator!=** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- _Self **operator+** (const _Self &__x, difference_type __n) noexcept
- _Self **operator+** (difference_type __n, const _Self &__x) noexcept
- difference_type **operator-** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  difference_type **operator-** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- _Self **operator-** (const _Self &__x, difference_type __n) noexcept
- bool **operator<** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator<** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- bool **operator<=** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator<=** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- bool **operator==** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator==** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- bool **operator>** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator>** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept
- bool **operator>=** (const _Self &__x, const _Self &__y) noexcept
- template<typename _RefR , typename _PtrR >
  bool **operator>=** (const _Self &__x, const _Deque_iterator< _Tp, _RefR, _PtrR > &__y) noexcept

4.83.1 Detailed Description

template<typename _Tp, typename _Ref, typename _Ptr>struct std::_Deque_iterator< _Tp, _Ref, _Ptr >

A deque::iterator.

Quite a bit of intelligence here. Much of the functionality of deque is actually passed off to this class. A deque holds two of these internally, marking its valid range. Access to elements is done as offsets of either of those two, relying on operator overloading in this class.

All the functions are op overloads except for _M_set_node.

Definition at line 478 of file stl_algobase.h.

4.83.2 Member Function Documentation

4.83.2.1 template<typename _Tp, typename _Ref, typename _Ptr> void std::_Deque_iterator< _Tp, _Ref, _Ptr >::_M_set_node (_Map_pointer *__new_node*) [inline],[noexcept]

Prepares to traverse new_node. Sets everything except _M_cur, which should therefore be set by the caller immediately afterwards, based on _M_first and _M_last.

Definition at line 260 of file stl_deque.h.

The documentation for this struct was generated from the following files:

- stl_algobase.h
- stl_deque.h

4.84 __gnu_parallel::_DRandomShufflingGlobalData< _RAIter > Struct Template Reference

Public Types

- typedef _TraitsType::difference_type **_DifferenceType**
- typedef std::iterator_traits < _RAIter > **_TraitsType**
- typedef _TraitsType::value_type **_ValueType**

Public Member Functions

- _DRandomShufflingGlobalData (_RAIter &__source)

Public Attributes

- _ThreadIndex * _M_bin_proc
- _DifferenceType ** _M_dist
- int _M_num_bins
- int _M_num_bits
- _RAIter & _M_source
- _DifferenceType * _M_starts
- _ValueType ** _M_temporaries

4.84.1 Detailed Description

template<typename _RAIter>struct __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >

Data known to every thread participating in __gnu_parallel::__parallel_random_shuffle().

Definition at line 52 of file random_shuffle.h.

4.84.2 Constructor & Destructor Documentation

4.84.2.1 template<typename _RAIter> __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_DRandomShufflingGlobalData (_RAIter & *__source*) [inline]

Constructor.

Definition at line 83 of file random_shuffle.h.

4.84.3 Member Data Documentation

4.84.3.1 template<typename _RAIter> _ThreadIndex* __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_bin_proc

Number of the thread that will further process the corresponding bin.

Definition at line 74 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs().

4.84.3.2 template<typename _RAIter> _DifferenceType** __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_dist

Two-dimensional array to hold the thread-bin distribution.

Dimensions (_M_num_threads + 1) __x (_M_num_bins + 1).

Definition at line 67 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.84.3.3 template<typename _RAIter> int __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bins

Number of bins to distribute to.

Definition at line 77 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.84.3.4 template<typename _RAIter> int __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_num_bits

Number of bits needed to address the bins.

Definition at line 80 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.84.3.5 template<typename _RAIter> _RAIter& __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_source

Begin iterator of the __source.

Definition at line 59 of file random_shuffle.h.

4.84.3.6 template<typename _RAIter> _DifferenceType* __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_starts

Start indexes of the threads' __chunks.

Definition at line 70 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.84.3.7 template<typename _RAIter> _ValueType** __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >::_M_temporaries

Temporary arrays for each thread.

Definition at line 62 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs().

The documentation for this struct was generated from the following file:

- random_shuffle.h

4.85 __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator > Struct Template Reference

Public Attributes

- _BinIndex __bins_end
- _BinIndex _M_bins_begin
- int _M_num_threads
- _DRandomShufflingGlobalData < _RAIter > * _M_sd
- uint32_t _M_seed

4.85.1 Detailed Description

template<typename _RAIter, typename _RandomNumberGenerator>struct __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >

Local data for a thread participating in __gnu_parallel::__parallel_random_shuffle().

Definition at line 91 of file random_shuffle.h.

4.85.2 Member Data Documentation

4.85.2.1 template<typename _RAIter, typename _RandomNumberGenerator> _BinIndex __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::__bins_end

End index for bins taken care of by this thread.

Definition at line 100 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs().

4.85.2.2 template<typename _RAIter, typename _RandomNumberGenerator> _BinIndex __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_bins_begin

Begin index for bins taken care of by this thread.

Definition at line 97 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs().

4.85.2.3 template<typename _RAIter, typename _RandomNumberGenerator> int __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_num_threads

Number of threads participating in total.

Definition at line 94 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.85.2.4 template<typename _RAIter, typename _RandomNumberGenerator> _DRandomShufflingGlobalData<_RAIter>* __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_sd

Pointer to global data.

Definition at line 106 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

4.85.2.5 template<typename _RAIter, typename _RandomNumberGenerator> uint32_t __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >::_M_seed

Random _M_seed for this thread.

Definition at line 103 of file random_shuffle.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__parallel_random_shuffle_drs_pu().

The documentation for this struct was generated from the following file:

- random_shuffle.h

4.86 __gnu_parallel::_DummyReduct Struct Reference

Public Member Functions

- bool **operator()** (bool, bool) const

4.86.1 Detailed Description

Reduction function doing nothing.

Definition at line 298 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.87 std::_Enable_copy_move< _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag > Struct Template Reference

Inheritance diagram for std::_Enable_copy_move< _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >:



4.87.1 Detailed Description

template<bool _Copy, bool _CopyAssignment, bool _Move, bool _MoveAssignment, typename _Tag = void>struct std::_Enable_copy_move< _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >

A mixin helper to conditionally enable or disable the copy/move special members.

See Also

_Enable_special_members

Definition at line 84 of file enable_special_members.h.

The documentation for this struct was generated from the following file:

- enable_special_members.h

4.88 std::_Enable_default_constructor< _Switch, _Tag > Struct Template Reference

Public Member Functions

- constexpr **_Enable_default_constructor** (_Enable_default_constructor const &) noexcept=default
- constexpr **_Enable_default_constructor** (_Enable_default_constructor &&) noexcept=default
- constexpr **_Enable_default_constructor** (_Enable_default_constructor_tag)
- _Enable_default_constructor & **operator=** (_Enable_default_constructor const &) noexcept=default
- _Enable_default_constructor & **operator=** (_Enable_default_constructor &&) noexcept=default

4.88.1 Detailed Description

template<bool _Switch, typename _Tag = void>struct std::_Enable_default_constructor< _Switch, _Tag >

A mixin helper to conditionally enable or disable the default constructor.

See Also

_Enable_special_members

Definition at line 50 of file enable_special_members.h.

The documentation for this struct was generated from the following file:

- enable_special_members.h

4.89 std::_Enable_destructor< _Switch, _Tag > Struct Template Reference

4.89.1 Detailed Description

template<bool _Switch, typename _Tag = void>struct std::_Enable_destructor< _Switch, _Tag >

A mixin helper to conditionally enable or disable the default destructor.

See Also

_Enable_special_members

Definition at line 74 of file enable_special_members.h.

The documentation for this struct was generated from the following file:

- enable_special_members.h

4.90 std::_Enable_special_members< _Default, _Destructor, _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag > Struct Template Reference

Inheritance diagram for std::_Enable_special_members< _Default, _Destructor, _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >:

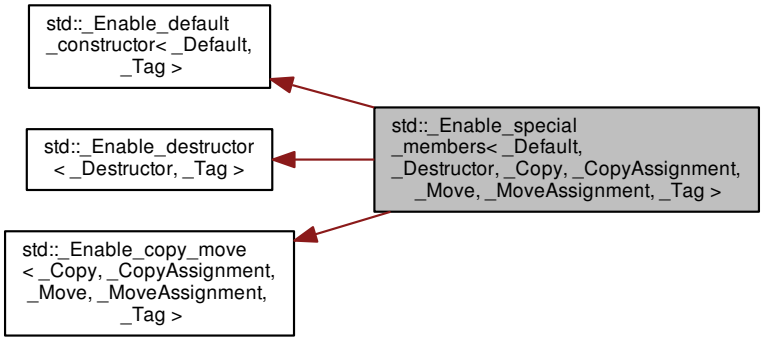

4.90.1 Detailed Description

template<bool _Default, bool _Destructor, bool _Copy, bool _CopyAssignment, bool _Move, bool _MoveAssignment, typename _Tag = void>struct std::_Enable_special_members< _Default, _Destructor, _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >

A mixin helper to conditionally enable or disable the special members.

The `_Tag` type parameter is to make mixin bases unique and thus avoid ambiguities.

Definition at line 97 of file enable_special_members.h.

The documentation for this struct was generated from the following file:

- enable_special_members.h

4.91 __gnu_debug::_Equal_to< _Type > Class Template Reference

Public Member Functions

- **_Equal_to** (const _Type &__v)
- bool **operator()** (const _Type &__x) const

4.91.1 Detailed Description

template<typename _Type>class __gnu_debug::_Equal_to< _Type >

A simple function object that returns true if the passed-in value is equal to the stored value.

Definition at line 59 of file safe_sequence.h.

The documentation for this class was generated from the following file:

- safe_sequence.h

4.92 __gnu_parallel::_EqualFromLess< _T1, _T2, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_EqualFromLess< _T1, _T2, _Compare >:

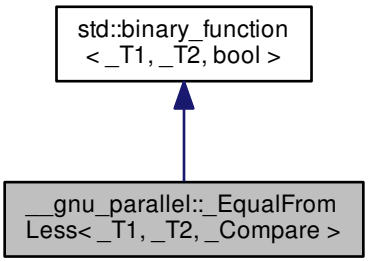

Public Types

- typedef _T1 first_argument_type
- typedef bool result_type
- typedef _T2 second_argument_type

Public Member Functions

- **_EqualFromLess** (_Compare &__comp)
- bool **operator()** (const _T1 &__a, const _T2 &__b)

4.92.1 Detailed Description

template<typename _T1, typename _T2, typename _Compare>class __gnu_parallel::_EqualFromLess< _T1, _T2, _Compare >

Constructs predicate for equality from strict weak ordering predicate.

Definition at line 157 of file base.h.

4.92.2 Member Typedef Documentation

4.92.2.1 typedef _T1 std::binary_function< _T1 , _T2 , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.92.2.2 typedef bool std::binary_function< _T1 , _T2 , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.92.2.3 typedef _T2 std::binary_function< _T1 , _T2 , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- base.h

4.93 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys > Struct Template Reference

Inheritance diagram for std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >:

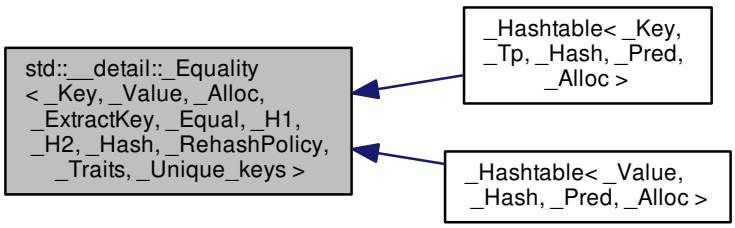

4.93.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits, bool _Unique_keys = _Traits::__unique_keys::value>struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >

Primary class template _Equality.

This is for implementing equality comparison for unordered containers, per N3068, by John Lakos and Pablo Halpern. Algorithmically, we follow closely the reference implementations therein.

Definition at line 1831 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.94 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference

Public Types

- using **__hashtable** = _Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Public Member Functions

- bool **_M_equal** (const __hashtable &) const

4.94.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >

unordered_multiset and unordered_multimap specializations.

Definition at line 1890 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.95 std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference

Public Types

- using **__hashtable** = _Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Public Member Functions

- bool **_M_equal** (const __hashtable &) const

4.95.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >

unordered_map and unordered_set specializations.

Definition at line 1838 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.96 __gnu_parallel::_EqualTo< _T1, _T2 > Struct Template Reference

Inheritance diagram for __gnu_parallel::_EqualTo< _T1, _T2 >:



Public Types

- typedef _T1 first_argument_type
- typedef bool result_type
- typedef _T2 second_argument_type

Public Member Functions

- bool **operator()** (const _T1 &__t1, const _T2 &__t2) const

4.96.1 Detailed Description

template<typename _T1, typename _T2>struct __gnu_parallel::_EqualTo< _T1, _T2 >

Similar to std::equal_to, but allows two different types.

Definition at line 244 of file base.h.

4.96.2 Member Typedef Documentation

4.96.2.1 typedef _T1 std::binary_function< _T1 , _T2 , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.96.2.2 typedef bool std::binary_function< _T1 , _T2 , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.96.2.3 typedef _T2 std::binary_function< _T1 , _T2 , bool >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- base.h

4.97 std::__detail::_Executor< typename, typename, typename, bool > Class Template Reference

Public Types

- typedef iterator_traits < _BiIter >::value_type **_CharT**
- typedef _TraitsT::char_class_type **_ClassT**
- typedef regex_constants::match_flag_type **_FlagT**
- typedef _NFA< _TraitsT > **_NFAT**
- typedef basic_regex< _CharT, _TraitsT > **_RegexT**
- typedef std::vector< sub_match < _BiIter >, _Alloc > **_ResultsVec**

Public Member Functions

- **_Executor** (_BiIter __begin, _BiIter __end, _ResultsVec &__results, const _RegexT &__re, _FlagT __flags)
- bool **_M_match** ()
- bool **_M_search** ()
- bool **_M_search_from_first** ()

Public Attributes

- _BiIter **_M_begin**
- _ResultsVec **_M_cur_results**
- _BiIter **_M_current**
- const _BiIter **_M_end**
- _FlagT **_M_flags**
- bool **_M_has_sol**
- const _NFAT & **_M_nfa**
- const _RegexT & **_M_re**
- vector< pair< _BiIter, int > > **_M_rep_count**
- _ResultsVec & **_M_results**
- _State_info< __search_mode, _ResultsVec > **_M_states**

4.97.1 Detailed Description

template<typename, typename, typename, bool>class std::__detail::_Executor< typename, typename, typename, bool >

Takes a regex and an input string and does the matching.

The _Executor class has two modes: DFS mode and BFS mode, controlled by the template parameter __dfs_mode.

Definition at line 59 of file regex.h.

The documentation for this class was generated from the following files:

- regex.h
- regex_executor.h
- regex_executor.tcc

4.98 __gnu_cxx::_ExtPtr_allocator< _Tp > Class Template Reference

Public Types

- typedef _Pointer_adapter < _Relative_pointer_impl < const _Tp > > **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Pointer_adapter < _Relative_pointer_impl< _Tp > > **pointer**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **_ExtPtr_allocator** (const _ExtPtr_allocator &__rarg) noexcept
- template<typename _Up >
  _ExtPtr_allocator (const _ExtPtr_allocator< _Up > &__rarg) noexcept
- const std::allocator< _Tp > & **_M_getUnderlyingImp** () const
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *=0)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- template<typename... _Args>
  void **construct** (pointer __p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- template<typename _Up >
  void **destroy** (_Up *__p)
- void **destroy** (pointer __p)
- size_type **max_size** () const noexcept
- template<typename _Up >
  bool **operator!=** (const _ExtPtr_allocator< _Up > &__rarg) const
- bool **operator!=** (const _ExtPtr_allocator &__rarg) const

- template<typename _Up >
  bool **operator==** (const _ExtPtr_allocator< _Up > &__rarg) const
- bool **operator==** (const _ExtPtr_allocator &__rarg) const

Friends

- template<typename _Up >
  void **swap** (_ExtPtr_allocator< _Up > &, _ExtPtr_allocator< _Up > &)

4.98.1 Detailed Description

template<typename _Tp>class __gnu_cxx::_ExtPtr_allocator< _Tp >

An example allocator which uses a non-standard pointer type.

This allocator specifies that containers use a 'relative pointer' as it's pointer type. (See ext/pointer.h) Memory allocation in this example is still performed using std::allocator.

Definition at line 56 of file extptr_allocator.h.

The documentation for this class was generated from the following file:

- extptr_allocator.h

4.99 __gnu_cxx::__detail::_Ffit_finder< _Tp > Class Template Reference

Inheritance diagram for __gnu_cxx::__detail::_Ffit_finder< _Tp >:



Public Types

- typedef std::pair< _Tp, _Tp > argument_type
- typedef bool result_type

Public Member Functions

- std::size_t * **_M_get** () const throw ()
- _Counter_type **_M_offset** () const throw ()
- bool **operator()** (_Block_pair __bp) throw ()

4.99.1 Detailed Description

template<typename _Tp>class __gnu_cxx::__detail::_Ffit_finder< _Tp >

The class which acts as a predicate for applying the first-fit memory allocation policy for the bitmap allocator.

Definition at line 329 of file bitmap_allocator.h.

4.99.2 Member Typedef Documentation

4.99.2.1 typedef std::pair< _Tp, _Tp > std::unary_function< std::pair< _Tp, _Tp > , bool >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.99.2.2 typedef bool std::unary_function< std::pair< _Tp, _Tp > , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- bitmap_allocator.h

4.100 std::_Function_base Class Reference

Inheritance diagram for std::_Function_base:



Public Types

- typedef bool(∗ **_Manager_type**)(_Any_data &, const _Any_data &, _Manager_operation)

Public Member Functions

- bool **_M_empty** () const

Public Attributes

- _Any_data **_M_functor**
- _Manager_type **_M_manager**

Static Public Attributes

- static const size_t **_M_max_align**
- static const size_t **_M_max_size**

4.100.1 Detailed Description

Base class of all polymorphic function object wrappers.

Definition at line 116 of file std_function.h.

The documentation for this class was generated from the following file:

- std_function.h

4.101 std::_Fwd_list_base< _Tp, _Alloc > Struct Template Reference

Inheritance diagram for std::_Fwd_list_base< _Tp, _Alloc >:



Public Types

- typedef _Fwd_list_node< _Tp > **_Node**
- typedef _Fwd_list_const_iterator< _Tp > **const_iterator**
- typedef _Fwd_list_iterator< _Tp > **iterator**

Public Member Functions

- **_Fwd_list_base** (_Node_alloc_type &&__a)
- **_Fwd_list_base** (_Fwd_list_base &&__lst, _Node_alloc_type &&__a, std::true_type)
- **_Fwd_list_base** (_Fwd_list_base &&__lst, _Node_alloc_type &&__a)
- **_Fwd_list_base** (_Fwd_list_base &&)=default
- _Node_alloc_type & **_M_get_Node_allocator** () noexcept
- const _Node_alloc_type & **_M_get_Node_allocator** () const noexcept

Protected Types

- typedef __gnu_cxx::__alloc_traits < _Node_alloc_type > **_Node_alloc_traits**
- typedef __alloc_rebind< _Alloc, _Fwd_list_node< _Tp > > **_Node_alloc_type**

Protected Member Functions

- template<typename... _Args> _Node * **_M_create_node** (_Args &&...__args)
- _Fwd_list_node_base * **_M_erase_after** (_Fwd_list_node_base *__pos)
- _Fwd_list_node_base * **_M_erase_after** (_Fwd_list_node_base *__pos, _Fwd_list_node_base *__last)
- _Node * **_M_get_node** ()
- template<typename... _Args> _Fwd_list_node_base * **_M_insert_after** (const_iterator __pos, _Args &&...__args)
- void **_M_put_node** (_Node *__p)

Protected Attributes

- _Fwd_list_impl **_M_impl**

4.101.1 Detailed Description

template<typename _Tp, typename _Alloc>struct std::_Fwd_list_base< _Tp, _Alloc >

Base class for forward_list.

Definition at line 287 of file forward_list.h.

The documentation for this struct was generated from the following files:

- forward_list.h
- forward_list.tcc

4.102 std::_Fwd_list_const_iterator< _Tp > Struct Template Reference

Public Types

- typedef const _Fwd_list_node< _Tp > **_Node**
- typedef _Fwd_list_const_iterator< _Tp > **_Self**
- typedef ptrdiff_t **difference_type**
- typedef _Fwd_list_iterator< _Tp > **iterator**
- typedef std::forward_iterator_tag **iterator_category**
- typedef const _Tp * **pointer**
- typedef const _Tp & **reference**
- typedef _Tp **value_type**

Public Member Functions

- **_Fwd_list_const_iterator** (const _Fwd_list_node_base *__n) noexcept
- **_Fwd_list_const_iterator** (const iterator &__iter) noexcept
- _Self **_M_next** () const noexcept
- reference **operator*** () const noexcept
- _Self & **operator++** () noexcept
- _Self **operator++** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- const _Fwd_list_node_base * **_M_node**

Friends

- bool operator!= (const _Self &__x, const _Self &__y) noexcept
- bool operator== (const _Self &__x, const _Self &__y) noexcept

4.102.1 Detailed Description

template<typename _Tp>struct std::_Fwd_list_const_iterator< _Tp >

A forward_list::const_iterator.

All the functions are op overloads.

Definition at line 210 of file forward_list.h.

4.102.2 Friends And Related Function Documentation

4.102.2.1 template<typename _Tp > bool operator!= (const _Self & __x, const _Self & __y) [friend]

Forward list const_iterator inequality comparison.

Definition at line 267 of file forward_list.h.

4.102.2.2 template<typename _Tp > bool operator== (const _Self & __x, const _Self & __y) [friend]

Forward list const_iterator equality comparison.

Definition at line 259 of file forward_list.h.

The documentation for this struct was generated from the following file:

- forward_list.h

4.103 std::_Fwd_list_iterator< _Tp > Struct Template Reference

Public Types

- typedef _Fwd_list_node< _Tp > **_Node**
- typedef _Fwd_list_iterator< _Tp > **_Self**
- typedef ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef _Tp * **pointer**
- typedef _Tp & **reference**
- typedef _Tp **value_type**

Public Member Functions

- **_Fwd_list_iterator** (_Fwd_list_node_base *__n) noexcept
- _Self **_M_next** () const noexcept
- reference **operator*** () const noexcept
- _Self & **operator++** () noexcept
- _Self **operator++** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- _Fwd_list_node_base * **_M_node**

Friends

- bool operator!= (const _Self &__x, const _Self &__y) noexcept
- bool operator== (const _Self &__x, const _Self &__y) noexcept

4.103.1 Detailed Description

template<typename _Tp>struct std::_Fwd_list_iterator< _Tp >

A forward_list::iterator.

All the functions are op overloads.

Definition at line 135 of file forward_list.h.

4.103.2 Friends And Related Function Documentation

4.103.2.1 template<typename _Tp > bool operator!= (const _Self & __x, const _Self & __y) [friend]

Forward list iterator inequality comparison.

Definition at line 188 of file forward_list.h.

4.103.2.2 template<typename _Tp > bool operator== (const _Self & __x, const _Self & __y) [friend]

Forward list iterator equality comparison.

Definition at line 180 of file forward_list.h.

The documentation for this struct was generated from the following file:

- forward_list.h

4.104 std::_Fwd_list_node< _Tp > Struct Template Reference

Inheritance diagram for std::_Fwd_list_node< _Tp >:



Public Member Functions

- void **_M_reverse_after** () noexcept
- _Fwd_list_node_base * **_M_transfer_after** (_Fwd_list_node_base *__begin, _Fwd_list_node_base *__end) noexcept
- _Tp * **_M_valptr** () noexcept
- const _Tp * **_M_valptr** () const noexcept

Public Attributes

- _Fwd_list_node_base * **_M_next**
- __gnu_cxx::__aligned_buffer< _Tp > **_M_storage**

4.104.1 Detailed Description

template<typename _Tp>struct std::_Fwd_list_node< _Tp >

A helper node class for forward_list. This is just a linked list with uninitialized storage for a data value in each node. There is a sorting utility method.

Definition at line 113 of file forward_list.h.

The documentation for this struct was generated from the following file:

- forward_list.h

4.105 std::_Fwd_list_node_base Struct Reference

Inheritance diagram for std::_Fwd_list_node_base:



Public Member Functions

- **_Fwd_list_node_base** (_Fwd_list_node_base &&__x) noexcept
- **_Fwd_list_node_base** (const _Fwd_list_node_base &)=delete
- void **_M_reverse_after** () noexcept
- _Fwd_list_node_base * **_M_transfer_after** (_Fwd_list_node_base *__begin, _Fwd_list_node_base *__end) noexcept
- _Fwd_list_node_base & **operator=** (const _Fwd_list_node_base &)=delete
- _Fwd_list_node_base & **operator=** (_Fwd_list_node_base &&__x) noexcept

Public Attributes

- _Fwd_list_node_base * **_M_next**

4.105.1 Detailed Description

A helper basic node class for forward_list. This is just a linked list with nothing inside it. There are purely list shuffling utility methods here.

Definition at line 54 of file forward_list.h.

The documentation for this struct was generated from the following file:

- forward_list.h

4.106 __gnu_parallel::_GuardedIterator< _RAIter, _Compare > Class Template Reference

Public Member Functions

- _GuardedIterator (_RAIter __begin, _RAIter __end, _Compare &__comp)
- operator _RAIter ()
- std::iterator_traits< _RAIter >
  ::value_type & operator* ()
- _GuardedIterator< _RAIter,
  _Compare > & operator++ ()

Friends

- bool operator< (_GuardedIterator< _RAIter, _Compare > &__bi1, _GuardedIterator< _RAIter, _Compare > &__bi2)
- bool operator<= (_GuardedIterator< _RAIter, _Compare > &__bi1, _GuardedIterator< _RAIter, _Compare > &__bi2)

4.106.1 Detailed Description

template<typename _RAIter, typename _Compare>class __gnu_parallel::_GuardedIterator< _RAIter, _Compare >

_Iterator wrapper supporting an implicit supremum at the end of the sequence, dominating all comparisons.

The implicit supremum comes with a performance cost.

Deriving from _RAIter is not possible since _RAIter need not be a class.

Definition at line 73 of file multiway_merge.h.

4.106.2 Constructor & Destructor Documentation

4.106.2.1 template<typename _RAIter , typename _Compare > __gnu_parallel::_GuardedIterator< _RAIter, _Compare >::_GuardedIterator (_RAIter *__begin,* _RAIter *__end,* _Compare & *__comp*) [inline]

Constructor. Sets iterator to beginning of sequence.

Parameters

__begin	Begin iterator of sequence.
__end	End iterator of sequence.
__comp	Comparator provided for associated overloaded compare operators.

Definition at line 91 of file multiway_merge.h.

4.106.3 Member Function Documentation

4.106.3.1 template<typename _RAIter , typename _Compare > __gnu_parallel::_GuardedIterator< _RAIter, _Compare >::operator _RAIter ( ) [inline]

Convert to wrapped iterator.

Returns

Wrapped iterator.

Definition at line 112 of file multiway_merge.h.

4.106.3.2 template<typename _RAIter , typename _Compare > std::iterator_traits<_RAIter>::value_type& __gnu_parallel::_GuardedIterator< _RAIter, _Compare >::operator*( ) [inline]

Dereference operator.

Returns

Referenced element.

Definition at line 107 of file multiway_merge.h.

4.106.3.3 template<typename _RAIter , typename _Compare > _GuardedIterator<_RAIter, _Compare>& __gnu_parallel::_GuardedIterator< _RAIter, _Compare >::operator++ ( ) [inline]

Pre-increment operator.

Returns

This.

Definition at line 98 of file multiway_merge.h.

4.106.4 Friends And Related Function Documentation

4.106.4.1 template<typename _RAIter , typename _Compare > bool operator< (_GuardedIterator< _RAIter, _Compare > & *__bi1*, _GuardedIterator< _RAIter, _Compare > & *__bi2*) [friend]

Compare two elements referenced by guarded iterators.

Parameters

__bi1	First iterator.
__bi2	Second iterator.

Returns

`true` if less.

Definition at line 120 of file multiway_merge.h.

4.106.4.2 template<typename _RAIter , typename _Compare > bool operator<= (_GuardedIterator< _RAIter, _Compare > & *__bi1*, _GuardedIterator< _RAIter, _Compare > & *__bi2*) [friend]

Compare two elements referenced by guarded iterators.

Parameters

__bi1	First iterator.
__bi2	Second iterator.

Returns

`True` if less equal.

Definition at line 135 of file multiway_merge.h.

The documentation for this class was generated from the following file:

- multiway_merge.h

4.107 std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code > Struct Template Reference

4.107.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash, bool __cache_hash_code>struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >

Primary class template _Hash_code_base.

Encapsulates two policy issues that aren't quite orthogonal. (1) the difference between using a ranged hash function and using the combination of a hash function and a range-hashing function. In the former case we don't have such things as hash codes, so we have a dummy type as placeholder. (2) Whether or not we cache hash codes. Caching hash codes is meaningless if we have a ranged hash function.

We also put the key extraction objects here, for convenience. Each specialization derives from one or more of the template parameters to benefit from Ebo. This is important as this type is inherited in some cases by the _Local_iterator_base type used to implement local_iterator and const_local_iterator. As with any iterator type we prefer to make it as small as possible.

Primary template is unused except as a hook for specializations.

Definition at line 1175 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.108 std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >:

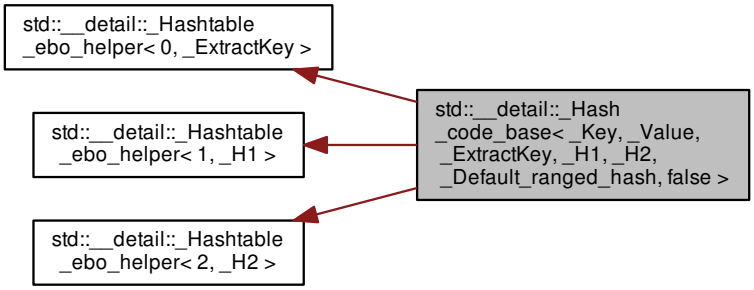

Public Types

- typedef _H1 **hasher**

Public Member Functions

- hasher **hash_function** () const

Protected Types

- typedef std::size_t **__hash_code**
- typedef _Hash_node< _Value, false > **__node_type**

Protected Member Functions

- **_Hash_code_base** (const _ExtractKey &__ex, const _H1 &__h1, const _H2 &__h2, const _Default_ranged_hash &)
- std::size_t **_M_bucket_index** (const _Key &, __hash_code __c, std::size_t __bkt_count) const
- std::size_t **_M_bucket_index** (const __node_type *__p, std::size_t __bkt_count) const noexcept(noexcept(declval< const _H1 & >()(declval< const _Key & >()))&&noexcept(declval< const _H2 & >()((__hash_code) 0,(std::size_t) 0)))
- void **_M_copy_code** (__node_type *, const __node_type *) const
- const _ExtractKey & **_M_extract** () const
- const _H1 & **_M_h1** () const
- const _H2 & **_M_h2** () const
- __hash_code **_M_hash_code** (const _Key &__k) const
- void **_M_store_code** (__node_type *, __hash_code) const
- void **_M_swap** (_Hash_code_base &__x)

Friends

- struct **_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >**

4.108.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2>struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >

Specialization: hash function and range-hashing function, no caching of hash codes. Provides typedef and accessor required by C++ 11.

Definition at line 1254 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.109 std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >:

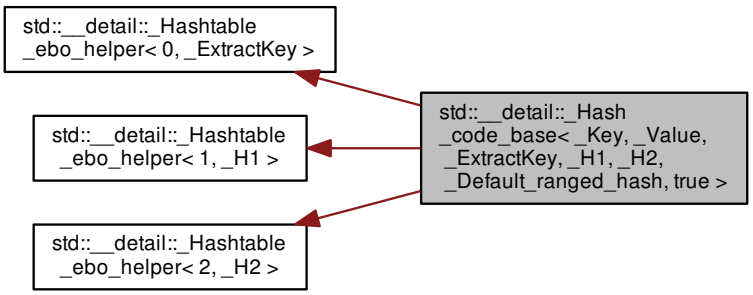

Public Types

- typedef _H1 **hasher**

Public Member Functions

- hasher **hash_function** () const

Protected Types

- typedef std::size_t **__hash_code**

- typedef _Hash_node< _Value, true > **__node_type**

Protected Member Functions

- **_Hash_code_base** (const _ExtractKey &__ex, const _H1 &__h1, const _H2 &__h2, const _Default_ranged_hash &)
- std::size_t **_M_bucket_index** (const _Key &, __hash_code __c, std::size_t __bkt_count) const
- std::size_t **_M_bucket_index** (const __node_type *__p, std::size_t __bkt_count) const noexcept(noexcept(declval< const _H2 & >()((__hash_code) 0,(std::size_t) 0)))
- void **_M_copy_code** (__node_type *__to, const __node_type *__from) const
- const _ExtractKey & **_M_extract** () const
- const _H1 & **_M_h1** () const
- const _H2 & **_M_h2** () const
- __hash_code **_M_hash_code** (const _Key &__k) const
- void **_M_store_code** (__node_type *__n, __hash_code __c) const
- void **_M_swap** (_Hash_code_base &__x)

Friends

- struct **_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >**

4.109.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2>struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >

Specialization: hash function and range-hashing function, caching hash codes. H is provided but ignored. Provides typedef and accessor required by C++ 11.

Definition at line 1341 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.110 std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >:

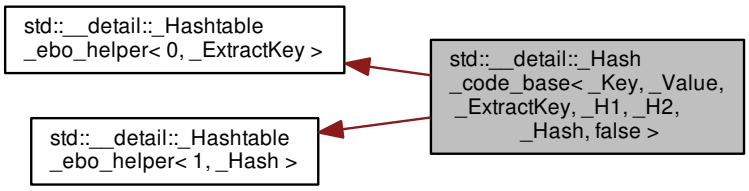

Protected Types

- typedef void * **__hash_code**
- typedef _Hash_node< _Value, false > **__node_type**

Protected Member Functions

- **_Hash_code_base** (const _ExtractKey &__ex, const _H1 &, const _H2 &, const _Hash &__h)
- std::size_t **_M_bucket_index** (const _Key &__k, __hash_code, std::size_t __bkt_count) const
- std::size_t **_M_bucket_index** (const __node_type *__p, std::size_t __bkt_count) const noexcept(noexcept(declval< const _Hash & >()(declval< const _Key & >(),(std::size_t) 0)))
- void **_M_copy_code** (__node_type *, const __node_type *) const
- const _ExtractKey & **_M_extract** () const
- __hash_code **_M_hash_code** (const _Key &__key) const
- const _Hash & **_M_ranged_hash** () const
- void **_M_store_code** (__node_type *, __hash_code) const
- void **_M_swap** (_Hash_code_base &__x)

4.110.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash>struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >

Specialization: ranged hash function, no caching hash codes. H1 and H2 are provided but ignored. We define a dummy hash code type.

Definition at line 1181 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.111 std::__detail::_Hash_node< _Value, _Cache_hash_code > Struct Template Reference

4.111.1 Detailed Description

template<typename _Value, bool _Cache_hash_code>struct std::__detail::_Hash_node< _Value, _Cache_hash_code >

Primary template struct _Hash_node.

Definition at line 256 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.112 std::__detail::_Hash_node< _Value, false > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_node< _Value, false >:

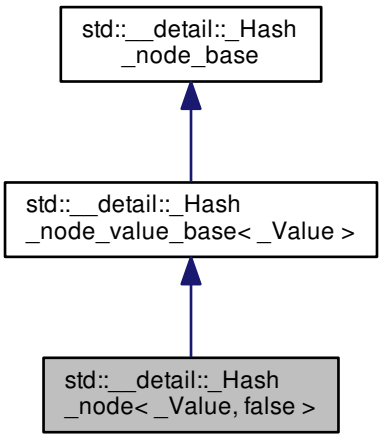

Public Types

- typedef _Value **value_type**

Public Member Functions

- _Hash_node * **_M_next** () const noexcept
- _Value & **_M_v** () noexcept
- const _Value & **_M_v** () const noexcept
- _Value * **_M_valptr** () noexcept
- const _Value * **_M_valptr** () const noexcept

Public Attributes

- _Hash_node_base * **_M_nxt**
- __gnu_cxx::__aligned_buffer < _Value > **_M_storage**

4.112.1 Detailed Description

template<typename _Value>struct std::__detail::_Hash_node< _Value, false >

Specialization for nodes without caches, struct _Hash_node.

Base class is __detail::_Hash_node_value_base.

Definition at line 279 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.113 std::__detail::_Hash_node< _Value, true > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_node< _Value, true >:

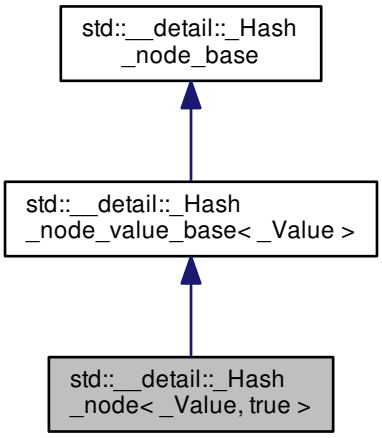

Public Types

- typedef _Value **value_type**

Public Member Functions

- _Hash_node * **_M_next** () const noexcept
- _Value & **_M_v** () noexcept
- const _Value & **_M_v** () const noexcept
- _Value * **_M_valptr** () noexcept
- const _Value * **_M_valptr** () const noexcept

Public Attributes

- std::size_t **_M_hash_code**
- _Hash_node_base * **_M_nxt**
- __gnu_cxx::__aligned_buffer
  < _Value > **_M_storage**

4.113.1 Detailed Description

template<typename _Value>struct std::__detail::_Hash_node< _Value, true >

Specialization for nodes with caches, struct _Hash_node.

Base class is __detail::_Hash_node_value_base.

Definition at line 264 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.114 std::__detail::_Hash_node_base Struct Reference

Inheritance diagram for std::__detail::_Hash_node_base:

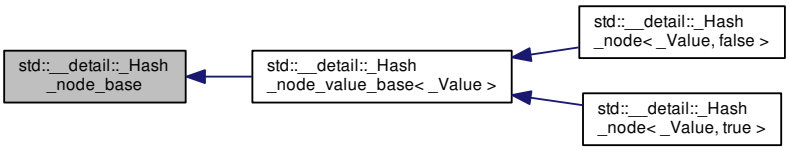

Public Member Functions

- **_Hash_node_base** (_Hash_node_base *__next) noexcept

Public Attributes

- _Hash_node_base * **_M_nxt**

4.114.1 Detailed Description

struct _Hash_node_base

Nodes, used to wrap elements stored in the hash table. A policy template parameter of class template _Hashtable controls whether nodes also store a hash code. In some cases (e.g. strings) this may be a performance win.

Definition at line 214 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.115 std::__detail::_Hash_node_value_base< _Value > Struct Template Reference

Inheritance diagram for std::__detail::_Hash_node_value_base< _Value >:

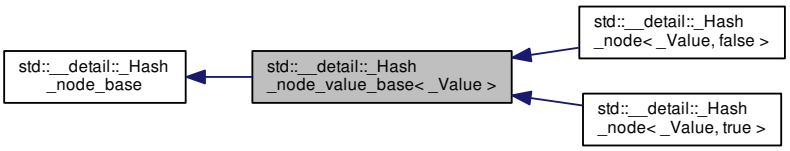

Public Types

- typedef _Value **value_type**

Public Member Functions

- _Value & **_M_v** () noexcept
- const _Value & **_M_v** () const noexcept
- _Value * **_M_valptr** () noexcept
- const _Value * **_M_valptr** () const noexcept

Public Attributes

- _Hash_node_base * **_M_nxt**
- __gnu_cxx::__aligned_buffer
  < _Value > **_M_storage**

4.115.1 Detailed Description

template<typename _Value>struct std::__detail::_Hash_node_value_base< _Value >

struct _Hash_node_value_base

Node type with the value to store.

Definition at line 229 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.116 std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits > Class Template Reference

Inheritance diagram for std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >:

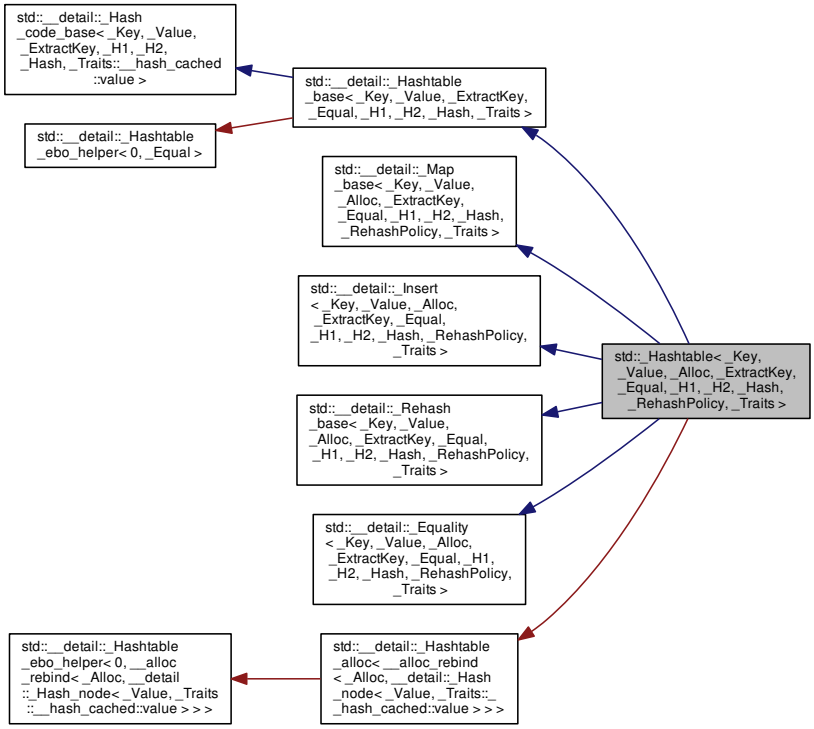

Public Types

- typedef _Alloc **allocator_type**
- using **const_iterator** = typename __hashtable_base::const_iterator
- using **const_local_iterator** = typename __hashtable_base::const_local_iterator
- typedef __value_alloc_traits::const_pointer **const_pointer**
- typedef const value_type & **const_reference**
- using **difference_type** = typename __hashtable_base::difference_type
- using **iterator** = typename __hashtable_base::iterator
- typedef _Equal **key_equal**
- typedef _Key **key_type**
- using **local_iterator** = typename __hashtable_base::local_iterator
- typedef __value_alloc_traits::pointer **pointer**
- typedef value_type & **reference**
- using **size_type** = typename __hashtable_base::size_type
- typedef _Value **value_type**

Public Member Functions

- **_Hashtable** (size_type __bkt_count_hint, const _H1 &, const _H2 &, const _Hash &, const _Equal &, const _ExtractKey &, const allocator_type &)
- template<typename _InputIterator >
  _Hashtable (_InputIterator __first, _InputIterator __last, size_type __bkt_count_hint, const _H1 &, const _H2 &, const _Hash &, const _Equal &, const _ExtractKey &, const allocator_type &)
- **_Hashtable** (const _Hashtable &)
- **_Hashtable** (_Hashtable &&) noexcept
- **_Hashtable** (const _Hashtable &, const allocator_type &)
- **_Hashtable** (_Hashtable &&, const allocator_type &)
- **_Hashtable** (const allocator_type &__a)
- **_Hashtable** (size_type __bkt_count_hint, const _H1 &__hf=_H1(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator >
  _Hashtable (_InputIterator __f, _InputIterator __l, size_type __bkt_count_hint=0, const _H1 &__hf=_H1(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **_Hashtable** (initializer_list< value_type > __l, size_type __bkt_count_hint=0, const _H1 &__hf=_H1(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- const _RehashPolicy & **__rehash_policy** () const
- void **__rehash_policy** (const _RehashPolicy &__pol)
- template<typename... _Args>
  auto **_M_emplace** (true_type, _Args &&...__args) -> pair< iterator, bool >
- template<typename... _Args>
  auto **_M_emplace** (const_iterator __hint, false_type, _Args &&...__args) -> iterator
- template<typename _Arg , typename _NodeGenerator >
  auto **_M_insert** (_Arg &&__v, const _NodeGenerator &__node_gen, true_type, size_type __n_elt) -> pair< iterator, bool >
- template<typename _Arg , typename _NodeGenerator >
  auto **_M_insert** (const_iterator __hint, _Arg &&__v, const _NodeGenerator &__node_gen, false_type) -> iterator
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- local_iterator **begin** (size_type __bkt)
- const_local_iterator **begin** (size_type __bkt) const
- size_type **bucket** (const key_type &__k) const
- size_type **bucket_count** () const noexcept
- size_type **bucket_size** (size_type __bkt) const
- const_iterator **cbegin** () const noexcept
- const_local_iterator **cbegin** (size_type __bkt) const
- const_iterator **cend** () const noexcept
- const_local_iterator **cend** (size_type __bkt) const
- void **clear** () noexcept
- size_type **count** (const key_type &__k) const
- template<typename... _Args>
  __ireturn_type **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __hint, _Args &&...__args)
- bool **empty** () const noexcept
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- local_iterator **end** (size_type __bkt)
- const_local_iterator **end** (size_type __bkt) const

- std::pair< iterator, iterator > **equal_range** (const key_type &__k)
- std::pair< const_iterator, const_iterator > **equal_range** (const key_type &__k) const
- iterator **erase** (const_iterator)
- iterator **erase** (iterator __it)
- size_type **erase** (const key_type &__k)
- iterator **erase** (const_iterator, const_iterator)
- iterator **find** (const key_type &__k)
- const_iterator **find** (const key_type &__k) const
- allocator_type **get_allocator** () const noexcept
- key_equal **key_eq** () const
- float **load_factor** () const noexcept
- size_type **max_bucket_count** () const noexcept
- size_type **max_size** () const noexcept
- _Hashtable & **operator=** (const _Hashtable &__ht)
- _Hashtable & **operator=** (_Hashtable &&__ht) noexcept(__node_alloc_traits::_S_nothrow_move()&&is_nothrow_move_assignable< _H1 >::value &&is_nothrow_move_assignable< _Equal >::value)
- _Hashtable & **operator=** (initializer_list< value_type > __l)
- void **rehash** (size_type __bkt_count)
- size_type **size** () const noexcept
- void **swap** (_Hashtable &) noexcept(__and_< __is_nothrow_swappable< _H1 >, __is_nothrow_swappable< _Equal >>::value)

Protected Member Functions

- size_type **_M_bucket_index** (__node_type *__n) const noexcept
- size_type **_M_bucket_index** (const key_type &__k, __hash_code __c) const
- template<typename... _Args> std::pair< iterator, bool > **_M_emplace** (true_type, _Args &&...__args)
- template<typename... _Args> iterator **_M_emplace** (false_type __uk, _Args &&...__args)
- template<typename... _Args> iterator **_M_emplace** (const_iterator, true_type __uk, _Args &&...__args)
- template<typename... _Args> iterator **_M_emplace** (const_iterator, false_type, _Args &&...__args)
- const _Equal & **_M_eq** () const
- bool **_M_equals** (const _Key &__k, __hash_code __c, __node_type *__n) const
- size_type **_M_erase** (true_type, const key_type &)
- size_type **_M_erase** (false_type, const key_type &)
- iterator **_M_erase** (size_type __bkt, __node_base *__prev_n, __node_type *__n)
- __node_base * **_M_find_before_node** (size_type, const key_type &, __hash_code) const
- __node_type * **_M_find_node** (size_type __bkt, const key_type &__key, __hash_code __c) const
- __node_base * **_M_get_previous_node** (size_type __bkt, __node_base *__n)
- template<typename _Arg , typename _NodeGenerator > std::pair< iterator, bool > **_M_insert** (_Arg &&, const _NodeGenerator &, true_type, size_type=1)
- template<typename _Arg , typename _NodeGenerator > iterator **_M_insert** (_Arg &&__arg, const _NodeGenerator &__node_gen, false_type __uk)
- template<typename _Arg , typename _NodeGenerator > iterator **_M_insert** (const_iterator, _Arg &&__arg, const _NodeGenerator &__node_gen, true_type __uk)
- template<typename _Arg , typename _NodeGenerator > iterator **_M_insert** (const_iterator, _Arg &&, const _NodeGenerator &, false_type)

- void **_M_insert_bucket_begin** (size_type, __node_type *)
- iterator **_M_insert_multi_node** (__node_type *__hint, const key_type &__k, __hash_code __code, __node_type *__n)
- iterator **_M_insert_unique_node** (const key_type &__k, size_type __bkt, __hash_code __code, __node_type *__n, size_type __n_elt=1)
- void **_M_remove_bucket_begin** (size_type __bkt, __node_type *__next_n, size_type __next_bkt)
- void **_M_swap** (_Hashtable_base &__x)

Private Types

- using **__bucket_alloc_traits** = std::allocator_traits< __bucket_alloc_type >
- using **__bucket_alloc_type** = __alloc_rebind< __node_alloc_type, __bucket_type >

Private Member Functions

- __bucket_type * **_M_allocate_buckets** (std::size_t __bkt_count)
- __node_type * **_M_allocate_node** (_Args &&...__args)
- void **_M_deallocate_buckets** (__bucket_type *, std::size_t __bkt_count)
- void **_M_deallocate_node** (__node_type *__n)
- void **_M_deallocate_node_ptr** (__node_type *__n)
- void **_M_deallocate_nodes** (__node_type *__n)
- __node_alloc_type & **_M_node_allocator** ()
- const __node_alloc_type & **_M_node_allocator** () const

Friends

- template<typename _Keya , typename _Valuea , typename _Alloca , typename _ExtractKeya , typename _Equala , typename _H1a , typename _H2a , typename _Hasha , typename _RehashPolicya , typename _Traitsa , bool _Unique_keysa>
  struct **__detail::_Equality**
- template<typename _Keya , typename _Valuea , typename _Alloca , typename _ExtractKeya , typename _Equala , typename _H1a , typename _H2a , typename _Hasha , typename _RehashPolicya , typename _Traitsa , bool _Constant_iteratorsa>
  struct **__detail::_Insert**
- template<typename _Keya , typename _Valuea , typename _Alloca , typename _ExtractKeya , typename _Equala , typename _H1a , typename _H2a , typename _Hasha , typename _RehashPolicya , typename _Traitsa >
  struct **__detail::_Insert_base**
- template<typename _Keya , typename _Valuea , typename _Alloca , typename _ExtractKeya , typename _Equala , typename _H1a , typename _H2a , typename _Hasha , typename _RehashPolicya , typename _Traitsa , bool _Unique_keysa>
  struct **__detail::_Map_base**

4.116.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>class std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Primary class template _Hashtable.

Template Parameters

_Value	CopyConstructible type.
_Key	CopyConstructible type.
_Alloc	An allocator type ([lib.allocator.requirements]) whose _Alloc::value_type is _Value. As a conforming extension, we allow for _Alloc::value_type != _Value.
_ExtractKey	Function object that takes an object of type _Value and returns a value of type _Key.
_Equal	Function object that takes two objects of type k and returns a bool-like value that is true if the two objects are considered equal.
_H1	The hash function. A unary function object with argument type _Key and result type size_t. Return values should be distributed over the entire range [0, numeric_limits<size_t>:max()].
_H2	The range-hashing function (in the terminology of Tavori and Dreizin). A binary function object whose argument types and result type are all size_t. Given arguments r and N, the return value is in the range [0, N).
_Hash	The ranged hash function (Tavori and Dreizin). A binary function whose argument types are _Key and size_t and whose result type is size_t. Given arguments k and N, the return value is in the range [0, N). Default: hash(k, N) = h2(h1(k), N). If _Hash is anything other than the default, _H1 and _H2 are ignored.
_RehashPolicy	Policy class with three members, all of which govern the bucket count. _M_next_bkt(n) returns a bucket count no smaller than n. _M_bkt_for_elements(n) returns a bucket count appropriate for an element count of n. _M_need_rehash(n_bkt, n_elt, n_ins) determines whether, if the current bucket count is n_bkt and the current element count is n_elt, we need to increase the bucket count. If so, returns make_pair(true, n), where n is the new bucket count. If not, returns make_pair(false, <anything>)
_Traits	Compile-time class with three boolean std::integral_constant members: __cache_hash_code, __constant_iterators, __unique_keys.

Each _Hashtable data structure has:

- _Bucket[] _M_buckets
- _Hash_node_base _M_before_begin
- size_type _M_bucket_count
- size_type _M_element_count

with _Bucket being _Hash_node* and _Hash_node containing:

- _Hash_node* _M_next
- Tp _M_value
- size_t _M_hash_code if cache_hash_code is true

In terms of Standard containers the hashtable is like the aggregation of:

- std::forward_list<_Node> containing the elements
- std::vector<std::forward_list<_Node>::iterator> representing the buckets

The non-empty buckets contain the node before the first node in the bucket. This design makes it possible to implement something like a std::forward_list::insert_after on container insertion and std::forward_list::erase_after on container erase calls. _M_before_begin is equivalent to std::forward_list::before_begin. Empty buckets contain nullptr. Note that

one of the non-empty buckets contains &_M_before_begin which is not a dereferenceable node so the node pointer in a bucket shall never be dereferenced, only its next node can be.

Walking through a bucket's nodes requires a check on the hash code to see if each node is still in the bucket. Such a design assumes a quite efficient hash functor and is one of the reasons it is highly advisable to set __cache_hash_code to true.

The container iterators are simply built from nodes. This way incrementing the iterator is perfectly efficient independent of how many empty buckets there are in the container.

On insert we compute the element's hash code and use it to find the bucket index. If the element must be inserted in an empty bucket we add it at the beginning of the singly linked list and make the bucket point to _M_before_begin. The bucket that used to point to _M_before_begin, if any, is updated to point to its new before begin node.

On erase, the simple iterator design requires using the hash functor to get the index of the bucket to update. For this reason, when __cache_hash_code is set to false the hash functor must not throw and this is enforced by a static assertion.

Functionality is implemented by decomposition into base classes, where the derived _Hashtable class is used in _Map-_base, _Insert, _Rehash_base, and _Equality base classes to access the "this" pointer. _Hashtable_base is used in the base classes as a non-recursive, fully-completed-type so that detailed nested type information, such as iterator type and node type, can be used. This is similar to the "Curiously Recurring Template Pattern" (CRTP) technique, but uses a reconstructed, not explicitly passed, template pattern.

Base class templates are:

- __detail::_Hashtable_base
- __detail::_Map_base
- __detail::_Insert
- __detail::_Rehash_base
- __detail::_Equality

Definition at line 173 of file bits/hashtable.h.

The documentation for this class was generated from the following file:

- bits/hashtable.h

4.117 std::__detail::_Hashtable_alloc< _NodeAlloc > Struct Template Reference

Inheritance diagram for std::__detail::_Hashtable_alloc< _NodeAlloc >:

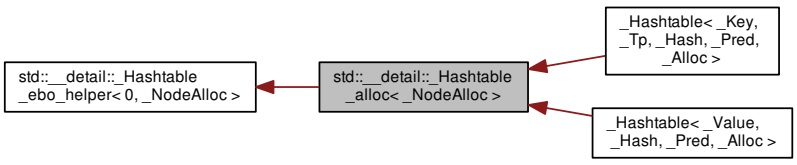

Public Types

- using **__bucket_alloc_traits** = std::allocator_traits< __bucket_alloc_type >
- using **__bucket_alloc_type** = __alloc_rebind< __node_alloc_type, __bucket_type >
- using **__bucket_type** = __node_base *
- using **__node_alloc_traits** = __gnu_cxx::__alloc_traits< __node_alloc_type >
- using **__node_alloc_type** = _NodeAlloc
- using **__node_base** = __detail::_Hash_node_base
- using **__node_type** = typename _NodeAlloc::value_type
- using **__value_alloc_traits** = typename __node_alloc_traits::template rebind_traits< typename __node_type::value_type >

Public Member Functions

- **_Hashtable_alloc** (const _Hashtable_alloc &)=default
- **_Hashtable_alloc** (_Hashtable_alloc &&)=default
- template<typename _Alloc >
  _Hashtable_alloc (_Alloc &&__a)
- __bucket_type * **_M_allocate_buckets** (std::size_t __bkt_count)
- template<typename... _Args>
  __node_type * **_M_allocate_node** (_Args &&...__args)
- template<typename... _Args>
  auto **_M_allocate_node** (_Args &&...__args) -> __node_type *
- void **_M_deallocate_buckets** (__bucket_type *, std::size_t __bkt_count)
- void **_M_deallocate_node** (__node_type *__n)
- void **_M_deallocate_node_ptr** (__node_type *__n)
- void **_M_deallocate_nodes** (__node_type *__n)
- __node_alloc_type & **_M_node_allocator** ()
- const __node_alloc_type & **_M_node_allocator** () const

4.117.1 Detailed Description

template<typename _NodeAlloc>struct std::__detail::_Hashtable_alloc< _NodeAlloc >

This type deals with all allocation and keeps an allocator instance through inheritance to benefit from EBO when possible.

Definition at line 98 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.118 std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits > Struct Template Reference

Inheritance diagram for std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >:

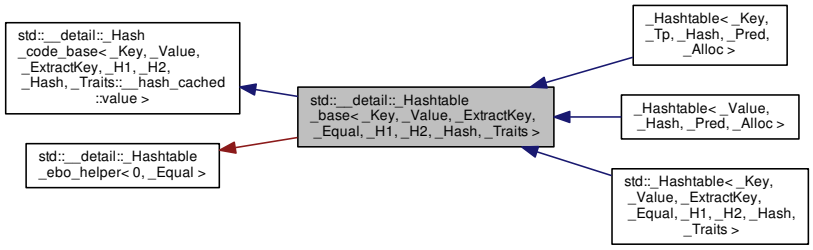

Public Types

- using **__constant_iterators** = typename __traits_type::__constant_iterators
- using **__hash_cached** = typename __traits_type::__hash_cached
- using **__hash_code** = typename __hash_code_base::__hash_code
- using **__hash_code_base** = _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __hash_cached-::value >
- using **__ireturn_type** = typename std::conditional< __unique_keys::value, std::pair< iterator, bool >, iterator >::type
- using **__node_type** = typename __hash_code_base::__node_type
- using **__traits_type** = _Traits
- using **__unique_keys** = typename __traits_type::__unique_keys
- using **const_iterator** = __detail::_Node_const_iterator< value_type, __constant_iterators::value, __hash_-cached::value >
- using **const_local_iterator** = __detail::_Local_const_iterator< key_type, value_type, _ExtractKey, _H1, _H2, _-Hash, __constant_iterators::value, __hash_cached::value >
- typedef std::ptrdiff_t **difference_type**
- using **iterator** = __detail::_Node_iterator< value_type, __constant_iterators::value, __hash_cached::value >
- typedef _Equal **key_equal**
- typedef _Key **key_type**
- using **local_iterator** = __detail::_Local_iterator< key_type, value_type, _ExtractKey, _H1, _H2, _Hash, __-constant_iterators::value, __hash_cached::value >
- typedef std::size_t **size_type**
- typedef _Value **value_type**

Protected Member Functions

- **_Hashtable_base** (const _ExtractKey &__ex, const _H1 &__h1, const _H2 &__h2, const _Hash &__hash, const _Equal &__eq)
- const _Equal & **_M_eq** () const
- bool **_M_equals** (const _Key &__k, __hash_code __c, __node_type *__n) const
- void **_M_swap** (_Hashtable_base &__x)

4.118.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _Traits>struct std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >

Primary class template _Hashtable_base.

Helper class adding management of _Equal functor to _Hash_code_base type.

Base class templates are:

- __detail::_Hash_code_base
- __detail::_Hashtable_ebo_helper

Definition at line 58 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.119 std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, __use_ebo > Struct Template Reference

4.119.1 Detailed Description

template<int _Nm, typename _Tp, bool __use_ebo = !__is_final(_Tp) && __is_empty(_Tp)>struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, __use_ebo >

Primary class template _Hashtable_ebo_helper.

Helper class using EBO when it is not forbidden (the type is not final) and when it is worth it (the type is empty.)

Definition at line 1105 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.120 std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false > Struct Template Reference

Public Member Functions

- template<typename _OtherTp >
  _Hashtable_ebo_helper (_OtherTp &&__tp)
- const _Tp & **_M_cget** () const
- _Tp & **_M_get** ()

4.120.1 Detailed Description

template<int _Nm, typename _Tp>struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false >

Specialization not using EBO.

Definition at line 1125 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.121 std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true > Struct Template Reference

Inherits _Tp.

Public Member Functions

- template<typename _OtherTp >
  _Hashtable_ebo_helper (_OtherTp &&__tp)
- const _Tp & **_M_cget** () const
- _Tp & **_M_get** ()

4.121.1 Detailed Description

template<int _Nm, typename _Tp>struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true >

Specialization using EBO.

Definition at line 1109 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.122 std::__detail::_Hashtable_traits< _Cache_hash_code, _Constant_iterators, _Unique_keys > Struct Template Reference

Public Types

- using **__constant_iterators** = __bool_constant< _Constant_iterators >
- using **__hash_cached** = __bool_constant< _Cache_hash_code >
- using **__unique_keys** = __bool_constant< _Unique_keys >

4.122.1 Detailed Description

template<bool _Cache_hash_code, bool _Constant_iterators, bool _Unique_keys>struct std::__detail::_Hashtable_traits< _Cache_hash_code, _Constant_iterators, _Unique_keys >

struct _Hashtable_traits

Important traits for hash tables.

Template Parameters

_Cache_hash_code	Boolean value. True if the value of the hash function is stored along with the value. This is a time-space tradeoff. Storing it may improve lookup speed by reducing the number of times we need to call the _Hash or _Equal functors.

_Constant_iterators	Boolean value. True if iterator and const_iterator are both constant iterator types. This is true for unordered_set and unordered_multiset, false for unordered_map and unordered_multimap.
_Unique_keys	Boolean value. True if the return value of _Hashtable::count(k) is always at most one, false if it may be an arbitrary number. This is true for unordered_set and unordered_map, false for unordered_multiset and unordered_multimap.

Definition at line 199 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.123 __gnu_pbds::detail::pat_trie_base::_Head< _ATraits, Metadata > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Head< _ATraits, Metadata >:

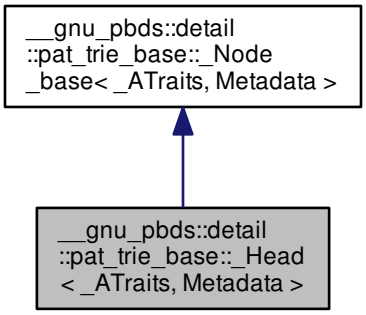

Public Types

- typedef _ATraits::const_iterator **a_const_iterator**
- typedef detail::rebind_traits < _Alloc, _ATraits > ::const_pointer **a_const_pointer**
- typedef _ATraits **access_traits**
- typedef _Alloc **allocator_type**
- typedef _Node_base< _ATraits, Metadata > **base_type**
- typedef base_type::node_pointer **node_pointer**
- typedef base_type::type_traits **type_traits**

Public Attributes

- node_pointer **m_p_max**
- node_pointer **m_p_min**

- node_pointer **m_p_parent**
- const node_type **m_type**

4.123.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Head< _ATraits, Metadata >

Head node for PATRICIA tree.

Definition at line 131 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.124 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >:

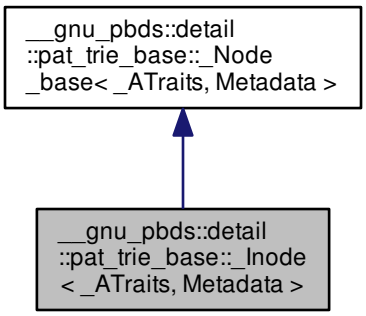

Classes

- struct const_iterator
- struct iterator

Public Types

- enum { **arr_size** }
- typedef detail::rebind_traits < _Alloc, node_pointer > **__rebind_np**
- typedef base_type::allocator_type **_Alloc**
- typedef base_type::access_traits **access_traits**
- typedef _Alloc **allocator_type**

- typedef _Node_base< _ATraits, Metadata > **base_type**
- typedef __rebind_np::pointer **node_pointer_pointer**
- typedef __rebind_np::reference **node_pointer_reference**
- typedef _Alloc::size_type **size_type**
- typedef base_type::type_traits **type_traits**
- typedef type_traits::value_type **value_type**

Public Member Functions

- **_Inode** (size_type, const a_const_iterator)
- node_pointer **add_child** (node_pointer, a_const_iterator, a_const_iterator, a_const_pointer)
- const_iterator **begin** () const
- iterator **begin** ()
- const_iterator **end** () const
- iterator **end** ()
- iterator **get_child_it** (a_const_iterator, a_const_iterator, a_const_pointer)
- node_pointer **get_child_node** (a_const_iterator, a_const_iterator, a_const_pointer)
- node_const_pointer **get_child_node** (a_const_iterator, a_const_iterator, a_const_pointer) const
- size_type **get_e_ind** () const
- node_const_pointer **get_join_child** (node_const_pointer, a_const_pointer) const
- node_pointer **get_join_child** (node_pointer, a_const_pointer)
- node_pointer **get_lower_bound_child_node** (a_const_iterator, a_const_iterator, size_type, a_const_pointer)
- leaf_pointer **leftmost_descendant** ()
- leaf_const_pointer **leftmost_descendant** () const
- a_const_iterator **pref_b_it** () const
- a_const_iterator **pref_e_it** () const
- void **remove_child** (node_pointer)
- void **remove_child** (iterator)
- void **replace_child** (node_pointer, a_const_iterator, a_const_iterator, a_const_pointer)
- leaf_pointer **rightmost_descendant** ()
- leaf_const_pointer **rightmost_descendant** () const
- bool **should_be_mine** (a_const_iterator, a_const_iterator, size_type, a_const_pointer) const
- void **update_prefixes** (a_const_pointer)

Public Attributes

- node_pointer **m_p_parent**
- const node_type **m_type**

4.124.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >

Internal node type, PATRICIA tree.

Definition at line 211 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.125 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators > Struct Template Reference

Inheritance diagram for std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators >:

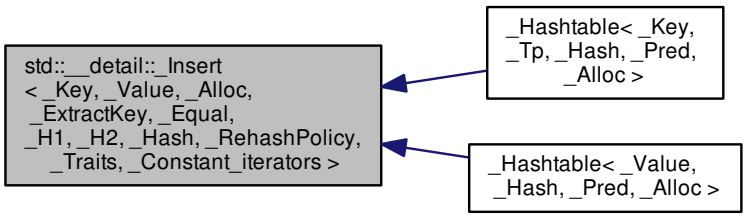

4.125.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits, bool _Constant_iterators = _Traits::__constant_iterators::value>struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators >

Primary class template _Insert.

Defines `insert` member functions that depend on _Hashtable policies, via partial specializations.

Definition at line 935 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.126 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference

Inheritance diagram for std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >:



Public Types

- using **__base_type** = _Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- using **__hashtable** = typename __base_type::__hashtable
- using **__ireturn_type** = typename __base_type::__ireturn_type
- template<typename _Pair >
  using **__is_cons** = std::is_constructible< value_type, _Pair && >
- using **__unique_keys** = typename __base_type::__unique_keys
- template<typename _Pair >
  using **_IFcons** = std::enable_if< __is_cons< _Pair >::value >
- template<typename _Pair >
  using **_IFconsp** = typename _IFcons< _Pair >::type
- using **const_iterator** = typename __base_type::const_iterator
- using **iterator** = typename __base_type::iterator
- using **value_type** = typename __base_type::value_type

Public Member Functions

- __ireturn_type **insert** (const value_type &__v)
- iterator **insert** (const_iterator __hint, const value_type &__v)
- void **insert** (initializer_list< value_type > __l)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- template<typename _Pair , typename = _IFconsp<_Pair>>
  __ireturn_type **insert** (_Pair &&__v)
- template<typename _Pair , typename = _IFconsp<_Pair>>
  iterator **insert** (const_iterator __hint, _Pair &&__v)

Protected Types

- using **__hashtable_base** = _Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- using **__node_alloc_type** = __alloc_rebind< _Alloc, __node_type >
- using **__node_gen_type** = _AllocNode< __node_alloc_type >
- using **__node_type** = _Hash_node< _Value, _Traits::__hash_cached::value >
- using **size_type** = typename __hashtable_base::size_type

Protected Member Functions

- __hashtable & **_M_conjure_hashtable** ()
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, true_type)
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, false_type)

4.126.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >

Specialization.

Definition at line 989 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.127 std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference

Inheritance diagram for std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >:



Public Types

- using **__base_type** = _Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- using **__hashtable** = typename __base_type::__hashtable
- using **__hashtable_base** = _Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- using **__ireturn_type** = typename __hashtable_base::__ireturn_type
- using **__node_gen_type** = typename __base_type::__node_gen_type
- using **__unique_keys** = typename __base_type::__unique_keys
- using **const_iterator** = typename __base_type::const_iterator
- using **iterator** = typename __base_type::iterator
- using **value_type** = typename __base_type::value_type

Public Member Functions

- __ireturn_type **insert** (const value_type &__v)
- iterator **insert** (const_iterator __hint, const value_type &__v)
- void **insert** (initializer_list< value_type > __l)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- __ireturn_type **insert** (value_type &&__v)
- iterator **insert** (const_iterator __hint, value_type &&__v)

Protected Types

- using **__node_alloc_type** = __alloc_rebind< _Alloc, __node_type >
- using **__node_type** = _Hash_node< _Value, _Traits::__hash_cached::value >
- using **size_type** = typename __hashtable_base::size_type

Protected Member Functions

- __hashtable & **_M_conjure_hashtable** ()
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, true_type)
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, false_type)

4.127.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >

Specialization.

Definition at line 942 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.128 std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits > Struct Template Reference

Inheritance diagram for std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >:

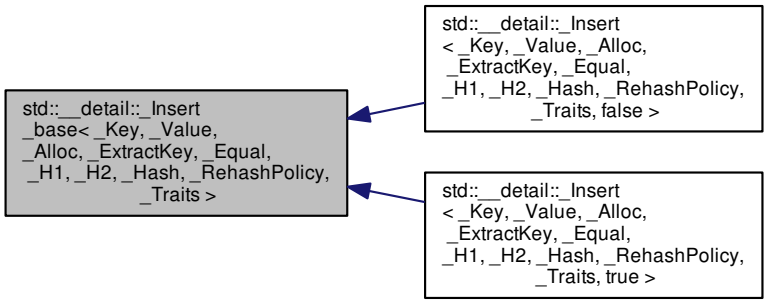

Public Member Functions

- __ireturn_type **insert** (const value_type &__v)
- iterator **insert** (const_iterator __hint, const value_type &__v)
- void **insert** (initializer_list< value_type > __l)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)

Protected Types

- using **__hashtable** = _Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- using **__hashtable_base** = _Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- using **__ireturn_type** = typename __hashtable_base::__ireturn_type
- using **__node_alloc_type** = __alloc_rebind< _Alloc, __node_type >
- using **__node_gen_type** = _AllocNode< __node_alloc_type >
- using **__node_type** = _Hash_node< _Value, _Traits::__hash_cached::value >
- using **__unique_keys** = typename __hashtable_base::__unique_keys
- using **const_iterator** = typename __hashtable_base::const_iterator
- using **iterator** = typename __hashtable_base::iterator
- using **size_type** = typename __hashtable_base::size_type
- using **value_type** = typename __hashtable_base::value_type

Protected Member Functions

- __hashtable & **_M_conjure_hashtable** ()
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, true_type)
- template<typename _InputIterator , typename _NodeGetter >
  void **_M_insert_range** (_InputIterator __first, _InputIterator __last, const _NodeGetter &, false_type)

4.128.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Primary class template _Insert_base.

Defines `insert` member functions appropriate to all _Hashtables.

Definition at line 798 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.129 __gnu_cxx::_Invalid_type Struct Reference

4.129.1 Detailed Description

The specialization on this type helps resolve the problem of reference to void, and eliminates the need to specialize _Pointer_adapter for cases of void*, const void*, and so on.

Definition at line 216 of file pointer.h.

The documentation for this struct was generated from the following file:

- pointer.h

4.130 __gnu_pbds::detail::pat_trie_base::_Iter< Node, Leaf, Head, Inode, Is_Forward_Iterator > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Iter< Node, Leaf, Head, Inode, Is_Forward_Iterator >:



Public Types

- typedef allocator_type **_Alloc**
- typedef base_type::allocator_type **allocator_type**
- typedef _CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator > **base_type**
- typedef type_traits::const_pointer **const_pointer**
- typedef type_traits::const_reference **const_reference**
- typedef allocator_type::difference_type **difference_type**
- typedef base_type::head_pointer **head_pointer**
- typedef Inode::iterator **inode_iterator**
- typedef base_type::inode_pointer **inode_pointer**
- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef base_type::leaf_const_pointer **leaf_const_pointer**
- typedef base_type::leaf_pointer **leaf_pointer**
- typedef base_type::node_pointer **node_pointer**
- typedef type_traits::pointer **pointer**

- typedef type_traits::reference **reference**
- typedef base_type::type_traits **type_traits**
- typedef type_traits::value_type **value_type**

Public Member Functions

- **_Iter** (node_pointer p_nd=0)
- **_Iter** (const _Iter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other)
- bool **operator!=** (const _CIter &other) const
- bool **operator!=** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other) const
- reference **operator*** () const
- _Iter & **operator++** ()
- _Iter **operator++** (int)
- _Iter & **operator--** ()
- _Iter **operator--** (int)
- pointer **operator->** () const
- _Iter & **operator=** (const _Iter &other)
- _Iter & **operator=** (const _Iter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other)
- bool **operator==** (const _CIter &other) const
- bool **operator==** (const _CIter< Node, Leaf, Head, Inode,!Is_Forward_Iterator > &other) const

Public Attributes

- node_pointer **m_p_nd**

Protected Member Functions

- void **dec** (false_type)
- void **dec** (true_type)
- void **inc** (false_type)
- void **inc** (true_type)

Static Protected Member Functions

- static node_pointer **get_larger_sibling** (node_pointer p_nd)
- static node_pointer **get_smaller_sibling** (node_pointer p_nd)
- static leaf_pointer **leftmost_descendant** (node_pointer p_nd)
- static leaf_pointer **rightmost_descendant** (node_pointer p_nd)

4.130.1 Detailed Description

template<typename Node, typename Leaf, typename Head, typename Inode, bool Is_Forward_Iterator>class __gnu_pbds::detail::pat-_trie_base::_Iter< Node, Leaf, Head, Inode, Is_Forward_Iterator >

Iterator.

Definition at line 709 of file pat_trie_base.hpp.

The documentation for this class was generated from the following file:

- pat_trie_base.hpp

4.131 __gnu_parallel::_IteratorPair< _Iterator1, _Iterator2, _IteratorCategory > Class Template Reference

Inheritance diagram for __gnu_parallel::_IteratorPair< _Iterator1, _Iterator2, _IteratorCategory >:



Public Types

- typedef std::iterator_traits < _Iterator1 > **_TraitsType**
- typedef _TraitsType::difference_type **difference_type**
- typedef _Iterator1 first_type
- typedef _IteratorCategory **iterator_category**
- typedef _IteratorPair * **pointer**
- typedef _IteratorPair & **reference**
- typedef _Iterator2 second_type
- typedef void **value_type**

Public Member Functions

- **_IteratorPair** (const _Iterator1 &__first, const _Iterator2 &__second)
- **operator _Iterator2** () const
- _IteratorPair **operator+** (difference_type __delta) const
- _IteratorPair & **operator++** ()
- const _IteratorPair **operator++** (int)
- difference_type **operator-** (const _IteratorPair &__other) const
- _IteratorPair & **operator--** ()
- const _IteratorPair **operator--** (int)
- _IteratorPair & **operator=** (const _IteratorPair &__other)
- constexpr void swap (pair &__p) noexcept(__and_< __is_nothrow_swappable< _Iterator1 >, __is_nothrow_swappable< _Iterator2 >>::value)

Public Attributes

- _Iterator1 first
- _Iterator2 second

4.131.1 Detailed Description

template<typename _Iterator1, typename _Iterator2, typename _IteratorCategory>class __gnu_parallel::_IteratorPair< _Iterator1, _Iterator2, _IteratorCategory >

A pair of iterators. The usual iterator operations are applied to both child iterators.

Definition at line 45 of file iterator.h.

4.131.2 Member Typedef Documentation

4.131.2.1 typedef _Iterator1 std::pair< _Iterator1 , _Iterator2 >::first_type [inherited]

The type of the `first` member.

Definition at line 214 of file stl_pair.h.

4.131.2.2 typedef _Iterator2 std::pair< _Iterator1 , _Iterator2 >::second_type [inherited]

The type of the `second` member.

Definition at line 215 of file stl_pair.h.

4.131.3 Member Function Documentation

4.131.3.1 constexpr void std::pair< _Iterator1 , _Iterator2 >::swap (pair< _Iterator1, _Iterator2 > & *__p*) [inline], [noexcept], [inherited]

Swap the first members and then the second members.

Definition at line 439 of file stl_pair.h.

4.131.4 Member Data Documentation

4.131.4.1 _Iterator1 std::pair< _Iterator1 , _Iterator2 >::first [inherited]

The first member.

Definition at line 217 of file stl_pair.h.

4.131.4.2 _Iterator2 std::pair< _Iterator1 , _Iterator2 >::second [inherited]

The second member.

Definition at line 218 of file stl_pair.h.

The documentation for this class was generated from the following file:

- iterator.h

4.132 __gnu_parallel::_IteratorTriple< _Iterator1, _Iterator2, _Iterator3, _IteratorCategory > Class Template Reference

Public Types

- typedef std::iterator_traits < _Iterator1 > ::difference_type **difference_type**
- typedef _IteratorCategory **iterator_category**
- typedef _IteratorTriple * **pointer**
- typedef _IteratorTriple & **reference**
- typedef void **value_type**

Public Member Functions

- **_IteratorTriple** (const _Iterator1 &__first, const _Iterator2 &__second, const _Iterator3 &__third)
- **operator _Iterator3** () const
- _IteratorTriple **operator+** (difference_type __delta) const
- _IteratorTriple & **operator++** ()
- const _IteratorTriple **operator++** (int)
- difference_type **operator-** (const _IteratorTriple &__other) const
- _IteratorTriple & **operator--** ()
- const _IteratorTriple **operator--** (int)
- _IteratorTriple & **operator=** (const _IteratorTriple &__other)

Public Attributes

- _Iterator1 **_M_first**
- _Iterator2 **_M_second**
- _Iterator3 **_M_third**

4.132.1 Detailed Description

template<typename _Iterator1, typename _Iterator2, typename _Iterator3, typename _IteratorCategory>class __gnu_parallel::_IteratorTriple< _Iterator1, _Iterator2, _Iterator3, _IteratorCategory >

A triple of iterators. The usual iterator operations are applied to all three child iterators.

Definition at line 120 of file iterator.h.

The documentation for this class was generated from the following file:

- iterator.h

4.133 __gnu_parallel::_Job< _DifferenceTp > Struct Template Reference

Public Types

- typedef _DifferenceTp **_DifferenceType**

Public Attributes

- volatile _DifferenceType _M_first
- volatile _DifferenceType _M_last
- volatile _DifferenceType _M_load

4.133.1 Detailed Description

template<typename _DifferenceTp>struct __gnu_parallel::_Job< _DifferenceTp >

One __job for a certain thread.

Definition at line 54 of file workstealing.h.

4.133.2 Member Data Documentation

4.133.2.1 template<typename _DifferenceTp> volatile _DifferenceType __gnu_parallel::_Job< _DifferenceTp >::_M_first

First element.

Changed by owning and stealing thread. By stealing thread, always incremented.

Definition at line 62 of file workstealing.h.

Referenced by __gnu_parallel::__for_each_template_random_access_workstealing().

4.133.2.2 template<typename _DifferenceTp> volatile _DifferenceType __gnu_parallel::_Job< _DifferenceTp >::_M_last

Last element.

Changed by owning thread only.

Definition at line 67 of file workstealing.h.

Referenced by __gnu_parallel::__for_each_template_random_access_workstealing().

4.133.2.3 template<typename _DifferenceTp> volatile _DifferenceType __gnu_parallel::_Job< _DifferenceTp >::_M_load

Number of elements, i.e. `_M_last-_M_first+1`.

Changed by owning thread only.

Definition at line 72 of file workstealing.h.

Referenced by __gnu_parallel::__for_each_template_random_access_workstealing().

The documentation for this struct was generated from the following file:

- workstealing.h

4.134 __gnu_pbds::detail::pat_trie_base::_Leaf< _ATraits, Metadata > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Leaf< _ATraits, Metadata >:

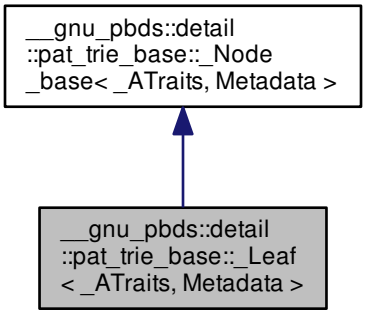

Public Types

- typedef _ATraits::const_iterator **a_const_iterator**
- typedef detail::rebind_traits < _Alloc, _ATraits > ::const_pointer **a_const_pointer**
- typedef _ATraits **access_traits**
- typedef _Alloc **allocator_type**
- typedef _Node_base< _ATraits, Metadata > **base_type**
- typedef type_traits::const_reference **const_reference**
- typedef detail::rebind_traits < _Alloc, _Node_base > ::pointer **node_pointer**
- typedef type_traits::reference **reference**
- typedef base_type::type_traits **type_traits**
- typedef type_traits::value_type **value_type**

Public Member Functions

- **_Leaf** (const_reference other)
- reference **value** ()
- const_reference **value** () const

Public Attributes

- node_pointer **m_p_parent**
- const node_type **m_type**

4.134.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Leaf< _ATraits, Metadata >

Leaf node for PATRICIA tree.

Definition at line 162 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.135 __gnu_parallel::_Less< _T1, _T2 > Struct Template Reference

Inheritance diagram for __gnu_parallel::_Less< _T1, _T2 >:



Public Types

- typedef _T1 first_argument_type
- typedef bool result_type
- typedef _T2 second_argument_type

Public Member Functions

- bool **operator()** (const _T1 &__t1, const _T2 &__t2) const
- bool **operator()** (const _T2 &__t2, const _T1 &__t1) const

4.135.1 Detailed Description

template<typename _T1, typename _T2>struct __gnu_parallel::_Less< _T1, _T2 >

Similar to std::less, but allows two different types.

Definition at line 252 of file base.h.

4.135.2 Member Typedef Documentation

4.135.2.1 typedef _T1 std::binary_function< _T1 , _T2 , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.135.2.2 typedef bool std::binary_function< _T1 , _T2 , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.135.2.3 typedef _T2 std::binary_function< _T1 , _T2 , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- base.h

4.136 __gnu_parallel::_Lexicographic< _T1, _T2, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_Lexicographic< _T1, _T2, _Compare >:

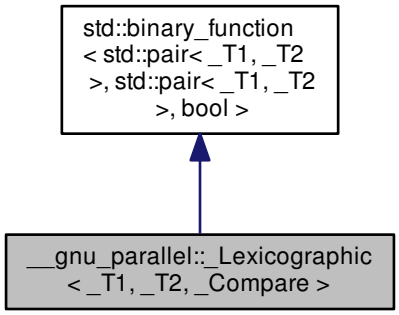

Public Types

- typedef std::pair< _T1, _T2 > first_argument_type
- typedef bool result_type
- typedef std::pair< _T1, _T2 > second_argument_type

Public Member Functions

- **_Lexicographic** (_Compare &__comp)

- bool **operator()** (const std::pair< _T1, _T2 > &__p1, const std::pair< _T1, _T2 > &__p2) const

4.136.1 Detailed Description

template<typename _T1, typename _T2, typename _Compare>class __gnu_parallel::_Lexicographic< _T1, _T2, _Compare >

Compare __a pair of types lexicographically, ascending.

Definition at line 53 of file multiseq_selection.h.

4.136.2 Member Typedef Documentation

4.136.2.1 typedef std::pair< _T1, _T2 > std::binary_function< std::pair< _T1, _T2 > , std::pair< _T1, _T2 > , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.136.2.2 typedef bool std::binary_function< std::pair< _T1, _T2 > , std::pair< _T1, _T2 > , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.136.2.3 typedef std::pair< _T1, _T2 > std::binary_function< std::pair< _T1, _T2 > , std::pair< _T1, _T2 > , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- multiseq_selection.h

4.137 __gnu_parallel::_LexicographicReverse< _T1, _T2, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LexicographicReverse< _T1, _T2, _Compare >:

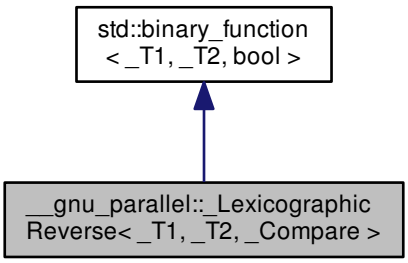

Public Types

- typedef _T1 first_argument_type
- typedef bool result_type
- typedef _T2 second_argument_type

Public Member Functions

- **_LexicographicReverse** (_Compare &__comp)
- bool **operator()** (const std::pair< _T1, _T2 > &__p1, const std::pair< _T1, _T2 > &__p2) const

4.137.1 Detailed Description

template<typename _T1, typename _T2, typename _Compare>class __gnu_parallel::_LexicographicReverse< _T1, _T2, _Compare >

Compare __a pair of types lexicographically, descending.

Definition at line 80 of file multiseq_selection.h.

4.137.2 Member Typedef Documentation

4.137.2.1 typedef _T1 std::binary_function< _T1 , _T2 , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.137.2.2 typedef bool std::binary_function< _T1 , _T2 , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.137.2.3 typedef _T2 std::binary_function< _T1 , _T2 , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- multiseq_selection.h

4.138 std::_List_base< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::_List_base< _Tp, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**

Public Member Functions

- **_List_base** (const _Node_alloc_type &__a) noexcept
- **_List_base** (_List_base &&)=default
- **_List_base** (_List_base &&__x, _Node_alloc_type &&__a)
- **_List_base** (_Node_alloc_type &&__a, _List_base &&__x)
- **_List_base** (_Node_alloc_type &&__a)
- void **_M_clear** () noexcept
- _Node_alloc_type & **_M_get_Node_allocator** () noexcept
- const _Node_alloc_type & **_M_get_Node_allocator** () const noexcept
- void **_M_init** () noexcept
- void **_M_move_nodes** (_List_base &&__x)

Protected Types

- typedef __gnu_cxx::__alloc_traits < _Node_alloc_type > **_Node_alloc_traits**

- typedef _Tp_alloc_traits::template rebind< _List_node< _Tp > >::other **_Node_alloc_type**
- typedef __gnu_cxx::__alloc_traits < _Tp_alloc_type > **_Tp_alloc_traits**
- typedef __gnu_cxx::__alloc_traits < _Alloc >::template rebind < _Tp >::other **_Tp_alloc_type**

Protected Member Functions

- void **_M_dec_size** (size_t)
- size_t **_M_distance** (const void *, const void *) const
- _Node_alloc_traits::pointer **_M_get_node** ()
- size_t **_M_get_size** () const
- void **_M_inc_size** (size_t)
- size_t **_M_node_count** () const
- void **_M_put_node** (typename _Node_alloc_traits::pointer __p) noexcept
- void **_M_set_size** (size_t)

Static Protected Member Functions

- static size_t **_S_distance** (const __detail::_List_node_base *__first, const __detail::_List_node_base *__last)

Protected Attributes

- _List_impl **_M_impl**

4.138.1 Detailed Description

template<typename _Tp, typename _Alloc>class std::_List_base< _Tp, _Alloc >

See bits/stl_deque.h's _Deque_base for an explanation.

Definition at line 349 of file stl_list.h.

The documentation for this class was generated from the following files:

- stl_list.h
- list.tcc

4.139 std::_List_const_iterator< typename > Struct Template Reference

Public Types

- typedef const _List_node< _Tp > **_Node**
- typedef _List_const_iterator< _Tp > **_Self**
- typedef ptrdiff_t **difference_type**

- typedef _List_iterator< _Tp > **iterator**
- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef const _Tp * **pointer**
- typedef const _Tp & **reference**
- typedef _Tp **value_type**

Public Member Functions

- **_List_const_iterator** (const __detail::_List_node_base *__x) noexcept
- **_List_const_iterator** (const iterator &__x) noexcept
- iterator **_M_const_cast** () const noexcept
- reference **operator*** () const noexcept
- _Self & **operator++** () noexcept
- _Self **operator++** (int) noexcept
- _Self & **operator--** () noexcept
- _Self **operator--** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- const __detail::_List_node_base * **_M_node**

Friends

- bool **operator!=** (const _Self &__x, const _Self &__y) noexcept
- bool **operator==** (const _Self &__x, const _Self &__y) noexcept

4.139.1 Detailed Description

template<typename>struct std::_List_const_iterator< typename >

A list::const_iterator.

All the functions are op overloads.

Definition at line 74 of file stl_iterator_base_funcs.h.

The documentation for this struct was generated from the following files:

- stl_iterator_base_funcs.h
- stl_list.h

4.140 std::_List_iterator< typename > Struct Template Reference

Public Types

- typedef _List_node< _Tp > **_Node**
- typedef _List_iterator< _Tp > **_Self**
- typedef ptrdiff_t **difference_type**

- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef _Tp * **pointer**
- typedef _Tp & **reference**
- typedef _Tp **value_type**

Public Member Functions

- **_List_iterator** (__detail::_List_node_base *__x) noexcept
- _Self **_M_const_cast** () const noexcept
- reference **operator*** () const noexcept
- _Self & **operator++** () noexcept
- _Self **operator++** (int) noexcept
- _Self & **operator--** () noexcept
- _Self **operator--** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- __detail::_List_node_base * **_M_node**

Friends

- bool **operator!=** (const _Self &__x, const _Self &__y) noexcept
- bool **operator==** (const _Self &__x, const _Self &__y) noexcept

4.140.1 Detailed Description

template<typename>struct std::_List_iterator< typename >

A list::iterator.

All the functions are op overloads.

Definition at line 73 of file stl_iterator_base_funcs.h.

The documentation for this struct was generated from the following files:

- stl_iterator_base_funcs.h
- stl_list.h

4.141 std::_List_node< _Tp > Struct Template Reference

Inheritance diagram for std::_List_node< _Tp >:



Public Member Functions

- void **_M_hook** (_List_node_base *const __position) noexcept
- void **_M_reverse** () noexcept
- void **_M_transfer** (_List_node_base *const __first, _List_node_base *const __last) noexcept
- void **_M_unhook** () noexcept
- _Tp * **_M_valptr** ()
- _Tp const * **_M_valptr** () const

Static Public Member Functions

- static void **swap** (_List_node_base &__x, _List_node_base &__y) noexcept

Public Attributes

- _List_node_base * **_M_next**
- _List_node_base * **_M_prev**
- __gnu_cxx::__aligned_membuf< _Tp > **_M_storage**

4.141.1 Detailed Description

template<typename _Tp>struct std::_List_node< _Tp >

An actual node in the list.

Definition at line 166 of file stl_list.h.

The documentation for this struct was generated from the following file:

- stl_list.h

4.142 std::__detail::_List_node_base Struct Reference

Inheritance diagram for std::__detail::_List_node_base:

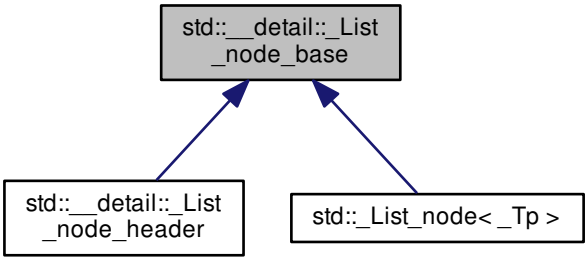

Public Member Functions

- void **_M_hook** (_List_node_base *const __position) noexcept
- void **_M_reverse** () noexcept
- void **_M_transfer** (_List_node_base *const __first, _List_node_base *const __last) noexcept
- void **_M_unhook** () noexcept

Static Public Member Functions

- static void **swap** (_List_node_base &__x, _List_node_base &__y) noexcept

Public Attributes

- _List_node_base * **_M_next**
- _List_node_base * **_M_prev**

4.142.1 Detailed Description

Common part of a node in the list.

Definition at line 80 of file stl_list.h.

The documentation for this struct was generated from the following file:

- stl_list.h

4.143 std::__detail::_List_node_header Struct Reference

Inheritance diagram for std::__detail::_List_node_header:



Public Member Functions

- **_List_node_header** (_List_node_header &&__x) noexcept
- void **_M_hook** (_List_node_base *const __position) noexcept
- void **_M_init** () noexcept
- void **_M_move_nodes** (_List_node_header &&__x)
- void **_M_reverse** () noexcept
- void **_M_transfer** (_List_node_base *const __first, _List_node_base *const __last) noexcept
- void **_M_unhook** () noexcept

Static Public Member Functions

- static void **swap** (_List_node_base &__x, _List_node_base &__y) noexcept

Public Attributes

- _List_node_base * **_M_next**
- _List_node_base * **_M_prev**

4.143.1 Detailed Description

The list node header.

Definition at line 103 of file stl_list.h.

The documentation for this struct was generated from the following file:

- stl_list.h

4.144 std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache > Struct Template Reference

Inheritance diagram for std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >:



Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef const _Value * **pointer**
- typedef const _Value & **reference**
- typedef _Value **value_type**

Public Member Functions

- **_Local_const_iterator** (const __hash_code_base &__base, _Hash_node< _Value, __cache > *__n, std::size_t __bkt, std::size_t __bkt_count)
- **_Local_const_iterator** (const _Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache > &__x)
- reference **operator*** () const
- _Local_const_iterator & **operator++** ()
- _Local_const_iterator **operator++** (int)
- pointer **operator->** () const

4.144.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash, bool __constant_iterators, bool __cache>struct std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >

local const_iterators

Definition at line 1657 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.145 std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache > Struct Template Reference

Inheritance diagram for std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >:

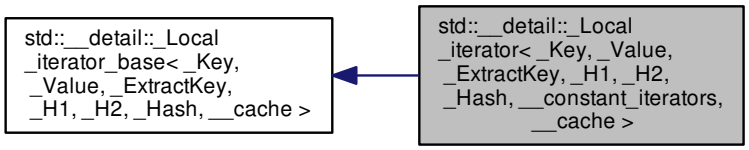

Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef std::conditional < __constant_iterators, const _Value *, _Value * >::type **pointer**
- typedef std::conditional < __constant_iterators, const _Value &, _Value & >::type **reference**
- typedef _Value **value_type**

Public Member Functions

- **_Local_iterator** (const __hash_code_base &__base, _Hash_node< _Value, __cache > *__n, std::size_t __bkt, std::size_t __bkt_count)
- reference **operator*** () const
- _Local_iterator & **operator++** ()
- _Local_iterator **operator++** (int)
- pointer **operator->** () const

4.145.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash, bool __constant_iterators, bool __cache>struct std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >

local iterators

Definition at line 1602 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.146 std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code > Struct Template Reference

4.146.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash, bool __cache_hash_code>struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >

Primary class template _Local_iterator_base.

Base class for local iterators, used to iterate within a bucket but not between buckets.

Definition at line 1150 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.147 std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true > Struct Template Reference

Inheritance diagram for std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >:



Public Member Functions

- const void * **_M_curr** () const
- std::size_t **_M_get_bucket** () const

Protected Types

- using **__base_type** = _Hashtable_ebo_helper< 0, _H2 >
- using **__hash_code_base** = _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >

Protected Member Functions

- **_Local_iterator_base** (const __hash_code_base &__base, _Hash_node< _Value, true > *__p, std::size_t __bkt, std::size_t __bkt_count)
- void **_M_incr** ()

Protected Attributes

- std::size_t **_M_bucket**
- std::size_t **_M_bucket_count**
- _Hash_node< _Value, true > * **_M_cur**

4.147.1 Detailed Description

template<typename _Key, typename _Value, typename _ExtractKey, typename _H1, typename _H2, typename _Hash>struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >

Partial specialization used when nodes contain a cached hash code.

Definition at line 1423 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.148 __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser Struct Reference

Public Attributes

- _Tp _M_key
- int _M_source
- bool _M_sup

4.148.1 Detailed Description

template<typename _Tp, typename _Compare>struct __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser

Internal representation of a _LoserTree element.

Definition at line 59 of file losertree.h.

4.148.2 Member Data Documentation

4.148.2.1 template<typename _Tp , typename _Compare > _Tp __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_key

_M_key of the element in the _LoserTree.

Definition at line 66 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start().

4.148.2.2 template<typename _Tp , typename _Compare > int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source

__index of the __source __sequence.

Definition at line 64 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start().

4.148.2.3 template<typename _Tp , typename _Compare > bool __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_sup

flag, true iff this is a "maximum" __sentinel.

Definition at line 62 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start().

The documentation for this struct was generated from the following file:

- losertree.h

4.149 __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >::_Loser Struct Reference

Public Attributes

- const _Tp * **_M_keyp**
- int **_M_source**
- bool **_M_sup**

4.149.1 Detailed Description

template<typename _Tp, typename _Compare>struct __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >::_Loser

Internal representation of _LoserTree __elements.

Definition at line 361 of file losertree.h.

The documentation for this struct was generated from the following file:

- losertree.h

4.150 __gnu_parallel::_LoserTree< __stable, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTree< __stable, _Tp, _Compare >:

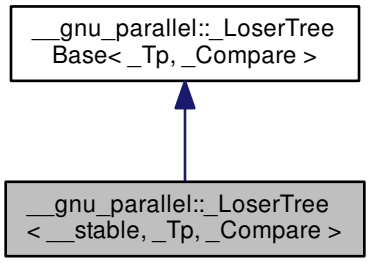

Public Member Functions

- **_LoserTree** (unsigned int __k, _Compare __comp)
- void __delete_min_insert (_Tp __key, bool __sup)
- int __get_min_source ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void __insert_start (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare _M_comp
- bool _M_first_insert
- unsigned int **_M_ik**
- unsigned int **_M_k**
- unsigned int _M_log_k
- _Loser * _M_losers
- unsigned int **_M_offset**

4.150.1 Detailed Description

template<bool __stable, typename _Tp, typename _Compare>class __gnu_parallel::_LoserTree< __stable, _Tp, _Compare >

Stable _LoserTree variant.

Provides the stable implementations of insert_start, __init_winner, __init and __delete_min_insert.

Unstable variant is done using partial specialisation below.

Definition at line 169 of file losertree.h.

4.150.2 Member Function Documentation

4.150.2.1 template<bool __stable, typename _Tp , typename _Compare > void __gnu_parallel::_LoserTree< __stable, _Tp, _Compare >::__delete_min_insert (_Tp __key, bool __sup) [inline]

Delete the smallest element and insert a new element from the previously smallest element's sequence.

This implementation is stable.

Definition at line 222 of file losertree.h.

4.150.2.2 template<typename _Tp , typename _Compare > int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source ( ) [inline], [inherited]

Returns

the index of the sequence with the smallest element.

Definition at line 155 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source.

4.150.2.3 template<typename _Tp , typename _Compare > void __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start (const _Tp & __key, int __source, bool __sup) [inline], [inherited]

Initializes the sequence "_M_source" with the element "__key".

Parameters

__key	the element to insert
__source	__index of the __source __sequence
__sup	flag that determines whether the value to insert is an explicit __supremum.

Definition at line 134 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_key, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_sup.

4.150.3 Member Data Documentation

4.150.3.1 template<typename _Tp , typename _Compare > _Compare __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_comp [protected], [inherited]

_Compare to use.

Definition at line 78 of file losertree.h.

4.150.3.2 template<typename _Tp , typename _Compare > bool __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert [protected], [inherited]

State flag that determines whether the _LoserTree is empty.

Only used for building the _LoserTree.

Definition at line 85 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), and __gnu_parallel::_LoserTree-

Base< _Tp, _Compare >::_LoserTreeBase().

4.150.3.3 template<typename _Tp , typename _Compare > unsigned int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_log_k [protected], [inherited]

log_2{_M_k}

Definition at line 72 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase().

4.150.3.4 template<typename _Tp , typename _Compare > _Loser* __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers [protected], [inherited]

_LoserTree __elements.

Definition at line 75 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::~_LoserTreeBase().

The documentation for this class was generated from the following file:

- losertree.h

4.151 __gnu_parallel::_LoserTree< false, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTree< false, _Tp, _Compare >:

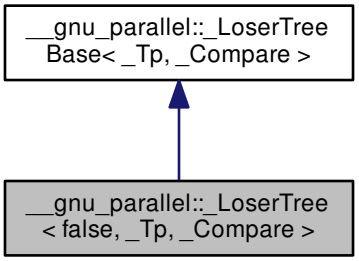

Public Member Functions

- **_LoserTree** (unsigned int __k, _Compare __comp)
- void __delete_min_insert (_Tp __key, bool __sup)
- int __get_min_source ()
- void **__init** ()
- unsigned int __init_winner (unsigned int __root)
- void __insert_start (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare _M_comp
- bool _M_first_insert
- unsigned int **_M_ik**
- unsigned int **_M_k**
- unsigned int _M_log_k
- _Loser * _M_losers
- unsigned int **_M_offset**

4.151.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTree< false, _Tp, _Compare >

Unstable _LoserTree variant.

Stability (non-stable here) is selected with partial specialization.

Definition at line 261 of file losertree.h.

4.151.2 Member Function Documentation

4.151.2.1 template<typename _Tp , typename _Compare > void __gnu_parallel::_LoserTree< false, _Tp, _Compare >::__delete_min_insert (_Tp *__key*, bool *__sup*) [inline]

Delete the _M_key smallest element and insert the element __key instead.

Parameters

__key	the _M_key to insert
__sup	true iff __key is an explicitly marked supremum

Definition at line 324 of file losertree.h.

4.151.2.2 template<typename _Tp , typename _Compare > int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source ( ) [inline], [inherited]

Returns

the index of the sequence with the smallest element.

Definition at line 155 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source.

4.151.2.3 template<typename _Tp , typename _Compare > unsigned int __gnu_parallel::_LoserTree< false, _Tp, _Compare >::__init_winner (unsigned int *__root*) [inline]

Computes the winner of the competition at position "__root".

Called recursively (starting at 0) to build the initial tree.

Parameters

__root	__index of the "game" to start.

Definition at line 284 of file losertree.h.

4.151.2.4 template<typename _Tp , typename _Compare > void __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start (const _Tp & *__key,* int *__source,* bool *__sup*) [inline], [inherited]

Initializes the sequence "_M_source" with the element "__key".

Parameters

__key	the element to insert
__source	__index of the __source __sequence
__sup	flag that determines whether the value to insert is an explicit __supremum.

Definition at line 134 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_key, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_sup.

4.151.3 Member Data Documentation

4.151.3.1 template<typename _Tp , typename _Compare > _Compare __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_comp [protected], [inherited]

_Compare to use.

Definition at line 78 of file losertree.h.

4.151.3.2 template<typename _Tp , typename _Compare > bool __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert [protected], [inherited]

State flag that determines whether the _LoserTree is empty.

Only used for building the _LoserTree.

Definition at line 85 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase().

4.151.3.3 template<typename _Tp , typename _Compare > unsigned int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_log_k [protected], [inherited]

log_2{_M_k}

Definition at line 72 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase().

4.151.3.4 template<typename _Tp , typename _Compare > _Loser* __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers [protected], [inherited]

_LoserTree __elements.

Definition at line 75 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::~_LoserTreeBase().

The documentation for this class was generated from the following file:

- losertree.h

4.152 __gnu_parallel::_LoserTreeBase< _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreeBase< _Tp, _Compare >:

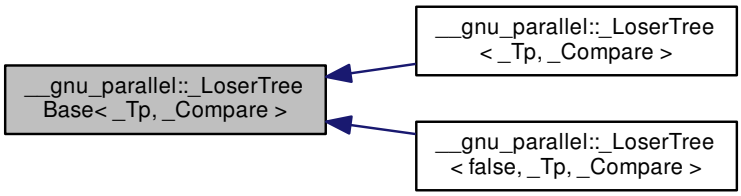

Classes

- struct _Loser

Public Member Functions

- _LoserTreeBase (unsigned int __k, _Compare __comp)
- ~_LoserTreeBase ()
- int __get_min_source ()
- void __insert_start (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare _M_comp
- bool _M_first_insert
- unsigned int **_M_ik**
- unsigned int **_M_k**
- unsigned int _M_log_k
- _Loser * _M_losers
- unsigned int **_M_offset**

4.152.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreeBase< _Tp, _Compare >

Guarded loser/tournament tree.

The smallest element is at the top.

Guarding is done explicitly through one flag _M_sup per element, inf is not needed due to a better initialization routine. This is a well-performing variant.

Parameters

_Tp	the element type
_Compare	the comparator to use, defaults to std::less<_Tp>

Definition at line 55 of file losertree.h.

4.152.2 Constructor & Destructor Documentation

4.152.2.1 template<typename _Tp , typename _Compare > __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase (unsigned int *__k*, _Compare *__comp*) [inline]

The constructor.

Parameters

__k	The number of sequences to merge.
__comp	The comparator to use.

Definition at line 94 of file losertree.h.

References __gnu_parallel::__rd_log2(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_log_k, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers.

4.152.2.2 template<typename _Tp , typename _Compare > __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::~_LoserTreeBase ( ) [inline]

The destructor.

Definition at line 118 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers.

4.152.3 Member Function Documentation

4.152.3.1 template<typename _Tp , typename _Compare > int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source ( ) [inline]

Returns

the index of the sequence with the smallest element.

Definition at line 155 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source.

4.152.3.2 template<typename _Tp , typename _Compare > void __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start (const _Tp & *__key,* int *__source,* bool *__sup*) [inline]

Initializes the sequence "_M_source" with the element "__key".

Parameters

__key	the element to insert
__source	__index of the __source __sequence
__sup	flag that determines whether the value to insert is an explicit __supremum.

Definition at line 134 of file losertree.h.

References __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_key, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers, __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_source, and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser::_M_sup.

4.152.4 Member Data Documentation

4.152.4.1 template<typename _Tp , typename _Compare > _Compare __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_comp [protected]

_Compare to use.

Definition at line 78 of file losertree.h.

4.152.4.2 template<typename _Tp , typename _Compare > bool __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_first_insert [protected]

State flag that determines whether the _LoserTree is empty.

Only used for building the _LoserTree.

Definition at line 85 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase().

4.152.4.3 template<typename _Tp , typename _Compare > unsigned int __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_log_k [protected]

log_2{_M_k}

Definition at line 72 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase().

4.152.4.4 template<typename _Tp , typename _Compare > _Loser* __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_M_losers [protected]

_LoserTree __elements.

Definition at line 75 of file losertree.h.

Referenced by __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__get_min_source(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::__insert_start(), __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_LoserTreeBase(), and __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::~_LoserTreeBase().

The documentation for this class was generated from the following file:

- losertree.h

4.153 __gnu_parallel::_LoserTreePointer< __stable, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointer< __stable, _Tp, _Compare >:

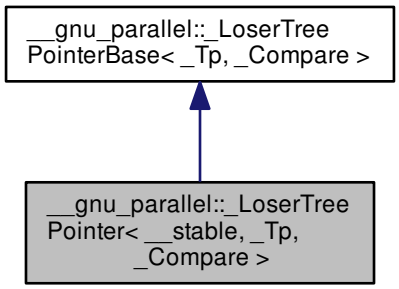

Public Member Functions

- **_LoserTreePointer** (unsigned int __k, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (const _Tp &__key, bool __sup)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.153.1 Detailed Description

template<bool __stable, typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointer< __stable, _Tp, _Compare >

Stable _LoserTree implementation.

The unstable variant is implemented using partial instantiation below.

Definition at line 409 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.154 __gnu_parallel::_LoserTreePointer< false, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointer< false, _Tp, _Compare >:

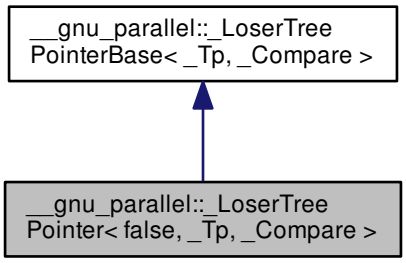

Public Member Functions

- **_LoserTreePointer** (unsigned int __k, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (const _Tp &__key, bool __sup)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.154.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointer< false, _Tp, _Compare >

Unstable _LoserTree implementation.

The stable variant is above.

Definition at line 491 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.155 __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >:

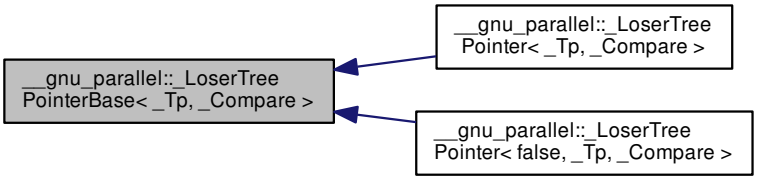

Classes

- struct _Loser

Public Member Functions

- **_LoserTreePointerBase** (unsigned int __k, _Compare __comp=std::less< _Tp >())
- int **__get_min_source** ()
- void **__insert_start** (const _Tp &__key, int __source, bool __sup)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.155.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >

Base class of _Loser Tree implementation using pointers.

Definition at line 357 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.156 __gnu_parallel::_LoserTreePointerUnguarded< __stable, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointerUnguarded< __stable, _Tp, _Compare >:

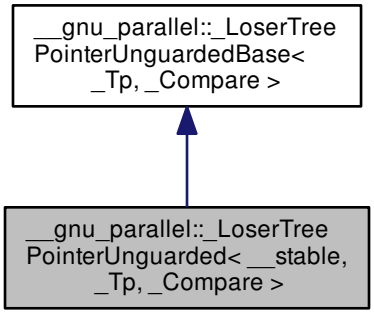

Public Member Functions

- **_LoserTreePointerUnguarded** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (const _Tp &__key, bool __sup)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.156.1 Detailed Description

template<bool __stable, typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointerUnguarded< __stable, _Tp, _Compare >

Stable unguarded _LoserTree variant storing pointers.

Unstable variant is implemented below using partial specialization.

Definition at line 891 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.157 __gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare >:

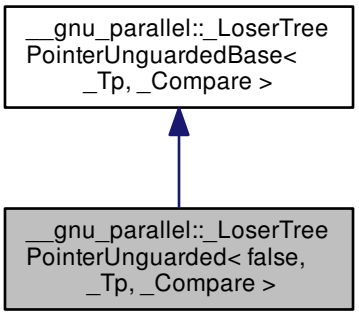

Public Member Functions

- **_LoserTreePointerUnguarded** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (const _Tp &__key, bool __sup)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.157.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare >

Unstable unguarded _LoserTree variant storing pointers.

Stable variant is above.

Definition at line 977 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.158 __gnu_parallel::_LoserTreePointerUnguardedBase< _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreePointerUnguardedBase< _Tp, _Compare >:

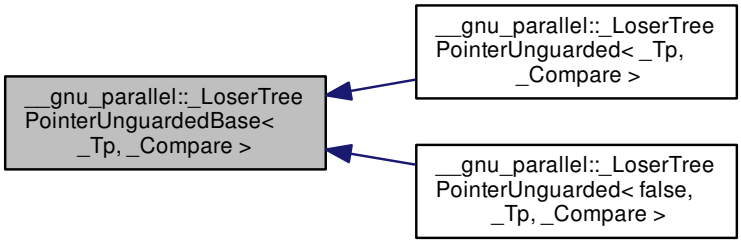

Public Member Functions

- **_LoserTreePointerUnguardedBase** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- int **__get_min_source** ()
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.158.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreePointerUnguardedBase< _Tp, _Compare >

Unguarded loser tree, keeping only pointers to the elements in the tree structure.

No guarding is done, therefore not a single input sequence must run empty. This is a very fast variant.

Definition at line 828 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.159 __gnu_parallel::_LoserTreeTraits< _Tp > Struct Template Reference

Static Public Attributes

- static const bool _M_use_pointer

4.159.1 Detailed Description

template<typename _Tp>struct __gnu_parallel::_LoserTreeTraits< _Tp >

Traits for determining whether the loser tree should use pointers or copies.

The field "_M_use_pointer" is used to determine whether to use pointers in he loser trees or whether to copy the values into the loser tree.

The default behavior is to use pointers if the data type is 4 times as big as the pointer to it.

Specialize for your data type to customize the behavior.

Example:

template<> struct _LoserTreeTraits<int> { static const bool _M_use_pointer = false; };

template<> struct _LoserTreeTraits<heavyweight_type> { static const bool _M_use_pointer = true; };

Parameters

_Tp	type to give the loser tree traits for.

Definition at line 731 of file multiway_merge.h.

4.159.2 Member Data Documentation

4.159.2.1 template<typename _Tp > const bool __gnu_parallel::_LoserTreeTraits< _Tp >::_M_use_pointer [static]

True iff to use pointers instead of values in loser trees.

The default behavior is to use pointers if the data type is four times as big as the pointer to it.

Definition at line 739 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.160 __gnu_parallel::_LoserTreeUnguarded< __stable, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreeUnguarded< __stable, _Tp, _Compare >:

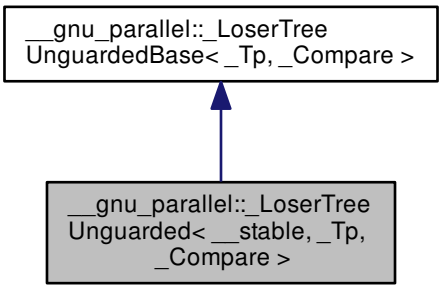

Public Member Functions

- **_LoserTreeUnguarded** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (_Tp __key, bool)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.160.1 Detailed Description

template<bool __stable, typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreeUnguarded< __stable, _Tp, _Compare >

Stable implementation of unguarded _LoserTree.

Unstable variant is selected below with partial specialization.

Definition at line 646 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.161 __gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare >:

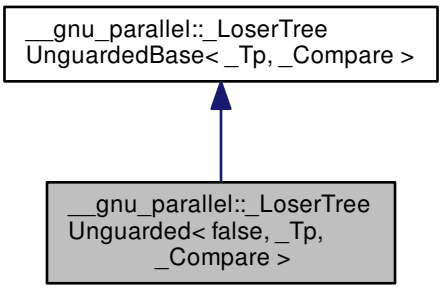

Public Member Functions

- **_LoserTreeUnguarded** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- void **__delete_min_insert** (_Tp __key, bool)
- int **__get_min_source** ()
- void **__init** ()
- unsigned int **__init_winner** (unsigned int __root)
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.161.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare >

Non-Stable implementation of unguarded _LoserTree.

Stable implementation is above.

Definition at line 734 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.162 __gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare > Class Template Reference

Inheritance diagram for __gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare >:

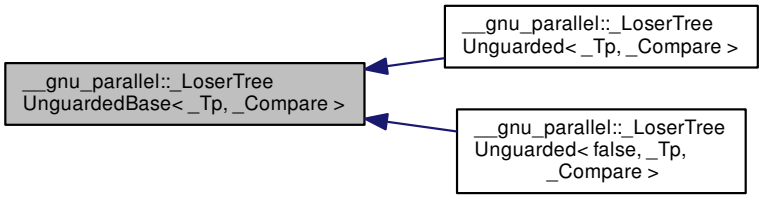

Public Member Functions

- **_LoserTreeUnguardedBase** (unsigned int __k, const _Tp &__sentinel, _Compare __comp=std::less< _Tp >())
- int **__get_min_source** ()
- void **__insert_start** (const _Tp &__key, int __source, bool)

Protected Attributes

- _Compare **_M_comp**
- unsigned int **_M_ik**
- unsigned int **_M_k**
- _Loser * **_M_losers**
- unsigned int **_M_offset**

4.162.1 Detailed Description

template<typename _Tp, typename _Compare>class __gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare >

Base class for unguarded _LoserTree implementation.

The whole element is copied into the tree structure.

No guarding is done, therefore not a single input sequence must run empty. Unused __sequence heads are marked with a sentinel which is > all elements that are to be merged.

This is a very fast variant.

Definition at line 574 of file losertree.h.

The documentation for this class was generated from the following file:

- losertree.h

4.163 std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys > Struct Template Reference

Inheritance diagram for std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >:

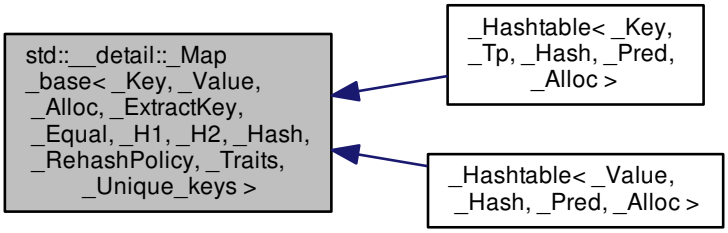

4.163.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits, bool _Unique_keys = _Traits::__unique_keys::value>struct std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >

Primary class template _Map_base.

If the hashtable has a value type of the form pair<T1, T2> and a key extraction policy (_ExtractKey) that returns the first part of the pair, the hashtable gets a mapped_type typedef. If it satisfies those criteria and also has unique keys, then it also gets an operator[].

Definition at line 645 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.164 std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false > Struct Template Reference

Public Types

- using **mapped_type** = typename std::tuple_element< 1, _Pair >::type

4.164.1 Detailed Description

template<typename _Key, typename _Pair, typename _Alloc, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >

Partial specialization, __unique_keys set to false.

Definition at line 651 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.165 std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true > Struct Template Reference

Public Types

- using **iterator** = typename __hashtable_base::iterator
- using **key_type** = typename __hashtable_base::key_type
- using **mapped_type** = typename std::tuple_element< 1, _Pair >::type

Public Member Functions

- mapped_type & **at** (const key_type &__k)
- const mapped_type & **at** (const key_type &__k) const
- mapped_type & **operator[]** (const key_type &__k)
- mapped_type & **operator[]** (key_type &&__k)

4.165.1 Detailed Description

template<typename _Key, typename _Pair, typename _Alloc, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >

Partial specialization, __unique_keys set to true.

Definition at line 661 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.166 std::__detail::_Mask_range_hashing Struct Reference

Public Types

- typedef std::size_t **first_argument_type**
- typedef std::size_t **result_type**
- typedef std::size_t **second_argument_type**

Public Member Functions

- result_type **operator()** (first_argument_type __num, second_argument_type __den) const noexcept

4.166.1 Detailed Description

Range hashing function assuming that second arg is a power of 2.

Definition at line 494 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.167 __gnu_pbds::detail::pat_trie_base::_Metadata< Metadata, _Alloc > Struct Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef detail::rebind_traits
  < _Alloc, Metadata >
  ::const_reference **const_reference**
- typedef Metadata **metadata_type**

Public Member Functions

- const_reference **get_metadata** () const

Public Attributes

- metadata_type **m_metadata**

4.167.1 Detailed Description

template<typename Metadata, typename _Alloc>struct __gnu_pbds::detail::pat_trie_base::_Metadata< Metadata, _Alloc >

Metadata base primary template.

Definition at line 67 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.168 __gnu_pbds::detail::pat_trie_base::_Metadata< null_type, _Alloc > Struct Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef null_type **metadata_type**

4.168.1 Detailed Description

template<typename _Alloc>struct __gnu_pbds::detail::pat_trie_base::_Metadata< null_type, _Alloc >

Specialization for null metadata.

Definition at line 83 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.169 std::__detail::_Mod_range_hashing Struct Reference

Public Types

- typedef std::size_t **first_argument_type**
- typedef std::size_t **result_type**
- typedef std::size_t **second_argument_type**

Public Member Functions

- result_type **operator()** (first_argument_type __num, second_argument_type __den) const noexcept

4.169.1 Detailed Description

Default range hashing function: use division to fold a large number into the range [0, N).

Definition at line 424 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.170 std::_Mu< _Arg, _IsBindExp, _IsPlaceholder > Class Template Reference

4.170.1 Detailed Description

template<typename _Arg, bool _IsBindExp = is_bind_expression<_Arg>::value, bool _IsPlaceholder = (is_placeholder<_Arg>::value > 0)>class std::_Mu< _Arg, _IsBindExp, _IsPlaceholder >

Maps an argument to bind() into an actual argument to the bound function object [func.bind.bind]/10. Only the first parameter should be specified: the rest are used to determine among the various implementations. Note that, although this class is a function object, it isn't entirely normal because it takes only two parameters regardless of the number of parameters passed to the bind expression. The first parameter is the bound argument and the second parameter is a tuple containing references to the rest of the arguments.

Definition at line 288 of file functional.

The documentation for this class was generated from the following file:

- functional

4.171 std::_Mu< _Arg, false, false > Class Template Reference

Public Member Functions

- template<typename _CVArg , typename _Tuple >
  constexpr _CVArg && **operator()** (_CVArg &&__arg, _Tuple &) const volatile

4.171.1 Detailed Description

template<typename _Arg>class std::_Mu< _Arg, false, false >

If the argument is just a value, returns a reference to that value. The cv-qualifiers on the reference are determined by the caller. C++11 [func.bind.bind] p10 bullet 4.

Definition at line 372 of file functional.

The documentation for this class was generated from the following file:

- functional

4.172 std::_Mu< _Arg, false, true > Class Template Reference

Public Member Functions

- template<typename _Tuple >
  constexpr
  _Safe_tuple_element_t
  <(is_placeholder< _Arg >
  ::value-1), _Tuple > && **operator()** (const volatile _Arg &, _Tuple &__tuple) const volatile

4.172.1 Detailed Description

template<typename _Arg>class std::_Mu< _Arg, false, true >

If the argument is a placeholder for the Nth argument, returns a reference to the Nth argument to the bind function object. C++11 [func.bind.bind] p10 bullet 3.

Definition at line 353 of file functional.

The documentation for this class was generated from the following file:

- functional

4.173 std::_Mu< _Arg, true, false > Class Template Reference

Public Member Functions

- template<typename _CVArg , typename... _Args>
  constexpr auto **operator()** (_CVArg &__arg, tuple< _Args...> &__tuple) const volatile-> decltype(__arg(declval< _Args >()...))

4.173.1 Detailed Description

template<typename _Arg>class std::_Mu< _Arg, true, false >

If the argument is a bind expression, we invoke the underlying function object with the same cv-qualifiers as we are given and pass along all of our arguments (unwrapped). C++11 [func.bind.bind] p10 bullet 2.

Definition at line 317 of file functional.

The documentation for this class was generated from the following file:

- functional

4.174 std::_Mu< reference_wrapper< _Tp >, false, false > Class Template Reference

Public Member Functions

- template<typename _CVRef , typename _Tuple >
  constexpr _Tp & **operator()** (_CVRef &__arg, _Tuple &) const volatile

4.174.1 Detailed Description

template<typename _Tp>class std::_Mu< reference_wrapper< _Tp >, false, false >

If the argument is reference_wrapper<_Tp>, returns the underlying reference. C++11 [func.bind.bind] p10 bullet 1.

Definition at line 296 of file functional.

The documentation for this class was generated from the following file:

- functional

4.175 __gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result > Struct Template Reference

Inheritance diagram for __gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result >:



Public Types

- typedef _Tp1 first_argument_type
- typedef _Result result_type
- typedef _Tp2 second_argument_type

Public Member Functions

- _Result **operator()** (const _Tp1 &__x, const _Tp2 &__y) const

4.175.1 Detailed Description

template<typename _Tp1, typename _Tp2, typename _Result = __typeof__(*static_cast<_Tp1*>(0) * *static_cast<_Tp2*>(0))>struct __gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result >

Similar to std::multiplies, but allows two different types.

Definition at line 288 of file base.h.

4.175.2 Member Typedef Documentation

4.175.2.1 typedef _Tp1 std::binary_function< _Tp1 , _Tp2 , _Result >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.175.2.2 typedef _Result std::binary_function< _Tp1 , _Tp2 , _Result >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.175.2.3 typedef _Tp2 std::binary_function< _Tp1 , _Tp2 , _Result >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- base.h

4.176 __gnu_pbds::detail::pat_trie_base::_Node_base< _ATraits, Metadata > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Node_base< _ATraits, Metadata >:

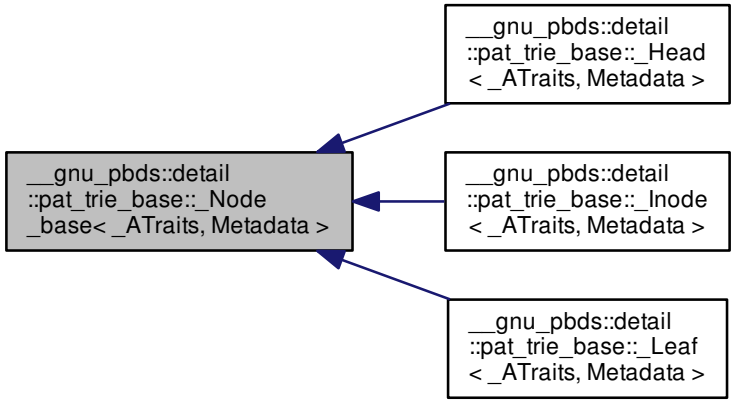

Public Types

- typedef _ATraits::const_iterator **a_const_iterator**
- typedef detail::rebind_traits < _Alloc, _ATraits > ::const_pointer **a_const_pointer**
- typedef _ATraits **access_traits**
- typedef _Alloc **allocator_type**
- typedef detail::rebind_traits < _Alloc, _Node_base > ::pointer **node_pointer**
- typedef _ATraits::type_traits **type_traits**

Public Member Functions

- **_Node_base** (node_type type)

Public Attributes

- node_pointer **m_p_parent**
- const node_type **m_type**

4.176.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Node_base< _ATraits, Metadata >

Node base.

Definition at line 92 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.177 __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >:

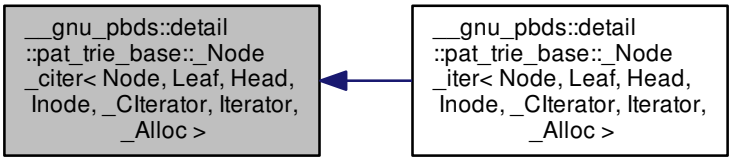

Public Types

- typedef value_type **const_reference**
- typedef trivial_iterator_difference_type **difference_type**
- typedef trivial_iterator_tag **iterator_category**
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference metadata_const_reference
- typedef Node::metadata_type metadata_type
- typedef value_type **reference**
- typedef _Alloc::size_type **size_type**
- typedef _CIterator **value_type**

Public Member Functions

- **_Node_citer** (node_pointer p_nd=0, a_const_pointer p_traits=0)
- _Node_citer get_child (size_type i) const
- metadata_const_reference get_metadata () const
- size_type num_children () const
- bool operator!= (const _Node_citer &other) const
- const_reference operator* () const
- bool operator== (const _Node_citer &other) const
- std::pair< a_const_iterator, a_const_iterator > valid_prefix () const

Public Attributes

- node_pointer **m_p_nd**
- a_const_pointer **m_p_traits**

Protected Types

- typedef Node::a_const_iterator **a_const_iterator**
- typedef Node::a_const_pointer **a_const_pointer**
- typedef rebind_traits< _Alloc, Inode >::const_pointer **inode_const_pointer**
- typedef rebind_traits< _Alloc, Inode >::pointer **inode_pointer**
- typedef rebind_traits< _Alloc, Leaf >::const_pointer **leaf_const_pointer**
- typedef rebind_traits< _Alloc, Leaf >::pointer **leaf_pointer**
- typedef rebind_traits< _Alloc, Node >::pointer **node_pointer**

4.177.1 Detailed Description

template<typename Node, typename Leaf, typename Head, typename Inode, typename _CIterator, typename Iterator, typename _Alloc>class __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >

Node const iterator.

Definition at line 810 of file pat_trie_base.hpp.

4.177.2 Member Typedef Documentation

4.177.2.1 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > typedef rebind_traits<_Alloc, metadata_type>::const_reference __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::metadata_const_reference

Const metadata reference type.

Definition at line 862 of file pat_trie_base.hpp.

4.177.2.2 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > typedef Node::metadata_type __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::metadata_type

Metadata type.

Definition at line 859 of file pat_trie_base.hpp.

4.177.3 Member Function Documentation

4.177.3.1 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > _Node_citer __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_child (size_type *i*) const [inline]

Returns a __const node __iterator to the corresponding node's i-th child.

Definition at line 902 of file pat_trie_base.hpp.

References std::advance().

4.177.3.2 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > metadata_const_reference __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_metadata ( ) const [inline]

Metadata access.

Definition at line 885 of file pat_trie_base.hpp.

4.177.3.3 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > size_type __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::num_children ( ) const [inline]

Returns the number of children in the corresponding node.

Definition at line 890 of file pat_trie_base.hpp.

References std::distance().

Referenced by __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator*(), and __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator*().

4.177.3.4 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > bool __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator!= (const _Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > & *other*) const [inline]

Compares content (negatively) to a different iterator object.

Definition at line 918 of file pat_trie_base.hpp.

4.177.3.5 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > const_reference __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator* ( ) const [inline]

Const access; returns the __const iterator* associated with the current leaf.

Definition at line 877 of file pat_trie_base.hpp.

References __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::num_children().

4.177.3.6 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > bool __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator== (const _Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > & *other*) const [inline]

Compares content to a different iterator object.

Definition at line 913 of file pat_trie_base.hpp.

4.177.3.7 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > std::pair<a_const_iterator, a_const_iterator> __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::valid_prefix ( ) const [inline]

Subtree valid prefix.

Definition at line 871 of file pat_trie_base.hpp.

The documentation for this class was generated from the following file:

- pat_trie_base.hpp

4.178 std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache > Struct Template Reference

Inheritance diagram for std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache >:



Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef const _Value * **pointer**
- typedef const _Value & **reference**
- typedef _Value **value_type**

Public Member Functions

- **_Node_const_iterator** (__node_type *__p) noexcept
- **_Node_const_iterator** (const _Node_iterator< _Value, __constant_iterators, __cache > &__x) noexcept
- void **_M_incr** () noexcept
- reference **operator*** () const noexcept
- _Node_const_iterator & **operator++** () noexcept

- _Node_const_iterator **operator++** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- __node_type * **_M_cur**

4.178.1 Detailed Description

template<typename _Value, bool __constant_iterators, bool __cache>struct std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache >

Node const_iterators, used to iterate through all the hashtable.

Definition at line 369 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.179 __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >:

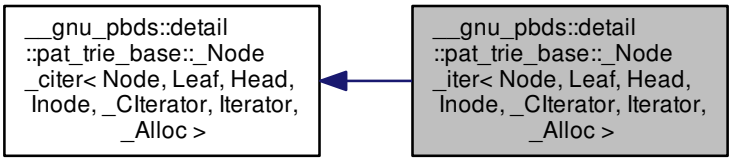

Public Types

- typedef value_type **const_reference**
- typedef trivial_iterator_difference_type **difference_type**
- typedef trivial_iterator_tag **iterator_category**
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference metadata_const_reference
- typedef Node::metadata_type metadata_type
- typedef value_type **reference**
- typedef base_type::size_type **size_type**
- typedef Iterator **value_type**

Public Member Functions

- **_Node_iter** (node_pointer p_nd=0, a_const_pointer p_traits=0)
- _Node_iter get_child (size_type i) const
- metadata_const_reference get_metadata () const
- size_type num_children () const
- bool operator!= (const _Node_citer &other) const
- reference operator* () const
- bool operator== (const _Node_citer &other) const
- std::pair< a_const_iterator, a_const_iterator > valid_prefix () const

Public Attributes

- node_pointer **m_p_nd**
- a_const_pointer **m_p_traits**

Protected Types

- typedef Node::a_const_iterator **a_const_iterator**
- typedef rebind_traits< _Alloc, Inode >::const_pointer **inode_const_pointer**
- typedef rebind_traits< _Alloc, Leaf >::const_pointer **leaf_const_pointer**
- typedef rebind_traits< _Alloc, Leaf >::pointer **leaf_pointer**

4.179.1 Detailed Description

template<typename Node, typename Leaf, typename Head, typename Inode, typename _CIterator, typename Iterator, typename _Alloc>class __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >

Node iterator.

Definition at line 934 of file pat_trie_base.hpp.

4.179.2 Member Typedef Documentation

4.179.2.1 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > typedef rebind_traits<_Alloc, metadata_type>::const_reference __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::metadata_const_reference [inherited]

Const metadata reference type.

Definition at line 862 of file pat_trie_base.hpp.

4.179.2.2 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > typedef Node::metadata_type __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::metadata_type [inherited]

Metadata type.

Definition at line 859 of file pat_trie_base.hpp.

4.179.3 Member Function Documentation

4.179.3.1 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > _Node_iter __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_child (size_type *i*) const [inline]

Returns a node __iterator to the corresponding node's i-th child.

Definition at line 966 of file pat_trie_base.hpp.

References std::advance(), and std::begin().

4.179.3.2 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > metadata_const_reference __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::get_metadata ( ) const [inline], [inherited]

Metadata access.

Definition at line 885 of file pat_trie_base.hpp.

4.179.3.3 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > size_type __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::num_children ( ) const [inline], [inherited]

Returns the number of children in the corresponding node.

Definition at line 890 of file pat_trie_base.hpp.

References std::distance().

Referenced by __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator*(), and __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator*().

4.179.3.4 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > bool __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator!= (const _Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > & *other*) const [inline], [inherited]

Compares content (negatively) to a different iterator object.

Definition at line 918 of file pat_trie_base.hpp.

4.179.3.5 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > reference __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator* ( ) const [inline]

Access; returns the iterator* associated with the current leaf.

Definition at line 958 of file pat_trie_base.hpp.

References __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::num_children().

4.179.3.6 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > bool __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::operator== (const _Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc > & *other*) const [inline], [inherited]

Compares content to a different iterator object.

Definition at line 913 of file pat_trie_base.hpp.

4.179.3.7 template<typename Node , typename Leaf , typename Head , typename Inode , typename _CIterator , typename Iterator , typename _Alloc > std::pair<a_const_iterator, a_const_iterator> __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >::valid_prefix ( ) const [inline], [inherited]

Subtree valid prefix.

Definition at line 871 of file pat_trie_base.hpp.

The documentation for this class was generated from the following file:

- pat_trie_base.hpp

4.180 std::__detail::_Node_iterator< _Value, __constant_iterators, __cache > Struct Template Reference

Inheritance diagram for std::__detail::_Node_iterator< _Value, __constant_iterators, __cache >:



Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- using **pointer** = typename std::conditional< __constant_iterators, const _Value *, _Value * >::type
- using **reference** = typename std::conditional< __constant_iterators, const _Value &, _Value & >::type
- typedef _Value **value_type**

Public Member Functions

- **_Node_iterator** (__node_type *__p) noexcept
- void **_M_incr** () noexcept
- reference **operator*** () const noexcept
- _Node_iterator & **operator++** () noexcept

- _Node_iterator **operator++** (int) noexcept
- pointer **operator->** () const noexcept

Public Attributes

- __node_type * **_M_cur**

4.180.1 Detailed Description

template<typename _Value, bool __constant_iterators, bool __cache>struct std::__detail::_Node_iterator< _Value, __constant_iterators, __cache >

Node iterators, used to iterate through all the hashtable.

Definition at line 318 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.181 std::__detail::_Node_iterator_base< _Value, _Cache_hash_code > Struct Template Reference

Public Types

- using **__node_type** = _Hash_node< _Value, _Cache_hash_code >

Public Member Functions

- **_Node_iterator_base** (__node_type *__p) noexcept
- void **_M_incr** () noexcept

Public Attributes

- __node_type * **_M_cur**

4.181.1 Detailed Description

template<typename _Value, bool _Cache_hash_code>struct std::__detail::_Node_iterator_base< _Value, _Cache_hash_code >

Base class for node iterators.

Definition at line 288 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.182 __gnu_debug::_Not_equal_to< _Type > Class Template Reference

Public Member Functions

- **_Not_equal_to** (const _Type &__v)
- bool **operator()** (const _Type &__x) const

4.182.1 Detailed Description

template<typename _Type>class __gnu_debug::_Not_equal_to< _Type >

A simple function object that returns true if the passed-in value is not equal to the stored value. It saves typing over using both bind1st and not_equal.

Definition at line 44 of file safe_sequence.h.

The documentation for this class was generated from the following file:

- safe_sequence.h

4.183 std::_Not_fn< _Fn > Class Template Reference

Public Member Functions

- template<typename _Fn2 >
  constexpr **_Not_fn** (_Fn2 &&__fn, int)
- **_Not_fn** (const _Not_fn &__fn)=default
- **_Not_fn** (_Not_fn &&__fn)=default

Public Attributes

- template<typename... _Args>
  decltype(_S_not< __inv_res_t
  < _Fn &, _Args...>
  >()) constexpr **operator()** (_Args &&...__args)&noexcept(__is_nothrow_invocable< _Fn &, _Args...>::value &&noexcept(_S_not< __inv_res_t< _Fn &, _Args...>>()))
- template<typename... _Args>
  decltype(_S_not< __inv_res_t
  < _Fn const &, _Args...>
  >()) constexpr **operator()** (_Args &&...__args) const &noexcept(__is_nothrow_invocable< _Fnconst &, _Args...>::value &&noexcept(_S_not< __inv_res_t< _Fnconst &, _Args...>>()))
- template<typename... _Args>
  decltype(_S_not< __inv_res_t
  < _Fn &&, _Args...>
  >()) constexpr **operator()** (_Args &&...__args)&&noexcept(__is_nothrow_invocable< _Fn &&, _Args...>::value &&noexcept(_S_not< __inv_res_t< _Fn &&, _Args...>>()))
- template<typename... _Args>
  decltype(_S_not< __inv_res_t
  < _Fn const &&, _Args...>
  >()) constexpr **operator()** (_Args &&...__args) const &&noexcept(__is_nothrow_invocable< _Fnconst &&, _Args...>::value &&noexcept(_S_not< __inv_res_t< _Fnconst &&, _Args...>>()))

4.183.1 Detailed Description

template<typename _Fn>class std::_Not_fn< _Fn >

Generalized negator.

Definition at line 919 of file functional.

The documentation for this class was generated from the following file:

- functional

4.184 __gnu_parallel::_Nothing Struct Reference

Public Member Functions

- template<typename _It >
  void operator() (_It __i)

4.184.1 Detailed Description

Functor doing nothing.

For some __reduction tasks (this is not a function object, but is passed as __selector __dummy parameter.

Definition at line 288 of file for_each_selectors.h.

4.184.2 Member Function Documentation

4.184.2.1 template<typename _It > void __gnu_parallel::_Nothing::operator() (_It __*i*) [inline]

Functor execution.

Parameters

__*i*	iterator referencing object.

Definition at line 294 of file for_each_selectors.h.

The documentation for this struct was generated from the following file:

- for_each_selectors.h

4.185 __gnu_parallel::_Piece< _DifferenceTp > Struct Template Reference

Public Types

- typedef _DifferenceTp **_DifferenceType**

Public Attributes

- _DifferenceType _M_begin
- _DifferenceType _M_end

4.185.1 Detailed Description

template<typename _DifferenceTp>struct __gnu_parallel::_Piece< _DifferenceTp >

Subsequence description.

Definition at line 46 of file multiway_mergesort.h.

4.185.2 Member Data Documentation

4.185.2.1 template<typename _DifferenceTp > _DifferenceType __gnu_parallel::_Piece< _DifferenceTp >::_M_begin

Begin of subsequence.

Definition at line 51 of file multiway_mergesort.h.

4.185.2.2 template<typename _DifferenceTp > _DifferenceType __gnu_parallel::_Piece< _DifferenceTp >::_M_end

End of subsequence.

Definition at line 54 of file multiway_mergesort.h.

The documentation for this struct was generated from the following file:

- multiway_mergesort.h

4.186 std::_Placeholder< _Num > Struct Template Reference

4.186.1 Detailed Description

template<int _Num>struct std::_Placeholder< _Num >

The type of placeholder objects defined by libstdc++.

Definition at line 209 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.187 __gnu_parallel::_Plus< _Tp1, _Tp2, _Result > Struct Template Reference

Inheritance diagram for __gnu_parallel::_Plus< _Tp1, _Tp2, _Result >:



Public Types

- typedef _Tp1 first_argument_type
- typedef _Result result_type
- typedef _Tp2 second_argument_type

Public Member Functions

- _Result **operator()** (const _Tp1 &__x, const _Tp2 &__y) const

4.187.1 Detailed Description

template<typename _Tp1, typename _Tp2, typename _Result = __typeof__(*static_cast<_Tp1*>(0) + *static_cast<_Tp2*>(0))>struct __gnu_parallel::_Plus< _Tp1, _Tp2, _Result >

Similar to std::plus, but allows two different types.

Definition at line 272 of file base.h.

4.187.2 Member Typedef Documentation

4.187.2.1 typedef _Tp1 std::binary_function< _Tp1 , _Tp2 , _Result >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.187.2.2 typedef _Result std::binary_function< _Tp1 , _Tp2 , _Result >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.187.2.3 typedef _Tp2 std::binary_function< _Tp1 , _Tp2 , _Result >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- base.h

4.188 __gnu_parallel::_PMWMSSortingData< _RAIter > Struct Template Reference

Public Types

- typedef _TraitsType::difference_type **_DifferenceType**
- typedef std::iterator_traits < _RAIter > **_TraitsType**
- typedef _TraitsType::value_type **_ValueType**

Public Attributes

- _ThreadIndex _M_num_threads
- _DifferenceType * _M_offsets
- std::vector< _Piece < _DifferenceType > > * _M_pieces
- _ValueType * _M_samples
- _RAIter _M_source
- _DifferenceType * _M_starts
- _ValueType ** _M_temporary

4.188.1 Detailed Description

template<typename _RAIter>struct __gnu_parallel::_PMWMSSortingData< _RAIter >

Data accessed by all threads.

PMWMS = parallel multiway mergesort

Definition at line 61 of file multiway_mergesort.h.

4.188.2 Member Data Documentation

4.188.2.1 template<typename _RAIter> _ThreadIndex __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_num_threads

Number of threads involved.

Definition at line 68 of file multiway_mergesort.h.

Referenced by __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel::parallel_sort_mwms_pu().

4.188.2.2 template<typename _RAIter> _DifferenceType* __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_offsets

Offsets to add to the found positions.

Definition at line 83 of file multiway_mergesort.h.

Referenced by __gnu_parallel::parallel_sort_mwms().

4.188.2.3 template<typename _RAIter> std::vector<_Piece<_DifferenceType> >* __gnu_parallel::_PMWMSSorting-Data< _RAIter >::_M_pieces

Pieces of data to merge [thread][__sequence].

Definition at line 86 of file multiway_mergesort.h.

Referenced by __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel::parallel_sort_mwms_pu().

4.188.2.4 template<typename _RAIter> _ValueType* __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_samples

Samples.

Definition at line 80 of file multiway_mergesort.h.

Referenced by __gnu_parallel::__determine_samples(), and __gnu_parallel::parallel_sort_mwms().

4.188.2.5 template<typename _RAIter> _RAIter __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_source

Input __begin.

Definition at line 71 of file multiway_mergesort.h.

Referenced by __gnu_parallel::__determine_samples(), __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel-::parallel_sort_mwms_pu().

4.188.2.6 template<typename _RAIter> _DifferenceType* __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_starts

Start indices, per thread.

Definition at line 74 of file multiway_mergesort.h.

Referenced by __gnu_parallel::__determine_samples(), __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel-::parallel_sort_mwms_pu().

4.188.2.7 template<typename _RAIter> _ValueType** __gnu_parallel::_PMWMSSortingData< _RAIter >::_M_temporary

Storage in which to sort.

Definition at line 77 of file multiway_mergesort.h.

Referenced by __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel::parallel_sort_mwms_pu().

The documentation for this struct was generated from the following file:

- multiway_mergesort.h

4.189 __gnu_cxx::_Pointer_adapter< _Storage_policy > Class Template Reference

Inherits _Storage_policy.

Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef _Storage_policy::element_type **element_type**
- typedef std::random_access_iterator_tag **iterator_category**
- typedef _Pointer_adapter **pointer**
- typedef _Reference_type < element_type >::reference **reference**
- typedef _Unqualified_type < element_type >::type **value_type**

Public Member Functions

- **_Pointer_adapter** (element_type *__arg=0)
- **_Pointer_adapter** (const _Pointer_adapter &__arg)
- template<typename _Up >
  _Pointer_adapter (_Up *__arg)
- template<typename _Up >
  _Pointer_adapter (const _Pointer_adapter< _Up > &__arg)
- **operator bool** () const
- reference **operator*** () const
- _Pointer_adapter & **operator++** ()
- _Pointer_adapter **operator++** (int)
- _Pointer_adapter & **operator+=** (short __offset)
- _Pointer_adapter & **operator+=** (unsigned short __offset)
- _Pointer_adapter & **operator+=** (int __offset)
- _Pointer_adapter & **operator+=** (unsigned int __offset)
- _Pointer_adapter & **operator+=** (long __offset)
- _Pointer_adapter & **operator+=** (unsigned long __offset)
- _Pointer_adapter & **operator+=** (long long __offset)
- _Pointer_adapter & **operator+=** (unsigned long long __offset)
- template<typename _Up >
  std::ptrdiff_t **operator-** (const _Pointer_adapter< _Up > &__rhs) const
- _Pointer_adapter & **operator--** ()
- _Pointer_adapter **operator--** (int)
- _Pointer_adapter & **operator-=** (short __offset)
- _Pointer_adapter & **operator-=** (unsigned short __offset)
- _Pointer_adapter & **operator-=** (int __offset)
- _Pointer_adapter & **operator-=** (unsigned int __offset)
- _Pointer_adapter & **operator-=** (long __offset)
- _Pointer_adapter & **operator-=** (unsigned long __offset)
- _Pointer_adapter & **operator-=** (long long __offset)
- _Pointer_adapter & **operator-=** (unsigned long long __offset)
- element_type * **operator->** () const
- _Pointer_adapter & **operator=** (const _Pointer_adapter &__arg)
- template<typename _Up >
  _Pointer_adapter & **operator=** (const _Pointer_adapter< _Up > &__arg)
- template<typename _Up >
  _Pointer_adapter & **operator=** (_Up *__arg)
- reference **operator[]** (std::ptrdiff_t __index) const

Friends

- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, short __offset)
- _Pointer_adapter **operator+** (short __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, unsigned short __offset)
- _Pointer_adapter **operator+** (unsigned short __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, int __offset)
- _Pointer_adapter **operator+** (int __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, unsigned int __offset)
- _Pointer_adapter **operator+** (unsigned int __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, long __offset)
- _Pointer_adapter **operator+** (long __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, unsigned long __offset)
- _Pointer_adapter **operator+** (unsigned long __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, long long __offset)
- _Pointer_adapter **operator+** (long long __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (unsigned long long __offset, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator+** (const _Pointer_adapter &__lhs, unsigned long long __offset)
- std::ptrdiff_t **operator-** (const _Pointer_adapter &__lhs, element_type *__rhs)
- std::ptrdiff_t **operator-** (element_type *__lhs, const _Pointer_adapter &__rhs)
- template<typename _Up >
  std::ptrdiff_t **operator-** (const _Pointer_adapter &__lhs, _Up *__rhs)
- template<typename _Up >
  std::ptrdiff_t **operator-** (_Up *__lhs, const _Pointer_adapter &__rhs)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, short __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, unsigned short __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, int __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, unsigned int __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, long __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, unsigned long __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, long long __offset)
- _Pointer_adapter **operator-** (const _Pointer_adapter &__lhs, unsigned long long __offset)

4.189.1 Detailed Description

template<typename _Storage_policy>class __gnu_cxx::_Pointer_adapter< _Storage_policy >

The following provides an 'alternative pointer' that works with the containers when specified as the pointer typedef of the allocator.

The pointer type used with the containers doesn't have to be this class, but it must support the implicit conversions, pointer arithmetic, comparison operators, etc. that are supported by this class, and avoid raising compile-time ambiguities. Because creating a working pointer can be challenging, this pointer template was designed to wrapper an easier storage policy type, so that it becomes reusable for creating other pointer types.

A key point of this class is also that it allows container writers to 'assume' Allocator::pointer is a typedef for a normal pointer. This class supports most of the conventions of a true pointer, and can, for instance handle implicit conversion to const and base class pointer types. The only impositions on container writers to support extended pointers are: 1) use the Allocator::pointer typedef appropriately for pointer types. 2) if you need pointer casting, use the __pointer_cast<> functions from ext/cast.h. This allows pointer cast operations to be overloaded as necessary by custom pointers.

Note: The const qualifier works with this pointer adapter as follows:

_Tp* == _Pointer_adapter<_Std_pointer_impl<_Tp> >; const _Tp* == _Pointer_adapter<_Std_pointer_impl<const _Tp> >; _Tp* const == const _Pointer_adapter<_Std_pointer_impl<_Tp> >; const _Tp* const == const _Pointer_adapter<_Std_pointer_impl<const _Tp> >;

Definition at line 284 of file pointer.h.

The documentation for this class was generated from the following file:

- pointer.h

4.190 std::__detail::_Power2_rehash_policy Struct Reference

Public Types

- using **__has_load_factor** = true_type
- typedef std::size_t **_State**

Public Member Functions

- **_Power2_rehash_policy** (float __z=1.0) noexcept
- std::size_t **_M_bkt_for_elements** (std::size_t __n) const noexcept
- std::pair< bool, std::size_t > **_M_need_rehash** (std::size_t __n_bkt, std::size_t __n_elt, std::size_t __n_ins) noexcept
- std::size_t **_M_next_bkt** (std::size_t __n) noexcept
- void **_M_reset** () noexcept
- void **_M_reset** (_State __state) noexcept
- _State **_M_state** () const noexcept
- float **max_load_factor** () const noexcept

Public Attributes

- float **_M_max_load_factor**
- std::size_t **_M_next_resize**

Static Public Attributes

- static const std::size_t **_S_growth_factor**

4.190.1 Detailed Description

Rehash policy providing power of 2 bucket numbers. Avoids modulo operations.

Definition at line 522 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.191 std::__detail::_Prime_rehash_policy Struct Reference

Public Types

- using **__has_load_factor** = true_type
- typedef std::size_t **_State**

Public Member Functions

- **_Prime_rehash_policy** (float __z=1.0) noexcept
- std::size_t **_M_bkt_for_elements** (std::size_t __n) const
- std::pair< bool, std::size_t > **_M_need_rehash** (std::size_t __n_bkt, std::size_t __n_elt, std::size_t __n_ins) const
- std::size_t **_M_next_bkt** (std::size_t __n) const
- void **_M_reset** () noexcept
- void **_M_reset** (_State __state)
- _State **_M_state** () const
- float **max_load_factor** () const noexcept

Public Attributes

- float **_M_max_load_factor**
- std::size_t **_M_next_resize**

Static Public Attributes

- static const std::size_t **_S_growth_factor**

4.191.1 Detailed Description

Default value for rehash policy. Bucket size is (usually) the smallest prime that keeps the load factor small enough.

Definition at line 445 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.192 __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp > Class Template Reference

Public Types

- typedef _DifferenceTp **_DifferenceType**
- typedef _PseudoSequenceIterator< _Tp, uint64_t > **iterator**

Public Member Functions

- _PseudoSequence (const _Tp &__val, _DifferenceType __count)
- iterator begin () const
- iterator end () const

4.192.1 Detailed Description

template<typename _Tp, typename _DifferenceTp>class __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >

Sequence that conceptually consists of multiple copies of the same element. The copies are not stored explicitly, of course.

Parameters

_Tp	Sequence _M_value type.
_DifferenceTp	Sequence difference type.

Definition at line 359 of file base.h.

4.192.2 Constructor & Destructor Documentation

4.192.2.1 template<typename _Tp, typename _DifferenceTp> __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >::_PseudoSequence (const _Tp & *__val*, _DifferenceType *__count*) [inline]

Constructor.

Parameters

__val	Element of the sequence.
__count	Number of (virtual) copies.

Definition at line 371 of file base.h.

4.192.3 Member Function Documentation

4.192.3.1 template<typename _Tp, typename _DifferenceTp> iterator __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >::begin ( ) const [inline]

Begin iterator.

Definition at line 376 of file base.h.

4.192.3.2 template<typename _Tp, typename _DifferenceTp> iterator __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >::end ( ) const [inline]

End iterator.

Definition at line 381 of file base.h.

The documentation for this class was generated from the following file:

- base.h

4.193 __gnu_parallel::_PseudoSequenceIterator< _Tp, _DifferenceTp > Class Template Reference

Public Types

- typedef _DifferenceTp **_DifferenceType**

Public Member Functions

- **_PseudoSequenceIterator** (const _Tp &__val, _DifferenceType __pos)
- bool **operator!=** (const _PseudoSequenceIterator &__i2)
- const _Tp & **operator*** () const
- _PseudoSequenceIterator & **operator++** ()
- _PseudoSequenceIterator **operator++** (int)
- _DifferenceType **operator-** (const _PseudoSequenceIterator &__i2)
- bool **operator==** (const _PseudoSequenceIterator &__i2)
- const _Tp & **operator[]** (_DifferenceType) const

4.193.1 Detailed Description

template<typename _Tp, typename _DifferenceTp>class __gnu_parallel::_PseudoSequenceIterator< _Tp, _DifferenceTp >

_Iterator associated with __gnu_parallel::_PseudoSequence. If features the usual random-access iterator functionality.

Parameters

_Tp	Sequence _M_value type.
_DifferenceTp	Sequence difference type.

Definition at line 306 of file base.h.

The documentation for this class was generated from the following file:

- base.h

4.194 __gnu_parallel::_QSBThreadLocal< _RAIter > Struct Template Reference

Public Types

- typedef _TraitsType::difference_type **_DifferenceType**
- typedef std::pair< _RAIter, _RAIter > _Piece
- typedef std::iterator_traits < _RAIter > **_TraitsType**

Public Member Functions

- _QSBThreadLocal (int __queue_size)

Public Attributes

- volatile _DifferenceType * _M_elements_leftover
- _Piece _M_global
- _Piece _M_initial
- _RestrictedBoundedConcurrentQueue < _Piece > _M_leftover_parts
- _ThreadIndex _M_num_threads

4.194.1 Detailed Description

template<typename _RAIter>struct __gnu_parallel::_QSBThreadLocal< _RAIter >

Information local to one thread in the parallel quicksort run.

Definition at line 65 of file balanced_quicksort.h.

4.194.2 Member Typedef Documentation

4.194.2.1 template<typename _RAIter> typedef std::pair<_RAIter, _RAIter> __gnu_parallel::_QSBThreadLocal< _RAIter >::_Piece

Continuous part of the sequence, described by an iterator pair.

Definition at line 72 of file balanced_quicksort.h.

4.194.3 Constructor & Destructor Documentation

4.194.3.1 template<typename _RAIter> __gnu_parallel::_QSBThreadLocal< _RAIter >::_QSBThreadLocal (int *__queue_size*) [inline]

Constructor.

Parameters

__queue_size	size of the work-stealing queue.

Definition at line 91 of file balanced_quicksort.h.

4.194.4 Member Data Documentation

4.194.4.1 template<typename _RAIter> volatile _DifferenceType* __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_elements_leftover

Pointer to a counter of elements left over to sort.

Definition at line 84 of file balanced_quicksort.h.

Referenced by __gnu_parallel::__parallel_sort_qsb(), __gnu_parallel::__qsb_conquer(), and __gnu_parallel::__qsb_local_sort_with_helping().

4.194.4.2 template<typename _RAIter> _Piece __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_global

The complete sequence to sort.

Definition at line 87 of file balanced_quicksort.h.

4.194.4.3 template<typename _RAIter> _Piece __gnu_parallel::_QSBThreadLocal< _RAIter >::_M_initial

Initial piece to work on.

Definition at line 75 of file balanced_quicksort.h.

Referenced by __gnu_parallel::__qsb_conquer(), and __gnu_parallel::__qsb_local_sort_with_helping().

4.194.4.4 template<typename _RAlter> _RestrictedBoundedConcurrentQueue<_Piece> __gnu_parallel::_QSBThreadLocal< _RAlter >::_M_leftover_parts

Work-stealing queue.

Definition at line 78 of file balanced_quicksort.h.

Referenced by __gnu_parallel::__qsb_local_sort_with_helping().

4.194.4.5 template<typename _RAlter> _ThreadIndex __gnu_parallel::_QSBThreadLocal< _RAlter >::_M_num_threads

Number of threads involved in this algorithm.

Definition at line 81 of file balanced_quicksort.h.

Referenced by __gnu_parallel::__qsb_local_sort_with_helping().

The documentation for this struct was generated from the following file:

- balanced_quicksort.h

4.195 std::__detail::_Quoted_string< _String, _CharT > Struct Template Reference

Public Member Functions

- **_Quoted_string** (_String __str, _CharT __del, _CharT __esc)
- _Quoted_string & **operator=** (_Quoted_string &)=delete

Public Attributes

- _CharT **_M_delim**
- _CharT **_M_escape**
- _String **_M_string**

4.195.1 Detailed Description

template<typename _String, typename _CharT>struct std::__detail::_Quoted_string< _String, _CharT >

Struct for delimited strings.

Definition at line 49 of file quoted_string.h.

The documentation for this struct was generated from the following file:

- quoted_string.h

4.196 __gnu_parallel::_RandomNumber Class Reference

Public Member Functions

- _RandomNumber ()
- _RandomNumber (uint32_t __seed, uint64_t _M_supremum=0x100000000ULL)
- unsigned long __genrand_bits (int __bits)
- uint32_t operator() ()
- uint32_t operator() (uint64_t local_supremum)

4.196.1 Detailed Description

Random number generator, based on the Mersenne twister.

Definition at line 42 of file random_number.h.

4.196.2 Constructor & Destructor Documentation

4.196.2.1 __gnu_parallel::_RandomNumber::_RandomNumber ( ) [inline]

Default constructor. Seed with 0.

Definition at line 74 of file random_number.h.

4.196.2.2 __gnu_parallel::_RandomNumber::_RandomNumber (uint32_t *__seed,* uint64_t *_M_supremum* = 0x100000000ULL) [inline]

Constructor.

Parameters

__seed	Random __seed.
_M_supremum	Generate integer random numbers in the interval [0,_M_supremum).

Definition at line 85 of file random_number.h.

4.196.3 Member Function Documentation

4.196.3.1 unsigned long __gnu_parallel::_RandomNumber::__genrand_bits (int *__bits*) [inline]

Generate a number of random bits, run-time parameter.

Parameters

__bits	Number of bits to generate.

Definition at line 109 of file random_number.h.

4.196.3.2 uint32_t __gnu_parallel::_RandomNumber::operator() ( ) [inline]

Generate unsigned random 32-bit integer.

Definition at line 94 of file random_number.h.

4.196.3.3 uint32_t __gnu_parallel::_RandomNumber::operator() (uint64_t *local_supremum*) [inline]

Generate unsigned random 32-bit integer in the interval [0,local_supremum).

Definition at line 100 of file random_number.h.

The documentation for this class was generated from the following file:

- random_number.h

4.197 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename > Struct Template Reference

Inheritance diagram for std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename >:

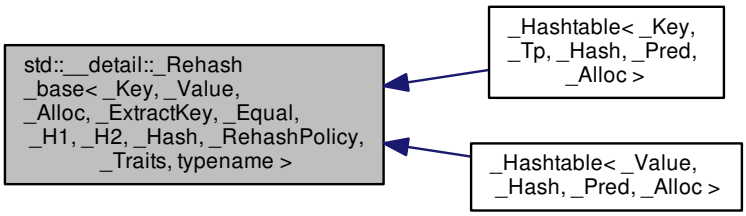

4.197.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits, typename = __detected_or_t<false_type, __has_load_factor, _RehashPolicy>>struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename >

Primary class template _Rehash_base.

Give hashtable the max_load_factor functions and reserve iff the rehash policy supports it.

Definition at line 1049 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.198 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type > Struct Template Reference

4.198.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type >

Specialization when rehash policy doesn't provide load factor management.

Definition at line 1056 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.199 std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type > Struct Template Reference

Public Types

- using **__hashtable** = _Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Public Member Functions

- float **max_load_factor** () const noexcept
- void **max_load_factor** (float __z)
- void **reserve** (std::size_t __n)

4.199.1 Detailed Description

template<typename _Key, typename _Value, typename _Alloc, typename _ExtractKey, typename _Equal, typename _H1, typename _H2, typename _Hash, typename _RehashPolicy, typename _Traits>struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type >

Specialization when rehash policy provide load factor management.

Definition at line 1067 of file hashtable_policy.h.

The documentation for this struct was generated from the following file:

- hashtable_policy.h

4.200 __gnu_cxx::_Relative_pointer_impl< _Tp > Class Template Reference

Public Types

- typedef _Tp **element_type**

Public Member Functions

- _Tp * **get** () const
- bool **operator<** (const _Relative_pointer_impl &__rarg) const
- bool **operator==** (const _Relative_pointer_impl &__rarg) const
- void **set** (_Tp *__arg)

4.200.1 Detailed Description

template<typename _Tp>class __gnu_cxx::_Relative_pointer_impl< _Tp >

A storage policy for use with _Pointer_adapter<> which stores the pointer's address as an offset value which is relative to its own address.

This is intended for pointers within shared memory regions which might be mapped at different addresses by different processes. For null pointers, a value of 1 is used. (0 is legitimate sometimes for nodes in circularly linked lists) This

value was chosen as the least likely to generate an incorrect null, As there is no reason why any normal pointer would point 1 byte into its own pointer address.

Definition at line 112 of file pointer.h.

The documentation for this class was generated from the following file:

- pointer.h

4.201 __gnu_cxx::_Relative_pointer_impl< const _Tp > Class Template Reference

Public Types

- typedef const _Tp **element_type**

Public Member Functions

- const _Tp * **get** () const
- bool **operator<** (const _Relative_pointer_impl &__rarg) const
- bool **operator==** (const _Relative_pointer_impl &__rarg) const
- void **set** (const _Tp *__arg)

4.201.1 Detailed Description

template<typename _Tp>class __gnu_cxx::_Relative_pointer_impl< const _Tp >

Relative_pointer_impl needs a specialization for const T because of the casting done during pointer arithmetic.

Definition at line 164 of file pointer.h.

The documentation for this class was generated from the following file:

- pointer.h

4.202 __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp > Class Template Reference

Public Member Functions

- _RestrictedBoundedConcurrentQueue (_SequenceIndex __max_size)
- ~_RestrictedBoundedConcurrentQueue ()
- bool pop_back (_Tp &__t)
- bool pop_front (_Tp &__t)
- void push_front (const _Tp &__t)

4.202.1 Detailed Description

template<typename _Tp>class __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >

Double-ended queue of bounded size, allowing lock-free atomic access. push_front() and pop_front() must not be called concurrently to each other, while pop_back() can be called concurrently at all times. `empty()`, `size()`, and `top()` are intentionally not provided. Calling them would not make sense in a concurrent setting.

Parameters

_Tp	Contained element type.

Definition at line 52 of file queue.h.

4.202.2 Constructor & Destructor Documentation

4.202.2.1 template<typename _Tp> __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >::_RestrictedBoundedConcurrentQueue (_SequenceIndex *__max_size*) [inline]

Constructor. Not to be called concurrent, of course.

Parameters

__max_size	Maximal number of elements to be contained.

Definition at line 68 of file queue.h.

4.202.2.2 template<typename _Tp> __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >::~_RestrictedBoundedConcurrentQueue ( ) [inline]

Destructor. Not to be called concurrent, of course.

Definition at line 77 of file queue.h.

4.202.3 Member Function Documentation

4.202.3.1 template<typename _Tp> bool __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >::pop_back (_Tp & *__t*) [inline]

Pops one element from the queue at the front end. Must not be called concurrently with pop_front().

Definition at line 127 of file queue.h.

4.202.3.2 template<typename _Tp> bool __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >::pop_front (_Tp & *__t*) [inline]

Pops one element from the queue at the front end. Must not be called concurrently with pop_front().

Definition at line 100 of file queue.h.

4.202.3.3 template<typename _Tp> void __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >::push_front (const _Tp & *__t*) [inline]

Pushes one element into the queue at the front end. Must not be called concurrently with pop_front().

Definition at line 83 of file queue.h.

The documentation for this class was generated from the following file:

- queue.h

4.203 std::__future_base::_Result< _Res > Struct Template Reference

Inheritance diagram for std::__future_base::_Result< _Res >:

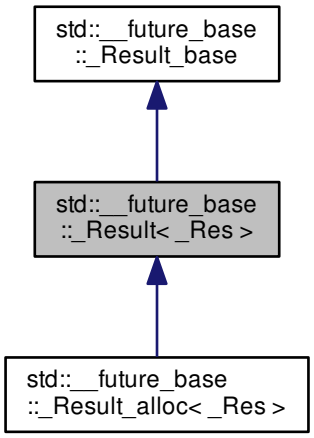

Public Types

- typedef _Res **result_type**

Public Member Functions

- void **_M_set** (const _Res &__res)
- void **_M_set** (_Res &&__res)
- _Res & **_M_value** () noexcept

Public Attributes

- exception_ptr **_M_error**

4.203.1 Detailed Description

template<typename _Res>struct std::__future_base::_Result< _Res >

A result object that has storage for an object of type _Res.

Definition at line 227 of file future.

The documentation for this struct was generated from the following file:

- future

4.204 std::__future_base::_Result< _Res & > Struct Template Reference

Inheritance diagram for std::__future_base::_Result< _Res & >:



Public Types

- typedef _Res & **result_type**

Public Member Functions

- _Res & **_M_get** () noexcept
- void **_M_set** (_Res &__res) noexcept

Public Attributes

- exception_ptr **_M_error**

4.204.1 Detailed Description

template<typename _Res>struct std::__future_base::_Result< _Res & >

Partial specialization for reference types.

Definition at line 630 of file future.

The documentation for this struct was generated from the following file:

- future

4.205 std::__future_base::_Result< void > Struct Template Reference

Inheritance diagram for std::__future_base::_Result< void >:



Public Types

- typedef void **result_type**

Public Attributes

- exception_ptr **_M_error**

4.205.1 Detailed Description

template<>struct std::__future_base::_Result< void >

Explicit specialization for void.

Definition at line 650 of file future.

The documentation for this struct was generated from the following file:

- future

4.206 std::__future_base::_Result_alloc< _Res, _Alloc > Struct Template Reference

Inheritance diagram for std::__future_base::_Result_alloc< _Res, _Alloc >:

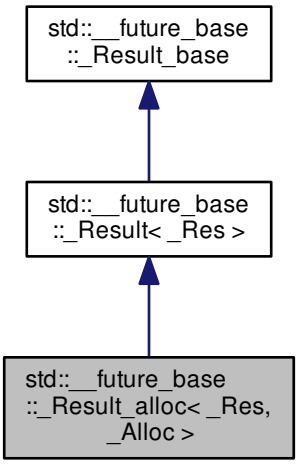

Public Types

- using **__allocator_type** = __alloc_rebind< _Alloc, _Result_alloc >
- typedef _Res **result_type**

Public Member Functions

- **_Result_alloc** (const _Alloc &__a)
- void **_M_set** (const _Res &__res)
- void **_M_set** (_Res &&__res)
- _Res & **_M_value** () noexcept

Public Attributes

- exception_ptr **_M_error**

4.206.1 Detailed Description

template<typename _Res, typename _Alloc>struct std::__future_base::_Result_alloc< _Res, _Alloc >

A result object that uses an allocator.

Definition at line 268 of file future.

The documentation for this struct was generated from the following file:

- future

4.207 std::__future_base::_Result_base Struct Reference

Inheritance diagram for std::__future_base::_Result_base:

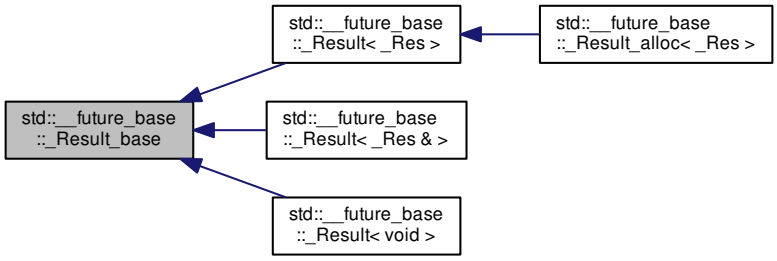

Public Member Functions

- **_Result_base** (const _Result_base &)=delete
- virtual void **_M_destroy** ()=0
- _Result_base & **operator=** (const _Result_base &)=delete

Public Attributes

- exception_ptr **_M_error**

4.207.1 Detailed Description

Base class for results.

Definition at line 201 of file future.

The documentation for this struct was generated from the following file:

- future

4.208 __gnu_debug::_Safe_container< _SafeContainer, _Alloc, _SafeBase, _IsCxx11AllocatorAware > Class Template Reference

Inherits _SafeBase< _SafeContainer >.

Public Member Functions

- void **_M_swap** (_Safe_container &__x) noexcept
- _Safe_container & **operator=** (const _Safe_container &) noexcept
- _Safe_container & **operator=** (_Safe_container &&__x) noexcept

Protected Member Functions

- **_Safe_container** (const _Safe_container &)=default
- **_Safe_container** (_Safe_container &&)=default
- **_Safe_container** (_Safe_container &&__x, const _Alloc &__a)
- _Safe_container & **_M_safe** () noexcept

4.208.1 Detailed Description

template<typename _SafeContainer, typename _Alloc, template< typename > class _SafeBase, bool _IsCxx11AllocatorAware = true>class __gnu_debug::_Safe_container< _SafeContainer, _Alloc, _SafeBase, _IsCxx11AllocatorAware >

Safe class dealing with some allocator dependent operations.

Definition at line 41 of file safe_container.h.

The documentation for this class was generated from the following file:

- safe_container.h

4.209 __gnu_debug::_Safe_forward_list< _SafeSequence > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_forward_list< _SafeSequence >:

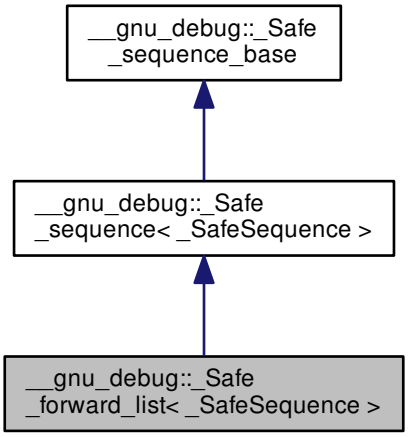

Public Member Functions

- void _M_invalidate_if (_Predicate __pred)
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- void **_M_swap** (_Safe_sequence_base &) noexcept

4.209.1 Detailed Description

template<typename _SafeSequence>class __gnu_debug::_Safe_forward_list< _SafeSequence >

Special iterators swap and invalidation for forward_list because of the before_begin iterator.

Definition at line 56 of file debug/forward_list.

4.209.2 Member Function Documentation

4.209.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.209.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.209.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.209.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.209.2.5 void __gnu_debug::_Safe_sequence< _SafeSequence >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.209.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.209.2.7 void __gnu_debug::_Safe_sequence< _SafeSequence >::_M_transfer_from_if (_Safe_sequence< _SafeSequence > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.209.3 Member Data Documentation

4.209.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.209.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.209.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/forward_list

4.210 __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >:



Public Types

- typedef _Safe_iterator < _Iterator, _Sequence, iterator_category > **_Self**
- typedef _Traits::difference_type **difference_type**
- typedef _Traits::iterator_category **iterator_category**
- typedef _Iterator **iterator_type**
- typedef _Traits::pointer **pointer**
- typedef _Traits::reference **reference**
- typedef _Traits::value_type **value_type**

Public Member Functions

- _Safe_iterator () noexcept
- _Safe_iterator (_Iterator __i, const _Safe_sequence_base *__seq) noexcept
- _Safe_iterator (const _Safe_iterator &__x) noexcept
- _Safe_iterator (_Safe_iterator &&__x) noexcept
- template<typename _MutableIterator > _Safe_iterator (const _Safe_iterator< _MutableIterator, _Sequence, typename __gnu_cxx::__enable_if< _IsConstant::__value &&std::__are_same< _MutableIterator, _OtherIterator >::__value, _Category >::__type > &__x) noexcept
- void _M_attach (_Safe_sequence_base *__seq)
- void _M_attach_single (_Safe_sequence_base *__seq)
- bool _M_attached_to (const _Safe_sequence_base *__seq) const
- bool _M_before_dereferenceable () const
- bool **_M_can_advance** (difference_type __n, bool __strict=false) const
- bool _M_can_compare (const _Safe_iterator_base &__x) const throw ()
- bool _M_dereferenceable () const
- void _M_detach_single () throw ()

- _Distance_traits< _Iterator >
  ::__type **_M_get_distance_from_begin** () const
- _Distance_traits< _Iterator >
  ::__type **_M_get_distance_to** (const _Safe_iterator &__rhs) const
- _Distance_traits< _Iterator >
  ::__type **_M_get_distance_to_end** () const
- __gnu_cxx::__conditional_type
  < _IsConstant::__value, const
  _Sequence *, _Sequence * >
  ::__type **_M_get_sequence** () const
- bool _M_incrementable () const
- void _M_invalidate ()
- bool _M_is_before_begin () const
- bool _M_is_begin () const
- bool _M_is_beginnest () const
- bool _M_is_end () const
- void _M_reset () throw ()
- bool _M_singular () const throw ()
- void _M_unlink () throw ()
- bool **_M_valid_range** (const _Safe_iterator &__rhs, std::pair< difference_type, _Distance_precision > &__dist, bool __check_dereferenceable=true) const
- _Iterator & base () noexcept
- const _Iterator & **base** () const noexcept
- operator _Iterator () const noexcept
- reference operator* () const noexcept
- _Safe_iterator & operator++ () noexcept
- _Safe_iterator operator++ (int) noexcept
- pointer operator-> () const noexcept
- _Safe_iterator & operator= (const _Safe_iterator &__x) noexcept
- _Safe_iterator & operator= (_Safe_iterator &&__x) noexcept

Static Public Member Functions

- static constexpr bool _S_constant ()

Public Attributes

- _Safe_iterator_base * _M_next
- _Safe_iterator_base * _M_prior
- _Safe_sequence_base * _M_sequence
- unsigned int _M_version

Protected Types

- typedef std::__are_same
  < typename
  _Sequence::_Base::const_iterator,
  _Iterator > **_IsConstant**

- typedef
  __gnu_cxx::__conditional_type
  < _IsConstant::__value,
  typename
  _Sequence::_Base::iterator,
  typename
  _Sequence::_Base::const_iterator >
  ::__type **_OtherIterator**

Protected Member Functions

- **_Safe_iterator** (_Iterator __i, _Safe_sequence_base *__seq, _Attach_single) noexcept
- void _M_attach (_Safe_sequence_base *__seq, bool __constant)
- void _M_attach_single (_Safe_sequence_base *__seq, bool __constant) throw ()
- void _M_detach ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()

Friends

- bool **operator!=** (const _Self &__lhs, const _Self &__rhs) noexcept
- template<typename _IteR >
  bool **operator!=** (const _Self &__lhs, const _Safe_iterator< _IteR, _Sequence, iterator_category > &__rhs) noexcept
- bool **operator==** (const _Self &__lhs, const _Self &__rhs) noexcept
- template<typename _IteR >
  bool **operator==** (const _Self &__lhs, const _Safe_iterator< _IteR, _Sequence, iterator_category > &__rhs) noexcept

4.210.1 Detailed Description

template<typename _Ite, typename _Seq, typename _Cat>class __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >

Safe iterator wrapper.

The class template _Safe_iterator is a wrapper around an iterator that tracks the iterator's movement among sequences and checks that operations performed on the "safe" iterator are legal. In additional to the basic iterator operations (which are validated, and then passed to the underlying iterator), _Safe_iterator has member functions for iterator invalidation, attaching/detaching the iterator from sequences, and querying the iterator's state.

Note that _Iterator must be the first base class so that it gets initialized before the iterator is being attached to the container's list of iterators and it is being detached before _Iterator get destroyed. Otherwise it would result in a data race.

Definition at line 61 of file debug.h.

4.210.2 Constructor & Destructor Documentation

4.210.2.1 template<typename _Ite, typename _Seq, typename _Cat> __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_Safe_iterator ( ) [inline], [noexcept]

Postcondition

the iterator is singular and unattached

Definition at line 151 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++().

4.210.2.2 template<typename _Ite, typename _Seq, typename _Cat> __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_Safe_iterator (_Iterator __i, const _Safe_sequence_base * __seq) [inline], [noexcept]

Safe iterator construction from an unsafe iterator and its sequence.

Precondition

`seq` is not NULL

Postcondition

this is not singular

Definition at line 160 of file safe_iterator.h.

4.210.2.3 template<typename _Ite, typename _Seq, typename _Cat> __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_Safe_iterator (const _Safe_iterator< _Ite, _Seq, _Cat > & __x) [inline], [noexcept]

Copy construction.

Definition at line 172 of file safe_iterator.h.

4.210.2.4 template<typename _Ite, typename _Seq, typename _Cat> __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_Safe_iterator (_Safe_iterator< _Ite, _Seq, _Cat > && __x) [inline], [noexcept]

Move construction.

Postcondition

__x is singular and unattached

Definition at line 190 of file safe_iterator.h.

4.210.2.5 template<typename _Ite, typename _Seq, typename _Cat> template<typename _MutableIterator > __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_Safe_iterator (const _Safe_iterator< _MutableIterator, _Sequence, typename __gnu_cxx::__enable_if< _IsConstant::__value &&std::__are_same< _MutableIterator, _OtherIterator >::__value, _Category >::__type > & __x) [inline], [noexcept]

Converting constructor from a mutable iterator to a constant iterator.

Definition at line 210 of file safe_iterator.h.

4.210.3 Member Function Documentation

4.210.3.1 void __gnu_debug::_Safe_iterator_base::_M_attach (_Safe_sequence_base * __seq, bool __constant) [protected], [inherited]

Attaches this iterator to the given sequence, detaching it from whatever sequence it was attached to originally. If the new sequence is the NULL pointer, the iterator is left unattached.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach(), and __gnu_debug::_Safe_iterator_base::_Safe_iterator_base().

4.210.3.2 template<typename _Ite, typename _Seq, typename _Cat> void __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_attach (_Safe_sequence_base * *__seq*) [inline]

Attach iterator to the given sequence.

Definition at line 374 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.210.3.3 void __gnu_debug::_Safe_iterator_base::_M_attach_single (_Safe_sequence_base * *__seq,* bool *__constant*) throw) [protected], [inherited]

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach_single().

4.210.3.4 template<typename _Ite, typename _Seq, typename _Cat> void __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_attach_single (_Safe_sequence_base * *__seq*) [inline]

Likewise, but not thread-safe.

Definition at line 379 of file safe_iterator.h.

4.210.3.5 bool __gnu_debug::_Safe_iterator_base::_M_attached_to (const _Safe_sequence_base * *__seq*) const [inline], [inherited]

Determines if we are attached to the given sequence.

Definition at line 131 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_sequence.

4.210.3.6 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_before_dereferenceable ( ) const [inline]

Is the iterator before a dereferenceable one?

Definition at line 389 of file safe_iterator.h.

4.210.3.7 bool __gnu_debug::_Safe_iterator_base::_M_can_compare (const _Safe_iterator_base & *__x*) const throw) [inherited]

Can we compare this iterator to the given iterator __x? Returns true if both iterators are nonsingular and reference the same sequence.

4.210.3.8 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_dereferenceable ( ) const [inline]

Is the iterator dereferenceable?

Definition at line 384 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator*(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator->().

4.210.3.9 void __gnu_debug::_Safe_iterator_base::_M_detach ( ) [protected], [inherited]

Detach the iterator for whatever sequence it is attached to, if any.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.210.3.10 void __gnu_debug::_Safe_iterator_base::_M_detach_single ( ) throw) [inherited]

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.210.3.11 __gnu_cxx::__mutex& __gnu_debug::_Safe_iterator_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_iterator.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.210.3.12 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_incrementable ( ) const [inline]

Is the iterator incrementable?

Definition at line 401 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_before_dereferenceable(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++().

4.210.3.13 void __gnu_debug::_Safe_iterator_base::_M_invalidate ( ) [inline], [inherited]

Invalidate the iterator, making it singular.

Definition at line 146 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_version.

4.210.3.14 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_is_before_begin ( ) const [inline]

Is this iterator equal to the sequence's before_begin() iterator if any?

Definition at line 445 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_dereferenceable().

4.210.3.15 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_is_begin ( ) const [inline]

Is this iterator equal to the sequence's begin() iterator?

Definition at line 434 of file safe_iterator.h.

4.210.3.16 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_is_beginnest ( ) const [inline]

Is this iterator equal to the sequence's before_begin() iterator if any or begin() otherwise?

Definition at line 451 of file safe_iterator.h.

4.210.3.17 template<typename _Ite, typename _Seq, typename _Cat> bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_M_is_end ( ) const [inline]

Is this iterator equal to the sequence's end() iterator?

Definition at line 439 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_dereferenceable(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_incrementable().

4.210.3.18 void __gnu_debug::_Safe_iterator_base::_M_reset ( ) throw) [inherited]

Reset all member variables

4.210.3.19 bool __gnu_debug::_Safe_iterator_base::_M_singular ( ) const throw) [inherited]

Is this iterator singular?

Referenced by __gnu_debug::__check_singular_aux(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_dereferenceable(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator().

4.210.3.20 void __gnu_debug::_Safe_iterator_base::_M_unlink ( ) throw) [inline], [inherited]

Unlink itself

Definition at line 155 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_next, and __gnu_debug::_Safe_iterator_base::_M_prior.

4.210.3.21 template<typename _Ite, typename _Seq, typename _Cat> static constexpr bool __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::_S_constant ( ) [inline], [static]

Determine if this is a constant iterator.

Definition at line 354 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach_single().

4.210.3.22 template<typename _Ite, typename _Seq, typename _Cat> _Iterator& __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::base ( ) [inline], [noexcept]

Return the underlying iterator.

Definition at line 361 of file safe_iterator.h.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_before_dereferenceable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_is_begin(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_is_end(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator*(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator->(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.210.3.23 template<typename _Ite, typename _Seq, typename _Cat> __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator _Iterator ( ) const [inline], [noexcept]

Conversion to underlying non-debug iterator to allow better interaction with non-debug containers.

Definition at line 370 of file safe_iterator.h.

4.210.3.24 template<typename _Ite, typename _Seq, typename _Cat> reference __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator*( ) const [inline], [noexcept]

Iterator dereference.

Precondition

iterator is dereferenceable

Definition at line 299 of file safe_iterator.h.

4.210.3.25 template<typename _Ite, typename _Seq, typename _Cat> _Safe_iterator& __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator++ ( ) [inline], [noexcept]

Iterator preincrement.

Precondition

iterator is incrementable

Definition at line 326 of file safe_iterator.h.

4.210.3.26 template<typename _Ite, typename _Seq, typename _Cat> _Safe_iterator __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator++ (int) [inline], [noexcept]

Iterator postincrement.

Precondition

iterator is incrementable

Definition at line 341 of file safe_iterator.h.

4.210.3.27 template<typename _Ite, typename _Seq, typename _Cat> pointer __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator-> ( ) const [inline], [noexcept]

Iterator dereference.

Precondition

iterator is dereferenceable

Definition at line 312 of file safe_iterator.h.

4.210.3.28 template<typename _Ite, typename _Seq, typename _Cat> _Safe_iterator& __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator= (const _Safe_iterator< _Ite, _Seq, _Cat > & *__x*) [inline], [noexcept]

Copy assignment.

Definition at line 232 of file safe_iterator.h.

4.210.3.29 template<typename _Ite, typename _Seq, typename _Cat> _Safe_iterator& __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >::operator= (_Safe_iterator< _Ite, _Seq, _Cat > && *__x*) [inline], [noexcept]

Move assignment.

Postcondition

__x is singular and unattached

Definition at line 264 of file safe_iterator.h.

4.210.4 Member Data Documentation

4.210.4.1 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_next [inherited]

Pointer to the next iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 74 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.210.4.2 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_prior [inherited]

Pointer to the previous iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 70 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.210.4.3 _Safe_sequence_base* __gnu_debug::_Safe_iterator_base::_M_sequence [inherited]

The sequence this iterator references; may be NULL to indicate a singular iterator.

Definition at line 57 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_attached_to(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_iterator_base::_Safe_iterator_base(), __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.210.4.4 unsigned int __gnu_debug::_Safe_iterator_base::_M_version [inherited]

The version number of this iterator. The sentinel value 0 is used to indicate an invalidated iterator (i.e., one that is singular because of an operation on the container). This version number must equal the version number in the sequence referenced by _M_sequence for the iterator to be non-singular.

Definition at line 66 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_invalidate(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

The documentation for this class was generated from the following files:

- debug.h
- safe_iterator.h
- safe_iterator.tcc

4.211 __gnu_debug::_Safe_iterator_base Class Reference

Inheritance diagram for __gnu_debug::_Safe_iterator_base:

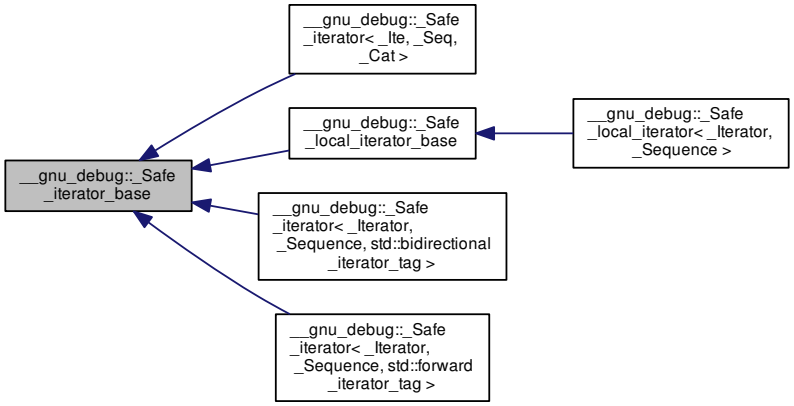

Public Member Functions

- bool _M_attached_to (const _Safe_sequence_base *__seq) const
- bool _M_can_compare (const _Safe_iterator_base &__x) const throw ()
- void _M_detach_single () throw ()
- void _M_invalidate ()
- void _M_reset () throw ()
- bool _M_singular () const throw ()
- void _M_unlink () throw ()

Public Attributes

- _Safe_iterator_base * _M_next
- _Safe_iterator_base * _M_prior
- _Safe_sequence_base * _M_sequence
- unsigned int _M_version

Protected Member Functions

- _Safe_iterator_base ()
- _Safe_iterator_base (const _Safe_sequence_base *__seq, bool __constant)
- _Safe_iterator_base (const _Safe_iterator_base &__x, bool __constant)
- void _M_attach (_Safe_sequence_base *__seq, bool __constant)
- void _M_attach_single (_Safe_sequence_base *__seq, bool __constant) throw ()
- void _M_detach ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()

Friends

- class **_Safe_sequence_base**

4.211.1 Detailed Description

Basic functionality for a *safe* iterator.

The _Safe_iterator_base base class implements the functionality of a safe iterator that is not specific to a particular iterator type. It contains a pointer back to the sequence it references along with iterator version information and pointers to form a doubly-linked list of iterators referenced by the container.

This class must not perform any operations that can throw an exception, or the exception guarantees of derived iterators will be broken.

Definition at line 50 of file safe_base.h.

4.211.2 Constructor & Destructor Documentation

4.211.2.1 __gnu_debug::_Safe_iterator_base::_Safe_iterator_base ( ) [inline], [protected]

Initializes the iterator and makes it singular.

Definition at line 78 of file safe_base.h.

4.211.2.2 __gnu_debug::_Safe_iterator_base::_Safe_iterator_base (const _Safe_sequence_base * *__seq,* bool *__constant*) [inline], [protected]

Initialize the iterator to reference the sequence pointed to by __seq. __constant is true when we are initializing a constant iterator, and false if it is a mutable iterator. Note that __seq may be NULL, in which case the iterator will be singular. Otherwise, the iterator will reference __seq and be nonsingular.

Definition at line 89 of file safe_base.h.

References _M_attach().

4.211.2.3 __gnu_debug::_Safe_iterator_base::_Safe_iterator_base (const _Safe_iterator_base & *__x,* bool *__constant*) [inline], [protected]

Initializes the iterator to reference the same sequence that __x does. __constant is true if this is a constant iterator, and false if it is mutable.

Definition at line 96 of file safe_base.h.

References _M_attach(), and _M_sequence.

4.211.3 Member Function Documentation

4.211.3.1 void __gnu_debug::_Safe_iterator_base::_M_attach (_Safe_sequence_base * *__seq,* bool *__constant*) [protected]

Attaches this iterator to the given sequence, detaching it from whatever sequence it was attached to originally. If the new sequence is the NULL pointer, the iterator is left unattached.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach(), and _-Safe_iterator_base().

4.211.3.2 void __gnu_debug::_Safe_iterator_base::_M_attach_single (_Safe_sequence_base * __seq, bool __constant) throw) [protected]

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_attach_single().

4.211.3.3 bool __gnu_debug::_Safe_iterator_base::_M_attached_to (const _Safe_sequence_base * __seq) const [inline]

Determines if we are attached to the given sequence.

Definition at line 131 of file safe_base.h.

References _M_sequence.

4.211.3.4 bool __gnu_debug::_Safe_iterator_base::_M_can_compare (const _Safe_iterator_base & __x) const throw)

Can we compare this iterator to the given iterator __x? Returns true if both iterators are nonsingular and reference the same sequence.

4.211.3.5 void __gnu_debug::_Safe_iterator_base::_M_detach ( ) [protected]

Detach the iterator for whatever sequence it is attached to, if any.

Referenced by __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.211.3.6 void __gnu_debug::_Safe_iterator_base::_M_detach_single ( ) throw)

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.211.3.7 __gnu_cxx::__mutex& __gnu_debug::_Safe_iterator_base::_M_get_mutex ( ) throw) [protected]

For use in _Safe_iterator.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.211.3.8 void __gnu_debug::_Safe_iterator_base::_M_invalidate ( ) [inline]

Invalidate the iterator, making it singular.

Definition at line 146 of file safe_base.h.

References _M_version.

4.211.3.9 void __gnu_debug::_Safe_iterator_base::_M_reset ( ) throw)

Reset all member variables

4.211.3.10 bool __gnu_debug::_Safe_iterator_base::_M_singular ( ) const throw)

Is this iterator singular?

Referenced by __gnu_debug::__check_singular_aux(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_dereferenceable(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), __gnu_debug-

::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator().

4.211.3.11 void __gnu_debug::_Safe_iterator_base::_M_unlink ( ) throw) [inline]

Unlink itself

Definition at line 155 of file safe_base.h.

References _M_next, and _M_prior.

4.211.4 Member Data Documentation

4.211.4.1 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_next

Pointer to the next iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 74 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and _M_unlink().

4.211.4.2 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_prior

Pointer to the previous iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 70 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and _M_unlink().

4.211.4.3 _Safe_sequence_base* __gnu_debug::_Safe_iterator_base::_M_sequence

The sequence this iterator references; may be NULL to indicate a singular iterator.

Definition at line 57 of file safe_base.h.

Referenced by _M_attached_to(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), _Safe_iterator_base(), __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.211.4.4 unsigned int __gnu_debug::_Safe_iterator_base::_M_version

The version number of this iterator. The sentinel value 0 is used to indicate an invalidated iterator (i.e., one that is singular because of an operation on the container). This version number must equal the version number in the sequence referenced by _M_sequence for the iterator to be non-singular.

Definition at line 66 of file safe_base.h.

Referenced by _M_invalidate(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

The documentation for this class was generated from the following file:

- safe_base.h

4.212 __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >:

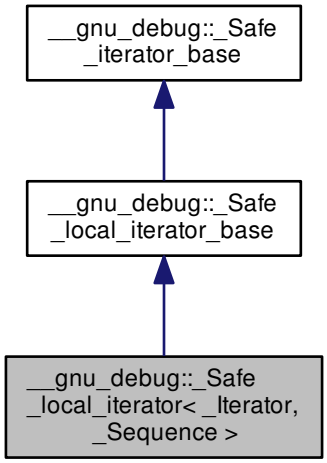

Public Types

- typedef _Traits::difference_type **difference_type**
- typedef _Traits::iterator_category **iterator_category**
- typedef _Iterator **iterator_type**
- typedef _Traits::pointer **pointer**
- typedef _Traits::reference **reference**
- typedef _Traits::value_type **value_type**

Public Member Functions

- _Safe_local_iterator () noexcept
- _Safe_local_iterator (_Iterator __i, const _Safe_sequence_base *__cont)
- _Safe_local_iterator (const _Safe_local_iterator &__x) noexcept
- _Safe_local_iterator (_Safe_local_iterator &&__x) noexcept
- template<typename _MutableIterator >
  _Safe_local_iterator (const _Safe_local_iterator< _MutableIterator, typename __gnu_cxx::__enable_if< _IsConstant::__value &&std::__are_same< _MutableIterator, _OtherIterator >::__value, _Sequence >::__type > &__x) noexcept
- void _M_attach (_Safe_sequence_base *__seq)
- void _M_attach_single (_Safe_sequence_base *__seq)
- bool _M_attached_to (const _Safe_sequence_base *__seq) const
- bool _M_can_compare (const _Safe_iterator_base &__x) const throw ()
- bool _M_dereferenceable () const

- _Distance_traits< _Iterator >
  ::__type **_M_get_distance_to** (const _Safe_local_iterator &__rhs) const
- __gnu_cxx::__conditional_type
  < _IsConstant::__value, const
  _Sequence *, _Sequence * >
  ::__type **_M_get_sequence** () const
- template<typename _Other >
  bool _M_in_same_bucket (const _Safe_local_iterator< _Other, _Sequence > &__other) const
- bool _M_incrementable () const
- void _M_invalidate ()
- bool _M_is_begin () const
- bool _M_is_end () const
- void _M_reset () throw ()
- bool _M_singular () const throw ()
- void _M_unlink () throw ()
- bool **_M_valid_range** (const _Safe_local_iterator &__rhs, std::pair< difference_type, _Distance_precision > &_-
  _dist_info) const
- _Iterator & base () noexcept
- const _Iterator & **base** () const noexcept
- size_type bucket () const
- operator _Iterator () const
- reference operator* () const
- _Safe_local_iterator & operator++ ()
- _Safe_local_iterator operator++ (int)
- pointer operator-> () const
- _Safe_local_iterator & operator= (const _Safe_local_iterator &__x)
- _Safe_local_iterator & operator= (_Safe_local_iterator &&__x) noexcept

Static Public Member Functions

- static constexpr bool _S_constant ()

Public Attributes

- _Safe_iterator_base * _M_next
- _Safe_iterator_base * _M_prior
- _Safe_sequence_base * _M_sequence
- unsigned int _M_version

Protected Member Functions

- void _M_attach (_Safe_sequence_base *__seq, bool __constant)
- void _M_attach_single (_Safe_sequence_base *__seq, bool __constant) throw ()
- void _M_detach ()
- void _M_detach_single () throw ()
- _Safe_unordered_container_base * **_M_get_container** () const noexcept
- __gnu_cxx::__mutex & _M_get_mutex () throw ()

Friends

- bool **operator!=** (const _Self &__lhs, const _OtherSelf &__rhs) noexcept
- bool **operator!=** (const _Self &__lhs, const _Self &__rhs) noexcept
- bool **operator==** (const _Self &__lhs, const _OtherSelf &__rhs) noexcept
- bool **operator==** (const _Self &__lhs, const _Self &__rhs) noexcept

4.212.1 Detailed Description

template<typename _Iterator, typename _Sequence>class __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >

Safe iterator wrapper.

The class template _Safe_local_iterator is a wrapper around an iterator that tracks the iterator's movement among sequences and checks that operations performed on the "safe" iterator are legal. In additional to the basic iterator operations (which are validated, and then passed to the underlying iterator), _Safe_local_iterator has member functions for iterator invalidation, attaching/detaching the iterator from sequences, and querying the iterator's state.

Definition at line 83 of file formatter.h.

4.212.2 Constructor & Destructor Documentation

4.212.2.1 template<typename _Iterator , typename _Sequence > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator ( ) [inline], [noexcept]

Postcondition

the iterator is singular and unattached

Definition at line 102 of file safe_local_iterator.h.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++().

4.212.2.2 template<typename _Iterator , typename _Sequence > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator (_Iterator __i, const _Safe_sequence_base * __cont) [inline]

Safe iterator construction from an unsafe iterator and its sequence.

Precondition

`seq` is not NULL

Postcondition

this is not singular

Definition at line 111 of file safe_local_iterator.h.

References __gnu_debug::_Safe_iterator_base::_M_singular().

4.212.2.3 template<typename _Iterator , typename _Sequence > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator (const _Safe_local_iterator< _Iterator, _Sequence > & __x) [inline], [noexcept]

Copy construction.

Definition at line 122 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach().

4.212.2.4 template<typename _Iterator , typename _Sequence > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator (_Safe_local_iterator< _Iterator, _Sequence > && __x) [inline], [noexcept]

Move construction.

Postcondition

__x is singular and unattached

Definition at line 139 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.2.5 template<typename _Iterator , typename _Sequence > template<typename _MutableIterator > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator (const _Safe_local_iterator< _MutableIterator, typename __gnu_cxx::__enable_if< _IsConstant::__value &&std::__are_same< _MutableIterator, _OtherIterator >::__value, _Sequence >::__type > & __x) [inline], [noexcept]

Converting constructor from a mutable iterator to a constant iterator.

Definition at line 158 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach().

4.212.3 Member Function Documentation

4.212.3.1 void __gnu_debug::_Safe_local_iterator_base::_M_attach (_Safe_sequence_base * __seq, bool __constant) [protected], [inherited]

Attaches this iterator to the given container, detaching it from whatever container it was attached to originally. If the new container is the NULL pointer, the iterator is left unattached.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), and __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base().

4.212.3.2 template<typename _Iterator , typename _Sequence > void __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach (_Safe_sequence_base * __seq) [inline]

Attach iterator to the given sequence.

Definition at line 326 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator_base::_M_attach(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_S_constant().

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=().

4.212.3.3 void __gnu_debug::_Safe_local_iterator_base::_M_attach_single (_Safe_sequence_base * __seq, bool __constant) throw) [protected], [inherited]

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach_single().

4.212.3.4 template<typename _Iterator , typename _Sequence > void __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach_single (_Safe_sequence_base * __seq) [inline]

Likewise, but not thread-safe.

Definition at line 331 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator_base::_M_attach_single(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_S_constant().

4.212.3.5 bool __gnu_debug::_Safe_iterator_base::_M_attached_to (const _Safe_sequence_base * __seq) const [inline], [inherited]

Determines if we are attached to the given sequence.

Definition at line 131 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_sequence.

4.212.3.6 bool __gnu_debug::_Safe_iterator_base::_M_can_compare (const _Safe_iterator_base & __x) const throw) [inherited]

Can we compare this iterator to the given iterator __x? Returns true if both iterators are nonsingular and reference the same sequence.

4.212.3.7 template<typename _Iterator , typename _Sequence > bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable ( ) const [inline]

Is the iterator dereferenceable?

Definition at line 336 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_end(), and __gnu_debug::_Safe_iterator_base::_M_singular().

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator*(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator->().

4.212.3.8 void __gnu_debug::_Safe_local_iterator_base::_M_detach ( ) [protected], [inherited]

Detach the iterator for whatever container it is attached to, if any.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=().

4.212.3.9 void __gnu_debug::_Safe_local_iterator_base::_M_detach_single ( ) throw) [protected], [inherited]

Likewise, but not thread-safe.

4.212.3.10 __gnu_cxx::__mutex& __gnu_debug::_Safe_iterator_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_iterator.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.212.3.11 template<typename _Iterator , typename _Sequence > template<typename _Other > bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_in_same_bucket (const _Safe_local_iterator< _Other, _Sequence > & *__other*) const [inline]

Is this iterator part of the same bucket as the other one?

Definition at line 371 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::bucket().

4.212.3.12 template<typename _Iterator , typename _Sequence > bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable ( ) const [inline]

Is the iterator incrementable?

Definition at line 341 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_end(), and __gnu_debug::_Safe_iterator_base::_M_singular().

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++().

4.212.3.13 void __gnu_debug::_Safe_iterator_base::_M_invalidate ( ) [inline], [inherited]

Invalidate the iterator, making it singular.

Definition at line 146 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_version.

4.212.3.14 template<typename _Iterator , typename _Sequence > bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_begin ( ) const [inline]

Is this iterator equal to the sequence's begin(bucket) iterator?

Definition at line 361 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::bucket().

4.212.3.15 template<typename _Iterator , typename _Sequence > bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_end ( ) const [inline]

Is this iterator equal to the sequence's end(bucket) iterator?

Definition at line 365 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::bucket().

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable().

4.212.3.16 void __gnu_debug::_Safe_iterator_base::_M_reset ( ) throw) [inherited]

Reset all member variables

4.212.3.17 bool __gnu_debug::_Safe_iterator_base::_M_singular ( ) const throw) [inherited]

Is this iterator singular?

Referenced by __gnu_debug::__check_singular_aux(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_-

dereferenceable(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator().

4.212.3.18 void __gnu_debug::_Safe_iterator_base::_M_unlink ( ) throw) [inline], [inherited]

Unlink itself

Definition at line 155 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_next, and __gnu_debug::_Safe_iterator_base::_M_prior.

4.212.3.19 template<typename _Iterator , typename _Sequence > static constexpr bool __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_S_constant ( ) [inline], [static]

Determine if this is a constant iterator.

Definition at line 300 of file safe_local_iterator.h.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach_single().

4.212.3.20 template<typename _Iterator , typename _Sequence > _Iterator& __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base ( ) [inline], [noexcept]

Return the underlying iterator.

Definition at line 307 of file safe_local_iterator.h.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_begin(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_end(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::bucket(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator*(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator->(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=().

4.212.3.21 template<typename _Iterator , typename _Sequence > size_type __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::bucket ( ) const [inline]

Return the bucket.

Definition at line 316 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_in_same_bucket(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_begin(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_is_end().

4.212.3.22 template<typename _Iterator , typename _Sequence > __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator _Iterator ( ) const [inline]

Conversion to underlying non-debug iterator to allow better interaction with non-debug containers.

Definition at line 322 of file safe_local_iterator.h.

4.212.3.23 template<typename _Iterator , typename _Sequence > reference __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator* ( ) const [inline]

Iterator dereference.

Precondition

iterator is dereferenceable

Definition at line 244 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.3.24 template<typename _Iterator , typename _Sequence > _Safe_local_iterator& __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++ ( ) [inline]

Iterator preincrement.

Precondition

iterator is incrementable

Definition at line 271 of file safe_local_iterator.h.

References __gnu_debug::_Safe_iterator_base::_M_get_mutex(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.3.25 template<typename _Iterator , typename _Sequence > _Safe_local_iterator __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++ (int) [inline]

Iterator postincrement.

Precondition

iterator is incrementable

Definition at line 286 of file safe_local_iterator.h.

References __gnu_debug::_Safe_iterator_base::_M_get_mutex(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), __gnu_debug::_Safe_iterator_base::_M_sequence, __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.3.26 template<typename _Iterator , typename _Sequence > pointer __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator-> ( ) const [inline]

Iterator dereference.

Precondition

iterator is dereferenceable

Definition at line 257 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.3.27 template<typename _Iterator , typename _Sequence > _Safe_local_iterator& __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator= (const _Safe_local_iterator< _Iterator, _Sequence > & __x) [inline]

Copy assignment.

Definition at line 179 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), __gnu_debug::_Safe_local_iterator_base::_M_detach(), __gnu_debug::_Safe_iterator_base::_M_get_mutex(), __gnu_debug::_Safe_iterator_base::_M_sequence, __gnu_debug::_Safe_iterator_base::_M_version, and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.3.28 template<typename _Iterator , typename _Sequence > _Safe_local_iterator& __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator= (_Safe_local_iterator< _Iterator, _Sequence > && __x) [inline], [noexcept]

Move assignment.

Postcondition

__x is singular and unattached

Definition at line 210 of file safe_local_iterator.h.

References __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), __gnu_debug::_Safe_local_iterator_base::_M_detach(), __gnu_debug::_Safe_iterator_base::_M_get_mutex(), __gnu_debug::_Safe_iterator_base::_M_sequence, __gnu_debug::_Safe_iterator_base::_M_version, and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::base().

4.212.4 Member Data Documentation

4.212.4.1 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_next [inherited]

Pointer to the next iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 74 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.212.4.2 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_prior [inherited]

Pointer to the previous iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 70 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.212.4.3 _Safe_sequence_base* __gnu_debug::_Safe_iterator_base::_M_sequence [inherited]

The sequence this iterator references; may be NULL to indicate a singular iterator.

Definition at line 57 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_attached_to(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_iterator_base::_Safe_iterator_base(), __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.212.4.4 unsigned int __gnu_debug::_Safe_iterator_base::_M_version [inherited]

The version number of this iterator. The sentinel value 0 is used to indicate an invalidated iterator (i.e., one that is singular because of an operation on the container). This version number must equal the version number in the sequence

referenced by _M_sequence for the iterator to be non-singular.

Definition at line 66 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_invalidate(), __gnu_debug::_Safe_sequence< _Sequence >::-_M_transfer_from_if(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::-_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

The documentation for this class was generated from the following files:

- formatter.h
- safe_local_iterator.h
- safe_local_iterator.tcc

4.213 __gnu_debug::_Safe_local_iterator_base Class Reference

Inheritance diagram for __gnu_debug::_Safe_local_iterator_base:

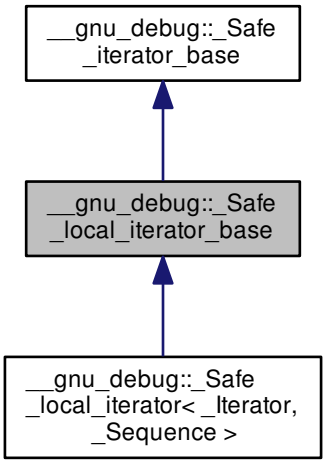

Public Member Functions

- bool _M_attached_to (const _Safe_sequence_base *__seq) const
- bool _M_can_compare (const _Safe_iterator_base &__x) const throw ()
- void _M_invalidate ()
- void _M_reset () throw ()
- bool _M_singular () const throw ()
- void _M_unlink () throw ()

Public Attributes

- _Safe_iterator_base * _M_next

- _Safe_iterator_base * _M_prior
- _Safe_sequence_base * _M_sequence
- unsigned int _M_version

Protected Member Functions

- _Safe_local_iterator_base ()
- _Safe_local_iterator_base (const _Safe_sequence_base *__seq, bool __constant)
- _Safe_local_iterator_base (const _Safe_local_iterator_base &__x, bool __constant)
- void _M_attach (_Safe_sequence_base *__seq, bool __constant)
- void _M_attach_single (_Safe_sequence_base *__seq, bool __constant) throw ()
- void _M_detach ()
- void _M_detach_single () throw ()
- _Safe_unordered_container_base * **_M_get_container** () const noexcept
- __gnu_cxx::__mutex & _M_get_mutex () throw ()

4.213.1 Detailed Description

Basic functionality for a *safe* iterator.

The _Safe_local_iterator_base base class implements the functionality of a safe local iterator that is not specific to a particular iterator type. It contains a pointer back to the container it references along with iterator version information and pointers to form a doubly-linked list of local iterators referenced by the container.

This class must not perform any operations that can throw an exception, or the exception guarantees of derived iterators will be broken.

Definition at line 50 of file safe_unordered_base.h.

4.213.2 Constructor & Destructor Documentation

4.213.2.1 __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base ( ) [inline], [protected]

Initializes the iterator and makes it singular.

Definition at line 54 of file safe_unordered_base.h.

4.213.2.2 __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base (const _Safe_sequence_base * *__seq*, bool *__constant*) [inline], [protected]

Initialize the iterator to reference the container pointed to by `__seq`. `__constant` is true when we are initializing a constant local iterator, and false if it is a mutable local iterator. Note that `__seq` may be NULL, in which case the iterator will be singular. Otherwise, the iterator will reference `__seq` and be nonsingular.

Definition at line 64 of file safe_unordered_base.h.

References _M_attach().

4.213.2.3 __gnu_debug::_Safe_local_iterator_base::_Safe_local_iterator_base (const _Safe_local_iterator_base & *__x*, bool *__constant*) [inline], [protected]

Initializes the iterator to reference the same container that `__x` does. `__constant` is true if this is a constant iterator, and false if it is mutable.

Definition at line 70 of file safe_unordered_base.h.

References _M_attach(), and __gnu_debug::_Safe_iterator_base::_M_sequence.

4.213.3 Member Function Documentation

4.213.3.1 void __gnu_debug::_Safe_local_iterator_base::_M_attach (_Safe_sequence_base * *__seq,* bool *__constant*) [protected]

Attaches this iterator to the given container, detaching it from whatever container it was attached to originally. If the new container is the NULL pointer, the iterator is left unattached.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach(), and _Safe_local_iterator_base().

4.213.3.2 void __gnu_debug::_Safe_local_iterator_base::_M_attach_single (_Safe_sequence_base * *__seq,* bool *__constant*) throw) [protected]

Likewise, but not thread-safe.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_attach_single().

4.213.3.3 bool __gnu_debug::_Safe_iterator_base::_M_attached_to (const _Safe_sequence_base * *__seq*) const [inline], [inherited]

Determines if we are attached to the given sequence.

Definition at line 131 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_sequence.

4.213.3.4 bool __gnu_debug::_Safe_iterator_base::_M_can_compare (const _Safe_iterator_base & *__x*) const throw) [inherited]

Can we compare this iterator to the given iterator __x? Returns true if both iterators are nonsingular and reference the same sequence.

4.213.3.5 void __gnu_debug::_Safe_local_iterator_base::_M_detach ( ) [protected]

Detach the iterator for whatever container it is attached to, if any.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=().

4.213.3.6 void __gnu_debug::_Safe_local_iterator_base::_M_detach_single ( ) throw) [protected]

Likewise, but not thread-safe.

4.213.3.7 __gnu_cxx::__mutex& __gnu_debug::_Safe_iterator_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_iterator.

Referenced by __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.213.3.8 void __gnu_debug::_Safe_iterator_base::_M_invalidate ( ) [inline], [inherited]

Invalidate the iterator, making it singular.

Definition at line 146 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_version.

4.213.3.9 void __gnu_debug::_Safe_iterator_base::_M_reset ( ) throw) [inherited]

Reset all member variables

4.213.3.10 bool __gnu_debug::_Safe_iterator_base::_M_singular ( ) const throw) [inherited]

Is this iterator singular?

Referenced by __gnu_debug::__check_singular_aux(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_dereferenceable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_dereferenceable(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_M_incrementable(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::_Safe_iterator(), and __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::_Safe_local_iterator().

4.213.3.11 void __gnu_debug::_Safe_iterator_base::_M_unlink ( ) throw) [inline], [inherited]

Unlink itself

Definition at line 155 of file safe_base.h.

References __gnu_debug::_Safe_iterator_base::_M_next, and __gnu_debug::_Safe_iterator_base::_M_prior.

4.213.4 Member Data Documentation

4.213.4.1 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_next [inherited]

Pointer to the next iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 74 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.213.4.2 _Safe_iterator_base* __gnu_debug::_Safe_iterator_base::_M_prior [inherited]

Pointer to the previous iterator in the sequence's list of iterators. Only valid when _M_sequence != NULL.

Definition at line 70 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), and __gnu_debug::_Safe_iterator_base::_M_unlink().

4.213.4.3 _Safe_sequence_base* __gnu_debug::_Safe_iterator_base::_M_sequence [inherited]

The sequence this iterator references; may be NULL to indicate a singular iterator.

Definition at line 57 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_attached_to(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_iterator_base::_Safe_iterator_base(), _Safe_local_iterator_base(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator++(), __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator++(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

4.213.4.4 unsigned int __gnu_debug::_Safe_iterator_base::_M_version [inherited]

The version number of this iterator. The sentinel value 0 is used to indicate an invalidated iterator (i.e., one that is singular because of an operation on the container). This version number must equal the version number in the sequence referenced by _M_sequence for the iterator to be non-singular.

Definition at line 66 of file safe_base.h.

Referenced by __gnu_debug::_Safe_iterator_base::_M_invalidate(), __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if(), __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >::operator=(), and __gnu_debug::_Safe_iterator< _Iterator, _Sequence, std::forward_iterator_tag >::operator=().

The documentation for this class was generated from the following file:

- safe_unordered_base.h

4.214 __gnu_debug::_Safe_node_sequence< _Sequence > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_node_sequence< _Sequence >:

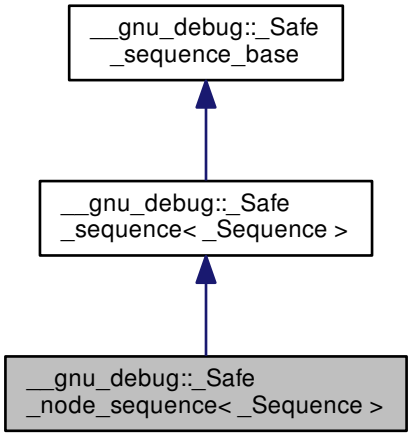

Public Member Functions

- template<typename _Predicate >
  void _M_invalidate_if (_Predicate __pred)
- template<typename _Predicate >
  void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()

- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- void _M_swap (_Safe_sequence_base &__x) noexcept

4.214.1 Detailed Description

template<typename _Sequence>class __gnu_debug::_Safe_node_sequence< _Sequence >

Like _Safe_sequence but with a special _M_invalidate_all implementation not invalidating past-the-end iterators. Used by node based sequence.

Definition at line 131 of file safe_sequence.h.

4.214.2 Member Function Documentation

4.214.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.214.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.214.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.214.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.214.2.5 template<typename _Sequence > template<typename _Predicate > void __gnu_debug::_Safe_sequence< _Sequence >::_M_invalidate_if (_Predicate *__pred*) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

Definition at line 38 of file safe_sequence.tcc.

4.214.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.214.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.214.2.8 template<typename _Sequence > template<typename _Predicate > void __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if (_Safe_sequence< _Sequence > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

Definition at line 69 of file safe_sequence.tcc.

References std::__addressof(), __gnu_debug::_Safe_sequence_base::_M_const_iterators, __gnu_debug::_Safe_iterator_base::_M_detach_single(), __gnu_debug::_Safe_sequence_base::_M_get_mutex(), __gnu_debug::_Safe_sequence_base::_M_iterators, __gnu_debug::_Safe_iterator_base::_M_next, __gnu_debug::_Safe_iterator_base::_M_prior, __gnu_debug::_Safe_iterator_base::_M_sequence, and __gnu_debug::_Safe_iterator_base::_M_version.

4.214.3 Member Data Documentation

4.214.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.214.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.214.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- safe_sequence.h

4.215 __gnu_debug::_Safe_sequence< _Sequence > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_sequence< _Sequence >:

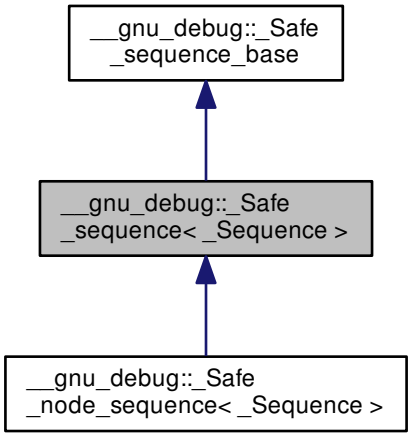

Public Member Functions

- template<typename _Predicate >
  void _M_invalidate_if (_Predicate __pred)
- template<typename _Predicate >
  void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- void _M_swap (_Safe_sequence_base &__x) noexcept

4.215.1 Detailed Description

template<typename _Sequence>class __gnu_debug::_Safe_sequence< _Sequence >

Base class for constructing a *safe* sequence type that tracks iterators that reference it.

The class template _Safe_sequence simplifies the construction of *safe* sequences that track the iterators that reference the sequence, so that the iterators are notified of changes in the sequence that may affect their operation, e.g., if the container invalidates its iterators or is destructed. This class template may only be used by deriving from it and passing the name of the derived class as its template parameter via the curiously recurring template pattern. The derived class must have `iterator` and `const_iterator` types that are instantiations of class template _Safe_iterator for this sequence. Iterators will then be tracked automatically.

Definition at line 86 of file formatter.h.

4.215.2 Member Function Documentation

4.215.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.215.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.215.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.215.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.215.2.5 template<typename _Sequence > template<typename _Predicate > void __gnu_debug::_Safe_sequence< _Sequence >::_M_invalidate_if (_Predicate *__pred*)

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

Definition at line 38 of file safe_sequence.tcc.

4.215.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.215.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.215.2.8 template<typename _Sequence > template<typename _Predicate > void __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if (_Safe_sequence< _Sequence > & __from, _Predicate __pred)

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

Definition at line 69 of file safe_sequence.tcc.

References std::__addressof(), __gnu_debug::_Safe_sequence_base::_M_const_iterators, __gnu_debug::_Safe_iterator_base::_M_detach_single(), __gnu_debug::_Safe_sequence_base::_M_get_mutex(), __gnu_debug::_Safe_sequence_base::_M_iterators, __gnu_debug::_Safe_iterator_base::_M_next, __gnu_debug::_Safe_iterator_base::_M_prior, __gnu_debug::_Safe_iterator_base::_M_sequence, and __gnu_debug::_Safe_iterator_base::_M_version.

4.215.3 Member Data Documentation

4.215.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.215.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.215.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following files:

- formatter.h
- safe_sequence.h
- safe_sequence.tcc

4.216 __gnu_debug::_Safe_sequence_base Class Reference

Inheritance diagram for __gnu_debug::_Safe_sequence_base:

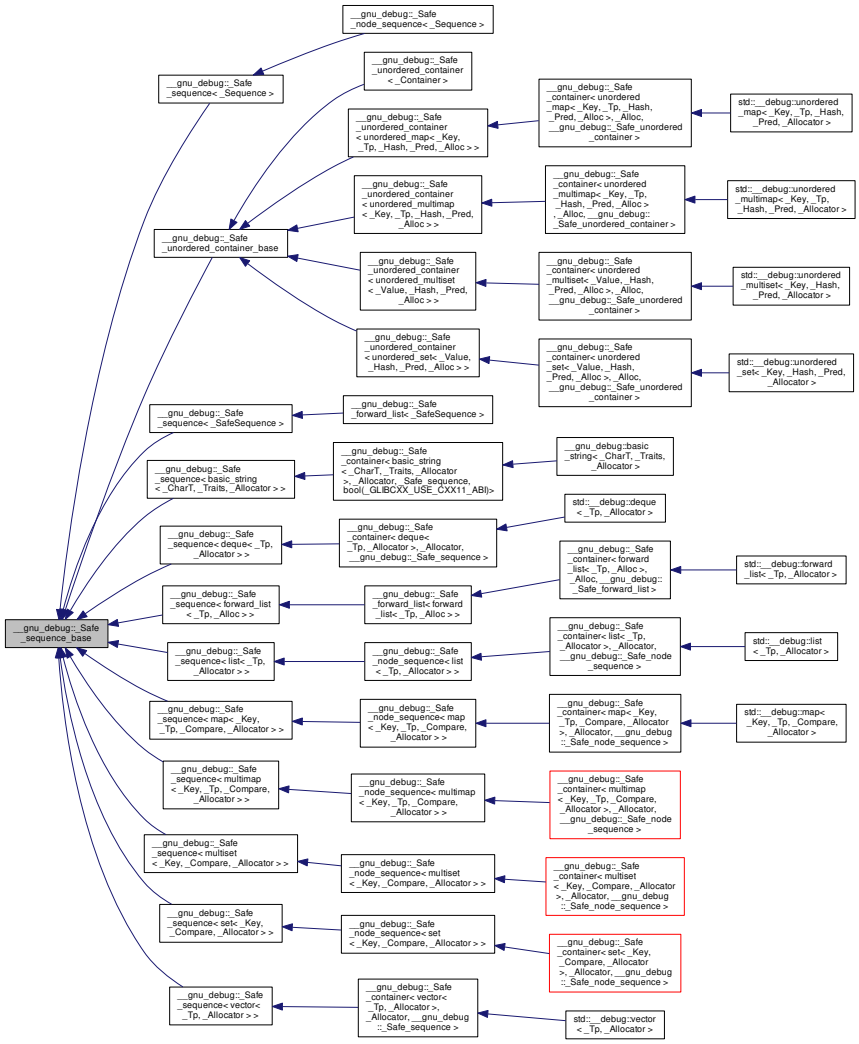

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- **_Safe_sequence_base** (const _Safe_sequence_base &) noexcept
- **_Safe_sequence_base** (_Safe_sequence_base &&__seq) noexcept
- ~_Safe_sequence_base ()
- void _M_detach_all ()

- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- class **_Safe_iterator_base**

4.216.1 Detailed Description

Base class that supports tracking of iterators that reference a sequence.

The _Safe_sequence_base class provides basic support for tracking iterators into a sequence. Sequences that track iterators must derived from _Safe_sequence_base publicly, so that safe iterators (which inherit _Safe_iterator_base) can attach to them. This class contains two linked lists of iterators, one for constant iterators and one for mutable iterators, and a version number that allows very fast invalidation of all iterators that reference the container.

This class must ensure that no operation on it may throw an exception, otherwise *safe* sequences may fail to provide the exception-safety guarantees required by the C++ standard.

Definition at line 188 of file safe_base.h.

4.216.2 Constructor & Destructor Documentation

4.216.2.1 __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base ( ) [inline], [protected]

Notify all iterators that reference this sequence that the sequence is being destroyed.

Definition at line 220 of file safe_base.h.

References _M_detach_all().

4.216.3 Member Function Documentation

4.216.3.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected]

Detach all iterators, leaving them singular.

Referenced by ~_Safe_sequence_base().

4.216.3.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.216.3.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.216.3.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References _M_version.

4.216.3.5 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.216.3.6 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & *__x*) [protected], [noexcept]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.216.4 Member Data Documentation

4.216.4.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.216.4.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.216.4.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by _M_invalidate_all().

The documentation for this class was generated from the following file:

- safe_base.h

4.217 __gnu_debug::_Safe_unordered_container< _Container > Class Template Reference

Inheritance diagram for __gnu_debug::_Safe_unordered_container< _Container >:

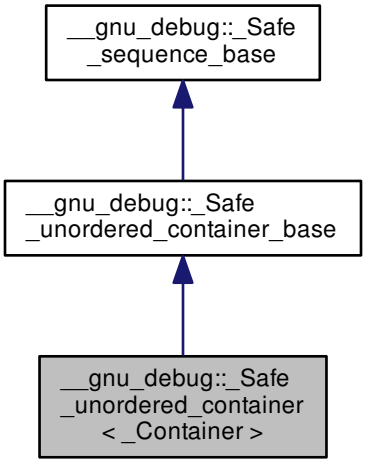

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- template<typename _Predicate >
  void _M_invalidate_if (_Predicate __pred)
- template<typename _Predicate >
  void _M_invalidate_local_if (_Predicate __pred)
- void **_M_invalidate_locals** ()
- void _M_revalidate_singular ()
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

4.217.1 Detailed Description

template<typename _Container>class __gnu_debug::_Safe_unordered_container< _Container >

Base class for constructing a *safe* unordered container type that tracks iterators that reference it.

The class template _Safe_unordered_container simplifies the construction of *safe* unordered containers that track the iterators that reference the container, so that the iterators are notified of changes in the container that may affect their operation, e.g., if the container invalidates its iterators or is destructed. This class template may only be used by deriving from it and passing the name of the derived class as its template parameter via the curiously recurring template pattern. The derived class must have `iterator` and `const_iterator` types that are instantiations of class template _Safe_iterator for this container and `local_iterator` and `const_local_iterator` types that are instantiations of class template _Safe_local_iterator for this container. Iterators will then be tracked automatically.

Definition at line 58 of file safe_unordered_container.h.

4.217.2 Member Function Documentation

4.217.2.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

4.217.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.217.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.217.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.217.2.5 template<typename _Container > template<typename _Predicate > void __gnu_debug::_Safe_unordered_container< _Container >::_M_invalidate_if (_Predicate __pred) [protected]

Invalidates all iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

Definition at line 38 of file safe_unordered_container.tcc.

4.217.2.6 template<typename _Container > template<typename _Predicate > void __gnu_debug::_Safe_unordered_container< _Container >::_M_invalidate_local_if (_Predicate __pred) [protected]

Invalidates all local iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal local iterators nested in the safe ones.

Definition at line 70 of file safe_unordered_container.tcc.

4.217.2.7 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.217.2.8 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & __x) [protected], [noexcept], [inherited]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.217.2.9 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.217.3 Member Data Documentation

4.217.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.217.3.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators [inherited]

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.217.3.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.217.3.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators [inherited]

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.217.3.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following files:

- safe_unordered_container.h
- safe_unordered_container.tcc

4.218 __gnu_debug::_Safe_unordered_container_base Class Reference

Inheritance diagram for __gnu_debug::_Safe_unordered_container_base:

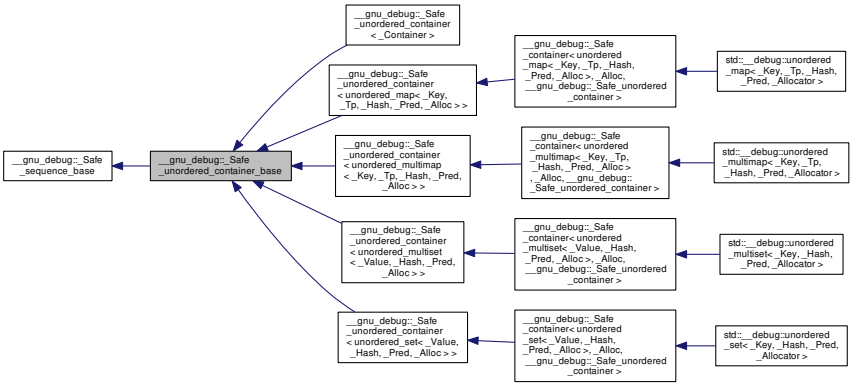

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- **_Safe_unordered_container_base** (const _Safe_unordered_container_base &) noexcept
- **_Safe_unordered_container_base** (_Safe_unordered_container_base &&__x) noexcept
- ~_Safe_unordered_container_base () noexcept
- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- class **_Safe_local_iterator_base**

4.218.1 Detailed Description

Base class that supports tracking of local iterators that reference an unordered container.

The _Safe_unordered_container_base class provides basic support for tracking iterators into an unordered container. Containers that track iterators must derived from _Safe_unordered_container_base publicly, so that safe iterators (which inherit _Safe_iterator_base) can attach to them. This class contains four linked lists of iterators, one for constant iterators, one for mutable iterators, one for constant local iterators, one for mutable local iterators and a version number that allows very fast invalidation of all iterators that reference the container.

This class must ensure that no operation on it may throw an exception, otherwise *safe* containers may fail to provide the exception-safety guarantees required by the C++ standard.

Definition at line 120 of file safe_unordered_base.h.

4.218.2 Constructor & Destructor Documentation

4.218.2.1 __gnu_debug::_Safe_unordered_container_base::~_Safe_unordered_container_base ( ) [inline], [protected], [noexcept]

Notify all iterators that reference this container that the container is being destroyed.

Definition at line 151 of file safe_unordered_base.h.

4.218.3 Member Function Documentation

4.218.3.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected]

Detach all iterators, leaving them singular.

4.218.3.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.218.3.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.218.3.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.218.3.5 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.218.3.6 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & *__x*) [protected], [noexcept]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.218.3.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & *__x*) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.218.4 Member Data Documentation

4.218.4.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.218.4.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.218.4.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.218.4.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.218.4.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- safe_unordered_base.h

4.219 __gnu_debug::_Safe_vector< _SafeSequence, _BaseSequence > Class Template Reference

Protected Member Functions

- **_Safe_vector** (const _Safe_vector &) noexcept
- **_Safe_vector** (size_type __n) noexcept
- **_Safe_vector** (_Safe_vector &&__x) noexcept
- bool **_M_requires_reallocation** (size_type __elements) const noexcept
- void **_M_update_guaranteed_capacity** () noexcept
- _Safe_vector & **operator=** (const _Safe_vector &) noexcept
- _Safe_vector & **operator=** (_Safe_vector &&__x) noexcept

Protected Attributes

- size_type **_M_guaranteed_capacity**

4.219.1 Detailed Description

template<typename _SafeSequence, typename _BaseSequence>class __gnu_debug::_Safe_vector< _SafeSequence, _BaseSequence >

Base class for Debug Mode vector.

Adds information about the guaranteed capacity, which is useful for detecting code which relies on non-portable implementation details of the libstdc++ reallocation policy.

Definition at line 55 of file debug/vector.

The documentation for this class was generated from the following file:

- debug/vector

4.220 __gnu_parallel::_SamplingSorter< __stable, _RAIter, _StrictWeakOrdering > Struct Template Reference

Public Member Functions

- void **operator()** (_RAIter __first, _RAIter __last, _StrictWeakOrdering __comp)

4.220.1 Detailed Description

template<bool __stable, class _RAIter, class _StrictWeakOrdering>struct __gnu_parallel::_SamplingSorter< __stable, _RAIter, _StrictWeakOrdering >

Stable sorting functor.

Used to reduce code instanciation in multiway_merge_sampling_splitting.

Definition at line 1007 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.221 __gnu_parallel::_SamplingSorter< false, _RAIter, _StrictWeakOrdering > Struct Template Reference

Public Member Functions

- void **operator()** (_RAIter __first, _RAIter __last, _StrictWeakOrdering __comp)

4.221.1 Detailed Description

template<class _RAIter, class _StrictWeakOrdering>struct __gnu_parallel::_SamplingSorter< false, _RAIter, _StrictWeakOrdering >

Non-__stable sorting functor.

Used to reduce code instantiation in multiway_merge_sampling_splitting.

Definition at line 1020 of file multiway_merge.h.

The documentation for this struct was generated from the following file:

- multiway_merge.h

4.222 std::__detail::_Scanner< _CharT > Class Template Reference

Inherits std::__detail::_ScannerBase.

Public Types

- typedef const std::ctype< _CharT > **_CtypeT**
- typedef regex_constants::syntax_option_type **_FlagT**
- typedef const _CharT * **_IterT**
- typedef std::basic_string< _CharT > **_StringT**
- enum **_TokenT** : unsigned { **_S_token_anychar**, **_S_token_ord_char**, **_S_token_oct_num**, **_S_token_hex_num**, **_S_token_backref**, **_S_token_subexpr_begin**, **_S_token_subexpr_no_group_begin**, **_S_token_subexpr_lookahead_begin**, **_S_token_subexpr_end**, **_S_token_bracket_begin**, **_S_token_bracket_neg_begin**, **_S_token_bracket_end**, **_S_token_interval_begin**, **_S_token_interval_end**, **_S_token_quoted_class**, **_S_token_char_class_name**, **_S_token_collsymbol**, **_S_token_equiv_class_name**, **_S_token_opt**, **_S_token_or**, **_S_token_closure0**, **_S_token_closure1**, **_S_token_line_begin**, **_S_token_line_end**, **_S_token_word_bound**, **_S_token_comma**, **_S_token_dup_count**, **_S_token_eof**, **_S_token_bracket_dash**, **_S_token_unknown** }

Public Member Functions

- **_Scanner** (_IterT __begin, _IterT __end, _FlagT __flags, std::locale __loc)
- void **_M_advance** ()
- _TokenT **_M_get_token** () const
- const _StringT & **_M_get_value** () const

Protected Types

- enum **_StateT** { **_S_state_normal**, **_S_state_in_brace**, **_S_state_in_bracket** }

Protected Member Functions

- const char * **_M_find_escape** (char __c)
- bool **_M_is_awk** () const
- bool **_M_is_basic** () const
- bool **_M_is_ecma** () const
- bool **_M_is_extended** () const
- bool **_M_is_grep** () const

Protected Attributes

- bool **_M_at_bracket_start**
- const std::pair< char, char > **_M_awk_escape_tbl** [11]
- const char * **_M_basic_spec_char**
- const std::pair< char, char > **_M_ecma_escape_tbl** [8]
- const char * **_M_ecma_spec_char**
- const std::pair< char, char > * **_M_escape_tbl**
- const char * **_M_extended_spec_char**
- _FlagT **_M_flags**
- const char * **_M_spec_char**
- _StateT **_M_state**
- _TokenT **_M_token**
- const std::pair< char, _TokenT > **_M_token_tbl** [9]

4.222.1 Detailed Description

template<typename _CharT>class std::__detail::_Scanner< _CharT >

Scans an input range for regex tokens.

The _Scanner class interprets the regular expression pattern in the input range passed to its constructor as a sequence of parse tokens passed to the regular expression compiler. The sequence of tokens provided depends on the flag settings passed to the constructor: different regular expression grammars will interpret the same input pattern in syntactically different ways.

Definition at line 210 of file regex_scanner.h.

4.222.2 Member Enumeration Documentation

4.222.2.1 enum std::__detail::_ScannerBase::_TokenT : unsigned [inherited]

Token types returned from the scanner.

Definition at line 46 of file regex_scanner.h.

The documentation for this class was generated from the following files:

- regex_scanner.h
- regex_scanner.tcc

4.223 __gnu_debug::_Sequence_traits< _Sequence > Struct Template Reference

Public Types

- typedef _Distance_traits < typename _Sequence::iterator > **_DistTraits**

Static Public Member Functions

- static _DistTraits::__type **_S_size** (const _Sequence &__seq)

4.223.1 Detailed Description

template<typename _Sequence>struct __gnu_debug::_Sequence_traits< _Sequence >

Sequence traits giving the size of a container if possible.

Definition at line 85 of file safe_iterator.h.

The documentation for this struct was generated from the following file:

- safe_iterator.h

4.224 __gnu_parallel::_Settings Struct Reference

Static Public Member Functions

- static const _Settings & get () throw ()
- static void set (_Settings &) throw ()

Public Attributes

- _SequenceIndex accumulate_minimal_n
- unsigned int adjacent_difference_minimal_n
- _AlgorithmStrategy **algorithm_strategy**
- unsigned int cache_line_size
- _SequenceIndex count_minimal_n
- _SequenceIndex fill_minimal_n
- _FindAlgorithm **find_algorithm**
- double find_increasing_factor
- _SequenceIndex find_initial_block_size
- _SequenceIndex find_maximum_block_size
- float find_scale_factor
- _SequenceIndex find_sequential_search_size
- _SequenceIndex for_each_minimal_n
- _SequenceIndex generate_minimal_n
- unsigned long long L1_cache_size
- unsigned long long L2_cache_size
- _SequenceIndex max_element_minimal_n
- _SequenceIndex merge_minimal_n
- unsigned int merge_oversampling

- _SplittingAlgorithm **merge_splitting**
- _SequenceIndex min_element_minimal_n
- _MultiwayMergeAlgorithm **multiway_merge_algorithm**
- int multiway_merge_minimal_k
- _SequenceIndex multiway_merge_minimal_n
- unsigned int multiway_merge_oversampling
- _SplittingAlgorithm **multiway_merge_splitting**
- _SequenceIndex nth_element_minimal_n
- _SequenceIndex partial_sort_minimal_n
- _PartialSumAlgorithm **partial_sum_algorithm**
- float partial_sum_dilation
- unsigned int partial_sum_minimal_n
- double partition_chunk_share
- _SequenceIndex partition_chunk_size
- _SequenceIndex partition_minimal_n
- _SequenceIndex qsb_steals
- unsigned int random_shuffle_minimal_n
- _SequenceIndex replace_minimal_n
- _SequenceIndex search_minimal_n
- _SequenceIndex set_difference_minimal_n
- _SequenceIndex set_intersection_minimal_n
- _SequenceIndex set_symmetric_difference_minimal_n
- _SequenceIndex set_union_minimal_n
- _SortAlgorithm **sort_algorithm**
- _SequenceIndex sort_minimal_n
- unsigned int sort_mwms_oversampling
- unsigned int sort_qs_num_samples_preset
- _SequenceIndex sort_qsb_base_case_maximal_n
- _SplittingAlgorithm **sort_splitting**
- unsigned int TLB_size
- _SequenceIndex transform_minimal_n
- _SequenceIndex unique_copy_minimal_n
- _SequenceIndex **workstealing_chunk_size**

4.224.1 Detailed Description

class _Settings Run-time settings for the parallel mode including all tunable parameters.

Definition at line 122 of file settings.h.

4.224.2 Member Function Documentation

4.224.2.1 static const _Settings& __gnu_parallel::_Settings::get ( ) throw) [static]

Get the global settings.

Referenced by __gnu_parallel::__find_template(), __gnu_parallel::__for_each_template_random_access_workstealing(), __gnu_parallel::__parallel_nth_element(), __gnu_parallel::__parallel_partial_sum(), __gnu_parallel::__parallel_partial_sum_linear(), __gnu_parallel::__parallel_partition(), __gnu_parallel::__parallel_random_shuffle_drs(), __gnu_parallel::__parallel_sort(), __gnu_parallel::__parallel_sort_qs_conquer(), __gnu_parallel::__qsb_local_sort_with_helping(), __gnu_parallel::__sequential_random_shuffle(), __gnu_parallel::multiway_merge_sampling_splitting(), __gnu_parallel::parallel_multiway_merge(), __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel::parallel_sort_mwms_pu().

4.224.2.2 static void __gnu_parallel::_Settings::set (_Settings &) throw) [static]

Set the global settings.

4.224.3 Member Data Documentation

4.224.3.1 _SequenceIndex __gnu_parallel::_Settings::accumulate_minimal_n

Minimal input size for accumulate.

Definition at line 138 of file settings.h.

4.224.3.2 unsigned int __gnu_parallel::_Settings::adjacent_difference_minimal_n

Minimal input size for adjacent_difference.

Definition at line 141 of file settings.h.

4.224.3.3 unsigned int __gnu_parallel::_Settings::cache_line_size

Overestimation of cache line size. Used to avoid false sharing, i.e. elements of different threads are at least this amount apart.

Definition at line 264 of file settings.h.

Referenced by __gnu_parallel::__for_each_template_random_access_workstealing().

4.224.3.4 _SequenceIndex __gnu_parallel::_Settings::count_minimal_n

Minimal input size for count and count_if.

Definition at line 144 of file settings.h.

4.224.3.5 _SequenceIndex __gnu_parallel::_Settings::fill_minimal_n

Minimal input size for fill.

Definition at line 147 of file settings.h.

4.224.3.6 double __gnu_parallel::_Settings::find_increasing_factor

Block size increase factor for find.

Definition at line 150 of file settings.h.

4.224.3.7 _SequenceIndex __gnu_parallel::_Settings::find_initial_block_size

Initial block size for find.

Definition at line 153 of file settings.h.

Referenced by __gnu_parallel::__find_template().

4.224.3.8 _SequenceIndex __gnu_parallel::_Settings::find_maximum_block_size

Maximal block size for find.

Definition at line 156 of file settings.h.

4.224.3.9 float __gnu_parallel::_Settings::find_scale_factor

Block size scale-down factor with respect to current position.

Definition at line 275 of file settings.h.

Referenced by __gnu_parallel::__find_template().

4.224.3.10 _SequenceIndex __gnu_parallel::_Settings::find_sequential_search_size

Start with looking for this many elements sequentially, for find.

Definition at line 159 of file settings.h.

Referenced by __gnu_parallel::__find_template().

4.224.3.11 _SequenceIndex __gnu_parallel::_Settings::for_each_minimal_n

Minimal input size for for_each.

Definition at line 162 of file settings.h.

4.224.3.12 _SequenceIndex __gnu_parallel::_Settings::generate_minimal_n

Minimal input size for generate.

Definition at line 165 of file settings.h.

4.224.3.13 unsigned long long __gnu_parallel::_Settings::L1_cache_size

size of the L1 cache in bytes (underestimation).

Definition at line 253 of file settings.h.

4.224.3.14 unsigned long long __gnu_parallel::_Settings::L2_cache_size

size of the L2 cache in bytes (underestimation).

Definition at line 256 of file settings.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__sequential_random_shuffle().

4.224.3.15 _SequenceIndex __gnu_parallel::_Settings::max_element_minimal_n

Minimal input size for max_element.

Definition at line 168 of file settings.h.

4.224.3.16 _SequenceIndex __gnu_parallel::_Settings::merge_minimal_n

Minimal input size for merge.

Definition at line 171 of file settings.h.

4.224.3.17 unsigned int __gnu_parallel::_Settings::merge_oversampling

Oversampling factor for merge.

Definition at line 174 of file settings.h.

Referenced by __gnu_parallel::multiway_merge_sampling_splitting(), and __gnu_parallel::parallel_multiway_merge().

4.224.3.18 _SequenceIndex __gnu_parallel::_Settings::min_element_minimal_n

Minimal input size for min_element.

Definition at line 177 of file settings.h.

4.224.3.19 int __gnu_parallel::_Settings::multiway_merge_minimal_k

Oversampling factor for multiway_merge.

Definition at line 183 of file settings.h.

4.224.3.20 _SequenceIndex __gnu_parallel::_Settings::multiway_merge_minimal_n

Minimal input size for multiway_merge.

Definition at line 180 of file settings.h.

4.224.3.21 unsigned int __gnu_parallel::_Settings::multiway_merge_oversampling

Oversampling factor for multiway_merge.

Definition at line 186 of file settings.h.

4.224.3.22 _SequenceIndex __gnu_parallel::_Settings::nth_element_minimal_n

Minimal input size for nth_element.

Definition at line 189 of file settings.h.

Referenced by __gnu_parallel::__parallel_nth_element().

4.224.3.23 _SequenceIndex __gnu_parallel::_Settings::partial_sort_minimal_n

Minimal input size for partial_sort.

Definition at line 202 of file settings.h.

4.224.3.24 float __gnu_parallel::_Settings::partial_sum_dilation

Ratio for partial_sum. Assume "sum and write result" to be this factor slower than just "sum".

Definition at line 206 of file settings.h.

Referenced by __gnu_parallel::__parallel_partial_sum_linear().

4.224.3.25 unsigned int __gnu_parallel::_Settings::partial_sum_minimal_n

Minimal input size for partial_sum.

Definition at line 209 of file settings.h.

4.224.3.26 double __gnu_parallel::_Settings::partition_chunk_share

Chunk size for partition, relative to input size. If > 0.0, this value overrides partition_chunk_size.

Definition at line 196 of file settings.h.

Referenced by __gnu_parallel::__parallel_partition().

4.224.3.27 _SequenceIndex __gnu_parallel::_Settings::partition_chunk_size

Chunk size for partition.

Definition at line 192 of file settings.h.

Referenced by __gnu_parallel::__parallel_partition().

4.224.3.28 _SequenceIndex __gnu_parallel::_Settings::partition_minimal_n

Minimal input size for partition.

Definition at line 199 of file settings.h.

Referenced by __gnu_parallel::__parallel_nth_element().

4.224.3.29 _SequenceIndex __gnu_parallel::_Settings::qsb_steals

The number of stolen ranges in load-balanced quicksort.

Definition at line 269 of file settings.h.

4.224.3.30 unsigned int __gnu_parallel::_Settings::random_shuffle_minimal_n

Minimal input size for random_shuffle.

Definition at line 212 of file settings.h.

4.224.3.31 _SequenceIndex __gnu_parallel::_Settings::replace_minimal_n

Minimal input size for replace and replace_if.

Definition at line 215 of file settings.h.

4.224.3.32 _SequenceIndex __gnu_parallel::_Settings::search_minimal_n

Minimal input size for search and search_n.

Definition at line 272 of file settings.h.

4.224.3.33 _SequenceIndex __gnu_parallel::_Settings::set_difference_minimal_n

Minimal input size for set_difference.

Definition at line 218 of file settings.h.

4.224.3.34 _SequenceIndex __gnu_parallel::_Settings::set_intersection_minimal_n

Minimal input size for set_intersection.

Definition at line 221 of file settings.h.

4.224.3.35 _SequenceIndex __gnu_parallel::_Settings::set_symmetric_difference_minimal_n

Minimal input size for set_symmetric_difference.

Definition at line 224 of file settings.h.

4.224.3.36 _SequenceIndex __gnu_parallel::_Settings::set_union_minimal_n

Minimal input size for set_union.

Definition at line 227 of file settings.h.

4.224.3.37 _SequenceIndex __gnu_parallel::_Settings::sort_minimal_n

Minimal input size for parallel sorting.

Definition at line 230 of file settings.h.

4.224.3.38 unsigned int __gnu_parallel::_Settings::sort_mwms_oversampling

Oversampling factor for parallel std::sort (MWMS).

Definition at line 233 of file settings.h.

Referenced by __gnu_parallel::parallel_sort_mwms(), and __gnu_parallel::parallel_sort_mwms_pu().

4.224.3.39 unsigned int __gnu_parallel::_Settings::sort_qs_num_samples_preset

Such many samples to take to find a good pivot (quicksort).

Definition at line 236 of file settings.h.

4.224.3.40 _SequenceIndex __gnu_parallel::_Settings::sort_qsb_base_case_maximal_n

Maximal subsequence __length to switch to unbalanced __base case. Applies to std::sort with dynamically load-balanced quicksort.

Definition at line 240 of file settings.h.

Referenced by __gnu_parallel::__qsb_local_sort_with_helping().

4.224.3.41 unsigned int __gnu_parallel::_Settings::TLB_size

size of the Translation Lookaside Buffer (underestimation).

Definition at line 259 of file settings.h.

Referenced by __gnu_parallel::__parallel_random_shuffle_drs(), and __gnu_parallel::__sequential_random_shuffle().

4.224.3.42 _SequenceIndex __gnu_parallel::_Settings::transform_minimal_n

Minimal input size for parallel std::transform.

Definition at line 243 of file settings.h.

4.224.3.43 _SequenceIndex __gnu_parallel::_Settings::unique_copy_minimal_n

Minimal input size for unique_copy.

Definition at line 246 of file settings.h.

The documentation for this struct was generated from the following file:

- settings.h

4.225 std::_Sp_ebo_helper< _Nm, _Tp, false > Struct Template Reference

Public Member Functions

- **_Sp_ebo_helper** (const _Tp &__tp)
- **_Sp_ebo_helper** (_Tp &&__tp)

Static Public Member Functions

- static _Tp & **_S_get** (_Sp_ebo_helper &__eboh)

4.225.1 Detailed Description

template<int _Nm, typename _Tp>struct std::_Sp_ebo_helper< _Nm, _Tp, false >

Specialization not using EBO.

Definition at line 426 of file shared_ptr_base.h.

The documentation for this struct was generated from the following file:

- shared_ptr_base.h

4.226 std::_Sp_ebo_helper< _Nm, _Tp, true > Struct Template Reference

Inherits _Tp.

Public Member Functions

- **_Sp_ebo_helper** (const _Tp &__tp)
- **_Sp_ebo_helper** (_Tp &&__tp)

Static Public Member Functions

- static _Tp & **_S_get** (_Sp_ebo_helper &__eboh)

4.226.1 Detailed Description

template<int _Nm, typename _Tp>struct std::_Sp_ebo_helper< _Nm, _Tp, true >

Specialization using EBO.

Definition at line 415 of file shared_ptr_base.h.

The documentation for this struct was generated from the following file:

- shared_ptr_base.h

4.227 __gnu_parallel::_SplitConsistently< __exact, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference

4.227.1 Detailed Description

template<bool __exact, typename _RAIter, typename _Compare, typename _SortingPlacesIterator>struct __gnu_parallel::_SplitConsistently< __exact, _RAIter, _Compare, _SortingPlacesIterator >

Split consistently.

Definition at line 122 of file multiway_mergesort.h.

The documentation for this struct was generated from the following file:

- multiway_mergesort.h

4.228 __gnu_parallel::_SplitConsistently< false, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference

Public Member Functions

- void **operator()** (const _ThreadIndex __iam, _PMWMSSortingData< _RAIter > *__sd, _Compare &__comp, const typename std::iterator_traits< _RAIter >::difference_type __num_samples) const

4.228.1 Detailed Description

template<typename _RAIter, typename _Compare, typename _SortingPlacesIterator>struct __gnu_parallel::_SplitConsistently< false, _RAIter, _Compare, _SortingPlacesIterator >

Split by sampling.

Definition at line 187 of file multiway_mergesort.h.

The documentation for this struct was generated from the following file:

- multiway_mergesort.h

4.229 __gnu_parallel::_SplitConsistently< true, _RAIter, _Compare, _SortingPlacesIterator > Struct Template Reference

Public Member Functions

- void **operator()** (const _ThreadIndex __iam, _PMWMSSortingData< _RAIter > *__sd, _Compare &__comp, const typename std::iterator_traits< _RAIter >::difference_type __num_samples) const

4.229.1 Detailed Description

template<typename _RAIter, typename _Compare, typename _SortingPlacesIterator>struct __gnu_parallel::_SplitConsistently< true, _RAIter, _Compare, _SortingPlacesIterator >

Split by exact splitting.

Definition at line 128 of file multiway_mergesort.h.

The documentation for this struct was generated from the following file:

- multiway_mergesort.h

4.230 std::__detail::_StateSeq< _TraitsT > Class Template Reference

Public Types

- typedef _NFA< _TraitsT > **_RegexT**

Public Member Functions

- **_StateSeq** (_RegexT &__nfa, _StateIdT __s)
- **_StateSeq** (_RegexT &__nfa, _StateIdT __s, _StateIdT __end)

- void **_M_append** (_StateIdT __id)
- void **_M_append** (const _StateSeq &__s)
- _StateSeq **_M_clone** ()

Public Attributes

- _StateIdT **_M_end**
- _RegexT & **_M_nfa**
- _StateIdT **_M_start**

4.230.1 Detailed Description

template<typename _TraitsT>class std::__detail::_StateSeq< _TraitsT >

Describes a sequence of one or more _State, its current start and end(s). This structure contains fragments of an NFA during construction.

Definition at line 355 of file regex_automaton.h.

The documentation for this class was generated from the following files:

- regex_automaton.h
- regex_automaton.tcc

4.231 __gnu_cxx::_Std_pointer_impl< _Tp > Class Template Reference

Public Types

- typedef _Tp **element_type**

Public Member Functions

- _Tp * **get** () const
- bool **operator<** (const _Std_pointer_impl &__rarg) const
- bool **operator==** (const _Std_pointer_impl &__rarg) const
- void **set** (element_type *__arg)

4.231.1 Detailed Description

template<typename _Tp>class __gnu_cxx::_Std_pointer_impl< _Tp >

A storage policy for use with _Pointer_adapter<> which yields a standard pointer.

A _Storage_policy is required to provide 4 things: 1) A get() API for returning the stored pointer value. 2) An set() API for storing a pointer value. 3) An element_type typedef to define the type this points to. 4) An operator<() to support pointer comparison. 5) An operator==() to support pointer comparison.

Definition at line 69 of file pointer.h.

The documentation for this class was generated from the following file:

- pointer.h

4.232 std::_Temporary_buffer< _ForwardIterator, _Tp > Class Template Reference

Inheritance diagram for std::_Temporary_buffer< _ForwardIterator, _Tp >:



Public Types

- typedef pointer **iterator**
- typedef value_type * **pointer**
- typedef ptrdiff_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- _Temporary_buffer (_ForwardIterator __seed, size_type __original_len)
- iterator begin ()
- iterator end ()
- size_type requested_size () const
- size_type size () const

Protected Attributes

- pointer **_M_buffer**
- size_type **_M_len**
- size_type **_M_original_len**

4.232.1 Detailed Description

template<typename _ForwardIterator, typename _Tp>class std::_Temporary_buffer< _ForwardIterator, _Tp >

This class is used in two places: stl_algo.h and ext/memory, where it is wrapped as the temporary_buffer class. See temporary_buffer docs for more notes.

Definition at line 136 of file stl_tempbuf.h.

4.232.2 Constructor & Destructor Documentation

4.232.2.1 template<typename _ForwardIterator , typename _Tp > std::_Temporary_buffer< _ForwardIterator, _Tp >::_Temporary_buffer (_ForwardIterator *__seed,* size_type *__original_len*)

Constructs a temporary buffer of a size somewhere between zero and the given length.

Definition at line 258 of file stl_tempbuf.h.

References std::pair< _T1, _T2 >::first, and std::pair< _T1, _T2 >::second.

4.232.3 Member Function Documentation

4.232.3.1 template<typename _ForwardIterator , typename _Tp > iterator std::_Temporary_buffer< _ForwardIterator, _Tp >::begin ( ) [inline]

As per Table mumble.

Definition at line 165 of file stl_tempbuf.h.

4.232.3.2 template<typename _ForwardIterator , typename _Tp > iterator std::_Temporary_buffer< _ForwardIterator, _Tp >::end ( ) [inline]

As per Table mumble.

Definition at line 170 of file stl_tempbuf.h.

4.232.3.3 template<typename _ForwardIterator , typename _Tp > size_type std::_Temporary_buffer< _ForwardIterator, _Tp >::requested_size ( ) const [inline]

Returns the size requested by the constructor; may be >size().

Definition at line 160 of file stl_tempbuf.h.

4.232.3.4 template<typename _ForwardIterator , typename _Tp > size_type std::_Temporary_buffer< _ForwardIterator, _Tp >::size ( ) const [inline]

As per Table mumble.

Definition at line 155 of file stl_tempbuf.h.

The documentation for this class was generated from the following file:

- stl_tempbuf.h

4.233 std::_Tuple_impl< _Idx, _Elements > Struct Template Reference

4.233.1 Detailed Description

template<std::size_t _Idx, typename... _Elements>struct std::_Tuple_impl< _Idx, _Elements >

Contains the actual implementation of the `tuple` template, stored as a recursive inheritance hierarchy from the first element (most derived class) to the last (least derived class). The `Idx` parameter gives the 0-based index of the element stored at this point in the hierarchy; we use it to implement a constant-time get() operation.

Definition at line 183 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.234 std::_Tuple_impl< _Idx, _Head, _Tail...> Struct Template Reference

Inheritance diagram for std::_Tuple_impl< _Idx, _Head, _Tail...>:



Public Types

- typedef _Head_base< _Idx, _Head > **_Base**
- typedef _Tuple_impl< _Idx+1, _Tail...> **_Inherited**

Public Member Functions

- constexpr **_Tuple_impl** (const _Head &__head, const _Tail &...__tail)
- template<typename _UHead , typename... _UTail, typename = typename enable_if<sizeof...(_Tail) == sizeof...(_UTail)>::type> constexpr **_Tuple_impl** (_UHead &&__head, _UTail &&...__tail)
- constexpr **_Tuple_impl** (const _Tuple_impl &)=default
- constexpr **_Tuple_impl** (_Tuple_impl &&__in) noexcept(__and_< is_nothrow_move_constructible< _Head >, is_nothrow_move_constructible< _Inherited >>::value)
- template<typename... _UElements> constexpr **_Tuple_impl** (const _Tuple_impl< _Idx, _UElements...> &__in)
- template<typename _UHead , typename... _UTails> constexpr **_Tuple_impl** (_Tuple_impl< _Idx, _UHead, _UTails...> &&__in)
- template<typename _Alloc > constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a)
- template<typename _Alloc > **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, const _Head &__head, const _Tail &...__tail)
- template<typename _Alloc , typename _UHead , typename... _UTail, typename = typename enable_if<sizeof...(_Tail) == sizeof...(_UTail)>::type> constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, _UHead &&__head, _UTail &&...__tail)
- template<typename _Alloc > constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, const _Tuple_impl &__in)
- template<typename _Alloc > constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, _Tuple_impl &&__in)

- template<typename _Alloc , typename _UHead , typename... _UTails>
  constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, const _Tuple_impl< _Idx, _UHead, _UTails...> &__in)
- template<typename _Alloc , typename _UHead , typename... _UTails>
  constexpr **_Tuple_impl** (allocator_arg_t __tag, const _Alloc &__a, _Tuple_impl< _Idx, _UHead, _UTails...> &&__in)
- template<typename... _UElements>
  constexpr void **_M_assign** (const _Tuple_impl< _Idx, _UElements...> &__in)
- template<typename _UHead , typename... _UTails>
  constexpr void **_M_assign** (_Tuple_impl< _Idx, _UHead, _UTails...> &&__in)
- _Tuple_impl & **operator=** (const _Tuple_impl &)=delete

Static Public Member Functions

- static constexpr _Head & **_M_head** (_Tuple_impl &__t) noexcept
- static constexpr const _Head & **_M_head** (const _Tuple_impl &__t) noexcept
- static constexpr _Inherited & **_M_tail** (_Tuple_impl &__t) noexcept
- static constexpr const _Inherited & **_M_tail** (const _Tuple_impl &__t) noexcept

Protected Member Functions

- constexpr void **_M_swap** (_Tuple_impl &__in)

Friends

- template<std::size_t , typename... >
  class **_Tuple_impl**

4.234.1 Detailed Description

template<std::size_t _Idx, typename _Head, typename... _Tail>struct std::_Tuple_impl< _Idx, _Head, _Tail...>

Recursive tuple implementation. Here we store the `Head` element and derive from a `Tuple_impl` containing the remaining elements (which contains the `Tail`).

Definition at line 191 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.235 __gnu_cxx::_Unqualified_type< _Tp > Struct Template Reference

Public Types

- typedef _Tp **type**

4.235.1 Detailed Description

template<typename _Tp>struct __gnu_cxx::_Unqualified_type< _Tp >

This structure accommodates the way in which std::iterator_traits<> is normally specialized for const T*, so that value-_type is still T.

Definition at line 244 of file pointer.h.

The documentation for this struct was generated from the following file:

- pointer.h

4.236 std::_Vector_base< _Tp, _Alloc > Struct Template Reference

Inheritance diagram for std::_Vector_base< _Tp, _Alloc >:



Public Types

- typedef
  __gnu_cxx::__alloc_traits
  < _Alloc >::template rebind
  < _Tp >::other **_Tp_alloc_type**
- typedef _Alloc **allocator_type**
- typedef
  __gnu_cxx::__alloc_traits
  < _Tp_alloc_type >::pointer **pointer**

Public Member Functions

- **_Vector_base** (const allocator_type &__a) noexcept
- **_Vector_base** (size_t __n)
- **_Vector_base** (size_t __n, const allocator_type &__a)
- **_Vector_base** (_Vector_base &&)=default
- **_Vector_base** (_Tp_alloc_type &&__a) noexcept
- **_Vector_base** (_Vector_base &&__x, const allocator_type &__a)

- **_Vector_base** (const allocator_type &__a, _Vector_base &&__x)
- pointer **_M_allocate** (size_t __n)
- void **_M_deallocate** (pointer __p, size_t __n)
- _Tp_alloc_type & **_M_get_Tp_allocator** () noexcept
- const _Tp_alloc_type & **_M_get_Tp_allocator** () const noexcept
- allocator_type **get_allocator** () const noexcept

Public Attributes

- _Vector_impl **_M_impl**

Protected Member Functions

- void **_M_create_storage** (size_t __n)

4.236.1 Detailed Description

template<typename _Tp, typename _Alloc>struct std::_Vector_base< _Tp, _Alloc >

See bits/stl_deque.h's _Deque_base for an explanation.

Definition at line 84 of file stl_vector.h.

The documentation for this struct was generated from the following file:

- stl_vector.h

4.237 std::add_const< _Tp > Struct Template Reference

Public Types

- typedef _Tp const **type**

4.237.1 Detailed Description

template<typename _Tp>struct std::add_const< _Tp >

add_const

Definition at line 1544 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.238 std::add_cv< _Tp > Struct Template Reference

Public Types

- typedef add_const< typename add_volatile< _Tp >::type > ::type **type**

4.238.1 Detailed Description

template<typename _Tp>struct std::add_cv< _Tp >

add_cv

Definition at line 1554 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.239 std::add_lvalue_reference< _Tp > Struct Template Reference

Inherits std::__add_lvalue_reference_helper< _Tp, bool >.

Public Types

- typedef _Tp **type**

4.239.1 Detailed Description

template<typename _Tp>struct std::add_lvalue_reference< _Tp >

add_lvalue_reference

Definition at line 1614 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.240 std::add_rvalue_reference< _Tp > Struct Template Reference

Inherits std::__add_rvalue_reference_helper< _Tp, bool >.

Public Types

- typedef _Tp **type**

4.240.1 Detailed Description

template<typename _Tp>struct std::add_rvalue_reference< _Tp >

add_rvalue_reference

Definition at line 1628 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.241 std::add_volatile< _Tp > Struct Template Reference

Public Types

- typedef _Tp volatile **type**

4.241.1 Detailed Description

template<typename _Tp>struct std::add_volatile< _Tp >

add_volatile

Definition at line 1549 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.242 std::adopt_lock_t Struct Reference

4.242.1 Detailed Description

Assume the calling thread has already obtained mutex ownership and manage it.

Definition at line 136 of file std_mutex.h.

The documentation for this struct was generated from the following file:

- std_mutex.h

4.243 std::aligned_storage< _Len, _Align > Struct Template Reference

4.243.1 Detailed Description

template<std::size_t _Len, std::size_t _Align = __alignof__(typename __aligned_storage_msa< _Len>::__type)>struct std::aligned_storage< _Len, _Align >

Alignment type.

The value of _Align is a default-alignment which shall be the most stringent alignment requirement for any C++ object type whose size is no greater than _Len (3.9). The member typedef type shall be a POD type suitable for use as uninitialized storage for any object whose size is at most _Len and whose alignment is a divisor of _Align.

Definition at line 2069 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.244 std::aligned_union< _Len, _Types > Struct Template Reference

Public Types

- typedef aligned_storage < _S_len, alignment_value > ::type type

Static Public Attributes

- static const size_t alignment_value

4.244.1 Detailed Description

template<size_t _Len, typename... _Types>struct std::aligned_union< _Len, _Types >

Provide aligned storage for types.

[meta.trans.other]

Provides aligned storage for any of the provided types of at least size _Len.

See Also

aligned_storage

Definition at line 2107 of file type_traits.

4.244.2 Member Typedef Documentation

4.244.2.1 template<size_t _Len, typename... _Types> typedef aligned_storage<_S_len, alignment_value>::type std::aligned_union< _Len, _Types >::type

The storage.

Definition at line 2119 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.245 std::alignment_of< _Tp > Struct Template Reference

Inheritance diagram for std::alignment_of< _Tp >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.245.1 Detailed Description

template<typename _Tp>struct std::alignment_of< _Tp >

alignment_of

Definition at line 1350 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.246 std::allocator< _Tp > Class Template Reference

Inheritance diagram for std::allocator< _Tp >:



Public Types

- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef ptrdiff_t **difference_type**
- typedef true_type **is_always_equal**
- typedef _Tp * **pointer**
- typedef true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **allocator** (const allocator &__a) noexcept
- template<typename _Tp1 >
  constexpr **allocator** (const allocator< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- _Tp * **allocate** (size_type __n, const void *=static_cast< const void * >(0))
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args) noexcept(std::is_nothrow_constructible< _Up, _Args...>::value)
- void **deallocate** (_Tp *__p, size_type __t)
- template<typename _Up >
  void **destroy** (_Up *__p) noexcept(std::is_nothrow_destructible< _Up >::value)
- size_type **max_size** () const noexcept
- allocator & **operator=** (const allocator &)=default

Friends

- constexpr bool **operator!=** (const allocator &, const allocator &) noexcept
- constexpr bool **operator==** (const allocator &, const allocator &) noexcept

4.246.1 Detailed Description

template<typename _Tp>class std::allocator< _Tp >

The *standard* allocator, as per [20.4].

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/memory.html#std.util.memory.allocator for further details.

Template Parameters

_Tp	Type of allocated object.

Definition at line 116 of file allocator.h.

The documentation for this class was generated from the following file:

- allocator.h

4.247 std::allocator< void > Class Template Reference

Public Types

- typedef const void * **const_pointer**
- typedef ptrdiff_t **difference_type**
- typedef true_type **is_always_equal**
- typedef void * **pointer**
- typedef true_type **propagate_on_container_move_assignment**
- typedef size_t **size_type**
- typedef void **value_type**

Public Member Functions

- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args) noexcept(std::is_nothrow_constructible< _Up, _Args...>::value)
- template<typename _Up >
  void **destroy** (_Up *__p) noexcept(std::is_nothrow_destructible< _Up >::value)

4.247.1 Detailed Description

template<>class std::allocator< void >

allocator<void> specialization.

Definition at line 65 of file allocator.h.

The documentation for this class was generated from the following file:

- allocator.h

4.248 std::allocator_arg_t Struct Reference

4.248.1 Detailed Description

[allocator.tag]

Definition at line 50 of file uses_allocator.h.

The documentation for this struct was generated from the following file:

- uses_allocator.h

4.249 std::allocator_traits< _Alloc > Struct Template Reference

Inheritance diagram for std::allocator_traits< _Alloc >:



Public Types

- typedef _Alloc allocator_type
- using const_pointer = typename _Ptr< __c_pointer, const value_type >::type
- using const_void_pointer = typename _Ptr< __cv_pointer, const void >::type
- using difference_type = typename _Diff< _Alloc, pointer >::type
- using is_always_equal = __detected_or_t< typename is_empty< _Alloc >::type, __equal, _Alloc >
- using pointer = __detected_or_t< value_type *, __pointer, _Alloc >
- using propagate_on_container_copy_assignment = __detected_or_t< false_type, __pocca, _Alloc >
- using propagate_on_container_move_assignment = __detected_or_t< false_type, __pocma, _Alloc >
- using propagate_on_container_swap = __detected_or_t< false_type, __pocs, _Alloc >
- template<typename _Tp >
  using **rebind_alloc** = __alloc_rebind< _Alloc, _Tp >
- template<typename _Tp >
  using **rebind_traits** = allocator_traits< rebind_alloc< _Tp >>
- using size_type = typename _Size< _Alloc, difference_type >::type
- typedef _Alloc::value_type value_type
- using void_pointer = typename _Ptr< __v_pointer, void >::type

Static Public Member Functions

- static constexpr pointer allocate (_Alloc &__a, size_type __n)
- static constexpr pointer allocate (_Alloc &__a, size_type __n, const_void_pointer __hint)
- template<typename _Tp , typename... _Args>
  static constexpr auto construct (_Alloc &__a, _Tp *__p, _Args &&...__args) noexcept(noexcept(_S_construct(__a, __p, std::forward< _Args >(__args)...))) -> decltype(_S_construct(__a, __p, std::forward< _Args >(__args)...))
- static constexpr void deallocate (_Alloc &__a, pointer __p, size_type __n)
- template<typename _Tp >
  static constexpr void destroy (_Alloc &__a, _Tp *__p) noexcept(noexcept(_S_destroy(__a, __p, 0)))
- static constexpr size_type max_size (const _Alloc &__a) noexcept
- static constexpr _Alloc select_on_container_copy_construction (const _Alloc &__rhs)

Protected Types

- template<typename _Tp >
  using **__c_pointer** = typename _Tp::const_pointer
- template<typename _Tp >
  using **__cv_pointer** = typename _Tp::const_void_pointer
- template<typename _Tp >
  using **__equal** = typename _Tp::is_always_equal
- template<typename _Tp >
  using **__pocca** = typename _Tp::propagate_on_container_copy_assignment
- template<typename _Tp >
  using **__pocma** = typename _Tp::propagate_on_container_move_assignment
- template<typename _Tp >
  using **__pocs** = typename _Tp::propagate_on_container_swap
- template<typename _Tp >
  using **__pointer** = typename _Tp::pointer
- template<typename _Tp >
  using **__v_pointer** = typename _Tp::void_pointer

4.249.1 Detailed Description

template<typename _Alloc>struct std::allocator_traits< _Alloc >

Uniform interface to all allocator types.

Definition at line 86 of file bits/alloc_traits.h.

4.249.2 Member Typedef Documentation

4.249.2.1 template<typename _Alloc> typedef _Alloc std::allocator_traits< _Alloc >::allocator_type

The allocator type.

Definition at line 89 of file bits/alloc_traits.h.

4.249.2.2 template<typename _Alloc> using std::allocator_traits< _Alloc >::const_pointer = typename _Ptr<__c_pointer, const value_type>::type

The allocator's const pointer type.

`Alloc::const_pointer` if that type exists, otherwise `pointer_traits<pointer>::rebind<const value_type>`

Definition at line 138 of file bits/alloc_traits.h.

4.249.2.3 template<typename _Alloc> using std::allocator_traits< _Alloc >::const_void_pointer = typename _Ptr<__cv_pointer, const void>::type

The allocator's const void pointer type.

`Alloc::const_void_pointer` if that type exists, otherwise `pointer_traits<pointer>::rebind<const void>`

Definition at line 154 of file bits/alloc_traits.h.

4.249.2.4 template<typename _Alloc> using std::allocator_traits< _Alloc >::difference_type = typename _Diff<_Alloc, pointer>::type

The allocator's difference type.

`Alloc::difference_type` if that type exists, otherwise `pointer_traits<pointer>::difference_type`

Definition at line 162 of file bits/alloc_traits.h.

4.249.2.5 template<typename _Alloc> using std::allocator_traits< _Alloc >::is_always_equal = __detected_or_t<typename is_empty<_Alloc>::type, __equal, _Alloc>

Whether all instances of the allocator type compare equal.

`Alloc::is_always_equal` if that type exists, otherwise `is_empty<Alloc>::type`

Definition at line 206 of file bits/alloc_traits.h.

4.249.2.6 template<typename _Alloc> using std::allocator_traits< _Alloc >::pointer = __detected_or_t<value_type*, __pointer, _Alloc>

The allocator's pointer type.

`Alloc::pointer` if that type exists, otherwise `value_type*`

Definition at line 98 of file bits/alloc_traits.h.

4.249.2.7 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_copy_assignment = __detected_or_t<false_type, __pocca, _Alloc>

How the allocator is propagated on copy assignment.

`Alloc::propagate_on_container_copy_assignment` if that type exists, otherwise `false_type`

Definition at line 179 of file bits/alloc_traits.h.

4.249.2.8 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_move_assignment = __detected_or_t<false_type, __pocma, _Alloc>

How the allocator is propagated on move assignment.

`Alloc::propagate_on_container_move_assignment` if that type exists, otherwise `false_type`

Definition at line 188 of file bits/alloc_traits.h.

4.249.2.9 template<typename _Alloc> using std::allocator_traits< _Alloc >::propagate_on_container_swap = __detected_or_t<false_type, __pocs, _Alloc>

How the allocator is propagated on swap.

`Alloc::propagate_on_container_swap` if that type exists, otherwise `false_type`

Definition at line 197 of file bits/alloc_traits.h.

4.249.2.10 template<typename _Alloc> using std::allocator_traits< _Alloc >::size_type = typename _Size<_Alloc, difference_type>::type

The allocator's size type.

`Alloc::size_type` if that type exists, otherwise `make_unsigned<difference_type>::type`

Definition at line 170 of file bits/alloc_traits.h.

4.249.2.11 template<typename _Alloc> typedef _Alloc::value_type std::allocator_traits< _Alloc >::value_type

The allocated type.

Definition at line 91 of file bits/alloc_traits.h.

4.249.2.12 template<typename _Alloc> using std::allocator_traits< _Alloc >::void_pointer = typename _Ptr<__v_pointer, void>::type

The allocator's void pointer type.

`Alloc::void_pointer` if that type exists, otherwise `pointer_traits<pointer>::rebind<void>`

Definition at line 146 of file bits/alloc_traits.h.

4.249.3 Member Function Documentation

4.249.3.1 template<typename _Alloc> static constexpr pointer std::allocator_traits< _Alloc >::allocate (_Alloc & __a, size_type __n) [inline], [static]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.

Calls `a.allocate(n)`

Definition at line 313 of file bits/alloc_traits.h.

Referenced by std::__allocate_guarded().

4.249.3.2 template<typename _Alloc> static constexpr pointer std::allocator_traits< _Alloc >::allocate (_Alloc & __a, size_type __n, const_void_pointer __hint) [inline], [static]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.
__hint	Aid to locality.

Returns

Memory of suitable size and alignment for *n* objects of type `value_type`

Returns `a.allocate(n, hint)` if that expression is well-formed, otherwise returns `a.allocate(n)`

Definition at line 328 of file bits/alloc_traits.h.

4.249.3.3 template<typename _Alloc> template<typename _Tp , typename... _Args> static constexpr auto std::allocator_traits< _Alloc >::construct (_Alloc & *__a,* _Tp * *__p,* _Args &&... *__args*) -> decltype(_S_construct(__a, __p, std::forward<_Args>(__args)...)) [inline], [static], [noexcept]

Construct an object of type *_Tp*.

Parameters

__a	An allocator.
__p	Pointer to memory of suitable size and alignment for Tp
__args	Constructor arguments.

Calls `__a.construct(__p, std::forward<Args>(__args)...)` if that expression is well-formed, otherwise uses placement-new to construct an object of type *_Tp* at location *__p* from the arguments *__args*...

Definition at line 356 of file bits/alloc_traits.h.

4.249.3.4 template<typename _Alloc> static constexpr void std::allocator_traits< _Alloc >::deallocate (_Alloc & *__a,* pointer *__p,* size_type *__n*) [inline], [static]

Deallocate memory.

Parameters

__a	An allocator.
__p	Pointer to the memory to deallocate.
__n	The number of objects space was allocated for.

Calls `a.deallocate(p, n)`

Definition at line 340 of file bits/alloc_traits.h.

Referenced by std::__allocated_ptr< _Alloc >::~__allocated_ptr().

4.249.3.5 template<typename _Alloc> template<typename _Tp > static constexpr void std::allocator_traits< _Alloc >::destroy (_Alloc & *__a,* _Tp * *__p*) [inline], [static], [noexcept]

Destroy an object of type *_Tp*.

Parameters

__a	An allocator.
__p	Pointer to the object to destroy

Calls `__a.destroy(__p)` if that expression is well-formed, otherwise calls `__p->~_Tp()`

Definition at line 372 of file bits/alloc_traits.h.

Referenced by std::_Destroy().

4.249.3.6 template<typename _Alloc> static constexpr size_type std::allocator_traits< _Alloc >::max_size (const _Alloc & __a) [inline],[static],[noexcept]

The maximum supported allocation size.

Parameters

__a	An allocator.

Returns

`__a.max_size()` or `numeric_limits<size_type>::max()`

Returns `__a.max_size()` if that expression is well-formed, otherwise returns `numeric_limits<size_type>::max()`

Definition at line 385 of file bits/alloc_traits.h.

Referenced by std::forward_list< _Tp, _Alloc >::max_size(), and std::list< __inp, __rebind_inp >::max_size().

4.249.3.7 template<typename _Alloc> static constexpr _Alloc std::allocator_traits< _Alloc >::select_on_container_copy_construction (const _Alloc & *__rhs*) [inline], [static]

Obtain an allocator to use when copying a container.

Parameters

__rhs	An allocator.

Returns

`__rhs.select_on_container_copy_construction()` or *__rhs*

Returns `__rhs.select_on_container_copy_construction()` if that expression is well-formed, otherwise returns *__rhs*

Definition at line 397 of file bits/alloc_traits.h.

The documentation for this struct was generated from the following file:

- bits/alloc_traits.h

4.250 std::allocator_traits< allocator< _Tp > > Struct Template Reference

Public Types

- using allocator_type = allocator< _Tp >
- using const_pointer = const _Tp *
- using const_void_pointer = const void *
- using difference_type = std::ptrdiff_t
- using is_always_equal = true_type
- using pointer = _Tp *
- using propagate_on_container_copy_assignment = false_type
- using propagate_on_container_move_assignment = true_type
- using propagate_on_container_swap = false_type
- template<typename _Up >
  using **rebind_alloc** = allocator< _Up >
- template<typename _Up >
  using **rebind_traits** = allocator_traits< allocator< _Up >>
- using size_type = std::size_t
- using value_type = _Tp
- using void_pointer = void *

Static Public Member Functions

- static constexpr pointer allocate (allocator_type &__a, size_type __n)
- static constexpr pointer allocate (allocator_type &__a, size_type __n, const_void_pointer __hint)
- template<typename _Up , typename... _Args>
  static constexpr void construct (allocator_type &__a, _Up *__p, _Args &&...__args) noexcept(std::is_nothrow_constructible< _Up, _Args...>::value)
- static constexpr void deallocate (allocator_type &__a, pointer __p, size_type __n)
- template<typename _Up >
  static constexpr void destroy (allocator_type &__a, _Up *__p) noexcept(is_nothrow_destructible< _Up >::value)
- static constexpr size_type max_size (const allocator_type &__a) noexcept
- static constexpr allocator_type select_on_container_copy_construction (const allocator_type &__rhs)

4.250.1 Detailed Description

template<typename _Tp>struct std::allocator_traits< allocator< _Tp > >

Partial specialization for std::allocator.

Definition at line 407 of file bits/alloc_traits.h.

4.250.2 Member Typedef Documentation

4.250.2.1 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::allocator_type = allocator<_Tp>

The allocator type.

Definition at line 410 of file bits/alloc_traits.h.

4.250.2.2 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::const_pointer = const _Tp*

The allocator's const pointer type.

Definition at line 419 of file bits/alloc_traits.h.

4.250.2.3 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::const_void_pointer = const void*

The allocator's const void pointer type.

Definition at line 425 of file bits/alloc_traits.h.

4.250.2.4 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::difference_type = std::ptrdiff_t

The allocator's difference type.

Definition at line 428 of file bits/alloc_traits.h.

4.250.2.5 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::is_always_equal = true_type

Whether all instances of the allocator type compare equal.

Definition at line 443 of file bits/alloc_traits.h.

4.250.2.6 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::pointer = _Tp*

The allocator's pointer type.

Definition at line 416 of file bits/alloc_traits.h.

4.250.2.7 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::propagate_on_container_copy_assignment = false_type

How the allocator is propagated on copy assignment.

Definition at line 434 of file bits/alloc_traits.h.

4.250.2.8 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::propagate_on_container_move_assignment = true_type

How the allocator is propagated on move assignment.

Definition at line 437 of file bits/alloc_traits.h.

4.250.2.9 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::propagate_on_container_swap = false_type

How the allocator is propagated on swap.

Definition at line 440 of file bits/alloc_traits.h.

4.250.2.10 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::size_type = std::size_t

The allocator's size type.

Definition at line 431 of file bits/alloc_traits.h.

4.250.2.11 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::value_type = _Tp

The allocated type.

Definition at line 413 of file bits/alloc_traits.h.

4.250.2.12 template<typename _Tp > using std::allocator_traits< allocator< _Tp > >::void_pointer = void*

The allocator's void pointer type.

Definition at line 422 of file bits/alloc_traits.h.

4.250.3 Member Function Documentation

4.250.3.1 template<typename _Tp > static constexpr pointer std::allocator_traits< allocator< _Tp > >::allocate (allocator_type & *__a,* size_type *__n*) [inline], [static]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.

Calls `a.allocate(n)`

Definition at line 459 of file bits/alloc_traits.h.

4.250.3.2 template<typename _Tp > static constexpr pointer std::allocator_traits< allocator< _Tp > >::allocate (allocator_type & *__a,* size_type *__n,* const_void_pointer *__hint*) [inline], [static]

Allocate memory.

Parameters

__a	An allocator.
__n	The number of objects to allocate space for.
__hint	Aid to locality.

Returns

Memory of suitable size and alignment for *n* objects of type `value_type`

Returns `a.allocate(n, hint)`

Definition at line 473 of file bits/alloc_traits.h.

4.250.3.3 template<typename _Tp > template<typename _Up , typename... _Args> static constexpr void std::allocator_traits< allocator< _Tp > >::construct (allocator_type & *__a,* _Up * *__p,* _Args &&... *__args*) [inline],[static],[noexcept]

Construct an object of type `_Up`

Parameters

__a	An allocator.
__p	Pointer to memory of suitable size and alignment for an object of type `_Up`.
__args	Constructor arguments.

Calls `__a.construct(__p, std::forward<_Args>(__args)...)` in C++11, C++14 and C++17. Changed in C++20 to call `std::construct_at(__p, std::forward<_Args>(__args)...)` instead.

Definition at line 507 of file bits/alloc_traits.h.

4.250.3.4 template<typename _Tp > static constexpr void std::allocator_traits< allocator< _Tp > >::deallocate (allocator_type & *__a,* pointer *__p,* size_type *__n*) [inline],[static]

Deallocate memory.

Parameters

__a	An allocator.
__p	Pointer to the memory to deallocate.
__n	The number of objects space was allocated for.

Calls `a.deallocate(p, n)`

Definition at line 491 of file bits/alloc_traits.h.

4.250.3.5 template<typename _Tp > template<typename _Up > static constexpr void std::allocator_traits< allocator< _Tp > >::destroy (allocator_type & *__a,* _Up * *__p*) [inline],[static],[noexcept]

Destroy an object of type *_Up*.

Parameters

__a	An allocator.
__p	Pointer to the object to destroy

Calls `__a.destroy(__p)`.

Definition at line 527 of file bits/alloc_traits.h.

4.250.3.6 template<typename _Tp > static constexpr size_type std::allocator_traits< allocator< _Tp > >::max_size (const allocator_type & *__a*) [inline], [static], [noexcept]

The maximum supported allocation size.

Parameters

__a	An allocator.

Returns

`__a.max_size()`

Definition at line 543 of file bits/alloc_traits.h.

4.250.3.7 template<typename _Tp > static constexpr allocator_type std::allocator_traits< allocator< _Tp > >::select_on_container_copy_construction (const allocator_type & *__rhs*) [inline], [static]

Obtain an allocator to use when copying a container.

Parameters

__rhs	An allocator.

Returns

`__rhs`

Definition at line 558 of file bits/alloc_traits.h.

The documentation for this struct was generated from the following file:

- bits/alloc_traits.h

4.251 __gnu_cxx::random_condition::always_adjustor Struct Reference

Inherits __gnu_cxx::random_condition::adjustor_base.

4.251.1 Detailed Description

Always enter the condition.

Definition at line 521 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.252 __gnu_cxx::limit_condition::always_adjustor Struct Reference

Inherits __gnu_cxx::limit_condition::adjustor_base.

4.252.1 Detailed Description

Always enter the condition.

Definition at line 440 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.253 __gnu_cxx::annotate_base Struct Reference

Inheritance diagram for __gnu_cxx::annotate_base:

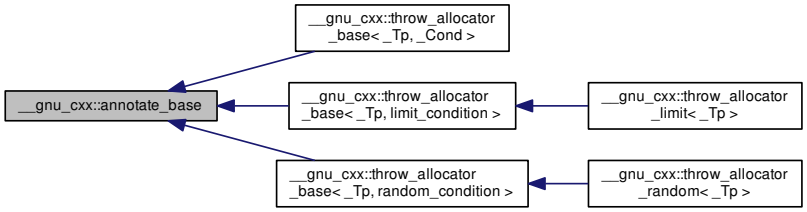

Public Member Functions

- void **check** (size_t label)
- map_alloc_type::iterator **check_allocated** (void ∗p, size_t size)
- map_construct_type::iterator **check_constructed** (void ∗p)
- void **check_constructed** (size_t label)
- void **erase** (void ∗p, size_t size)
- void **erase_construct** (void ∗p)
- void **insert** (void ∗p, size_t size)
- void **insert_construct** (void ∗p)

Static Public Member Functions

- static void **check** ()
- static size_t **get_label** ()
- static void **set_label** (size_t l)

Friends

- std::ostream & **operator**<< (std::ostream &, const annotate_base &)

4.253.1 Detailed Description

Base class for checking address and label information about allocations. Create a std::map between the allocated address (void∗) and a datum for annotations, which are a pair of numbers corresponding to label and allocated size.

Definition at line 89 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.254 std::experimental::fundamentals_v1::any Class Reference

Public Member Functions

- any () noexcept
- any (const any &__other)
- any (any &&__other) noexcept
- template<typename _ValueType , typename _Tp = _Decay<_ValueType>, typename _Mgr = _Manager<_Tp>, typename enable_if< is_constructible< _Tp, _ValueType && >::value, bool >::type = true>
  any (_ValueType &&__value)
- template<typename _ValueType , typename _Tp = _Decay<_ValueType>, typename _Mgr = _Manager<_Tp>, typename enable_if<!is_constructible< _Tp, _ValueType && >::value, bool >::type = false>
  any (_ValueType &&__value)
- ~any ()
- void clear () noexcept
- bool empty () const noexcept
- any & operator= (const any &__rhs)
- any & operator= (any &&__rhs) noexcept
- template<typename _ValueType >
  enable_if_t<!is_same< any,
  decay_t< _ValueType > >::value,
  any & > operator= (_ValueType &&__rhs)
- void swap (any &__rhs) noexcept
- const type_info & type () const noexcept

Static Public Member Functions

- template<typename _Tp >
  static constexpr bool **__is_valid_cast** ()

Friends

- template<typename _Tp >
  enable_if_t< is_object< _Tp >
  ::value, void * > **__any_caster** (const any *__any)

4.254.1 Detailed Description

A type-safe container of any type.

An `any` object's state is either empty or it stores a contained object of CopyConstructible type.

Definition at line 90 of file experimental/any.

4.254.2 Constructor & Destructor Documentation

4.254.2.1 std::experimental::fundamentals_v1::any::any ( ) [inline], [noexcept]

Default constructor, creates an empty object.

Definition at line 129 of file experimental/any.

Referenced by operator=().

4.254.2.2 std::experimental::fundamentals_v1::any::any (const any & *__other*) [inline]

Copy constructor, copies the state of `__other`.

Definition at line 132 of file experimental/any.

References empty().

4.254.2.3 std::experimental::fundamentals_v1::any::any (any && *__other*) [inline], [noexcept]

Move constructor, transfer the state from `__other`.

Postcondition

`__other.empty()` (this postcondition is a GNU extension)

Definition at line 149 of file experimental/any.

4.254.2.4 template<typename _ValueType , typename _Tp = _Decay<_ValueType>, typename _Mgr = _Manager<_Tp>, typename enable_if< is_constructible< _Tp, _ValueType && >::value, bool >::type = true> std::experimental::fundamentals_v1::any::any (_ValueType && *__value*) [inline]

Construct with a copy of `__value` as the contained object.

Definition at line 166 of file experimental/any.

4.254.2.5 template<typename _ValueType , typename _Tp = _Decay<_ValueType>, typename _Mgr = _Manager<_Tp>, typename enable_if<!is_constructible< _Tp, _ValueType && >::value, bool >::type = false> std::experimental::fundamentals_v1::any::any (_ValueType && *__value*) [inline]

Construct with a copy of `__value` as the contained object.

Definition at line 179 of file experimental/any.

4.254.2.6 std::experimental::fundamentals_v1::any::~any ( ) [inline]

Destructor, calls `clear()`

Definition at line 188 of file experimental/any.

References clear().

4.254.3 Member Function Documentation

4.254.3.1 void std::experimental::fundamentals_v1::any::clear ( ) [inline], [noexcept]

If not empty, destroy the contained object.

Definition at line 230 of file experimental/any.

References empty().

Referenced by operator=(), and ~any().

4.254.3.2 bool std::experimental::fundamentals_v1::any::empty ( ) const [inline], [noexcept]

Reports whether there is a contained object or not.

Definition at line 272 of file experimental/any.

Referenced by any(), clear(), swap(), and type().

4.254.3.3 any& std::experimental::fundamentals_v1::any::operator= (const any & *__rhs*) [inline]

Copy the state of another object.

Definition at line 193 of file experimental/any.

References any().

4.254.3.4 any& std::experimental::fundamentals_v1::any::operator= (any && *__rhs*) [inline], [noexcept]

Move assignment operator.

Postcondition

`__rhs.empty()` (not guaranteed for other implementations)

Definition at line 204 of file experimental/any.

References clear().

4.254.3.5 template<typename _ValueType > enable_if_t<!is_same<any, decay_t<_ValueType> >::value, any&> std::experimental::fundamentals_v1::any::operator= (_ValueType && *__rhs*) [inline]

Store a copy of `__rhs` as the contained object.

Definition at line 221 of file experimental/any.

References any().

4.254.3.6 void std::experimental::fundamentals_v1::any::swap (any & *__rhs*) [inline], [noexcept]

Exchange state with another object.

Definition at line 240 of file experimental/any.

References empty().

4.254.3.7 const type_info& std::experimental::fundamentals_v1::any::type ( ) const [inline], [noexcept]

The `typeid` of the contained object, or `typeid(void)` if empty.

Definition at line 276 of file experimental/any.

References empty().

The documentation for this class was generated from the following file:

- experimental/any

4.255 std::array< _Tp, _Nm > Struct Template Reference

Public Types

- typedef ::__array_traits< _Tp, _Nm > **_AT_Type**
- typedef const value_type * **const_iterator**
- typedef const value_type * **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**

- typedef std::ptrdiff_t **difference_type**
- typedef value_type * **iterator**
- typedef value_type * **pointer**
- typedef value_type & **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr reference **at** (size_type __n)
- constexpr const_reference **at** (size_type __n) const
- constexpr reference **back** () noexcept
- constexpr const_reference **back** () const noexcept
- constexpr iterator **begin** () noexcept
- constexpr const_iterator **begin** () const noexcept
- constexpr const_iterator **cbegin** () const noexcept
- constexpr const_iterator **cend** () const noexcept
- constexpr const_reverse_iterator **crbegin** () const noexcept
- constexpr const_reverse_iterator **crend** () const noexcept
- constexpr pointer **data** () noexcept
- constexpr const_pointer **data** () const noexcept
- constexpr bool **empty** () const noexcept
- constexpr iterator **end** () noexcept
- constexpr const_iterator **end** () const noexcept
- constexpr void **fill** (const value_type &__u)
- constexpr reference **front** () noexcept
- constexpr const_reference **front** () const noexcept
- constexpr size_type **max_size** () const noexcept
- constexpr reference **operator[]** (size_type __n) noexcept
- constexpr const_reference **operator[]** (size_type __n) const noexcept
- constexpr reverse_iterator **rbegin** () noexcept
- constexpr const_reverse_iterator **rbegin** () const noexcept
- constexpr reverse_iterator **rend** () noexcept
- constexpr const_reverse_iterator **rend** () const noexcept
- constexpr size_type **size** () const noexcept
- constexpr void **swap** (array &__other) noexcept(_AT_Type::_Is_nothrow_swappable::value)

Public Attributes

- _AT_Type::_Type **_M_elems**

4.255.1 Detailed Description

template<typename _Tp, std::size_t _Nm>struct std::array< _Tp, _Nm >

A standard container for storing a fixed size sequence of elements.

Meets the requirements of a container, a reversible container, and a sequence.

Sets support random access iterators.

Template Parameters

Tp	Type of element. Required to be a complete type.
Nm	Number of elements.

Definition at line 94 of file array.

The documentation for this struct was generated from the following file:

- array

4.256 __gnu_pbds::associative_tag Struct Reference

Inheritance diagram for __gnu_pbds::associative_tag:

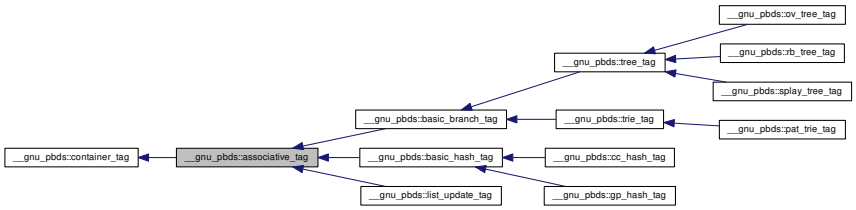

4.256.1 Detailed Description

Basic associative-container.

Definition at line 135 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.257 std::atomic< _Tp > Struct Template Reference

Public Types

- using **value_type** = _Tp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (_Tp __i) noexcept
- bool **compare_exchange_strong** (_Tp &__e, _Tp __i, memory_order __s, memory_order __f) noexcept
- bool **compare_exchange_strong** (_Tp &__e, _Tp __i, memory_order __s, memory_order __f) volatilenoexcept
- bool **compare_exchange_strong** (_Tp &__e, _Tp __i, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (_Tp &__e, _Tp __i, memory_order __m=memory_order_seq_cst) volatile-noexcept
- bool **compare_exchange_weak** (_Tp &__e, _Tp __i, memory_order __s, memory_order __f) noexcept
- bool **compare_exchange_weak** (_Tp &__e, _Tp __i, memory_order __s, memory_order __f) volatilenoexcept

- bool **compare_exchange_weak** (_Tp &__e, _Tp __i, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (_Tp &__e, _Tp __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- _Tp **exchange** (_Tp __i, memory_order __m=memory_order_seq_cst) noexcept
- _Tp **exchange** (_Tp __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- _Tp **load** (memory_order __m=memory_order_seq_cst) const noexcept
- _Tp **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator _Tp** () const noexcept
- **operator _Tp** () const volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- _Tp **operator=** (_Tp __i) noexcept
- _Tp **operator=** (_Tp __i) volatilenoexcept
- void **store** (_Tp __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (_Tp __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.257.1 Detailed Description

template<typename _Tp>struct std::atomic< _Tp >

Generic atomic type, primary class template.

Template Parameters

_Tp	Type to be made atomic, must be trivially copyable.

Definition at line 57 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.258 std::atomic< _Tp * > Struct Template Reference

Public Types

- typedef __atomic_base< _Tp * > **__base_type**
- typedef _Tp * **__pointer_type**
- using **difference_type** = ptrdiff_t
- using **value_type** = _Tp *

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__pointer_type __p) noexcept
- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) volatilenoexcept

- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__pointer_type &__p1, __pointer_type __p2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__pointer_type &__p1, __pointer_type __p2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__pointer_type &__p1, __pointer_type __p2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__pointer_type &__p1, __pointer_type __p2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __pointer_type **exchange** (__pointer_type __p, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **exchange** (__pointer_type __p, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __pointer_type **fetch_add** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **fetch_add** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __pointer_type **fetch_sub** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) noexcept
- __pointer_type **fetch_sub** (ptrdiff_t __d, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __pointer_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __pointer_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __pointer_type** () const noexcept
- **operator __pointer_type** () const volatilenoexcept
- __pointer_type **operator++** (int) noexcept
- __pointer_type **operator++** (int) volatilenoexcept
- __pointer_type **operator++** () noexcept
- __pointer_type **operator++** () volatilenoexcept
- __pointer_type **operator+=** (ptrdiff_t __d) noexcept
- __pointer_type **operator+=** (ptrdiff_t __d) volatilenoexcept
- __pointer_type **operator--** (int) noexcept
- __pointer_type **operator--** (int) volatilenoexcept
- __pointer_type **operator--** () noexcept
- __pointer_type **operator--** () volatilenoexcept
- __pointer_type **operator-=** (ptrdiff_t __d) noexcept
- __pointer_type **operator-=** (ptrdiff_t __d) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __pointer_type **operator=** (__pointer_type __p) noexcept
- __pointer_type **operator=** (__pointer_type __p) volatilenoexcept
- void **store** (__pointer_type __p, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__pointer_type __p, memory_order __m=memory_order_seq_cst) volatilenoexcept

Public Attributes

- __base_type **_M_b**

4.258.1 Detailed Description

template<typename _Tp>struct std::atomic< _Tp * >

Partial specialization for pointer types.

Definition at line 360 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.259 std::atomic< bool > Struct Template Reference

Public Types

- using **value_type** = bool

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (bool __i) noexcept
- bool **compare_exchange_strong** (bool &__i1, bool __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (bool &__i1, bool __i2, memory_order __m1, memory_order __m2) volatile noexcept
- bool **compare_exchange_strong** (bool &__i1, bool __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (bool &__i1, bool __i2, memory_order __m=memory_order_seq_cst) volatile noexcept
- bool **compare_exchange_weak** (bool &__i1, bool __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (bool &__i1, bool __i2, memory_order __m1, memory_order __m2) volatile noexcept
- bool **compare_exchange_weak** (bool &__i1, bool __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (bool &__i1, bool __i2, memory_order __m=memory_order_seq_cst) volatile noexcept
- bool **exchange** (bool __i, memory_order __m=memory_order_seq_cst) noexcept
- bool **exchange** (bool __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- bool **load** (memory_order __m=memory_order_seq_cst) const noexcept
- bool **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator bool** () const noexcept
- **operator bool** () const volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- bool **operator=** (bool __i) noexcept
- bool **operator=** (bool __i) volatilenoexcept
- void **store** (bool __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (bool __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.259.1 Detailed Description

template<>struct std::atomic< bool >

atomic<bool>

Definition at line 62 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.260 std::atomic< char > Struct Template Reference

Inheritance diagram for std::atomic< char >:



Public Types

- typedef __atomic_base< char > **__base_type**
- typedef char **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.260.1 Detailed Description

template<>struct std::atomic< char >

Explicit specialization for char.

Definition at line 637 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.261 std::atomic< char16_t > Struct Template Reference

Inheritance diagram for std::atomic< char16_t >:



Public Types

- typedef __atomic_base< char16_t > **__base_type**
- typedef char16_t **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.261.1 Detailed Description

template<>struct std::atomic< char16_t >

Explicit specialization for char16_t.

Definition at line 938 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.262 std::atomic< char32_t > Struct Template Reference

Inheritance diagram for std::atomic< char32_t >:



Public Types

- typedef __atomic_base< char32_t > **__base_type**
- typedef char32_t **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.262.1 Detailed Description

template<>struct std::atomic< char32_t >

Explicit specialization for char32_t.

Definition at line 961 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.263 std::atomic< int > Struct Template Reference

Inheritance diagram for std::atomic< int >:



Public Types

- typedef __atomic_base< int > **__base_type**
- typedef int **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.263.1 Detailed Description

template<>struct std::atomic< int >

Explicit specialization for int.

Definition at line 752 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.264 std::atomic< long > Struct Template Reference

Inheritance diagram for std::atomic< long >:



Public Types

- typedef __atomic_base< long > **__base_type**
- typedef long **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.264.1 Detailed Description

template<>struct std::atomic< long >

Explicit specialization for long.

Definition at line 798 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.265 std::atomic< long long > Struct Template Reference

Inheritance diagram for std::atomic< long long >:



Public Types

- typedef __atomic_base< long long > **__base_type**
- typedef long long **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.265.1 Detailed Description

template<>struct std::atomic< long long >

Explicit specialization for long long.

Definition at line 844 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.266 std::atomic< short > Struct Template Reference

Inheritance diagram for std::atomic< short >:



Public Types

- typedef __atomic_base< short > **__base_type**
- typedef short **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.266.1 Detailed Description

template<>struct std::atomic< short >

Explicit specialization for short.

Definition at line 706 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.267 std::atomic< signed char > Struct Template Reference

Inheritance diagram for std::atomic< signed char >:



Public Types

- typedef __atomic_base< signed char > **__base_type**
- typedef signed char **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.267.1 Detailed Description

template<>struct std::atomic< signed char >

Explicit specialization for signed char.

Definition at line 660 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.268 std::atomic< unsigned char > Struct Template Reference

Inheritance diagram for std::atomic< unsigned char >:



Public Types

- typedef __atomic_base
  < unsigned char > **__base_type**
- typedef unsigned char **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.268.1 Detailed Description

template<>struct std::atomic< unsigned char >

Explicit specialization for unsigned char.

Definition at line 683 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.269 std::atomic< unsigned int > Struct Template Reference

Inheritance diagram for std::atomic< unsigned int >:



Public Types

- typedef __atomic_base
  < unsigned int > **__base_type**
- typedef unsigned int **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.269.1 Detailed Description

template<>struct std::atomic< unsigned int >

Explicit specialization for unsigned int.

Definition at line 775 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.270 std::atomic< unsigned long > Struct Template Reference

Inheritance diagram for std::atomic< unsigned long >:



Public Types

- typedef __atomic_base
  < unsigned long > **__base_type**
- typedef unsigned long **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.270.1 Detailed Description

template<>struct std::atomic< unsigned long >

Explicit specialization for unsigned long.

Definition at line 821 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.271 std::atomic< unsigned long long > Struct Template Reference

Inheritance diagram for std::atomic< unsigned long long >:



Public Types

- typedef __atomic_base
  < unsigned long long > **__base_type**
- typedef unsigned long long **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.271.1 Detailed Description

template<>struct std::atomic< unsigned long long >

Explicit specialization for unsigned long long.

Definition at line 867 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.272 std::atomic< unsigned short > Struct Template Reference

Inheritance diagram for std::atomic< unsigned short >:



Public Types

- typedef __atomic_base
  < unsigned short > **__base_type**
- typedef unsigned short **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.272.1 Detailed Description

template<>struct std::atomic< unsigned short >

Explicit specialization for unsigned short.

Definition at line 729 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.273 std::atomic< wchar_t > Struct Template Reference

Inheritance diagram for std::atomic< wchar_t >:



Public Types

- typedef __atomic_base< wchar_t > **__base_type**
- typedef wchar_t **__integral_type**
- using **difference_type** = value_type
- using **value_type** = _ITp

Public Member Functions

- **atomic** (const atomic &)=delete
- constexpr **atomic** (__integral_type __i) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_strong** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) noexcept

- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m1, memory_order __m2) volatilenoexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) noexcept
- bool **compare_exchange_weak** (__int_type &__i1, __int_type __i2, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **exchange** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_add** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_and** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_or** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_sub** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- __int_type **fetch_xor** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept
- bool **is_lock_free** () const noexcept
- bool **is_lock_free** () const volatilenoexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const noexcept
- __int_type **load** (memory_order __m=memory_order_seq_cst) const volatilenoexcept
- **operator __int_type** () const noexcept
- **operator __int_type** () const volatilenoexcept
- __int_type **operator&=** (__int_type __i) noexcept
- __int_type **operator&=** (__int_type __i) volatilenoexcept
- __int_type **operator++** (int) noexcept
- __int_type **operator++** (int) volatilenoexcept
- __int_type **operator++** () noexcept
- __int_type **operator++** () volatilenoexcept
- __int_type **operator+=** (__int_type __i) noexcept
- __int_type **operator+=** (__int_type __i) volatilenoexcept
- __int_type **operator--** (int) noexcept
- __int_type **operator--** (int) volatilenoexcept
- __int_type **operator--** () noexcept
- __int_type **operator--** () volatilenoexcept
- __int_type **operator-=** (__int_type __i) noexcept
- __int_type **operator-=** (__int_type __i) volatilenoexcept
- atomic & **operator=** (const atomic &)=delete
- atomic & **operator=** (const atomic &) volatile=delete
- __int_type **operator^=** (__int_type __i) noexcept
- __int_type **operator^=** (__int_type __i) volatilenoexcept
- __int_type **operator|=** (__int_type __i) noexcept
- __int_type **operator|=** (__int_type __i) volatilenoexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) noexcept
- void **store** (__int_type __i, memory_order __m=memory_order_seq_cst) volatilenoexcept

4.273.1 Detailed Description

template<>struct std::atomic< wchar_t >

Explicit specialization for wchar_t.

Definition at line 890 of file atomic.

The documentation for this struct was generated from the following file:

- atomic

4.274 std::atomic_flag Struct Reference

Inheritance diagram for std::atomic_flag:



Public Member Functions

- **atomic_flag** (const atomic_flag &)=delete
- constexpr **atomic_flag** (bool __i) noexcept
- void **clear** (memory_order __m=memory_order_seq_cst) noexcept
- void **clear** (memory_order __m=memory_order_seq_cst) volatilenoexcept
- atomic_flag & **operator=** (const atomic_flag &)=delete
- atomic_flag & **operator=** (const atomic_flag &) volatile=delete
- bool **test_and_set** (memory_order __m=memory_order_seq_cst) noexcept
- bool **test_and_set** (memory_order __m=memory_order_seq_cst) volatilenoexcept

Public Attributes

- __atomic_flag_data_type **_M_i**

4.274.1 Detailed Description

atomic_flag

Definition at line 186 of file atomic_base.h.

The documentation for this struct was generated from the following file:

- atomic_base.h

4.275 std::auto_ptr< _Tp > Class Template Reference

Public Types

- typedef _Tp element_type

Public Member Functions

- auto_ptr (element_type *__p=0) throw ()
- auto_ptr (auto_ptr &__a) throw ()
- template<typename _Tp1 >
  auto_ptr (auto_ptr< _Tp1 > &__a) throw ()
- auto_ptr (auto_ptr_ref< element_type > __ref) throw ()
- ~auto_ptr ()
- element_type * get () const throw ()
- template<typename _Tp1 >
  operator auto_ptr< _Tp1 > () throw ()
- template<typename _Tp1 >
  operator auto_ptr_ref< _Tp1 > () throw ()
- element_type & operator* () const throw ()
- element_type * operator-> () const throw ()
- auto_ptr & operator= (auto_ptr &__a) throw ()
- template<typename _Tp1 >
  auto_ptr & operator= (auto_ptr< _Tp1 > &__a) throw ()
- auto_ptr & **operator=** (auto_ptr_ref< element_type > __ref) throw ()
- element_type * release () throw ()
- void reset (element_type *__p=0) throw ()

4.275.1 Detailed Description

template<typename _Tp>class std::auto_ptr< _Tp >

A simple smart pointer providing strict ownership semantics.

The Standard says:

```
An  auto_ptr owns the object it holds a pointer to.  Copying
an  auto_ptr copies the pointer and transfers ownership to the
destination.  If more than one  auto_ptr owns the same object
at the same time the behavior of the program is undefined.


The uses of  auto_ptr include providing temporary
exception-safety for dynamically allocated memory, passing
ownership of dynamically allocated memory to a function, and
returning dynamically allocated memory from a function.   auto_ptr does not meet the CopyConstructibl
requirements for Standard Library  container elements and thus
instantiating a Standard Library container with an  auto_ptr results in undefined behavior.
```

Quoted from [20.4.5]/3.

Good examples of what can and cannot be done with auto_ptr can be found in the libstdc++ testsuite.

_GLIBCXX_RESOLVE_LIB_DEFECTS

1. auto_ptr<> conversion issues These resolutions have all been incorporated.

Definition at line 89 of file auto_ptr.h.

4.275.2 Member Typedef Documentation

4.275.2.1 template<typename _Tp> typedef _Tp std::auto_ptr< _Tp >::element_type

The pointed-to type.

Definition at line 96 of file auto_ptr.h.

4.275.3 Constructor & Destructor Documentation

4.275.3.1 template<typename _Tp> std::auto_ptr< _Tp >::auto_ptr (element_type * __p = 0) throw) [inline], [explicit]

An auto_ptr is usually constructed from a raw pointer.

Parameters

__p	A pointer (defaults to NULL).

This object now *owns* the object pointed to by *__p*.

Definition at line 105 of file auto_ptr.h.

4.275.3.2 template<typename _Tp> std::auto_ptr< _Tp >::auto_ptr (auto_ptr< _Tp > & __a) throw) [inline]

An auto_ptr can be constructed from another auto_ptr.

Parameters

__a	Another auto_ptr of the same type.

This object now *owns* the object previously owned by *__a*, which has given up ownership.

Definition at line 114 of file auto_ptr.h.

4.275.3.3 template<typename _Tp> template<typename _Tp1 > std::auto_ptr< _Tp >::auto_ptr (auto_ptr< _Tp1 > & __a) throw) [inline]

An auto_ptr can be constructed from another auto_ptr.

Parameters

__a	Another auto_ptr of a different but related type.

A pointer-to-Tp1 must be convertible to a pointer-to-Tp/element_type.

This object now *owns* the object previously owned by *__a*, which has given up ownership.

Definition at line 127 of file auto_ptr.h.

4.275.3.4 template<typename _Tp> std::auto_ptr< _Tp >::~auto_ptr ( ) [inline]

When the auto_ptr goes out of scope, the object it owns is deleted. If it no longer owns anything (i.e., `get()` is `NULL`), then this has no effect.

The C++ standard says there is supposed to be an empty throw specification here, but omitting it is standard conforming. Its presence can be detected only if _Tp::~_Tp() throws, but this is prohibited. [17.4.3.6]/2

Definition at line 172 of file auto_ptr.h.

4.275.3.5 template<typename _Tp> std::auto_ptr< _Tp >::auto_ptr (auto_ptr_ref< element_type > *__ref*) throw) [inline]

Automatic conversions.

These operations are supposed to convert an auto_ptr into and from an auto_ptr_ref automatically as needed. This would allow constructs such as

```
auto_ptr<Derived>  func_returning_auto_ptr(.....);
...
auto_ptr<Base> ptr = func_returning_auto_ptr(.....);
```

But it doesn't work, and won't be fixed. For further details see http://cplusplus.github.io/LWG/lwg-closed.html#463

Definition at line 266 of file auto_ptr.h.

4.275.4 Member Function Documentation

4.275.4.1 template<typename _Tp> element_type* std::auto_ptr< _Tp >::get (void) const throw) [inline]

Bypassing the smart pointer.

Returns

The raw pointer being managed.

You can get a copy of the pointer that this object owns, for situations such as passing to a function which only accepts a raw pointer.

Note

This auto_ptr still owns the memory.

Definition at line 213 of file auto_ptr.h.

4.275.4.2 template<typename _Tp> element_type& std::auto_ptr< _Tp >::operator* ( ) const throw) [inline]

Smart pointer dereferencing.

If this auto_ptr no longer owns anything, then this operation will crash. (For a smart pointer, *no longer owns anything* is the same as being a null pointer, and you know what happens when you dereference one of those...)

Definition at line 183 of file auto_ptr.h.

4.275.4.3 template<typename _Tp> element_type* std::auto_ptr< _Tp >::operator-> ( ) const throw) [inline]

Smart pointer dereferencing.

This returns the pointer itself, which the language then will automatically cause to be dereferenced.

Definition at line 196 of file auto_ptr.h.

4.275.4.4 template<typename _Tp> auto_ptr& std::auto_ptr< _Tp >::operator= (auto_ptr< _Tp > & __a) throw) [inline]

auto_ptr assignment operator.

Parameters

__a	Another auto_ptr of the same type.

This object now *owns* the object previously owned by *__a*, which has given up ownership. The object that this one *used* to own and track has been deleted.

Definition at line 138 of file auto_ptr.h.

References std::auto_ptr< _Tp >::reset().

4.275.4.5 template<typename _Tp> template<typename _Tp1 > auto_ptr& std::auto_ptr< _Tp >::operator= (auto_ptr< _Tp1 > & __a) throw) [inline]

auto_ptr assignment operator.

Parameters

__a	Another auto_ptr of a different but related type.

A pointer-to-Tp1 must be convertible to a pointer-to-Tp/element_type.

This object now *owns* the object previously owned by *__a*, which has given up ownership. The object that this one *used* to own and track has been deleted.

Definition at line 156 of file auto_ptr.h.

References std::auto_ptr< _Tp >::reset().

4.275.4.6 template<typename _Tp> element_type* std::auto_ptr< _Tp >::release ( ) throw) [inline]

Bypassing the smart pointer.

Returns

The raw pointer being managed.

You can get a copy of the pointer that this object owns, for situations such as passing to a function which only accepts a raw pointer.

Note

This auto_ptr no longer owns the memory. When this object goes out of scope, nothing will happen.

Definition at line 227 of file auto_ptr.h.

4.275.4.7 template<typename _Tp> void std::auto_ptr< _Tp >::reset (element_type * __p = 0) throw) [inline]

Forcibly deletes the managed object.

Parameters

__p	A pointer (defaults to NULL).

This object now *owns* the object pointed to by *__p*. The previous object has been deleted.

Definition at line 242 of file auto_ptr.h.

Referenced by std::auto_ptr< _Tp >::operator=().

The documentation for this class was generated from the following file:

- auto_ptr.h

4.276 std::auto_ptr_ref< _Tp1 > Struct Template Reference

Public Member Functions

- **auto_ptr_ref** (_Tp1 *__p)

Public Attributes

- _Tp1 * **_M_ptr**

4.276.1 Detailed Description

template<typename _Tp1>struct std::auto_ptr_ref< _Tp1 >

A wrapper class to provide auto_ptr with reference semantics. For example, an auto_ptr can be assigned (or constructed from) the result of a function which returns an auto_ptr by value.

All the auto_ptr_ref stuff should happen behind the scenes.

Definition at line 48 of file auto_ptr.h.

The documentation for this struct was generated from the following file:

- auto_ptr.h

4.277 std::back_insert_iterator< _Container > Class Template Reference

Inheritance diagram for std::back_insert_iterator< _Container >:



Public Types

- typedef _Container container_type

- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

Public Member Functions

- constexpr back_insert_iterator (_Container &__x)
- constexpr back_insert_iterator & operator∗ ()
- constexpr back_insert_iterator & operator++ ()
- constexpr back_insert_iterator operator++ (int)
- constexpr back_insert_iterator & operator= (const typename _Container::value_type &__value)
- constexpr back_insert_iterator & **operator=** (typename _Container::value_type &&__value)

Protected Attributes

- _Container ∗ **container**

4.277.1 Detailed Description

template<typename _Container>class std::back_insert_iterator< _Container >

Turns assignment into insertion.

These are output iterators, constructed from a container-of-T. Assigning a T to the iterator appends it to the container using push_back.

Tip: Using the back_inserter function to create these iterators can save typing.

Definition at line 596 of file bits/stl_iterator.h.

4.277.2 Member Typedef Documentation

4.277.2.1 template<typename _Container > typedef _Container std::back_insert_iterator< _Container >::container_type

A nested typedef for the type of whatever container you used.

Definition at line 604 of file bits/stl_iterator.h.

4.277.2.2 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.277.2.3 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.277.2.4 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.277.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.277.2.6 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.277.3 Constructor & Destructor Documentation

4.277.3.1 template<typename _Container > constexpr std::back_insert_iterator< _Container >::back_insert_iterator (_Container & __x) [inline], [explicit]

The only way to create this iterator is with a container.

Definition at line 613 of file bits/stl_iterator.h.

4.277.4 Member Function Documentation

4.277.4.1 template<typename _Container > constexpr back_insert_iterator& std::back_insert_iterator< _Container >::operator* ( ) [inline]

Simply returns *this.

Definition at line 655 of file bits/stl_iterator.h.

4.277.4.2 template<typename _Container > constexpr back_insert_iterator& std::back_insert_iterator< _Container >::operator++ ( ) [inline]

Simply returns *this. (This iterator does not *move*.)

Definition at line 661 of file bits/stl_iterator.h.

4.277.4.3 template<typename _Container > constexpr back_insert_iterator std::back_insert_iterator< _Container >::operator++ (int) [inline]

Simply returns *this. (This iterator does not *move*.)

Definition at line 667 of file bits/stl_iterator.h.

4.277.4.4 template<typename _Container > constexpr back_insert_iterator& std::back_insert_iterator< _Container >::operator= (const typename _Container::value_type & __value) [inline]

Parameters

__value	An instance of whatever type container_type::const_reference is; presumably a reference-to-const T for container<T>.

Returns

This iterator, for chained operations.

This kind of iterator doesn't really have a *position* in the container (you can think of the position as being permanently at the end, if you like). Assigning a value to the iterator will always append the value to the end of the container.

Definition at line 637 of file bits/stl_iterator.h.

The documentation for this class was generated from the following file:

- bits/stl_iterator.h

4.278 std::bad_alloc Class Reference

Inheritance diagram for std::bad_alloc:



Public Member Functions

- **bad_alloc** (const bad_alloc &)=default
- bad_alloc & **operator=** (const bad_alloc &)=default
- virtual const char * what () const throw ()

4.278.1 Detailed Description

Exception possibly thrown by `new`.

`bad_alloc` (or classes derived from it) is used to report allocation errors from the throwing forms of `new`.

Definition at line 55 of file new.

4.278.2 Member Function Documentation

4.278.2.1 virtual const char* std::bad_alloc::what ( ) const throw) [virtual]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- new

4.279 std::experimental::fundamentals_v1::bad_any_cast Class Reference

Inheritance diagram for std::experimental::fundamentals_v1::bad_any_cast:

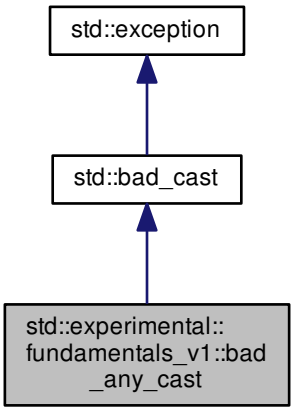

Public Member Functions

- virtual const char * what () const noexcept

4.279.1 Detailed Description

Exception class thrown by a failed `any_cast`.

Definition at line 67 of file experimental/any.

4.279.2 Member Function Documentation

4.279.2.1 virtual const char* std::experimental::fundamentals_v1::bad_any_cast::what ( ) const [inline], [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::bad_cast.

Definition at line 70 of file experimental/any.

The documentation for this class was generated from the following file:

- experimental/any

4.280 std::bad_cast Class Reference

Inheritance diagram for std::bad_cast:

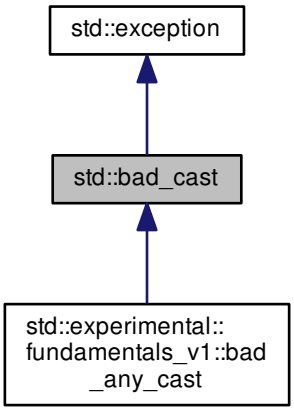

Public Member Functions

- virtual const char ∗ what () const noexcept

4.280.1 Detailed Description

Thrown during incorrect typecasting.

If you attempt an invalid `dynamic_cast` expression, an instance of this class (or something derived from this class) is thrown.

Definition at line 190 of file typeinfo.

4.280.2 Member Function Documentation

4.280.2.1 virtual const char∗ std::bad_cast::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

Reimplemented in std::experimental::fundamentals_v1::bad_any_cast.

The documentation for this class was generated from the following file:

- typeinfo

4.281 std::bad_exception Class Reference

Inheritance diagram for std::bad_exception:



Public Member Functions

- virtual const char * what () const noexcept

4.281.1 Detailed Description

If an exception is thrown which is not listed in a function's exception specification, one of these may be thrown.

Definition at line 50 of file exception.

4.281.2 Member Function Documentation

4.281.2.1 virtual const char* std::bad_exception::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- exception

4.282 std::bad_function_call Class Reference

Inheritance diagram for std::bad_function_call:



Public Member Functions

- const char ∗ what () const noexcept

4.282.1 Detailed Description

Exception class thrown when class template function's operator() is called with an empty target.

Definition at line 56 of file std_function.h.

4.282.2 Member Function Documentation

4.282.2.1 const char∗ std::bad_function_call::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- std_function.h

4.283 std::experimental::fundamentals_v1::bad_optional_access Class Reference

Inheritance diagram for std::experimental::fundamentals_v1::bad_optional_access:

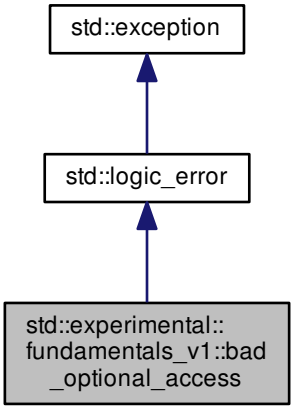

Public Member Functions

- **bad_optional_access** (const char ∗__arg)
- virtual const char ∗ what () const noexcept

4.283.1 Detailed Description

Exception class thrown when a disengaged optional object is dereferenced.

Definition at line 104 of file experimental/optional.

4.283.2 Member Function Documentation

4.283.2.1 virtual const char∗ std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- experimental/optional

4.284 std::bad_typeid Class Reference

Inheritance diagram for std::bad_typeid:



Public Member Functions

- virtual const char * what () const noexcept

4.284.1 Detailed Description

Thrown when a NULL pointer in a `typeid` expression is used.

Definition at line 207 of file typeinfo.

4.284.2 Member Function Documentation

4.284.2.1 virtual const char* std::bad_typeid::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- typeinfo

4.285 std::bad_weak_ptr Class Reference

Inheritance diagram for std::bad_weak_ptr:



Public Member Functions

- virtual char const * what () const noexcept

4.285.1 Detailed Description

Exception possibly thrown by `shared_ptr`.

Definition at line 76 of file shared_ptr_base.h.

4.285.2 Member Function Documentation

4.285.2.1 virtual char const* std::bad_weak_ptr::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- shared_ptr_base.h

4.286 __gnu_parallel::balanced_quicksort_tag Struct Reference

Inheritance diagram for __gnu_parallel::balanced_quicksort_tag:

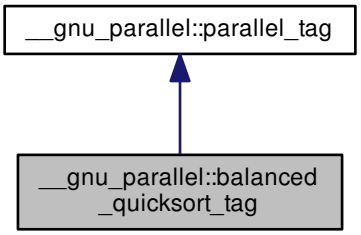

Public Member Functions

- **balanced_quicksort_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.286.1 Detailed Description

Forces parallel sorting using balanced quicksort at compile time.

Definition at line 164 of file tags.h.

4.286.2 Member Function Documentation

4.286.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.286.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.287 __gnu_parallel::balanced_tag Struct Reference

Inheritance diagram for __gnu_parallel::balanced_tag:

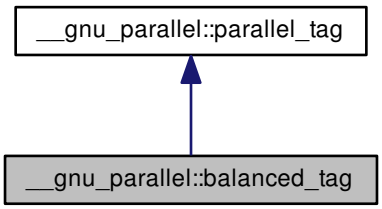

Public Member Functions

- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.287.1 Detailed Description

Recommends parallel execution using dynamic load-balancing at compile time.

Definition at line 88 of file tags.h.

4.287.2 Member Function Documentation

4.287.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline],[inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.287.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.288 std::tr2::bases< _Tp > Struct Template Reference

Public Types

- typedef __reflection_typelist < __bases(_Tp)...> **type**

4.288.1 Detailed Description

template<typename _Tp>struct std::tr2::bases< _Tp >

Sequence abstraction metafunctions for manipulating a typelist.

Enumerate all the base classes of a class. Form of a typelist.

Definition at line 88 of file tr2/type_traits.

The documentation for this struct was generated from the following file:

- tr2/type_traits

4.289 __gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc > Class Template Reference

Inherits type< Key, Mapped, _Alloc, Tag, Policy_Tl >.

Public Types

- typedef Node_Update **node_update**

Protected Member Functions

- **basic_branch** (const basic_branch &other)
- template<typename T0 > **basic_branch** (T0 t0)
- template<typename T0 , typename T1 > **basic_branch** (T0 t0, T1 t1)
- template<typename T0 , typename T1 , typename T2 > **basic_branch** (T0 t0, T1 t1, T2 t2)
- template<typename T0 , typename T1 , typename T2 , typename T3 > **basic_branch** (T0 t0, T1 t1, T2 t2, T3 t3)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 > **basic_branch** (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4)

- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 >
  basic_branch (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 , typename T6 >
  basic_branch (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5, T6 t6)

4.289.1 Detailed Description

template<typename Key, typename Mapped, typename Tag, typename Node_Update, typename Policy_Tl, typename _Alloc>class __gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc >

A branched, tree-like (tree, trie) container abstraction.

Template Parameters

Key	Key type.
Mapped	Map type.
Tag	Instantiating data structure type, see container_tag.
Node_Update	Updates nodes, restores invariants.
Policy_TL	Policy typelist.
_Alloc	Allocator type.

Base is dispatched at compile time via Tag, from the following choices: tree_tag, trie_tag, and their descendants.

Base choices are: detail::ov_tree_map, detail::rb_tree_map, detail::splay_tree_map, and detail::pat_trie_map.

Definition at line 555 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.290 __gnu_pbds::basic_branch_tag Struct Reference

Inheritance diagram for __gnu_pbds::basic_branch_tag:



4.290.1 Detailed Description

Basic branch structure.

Definition at line 147 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.291 std::basic_filebuf< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_filebuf< _CharT, _Traits >:

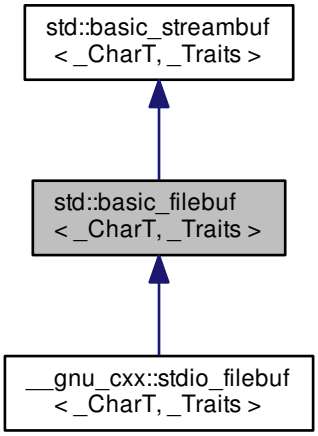

Public Types

- typedef codecvt< char_type, char, __state_type > **__codecvt_type**
- typedef __basic_file< char > **__file_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef traits_type::state_type **__state_type**
- typedef basic_streambuf < char_type, traits_type > **__streambuf_type**
- typedef _CharT **char_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::off_type **off_type**
- typedef traits_type::pos_type **pos_type**
- typedef _Traits **traits_type**

Public Member Functions

- basic_filebuf ()
- **basic_filebuf** (const basic_filebuf &)=delete
- **basic_filebuf** (basic_filebuf &&)
- virtual ~basic_filebuf ()
- __filebuf_type * close ()
- locale getloc () const
- streamsize in_avail ()

- bool is_open () const throw ()
- __filebuf_type * open (const char *__s, ios_base::openmode __mode)
- __filebuf_type * open (const std::string &__s, ios_base::openmode __mode)
- basic_filebuf & **operator=** (const basic_filebuf &)=delete
- basic_filebuf & **operator=** (basic_filebuf &&)
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- int_type sungetc ()
- void **swap** (basic_filebuf &)

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void **_M_allocate_internal_buffer** ()
- bool **_M_convert_to_external** (char_type *, streamsize)
- void _M_create_pback ()
- void **_M_destroy_internal_buffer** () throw ()
- void _M_destroy_pback () throw ()
- int **_M_get_ext_pos** (__state_type &__state)
- pos_type **_M_seek** (off_type __off, ios_base::seekdir __way, __state_type __state)
- void _M_set_buffer (streamsize __off)
- bool **_M_terminate_output** ()
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- virtual int_type overflow (int_type __c=_Traits::eof())
- virtual int_type pbackfail (int_type __c=_Traits::eof())
- void pbump (int __n)
- virtual pos_type seekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual pos_type seekpos (pos_type __pos, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual __streambuf_type * setbuf (char_type *__s, streamsize __n)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- virtual int sync ()
- virtual int_type uflow ()

- virtual int_type underflow ()
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- char_type * _M_buf
- bool **_M_buf_allocated**
- locale _M_buf_locale
- size_t _M_buf_size
- const __codecvt_type * **_M_codecvt**
- char * _M_ext_buf
- streamsize _M_ext_buf_size
- char * **_M_ext_end**
- const char * _M_ext_next
- __file_type **_M_file**
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- __c_lock **_M_lock**
- ios_base::openmode _M_mode
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end
- bool _M_reading
- __state_type **_M_state_beg**
- __state_type **_M_state_cur**
- __state_type **_M_state_last**
- bool **_M_writing**

- char_type _M_pback
- char_type * _M_pback_cur_save
- char_type * _M_pback_end_save
- bool _M_pback_init

Friends

- class **ios_base**

4.291.1 Detailed Description

template<typename _CharT, typename _Traits>class std::basic_filebuf< _CharT, _Traits >

The actual work of input and output (for files).

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This class associates both its input and output sequence with an external disk file, and maintains a joint file position for both sequences. Many of its semantics are described in terms of similar behavior in the Standard C Library's `FILE` streams.

Requirements on traits_type, specific to this class:

- traits_type::pos_type must be fpos<traits_type::state_type>
- traits_type::off_type must be streamoff
- traits_type::state_type must be Assignable and DefaultConstructible,
- traits_type::state_type() must be the initial state for codecvt.

Definition at line 80 of file fstream.

4.291.2 Constructor & Destructor Documentation

4.291.2.1 template<typename _CharT , typename _Traits > std::basic_filebuf< _CharT, _Traits >::basic_filebuf ( )

Does not open any files.

The default constructor initializes the parent class using its own default ctor.

Definition at line 81 of file fstream.tcc.

References std::basic_streambuf< _CharT, _Traits >::_M_buf_locale.

4.291.2.2 template<typename _CharT, typename _Traits> virtual std::basic_filebuf< _CharT, _Traits >::~basic_filebuf ( ) [inline], [virtual]

The destructor closes the file first.

Definition at line 246 of file fstream.

4.291.3 Member Function Documentation

4.291.3.1 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_create_pback ( ) [inline], [protected]

Initializes pback buffers, and moves normal buffers to safety. Assumptions: _M_in_cur has already been moved back

Definition at line 199 of file fstream.

4.291.3.2 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_destroy_pback ( ) throw) [inline], [protected]

Deactivates pback buffer contents, and restores normal buffer. Assumptions: The pback buffer has only moved forward.

Definition at line 216 of file fstream.

4.291.3.3 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_set_buffer (streamsize *__off*) [inline], [protected]

This function sets the pointers of the internal buffer, both get and put areas. Typically:

__off == egptr() - eback() upon underflow/uflow (**read** mode); __off == 0 upon overflow (**write** mode); __off == -1 upon open, setbuf, seekoff/pos (**uncommitted** mode).

NB: epptr() - pbase() == _M_buf_size - 1, since _M_buf_size reflects the actual allocated memory and the last cell is reserved for the overflow char of a full put area.

Definition at line 459 of file fstream.

4.291.3.4 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__filebuf_type * std::basic_filebuf< _CharT, _Traits >::close ( )

Closes the currently associated file.

Returns

`this` on success, NULL on failure

If no file is currently open, this function immediately fails.

If a *put buffer area* exists, `overflow(eof)` is called to flush all the characters. The file is then closed.

If any operations fail, this function also fails.

Definition at line 250 of file fstream.tcc.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), and std::basic_filebuf< char_type, traits_type >::~basic_filebuf().

4.291.3.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.291.3.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.291.3.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.291.3.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.291.3.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.291.3.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence

- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.291.3.11 template<typename _CharT , typename _Traits > void std::basic_filebuf< _CharT, _Traits >::imbue (const locale & *__loc*) [protected], [virtual]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 1030 of file fstream.tcc.

References std::ios_base::cur.

4.291.3.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.291.3.13 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::is_open ( ) const throw ( ) [inline]

Returns true if the external file is open.

Definition at line 265 of file fstream.

Referenced by std::basic_ifstream< _CharT, _Traits >::is_open(), std::basic_ofstream< _CharT, _Traits >::is_open(), and std::basic_fstream< _CharT, _Traits >::is_open().

4.291.3.14 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__filebuf_type * std::basic_filebuf< _CharT, _Traits >::open (const char * *__s*, ios_base::openmode *__mode*)

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

If a file is already open, this function immediately fails. Otherwise it tries to open the file named *__s* using the flags given in *__mode*.

Table 92, adapted here, gives the relation between openmode combinations and the equivalent `fopen()` flags. (NB: lines app, in|out|app, in|app, binary|app, binary|in|out|app, and binary|in|app per DR 596)

ios_base Flag combination				stdio equivalent
binary	in	out	trunc	app	
		+			w
		+	+		a
			+		a
		+	+		w
	+				r
	+	+			r+
	+	+	+		w+
	+	+	+		a+
	+		+		a+
+		+			wb
+		+	+		ab
+			+		ab
+		+	+		wb
+	+				rb
+	+	+			r+b
+	+	+	+		w+b
+	+	+	+		a+b
+	+		+		a+b

Definition at line 180 of file fstream.tcc.

References std::ios_base::ate, std::ios_base::end, and std::basic_filebuf< _CharT, _Traits >::open().

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), std::basic_filebuf< char_type, traits_type >::open(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), and std::basic_fstream< _CharT, _Traits >::open().

4.291.3.15 template<typename _CharT, typename _Traits> __filebuf_type* std::basic_filebuf< _CharT, _Traits >::open (const std::string & *__s,* ios_base::openmode *__mode*) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

Definition at line 331 of file fstream.

4.291.3.16 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::overflow (int_type *__c* = `_Traits::eof()`) [protected], [virtual]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually *__c*, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if *__c* is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 542 of file fstream.tcc.

References std::ios_base::app, std::ios_base::cur, and std::ios_base::out.

4.291.3.17 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::pbackfail (int_type *__c* = `_Traits::eof()`) [protected], [virtual]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 483 of file fstream.tcc.

References std::ios_base::cur, and std::ios_base::in.

4.291.3.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.291.3.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.291.3.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.291.3.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & __loc) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.291.3.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.291.3.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.291.3.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.291.3.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.291.3.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.291.3.27 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::pos_type std::basic_filebuf< _CharT, _Traits >::seekoff (off_type , ios_base::seekdir , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 833 of file fstream.tcc.

References std::ios_base::cur.

4.291.3.28 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::pos_type std::basic_filebuf< _CharT, _Traits >::seekpos (pos_type , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 893 of file fstream.tcc.

References std::ios_base::beg.

4.291.3.29 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__streambuf_type * std::basic_filebuf< _CharT, _Traits >::setbuf (char_type * __s, streamsize __n) [protected], [virtual]

Manipulates the buffer.

Parameters

__s	Pointer to a buffer area.
__n	Size of *__s*.

Returns

`this`

If no file has been opened, and both *__s* and *__n* are zero, then the stream becomes unbuffered. Otherwise, *__s* is used as a buffer; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 804 of file fstream.tcc.

4.291.3.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*) [inline], [protected], [inherited]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.291.3.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.291.3.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.291.3.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * __s, streamsize __n) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.291.3.34 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::showmanyc ( ) [protected], [virtual]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 298 of file fstream.tcc.

References std::ios_base::binary, and std::ios_base::in.

4.291.3.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.291.3.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type __c) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.291.3.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type __c) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.291.3.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * __s, streamsize __n) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.291.3.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.291.3.40 template<typename _CharT , typename _Traits > int std::basic_filebuf< _CharT, _Traits >::sync ( ) [protected], [virtual]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 1013 of file fstream.tcc.

4.291.3.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented in __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 707 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc().

4.291.3.42 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::underflow ( ) [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 324 of file fstream.tcc.

References std::ios_base::in, and std::min().

4.291.3.43 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 670 of file fstream.tcc.

References std::ios_base::in.

4.291.3.44 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes *__s*[0] through *__s*[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 756 of file fstream.tcc.

References std::ios_base::app, std::min(), and std::ios_base::out.

4.291.4 Member Data Documentation

4.291.4.1 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_buf [protected]

Pointer to the beginning of internal buffer.

Definition at line 136 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.291.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.291.4.3 template<typename _CharT, typename _Traits> size_t std::basic_filebuf< _CharT, _Traits >::_M_buf_size [protected]

Actual size of internal buffer. This number is equal to the size of the put area + 1 position, reserved for the overflow char of a full area.

Definition at line 143 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.291.4.4 template<typename _CharT, typename _Traits> char* std::basic_filebuf< _CharT, _Traits >::_M_ext_buf [protected]

Buffer for external characters. Used for input when codecvt::always_noconv() == false. When valid, this corresponds to eback().

Definition at line 178 of file fstream.

4.291.4.5 template<typename _CharT, typename _Traits> streamsize std::basic_filebuf< _CharT, _Traits >::_M_ext_buf_size [protected]

Size of buffer held by _M_ext_buf.

Definition at line 183 of file fstream.

4.291.4.6 template<typename _CharT, typename _Traits> const char* std::basic_filebuf< _CharT, _Traits >::_M_ext_next [protected]

Pointers into the buffer held by _M_ext_buf that delimit a subsequence of bytes that have been read but not yet converted. When valid, _M_ext_next corresponds to egptr().

Definition at line 190 of file fstream.

4.291.4.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.291.4.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.291.4.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.291.4.10 template<typename _CharT, typename _Traits> ios_base::openmode std::basic_filebuf< _CharT, _Traits >::_M_mode [protected]

Place to stash in || out || in | out settings for current filebuf.

Definition at line 121 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.291.4.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.291.4.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.291.4.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.291.4.14 template<typename _CharT, typename _Traits> char_type std::basic_filebuf< _CharT, _Traits >::_M_pback [protected]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 164 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback().

4.291.4.15 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_pback_cur_save [protected]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 165 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.291.4.16 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_pback_end_save [protected]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 166 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.291.4.17 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::_M_pback_init [protected]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 167 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.291.4.18 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::_M_reading [protected]

_M_reading == false && _M_writing == false for **uncommitted** mode; _M_reading == true for **read** mode; _M_writing == true for **write** mode;

NB: _M_reading == true && _M_writing == true is unused.

Definition at line 155 of file fstream.

The documentation for this class was generated from the following files:

- fstream
- fstream.tcc

4.292 std::basic_fstream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_fstream< _CharT, _Traits >:

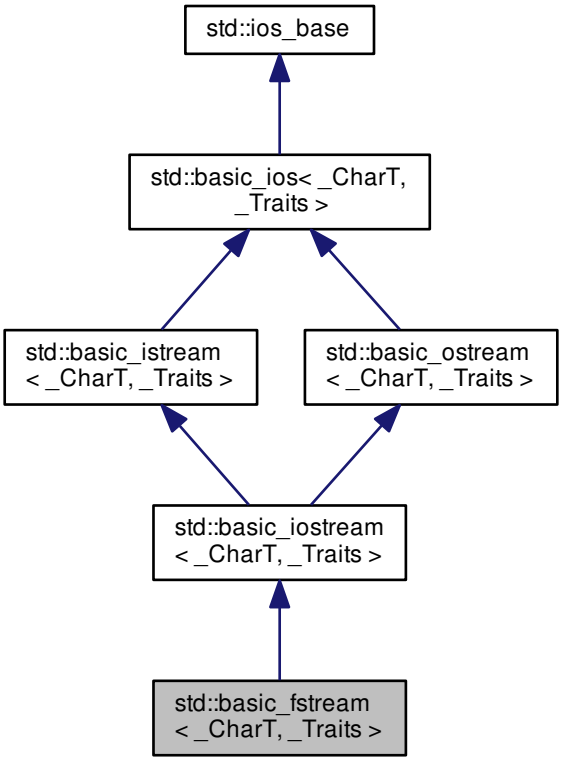

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef ctype< _CharT > **__ctype_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef basic_ios< char_type, traits_type > **__ios_type**
- typedef basic_iostream < char_type, traits_type > **__iostream_type**
- typedef basic_istream< _CharT, _Traits > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream< _CharT, _Traits > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_fstream ()
- basic_fstream (const char ∗__s, ios_base::openmode __mode=ios_base::in|ios_base::out)
- basic_fstream (const std::string &__s, ios_base::openmode __mode=ios_base::in|ios_base::out)
- **basic_fstream** (const basic_fstream &)=delete
- **basic_fstream** (basic_fstream &&__rhs)
- ~basic_fstream ()
- template<typename _ValueT > basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- template<typename _ValueT > basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- void close ()
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)

- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- streamsize gcount () const
- template<>
  basic_istream< char > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- template<>
  basic_istream< wchar_t > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const
- template<>
  basic_istream< char > & **ignore** (streamsize __n)
- template<>
  basic_istream< char > & **ignore** (streamsize __n, int_type __delim)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- bool is_open ()
- bool **is_open** () const
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- void open (const char *__s, ios_base::openmode __mode=ios_base::in|ios_base::out)
- void open (const std::string &__s, ios_base::openmode __mode=ios_base::in|ios_base::out)
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- basic_fstream & **operator=** (const basic_fstream &)=delete
- basic_fstream & **operator=** (basic_fstream &&__rhs)
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __filebuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- void **swap** (basic_fstream &__rhs)
- pos_type tellp ()
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)

- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)
- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)
- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()

- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)
- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))
- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)
- void **swap** (basic_iostream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT,
  _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.292.1 Detailed Description

template<typename _CharT, typename _Traits>class std::basic_fstream< _CharT, _Traits >

Controlling input and output for files.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This class supports reading from and writing to named files, using the inherited functions from std::basic_iostream. To control the associated sequence, an instance of std::basic_filebuf is used, which this page refers to as `sb`.

Definition at line 1016 of file fstream.

4.292.2 Member Typedef Documentation

4.292.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.292.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.292.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint

- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.292.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.292.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.292.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.292.3 Member Enumeration Documentation

4.292.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.292.4 Constructor & Destructor Documentation

4.292.4.1 template<typename _CharT, typename _Traits> std::basic_fstream< _CharT, _Traits >::basic_fstream ( ) [inline]

Default constructor.

Initializes sb using its default constructor, and passes &sb to the base class initializer. Does not open any files (you haven't given it a filename to open).

Definition at line 1043 of file fstream.

References std::basic_ios< _CharT, _Traits >::init().

4.292.4.2 template<typename _CharT, typename _Traits> std::basic_fstream< _CharT, _Traits >::basic_fstream (const char * __s, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline], [explicit]

Create an input/output file stream.

Parameters

__s	Null terminated string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

Definition at line 1053 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_fstream< _CharT, _Traits >::open().

4.292.4.3 template<typename _CharT, typename _Traits> std::basic_fstream< _CharT, _Traits >::basic_fstream (const std::string & __s, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline], [explicit]

Create an input/output file stream.

Parameters

__s	Null terminated string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

Definition at line 1083 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_fstream< _CharT, _Traits >::open().

4.292.4.4 template<typename _CharT, typename _Traits> std::basic_fstream< _CharT, _Traits >::~basic_fstream ( ) [inline]

The destructor does nothing.

The file is closed by the filebuf object, not the formatting stream.

Definition at line 1118 of file fstream.

4.292.5 Member Function Documentation

4.292.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.292.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * __s, streamsize __n) [inline], [inherited]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.292.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.292.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.292.5.5 template<typename _CharT, typename _Traits> void std::basic_fstream< _CharT, _Traits >::close ( ) [inline]

Close the file.

Calls `std::basic_filebuf::close()`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 1253 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::close(), std::ios_base::failbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.6 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & __rhs) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.292.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.292.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.292.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate __except) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.292.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.292.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.292.5.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.292.5.13 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.292.5.14 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.292.5.15 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( ) [inherited]

Synchronizing the stream buffer.

Returns

*this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline], [inherited]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.292.5.17 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.18 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c) [inherited]

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

*this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.19 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim) [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.292.5.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline], [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.292.5.21 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & __sb, char_type __delim) [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.292.5.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline], [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns `get(__sb,widen('\n'))`.

Definition at line 387 of file istream.

4.292.5.23 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * *__s,* streamsize *__n,* char_type *__delim*) [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals `__delim`, in which case the character is extracted (and therefore counted in `gcount()`) but not stored
3. `__n-1` characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.292.5.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline], [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.292.5.25 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.292.5.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.292.5.27 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*) [inherited]

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if *__n* != `std::numeric_limits<int>::max()`, *__n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals *__delim* (in this case, the character is extracted); note that this condition will never occur if *__delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.292.5.28 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.292.5.29 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.30 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.292.5.31 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.292.5.32 template<typename _CharT, typename _Traits> bool std::basic_fstream< _CharT, _Traits >::is_open ( ) [inline]

Wrapper to test for an open file.

Returns

`rdbuf()->is_open()`

Definition at line 1159 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::is_open().

4.292.5.33 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.292.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type __c, char __dfault) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.292.5.35 template<typename _CharT, typename _Traits> void std::basic_fstream< _CharT, _Traits >::open (const char * __s, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(__s,__mode)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 1177 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_ios< _CharT, _Traits >::setstate().

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream().

4.292.5.36 template<typename _CharT, typename _Traits> void std::basic_fstream< _CharT, _Traits >::open (const std::string & __s, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(__s,__mode)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 1218 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.292.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.292.5.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.292.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.292.5.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.292.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.292.5.43 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.292.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.292.5.45 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.292.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.292.5.47 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.292.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.292.5.49 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.292.5.50 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.292.5.51 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.292.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.292.5.53 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.292.5.54 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * __p) [inline], [inherited]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.292.5.55 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * __sb) [inherited]

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from `__sb` and inserted into `*this` until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from `__sb`, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.56 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.292.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.292.5.58 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.292.5.59 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 168 of file istream.

4.292.5.60 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.61 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 175 of file istream.

4.292.5.62 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.63 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 182 of file istream.

4.292.5.64 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 186 of file istream.

4.292.5.65 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 190 of file istream.

4.292.5.66 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 195 of file istream.

4.292.5.67 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 199 of file istream.

4.292.5.68 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 214 of file istream.

4.292.5.69 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 218 of file istream.

4.292.5.70 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 222 of file istream.

4.292.5.71 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& __p) [inline], [inherited]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 235 of file istream.

4.292.5.72 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*) [inherited]

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the `__sb` streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.73 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void) [inherited]

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.74 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.292.5.75 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.292.5.76 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c) [inherited]

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.77 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type __c) [inherited]

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.292.5.78 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.292.5.79 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.292.5.80 template<typename _CharT, typename _Traits> __filebuf_type* std::basic_fstream< _CharT, _Traits >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_filebuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 1151 of file fstream.

4.292.5.81 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.292.5.82 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * __s, streamsize __n) [inherited]

Extraction without delimiters.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.83 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * *__s*, streamsize *__n*) [inherited]

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.84 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.292.5.85 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type *__pos*) [inherited]

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.86 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.87 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*) [inherited]

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.88 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.89 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.292.5.90 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* & *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.292.5.91 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.292.5.92 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void) [inherited]

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.292.5.93 static bool std::ios_base::sync_with_stdio (bool __sync = true) [static],[inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea html#std.io.filestreams.binary

4.292.5.94 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void) [inherited]

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.292.5.95 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( ) [inherited]

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.292.5.96 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.292.5.97 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.292.5.98 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void) [inherited]

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.292.5.99 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.292.5.100 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.292.5.101 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.292.5.102 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.292.5.103 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * __s, streamsize __n) [inherited]

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.292.5.104 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.292.6 Member Data Documentation

4.292.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected], [inherited]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.292.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.292.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.292.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.292.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.292.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.292.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.292.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.292.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.292.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.292.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.292.6.12 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.292.6.13 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.292.6.14 const iostate std::ios_base::failbit [static],[inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.292.6.15 const fmtflags std::ios_base::fixed [static],[inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.292.6.16 const fmtflags std::ios_base::floatfield [static],[inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.292.6.17 const iostate std::ios_base::goodbit [static],[inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _-

Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.292.6.18 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.292.6.19 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.292.6.20 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.292.6.21 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.292.6.22 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.292.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.292.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.292.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.292.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.292.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.292.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.292.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.292.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.292.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.292.6.32 const fmtflags std::ios_base::uppercase [static],[inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following file:

- fstream

4.293 __gnu_pbds::basic_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Resize_Policy, Store_Hash, Tag, Policy_Tl, _Alloc > Class Template Reference

Inherits type< Key, Mapped, _Alloc, Tag, __gnu_cxx::typelist::append< __gnu_cxx::typelist::create4< Hash_Fn, Eq_Fn, Resize_Policy, detail::integral_constant< int, Store_Hash > >::type, Policy_Tl >::type >.

Protected Member Functions

- **basic_hash_table** (const basic_hash_table &other)
- template<typename T0 >
  basic_hash_table (T0 t0)
- template<typename T0 , typename T1 >
  basic_hash_table (T0 t0, T1 t1)
- template<typename T0 , typename T1 , typename T2 >
  basic_hash_table (T0 t0, T1 t1, T2 t2)
- template<typename T0 , typename T1 , typename T2 , typename T3 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 , typename T6 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5, T6 t6)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 , typename T6 , typename T7 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5, T6 t6, T7 t7)
- template<typename T0 , typename T1 , typename T2 , typename T3 , typename T4 , typename T5 , typename T6 , typename T7 , typename T8 >
  basic_hash_table (T0 t0, T1 t1, T2 t2, T3 t3, T4 t4, T5 t5, T6 t6, T7 t7, T8 t8)

4.293.1 Detailed Description

template<typename Key, typename Mapped, typename Hash_Fn, typename Eq_Fn, typename Resize_Policy, bool Store_Hash, typename Tag, typename Policy_Tl, typename _Alloc>class __gnu_pbds::basic_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Resize_Policy, Store_Hash, Tag, Policy_Tl, _Alloc >

A hashed container abstraction.

Template Parameters

Key	Key type.
Mapped	Map type.
Hash_Fn	Hashing functor.
Eq_Fn	Equal functor.
Resize_Policy	Resizes hash.
Store_Hash	Indicates whether the hash value will be stored along with each key.
Tag	Instantiating data structure type, see container_tag.
Policy_TL	Policy typelist.
_Alloc	Allocator type.

Base is dispatched at compile time via Tag, from the following choices: cc_hash_tag, gp_hash_tag, and descendants of basic_hash_tag.

Base choices are: detail::cc_ht_map, detail::gp_ht_map

Definition at line 104 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.294 __gnu_pbds::basic_hash_tag Struct Reference

Inheritance diagram for __gnu_pbds::basic_hash_tag:

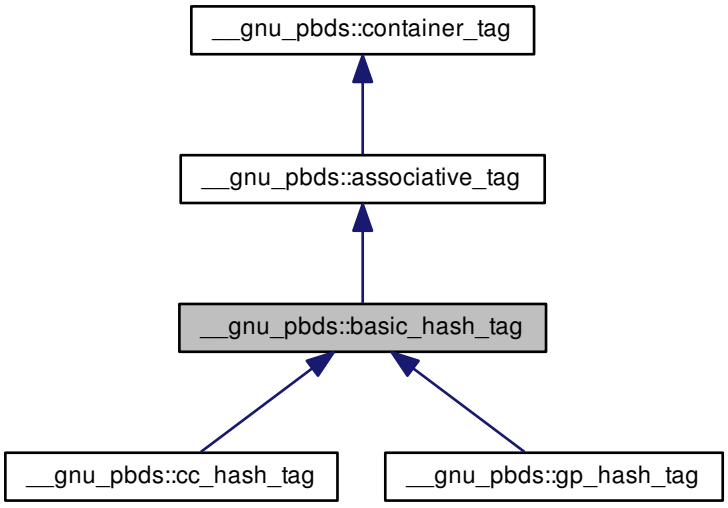

4.294.1 Detailed Description

Basic hash structure.

Definition at line 138 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.295 std::basic_ifstream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_ifstream< _CharT, _Traits >:

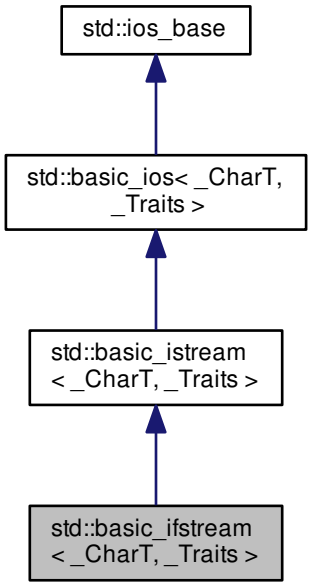

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_istream < char_type, traits_type > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")

- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_ifstream ()
- basic_ifstream (const char ∗__s, ios_base::openmode __mode=ios_base::in)
- basic_ifstream (const std::string &__s, ios_base::openmode __mode=ios_base::in)
- **basic_ifstream** (const basic_ifstream &)=delete
- **basic_ifstream** (basic_ifstream &&__rhs)
- ~basic_ifstream ()
- template<typename _ValueT > basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- void close ()
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- streamsize gcount () const
- template<> basic_istream< char > & **getline** (char_type ∗__s, streamsize __n, char_type __delim)
- template<> basic_istream< wchar_t > & **getline** (char_type ∗__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const

- template<>
  basic_istream< char > & **ignore** (streamsize __n)
- template<>
  basic_istream< char > & **ignore** (streamsize __n, int_type __delim)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- bool is_open ()
- bool **is_open** () const
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- void open (const char *__s, ios_base::openmode __mode=ios_base::in)
- void open (const std::string &__s, ios_base::openmode __mode=ios_base::in)
- basic_ifstream & **operator=** (const basic_ifstream &)=delete
- basic_ifstream & **operator=** (basic_ifstream &&__rhs)
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __filebuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- void **swap** (basic_ifstream &__rhs)
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)
- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)
- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()
- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)
- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)

- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.295.1 Detailed Description

template<typename _CharT, typename _Traits>class std::basic_ifstream< _CharT, _Traits >

Controlling input for files.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This class supports reading from named files, using the inherited functions from std::basic_istream. To control the associated sequence, an instance of std::basic_filebuf is used, which this page refers to as `sb`.

Definition at line 492 of file fstream.

4.295.2 Member Typedef Documentation

4.295.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.295.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.295.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.295.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.295.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.295.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.295.3 Member Enumeration Documentation

4.295.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.295.4 Constructor & Destructor Documentation

4.295.4.1 template<typename _CharT, typename _Traits> std::basic_ifstream< _CharT, _Traits >::basic_ifstream ( ) [inline]

Default constructor.

Initializes `sb` using its default constructor, and passes `&sb` to the base class initializer. Does not open any files (you haven't given it a filename to open).

Definition at line 518 of file fstream.

References std::basic_ios< _CharT, _Traits >::init().

4.295.4.2 template<typename _CharT, typename _Traits> std::basic_ifstream< _CharT, _Traits >::basic_ifstream (const char * __s, ios_base::openmode __mode = ios_base::in) [inline], [explicit]

Create an input file stream.

Parameters

__s	Null terminated string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

`ios_base::in` is automatically included in *__mode*.

Definition at line 529 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_ifstream< _CharT, _Traits >::open().

4.295.4.3 template<typename _CharT, typename _Traits> std::basic_ifstream< _CharT, _Traits >::basic_ifstream (const std::string & __s, ios_base::openmode __mode = ios_base::in) [inline], [explicit]

Create an input file stream.

Parameters

__s	std::string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

`ios_base::in` is automatically included in *__mode*.

Definition at line 562 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_ifstream< _CharT, _Traits >::open().

4.295.4.4 template<typename _CharT, typename _Traits> std::basic_ifstream< _CharT, _Traits >::~basic_ifstream ( ) [inline]

The destructor does nothing.

The file is closed by the filebuf object, not the formatting stream.

Definition at line 599 of file fstream.

4.295.5 Member Function Documentation

4.295.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.295.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.295.5.3 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate *__state* = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.295.5.4 template<typename _CharT, typename _Traits> void std::basic_ifstream< _CharT, _Traits >::close ( ) [inline]

Close the file.

Calls `std::basic_filebuf::close()`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 730 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::close(), std::ios_base::failbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.5 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & *__rhs*) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.295.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.295.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.295.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.295.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.295.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.295.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type __ch) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.295.5.12 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.295.5.13 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.295.5.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline], [inherited]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.295.5.15 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.16 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c) [inherited]

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

*this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.17 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim) [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.295.5.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline], [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.295.5.19 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & __sb, char_type __delim) [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.295.5.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline], [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns `get(__sb,widen('\n'))`.

Definition at line 387 of file istream.

4.295.5.21 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * *__s,* streamsize *__n,* char_type *__delim*) [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals `__delim`, in which case the character is extracted (and therefore counted in `gcount()`) but not stored
3. `__n-1` characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.295.5.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline], [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.295.5.23 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.295.5.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.295.5.25 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*) [inherited]

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if *__n* != `std::numeric_limits<int>::max()`, *__n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals *__delim* (in this case, the character is extracted); note that this condition will never occur if *__delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.295.5.26 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.295.5.27 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.28 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.295.5.29 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.295.5.30 template<typename _CharT, typename _Traits> bool std::basic_ifstream< _CharT, _Traits >::is_open ( ) [inline]

Wrapper to test for an open file.

Returns

`rdbuf()->is_open()`

Definition at line 640 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::is_open().

4.295.5.31 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.295.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type __c, char __dfault) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.295.5.33 template<typename _CharT, typename _Traits> void std::basic_ifstream< _CharT, _Traits >::open (const char * __s, ios_base::openmode __mode = ios_base::in) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(s,__mode|in)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 658 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::ios_base::in, std::basic_filebuf< _-CharT, _Traits >::open(), and std::basic_ios< _CharT, _Traits >::setstate().

Referenced by std::basic_ifstream< _CharT, _Traits >::basic_ifstream().

4.295.5.34 template<typename _CharT, typename _Traits> void std::basic_ifstream< _CharT, _Traits >::open (const std::string & __s, ios_base::openmode __mode = ios_base::in) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(__s,__mode|in)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 697 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::ios_base::in, std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.295.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.295.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.295.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.295.5.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.295.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 168 of file istream.

4.295.5.41 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 175 of file istream.

4.295.5.43 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 182 of file istream.

4.295.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 186 of file istream.

4.295.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 190 of file istream.

4.295.5.47 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 195 of file istream.

4.295.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 199 of file istream.

4.295.5.49 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 214 of file istream.

4.295.5.50 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 218 of file istream.

4.295.5.51 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & *__f*) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 222 of file istream.

4.295.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& *__p*) [inline], [inherited]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 235 of file istream.

4.295.5.53 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*) [inherited]

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If __sb is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the __sb streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.54 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void) [inherited]

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.55 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.295.5.56 streamsize std::ios_base::precision (streamsize *__prec*) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.295.5.57 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type *__c*) [inherited]

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.295.5.58 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.295.5.59 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.295.5.60 template<typename _CharT, typename _Traits> __filebuf_type* std::basic_ifstream< _CharT, _Traits >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_filebuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 632 of file fstream.

4.295.5.61 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.295.5.62 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * __s, streamsize __n) [inherited]

Extraction without delimiters.

Parameters

__s	A character array.

__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.63 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * *__s*, streamsize *__n*) [inherited]

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.64 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.295.5.65 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type *__pos*) [inherited]

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.66 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.67 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.295.5.68 fmtflags std::ios_base::setf (fmtflags *__fmtfl*, fmtflags *__mask*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.295.5.69 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.295.5.70 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void) [inherited]

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.295.5.71 static bool std::ios_base::sync_with_stdio (bool __sync = true) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.295.5.72 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void) [inherited]

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.295.5.73 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.295.5.74 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.295.5.75 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void) [inherited]

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.295.5.76 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.295.5.77 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.295.5.78 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.295.5.79 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.295.5.80 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.295.6 Member Data Documentation

4.295.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected], [inherited]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.295.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.295.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.295.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.295.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.295.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.295.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.295.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.295.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.295.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.295.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.295.6.12 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.295.6.13 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.295.6.14 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.295.6.15 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.295.6.16 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.295.6.17 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.295.6.18 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.295.6.19 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.295.6.20 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.295.6.21 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.295.6.22 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.295.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.295.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.295.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.295.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.295.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.295.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.295.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.295.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.295.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.295.6.32 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following file:

- fstream

4.296 __gnu_pbds::basic_invalidation_guarantee Struct Reference

Inheritance diagram for __gnu_pbds::basic_invalidation_guarantee:

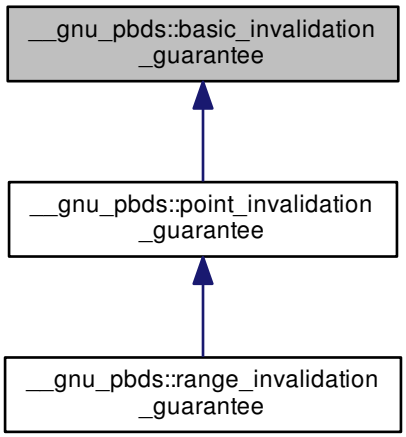

4.296.1 Detailed Description

Signifies a basic invalidation guarantee that any iterator, pointer, or reference to a container object's mapped value type is valid as long as the container is not modified.

Definition at line 93 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.297 std::basic_ios< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_ios< _CharT, _Traits >:

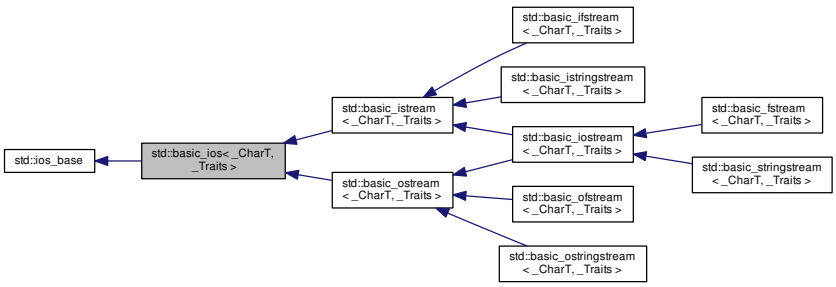

Public Types

- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef _Ios_Iostate iostate
- typedef _Ios_Openmode openmode
- typedef _Ios_Seekdir seekdir

- typedef _CharT char_type
- typedef _Traits::int_type int_type
- typedef _Traits::pos_type pos_type
- typedef _Traits::off_type off_type
- typedef _Traits traits_type

- typedef ctype< _CharT > __ctype_type
- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > __num_get_type

Public Member Functions

- basic_ios (basic_streambuf< _CharT, _Traits > ∗__sb)
- virtual ∼basic_ios ()
- const locale & _M_getloc () const
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- locale getloc () const
- bool good () const
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- streamsize precision () const

- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT, _Traits > * rdbuf () const
- basic_streambuf< _CharT, _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out

- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- basic_ios ()
- **basic_ios** (const basic_ios &)=delete
- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- basic_ios & **operator=** (const basic_ios &)=delete
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ios &__rhs) noexcept

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**

- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.297.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_ios< _CharT, _Traits >

Template class basic_ios, virtual base class for all stream classes.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

Most of the member functions called dispatched on stream objects (e.g., `std::cout.foo(bar);`) are consolidated in this class.

Definition at line 77 of file iosfwd.

4.297.2 Member Typedef Documentation

4.297.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef ctype<_CharT> std::basic_ios< _CharT, _Traits >::__ctype_type

These are non-standard types.

Definition at line 87 of file basic_ios.h.

4.297.2.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_get<_CharT, istreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_get_type

These are non-standard types.

Definition at line 91 of file basic_ios.h.

4.297.2.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.297.2.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _CharT std::basic_ios< _CharT, _Traits >::char_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 76 of file basic_ios.h.

4.297.2.5 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.297.2.6 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.297.2.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits::int_type std::basic_ios< _CharT, _Traits >::int_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 77 of file basic_ios.h.

4.297.2.8 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.297.2.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits::off_type std::basic_ios< _CharT, _Traits >::off_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 79 of file basic_ios.h.

4.297.2.10 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.297.2.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits::pos_type std::basic_ios< _CharT, _Traits >::pos_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 78 of file basic_ios.h.

4.297.2.12 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg

- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.297.2.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits std::basic_ios< _CharT, _Traits >::traits_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 80 of file basic_ios.h.

4.297.3 Member Enumeration Documentation

4.297.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.297.4 Constructor & Destructor Documentation

4.297.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::basic_ios (basic_streambuf< _CharT, _Traits > * *__sb*) [inline], [explicit]

Constructor performs initialization.

The parameter is passed by derived streams.

Definition at line 270 of file basic_ios.h.

4.297.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual std::basic_ios< _CharT, _Traits >::~basic_ios ( ) [inline], [virtual]

Empty.

The destructor does nothing. More specifically, it does not destroy the streambuf held by rdbuf().

Definition at line 282 of file basic_ios.h.

4.297.4.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::basic_ios ( ) [inline], [protected]

Empty.

The default constructor does nothing and is not normally accessible to users.

Definition at line 460 of file basic_ios.h.

4.297.5 Member Function Documentation

4.297.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.297.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.297.5.3 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit)

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.297.5.4 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & __rhs)

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.297.5.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.297.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.297.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate __except) [inline]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>
```

```
int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.297.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.297.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.297.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type __ch) [inline]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.297.5.11 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.297.5.12 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.297.5.13 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.297.5.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.297.5.15 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & *__loc*)

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.297.5.16 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.297.5.17 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.297.5.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.297.5.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.297.5.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.297.5.21 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.297.5.22 streamsize std::ios_base::precision (streamsize *__prec*) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.297.5.23 void*& std::ios_base::pword (int __ix) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.297.5.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current stream buffer.

This does not change the state of the stream.

Definition at line 321 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::tr2::operator>>(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.297.5.25 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * __sb)

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.297.5.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.297.5.27 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.297.5.28 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.297.5.29 fmtflags std::ios_base::setf (fmtflags *__fmtfl*, fmtflags *__mask*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.297.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.297.5.31 static bool std::ios_base::sync_with_stdio (bool __sync = true) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.297.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.297.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.297.5.34 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.297.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char __c) const [inline]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_-istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.297.5.36 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std-::operator>>().

4.297.5.37 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.297.5.38 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.297.6 Member Data Documentation

4.297.6.1 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.297.6.2 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.297.6.3 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.297.6.4 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.297.6.5 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.297.6.6 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.297.6.7 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.297.6.8 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.297.6.9 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.297.6.10 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.297.6.11 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.297.6.12 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.297.6.13 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.297.6.14 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.297.6.15 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.297.6.16 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _-

Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.297.6.17 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.297.6.18 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.297.6.19 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.297.6.20 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.297.6.21 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.297.6.22 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.297.6.23 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.297.6.24 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.297.6.25 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.297.6.26 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.297.6.27 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.297.6.28 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.297.6.29 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.297.6.30 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.297.6.31 const fmtflags std::ios_base::uppercase [static],[inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- basic_ios.h
- basic_ios.tcc

4.298 std::basic_iostream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_iostream< _CharT, _Traits >:

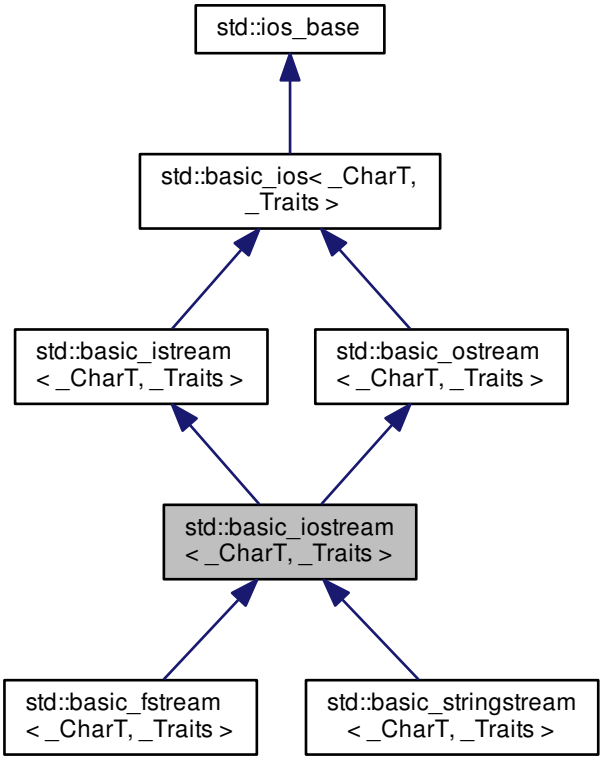

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef ctype< _CharT > **__ctype_type**

- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_istream< _CharT, _Traits > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**
- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream< _CharT, _Traits > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef _Traits::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef _Traits::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef _Traits::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_iostream (basic_streambuf< _CharT, _Traits > ∗__sb)
- virtual ∼basic_iostream ()
- template<typename _ValueT > basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- template<typename _ValueT > basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)

- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- streamsize gcount () const
- template<>
  basic_istream< char > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- template<>
  basic_istream< wchar_t > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const
- template<>
  basic_istream< char > & **ignore** (streamsize __n)
- template<>
  basic_istream< char > & **ignore** (streamsize __n, int_type __delim)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf () const
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- pos_type tellp ()
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const

- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)
- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)
- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()
- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)

- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))
- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- **basic_iostream** (const basic_iostream &)=delete
- **basic_iostream** (basic_iostream &&__rhs)
- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()

- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- basic_iostream & **operator=** (const basic_iostream &)=delete
- basic_iostream & **operator=** (basic_iostream &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)
- void **swap** (basic_iostream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT,
  _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.298.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_iostream< _CharT, _Traits >

Template class basic_iostream.

Template Parameters

_CharT	Type of character stream.

_Traits	Traits for character type, defaults to char_traits<_CharT>.

This class multiply inherits from the input and output stream classes simply to provide a single interface.

Definition at line 89 of file iosfwd.

4.298.2 Member Typedef Documentation

4.298.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.298.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.298.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws

- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.298.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.298.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.298.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.298.3 Member Enumeration Documentation

4.298.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.298.4 Constructor & Destructor Documentation

4.298.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_iostream< _CharT, _Traits >::basic_iostream (basic_streambuf< _CharT, _Traits > * *__sb*) [inline], [explicit]

Constructor does nothing.

Both of the parent classes are initialized with the same streambuf pointer passed to this constructor.

Definition at line 849 of file istream.

4.298.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual std::basic_iostream< _CharT, _Traits >::~basic_iostream ( ) [inline], [virtual]

Destructor does nothing.

Definition at line 856 of file istream.

4.298.5 Member Function Documentation

4.298.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.298.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * *__s*, streamsize *__n*) [inline], [inherited]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.298.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.298.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate *__state* = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.298.5.5 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & *__rhs*) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.298.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.298.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.298.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate __except) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.298.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.298.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.298.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.298.5.12 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.298.5.13 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.298.5.14 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( ) [inherited]

Synchronizing the stream buffer.

Returns

*this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.15 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline], [inherited]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.298.5.16 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.17 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c) [inherited]

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

*this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.18 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim) [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.298.5.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline], [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.298.5.20 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*, char_type *__delim*) [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.298.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline], [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns `get(__sb,widen('\n'))`.

Definition at line 387 of file istream.

4.298.5.22 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * *__s,* streamsize *__n,* char_type *__delim*) [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals `__delim`, in which case the character is extracted (and therefore counted in `gcount()`) but not stored
3. `__n-1` characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.298.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline], [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.298.5.24 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.298.5.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.298.5.26 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*) [inherited]

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if __*n* != `std::numeric_limits<int>::max()`, __*n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals __*delim* (in this case, the character is extracted); note that this condition will never occur if __*delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.298.5.27 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.298.5.28 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.29 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.298.5.30 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.298.5.31 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.298.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.298.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.298.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.298.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.298.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.298.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.298.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.298.5.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.298.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.298.5.41 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.298.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.298.5.43 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.298.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.298.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.298.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.298.5.47 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.298.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.298.5.49 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.298.5.50 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * __p) [inline], [inherited]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.298.5.51 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * __sb) [inherited]

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If __sb is NULL, the stream will set failbit in its error state.

Characters are extracted from __sb and inserted into *this until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from __sb, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as std::ws and std::dec use these functions in constructs like std::cin >> std::ws. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.298.5.53 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as std::ws and std::dec use these functions in constructs like std::cin >> std::ws. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.298.5.54 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as std::ws and std::dec use these functions in constructs like std::cin >> std::ws. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.298.5.55 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 168 of file istream.

4.298.5.56 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 175 of file istream.

4.298.5.58 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.59 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 182 of file istream.

4.298.5.60 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 186 of file istream.

4.298.5.61 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 190 of file istream.

4.298.5.62 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 195 of file istream.

4.298.5.63 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 199 of file istream.

4.298.5.64 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 214 of file istream.

4.298.5.65 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 218 of file istream.

4.298.5.66 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 222 of file istream.

4.298.5.67 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& __p) [inline], [inherited]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 235 of file istream.

4.298.5.68 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*) [inherited]

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the `__sb` streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.69 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void) [inherited]

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.70 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.298.5.71 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.298.5.72 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c) [inherited]

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.73 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type __c) [inherited]

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.298.5.74 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.298.5.75 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::rdbuf ( ) const [inline], [inherited]

Accessing the underlying buffer.

Returns

The current stream buffer.

This does not change the state of the stream.

Definition at line 321 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream<

_CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::tr2::operator>>(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.298.5.76 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.298.5.77 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.298.5.78 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * *__s*, streamsize *__n*) [inherited]

Extraction without delimiters.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.79 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * *__s*, streamsize *__n*) [inherited]

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.80 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.298.5.81 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type *__pos*) [inherited]

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.82 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.83 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*) [inherited]

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.84 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.85 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.298.5.86 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* & *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.298.5.87 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.298.5.88 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void) [inherited]

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.298.5.89 static bool std::ios_base::sync_with_stdio (bool __sync = true) [static],[inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea html#std.io.filestreams.binary

4.298.5.90 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void) [inherited]

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.298.5.91 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( ) [inherited]

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.298.5.92 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.298.5.93 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.298.5.94 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void) [inherited]

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.298.5.95 void std::ios_base::unsetf (fmtflags *__mask*) [inline],[inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.298.5.96 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.298.5.97 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.298.5.98 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.298.5.99 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * __s, streamsize __n) [inherited]

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.298.5.100 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.298.6 Member Data Documentation

4.298.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected], [inherited]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.298.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.298.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.298.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.298.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.298.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.298.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.298.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.298.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.298.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.298.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.298.6.12 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.298.6.13 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.298.6.14 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.298.6.15 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.298.6.16 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.298.6.17 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _-

Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.298.6.18 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.298.6.19 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.298.6.20 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.298.6.21 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.298.6.22 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.298.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.298.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.298.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.298.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.298.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.298.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.298.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.298.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.298.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.298.6.32 const fmtflags std::ios_base::uppercase [static],[inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- istream

4.299 std::basic_istream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_istream< _CharT, _Traits >:

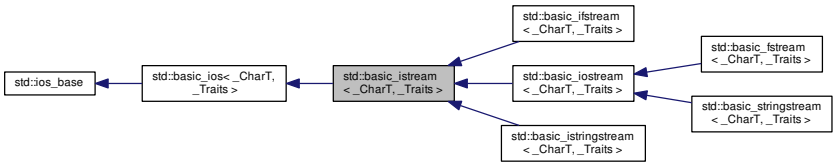

Classes

- class sentry

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_istream< _CharT, _Traits > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(* event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags

- typedef _Traits::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef _Traits::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef _Traits::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_istream (__streambuf_type *__sb)
- virtual ~basic_istream ()
- template<typename _ValueT > basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- streamsize gcount () const
- template<> basic_istream< char > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- template<> basic_istream< wchar_t > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const
- template<> basic_istream< char > & **ignore** (streamsize __n)
- template<> basic_istream< char > & **ignore** (streamsize __n, int_type __delim)
- template<> basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<> basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)

- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT, _Traits > * rdbuf () const
- basic_streambuf< _CharT, _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)
- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)
- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()
- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)
- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex

- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- **basic_istream** (const basic_istream &)=delete
- **basic_istream** (basic_istream &&__rhs)
- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- basic_istream & **operator=** (const basic_istream &)=delete
- basic_istream & **operator=** (basic_istream &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount

- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

Friends

- class **sentry**

4.299.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_istream< _CharT, _Traits >

Template class basic_istream.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This is the base class for all input streams. It provides text formatting of all builtin types, and communicates with any class derived from basic_streambuf to do the actual input.

Definition at line 83 of file iosfwd.

4.299.2 Member Typedef Documentation

4.299.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.299.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.

__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.299.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.299.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit

- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.299.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.299.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.299.3 Member Enumeration Documentation

4.299.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.299.4 Constructor & Destructor Documentation

4.299.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_istream< _CharT, _Traits >::basic_istream (__streambuf_type * *__sb*) [inline], [explicit]

Base constructor.

This ctor is almost never called by the user directly, rather from derived classes' initialization lists, which pass a pointer to their own stream buffer.

Definition at line 93 of file istream.

4.299.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual std::basic_istream< _CharT, _Traits >::~basic_istream ( ) [inline], [virtual]

Base destructor.

This does very little apart from providing a virtual base dtor.

Definition at line 103 of file istream.

4.299.5 Member Function Documentation

4.299.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.299.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.299.5.3 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.299.5.4 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & *__rhs*) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.299.5.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.299.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.299.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.299.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.299.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.299.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type __ch) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.299.5.11 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.299.5.12 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.299.5.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.299.5.14 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void)

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.15 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c)

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

*this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.16 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim)

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.299.5.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.299.5.18 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & __sb, char_type __delim)

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.299.5.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns get(__sb,widen('\n')).

Definition at line 387 of file istream.

4.299.5.20 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * *__s,* streamsize *__n,* char_type *__delim*)

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals __delim, in which case the character is extracted (and therefore counted in gcount()) but not stored
3. __n-1 characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.299.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.299.5.22 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.299.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.299.5.24 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*)

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if *__n* != `std::numeric_limits<int>::max()`, *__n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals *__delim* (in this case, the character is extracted); note that this condition will never occur if *__delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.299.5.25 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n)

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.299.5.26 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void)

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.27 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.299.5.28 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.299.5.29 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.299.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.299.5.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.299.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.299.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.299.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.299.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.299.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 168 of file istream.

4.299.5.37 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n)

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 175 of file istream.

4.299.5.39 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n)

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 182 of file istream.

4.299.5.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 186 of file istream.

4.299.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 190 of file istream.

4.299.5.43 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 195 of file istream.

4.299.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & __n) [inline]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 199 of file istream.

4.299.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & __f) [inline]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 214 of file istream.

4.299.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 218 of file istream.

4.299.5.47 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & *__f*) [inline]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 222 of file istream.

4.299.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& *__p*) [inline]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 235 of file istream.

4.299.5.49 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*)

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If __sb is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the __sb streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.50 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void)

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.51 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.299.5.52 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.299.5.53 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type __c)

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.299.5.54 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.299.5.55 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::rdbuf ( ) const [inline], [inherited]

Accessing the underlying buffer.

Returns

The current stream buffer.

This does not change the state of the stream.

Definition at line 321 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream<

_CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::tr2::operator>>(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.299.5.56 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.299.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.299.5.58 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * *__s*, streamsize *__n*)

Extraction without delimiters.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.59 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * *__s*, streamsize *__n*)

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.60 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.299.5.61 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type *__pos*)

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.62 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*)

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.63 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.299.5.64 fmtflags std::ios_base::setf (fmtflags *__fmtfl*, fmtflags *__mask*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.299.5.65 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.299.5.66 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void)

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.299.5.67 static bool std::ios_base::sync_with_stdio (bool __sync = `true`) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.299.5.68 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void)

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.299.5.69 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.299.5.70 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.299.5.71 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void)

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.299.5.72 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.299.5.73 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.299.5.74 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.299.5.75 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.299.5.76 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.299.6 Member Data Documentation

4.299.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.299.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.299.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.299.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.299.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.299.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.299.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.299.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.299.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.299.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.299.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.299.6.12 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.299.6.13 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.299.6.14 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.299.6.15 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.299.6.16 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.299.6.17 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.299.6.18 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.299.6.19 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.299.6.20 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.299.6.21 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.299.6.22 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.299.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.299.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.299.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.299.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.299.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.299.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.299.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.299.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.299.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.299.6.32 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- istream
- istream.tcc

4.300 std::basic_istringstream< _CharT, _Traits, _Alloc > Class Template Reference

Inheritance diagram for std::basic_istringstream< _CharT, _Traits, _Alloc >:

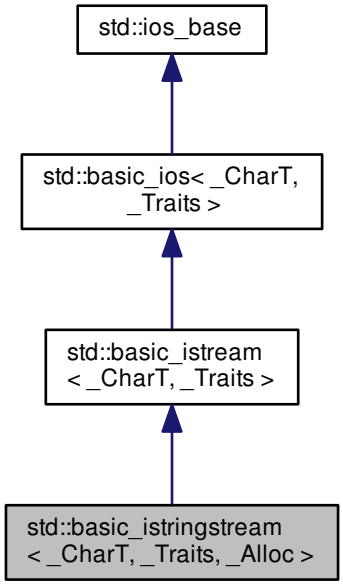

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_istream < char_type, traits_type > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_string< _CharT, _Traits, _Alloc > **__string_type**
- typedef basic_stringbuf < _CharT, _Traits, _Alloc > **__stringbuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _Alloc **allocator_type**

- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_istringstream ()
- basic_istringstream (ios_base::openmode __mode)
- basic_istringstream (const __string_type &__str, ios_base::openmode __mode=ios_base::in)
- **basic_istringstream** (const basic_istringstream &)=delete
- **basic_istringstream** (basic_istringstream &&__rhs)
- ~basic_istringstream ()
- template<typename _ValueT >
  basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- streamsize gcount () const
- template<>
  basic_istream< char > & **getline** (char_type ∗__s, streamsize __n, char_type __delim)
- template<>
  basic_istream< wchar_t > & **getline** (char_type ∗__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const
- template<>
  basic_istream< char > & **ignore** (streamsize __n)
- template<>
  basic_istream< char > & **ignore** (streamsize __n, int_type __delim)

- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- basic_istringstream & **operator=** (const basic_istringstream &)=delete
- basic_istringstream & **operator=** (basic_istringstream &&__rhs)
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __stringbuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- __string_type str () const
- void str (const __string_type &__s)
- void **swap** (basic_istringstream &__rhs)
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` *functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.*

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)

- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)
- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()
- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)
- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield

- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.300.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>>class std::basic_istringstream< _CharT, _Traits, _Alloc >

Controlling input for std::string.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.
_Alloc	Allocator type, defaults to allocator<_CharT>.

This class supports reading from objects of type std::basic_string, using the inherited functions from std::basic_istream. To control the associated sequence, an instance of std::basic_stringbuf is used, which this page refers to as `sb`.

Definition at line 100 of file iosfwd.

4.300.2 Member Typedef Documentation

4.300.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.300.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.300.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.300.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.300.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.300.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.300.3 Member Enumeration Documentation

4.300.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.300.4 Constructor & Destructor Documentation

4.300.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream ( ) [inline]

Default constructor starts with an empty string buffer.

Initializes `sb` using `in`, and passes `&sb` to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 425 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.300.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream (ios_base::openmode __mode) [inline], [explicit]

Starts with an empty string buffer.

Parameters

__mode	Whether the buffer can read, or write, or both.

`ios_base::in` is automatically included in *__mode*.

Initializes `sb` using `__mode|in`, and passes `&sb` to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 442 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.300.4.3 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream (const __string_type & *__str*, ios_base::openmode *__mode* = ios_base::in) [inline], [explicit]

Starts with an existing string buffer.

Parameters

__str	A string to copy as a starting buffer.
__mode	Whether the buffer can read, or write, or both.

`ios_base::in` is automatically included in *mode*.

Initializes `sb` using *str* and `mode|in`, and passes `&sb` to the base class initializer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 460 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.300.4.4 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_istringstream< _CharT, _Traits, _Alloc >::~basic_istringstream ( ) [inline]

The destructor does nothing.

The buffer is deallocated by the stringbuf object, not the formatting stream.

Definition at line 471 of file sstream.

4.300.5 Member Function Documentation

4.300.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.300.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.300.5.3 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate *__state* = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.300.5.4 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & *__rhs*) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.300.5.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.300.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.300.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.300.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.300.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.300.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.300.5.11 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.300.5.12 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.300.5.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline], [inherited]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.300.5.14 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.15 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c) [inherited]

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

*this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.16 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim) [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.300.5.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline], [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.300.5.18 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & __sb, char_type __delim) [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.300.5.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline], [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns `get(__sb,widen('\n'))`.

Definition at line 387 of file istream.

4.300.5.20 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * *__s,* streamsize *__n,* char_type *__delim*) [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals `__delim`, in which case the character is extracted (and therefore counted in `gcount()`) but not stored
3. `__n-1` characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.300.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline], [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.300.5.22 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.300.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.300.5.24 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*) [inherited]

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if *__n* != `std::numeric_limits<int>::max()`, *__n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals *__delim* (in this case, the character is extracted); note that this condition will never occur if *__delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.300.5.25 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.300.5.26 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.27 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.300.5.28 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.300.5.29 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.300.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.300.5.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.300.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.300.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.300.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.300.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.300.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 168 of file istream.

4.300.5.37 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 175 of file istream.

4.300.5.39 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 182 of file istream.

4.300.5.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 186 of file istream.

4.300.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 190 of file istream.

4.300.5.43 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & *__n*) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 195 of file istream.

4.300.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & *__n*) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 199 of file istream.

4.300.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & *__f*) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 214 of file istream.

4.300.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 218 of file istream.

4.300.5.47 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & *__f*) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 222 of file istream.

4.300.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& *__p*) [inline], [inherited]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 235 of file istream.

4.300.5.49 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*) [inherited]

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If __sb is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the __sb streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.50 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void) [inherited]

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.51 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.300.5.52 streamsize std::ios_base::precision (streamsize *__prec*) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.300.5.53 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type *__c*) [inherited]

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.300.5.54 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.300.5.55 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;          // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);             // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.300.5.56 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __stringbuf_type* std::basic_istringstream< _CharT, _Traits, _Alloc >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_stringbuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 511 of file sstream.

4.300.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.300.5.58 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * __s, streamsize __n) [inherited]

Extraction without delimiters.

Parameters

__s	A character array.

__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.59 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * *__s*, streamsize *__n*) [inherited]

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.60 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.300.5.61 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type *__pos*) [inherited]

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.62 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.63 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.300.5.64 fmtflags std::ios_base::setf (fmtflags *__fmtfl*, fmtflags *__mask*) [inline], [inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.300.5.65 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.300.5.66 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __string_type std::basic_istringstream< _CharT, _Traits, _Alloc >::str ( ) const [inline]

Copying out the string buffer.

Returns

`rdbuf()->str()`

Definition at line 519 of file sstream.

4.300.5.67 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> void std::basic_istringstream< _CharT, _Traits, _Alloc >::str (const __string_type & *__s*) [inline]

Setting a new buffer.

Parameters

__s	The string to use as a new sequence.

Calls `rdbuf()->str(s)`.

Definition at line 529 of file sstream.

4.300.5.68 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void) [inherited]

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.300.5.69 static bool std::ios_base::sync_with_stdio (bool *__sync* = `true`) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea html#std.io.filestreams.binary

4.300.5.70 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void) [inherited]

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.300.5.71 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.300.5.72 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.300.5.73 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void) [inherited]

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.300.5.74 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.300.5.75 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_-istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.300.5.76 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std-::operator>>().

4.300.5.77 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.300.5.78 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.300.6 Member Data Documentation

4.300.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected], [inherited]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.300.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.300.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.300.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.300.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >-

::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.300.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.300.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.300.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.300.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.300.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.300.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.300.6.12 const seekdir std::ios_base::end [static],[inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.300.6.13 const iostate std::ios_base::eofbit [static],[inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.300.6.14 const iostate std::ios_base::failbit [static],[inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.300.6.15 const fmtflags std::ios_base::fixed [static],[inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.300.6.16 const fmtflags std::ios_base::floatfield [static],[inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.300.6.17 const iostate std::ios_base::goodbit [static],[inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.300.6.18 const fmtflags std::ios_base::hex [static],[inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.300.6.19 const openmode std::ios_base::in [static],[inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.300.6.20 const fmtflags std::ios_base::internal [static],[inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.300.6.21 const fmtflags std::ios_base::left [static],[inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.300.6.22 const fmtflags std::ios_base::oct [static],[inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.300.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.300.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.300.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.300.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.300.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.300.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.300.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.300.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.300.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.300.6.32 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- sstream

4.301 std::basic_ofstream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_ofstream< _CharT, _Traits >:

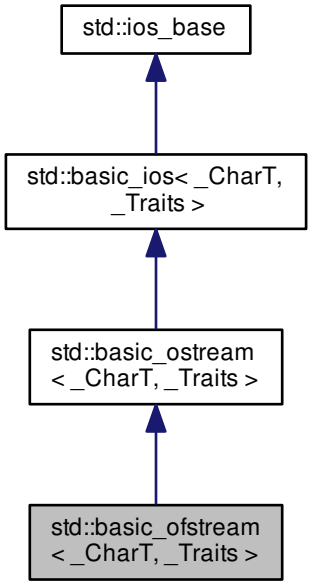

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream < char_type, traits_type > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > __num_get_type

Public Member Functions

- basic_ofstream ()
- basic_ofstream (const char ∗__s, ios_base::openmode __mode=ios_base::out)
- basic_ofstream (const std::string &__s, ios_base::openmode __mode=ios_base::out)
- **basic_ofstream** (const basic_ofstream &)=delete
- **basic_ofstream** (basic_ofstream &&__rhs)
- ~basic_ofstream ()
- const locale & _M_getloc () const
- template<typename _ValueT > basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- void close ()
- basic_ios & copyfmt (const basic_ios &__rhs)

- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- locale getloc () const
- bool good () const
- locale imbue (const locale &__loc)
- bool is_open ()
- bool **is_open** () const
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- void open (const char *__s, ios_base::openmode __mode=ios_base::out)
- void open (const std::string &__s, ios_base::openmode __mode=ios_base::out)
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- basic_ofstream & **operator=** (const basic_ofstream &)=delete
- basic_ofstream & **operator=** (basic_ofstream &&__rhs)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT, _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __filebuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- void **swap** (basic_ofstream &__rhs)
- pos_type tellp ()
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))
- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` *functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.*

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary

- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.301.1 Detailed Description

template<typename _CharT, typename _Traits>class std::basic_ofstream< _CharT, _Traits >

Controlling output for files.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This class supports reading from named files, using the inherited functions from std::basic_ostream. To control the associated sequence, an instance of std::basic_filebuf is used, which this page refers to as `sb`.

Definition at line 753 of file fstream.

4.301.2 Member Typedef Documentation

4.301.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_get<_CharT, istreambuf_iterator<_CharT, _Traits>> std::basic_ios< _CharT, _Traits >::__num_get_type [inherited]

These are non-standard types.

Definition at line 91 of file basic_ios.h.

4.301.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.301.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.301.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.301.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.301.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.301.3 Member Enumeration Documentation

4.301.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.301.4 Constructor & Destructor Documentation

4.301.4.1 template<typename _CharT, typename _Traits> std::basic_ofstream< _CharT, _Traits >::basic_ofstream ( ) [inline]

Default constructor.

Initializes `sb` using its default constructor, and passes `&sb` to the base class initializer. Does not open any files (you haven't given it a filename to open).

Definition at line 779 of file fstream.

References std::basic_ios< _CharT, _Traits >::init().

4.301.4.2 template<typename _CharT, typename _Traits> std::basic_ofstream< _CharT, _Traits >::basic_ofstream (const char * __s, ios_base::openmode __mode = ios_base::out) [inline], [explicit]

Create an output file stream.

Parameters

__s	Null terminated string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

`ios_base::out` is automatically included in *__mode*.

Definition at line 790 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_ofstream< _CharT, _Traits >::open().

4.301.4.3 template<typename _CharT, typename _Traits> std::basic_ofstream< _CharT, _Traits >::basic_ofstream (const std::string & __s, ios_base::openmode __mode = ios_base::out) [inline], [explicit]

Create an output file stream.

Parameters

__s	std::string specifying the filename.
__mode	Open file in specified mode (see std::ios_base).

`ios_base::out` is automatically included in *__mode*.

Definition at line 825 of file fstream.

References std::basic_ios< _CharT, _Traits >::init(), and std::basic_ofstream< _CharT, _Traits >::open().

4.301.4.4 template<typename _CharT, typename _Traits> std::basic_ofstream< _CharT, _Traits >::~basic_ofstream ( ) [inline]

The destructor does nothing.

The file is closed by the filebuf object, not the formatting stream.

Definition at line 862 of file fstream.

4.301.5 Member Function Documentation

4.301.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.301.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * __s, streamsize __n) [inline], [inherited]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.301.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.301.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.301.5.5 template<typename _CharT, typename _Traits> void std::basic_ofstream< _CharT, _Traits >::close ( ) [inline]

Close the file.

Calls `std::basic_filebuf::close()`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 993 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::close(), std::ios_base::failbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.6 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & *__rhs*) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.301.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.301.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.301.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate __except) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.301.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.301.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.301.5.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.301.5.13 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.301.5.14 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.301.5.15 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( ) [inherited]

Synchronizing the stream buffer.

Returns

*this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.16 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.301.5.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.301.5.18 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & *__loc*) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.301.5.19 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.301.5.20 template<typename _CharT, typename _Traits> bool std::basic_ofstream< _CharT, _Traits >::is_open ( ) [inline]

Wrapper to test for an open file.

Returns

`rdbuf()->is_open()`

Definition at line 903 of file fstream.

References std::basic_filebuf< _CharT, _Traits >::is_open().

4.301.5.21 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.301.5.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c,* char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional l10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.301.5.23 template<typename _CharT, typename _Traits> void std::basic_ofstream< _CharT, _Traits >::open (const char * __s, ios_base::openmode __mode = ios_base::out) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(__s,__mode|out)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 921 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::basic_filebuf< _CharT, _Traits >::open(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::setstate().

Referenced by std::basic_ofstream< _CharT, _Traits >::basic_ofstream().

4.301.5.24 template<typename _CharT, typename _Traits> void std::basic_ofstream< _CharT, _Traits >::open (const std::string & __s, ios_base::openmode __mode = ios_base::out) [inline]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Calls `std::basic_filebuf::open(s,mode|out)`. If that function fails, `failbit` is set in the stream's error state.

Definition at line 960 of file fstream.

References std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::failbit, std::basic_filebuf< _CharT, _Traits >::open(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.301.5.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.301.5.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.301.5.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.301.5.29 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.301.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.301.5.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.301.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.301.5.33 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.301.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.301.5.35 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.301.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.301.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.301.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.301.5.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.301.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.301.5.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.301.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * __p) [inline], [inherited]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.301.5.43 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * *__sb*) [inherited]

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from `__sb` and inserted into `*this` until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from `__sb`, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.44 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.301.5.45 streamsize std::ios_base::precision (streamsize *__prec*) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.301.5.46 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c) [inherited]

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.47 void*& std::ios_base::pword (int __ix) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.301.5.48 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * __sb) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.301.5.49 template<typename _CharT, typename _Traits> __filebuf_type* std::basic_ofstream< _CharT, _Traits >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_filebuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 895 of file fstream.

4.301.5.50 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.301.5.51 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.301.5.52 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*) [inherited]

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.53 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.301.5.54 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.301.5.55 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* & *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.301.5.56 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline],[inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.301.5.57 static bool std::ios_base::sync_with_stdio (bool *__sync* = true) [static],[inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.301.5.58 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( ) [inherited]

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.301.5.59 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.301.5.60 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.301.5.61 void std::ios_base::unsetf (fmtflags __mask) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.301.5.62 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char __c) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.301.5.63 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.301.5.64 streamsize std::ios_base::width (streamsize __wide) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.301.5.65 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * __s, streamsize __n) [inherited]

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.301.5.66 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.301.6 Member Data Documentation

4.301.6.1 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.301.6.2 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.301.6.3 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.301.6.4 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.301.6.5 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.301.6.6 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.301.6.7 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.301.6.8 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.301.6.9 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.301.6.10 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.301.6.11 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.301.6.12 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.301.6.13 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.301.6.14 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.301.6.15 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.301.6.16 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.301.6.17 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.301.6.18 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.301.6.19 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.301.6.20 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.301.6.21 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.301.6.22 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.301.6.23 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.301.6.24 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.301.6.25 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.301.6.26 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.301.6.27 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.301.6.28 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.301.6.29 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.301.6.30 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.301.6.31 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following file:

- fstream

4.302 std::basic_ostream< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_ostream< _CharT, _Traits >:

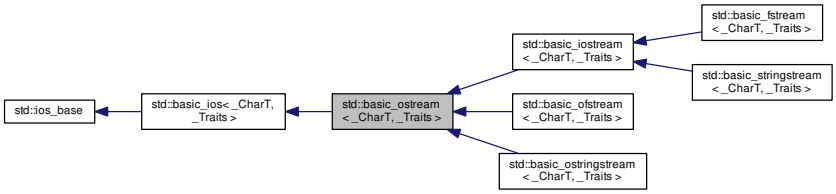

Classes

- class sentry

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream< _CharT, _Traits > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(* event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef _Traits::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef _Traits::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef _Traits::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > __num_get_type

Public Member Functions

- basic_ostream (__streambuf_type *__sb)
- virtual ~basic_ostream ()
- const locale & _M_getloc () const
- template<typename _ValueT >
  basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- locale getloc () const
- bool good () const
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf () const
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- pos_type tellp ()
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))

- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield

- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- **basic_ostream** (basic_iostream< _CharT, _Traits > &)
- **basic_ostream** (const basic_ostream &)=delete
- **basic_ostream** (basic_ostream &&__rhs)
- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- basic_ostream & **operator=** (const basic_ostream &)=delete
- basic_ostream & **operator=** (basic_ostream &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT, _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

Friends

- class **sentry**

4.302.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_ostream< _CharT, _Traits >

Template class basic_ostream.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This is the base class for all output streams. It provides text formatting of all builtin types, and communicates with any class derived from basic_streambuf to do the actual output.

Definition at line 86 of file iosfwd.

4.302.2 Member Typedef Documentation

4.302.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_get<_CharT, istreambuf_iterator<_CharT, _Traits>> std::basic_ios< _CharT, _Traits >::__num_get_type [inherited]

These are non-standard types.

Definition at line 91 of file basic_ios.h.

4.302.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.302.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.302.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.302.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.302.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.302.3 Member Enumeration Documentation

4.302.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.302.4 Constructor & Destructor Documentation

4.302.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ostream< _CharT, _Traits >::basic_ostream (__streambuf_type * __sb) [inline],[explicit]

Base constructor.

This ctor is almost never called by the user directly, rather from derived classes' initialization lists, which pass a pointer to their own stream buffer.

Definition at line 84 of file ostream.

4.302.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual std::basic_ostream< _CharT, _Traits >::~basic_ostream ( ) [inline],[virtual]

Base destructor.

This does very little apart from providing a virtual base dtor.

Definition at line 93 of file ostream.

4.302.5 Member Function Documentation

4.302.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline],[inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.302.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * __s, streamsize __n) [inline]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.302.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline],[inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.302.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.302.5.5 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & __rhs) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.302.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.302.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.302.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.302.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.302.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.302.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.302.5.12 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.302.5.13 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.302.5.14 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( )

Synchronizing the stream buffer.

Returns

*this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.302.5.15 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.302.5.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.302.5.17 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & *__loc*) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.302.5.18 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.302.5.19 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.302.5.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.302.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.302.5.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.302.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.302.5.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.302.5.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) *__pf*) [inline]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.302.5.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.302.5.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.302.5.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.302.5.29 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n)

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.302.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.302.5.31 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int __n)

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.302.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.302.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream<_CharT, _Traits >::operator<< (long long __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.302.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream<_CharT, _Traits >::operator<< (unsigned long long __n) [inline]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.302.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream<_CharT, _Traits >::operator<< (double __f) [inline]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.302.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.302.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.302.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * __p) [inline]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.302.5.39 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * __sb)

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from `__sb` and inserted into `*this` until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from __sb, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.302.5.40 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.302.5.41 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.302.5.42 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c)

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.302.5.43 void*& std::ios_base::pword (int __ix) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.302.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::rdbuf ( ) const [inline], [inherited]

Accessing the underlying buffer.

Returns

The current stream buffer.

This does not change the state of the stream.

Definition at line 321 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::tr2::operator>>(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.302.5.45 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.302.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.302.5.47 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.302.5.48 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*)

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.302.5.49 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off,* ios_base::seekdir *__dir*)

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.302.5.50 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.302.5.51 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* & *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.302.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.302.5.53 static bool std::ios_base::sync_with_stdio (bool *__sync* = `true`) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.302.5.54 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( )

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.302.5.55 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.302.5.56 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.302.5.57 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.302.5.58 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char __c) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_-istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.302.5.59 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std-::operator>>().

4.302.5.60 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.302.5.61 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * *__s*, streamsize *__n*)

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.302.5.62 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.302.6 Member Data Documentation

4.302.6.1 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of setf.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.302.6.2 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.302.6.3 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.302.6.4 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.302.6.5 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.302.6.6 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.302.6.7 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.302.6.8 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.302.6.9 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.302.6.10 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.302.6.11 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.302.6.12 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.302.6.13 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.302.6.14 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.302.6.15 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.302.6.16 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.302.6.17 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.302.6.18 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.302.6.19 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.302.6.20 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.302.6.21 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.302.6.22 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.302.6.23 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.302.6.24 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.302.6.25 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.302.6.26 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.302.6.27 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.302.6.28 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.302.6.29 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.302.6.30 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.302.6.31 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- ostream
- ostream.tcc

4.303 std::basic_ostringstream< _CharT, _Traits, _Alloc > Class Template Reference

Inheritance diagram for std::basic_ostringstream< _CharT, _Traits, _Alloc >:

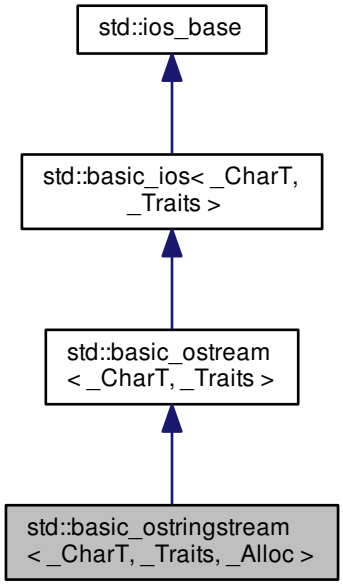

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream < char_type, traits_type > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_string< _CharT, _Traits, _Alloc > **__string_type**
- typedef basic_stringbuf < _CharT, _Traits, _Alloc > **__stringbuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _Alloc **allocator_type**

- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(* event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > __num_get_type

Public Member Functions

- basic_ostringstream ()
- basic_ostringstream (ios_base::openmode __mode)
- basic_ostringstream (const __string_type &__str, ios_base::openmode __mode=ios_base::out)
- **basic_ostringstream** (const basic_ostringstream &)=delete
- **basic_ostringstream** (basic_ostringstream &&__rhs)
- ~basic_ostringstream ()
- const locale & _M_getloc () const
- template<typename _ValueT > basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)
- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- locale getloc () const
- bool good () const
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- basic_ostringstream & **operator=** (const basic_ostringstream &)=delete
- basic_ostringstream & **operator=** (basic_ostringstream &&__rhs)
- streamsize precision () const

- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT, _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __stringbuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- __string_type str () const
- void str (const __string_type &__s)
- void **swap** (basic_ostringstream &__rhs)
- pos_type tellp ()
- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))
- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

- operator bool () const
- bool operator! () const

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT,
  _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.303.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>>class std::basic_ostringstream< _CharT, _Traits, _Alloc >

Controlling output for std::string.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.
_Alloc	Allocator type, defaults to allocator<_CharT>.

This class supports writing to objects of type std::basic_string, using the inherited functions from std::basic_ostream. To control the associated sequence, an instance of std::basic_stringbuf is used, which this page refers to as `sb`.

Definition at line 104 of file iosfwd.

4.303.2 Member Typedef Documentation

4.303.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_get<_CharT, istreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_get_type [inherited]

These are non-standard types.

Definition at line 91 of file basic_ios.h.

4.303.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.303.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific
- showbase

- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.303.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.303.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.303.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.303.3 Member Enumeration Documentation

4.303.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.303.4 Constructor & Destructor Documentation

4.303.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream ( ) [inline]

Default constructor starts with an empty string buffer.

Initializes sb using mode|out, and passes &sb to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 583 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.303.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream (ios_base::openmode *__mode*) [inline], [explicit]

Starts with an empty string buffer.

Parameters

__mode	Whether the buffer can read, or write, or both.

ios_base::out is automatically included in *mode*.

Initializes sb using mode|out, and passes &sb to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 600 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.303.4.3 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream (const __string_type & *__str,* ios_base::openmode *__mode* = ios_base::out) [inline],[explicit]

Starts with an existing string buffer.

Parameters

__str	A string to copy as a starting buffer.
__mode	Whether the buffer can read, or write, or both.

`ios_base::out` is automatically included in *mode*.

Initializes `sb` using *str* and `mode|out`, and passes `&sb` to the base class initializer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 618 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.303.4.4 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_ostringstream< _CharT, _Traits, _Alloc >::~basic_ostringstream ( ) [inline]

The destructor does nothing.

The buffer is deallocated by the stringbuf object, not the formatting stream.

Definition at line 629 of file sstream.

4.303.5 Member Function Documentation

4.303.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.303.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * __s, streamsize __n) [inline], [inherited]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.303.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.303.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.303.5.5 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & __rhs) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.303.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.303.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.303.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.303.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.303.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.303.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.303.5.12 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.303.5.13 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.303.5.14 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( ) [inherited]

Synchronizing the stream buffer.

Returns

*this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.303.5.15 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.303.5.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.303.5.17 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & *__loc*) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.303.5.18 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic-_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >-::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.303.5.19 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.303.5.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.303.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.303.5.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.303.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.303.5.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.303.5.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.303.5.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.303.5.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.303.5.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.303.5.29 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.303.5.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.303.5.31 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.303.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.303.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.303.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.303.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.303.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.303.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.303.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * __p) [inline], [inherited]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.303.5.39 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * __sb) [inherited]

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from `__sb` and inserted into `*this` until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from __sb, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.303.5.40 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.303.5.41 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.303.5.42 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c) [inherited]

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.303.5.43 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.303.5.44 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.303.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __stringbuf_type* std::basic_ostringstream< _CharT, _Traits, _Alloc >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_stringbuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 669 of file sstream.

4.303.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.303.5.47 void std::ios_base::register_callback (event_callback *__fn*, int *__index*) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.303.5.48 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*) [inherited]

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.303.5.49 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off*, ios_base::seekdir *__dir*) [inherited]

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.303.5.50 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.303.5.51 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* & *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.303.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline],[inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.303.5.53 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __string_type std::basic_ostringstream< _CharT, _Traits, _Alloc >::str ( ) const [inline]

Copying out the string buffer.

Returns

`rdbuf()->str()`

Definition at line 677 of file sstream.

Referenced by std::__detail::operator<<(), and std::operator<<().

4.303.5.54 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> void std::basic_ostringstream< _CharT, _Traits, _Alloc >::str (const __string_type & *__s*) [inline]

Setting a new buffer.

Parameters

__s	The string to use as a new sequence.

Calls `rdbuf()->str(s)`.

Definition at line 687 of file sstream.

4.303.5.55 static bool std::ios_base::sync_with_stdio (bool *__sync* = `true`) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.303.5.56 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( ) [inherited]

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.303.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.303.5.58 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.303.5.59 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.303.5.60 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.303.5.61 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.303.5.62 streamsize std::ios_base::width (streamsize *__wide*) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.303.5.63 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * __s, streamsize __n) [inherited]

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.303.5.64 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.303.6 Member Data Documentation

4.303.6.1 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.303.6.2 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.303.6.3 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.303.6.4 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.303.6.5 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.303.6.6 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.303.6.7 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.303.6.8 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.303.6.9 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.303.6.10 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.303.6.11 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.303.6.12 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.303.6.13 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.303.6.14 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.303.6.15 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.303.6.16 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.303.6.17 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.303.6.18 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.303.6.19 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.303.6.20 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.303.6.21 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.303.6.22 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.303.6.23 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.303.6.24 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.303.6.25 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.303.6.26 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.303.6.27 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.303.6.28 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.303.6.29 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.303.6.30 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.303.6.31 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- sstream

4.304 std::basic_regex< typename, typename > Class Template Reference

Public Types

- typedef regex_constants::syntax_option_type **flag_type**
- typedef traits_type::locale_type **locale_type**
- typedef traits_type::string_type **string_type**
- typedef _Rx_traits **traits_type**
- typedef _Ch_type **value_type**

Public Member Functions

- basic_regex ()
- basic_regex (const _Ch_type *__p, flag_type __f=ECMAScript)
- basic_regex (const _Ch_type *__p, std::size_t __len, flag_type __f=ECMAScript)
- basic_regex (const basic_regex &__rhs)=default
- basic_regex (basic_regex &&__rhs) noexcept=default
- template<typename _Ch_traits , typename _Ch_alloc >
  basic_regex (const std::basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, flag_type __f=ECMAScript)
- template<typename _FwdIter >
  basic_regex (_FwdIter __first, _FwdIter __last, flag_type __f=ECMAScript)
- basic_regex (initializer_list< _Ch_type > __l, flag_type __f=ECMAScript)
- ~basic_regex ()
- basic_regex & assign (const basic_regex &__rhs)
- basic_regex & assign (basic_regex &&__rhs) noexcept
- basic_regex & assign (const _Ch_type *__p, flag_type __flags=ECMAScript)
- basic_regex & assign (const _Ch_type *__p, size_t __len, flag_type __flags=ECMAScript)
- template<typename _Ch_traits , typename _Alloc >
  basic_regex & assign (const basic_string< _Ch_type, _Ch_traits, _Alloc > &__s, flag_type __flags=ECMAScript)
- template<typename _InputIterator >
  basic_regex & assign (_InputIterator __first, _InputIterator __last, flag_type __flags=ECMAScript)
- basic_regex & assign (initializer_list< _Ch_type > __l, flag_type __flags=ECMAScript)
- flag_type flags () const
- locale_type getloc () const
- locale_type imbue (locale_type __loc)
- unsigned int mark_count () const
- basic_regex & operator= (const basic_regex &__rhs)
- basic_regex & operator= (basic_regex &&__rhs) noexcept
- basic_regex & operator= (const _Ch_type *__p)
- basic_regex & operator= (initializer_list< _Ch_type > __l)
- template<typename _Ch_traits , typename _Alloc >
  basic_regex & operator= (const basic_string< _Ch_type, _Ch_traits, _Alloc > &__s)
- void swap (basic_regex &__rhs)

Static Public Attributes

Constants

std [28.8.1](1)

- static constexpr flag_type **icase**
- static constexpr flag_type **nosubs**
- static constexpr flag_type **optimize**
- static constexpr flag_type **collate**
- static constexpr flag_type **ECMAScript**
- static constexpr flag_type **basic**
- static constexpr flag_type **extended**
- static constexpr flag_type **awk**
- static constexpr flag_type **grep**
- static constexpr flag_type **egrep**

Friends

- template<typename _Bp , typename _Ap , typename _Cp , typename _Rp , __detail::_RegexExecutorPolicy , bool >
  bool **__detail::__regex_algo_impl** (_Bp, _Bp, match_results< _Bp, _Ap > &, const basic_regex< _Cp, _Rp > &, regex_constants::match_flag_type)
- template<typename , typename , typename , bool >
  class **__detail::_Executor**

Related Functions

(Note that these are not member functions.)

- template<typename _Ch_type , typename _Rx_traits >
  void swap (basic_regex< _Ch_type, _Rx_traits > &__lhs, basic_regex< _Ch_type, _Rx_traits > &__rhs)

4.304.1 Detailed Description

template<typename, typename>class std::basic_regex< typename, typename >

Objects of specializations of this class represent regular expressions constructed from sequences of character type `_Ch_type`.

Storage for the regular expression is allocated and deallocated as necessary by the member functions of this class.

Definition at line 36 of file regex.h.

4.304.2 Constructor & Destructor Documentation

4.304.2.1 template<typename , typename > std::basic_regex< typename, typename >::basic_regex ( ) [inline]

Constructs a basic regular expression that does not match any character sequence.

Definition at line 423 of file regex.h.

Referenced by std::basic_regex< typename, typename >::assign().

4.304.2.2 template<typename , typename > std::basic_regex< typename, typename >::basic_regex (const _Ch_type * __p, flag_type __f = ECMAScript) [inline], [explicit]

Constructs a basic regular expression from the sequence [__p, __p + char_traits<_Ch_type>::length(__p)) interpreted according to the flags in __f.

Parameters

__p	A pointer to the start of a C-style null-terminated string containing a regular expression.
__f	Flags indicating the syntax rules and options.

Exceptions

regex_error	if __p is not a valid regular expression.

Definition at line 439 of file regex.h.

4.304.2.3 template<typename , typename > std::basic_regex< typename, typename >::basic_regex (const _Ch_type * __p, std::size_t __len, flag_type __f = ECMAScript) [inline]

Constructs a basic regular expression from the sequence [p, p + len) interpreted according to the flags in f.

Parameters

__p	A pointer to the start of a string containing a regular expression.
__len	The length of the string containing the regular expression.
__f	Flags indicating the syntax rules and options.

Exceptions

regex_error	if __p is not a valid regular expression.

Definition at line 455 of file regex.h.

4.304.2.4 template<typename , typename > std::basic_regex< typename, typename >::basic_regex (const basic_regex< typename, typename > & __rhs) [default]

Copy-constructs a basic regular expression.

Parameters

__rhs	A regex object.

4.304.2.5 template<typename , typename > std::basic_regex< typename, typename >::basic_regex (basic_regex< typename, typename > && __rhs) [default], [noexcept]

Move-constructs a basic regular expression.

Parameters

__rhs	A regex object.

4.304.2.6 template<typename , typename > template<typename _Ch_traits , typename _Ch_alloc > std::basic_regex< typename, typename >::basic_regex (const std::basic_string< _Ch_type, _Ch_traits, _Ch_alloc > & __s, flag_type __f = ECMAScript) [inline], [explicit]

Constructs a basic regular expression from the string s interpreted according to the flags in f.

Parameters

__s	A string containing a regular expression.

__f	Flags indicating the syntax rules and options.

Exceptions

regex_error	if __s is not a valid regular expression.

Definition at line 485 of file regex.h.

4.304.2.7 template<typename , typename > template<typename _FwdIter > std::basic_regex< typename, typename >::basic_regex (_FwdIter *__first*, _FwdIter *__last*, flag_type *__f* = ECMAScript) [inline]

Constructs a basic regular expression from the range [first, last) interpreted according to the flags in f.

Parameters

__first	The start of a range containing a valid regular expression.
__last	The end of a range containing a valid regular expression.
__f	The format flags of the regular expression.

Exceptions

regex_error	if [__first, __last) is not a valid regular expression.

Definition at line 505 of file regex.h.

4.304.2.8 template<typename , typename > std::basic_regex< typename, typename >::basic_regex (initializer_list< _Ch_type > *__l*, flag_type *__f* = ECMAScript) [inline]

Constructs a basic regular expression from an initializer list.

Parameters

__l	The initializer list.
__f	The format flags of the regular expression.

Exceptions

regex_error	if __l is not a valid regular expression.

Definition at line 518 of file regex.h.

4.304.2.9 template<typename , typename > std::basic_regex< typename, typename >::~basic_regex ( ) [inline]

Destroys a basic regular expression.

Definition at line 525 of file regex.h.

4.304.3 Member Function Documentation

4.304.3.1 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::assign (const basic_regex< typename, typename > & *__rhs*) [inline]

the real assignment operator.

Parameters

__rhs	Another regular expression object.

Definition at line 583 of file regex.h.

References std::basic_regex< typename, typename >::swap().

Referenced by std::basic_regex< typename, typename >::assign(), and std::basic_regex< typename, typename >-::operator=().

4.304.3.2 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::assign (basic_regex< typename, typename > && *__rhs*) [inline], [noexcept]

The move-assignment operator.

Parameters

__rhs	Another regular expression object.

Definition at line 596 of file regex.h.

References std::move(), and std::basic_regex< typename, typename >::swap().

4.304.3.3 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::assign (const _Ch_type * *__p,* flag_type *__flags* = ECMAScript) [inline]

Assigns a new regular expression to a regex object from a C-style null-terminated string containing a regular expression pattern.

Parameters

__p	A pointer to a C-style null-terminated string containing a regular expression pattern.
__flags	Syntax option flags.

Exceptions

regex_error	if __p does not contain a valid regular expression pattern interpreted according to __flags. If regex_error is thrown, *this remains unchanged.

Definition at line 617 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.4 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::assign (const _Ch_type * *__p,* size_t *__len,* flag_type *__flags* = ECMAScript) [inline]

Assigns a new regular expression to a regex object from a C-style string containing a regular expression pattern.

Parameters

__p	A pointer to a C-style string containing a regular expression pattern.
__len	The length of the regular expression pattern string.
__flags	Syntax option flags.

Exceptions

regex_error	if p does not contain a valid regular expression pattern interpreted according to __flags. If regex_error is thrown, *this remains unchanged.

Definition at line 636 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.5 template<typename , typename > template<typename _Ch_traits , typename _Alloc > basic_regex& std::basic_regex< typename, typename >::assign (const basic_string< _Ch_type, _Ch_traits, _Alloc > & *__s,* flag_type *__flags* = ECMAScript) [inline]

Assigns a new regular expression to a regex object from a string containing a regular expression pattern.

Parameters

__s	A string containing a regular expression pattern.
__flags	Syntax option flags.

Exceptions

regex_error	if __s does not contain a valid regular expression pattern interpreted according to __flags. If regex_error is thrown, *this remains unchanged.

Definition at line 652 of file regex.h.

References std::basic_regex< typename, typename >::assign(), std::basic_regex< typename, typename >::basic_regex(), std::basic_string< _CharT, _Traits, _Alloc >::data(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

4.304.3.6 template<typename , typename > template<typename _InputIterator > basic_regex& std::basic_regex< typename, typename >::assign (_InputIterator *__first*, _InputIterator *__last*, flag_type *__flags* = ECMAScript) [inline]

Assigns a new regular expression to a regex object.

Parameters

__first	The start of a range containing a valid regular expression.
__last	The end of a range containing a valid regular expression.
__flags	Syntax option flags.

Exceptions

regex_error	if p does not contain a valid regular expression pattern interpreted according to __flags. If regex_error is thrown, the object remains unchanged.

Definition at line 674 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.7 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::assign (initializer_list< _Ch_type > *__l*, flag_type *__flags* = ECMAScript) [inline]

Assigns a new regular expression to a regex object.

Parameters

__l	An initializer list representing a regular expression.
__flags	Syntax option flags.

Exceptions

regex_error	if __l does not contain a valid regular expression pattern interpreted according to __flags. If regex_error is thrown, the object remains unchanged.

Definition at line 690 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.8 template<typename , typename > flag_type std::basic_regex< typename, typename >::flags ( ) const [inline]

Gets the flags used to construct the regular expression or in the last call to assign().

Definition at line 711 of file regex.h.

4.304.3.9 template<typename , typename > locale_type std::basic_regex< typename, typename >::getloc ( ) const [inline]

Gets the locale currently imbued in the regular expression object.

Definition at line 733 of file regex.h.

4.304.3.10 template<typename , typename > locale_type std::basic_regex< typename, typename >::imbue (locale_type __loc) [inline]

Imbues the regular expression object with the given locale.

Parameters

__loc	A locale.

Definition at line 721 of file regex.h.

4.304.3.11 template<typename , typename > unsigned int std::basic_regex< typename, typename >::mark_count ( ) const [inline]

Gets the number of marked subexpressions within the regular expression.

Definition at line 699 of file regex.h.

4.304.3.12 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::operator= (const basic_regex< typename, typename > & __rhs) [inline]

Assigns one regular expression to another.

Definition at line 532 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.13 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::operator= (basic_regex< typename, typename > && __rhs) [inline], [noexcept]

Move-assigns one regular expression to another.

Definition at line 539 of file regex.h.

References std::basic_regex< typename, typename >::assign(), and std::move().

4.304.3.14 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::operator= (const _Ch_type * __p) [inline]

Replaces a regular expression with a new one constructed from a C-style null-terminated string.

Parameters

__p	A pointer to the start of a null-terminated C-style string containing a regular expression.

Definition at line 550 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.15 template<typename , typename > basic_regex& std::basic_regex< typename, typename >::operator= (initializer_list< _Ch_type > __l) [inline]

Replaces a regular expression with a new one constructed from an initializer list.

Parameters

__l	The initializer list.

Exceptions

regex_error	if `__l` is not a valid regular expression.

Definition at line 562 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.16 template<typename , typename > template<typename _Ch_traits , typename _Alloc > basic_regex& std::basic_regex< typename, typename >::operator= (const basic_string< _Ch_type, _Ch_traits, _Alloc > & *__s*) [inline]

Replaces a regular expression with a new one constructed from a string.

Parameters

__s	A pointer to a string containing a regular expression.

Definition at line 573 of file regex.h.

References std::basic_regex< typename, typename >::assign().

4.304.3.17 template<typename , typename > void std::basic_regex< typename, typename >::swap (basic_regex< typename, typename > & *__rhs*) [inline]

Swaps the contents of two regular expression objects.

Parameters

__rhs	Another regular expression object.

Definition at line 743 of file regex.h.

Referenced by std::basic_regex< typename, typename >::assign().

The documentation for this class was generated from the following file:

- regex.h

4.305 std::basic_streambuf< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::basic_streambuf< _CharT, _Traits >:

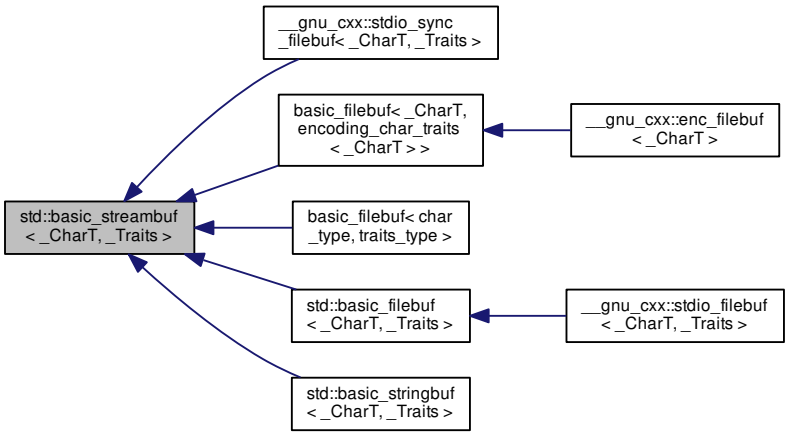

Public Types

- typedef _CharT char_type
- typedef _Traits traits_type
- typedef traits_type::int_type int_type
- typedef traits_type::pos_type pos_type
- typedef traits_type::off_type off_type

- typedef basic_streambuf < char_type, traits_type > __streambuf_type

Public Member Functions

- virtual ~basic_streambuf ()
- locale getloc () const
- streamsize in_avail ()
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- int_type sungetc ()

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)

- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- basic_streambuf ()
- **basic_streambuf** (const basic_streambuf &)
- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- basic_streambuf & **operator=** (const basic_streambuf &)
- virtual int_type overflow (int_type __c=traits_type::eof())
- virtual int_type pbackfail (int_type __c=traits_type::eof())
- void pbump (int __n)
- virtual pos_type seekoff (off_type, ios_base::seekdir, ios_base::openmode=ios_base::in|ios_base::out)
- virtual pos_type seekpos (pos_type, ios_base::openmode=ios_base::in|ios_base::out)
- virtual basic_streambuf < char_type, _Traits > * setbuf (char_type *, streamsize)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- virtual int sync ()
- virtual int_type uflow ()
- virtual int_type underflow ()
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- locale _M_buf_locale
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end

Friends

- template<bool _IsMove, typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, _CharT2 * >::__type **__copy_move_a2** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _-
  CharT2 >, _CharT2 *)
- streamsize **__copy_streambufs_eof** (basic_streambuf *, basic_streambuf *, bool &)
- template<typename _CharT2 , typename _Distance >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, void >::__type **advance** (istreambuf_iterator< _CharT2 > &, _Distance)
- class **basic_ios< char_type, traits_type >**
- class **basic_istream< char_type, traits_type >**
- class **basic_ostream< char_type, traits_type >**
- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, istreambuf_iterator
  < _CharT2 > >::__type **find** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _CharT2 >, const _CharT2
  &)
- template<typename _CharT2 , typename _Traits2 , typename _Alloc >
  basic_istream< _CharT2,
  _Traits2 > & **getline** (basic_istream< _CharT2, _Traits2 > &, basic_string< _CharT2, _Traits2, _Alloc > &,
  _CharT2)
- class **istreambuf_iterator< char_type, traits_type >**
- template<typename _CharT2 , typename _Traits2 >
  basic_istream< _CharT2,
  _Traits2 > & **operator>>** (basic_istream< _CharT2, _Traits2 > &, _CharT2 *)
- template<typename _CharT2 , typename _Traits2 , typename _Alloc >
  basic_istream< _CharT2,
  _Traits2 > & **operator>>** (basic_istream< _CharT2, _Traits2 > &, basic_string< _CharT2, _Traits2, _Alloc >
  &)
- class **ostreambuf_iterator< char_type, traits_type >**

4.305.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_streambuf< _CharT, _Traits >

The actual work of input and output (interface).

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.

This is a base class. Derived stream buffers each control a pair of character sequences: one for input, and one for output.

Section [27.5.1] of the standard describes the requirements and behavior of stream buffer classes. That section (three paragraphs) is reproduced here, for simplicity and accuracy.

1. Stream buffers can impose various constraints on the sequences they control. Some constraints are:
   - The controlled input sequence can be not readable.

- The controlled output sequence can be not writable.
- The controlled sequences can be associated with the contents of other representations for character sequences, such as external files.
- The controlled sequences can support operations *directly* to or from associated sequences.
- The controlled sequences can impose limitations on how the program can read characters from a sequence, write characters to a sequence, put characters back into an input sequence, or alter the stream position.

2. Each sequence is characterized by three pointers which, if non-null, all point into the same `charT` array object. The array object represents, at any moment, a (sub)sequence of characters from the sequence. Operations performed on a sequence alter the values stored in these pointers, perform reads and writes directly to or from associated sequences, and alter *the stream position* and conversion state as needed to maintain this subsequence relationship. The three pointers are:

   - the *beginning pointer*, or lowest element address in the array (called *xbeg* here);
   - the *next pointer*, or next element address that is a current candidate for reading or writing (called *xnext* here);
   - the *end pointer*, or first element address beyond the end of the array (called *xend* here).

3. The following semantic constraints shall always apply for any set of three pointers for a sequence, using the pointer names given immediately above:

   - If *xnext* is not a null pointer, then *xbeg* and *xend* shall also be non-null pointers into the same `charT` array, as described above; otherwise, *xbeg* and *xend* shall also be null.
   - If *xnext* is not a null pointer and *xnext* < *xend* for an output sequence, then a *write position* is available. In this case, ∗*xnext* shall be assignable as the next element to write (to put, or to store a character value, into the sequence).
   - If *xnext* is not a null pointer and *xbeg* < *xnext* for an input sequence, then a *putback position* is available. In this case, *xnext*[-1] shall have a defined value and is the next (preceding) element to store a character that is put back into the input sequence.
   - If *xnext* is not a null pointer and *xnext*< *xend* for an input sequence, then a *read position* is available. In this case, ∗*xnext* shall have a defined value and is the next element to read (to get, or to obtain a character value, from the sequence).

Definition at line 80 of file iosfwd.

4.305.2 Member Typedef Documentation

4.305.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef basic_streambuf<char_type, traits_type> std::basic_streambuf< _CharT, _Traits >::__streambuf_type

This is a non-standard type.

Definition at line 140 of file streambuf.

4.305.2.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _CharT std::basic_streambuf< _CharT, _Traits >::char_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 131 of file streambuf.

4.305.2.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef traits_type::int_type std::basic_streambuf< _CharT, _Traits >::int_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 133 of file streambuf.

4.305.2.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef traits_type::off_type std::basic_streambuf< _CharT, _Traits >::off_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 135 of file streambuf.

4.305.2.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef traits_type::pos_type std::basic_streambuf< _CharT, _Traits >::pos_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 134 of file streambuf.

4.305.2.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits std::basic_streambuf< _CharT, _Traits >::traits_type

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 132 of file streambuf.

4.305.3 Constructor & Destructor Documentation

4.305.3.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual std::basic_streambuf< _CharT, _Traits >::~basic_streambuf ( ) [inline], [virtual]

Destructor deallocates no buffer space.

Definition at line 204 of file streambuf.

4.305.3.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_streambuf< _CharT, _Traits >::basic_streambuf ( ) [inline], [protected]

Base constructor.

Only called from derived constructors, and sets up all the buffer data to zero, including the pointers described in the basic_streambuf class description. Note that, as a result,

- the class starts with no read nor write positions available,
- this is not an error

Definition at line 470 of file streambuf.

4.305.4 Member Function Documentation

4.305.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.305.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.305.4.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.305.4.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.305.4.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.305.4.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.305.4.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual void std::basic_streambuf< _CharT, _Traits >::imbue (const locale & *__loc*) [inline], [protected], [virtual]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 583 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.305.4.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.305.4.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::overflow (int_type __c = traits_type::eof()) [inline], [protected], [virtual]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually *__c*, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if *__c* is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented in std::wbuffer_convert< _Codecvt, _Elem, _Tr >, std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, std::basic_stringbuf< _CharT, _Traits, _Alloc >, and __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 775 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.305.4.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::pbackfail (int_type __c = traits_type::eof()) [inline], [protected], [virtual]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, std::basic_stringbuf< _CharT, _Traits, _Alloc >, and __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 731 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.305.4.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.305.4.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.305.4.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.305.4.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & *__loc*) [inline]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.305.4.15 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.305.4.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.305.4.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline]

Entry points for derived buffer functions.

The public versions of pubfoo dispatch to the protected derived foo member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.305.4.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.305.4.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns uflow().

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.305.4.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual pos_type std::basic_streambuf< _CharT, _Traits >::seekoff (off_type , ios_base::seekdir , ios_base::openmode = ios_base::in | ios_base::out) [inline], [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a pos_type that represents an invalid stream position.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 609 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubseekoff().

4.305.4.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual pos_type std::basic_streambuf< _CharT, _Traits >::seekpos (pos_type , ios_base::openmode = ios_base::in | ios_base::out) [inline], [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 621 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubseekpos().

4.305.4.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual basic_streambuf<char_type,_Traits>* std::basic_streambuf< _CharT, _Traits >::setbuf (char_type *, streamsize) [inline], [protected], [virtual]

Manipulates the buffer.

Each derived class provides its own appropriate behavior. See the next-to-last paragraph of https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more on this function.

Note

Base class version does nothing, returns `this`.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 598 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubsetbuf().

4.305.4.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*) [inline], [protected]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.305.4.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.305.4.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.305.4.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * *__s*, streamsize *__n*) [inline]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.305.4.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual streamsize std::basic_streambuf< _CharT, _Traits >::showmanyc ( ) [inline], [protected], [virtual]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 656 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::in_avail().

4.305.4.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.305.4.29 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type __c) [inline]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.305.4.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type __c) [inline]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.305.4.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * *__s*, streamsize *__n*) [inline]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.305.4.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.305.4.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int std::basic_streambuf< _CharT, _Traits >::sync (void) [inline], [protected], [virtual]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented in std::wbuffer_convert< _Codecvt, _Elem, _Tr >, std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 634 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubsync().

4.305.4.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented in __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 707 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc().

4.305.4.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::underflow ( ) [inline], [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented in std::wbuffer_convert< _Codecvt, _Elem, _Tr >, std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, std::basic_stringbuf< _CharT, _Traits, _Alloc >, and __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 694 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sgetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.305.4.36 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 46 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sgetn().

4.305.4.37 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes *__s*[0] through *__s*[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 80 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sputn().

4.305.5 Member Data Documentation

4.305.5.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.305.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.305.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.305.5.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.305.5.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.305.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.305.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

The documentation for this class was generated from the following files:

- iosfwd
- streambuf
- streambuf.tcc

4.306 __gnu_debug::basic_string< _CharT, _Traits, _Allocator > Class Template Reference

Inheritance diagram for __gnu_debug::basic_string< _CharT, _Traits, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < typename _Base::const_iterator, basic_string > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < typename _Base::iterator, basic_string > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Traits **traits_type**
- typedef _Traits::char_type **value_type**

Public Member Functions

- **basic_string** (const _Allocator &__a) noexcept
- **basic_string** (const basic_string &)=default
- **basic_string** (basic_string &&)=default
- **basic_string** (std::initializer_list< _CharT > __l, const _Allocator &__a=_Allocator())
- **basic_string** (_Base &&__base) noexcept
- **basic_string** (const _Base &__base)
- **basic_string** (const basic_string &__str, size_type __pos, size_type __n=_Base::npos, const _Allocator &__a=-_Allocator())
- **basic_string** (const _CharT *__s, size_type __n, const _Allocator &__a=_Allocator())
- **basic_string** (const _CharT *__s, const _Allocator &__a=_Allocator())
- **basic_string** (size_type __n, _CharT __c, const _Allocator &__a=_Allocator())

- template<typename _InputIterator >
  basic_string (_InputIterator __begin, _InputIterator __end, const _Allocator &__a=_Allocator())
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- basic_string & **append** (const basic_string &__str)
- basic_string & **append** (const basic_string &__str, size_type __pos, size_type __n)
- basic_string & **append** (const _CharT *__s, size_type __n)
- basic_string & **append** (const _CharT *__s)
- basic_string & **append** (size_type __n, _CharT __c)
- template<typename _InputIterator >
  basic_string & **append** (_InputIterator __first, _InputIterator __last)
- basic_string & append (const basic_string &__str)
- basic_string & append (const basic_string &__str, size_type __pos, size_type __n=npos)
- basic_string & append (initializer_list< _CharT > __l)
- basic_string & **assign** (const basic_string &__x)
- basic_string & **assign** (basic_string &&__x) noexcept(noexcept(std::declval< _Base & >().assign(std::move(__x))))
- basic_string & **assign** (const basic_string &__str, size_type __pos, size_type __n)
- basic_string & **assign** (const _CharT *__s, size_type __n)
- basic_string & **assign** (const _CharT *__s)
- basic_string & **assign** (size_type __n, _CharT __c)
- template<typename _InputIterator >
  basic_string & **assign** (_InputIterator __first, _InputIterator __last)
- basic_string & **assign** (std::initializer_list< _CharT > __l)
- basic_string & assign (const basic_string &__str)
- basic_string & assign (basic_string &&__str) noexcept(allocator_traits< _Allocator >::is_always_equal::value)
- basic_string & assign (const basic_string &__str, size_type __pos, size_type __n=npos)
- const_reference at (size_type __n) const
- reference at (size_type __n)
- reference back ()
- const_reference back () const noexcept
- iterator **begin** ()
- const_iterator **begin** () const noexcept
- const _CharT * **c_str** () const noexcept
- size_type capacity () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** ()
- int **compare** (const basic_string &__str) const
- int **compare** (size_type __pos1, size_type __n1, const basic_string &__str) const
- int **compare** (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __n2) const
- int **compare** (const _CharT *__s) const
- int **compare** (size_type __pos1, size_type __n1, const _CharT *__s) const
- int **compare** (size_type __pos1, size_type __n1, const _CharT *__s, size_type __n2) const
- int compare (const basic_string &__str) const
- int compare (size_type __pos, size_type __n, const basic_string &__str) const

- int compare (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __n2=npos) const
- size_type **copy** (_CharT *__s, size_type __n, size_type __pos=0) const
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- const _CharT * **data** () const noexcept
- bool empty () const noexcept
- iterator **end** ()
- const_iterator **end** () const noexcept
- basic_string & **erase** (size_type __pos=0, size_type __n=_Base::npos)
- iterator **erase** (iterator __position)
- iterator **erase** (iterator __first, iterator __last)
- iterator erase (iterator __position)
- iterator erase (iterator __first, iterator __last)
- size_type **find** (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **find** (const _CharT *__s, size_type __pos=0) const
- size_type **find** (_CharT __c, size_type __pos=0) const noexcept
- size_type find (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find_first_not_of** (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find_first_not_of** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **find_first_not_of** (const _CharT *__s, size_type __pos=0) const
- size_type **find_first_not_of** (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_not_of (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find_first_of** (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find_first_of** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **find_first_of** (const _CharT *__s, size_type __pos=0) const
- size_type **find_first_of** (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_of (const basic_string &__str, size_type __pos=0) const noexcept
- size_type **find_last_not_of** (const basic_string &__str, size_type __pos=_Base::npos) const noexcept
- size_type **find_last_not_of** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **find_last_not_of** (const _CharT *__s, size_type __pos=_Base::npos) const
- size_type **find_last_not_of** (_CharT __c, size_type __pos=_Base::npos) const noexcept
- size_type find_last_not_of (const basic_string &__str, size_type __pos=npos) const noexcept
- size_type **find_last_of** (const basic_string &__str, size_type __pos=_Base::npos) const noexcept
- size_type **find_last_of** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **find_last_of** (const _CharT *__s, size_type __pos=_Base::npos) const
- size_type **find_last_of** (_CharT __c, size_type __pos=_Base::npos) const noexcept
- size_type find_last_of (const basic_string &__str, size_type __pos=npos) const noexcept
- reference front ()
- const_reference front () const noexcept
- allocator_type get_allocator () const noexcept
- basic_string & **insert** (size_type __pos1, const basic_string &__str)
- basic_string & **insert** (size_type __pos1, const basic_string &__str, size_type __pos2, size_type __n)
- basic_string & **insert** (size_type __pos, const _CharT *__s, size_type __n)
- basic_string & **insert** (size_type __pos, const _CharT *__s)
- basic_string & **insert** (size_type __pos, size_type __n, _CharT __c)
- iterator **insert** (__const_iterator __p, _CharT __c)
- iterator **insert** (const_iterator __p, size_type __n, _CharT __c)
- template<typename _InputIterator >
  iterator **insert** (__const_iterator __p, _InputIterator __first, _InputIterator __last)

- iterator **insert** (const_iterator __p, std::initializer_list< _CharT > __l)
- void insert (iterator __p, size_type __n, _CharT __c)
- void insert (iterator __p, _InputIterator __beg, _InputIterator __end)
- void insert (iterator __p, initializer_list< _CharT > __l)
- basic_string & insert (size_type __pos1, const basic_string &__str)
- basic_string & insert (size_type __pos1, const basic_string &__str, size_type __pos2, size_type __n=npos)
- iterator insert (iterator __p, _CharT __c)
- size_type length () const noexcept
- size_type max_size () const noexcept
- basic_string & **operator+=** (const basic_string &__str)
- basic_string & **operator+=** (const _CharT *__s)
- basic_string & **operator+=** (_CharT __c)
- basic_string & **operator+=** (std::initializer_list< _CharT > __l)
- basic_string & operator+= (const basic_string &__str)
- basic_string & **operator=** (const basic_string &)=default
- basic_string & **operator=** (basic_string &&)=default
- basic_string & **operator=** (const _CharT *__s)
- basic_string & **operator=** (_CharT __c)
- basic_string & **operator=** (std::initializer_list< _CharT > __l)
- const_reference **operator[]** (size_type __pos) const noexcept
- reference **operator[]** (size_type __pos)
- void **pop_back** ()
- void **push_back** (_CharT __c)
- reverse_iterator **rbegin** ()
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** ()
- const_reverse_iterator **rend** () const noexcept
- basic_string & **replace** (size_type __pos1, size_type __n1, const basic_string &__str)
- basic_string & **replace** (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __n2)
- basic_string & **replace** (size_type __pos, size_type __n1, const _CharT *__s, size_type __n2)
- basic_string & **replace** (size_type __pos, size_type __n1, const _CharT *__s)
- basic_string & **replace** (size_type __pos, size_type __n1, size_type __n2, _CharT __c)
- basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, const basic_string &__str)
- basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, const _CharT *__s, size_type __n)
- basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, const _CharT *__s)
- basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, size_type __n, _CharT __c)
- template<typename _InputIterator >
  basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, _InputIterator __j1, _InputIterator __j2)
- basic_string & **replace** (__const_iterator __i1, __const_iterator __i2, std::initializer_list< _CharT > __l)
- basic_string & replace (size_type __pos, size_type __n, const basic_string &__str)
- basic_string & replace (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __n2=npos)
- basic_string & replace (iterator __i1, iterator __i2, const basic_string &__str)
- basic_string & replace (iterator __i1, iterator __i2, const _CharT *__s, size_type __n)
- basic_string & replace (iterator __i1, iterator __i2, const _CharT *__s)
- basic_string & replace (iterator __i1, iterator __i2, size_type __n, _CharT __c)
- basic_string & replace (iterator __i1, iterator __i2, _InputIterator __k1, _InputIterator __k2)
- basic_string & **replace** (iterator __i1, iterator __i2, _CharT *__k1, _CharT *__k2)
- basic_string & **replace** (iterator __i1, iterator __i2, const _CharT *__k1, const _CharT *__k2)
- basic_string & **replace** (iterator __i1, iterator __i2, iterator __k1, iterator __k2)

- basic_string & **replace** (iterator __i1, iterator __i2, const_iterator __k1, const_iterator __k2)
- basic_string & replace (iterator __i1, iterator __i2, initializer_list< _CharT > __l)
- void reserve (size_type __res_arg=0)
- void **resize** (size_type __n, _CharT __c)
- void **resize** (size_type __n)
- size_type **rfind** (const basic_string &__str, size_type __pos=_Base::npos) const noexcept
- size_type **rfind** (const _CharT *__s, size_type __pos, size_type __n) const
- size_type **rfind** (const _CharT *__s, size_type __pos=_Base::npos) const
- size_type **rfind** (_CharT __c, size_type __pos=_Base::npos) const noexcept
- size_type rfind (const basic_string &__str, size_type __pos=npos) const noexcept
- void **shrink_to_fit** () noexcept
- size_type size () const noexcept
- basic_string **substr** (size_type __pos=0, size_type __n=_Base::npos) const
- void **swap** (basic_string &__x) noexcept(/*conditional */)
- void swap (basic_string &__s) noexcept(/*conditional */)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Static Public Attributes

- static const size_type npos

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.306.1 Detailed Description

template<typename _CharT, typename _Traits = std::char_traits<_CharT>, typename _Allocator = std::allocator<_CharT>>class __gnu_debug::basic_string< _CharT, _Traits, _Allocator >

Class std::basic_string with safety/checking/debug instrumentation.

Definition at line 86 of file debug/string.

4.306.2 Member Function Documentation

4.306.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.306.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.306.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.306.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.306.2.5 void __gnu_debug::_Safe_sequence< basic_string< _CharT, _Traits, _Allocator > >::_M_invalidate_if (_Predicate *__pred*) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.306.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.306.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & *__x*) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.306.2.8 void __gnu_debug::_Safe_sequence< basic_string< _CharT, _Traits, _Allocator > >::_M_transfer_from_if (_Safe_sequence< basic_string< _CharT, _Traits, _Allocator > > & *__from,* _Predicate *__pred*) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.306.2.9 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::append (const basic_string< _CharT, _Traits, _Allocator > & *__str*) [inherited]

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

4.306.2.10 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::append (const basic_string< _CharT, _Traits, _Allocator > & *__str*, size_type *__pos*, size_type *__n* = npos) [inherited]

Append a substring.

Parameters

__str	The string to append.
__pos	Index of the first character of str to append.
__n	The number of characters to append.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *__pos* is not a valid index.

This function appends *__n* characters from *__str* starting at *__pos* to this string. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is appended.

4.306.2.11 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::append (initializer_list< _CharT > *__l*) [inline], [inherited]

Append an initializer_list of characters.

Parameters

__l	The initializer_list of characters to append.

Returns

Reference to this string.

Definition at line 4276 of file basic_string.h.

4.306.2.12 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::assign (const basic_string< _CharT, _Traits, _Allocator > & *__str*) [inherited]

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

4.306.2.13 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::assign (basic_string< _CharT, _Traits, _Allocator > && *__str*) [inline], [noexcept], [inherited]

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

This function sets this string to the exact contents of *__str*. *__str* is a valid, but unspecified string.

Definition at line 4358 of file basic_string.h.

4.306.2.14 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::assign (const basic_string< _CharT, _Traits, _Allocator > & *__str*, size_type *__pos*, size_type *__n* = npos) [inline], [inherited]

Set value to a substring of a string.

Parameters

__str	The string to use.
__pos	Index of the first character of str.
__n	Number of characters to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *pos* is not a valid index.

This function sets this string to the substring of *__str* consisting of *__n* characters at *__pos*. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is used.

Definition at line 4380 of file basic_string.h.

4.306.2.15 const_reference std::basic_string< _CharT, _Traits, _Allocator >::at (size_type *__n*) const [inline], [inherited]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read-only (const) reference to the character.

Exceptions

std::out_of_range	If *n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails.

Definition at line 4080 of file basic_string.h.

4.306.2.16 reference std::basic_string< _CharT, _Traits, _Allocator >::at (size_type *__n*) [inline], [inherited]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read/write reference to the character.

Exceptions

std::out_of_range	If *n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails. Success results in unsharing the string.

Definition at line 4102 of file basic_string.h.

4.306.2.17 reference std::basic_string< _CharT, _Traits, _Allocator >::back ( ) [inline], [inherited]

Returns a read/write reference to the data at the last element of the string.

Definition at line 4141 of file basic_string.h.

4.306.2.18 const_reference std::basic_string< _CharT, _Traits, _Allocator >::back ( ) const [inline], [noexcept], [inherited]

Returns a read-only (constant) reference to the data at the last element of the string.

Definition at line 4152 of file basic_string.h.

4.306.2.19 size_type std::basic_string< _CharT, _Traits, _Allocator >::capacity ( ) const [inline], [noexcept], [inherited]

Returns the total number of characters that the string can hold before needing to allocate more memory.

Definition at line 3976 of file basic_string.h.

4.306.2.20 int std::basic_string< _CharT, _Traits, _Allocator >::compare (const basic_string< _CharT, _Traits, _Allocator > & *__str*) const [inline], [inherited]

Compare to a string.

Parameters

__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Returns an integer < 0 if this string is ordered before *__str*, 0 if their values are equivalent, or > 0 if this string is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of size() and str.size(). The function then compares the two strings by calling traits::compare(data(), str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 5763 of file basic_string.h.

4.306.2.21 int std::basic_string< _CharT, _Traits, _Allocator >::compare (size_type *__pos*, size_type *__n*, const basic_string< _CharT, _Traits, _Allocator > & *__str*) const [inherited]

Compare substring to a string.

Parameters

__pos	Index of first character of substring.
__n	Number of characters in substring.
__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n* characters starting at *__pos*. Returns an integer < 0 if the substring is ordered before *__str*, 0 if their values are equivalent, or > 0 if the substring is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and *__str.size()*. The function then compares the two strings by calling traits::compare(substring.data(),str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

4.306.2.22 int std::basic_string< _CharT, _Traits, _Allocator >::compare (size_type *__pos1,* size_type *__n1,* const basic_string< _CharT, _Traits, _Allocator > & *__str,* size_type *__pos2,* size_type *__n2* = npos) const [inherited]

Compare substring to a substring.

Parameters

__pos1	Index of first character of substring.
__n1	Number of characters in substring.
__str	String to compare against.
__pos2	Index of first character of substring of str.
__n2	Number of characters in substring of str.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos1*. Form the substring of *__str* from the *__n2* characters starting at *__pos2*. Returns an integer < 0 if this substring is ordered before the substring of *__str*, 0 if their values are equivalent, or > 0 if this substring is ordered after the substring of *__str*. Determines the effective length rlen of the strings to compare as the smallest of the lengths of the substrings. The function then compares the two strings by calling traits::compare(substring.data(),str.substr(pos2,n2).data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

4.306.2.23 bool std::basic_string< _CharT, _Traits, _Allocator >::empty ( ) const [inline], [noexcept], [inherited]

Returns true if the string is empty. Equivalent to `*this == ""`.

Definition at line 4026 of file basic_string.h.

4.306.2.24 iterator std::basic_string< _CharT, _Traits, _Allocator >::erase (iterator *__position*) [inline], [inherited]

Remove one character.

Parameters

__position	Iterator referencing the character to remove.

Returns

iterator referencing same location after removal.

Removes the character at *__position* from this string. The value of the string doesn't change if an error is thrown.

Definition at line 4726 of file basic_string.h.

4.306.2.25 iterator std::basic_string< _CharT, _Traits, _Allocator >::erase (iterator *__first,* iterator *__last*) [inherited]

Remove a range of characters.

Parameters

__first	Iterator referencing the first character to remove.
__last	Iterator referencing the end of the range.

Returns

Iterator referencing location of first after removal.

Removes the characters in the range [first,last) from this string. The value of the string doesn't change if an error is thrown.

4.306.2.26 size_type std::basic_string< _CharT, _Traits, _Allocator >::find (const basic_string< _CharT, _Traits, _Allocator > & *__str,* size_type *__pos* = 0) const [inline], [noexcept], [inherited]

Find position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search from (default 0).

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5271 of file basic_string.h.

4.306.2.27 size_type std::basic_string< _CharT, _Traits, _Allocator >::find_first_not_of (const basic_string< _CharT, _Traits, _Allocator > & *__str,* size_type *__pos* = 0) const [inline], [noexcept], [inherited]

Find position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5579 of file basic_string.h.

4.306.2.28 size_type std::basic_string< _CharT, _Traits, _Allocator >::find_first_of (const basic_string< _CharT, _Traits, _Allocator > & *__str*, size_type *__pos* = 0) const [inline], [noexcept], [inherited]

Find position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5412 of file basic_string.h.

4.306.2.29 size_type std::basic_string< _CharT, _Traits, _Allocator >::find_last_not_of (const basic_string< _CharT, _Traits, _Allocator > & *__str*, size_type *__pos* = npos) const [inline], [noexcept], [inherited]

Find last position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5661 of file basic_string.h.

4.306.2.30 size_type std::basic_string< _CharT, _Traits, _Allocator >::find_last_of (const basic_string< _CharT, _Traits, _Allocator > & *__str*, size_type *__pos* = npos) const [inline], [noexcept], [inherited]

Find last position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5496 of file basic_string.h.

4.306.2.31 reference std::basic_string< _CharT, _Traits, _Allocator >::front ( ) [inline], [inherited]

Returns a read/write reference to the data at the first element of the string.

Definition at line 4119 of file basic_string.h.

4.306.2.32 const_reference std::basic_string< _CharT, _Traits, _Allocator >::front ( ) const [inline], [noexcept], [inherited]

Returns a read-only (constant) reference to the data at the first element of the string.

Definition at line 4130 of file basic_string.h.

4.306.2.33 allocator_type std::basic_string< _CharT, _Traits, _Allocator >::get_allocator ( ) const [inline], [noexcept], [inherited]

Return copy of allocator used to construct this string.

Definition at line 5241 of file basic_string.h.

4.306.2.34 void std::basic_string< _CharT, _Traits, _Allocator >::insert (iterator *__p*, size_type *__n*, _CharT *__c*) [inline], [inherited]

Insert multiple characters.

Parameters

__p	Iterator referencing location in string to insert at.
__n	Number of characters to insert
__c	The character to insert.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts *__n* copies of character *__c* starting at the position referenced by iterator *__p*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4497 of file basic_string.h.

4.306.2.35 void std::basic_string< _CharT, _Traits, _Allocator >::insert (iterator *__p*, _InputIterator *__beg*, _InputIterator *__end*) [inline], [inherited]

Insert a range of characters.

Parameters

__p	Iterator referencing location in string to insert at.
__beg	Start of range.
__end	End of range.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts characters in range [__beg,__end). If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4514 of file basic_string.h.

4.306.2.36 void std::basic_string< _CharT, _Traits, _Allocator >::insert (iterator *__p,* initializer_list< _CharT > *__l*) [inline], [inherited]

Insert an initializer_list of characters.

Parameters

__p	Iterator referencing location in string to insert at.
__l	The initializer_list of characters to insert.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Definition at line 4525 of file basic_string.h.

4.306.2.37 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::insert (size_type *__pos1,* const basic_string< _CharT, _Traits, _Allocator > & *__str*) [inline], [inherited]

Insert value of a string.

Parameters

__pos1	Position in string to insert at.
__str	The string to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts value of *__str* starting at *__pos1*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4545 of file basic_string.h.

4.306.2.38 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::insert (size_type *__pos1,* const basic_string< _CharT, _Traits, _Allocator > & *__str,* size_type *__pos2,* size_type *__n* = npos) [inline], [inherited]

Insert a substring.

Parameters

__pos1	Position in string to insert at.
__str	The string to insert.
__pos2	Start of characters in str to insert.
__n	Number of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *pos1* > size() or *__pos2* > *str.size()*.

Starting at *pos1*, insert *__n* character of *__str* beginning with *__pos2*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos1* is beyond the end of this string or *__pos2* is beyond the end of *__str*, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4567 of file basic_string.h.

4.306.2.39 iterator std::basic_string< _CharT, _Traits, _Allocator >::insert (iterator *__p*, _CharT *__c*) [inline], [inherited]

Insert one character.

Parameters

__p	Iterator referencing position in string to insert at.
__c	The character to insert.

Returns

Iterator referencing newly inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts character *__c* at position referenced by *__p*. If adding character causes the length to exceed max_size(), length_error is thrown. If *__p* is beyond end of string, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4649 of file basic_string.h.

4.306.2.40 size_type std::basic_string< _CharT, _Traits, _Allocator >::length ( ) const [inline], [noexcept], [inherited]

Returns the number of characters in the string, not including any null-termination.

Definition at line 3919 of file basic_string.h.

4.306.2.41 size_type std::basic_string< _CharT, _Traits, _Allocator >::max_size ( ) const [inline], [noexcept], [inherited]

Returns the size() of the largest possible string.

Definition at line 3924 of file basic_string.h.

4.306.2.42 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::operator+= (const basic_string< _CharT, _Traits, _Allocator > & *__str*) [inline], [inherited]

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

Definition at line 4166 of file basic_string.h.

4.306.2.43 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (size_type __pos, size_type __n, const basic_string< _CharT, _Traits, _Allocator > & __str) [inline], [inherited]

Replace characters with value from another string.

Parameters

__pos	Index of first character to replace.
__n	Number of characters to be replaced.
__str	String to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *pos* is beyond the end of this string.
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos,__pos+__n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4780 of file basic_string.h.

4.306.2.44 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (size_type __pos1, size_type __n1, const basic_string< _CharT, _Traits, _Allocator > & __str, size_type __pos2, size_type __n2 = npos) [inline], [inherited]

Replace characters with value from another string.

Parameters

__pos1	Index of first character to replace.
__n1	Number of characters to be replaced.
__str	String to insert.
__pos2	Index of first character of str to use.
__n2	Number of characters from str to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos1* > size() or *__pos2* > __str.size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos1,__pos1 + n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4802 of file basic_string.h.

4.306.2.45 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator *__i1*, iterator *__i2*, const basic_string< _CharT, _Traits, _Allocator > & *__str*) [inline], [inherited]

Replace range of characters with string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__str	String value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the value of *__str* is inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4889 of file basic_string.h.

4.306.2.46 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator *__i1*, iterator *__i2*, const _CharT * *__s*, size_type *__n*) [inline], [inherited]

Replace range of characters with C substring.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.
__n	Number of characters from s to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the first *__n* characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4908 of file basic_string.h.

4.306.2.47 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator __i1, iterator __i2, const _CharT *__s) [inline],[inherited]

Replace range of characters with C string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4929 of file basic_string.h.

4.306.2.48 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator *__i1*, iterator *__i2*, size_type *__n*, _CharT *__c*) [inline], [inherited]

Replace range of characters with multiple characters.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__n	Number of characters to insert.
__c	Character to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, *__n* copies of *__c* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4950 of file basic_string.h.

4.306.2.49 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator *__i1*, iterator *__i2*, _InputIterator *__k1*, _InputIterator *__k2*) [inline], [inherited]

Replace range of characters with range.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__k1	Iterator referencing start of range to insert.
__k2	Iterator referencing end of range to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, characters in the range [__k1,__k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4974 of file basic_string.h.

4.306.2.50 basic_string& std::basic_string< _CharT, _Traits, _Allocator >::replace (iterator *__i1,* iterator *__i2,* initializer_list< _CharT > *__l*) [inline],[inherited]

Replace range of characters with initializer_list.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__l	The initializer_list of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, characters in the range [__k1,__k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 5043 of file basic_string.h.

4.306.2.51 void std::basic_string< _CharT, _Traits, _Allocator >::reserve (size_type *__res_arg* = `0`) [inherited]

Attempt to preallocate enough memory for specified number of characters.

Parameters

__res_arg	Number of characters required.

Exceptions

std::length_error	If *__res_arg* exceeds `max_size()`.

This function attempts to reserve enough memory for the string to hold the specified number of characters. If the number requested is more than max_size(), length_error is thrown.

The advantage of this function is that if optimal code is a necessity and the user can determine the string length that will be required, the user can reserve the memory in advance, and thus prevent a possible reallocation of memory and copying of string data.

4.306.2.52 size_type std::basic_string< _CharT, _Traits, _Allocator >::rfind (const basic_string< _CharT, _Traits, _Allocator > & *__str,* size_type *__pos* = npos) const [inline],[noexcept],[inherited]

Find last position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search back from (default end).

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5333 of file basic_string.h.

4.306.2.53 size_type std::basic_string< _CharT, _Traits, _Allocator >::size ( ) const [inline], [noexcept], [inherited]

Returns the number of characters in the string, not including any null-termination.

Definition at line 3913 of file basic_string.h.

4.306.2.54 void std::basic_string< _CharT, _Traits, _Allocator >::swap (basic_string< _CharT, _Traits, _Allocator > & *__s*) [noexcept], [inherited]

Swap contents with another string.

Parameters

__s	String to swap with.

Exchanges the contents of this string with that of *__s* in constant time.

4.306.3 Member Data Documentation

4.306.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.306.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.306.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

4.306.3.4 const size_type std::basic_string< _CharT, _Traits, _Allocator >::npos [static], [inherited]

Value returned by various member functions when they fail.

Definition at line 3353 of file basic_string.h.

The documentation for this class was generated from the following file:

- debug/string

4.307 std::basic_string< _CharT, _Traits, _Alloc > Class Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef __gnu_cxx::__normal_iterator < const_pointer, basic_string > **const_iterator**
- typedef _CharT_alloc_traits::const_pointer **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _CharT_alloc_type::difference_type **difference_type**
- typedef __gnu_cxx::__normal_iterator < pointer, basic_string > **iterator**
- typedef _CharT_alloc_traits::pointer **pointer**
- typedef value_type & **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _CharT_alloc_type::size_type **size_type**
- typedef _Traits **traits_type**
- typedef _Traits::char_type **value_type**

Public Member Functions

- basic_string () noexcept
- basic_string (const _Alloc &__a)
- basic_string (const basic_string &__str)
- basic_string (const basic_string &__str, size_type __pos, const _Alloc &__a=_Alloc())
- basic_string (const basic_string &__str, size_type __pos, size_type __n)
- basic_string (const basic_string &__str, size_type __pos, size_type __n, const _Alloc &__a)
- basic_string (const _CharT *__s, size_type __n, const _Alloc &__a=_Alloc())
- basic_string (const _CharT *__s, const _Alloc &__a=_Alloc())
- basic_string (size_type __n, _CharT __c, const _Alloc &__a=_Alloc())
- basic_string (basic_string &&__str) noexcept
- basic_string (initializer_list< _CharT > __l, const _Alloc &__a=_Alloc())
- **basic_string** (const basic_string &__str, const _Alloc &__a)
- **basic_string** (basic_string &&__str, const _Alloc &__a)
- template<class _InputIterator > basic_string (_InputIterator __beg, _InputIterator __end, const _Alloc &__a=_Alloc())
- ~basic_string () noexcept

- template<typename _InputIterator >
  basic_string< _CharT, _Traits,
  _Alloc > & **_M_replace_dispatch** (iterator __i1, iterator __i2, _InputIterator __k1, _InputIterator __k2, __false_-
  type)
- template<typename _InIterator >
  _CharT * **_S_construct** (_InIterator __beg, _InIterator __end, const _Alloc &__a, forward_iterator_tag)
- basic_string & append (const basic_string &__str)
- basic_string & append (const basic_string &__str, size_type __pos, size_type __n=npos)
- basic_string & append (const _CharT *__s, size_type __n)
- basic_string & append (const _CharT *__s)
- basic_string & append (size_type __n, _CharT __c)
- basic_string & append (initializer_list< _CharT > __l)
- template<class _InputIterator >
  basic_string & append (_InputIterator __first, _InputIterator __last)
- basic_string & assign (const basic_string &__str)
- basic_string & assign (basic_string &&__str) noexcept(allocator_traits< _Alloc >::is_always_equal::value)
- basic_string & assign (const basic_string &__str, size_type __pos, size_type __n=npos)
- basic_string & assign (const _CharT *__s, size_type __n)
- basic_string & assign (const _CharT *__s)
- basic_string & assign (size_type __n, _CharT __c)
- template<class _InputIterator >
  basic_string & assign (_InputIterator __first, _InputIterator __last)
- basic_string & assign (initializer_list< _CharT > __l)
- const_reference at (size_type __n) const
- reference at (size_type __n)
- reference back ()
- const_reference back () const noexcept
- iterator begin ()
- const_iterator begin () const noexcept
- const _CharT * c_str () const noexcept
- size_type capacity () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- int compare (const basic_string &__str) const
- int compare (size_type __pos, size_type __n, const basic_string &__str) const
- int compare (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __-
  n2=npos) const
- int compare (const _CharT *__s) const noexcept
- int compare (size_type __pos, size_type __n1, const _CharT *__s) const
- int compare (size_type __pos, size_type __n1, const _CharT *__s, size_type __n2) const
- size_type copy (_CharT *__s, size_type __n, size_type __pos=0) const
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- const _CharT * data () const noexcept
- bool empty () const noexcept
- iterator end ()
- const_iterator end () const noexcept
- basic_string & erase (size_type __pos=0, size_type __n=npos)
- iterator erase (iterator __position)
- iterator erase (iterator __first, iterator __last)

- size_type find (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type find (const basic_string &__str, size_type __pos=0) const noexcept
- size_type find (const _CharT *__s, size_type __pos=0) const noexcept
- size_type find (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_not_of (const basic_string &__str, size_type __pos=0) const noexcept
- size_type find_first_not_of (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type find_first_not_of (const _CharT *__s, size_type __pos=0) const noexcept
- size_type find_first_not_of (_CharT __c, size_type __pos=0) const noexcept
- size_type find_first_of (const basic_string &__str, size_type __pos=0) const noexcept
- size_type find_first_of (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type find_first_of (const _CharT *__s, size_type __pos=0) const noexcept
- size_type find_first_of (_CharT __c, size_type __pos=0) const noexcept
- size_type find_last_not_of (const basic_string &__str, size_type __pos=npos) const noexcept
- size_type find_last_not_of (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type find_last_not_of (const _CharT *__s, size_type __pos=npos) const noexcept
- size_type find_last_not_of (_CharT __c, size_type __pos=npos) const noexcept
- size_type find_last_of (const basic_string &__str, size_type __pos=npos) const noexcept
- size_type find_last_of (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type find_last_of (const _CharT *__s, size_type __pos=npos) const noexcept
- size_type find_last_of (_CharT __c, size_type __pos=npos) const noexcept
- reference front ()
- const_reference front () const noexcept
- allocator_type get_allocator () const noexcept
- void insert (iterator __p, size_type __n, _CharT __c)
- template<class _InputIterator >
  void insert (iterator __p, _InputIterator __beg, _InputIterator __end)
- void insert (iterator __p, initializer_list< _CharT > __l)
- basic_string & insert (size_type __pos1, const basic_string &__str)
- basic_string & insert (size_type __pos1, const basic_string &__str, size_type __pos2, size_type __n=npos)
- basic_string & insert (size_type __pos, const _CharT *__s, size_type __n)
- basic_string & insert (size_type __pos, const _CharT *__s)
- basic_string & insert (size_type __pos, size_type __n, _CharT __c)
- iterator insert (iterator __p, _CharT __c)
- size_type length () const noexcept
- size_type max_size () const noexcept
- basic_string & operator+= (const basic_string &__str)
- basic_string & operator+= (const _CharT *__s)
- basic_string & operator+= (_CharT __c)
- basic_string & operator+= (initializer_list< _CharT > __l)
- basic_string & operator= (const basic_string &__str)
- basic_string & operator= (const _CharT *__s)
- basic_string & operator= (_CharT __c)
- basic_string & operator= (basic_string &&__str) noexcept(/*conditional */)
- basic_string & operator= (initializer_list< _CharT > __l)
- const_reference operator[] (size_type __pos) const noexcept
- reference operator[] (size_type __pos)
- void pop_back ()
- void push_back (_CharT __c)
- reverse_iterator rbegin ()
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend ()

- const_reverse_iterator rend () const noexcept
- basic_string & replace (size_type __pos, size_type __n, const basic_string &__str)
- basic_string & replace (size_type __pos1, size_type __n1, const basic_string &__str, size_type __pos2, size_type __n2=npos)
- basic_string & replace (size_type __pos, size_type __n1, const _CharT *__s, size_type __n2)
- basic_string & replace (size_type __pos, size_type __n1, const _CharT *__s)
- basic_string & replace (size_type __pos, size_type __n1, size_type __n2, _CharT __c)
- basic_string & replace (iterator __i1, iterator __i2, const basic_string &__str)
- basic_string & replace (iterator __i1, iterator __i2, const _CharT *__s, size_type __n)
- basic_string & replace (iterator __i1, iterator __i2, const _CharT *__s)
- basic_string & replace (iterator __i1, iterator __i2, size_type __n, _CharT __c)
- template<class _InputIterator >
  basic_string & replace (iterator __i1, iterator __i2, _InputIterator __k1, _InputIterator __k2)
- basic_string & **replace** (iterator __i1, iterator __i2, _CharT *__k1, _CharT *__k2)
- basic_string & **replace** (iterator __i1, iterator __i2, const _CharT *__k1, const _CharT *__k2)
- basic_string & **replace** (iterator __i1, iterator __i2, iterator __k1, iterator __k2)
- basic_string & **replace** (iterator __i1, iterator __i2, const_iterator __k1, const_iterator __k2)
- basic_string & replace (iterator __i1, iterator __i2, initializer_list< _CharT > __l)
- void reserve (size_type __res_arg=0)
- void resize (size_type __n, _CharT __c)
- void resize (size_type __n)
- size_type rfind (const basic_string &__str, size_type __pos=npos) const noexcept
- size_type rfind (const _CharT *__s, size_type __pos, size_type __n) const noexcept
- size_type rfind (const _CharT *__s, size_type __pos=npos) const noexcept
- size_type rfind (_CharT __c, size_type __pos=npos) const noexcept
- void shrink_to_fit () noexcept
- size_type size () const noexcept
- basic_string substr (size_type __pos=0, size_type __n=npos) const
- void swap (basic_string &__s) noexcept(/*conditional */)

Static Public Attributes

- static const size_type npos

Protected Types

- typedef iterator **__const_iterator**

4.307.1 Detailed Description

template<typename _CharT, typename _Traits, typename _Alloc>class std::basic_string< _CharT, _Traits, _Alloc >

Managing sequences of characters and character-like objects.

Template Parameters

_CharT	Type of character
_Traits	Traits for character type, defaults to char_traits<_CharT>.
_Alloc	Allocator type, defaults to allocator<_CharT>.

Meets the requirements of a container, a reversible container, and a sequence. Of the optional sequence requirements, only push_back, at, and array access are supported.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Documentation? What's that? Nathan Myers ncm@cantrip.org.

A string looks like this:

```
                                    [_Rep]
                                    _M_length
[basic_string<char_type>]           _M_capacity
_M_dataplus                         _M_refcount
_M_p ---------------->              unnamed array of char_type
```

Where the _M_p points to the first character in the string, and you cast it to a pointer-to-_Rep and subtract 1 to get a pointer to the header.

This approach has the enormous advantage that a string object requires only one allocation. All the ugliness is confined within a single pair of inline functions, which each compile to a single *add* instruction: _Rep::_M_data(), and string::_M_rep(); and the allocation function which gets a block of raw bytes and with room enough and constructs a _Rep object at the front.

The reason you want _M_data pointing to the character array and not the _Rep is so that the debugger can see the string contents. (Probably we should add a non-inline member to get the _Rep for the debugger to use, so users can check the actual string length.)

Note that the _Rep object is a POD so that you can have a static *empty string* _Rep object already *constructed* before static constructors have run. The reference-count encoding is chosen so that a 0 indicates one reference, so you never try to destroy the empty-string _Rep object.

All but the last paragraph is considered pretty conventional for a C++ string implementation.

Definition at line 3139 of file basic_string.h.

4.307.2 Constructor & Destructor Documentation

4.307.2.1 template<typename _CharT, typename _Traits, typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string ( ) [inline], [noexcept]

Default constructor creates an empty string.

Definition at line 3546 of file basic_string.h.

Referenced by std::basic_string< char >::substr().

4.307.2.2 template<typename _CharT , typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const _Alloc & *__a*) [explicit]

Construct an empty string using allocator *a*.

Definition at line 620 of file basic_string.tcc.

4.307.2.3 template<typename _CharT , typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const basic_string< _CharT, _Traits, _Alloc > & *__str*)

Construct string with copy of value of *str*.

Parameters

__str	Source string.

Definition at line 612 of file basic_string.tcc.

4.307.2.4 template<typename _CharT , typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos*, const _Alloc & *__a* = _Alloc())

Construct string as copy of a substring.

Parameters

__str	Source string.
__pos	Index of first character to copy from.
__a	Allocator to use.

Definition at line 626 of file basic_string.tcc.

4.307.2.5 template<typename _CharT , typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos*, size_type *__n*)

Construct string as copy of a substring.

Parameters

__str	Source string.
__pos	Index of first character to copy from.
__n	Number of characters to copy.

Definition at line 636 of file basic_string.tcc.

4.307.2.6 template<typename _CharT , typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos*, size_type *__n*, const _Alloc & *__a*)

Construct string as copy of a substring.

Parameters

__str	Source string.
__pos	Index of first character to copy from.
__n	Number of characters to copy.
__a	Allocator to use.

Definition at line 646 of file basic_string.tcc.

4.307.2.7 template<typename _CharT, typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const _CharT * *__s*, size_type *__n*, const _Alloc & *__a* = _Alloc())

Construct string initialized by a character array.

Parameters

__s	Source character array.
__n	Number of characters to copy.
__a	Allocator to use (default is default allocator).

NB: *__s* must have at least *__n* characters, '\0' has no special meaning.

Definition at line 658 of file basic_string.tcc.

4.307.2.8 template<typename _CharT, typename _Traits, typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (const _CharT * __s, const _Alloc & __a = _Alloc()) [inline]

Construct string as copy of a C string.

Parameters

__s	Source C string.
__a	Allocator to use (default is default allocator).

Definition at line 3619 of file basic_string.h.

4.307.2.9 template<typename _CharT, typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (size_type __n, _CharT __c, const _Alloc & __a = _Alloc())

Construct string as multiple characters.

Parameters

__n	Number of characters.
__c	Character to use.
__a	Allocator to use (default is default allocator).

Definition at line 664 of file basic_string.tcc.

4.307.2.10 template<typename _CharT, typename _Traits, typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (basic_string< _CharT, _Traits, _Alloc > && __str) [inline], [noexcept]

Move construct string.

Parameters

__str	Source string.

The newly-created string contains the exact contents of *__str*. *__str* is a valid, but unspecified string.

Definition at line 3640 of file basic_string.h.

4.307.2.11 template<typename _CharT, typename _Traits , typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::basic_string (initializer_list< _CharT > __l, const _Alloc & __a = _Alloc())

Construct string from an initializer list.

Parameters

__l	std::initializer_list of characters.
__a	Allocator to use (default is default allocator).

Definition at line 679 of file basic_string.tcc.

4.307.2.12 template<typename _CharT , typename _Traits , typename _Alloc> template<typename _InputIterator > std::basic_string< _CharT, _Traits, _Alloc >::basic_string (_InputIterator __beg, _InputIterator __end, const _Alloc & __a = _Alloc())

Construct string as copy of a range.

Parameters

__beg	Start of range.
__end	End of range.
__a	Allocator to use (default is default allocator).

Definition at line 672 of file basic_string.tcc.

4.307.2.13 template<typename _CharT, typename _Traits, typename _Alloc> std::basic_string< _CharT, _Traits, _Alloc >::~basic_string ( ) [inline], [noexcept]

Destroy the string instance.

Definition at line 3717 of file basic_string.h.

4.307.3 Member Function Documentation

4.307.3.1 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::append (const basic_string< _CharT, _Traits, _Alloc > & *__str*)

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

Definition at line 769 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::size().

Referenced by std::basic_string< char >::append(), std::collate< _CharT >::do_transform(), std::basic_string< char >::operator+=(), and std::operator>>().

4.307.3.2 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::append (const basic_string< _CharT, _Traits, _Alloc > & *__str,* size_type *__pos,* size_type *__n* = npos)

Append a substring.

Parameters

__str	The string to append.
__pos	Index of the first character of str to append.
__n	The number of characters to append.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *__pos* is not a valid index.

This function appends *__n* characters from *__str* starting at *__pos* to this string. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is appended.

Definition at line 786 of file basic_string.tcc.

4.307.3.3 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::append (const _CharT * __s, size_type __n)

Append a C substring.

Parameters

__s	The C string to append.
__n	The number of characters to append.

Returns

Reference to this string.

Definition at line 742 of file basic_string.tcc.

4.307.3.4 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::append (const _CharT * __s) [inline]

Append a C string.

Parameters

__s	The C string to append.

Returns

Reference to this string.

Definition at line 4252 of file basic_string.h.

4.307.3.5 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::append (size_type __n, _CharT __c)

Append multiple characters.

Parameters

__n	The number of characters to append.
__c	The character to use.

Returns

Reference to this string.

Appends __n copies of __c to this string.

Definition at line 725 of file basic_string.tcc.

4.307.3.6 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::append (initializer_list< _CharT > __l) [inline]

Append an initializer_list of characters.

Parameters

__l	The initializer_list of characters to append.

Returns

Reference to this string.

Definition at line 4276 of file basic_string.h.

4.307.3.7 template<typename _CharT, typename _Traits, typename _Alloc> template<class _InputIterator > basic_string& std::basic_string< _CharT, _Traits, _Alloc >::append (_InputIterator *__first,* _InputIterator *__last*) [inline]

Append a range of characters.

Parameters

__first	Iterator referencing the first character to append.
__last	Iterator marking the end of the range.

Returns

Reference to this string.

Appends characters in the range [__first,__last) to this string.

Definition at line 4290 of file basic_string.h.

4.307.3.8 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::assign (const basic_string< _CharT, _Traits, _Alloc > & *__str*)

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

Definition at line 687 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::get_allocator().

Referenced by std::basic_string< char >::assign(), std::basic_string< char >::operator=(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.307.3.9 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (basic_string< _CharT, _Traits, _Alloc > && *__str*) [inline], [noexcept]

Set value to contents of another string.

Parameters

__str	Source string to use.

Returns

Reference to this string.

This function sets this string to the exact contents of *__str*. *__str* is a valid, but unspecified string.

Definition at line 4358 of file basic_string.h.

4.307.3.10 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos*, size_type *__n* = npos) [inline]

Set value to a substring of a string.

Parameters

__str	The string to use.
__pos	Index of the first character of str.
__n	Number of characters to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	if *pos* is not a valid index.

This function sets this string to the substring of *__str* consisting of *__n* characters at *__pos*. If *__n* is is larger than the number of available characters in *__str*, the remainder of *__str* is used.

Definition at line 4380 of file basic_string.h.

4.307.3.11 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::assign (const _CharT * *__s*, size_type *__n*)

Set value to a C substring.

Parameters

__s	The C string to use.
__n	Number of characters to use.

Returns

Reference to this string.

This function sets the value of this string to the first *__n* characters of *__s*. If *__n* is is larger than the number of available characters in *__s*, the remainder of *__s* is used.

Definition at line 703 of file basic_string.tcc.

4.307.3.12 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (const _CharT * *__s*) [inline]

Set value to contents of a C string.

Parameters

__s	The C string to use.

Returns

Reference to this string.

This function sets the value of this string to the value of *__s*. The data is copied, so there is no dependence on *__s* once the function returns.

Definition at line 4408 of file basic_string.h.

4.307.3.13 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (size_type *__n*, _CharT *__c*) [inline]

Set value to multiple characters.

Parameters

__n	Length of the resulting string.
__c	The character to use.

Returns

Reference to this string.

This function sets the value of this string to *__n* copies of character *__c*.

Definition at line 4424 of file basic_string.h.

4.307.3.14 template<typename _CharT, typename _Traits, typename _Alloc> template<class _InputIterator > basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (_InputIterator *__first*, _InputIterator *__last*) [inline]

Set value to a range of characters.

Parameters

__first	Iterator referencing the first character to append.
__last	Iterator marking the end of the range.

Returns

Reference to this string.

Sets value of string to characters in the range [__first,__last).

Definition at line 4437 of file basic_string.h.

4.307.3.15 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::assign (initializer_list< _CharT > *__l*) [inline]

Set value to an initializer_list of characters.

Parameters

__l	The initializer_list of characters to assign.

Returns

Reference to this string.

Definition at line 4447 of file basic_string.h.

4.307.3.16 template<typename _CharT, typename _Traits, typename _Alloc> const_reference std::basic_string< _CharT, _Traits, _Alloc >::at (size_type *__n*) const [inline]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read-only (const) reference to the character.

Exceptions

std::out_of_range	If *n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails.

Definition at line 4080 of file basic_string.h.

4.307.3.17 template<typename _CharT, typename _Traits, typename _Alloc> reference std::basic_string< _CharT, _Traits, _Alloc >::at (size_type *__n*) [inline]

Provides access to the data contained in the string.

Parameters

__n	The index of the character to access.

Returns

Read/write reference to the character.

Exceptions

std::out_of_range	If *n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the string. The function throws out_of_range if the check fails. Success results in unsharing the string.

Definition at line 4102 of file basic_string.h.

4.307.3.18 template<typename _CharT, typename _Traits, typename _Alloc> reference std::basic_string< _CharT, _Traits, _Alloc >::back ( ) [inline]

Returns a read/write reference to the data at the last element of the string.

Definition at line 4141 of file basic_string.h.

4.307.3.19 template<typename _CharT, typename _Traits, typename _Alloc> const_reference std::basic_string< _CharT, _Traits, _Alloc >::back ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the last element of the string.

Definition at line 4152 of file basic_string.h.

4.307.3.20 template<typename _CharT, typename _Traits, typename _Alloc> iterator std::basic_string< _CharT, _Traits, _Alloc >::begin ( ) [inline]

Returns a read/write iterator that points to the first character in the string. Unshares the string.

Definition at line 3803 of file basic_string.h.

Referenced by std::basic_string< char >::crend(), std::regex_match(), std::regex_replace(), std::regex_search(), and std::basic_string< char >::rend().

4.307.3.21 template<typename _CharT, typename _Traits, typename _Alloc> const_iterator std::basic_string< _CharT, _Traits, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first character in the string.

Definition at line 3814 of file basic_string.h.

4.307.3.22 template<typename _CharT, typename _Traits, typename _Alloc> const _CharT* std::basic_string< _CharT, _Traits, _Alloc >::c_str ( ) const [inline], [noexcept]

Return const pointer to null-terminated contents.

This is a handle to internal data. Do not modify or dire things may happen.

Definition at line 5207 of file basic_string.h.

Referenced by std::collate< _CharT >::do_compare(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::collate< _CharT >::do_transform(), std::basic_filebuf< char_type, traits_type >::open(), and std::regex_replace().

4.307.3.23 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::capacity ( ) const [inline], [noexcept]

Returns the total number of characters that the string can hold before needing to allocate more memory.

Definition at line 3976 of file basic_string.h.

Referenced by std::basic_string< char >::push_back(), and std::basic_string< char >::shrink_to_fit().

4.307.3.24 template<typename _CharT, typename _Traits, typename _Alloc> const_iterator std::basic_string< _CharT, _Traits, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first character in the string.

Definition at line 3878 of file basic_string.h.

4.307.3.25 template<typename _CharT, typename _Traits, typename _Alloc> const_iterator std::basic_string< _CharT, _Traits, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last character in the string.

Definition at line 3886 of file basic_string.h.

4.307.3.26 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::clear ( ) [inline], [noexcept]

Erases the string, making it empty.

Definition at line 4004 of file basic_string.h.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::setbuf().

4.307.3.27 template<typename _CharT, typename _Traits, typename _Alloc> int std::basic_string< _CharT, _Traits, _Alloc >::compare (const basic_string< _CharT, _Traits, _Alloc > & *__str*) const [inline]

Compare to a string.

Parameters

__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Returns an integer < 0 if this string is ordered before *__str*, 0 if their values are equivalent, or > 0 if this string is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of size() and str.size(). The function then compares the two strings by calling traits::compare(data(), str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 5763 of file basic_string.h.

Referenced by std::operator<(), and std::operator<=().

4.307.3.28 template<typename _CharT , typename _Traits , typename _Alloc > int std::basic_string< _CharT, _Traits, _Alloc >::compare (size_type *__pos*, size_type *__n*, const basic_string< _CharT, _Traits, _Alloc > & *__str*) const

Compare substring to a string.

Parameters

__pos	Index of first character of substring.
__n	Number of characters in substring.
__str	String to compare against.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n* characters starting at *__pos*. Returns an integer < 0 if the substring is ordered before *__str*, 0 if their values are equivalent, or > 0 if the substring is ordered after *__str*. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and *__str.size()*. The function then compares the two strings by calling traits::compare(substring.data(),str.data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 1388 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::data(), std::min(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

4.307.3.29 template<typename _CharT , typename _Traits , typename _Alloc > int std::basic_string< _CharT, _Traits, _Alloc >::compare (size_type __pos1, size_type __n1, const basic_string< _CharT, _Traits, _Alloc > & __str, size_type __pos2, size_type __n2 = npos) const

Compare substring to a substring.

Parameters

__pos1	Index of first character of substring.
__n1	Number of characters in substring.
__str	String to compare against.
__pos2	Index of first character of substring of str.
__n2	Number of characters in substring of str.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos1*. Form the substring of *__str* from the *__n2* characters starting at *__pos2*. Returns an integer < 0 if this substring is ordered before the substring of *__str*, 0 if their values are equivalent, or > 0 if this substring is ordered after the substring of *__str*. Determines the effective length rlen of the strings to compare as the smallest of the lengths of the substrings. The function then compares the two strings by calling traits::compare(substring.data(),str.substr(pos2,n2).data(),rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 1403 of file basic_string.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::data(), and std::min().

4.307.3.30 template<typename _CharT, typename _Traits , typename _Alloc > int std::basic_string< _CharT, _Traits, _Alloc >::compare (const _CharT * __s) const [noexcept]

Compare to a C string.

Parameters

__s	C string to compare against.

Returns

Integer < 0, 0, or > 0.

Returns an integer < 0 if this string is ordered before *__s*, 0 if their values are equivalent, or > 0 if this string is ordered after *__s*. Determines the effective length rlen of the strings to compare as the smallest of size() and the length of a string constructed from *__s*. The function then compares the two strings by calling traits::compare(data(),s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 1421 of file basic_string.tcc.

References std::min().

4.307.3.31 template<typename _CharT, typename _Traits , typename _Alloc > int std::basic_string< _CharT, _Traits, _Alloc >::compare (size_type *__pos,* size_type *__n1,* const _CharT * *__s*) const

Compare substring to a C string.

Parameters

__pos	Index of first character of substring.
__n1	Number of characters in substring.
__s	C string to compare against.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *pos*. Returns an integer < 0 if the substring is ordered before *__s*, 0 if their values are equivalent, or > 0 if the substring is ordered after *__s*. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and the length of a string constructed from *__s*. The function then compares the two string by calling traits::compare(substring.data(),__s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

Definition at line 1436 of file basic_string.tcc.

References std::min().

4.307.3.32 template<typename _CharT, typename _Traits , typename _Alloc > int std::basic_string< _CharT, _Traits, _Alloc >::compare (size_type *__pos*, size_type *__n1*, const _CharT * *__s*, size_type *__n2*) const

Compare substring against a character array.

Parameters

__pos	Index of first character of substring.
__n1	Number of characters in substring.
__s	character array to compare against.
__n2	Number of characters of s.

Returns

Integer < 0, 0, or > 0.

Form the substring of this string from the *__n1* characters starting at *__pos*. Form a string from the first *__n2* characters of *__s*. Returns an integer < 0 if this substring is ordered before the string from *__s*, 0 if their values are equivalent, or > 0 if this substring is ordered after the string from *__s*. Determines the effective length rlen of the strings to compare as the smallest of the length of the substring and *__n2*. The function then compares the two strings by calling traits::compare(substring.data(),s,rlen). If the result of the comparison is nonzero returns it, otherwise the shorter one is ordered first.

NB: s must have at least n2 characters, '\0' has no special meaning.

Definition at line 1452 of file basic_string.tcc.

References std::min().

4.307.3.33 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::copy (_CharT * *__s*, size_type *__n*, size_type *__pos* = 0) const

Copy substring into C string.

Parameters

__s	C string to copy value into.
__n	Number of characters to copy.
__pos	Index of first character to copy.

Returns

Number of characters actually copied

Exceptions

std::out_of_range	If __pos > size().

Copies up to *__n* characters starting at *__pos* into the C string *__s*. If *__pos* is greater than size(), out_of_range is thrown.

Definition at line 1138 of file basic_string.tcc.

4.307.3.34 template<typename _CharT, typename _Traits, typename _Alloc> const_reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last character in the string. Iteration is done in reverse element order.

Definition at line 3895 of file basic_string.h.

4.307.3.35 template<typename _CharT, typename _Traits, typename _Alloc> const_reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order.

Definition at line 3904 of file basic_string.h.

4.307.3.36 template<typename _CharT, typename _Traits, typename _Alloc> const _CharT* std::basic_string< _CharT, _Traits, _Alloc >::data ( ) const [inline], [noexcept]

Return const pointer to contents.

This is a pointer to internal data. It is undefined to modify the contents through the returned pointer. To get a pointer that allows modifying the contents use `&str[0]` instead, (or in C++17 the non-const `str.data()` overload).

Definition at line 5219 of file basic_string.h.

Referenced by std::basic_regex< typename, typename >::assign(), std::basic_string< _CharT, _Traits, _Alloc >::compare(), std::collate< _CharT >::do_compare(), std::collate< _CharT >::do_transform(), std::match_results< _Bi_iter >::format(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::str(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes(), and std::regex_traits< _CharType >::transform().

4.307.3.37 template<typename _CharT, typename _Traits, typename _Alloc> bool std::basic_string< _CharT, _Traits, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the string is empty. Equivalent to `*this == ""`.

Definition at line 4026 of file basic_string.h.

Referenced by std::basic_string< char >::back(), std::basic_string< char >::front(), std::tr2::operator>>(), std::operator>>(), and std::basic_string< char >::pop_back().

4.307.3.38 template<typename _CharT, typename _Traits, typename _Alloc> iterator std::basic_string< _CharT, _Traits, _Alloc >::end ( ) [inline]

Returns a read/write iterator that points one past the last character in the string. Unshares the string.

Definition at line 3822 of file basic_string.h.

Referenced by std::basic_string< char >::crbegin(), std::basic_string< char >::rbegin(), std::regex_match(), std::regex_replace(), and std::regex_search().

4.307.3.39 template<typename _CharT, typename _Traits, typename _Alloc> const_iterator std::basic_string< _CharT, _Traits, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last character in the string.

Definition at line 3833 of file basic_string.h.

4.307.3.40 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::erase (size_type *__pos* = 0, size_type *__n* = npos) [inline]

Remove characters.

Parameters

__pos	Index of first character to remove (default 0).
__n	Number of characters to remove (default remainder).

Returns

Reference to this string.

Exceptions

std::out_of_range	If *pos* is beyond the end of this string.

Removes *__n* characters from this string starting at *__pos*. The length of the string is reduced by *__n*. If there are < *__n* characters to remove, the remainder of the string is truncated. If *__p* is beyond end of string, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4710 of file basic_string.h.

Referenced by std::getline(), std::operator>>(), and std::basic_string< char >::pop_back().

4.307.3.41 template<typename _CharT, typename _Traits, typename _Alloc> iterator std::basic_string< _CharT, _Traits, _Alloc >::erase (iterator *__position*) [inline]

Remove one character.

Parameters

__position	Iterator referencing the character to remove.

Returns

iterator referencing same location after removal.

Removes the character at *__position* from this string. The value of the string doesn't change if an error is thrown.

Definition at line 4726 of file basic_string.h.

4.307.3.42 template<typename _CharT , typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::iterator std::basic_string< _CharT, _Traits, _Alloc >::erase (iterator *__first*, iterator *__last*)

Remove a range of characters.

Parameters

__first	Iterator referencing the first character to remove.
__last	Iterator referencing the end of the range.

Returns

Iterator referencing location of first after removal.

Removes the characters in the range [first,last) from this string. The value of the string doesn't change if an error is thrown.

Definition at line 835 of file basic_string.tcc.

4.307.3.43 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find (const _CharT * __s, size_type __pos, size_type __n) const [noexcept]

Find position of a C substring.

Parameters

__s	C string to locate.
__pos	Index of character to search from.
__n	Number of characters from *s* to search for.

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for the first *__n* characters in *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1191 of file basic_string.tcc.

Referenced by std::basic_string< char >::find(), and std::basic_string< char >::find_first_of().

4.307.3.44 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search from (default 0).

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5271 of file basic_string.h.

4.307.3.45 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find (const _CharT * __s, size_type __pos = 0) const [inline], [noexcept]

Find position of a C string.

Parameters

__s	C string to locate.
__pos	Index of character to search from (default 0).

Returns

Index of start of first occurrence.

Starting from *__pos*, searches forward for the value of *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5286 of file basic_string.h.

4.307.3.46 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find (_CharT *__c*, size_type *__pos* = 0) const [noexcept]

Find position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1227 of file basic_string.tcc.

4.307.3.47 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_not_of (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos* = 0) const [inline],[noexcept]

Find position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5579 of file basic_string.h.

Referenced by std::basic_string< char >::find_first_not_of().

4.307.3.48 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_not_of (const _CharT * *__s*, size_type *__pos*, size_type *__n*) const [noexcept]

Find position of a character not in C substring.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search from.
__n	Number of characters from __s to consider.

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1322 of file basic_string.tcc.

4.307.3.49 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_not_of (const _CharT * *__s*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a character not in C string.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character not contained in *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5610 of file basic_string.h.

4.307.3.50 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_not_of (_CharT *__c*, size_type *__pos* = 0) const [noexcept]

Find position of a different character.

Parameters

__c	Character to avoid.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for a character other than *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1335 of file basic_string.tcc.

4.307.3.51 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_of (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5412 of file basic_string.h.

Referenced by std::basic_string< char >::find_first_of().

4.307.3.52 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_of (const _CharT * *__s*, size_type *__pos*, size_type *__n*) const [noexcept]

Find position of a character of C substring.

Parameters

__s	String containing characters to locate.
__pos	Index of character to search from.
__n	Number of characters from s to search for.

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1284 of file basic_string.tcc.

4.307.3.53 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_of (const _CharT * *__s*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a character of C string.

Parameters

__s	String containing characters to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for one of the characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5443 of file basic_string.h.

4.307.3.54 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_first_of (_CharT *__c*, size_type *__pos* = 0) const [inline], [noexcept]

Find position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search from (default 0).

Returns

Index of first occurrence.

Starting from *__pos*, searches forward for the character *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Note: equivalent to find(__c, __pos).

Definition at line 5463 of file basic_string.h.

4.307.3.55 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_not_of (const basic_string< _CharT, _Traits, _Alloc > & *__str,* size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a character not in string.

Parameters

__str	String containing characters to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5661 of file basic_string.h.

Referenced by std::basic_string< char >::find_last_not_of().

4.307.3.56 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_not_of (const _CharT * *__s,* size_type *__pos,* size_type *__n*) const [noexcept]

Find last position of a character not in C substring.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search back from.
__n	Number of characters from s to consider.

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1346 of file basic_string.tcc.

4.307.3.57 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_not_of (const _CharT * __s, size_type __pos = npos) const [inline], [noexcept]

Find last position of a character not in C string.

Parameters

__s	C string containing characters to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character not contained in *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5692 of file basic_string.h.

4.307.3.58 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_not_of (_CharT *__c,* size_type *__pos* = npos) const [noexcept]

Find last position of a different character.

Parameters

__c	Character to avoid.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for a character other than *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1368 of file basic_string.tcc.

4.307.3.59 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_of (const basic_string< _CharT, _Traits, _Alloc > & *__str,* size_type *__pos* = npos) const [inline],[noexcept]

Find last position of a character of string.

Parameters

__str	String containing characters to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the characters of *__str* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5496 of file basic_string.h.

Referenced by std::basic_string< char >::find_last_of().

4.307.3.60 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_of (const _CharT * *__s,* size_type *__pos,* size_type *__n*) const [noexcept]

Find last position of a character of C substring.

Parameters

__s	C string containing characters to locate.
__pos	Index of character to search back from.
__n	Number of characters from s to search for.

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the first *__n* characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1300 of file basic_string.tcc.

4.307.3.61 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_of (const _CharT * *__s*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a character of C string.

Parameters

__s	C string containing characters to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for one of the characters of *__s* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 5527 of file basic_string.h.

4.307.3.62 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::find_last_of (_CharT *__c*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Note: equivalent to rfind(__c, __pos).

Definition at line 5547 of file basic_string.h.

4.307.3.63 template<typename _CharT, typename _Traits, typename _Alloc> reference std::basic_string< _CharT, _Traits, _Alloc >::front ( ) [inline]

Returns a read/write reference to the data at the first element of the string.

Definition at line 4119 of file basic_string.h.

4.307.3.64 template<typename _CharT, typename _Traits, typename _Alloc> const_reference std::basic_string< _CharT, _Traits, _Alloc >::front ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the first element of the string.

Definition at line 4130 of file basic_string.h.

4.307.3.65 template<typename _CharT, typename _Traits, typename _Alloc> allocator_type std::basic_string< _CharT, _Traits, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Return copy of allocator used to construct this string.

Definition at line 5241 of file basic_string.h.

Referenced by std::basic_string< _CharT, _Traits, _Alloc >::assign(), std::basic_string< char >::basic_string(), std::basic_string< char >::clear(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes(), std::operator+(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::str(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes(), and std::basic_string< char >::~basic_string().

4.307.3.66 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::insert (iterator __p, size_type __n, _CharT __c) [inline]

Insert multiple characters.

Parameters

__p	Iterator referencing location in string to insert at.
__n	Number of characters to insert
__c	The character to insert.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts *__n* copies of character *__c* starting at the position referenced by iterator *__p*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4497 of file basic_string.h.

Referenced by std::basic_string< char >::insert().

4.307.3.67 template<typename _CharT, typename _Traits, typename _Alloc> template<class _InputIterator > void std::basic_string< _CharT, _Traits, _Alloc >::insert (iterator __p, _InputIterator __beg, _InputIterator __end) [inline]

Insert a range of characters.

Parameters

__p	Iterator referencing location in string to insert at.
__beg	Start of range.
__end	End of range.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts characters in range [__beg,__end). If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4514 of file basic_string.h.

4.307.3.68 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::insert (iterator __p, initializer_list< _CharT > __l) [inline]

Insert an initializer_list of characters.

Parameters

__p	Iterator referencing location in string to insert at.
__l	The initializer_list of characters to insert.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Definition at line 4525 of file basic_string.h.

4.307.3.69 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::insert (size_type *__pos1*, const basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Insert value of a string.

Parameters

__pos1	Position in string to insert at.
__str	The string to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts value of *__str* starting at *__pos1*. If adding characters causes the length to exceed max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4545 of file basic_string.h.

4.307.3.70 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::insert (size_type *__pos1*, const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos2*, size_type *__n* = npos) [inline]

Insert a substring.

Parameters

__pos1	Position in string to insert at.
__str	The string to insert.
__pos2	Start of characters in str to insert.
__n	Number of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *pos1* > size() or *__pos2* > *str.size()*.

Starting at *pos1*, insert *__n* character of *__str* beginning with *__pos2*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos1* is beyond the end of this string or *__pos2* is beyond the end of *__str*, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4567 of file basic_string.h.

4.307.3.71 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::insert (size_type __pos, const _CharT * __s, size_type __n)

Insert a C substring.

Parameters

__pos	Position in string to insert at.
__s	The C string to insert.
__n	The number of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos* is beyond the end of this string.

Inserts the first *__n* characters of *__s* starting at *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* is beyond end(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 804 of file basic_string.tcc.

4.307.3.72 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::insert (size_type *__pos*, const _CharT * *__s*) [inline]

Insert a C string.

Parameters

__pos	Position in string to insert at.
__s	The C string to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *pos* is beyond the end of this string.

Inserts the first *n* characters of *__s* starting at *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* is beyond end(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4608 of file basic_string.h.

4.307.3.73 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::insert (size_type *__pos*, size_type *__n*, _CharT *__c*) [inline]

Insert multiple characters.

Parameters

__pos	Index in string to insert at.
__n	Number of characters to insert
__c	The character to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.
std::out_of_range	If *__pos* is beyond the end of this string.

Inserts *__n* copies of character *__c* starting at index *__pos*. If adding characters causes the length to exceed max_size(), length_error is thrown. If *__pos* > length(), out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4631 of file basic_string.h.

4.307.3.74 template<typename _CharT, typename _Traits, typename _Alloc> iterator std::basic_string< _CharT, _Traits, _Alloc >::insert (iterator *__p*, _CharT *__c*) [inline]

Insert one character.

Parameters

__p	Iterator referencing position in string to insert at.
__c	The character to insert.

Returns

Iterator referencing newly inserted char.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Inserts character *__c* at position referenced by *__p*. If adding character causes the length to exceed max_size(), length_error is thrown. If *__p* is beyond end of string, out_of_range is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4649 of file basic_string.h.

4.307.3.75 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::length ( ) const [inline], [noexcept]

Returns the number of characters in the string, not including any null-termination.

Definition at line 3919 of file basic_string.h.

Referenced by std::collate< _CharT >::do_compare(), and std::collate< _CharT >::do_transform().

4.307.3.76 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the size() of the largest possible string.

Definition at line 3924 of file basic_string.h.

Referenced by std::getline(), and std::operator>>().

4.307.3.77 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator+= (const basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Append a string to this string.

Parameters

__str	The string to append.

Returns

Reference to this string.

Definition at line 4166 of file basic_string.h.

4.307.3.78 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator+= (const _CharT * __s) [inline]

Append a C string.

Parameters

__s	The C string to append.

Returns

Reference to this string.

Definition at line 4175 of file basic_string.h.

4.307.3.79 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator+= (_CharT __c) [inline]

Append a character.

Parameters

__c	The character to append.

Returns

Reference to this string.

Definition at line 4184 of file basic_string.h.

4.307.3.80 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator+= (initializer_list< _CharT > __l) [inline]

Append an initializer_list of characters.

Parameters

__l	The initializer_list of characters to be appended.

Returns

Reference to this string.

Definition at line 4197 of file basic_string.h.

4.307.3.81 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator= (const basic_string< _CharT, _Traits, _Alloc > & __str) [inline]

Assign the value of *str* to this string.

Parameters

__str	Source string.

Definition at line 3725 of file basic_string.h.

4.307.3.82 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator= (const _CharT * __s) [inline]

Copy contents of *s* into this string.

Parameters

__s	Source null-terminated string.

Definition at line 3733 of file basic_string.h.

4.307.3.83 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator= (_CharT __c) [inline]

Set value to string of length 1.

Parameters

__c	Source character.

Assigning to a character makes this string length 1 and (*this)[0] == *c*.

Definition at line 3744 of file basic_string.h.

4.307.3.84 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator= (basic_string< _CharT, _Traits, _Alloc > && __str) [inline], [noexcept]

Move assign the value of *str* to this string.

Parameters

__str	Source string.

The contents of *str* are moved into this string (without copying). *str* is a valid, but unspecified string.

Definition at line 3759 of file basic_string.h.

4.307.3.85 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::operator= (initializer_list< _CharT > __l) [inline]

Set value to string constructed from initializer list.

Parameters

__l	std::initializer_list.

Definition at line 3772 of file basic_string.h.

4.307.3.86 template<typename _CharT, typename _Traits, typename _Alloc> const_reference std::basic_string< _CharT, _Traits, _Alloc >::operator[] (size_type __pos) const [inline], [noexcept]

Subscript access to the data contained in the string.

Parameters

__pos	The index of the character to access.

Returns

Read-only (constant) reference to the character.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 4041 of file basic_string.h.

Referenced by std::basic_string< char >::back(), and std::basic_string< char >::front().

4.307.3.87 template<typename _CharT, typename _Traits, typename _Alloc> reference std::basic_string< _CharT, _Traits, _Alloc >::operator[] (size_type *__pos*) [inline]

Subscript access to the data contained in the string.

Parameters

__pos	The index of the character to access.

Returns

Read/write reference to the character.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().) Unshares the string.

Definition at line 4058 of file basic_string.h.

4.307.3.88 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::pop_back ( ) [inline]

Remove the last character.

The string must be non-empty.

Definition at line 4755 of file basic_string.h.

4.307.3.89 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::push_back (_CharT *__c*) [inline]

Append a single character.

Parameters

__c	Character to append.

Definition at line 4331 of file basic_string.h.

Referenced by std::collate< _CharT >::do_transform(), std::basic_string< char >::operator+=(), std::tr2::operator>>(), and std::operator>>().

4.307.3.90 template<typename _CharT, typename _Traits, typename _Alloc> reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::rbegin ( ) [inline]

Returns a read/write reverse iterator that points to the last character in the string. Iteration is done in reverse element order. Unshares the string.

Definition at line 3842 of file basic_string.h.

4.307.3.91 template<typename _CharT, typename _Traits, typename _Alloc> const_reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last character in the string. Iteration is done in reverse element order.

Definition at line 3851 of file basic_string.h.

4.307.3.92 template<typename _CharT, typename _Traits, typename _Alloc> reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::rend ( ) [inline]

Returns a read/write reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order. Unshares the string.

Definition at line 3860 of file basic_string.h.

4.307.3.93 template<typename _CharT, typename _Traits, typename _Alloc> const_reverse_iterator std::basic_string< _CharT, _Traits, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first character in the string. Iteration is done in reverse element order.

Definition at line 3869 of file basic_string.h.

4.307.3.94 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (size_type *__pos,* size_type *__n,* const basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Replace characters with value from another string.

Parameters

__pos	Index of first character to replace.
__n	Number of characters to be replaced.
__str	String to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *pos* is beyond the end of this string.
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos,__pos+__n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4780 of file basic_string.h.

Referenced by std::basic_string< char >::append(), std::basic_string< char >::assign(), std::basic_string< char >::insert(), and std::basic_string< char >::replace().

4.307.3.95 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (size_type *__pos1*, size_type *__n1*, const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos2*, size_type *__n2* = npos) [inline]

Replace characters with value from another string.

Parameters

__pos1	Index of first character to replace.
__n1	Number of characters to be replaced.
__str	String to insert.
__pos2	Index of first character of str to use.
__n2	Number of characters from str to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos1* > size() or *__pos2* > __str.size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos1,__pos1 + n) from this string. In place, the value of *__str* is inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of the result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4802 of file basic_string.h.

4.307.3.96 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc > & std::basic_string< _CharT, _Traits, _Alloc >::replace (size_type *__pos,* size_type *__n1,* const _CharT * *__s,* size_type *__n2*)

Replace characters with value of a C substring.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__s	C string to insert.
__n2	Number of characters from *s* to use.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *pos1* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos,__pos + __n1) from this string. In place, the first *__n2* characters of *__s* are inserted, or all of *__s* if *__n2* is too large. If *__pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 858 of file basic_string.tcc.

4.307.3.97 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (size_type *__pos,* size_type *__n1,* const _CharT * *__s*) [inline]

Replace characters with value of a C string.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__s	C string to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *pos* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__pos,__pos + __n1) from this string. In place, the characters of *__s* are inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4847 of file basic_string.h.

4.307.3.98 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (size_type *__pos*, size_type *__n1*, size_type *__n2*, _CharT *__c*) [inline]

Replace characters with multiple characters.

Parameters

__pos	Index of first character to replace.
__n1	Number of characters to be replaced.
__n2	Number of characters to insert.
__c	Character to insert.

Returns

Reference to this string.

Exceptions

std::out_of_range	If *__pos* > size().
std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [pos,pos + n1) from this string. In place, *__n2* copies of *__c* are inserted. If *__pos* is beyond end of string, out_of_range is thrown. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4871 of file basic_string.h.

4.307.3.99 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator *__i1*, iterator *__i2*, const basic_string< _CharT, _Traits, _Alloc > & *__str*) [inline]

Replace range of characters with string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__str	String value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the value of *__str* is inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4889 of file basic_string.h.

4.307.3.100 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator *__i1,* iterator *__i2,* const _CharT * *__s,* size_type *__n*) [inline]

Replace range of characters with C substring.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.
__n	Number of characters from s to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the first *__n* characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4908 of file basic_string.h.

4.307.3.101 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator *__i1,* iterator *__i2,* const _CharT * *__s*) [inline]

Replace range of characters with C string.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__s	C string value to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, the characters of *__s* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4929 of file basic_string.h.

4.307.3.102 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator __i1, iterator __i2, size_type __n, _CharT __c) [inline]

Replace range of characters with multiple characters.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__n	Number of characters to insert.
__c	Character to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, *__n* copies of *__c* are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4950 of file basic_string.h.

4.307.3.103 template<typename _CharT, typename _Traits, typename _Alloc> template<class _InputIterator > basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator *__i1,* iterator *__i2,* _InputIterator *__k1,* _InputIterator *__k2*) [inline]

Replace range of characters with range.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__k1	Iterator referencing start of range to insert.
__k2	Iterator referencing end of range to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, characters in the range [__k1,__k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 4974 of file basic_string.h.

4.307.3.104 template<typename _CharT, typename _Traits, typename _Alloc> basic_string& std::basic_string< _CharT, _Traits, _Alloc >::replace (iterator *__i1,* iterator *__i2,* initializer_list< _CharT > *__l*) [inline]

Replace range of characters with initializer_list.

Parameters

__i1	Iterator referencing start of range to replace.
__i2	Iterator referencing end of range to replace.
__l	The initializer_list of characters to insert.

Returns

Reference to this string.

Exceptions

std::length_error	If new length exceeds `max_size()`.

Removes the characters in the range [__i1,__i2). In place, characters in the range [__k1,__k2) are inserted. If the length of result exceeds max_size(), length_error is thrown. The value of the string doesn't change if an error is thrown.

Definition at line 5043 of file basic_string.h.

4.307.3.105 template<typename _CharT , typename _Traits , typename _Alloc > void std::basic_string< _CharT, _Traits, _Alloc >::reserve (size_type *__res_arg* = `0`)

Attempt to preallocate enough memory for specified number of characters.

Parameters

__res_arg	Number of characters required.

Exceptions

std::length_error	If *__res_arg* exceeds `max_size()`.

This function attempts to reserve enough memory for the string to hold the specified number of characters. If the number requested is more than max_size(), length_error is thrown.

The advantage of this function is that if optimal code is a necessity and the user can determine the string length that will be required, the user can reserve the memory in advance, and thus prevent a possible reallocation of memory and copying of string data.

Definition at line 946 of file basic_string.tcc.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::tr2::operator>>(), std::operator>>(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_string< char >::push_back(), and std::basic_string< char >::shrink_to_fit().

4.307.3.106 template<typename _CharT, typename _Traits , typename _Alloc > void std::basic_string< _CharT, _Traits, _Alloc >::resize (size_type *__n*, _CharT *__c*)

Resizes the string to the specified number of characters.

Parameters

__n	Number of characters the string should contain.
__c	Character to fill any new elements.

This function will resize the string to the specified number of characters. If the number is smaller than the string's current size the string is truncated, otherwise the string is extended and new elements are set to *__c*.

Definition at line 1085 of file basic_string.tcc.

Referenced by std::money_get< _CharT, _InIter >::do_get(), and std::basic_string< char >::resize().

4.307.3.107 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::resize (size_type *__n*) `[inline]`

Resizes the string to the specified number of characters.

Parameters

__n	Number of characters the string should contain.

This function will resize the string to the specified length. If the new size is smaller than the string's current size the string is truncated, otherwise the string is extended and new characters are default-constructed. For basic types such as char, this means setting them to 0.

Definition at line 3951 of file basic_string.h.

4.307.3.108 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::rfind (const basic_string< _CharT, _Traits, _Alloc > & *__str*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a string.

Parameters

__str	String to locate.
__pos	Index of character to search back from (default end).

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for value of *__str* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5333 of file basic_string.h.

Referenced by std::basic_string< char >::find_last_of(), and std::basic_string< char >::rfind().

4.307.3.109 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::rfind (const _CharT * *__s*, size_type *__pos*, size_type *__n*) const [noexcept]

Find last position of a C substring.

Parameters

__s	C string to locate.
__pos	Index of character to search back from.
__n	Number of characters from s to search for.

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for the first *__n* characters in *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 1245 of file basic_string.tcc.

References std::min().

4.307.3.110 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::rfind (const _CharT * *__s*, size_type *__pos* = npos) const [inline], [noexcept]

Find last position of a C string.

Parameters

__s	C string to locate.
__pos	Index of character to start search at (default end).

Returns

Index of start of last occurrence.

Starting from *__pos*, searches backward for the value of *__s* within this string. If found, returns the index where it begins. If not found, returns npos.

Definition at line 5364 of file basic_string.h.

4.307.3.111 template<typename _CharT, typename _Traits , typename _Alloc > basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::rfind (_CharT __c, size_type __pos = npos) const [noexcept]

Find last position of a character.

Parameters

__c	Character to locate.
__pos	Index of character to search back from (default end).

Returns

Index of last occurrence.

Starting from *__pos*, searches backward for *__c* within this string. If found, returns the index where it was found. If not found, returns npos.

Definition at line 1267 of file basic_string.tcc.

4.307.3.112 template<typename _CharT, typename _Traits, typename _Alloc> void std::basic_string< _CharT, _Traits, _Alloc >::shrink_to_fit ( ) [inline], [noexcept]

A non-binding request to reduce capacity() to size().

Definition at line 3957 of file basic_string.h.

4.307.3.113 template<typename _CharT, typename _Traits, typename _Alloc> size_type std::basic_string< _CharT, _Traits, _Alloc >::size ( ) const [inline], [noexcept]

Returns the number of characters in the string, not including any null-termination.

Definition at line 3913 of file basic_string.h.

Referenced by std::basic_string< _CharT, _Traits, _Alloc >::append(), std::basic_regex< typename, typename >::assign(), std::basic_string< char >::assign(), std::basic_string< char >::at(), std::basic_string< char >::back(), std::basic_string< char >::cend(), std::basic_string< char >::compare(), std::basic_string< _CharT, _Traits, _Alloc >::compare(), std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset(), std::basic_string< char >::empty(), std::basic_string< char >::end(), std::match_results< _Bi_iter >::format(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes(), std::operator+(), std::tr2::operator>>(), std::basic_string< char >::operator[](), std::basic_string< char >::pop_back(), std::basic_string< char >::push_back(), std::basic_string< char >::shrink_to_fit(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::str(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes(), and std::regex_traits< _CharType >::transform().

4.307.3.114 template<typename _CharT, typename _Traits, typename _Alloc> basic_string std::basic_string< _CharT, _Traits, _Alloc >::substr (size_type __pos = 0, size_type __n = npos) const [inline]

Get a substring.

Parameters

__pos	Index of first character (default 0).
__n	Number of characters in substring (default remainder).

Returns

The new string.

Exceptions

std::out_of_range	If __pos > size().

Construct and return a new string using the *__n* characters starting at *__pos*. If the string is too short, use the remainder of the characters. If *__pos* is beyond the end of the string, out_of_range is thrown.

Definition at line 5744 of file basic_string.h.

4.307.3.115 template<typename _CharT , typename _Traits , typename _Alloc > void std::basic_string< _CharT, _Traits, _Alloc >::swap (basic_string< _CharT, _Traits, _Alloc > & *__s*) [noexcept]

Swap contents with another string.

Parameters

__s	String to swap with.

Exchanges the contents of this string with that of *__s* in constant time.

Definition at line 963 of file basic_string.tcc.

Referenced by std::basic_string< char >::assign(), and std::basic_string< char >::operator=().

4.307.4 Member Data Documentation

4.307.4.1 template<typename _CharT, typename _Traits, typename _Alloc> const basic_string< _CharT, _Traits, _Alloc >::size_type std::basic_string< _CharT, _Traits, _Alloc >::npos [static]

Value returned by various member functions when they fail.

Definition at line 3353 of file basic_string.h.

The documentation for this class was generated from the following files:

- basic_string.h
- basic_string.tcc

4.308 std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits > Class Template Reference

Public Types

- using **const_iterator** = const _CharT *
- using **const_pointer** = const _CharT *
- using **const_reference** = const _CharT &
- using **const_reverse_iterator** = std::reverse_iterator< const_iterator >
- using **difference_type** = ptrdiff_t
- using **iterator** = const_iterator
- using **pointer** = _CharT *

- using **reference** = _CharT &
- using **reverse_iterator** = const_reverse_iterator
- using **size_type** = size_t
- using **traits_type** = _Traits
- using **value_type** = _CharT

Public Member Functions

- constexpr **basic_string_view** (const basic_string_view &) noexcept=default
- template<typename _Allocator >
  basic_string_view (const basic_string< _CharT, _Traits, _Allocator > &__str) noexcept
- constexpr **basic_string_view** (const _CharT *__str)
- constexpr **basic_string_view** (const _CharT *__str, size_type __len)
- constexpr const _CharT & **at** (size_type __pos) const
- constexpr const _CharT & **back** () const
- constexpr const_iterator **begin** () const noexcept
- constexpr const_iterator **cbegin** () const noexcept
- constexpr const_iterator **cend** () const noexcept
- constexpr int **compare** (basic_string_view __str) const noexcept
- constexpr int **compare** (size_type __pos1, size_type __n1, basic_string_view __str) const
- constexpr int **compare** (size_type __pos1, size_type __n1, basic_string_view __str, size_type __pos2, size_type __n2) const
- constexpr int **compare** (const _CharT *__str) const noexcept
- constexpr int **compare** (size_type __pos1, size_type __n1, const _CharT *__str) const
- constexpr int **compare** (size_type __pos1, size_type __n1, const _CharT *__str, size_type __n2) const
- size_type **copy** (_CharT *__str, size_type __n, size_type __pos=0) const
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- constexpr const _CharT * **data** () const noexcept
- constexpr bool **empty** () const noexcept
- constexpr const_iterator **end** () const noexcept
- constexpr size_type **find** (basic_string_view __str, size_type __pos=0) const noexcept
- constexpr size_type **find** (_CharT __c, size_type __pos=0) const noexcept
- constexpr size_type **find** (const _CharT *__str, size_type __pos, size_type __n) const noexcept
- constexpr size_type **find** (const _CharT *__str, size_type __pos=0) const noexcept
- constexpr size_type **find_first_not_of** (basic_string_view __str, size_type __pos=0) const noexcept
- constexpr size_type **find_first_not_of** (_CharT __c, size_type __pos=0) const noexcept
- constexpr size_type **find_first_not_of** (const _CharT *__str, size_type __pos, size_type __n) const
- constexpr size_type **find_first_not_of** (const _CharT *__str, size_type __pos=0) const noexcept
- constexpr size_type **find_first_of** (basic_string_view __str, size_type __pos=0) const noexcept
- constexpr size_type **find_first_of** (_CharT __c, size_type __pos=0) const noexcept
- constexpr size_type **find_first_of** (const _CharT *__str, size_type __pos, size_type __n) const
- constexpr size_type **find_first_of** (const _CharT *__str, size_type __pos=0) const noexcept
- constexpr size_type **find_last_not_of** (basic_string_view __str, size_type __pos=npos) const noexcept
- constexpr size_type **find_last_not_of** (_CharT __c, size_type __pos=npos) const noexcept
- constexpr size_type **find_last_not_of** (const _CharT *__str, size_type __pos, size_type __n) const
- constexpr size_type **find_last_not_of** (const _CharT *__str, size_type __pos=npos) const noexcept
- constexpr size_type **find_last_of** (basic_string_view __str, size_type __pos=npos) const noexcept
- constexpr size_type **find_last_of** (_CharT __c, size_type __pos=npos) const noexcept
- constexpr size_type **find_last_of** (const _CharT *__str, size_type __pos, size_type __n) const

- constexpr size_type **find_last_of** (const _CharT *__str, size_type __pos=npos) const noexcept
- constexpr const _CharT & **front** () const
- constexpr size_type **length** () const noexcept
- constexpr size_type **max_size** () const noexcept
- template<typename _Allocator >
  operator basic_string< **_CharT, _Traits, _Allocator** > () const
- basic_string_view & **operator=** (const basic_string_view &) noexcept=default
- constexpr const _CharT & **operator[]** (size_type __pos) const
- const_reverse_iterator **rbegin** () const noexcept
- constexpr void **remove_prefix** (size_type __n)
- constexpr void **remove_suffix** (size_type __n)
- const_reverse_iterator **rend** () const noexcept
- constexpr size_type **rfind** (basic_string_view __str, size_type __pos=npos) const noexcept
- constexpr size_type **rfind** (_CharT __c, size_type __pos=npos) const noexcept
- constexpr size_type **rfind** (const _CharT *__str, size_type __pos, size_type __n) const noexcept
- constexpr size_type **rfind** (const _CharT *__str, size_type __pos=npos) const noexcept
- constexpr size_type **size** () const noexcept
- constexpr basic_string_view **substr** (size_type __pos=0, size_type __n=npos) const
- constexpr void **swap** (basic_string_view &__sv) noexcept
- template<typename _Allocator = std::allocator<_CharT>>
  basic_string< _CharT, _Traits,
  _Allocator > **to_string** (const _Allocator &__alloc=_Allocator()) const

Static Public Attributes

- static constexpr size_type **npos**

4.308.1 Detailed Description

template<typename _CharT, typename _Traits = std::char_traits<_CharT>>class std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >

A non-owning reference to a string.

Template Parameters

_CharT	Type of character
_Traits	Traits for character type, defaults to char_traits<_CharT>.

A basic_string_view looks like this:

```
_CharT*     _M_str
size_t      _M_len
```

Definition at line 75 of file experimental/string_view.

The documentation for this class was generated from the following files:

- experimental/string_view
- experimental/bits/string_view.tcc

4.309 std::basic_stringbuf< _CharT, _Traits, _Alloc > Class Template Reference

Inheritance diagram for std::basic_stringbuf< _CharT, _Traits, _Alloc >:



Public Types

- typedef __string_type::size_type **__size_type**
- typedef basic_streambuf < char_type, traits_type > **__streambuf_type**
- typedef basic_string < char_type, _Traits, _Alloc > **__string_type**
- typedef _Alloc **allocator_type**
- typedef _CharT **char_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::off_type **off_type**
- typedef traits_type::pos_type **pos_type**
- typedef _Traits **traits_type**

Public Member Functions

- basic_stringbuf ()
- basic_stringbuf (ios_base::openmode __mode)
- basic_stringbuf (const __string_type &__str, ios_base::openmode __mode=ios_base::in|ios_base::out)
- **basic_stringbuf** (const basic_stringbuf &)=delete
- **basic_stringbuf** (basic_stringbuf &&__rhs)
- locale getloc () const
- streamsize in_avail ()
- basic_stringbuf & **operator=** (const basic_stringbuf &)=delete
- basic_stringbuf & **operator=** (basic_stringbuf &&__rhs)
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()

- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- __string_type str () const
- void str (const __string_type &__s)
- int_type sungetc ()
- void **swap** (basic_stringbuf &__rhs)

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void **_M_pbump** (char_type *__pbeg, char_type *__pend, off_type __off)
- void **_M_stringbuf_init** (ios_base::openmode __mode)
- void **_M_sync** (char_type *__base, __size_type __i, __size_type __o)
- void **_M_update_egptr** ()
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- virtual int_type overflow (int_type __c=traits_type::eof())
- virtual int_type pbackfail (int_type __c=traits_type::eof())
- void pbump (int __n)
- virtual pos_type seekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual pos_type seekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual __streambuf_type * setbuf (char_type *__s, streamsize __n)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- virtual int sync ()
- virtual int_type uflow ()
- virtual int_type underflow ()
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- locale _M_buf_locale
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- ios_base::openmode _M_mode
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end
- __string_type **_M_string**

4.309.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>>class std::basic_stringbuf< _CharT, _Traits, _Alloc >

The actual work of input and output (for std::string).

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.
_Alloc	Allocator type, defaults to allocator<_CharT>.

This class associates either or both of its input and output sequences with a sequence of characters, which can be initialized from, or made available as, a `std::basic_string`. (Paraphrased from [27.7.1]/1.)

For this class, open modes (of type `ios_base::openmode`) have `in` set if the input sequence can be read, and `out` set if the output sequence can be written.

Definition at line 96 of file iosfwd.

4.309.2 Constructor & Destructor Documentation

4.309.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringbuf< _CharT, _Traits, _Alloc >::basic_stringbuf ( ) [inline]

Starts with an empty string buffer.

The default constructor initializes the parent class using its own default ctor.

Definition at line 99 of file sstream.

4.309.2.2 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringbuf< _CharT, _Traits, _Alloc >::basic_stringbuf (ios_base::openmode *__mode*) [inline], [explicit]

Starts with an empty string buffer.

Parameters

__mode	Whether the buffer can read, or write, or both.

The default constructor initializes the parent class using its own default ctor.

Definition at line 111 of file sstream.

4.309.2.3 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringbuf< _CharT, _Traits, _Alloc >::basic_stringbuf (const __string_type & __str, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline], [explicit]

Starts with an existing string buffer.

Parameters

__str	A string to copy as a starting buffer.
__mode	Whether the buffer can read, or write, or both.

This constructor initializes the parent class using its own default ctor.

Definition at line 124 of file sstream.

4.309.3 Member Function Documentation

4.309.3.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.309.3.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.309.3.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.309.3.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.309.3.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.309.3.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.309.3.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual void std::basic_streambuf< _CharT, _Traits >::imbue (const locale & __loc) [inline], [protected], [virtual], [inherited]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 583 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.309.3.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.309.3.9 template<class _CharT , class _Traits , class _Alloc > basic_stringbuf< _CharT, _Traits, _Alloc >::int_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow (int_type __c = traits_type::eof()) [protected], [virtual]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually __c, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if __c is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 80 of file sstream.tcc.

References __gnu_debug::__base(), std::ios_base::in, std::max(), std::min(), std::ios_base::out, and std::basic_string< _CharT, _Traits, _Alloc >::reserve().

4.309.3.10 template<class _CharT , class _Traits , class _Alloc > basic_stringbuf< _CharT, _Traits, _Alloc >::int_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail (int_type __c = traits_type::eof()) [protected], [virtual]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 46 of file sstream.tcc.

References std::ios_base::out.

4.309.3.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.309.3.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.309.3.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.309.3.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & *__loc*) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.309.3.15 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.309.3.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type __sp, ios_base::openmode __mode = ios_base::in | ios_base::out) [inline],[inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.309.3.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s*, streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.309.3.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.309.3.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.309.3.20 template<class _CharT , class _Traits , class _Alloc > basic_stringbuf< _CharT, _Traits, _Alloc >::pos_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff (off_type , ios_base::seekdir , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 168 of file sstream.tcc.

References std::ios_base::cur, std::ios_base::end, std::ios_base::in, and std::ios_base::out.

4.309.3.21 template<class _CharT , class _Traits , class _Alloc > basic_stringbuf< _CharT, _Traits, _Alloc >::pos_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos (pos_type , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 216 of file sstream.tcc.

References std::ios_base::in, and std::ios_base::out.

4.309.3.22 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> virtual __streambuf_type* std::basic_stringbuf< _CharT, _Traits, _Alloc >::setbuf (char_type * __s, streamsize __n) [inline], [protected], [virtual]

Manipulates the buffer.

Parameters

__s	Pointer to a buffer area.
__n	Size of *__s*.

Returns

`this`

If no buffer has already been created, and both *__s* and *__n* are non-zero, then `__s` is used as a buffer; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 255 of file sstream.

References std::basic_string< _CharT, _Traits, _Alloc >::clear().

4.309.3.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*) [inline], [protected], [inherited]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.309.3.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.309.3.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.309.3.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * *__s*, streamsize *__n*) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.309.3.27 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> virtual streamsize std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc ( ) [inline], [protected], [virtual]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 223 of file sstream.

References std::basic_streambuf< _CharT, _Traits >::egptr(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::ios_base::in.

4.309.3.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.309.3.29 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type __c) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.309.3.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type __c) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.309.3.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * __s, streamsize __n) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.309.3.32 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __string_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::str ( ) const [inline]

Copying out the string buffer.

Returns

A copy of one of the underlying sequences.

If the buffer is only created in input mode, the underlying character sequence is equal to the input sequence; otherwise, it is equal to the output sequence. [27.7.1.2]/1

Definition at line 178 of file sstream.

References std::basic_string< _CharT, _Traits, _Alloc >::assign(), std::basic_streambuf< _CharT, _Traits >::egptr(), std::basic_string< _CharT, _Traits, _Alloc >::get_allocator(), std::basic_streambuf< _CharT, _Traits >::pbase(), and std::basic_streambuf< _CharT, _Traits >::pptr().

4.309.3.33 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> void std::basic_stringbuf< _CharT, _Traits, _Alloc >::str (const __string_type & __s) [inline]

Setting a new buffer.

Parameters

__s	The string to use as a new sequence.

Deallocates any previous stored sequence, then copies *s* to use as a new one.

Definition at line 202 of file sstream.

References std::basic_string< _CharT, _Traits, _Alloc >::assign(), std::basic_string< _CharT, _Traits, _Alloc >::data(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

4.309.3.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.309.3.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int std::basic_streambuf< _CharT, _Traits >::sync (void) [inline], [protected], [virtual], [inherited]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented in std::wbuffer_convert< _Codecvt, _Elem, _Tr >, std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 634 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubsync().

4.309.3.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented in __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 707 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc().

4.309.3.37 template<class _CharT , class _Traits , class _Alloc > basic_stringbuf< _CharT, _Traits, _Alloc >::int_type std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow ( ) [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 150 of file sstream.tcc.

References std::ios_base::in.

4.309.3.38 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 46 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sgetn().

4.309.3.39 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes __s[0] through __s[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 80 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sputn().

4.309.4 Member Data Documentation

4.309.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.309.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.309.4.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.309.4.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.309.4.5 template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> ios_base::openmode std::basic_stringbuf< _CharT, _Traits, _Alloc >::_M_mode [protected]

Place to stash in || out || in | out settings for current stringbuf.

Definition at line 85 of file sstream.

4.309.4.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.309.4.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.309.4.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

The documentation for this class was generated from the following files:

- iosfwd
- sstream
- sstream.tcc

4.310 std::basic_stringstream< _CharT, _Traits, _Alloc > Class Template Reference

Inheritance diagram for std::basic_stringstream< _CharT, _Traits, _Alloc >:

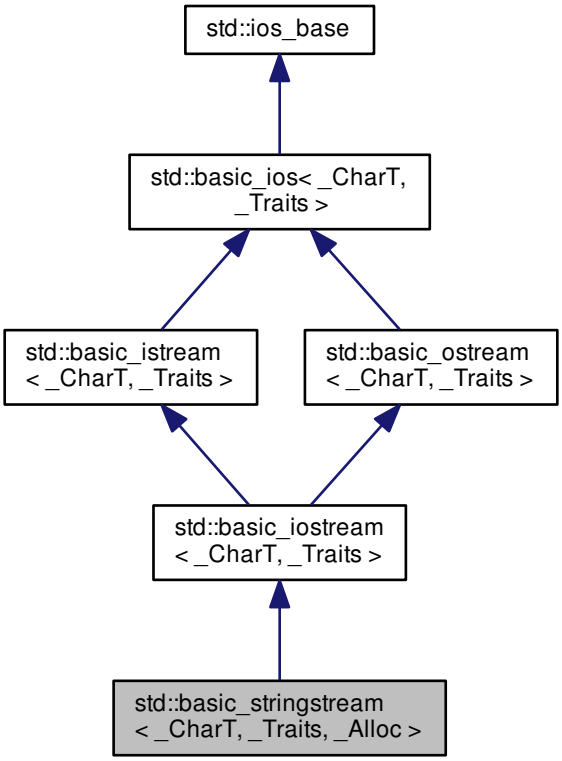

Public Types

- typedef ctype< _CharT > **__ctype_type**
- typedef ctype< _CharT > **__ctype_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_ios< _CharT, _Traits > **__ios_type**
- typedef basic_iostream < char_type, traits_type > **__iostream_type**
- typedef basic_istream< _CharT, _Traits > **__istream_type**
- typedef num_get< _CharT, istreambuf_iterator< _CharT, _Traits > > **__num_get_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > **__num_put_type**
- typedef basic_ostream< _CharT, _Traits > **__ostream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef basic_string< _CharT, _Traits, _Alloc > **__string_type**
- typedef basic_stringbuf < _CharT, _Traits, _Alloc > **__stringbuf_type**
- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- typedef _Alloc **allocator_type**
- typedef _CharT **char_type**
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef traits_type::int_type **int_type**
- typedef _Ios_Iostate iostate
- typedef traits_type::off_type **off_type**
- typedef _Ios_Openmode openmode
- typedef traits_type::pos_type **pos_type**
- typedef _Ios_Seekdir seekdir
- typedef _Traits **traits_type**

- typedef num_put< _CharT, ostreambuf_iterator< _CharT, _Traits > > __num_put_type

Public Member Functions

- basic_stringstream ()
- basic_stringstream (ios_base::openmode __m)
- basic_stringstream (const __string_type &__str, ios_base::openmode __m=ios_base::out|ios_base::in)
- **basic_stringstream** (const basic_stringstream &)=delete
- **basic_stringstream** (basic_stringstream &&__rhs)
- ∼basic_stringstream ()
- template<typename _ValueT > basic_istream< _CharT, _Traits > & **_M_extract** (_ValueT &__v)
- const locale & _M_getloc () const
- template<typename _ValueT > basic_ostream< _CharT, _Traits > & **_M_insert** (_ValueT __v)
- void **_M_setstate** (iostate __state)
- bool bad () const
- void clear (iostate __state=goodbit)

- basic_ios & copyfmt (const basic_ios &__rhs)
- bool eof () const
- iostate exceptions () const
- void exceptions (iostate __except)
- bool fail () const
- char_type fill () const
- char_type fill (char_type __ch)
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- __ostream_type & flush ()
- streamsize gcount () const
- template<>
  basic_istream< char > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- template<>
  basic_istream< wchar_t > & **getline** (char_type *__s, streamsize __n, char_type __delim)
- locale getloc () const
- bool good () const
- template<>
  basic_istream< char > & **ignore** (streamsize __n)
- template<>
  basic_istream< char > & **ignore** (streamsize __n, int_type __delim)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n)
- template<>
  basic_istream< wchar_t > & **ignore** (streamsize __n, int_type __delim)
- locale imbue (const locale &__loc)
- long & iword (int __ix)
- char narrow (char_type __c, char __dfault) const
- __ostream_type & operator<< (const void *__p)
- __ostream_type & operator<< (__streambuf_type *__sb)
- basic_stringstream & **operator=** (const basic_stringstream &)=delete
- basic_stringstream & **operator=** (basic_stringstream &&__rhs)
- __istream_type & operator>> (void *&__p)
- __istream_type & operator>> (__streambuf_type *__sb)
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void *& pword (int __ix)
- basic_streambuf< _CharT,
  _Traits > * rdbuf (basic_streambuf< _CharT, _Traits > *__sb)
- __stringbuf_type * rdbuf () const
- iostate rdstate () const
- void register_callback (event_callback __fn, int __index)
- __ostream_type & seekp (pos_type)
- __ostream_type & seekp (off_type, ios_base::seekdir)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void setstate (iostate __state)
- __string_type str () const
- void str (const __string_type &__s)
- void **swap** (basic_stringstream &__rhs)
- pos_type tellp ()

- basic_ostream< _CharT, _Traits > * tie () const
- basic_ostream< _CharT, _Traits > * tie (basic_ostream< _CharT, _Traits > *__tiestr)
- void unsetf (fmtflags __mask)
- char_type widen (char __c) const
- streamsize width () const
- streamsize width (streamsize __wide)

- __istream_type & operator>> (__istream_type &(*__pf)(__istream_type &))
- __istream_type & operator>> (__ios_type &(*__pf)(__ios_type &))
- __istream_type & operator>> (ios_base &(*__pf)(ios_base &))

Extractors

All the `operator>>` functions (aka formatted input functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to false. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- __istream_type & operator>> (bool &__n)
- __istream_type & operator>> (short &__n)
- __istream_type & operator>> (unsigned short &__n)
- __istream_type & operator>> (int &__n)
- __istream_type & operator>> (unsigned int &__n)
- __istream_type & operator>> (long &__n)
- __istream_type & operator>> (unsigned long &__n)
- __istream_type & operator>> (long long &__n)
- __istream_type & operator>> (unsigned long long &__n)

- __istream_type & operator>> (float &__f)
- __istream_type & operator>> (double &__f)
- __istream_type & operator>> (long double &__f)

Unformatted Input Functions

All the unformatted input functions have some common behavior. Each starts by constructing a temporary object of type std::basic_istream::sentry with the second argument (noskipws) set to true. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to extract whatever data is appropriate for the type of the argument.

The number of characters extracted is stored for later retrieval by gcount().

If an exception is thrown during extraction, ios_base::badbit will be turned on in the stream's error state (without causing an ios_base::failure to be thrown) and the original exception will be rethrown if badbit is set in the exceptions mask.

- int_type get ()
- __istream_type & get (char_type &__c)
- __istream_type & get (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & get (char_type *__s, streamsize __n)
- __istream_type & get (__streambuf_type &__sb, char_type __delim)
- __istream_type & get (__streambuf_type &__sb)
- __istream_type & getline (char_type *__s, streamsize __n, char_type __delim)
- __istream_type & getline (char_type *__s, streamsize __n)
- __istream_type & ignore (streamsize __n, int_type __delim)

- __istream_type & ignore (streamsize __n)
- __istream_type & ignore ()
- int_type peek ()
- __istream_type & read (char_type *__s, streamsize __n)
- streamsize readsome (char_type *__s, streamsize __n)
- __istream_type & putback (char_type __c)
- __istream_type & unget ()
- int sync ()
- pos_type tellg ()
- __istream_type & seekg (pos_type)
- __istream_type & seekg (off_type, ios_base::seekdir)

- operator bool () const
- bool operator! () const

- __ostream_type & operator<< (__ostream_type &(*__pf)(__ostream_type &))
- __ostream_type & operator<< (__ios_type &(*__pf)(__ios_type &))
- __ostream_type & operator<< (ios_base &(*__pf)(ios_base &))

Inserters

All the `operator<<` functions (aka formatted output functions) have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This can have several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state without causing an ios_base::failure to be thrown. The original exception will then be rethrown.

- __ostream_type & operator<< (long __n)
- __ostream_type & operator<< (unsigned long __n)
- __ostream_type & operator<< (bool __n)
- __ostream_type & operator<< (short __n)
- __ostream_type & operator<< (unsigned short __n)
- __ostream_type & operator<< (int __n)
- __ostream_type & operator<< (unsigned int __n)
- __ostream_type & operator<< (long long __n)
- __ostream_type & operator<< (unsigned long long __n)

- __ostream_type & operator<< (double __f)
- __ostream_type & operator<< (float __f)
- __ostream_type & operator<< (long double __f)

Unformatted Output Functions

All the unformatted output functions have some common behavior. Each starts by constructing a temporary object of type std::basic_ostream::sentry. This has several effects, concluding with the setting of a status flag; see the sentry documentation for more.

If the sentry status is good, the function tries to generate whatever data is appropriate for the type of the argument.

If an exception is thrown during insertion, ios_base::badbit will be turned on in the stream's error state. If badbit is on in the stream's exceptions mask, the exception will be rethrown without completing its actions.

- __ostream_type & put (char_type __c)
- void _M_write (const char_type *__s, streamsize __n)
- __ostream_type & write (const char_type *__s, streamsize __n)

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_cache_locale** (const locale &__loc)
- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- template<typename _ValueT >
  __istream_type & **_M_extract** (_ValueT &__v)
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- template<typename _ValueT >
  __ostream_type & **_M_insert** (_ValueT __v)
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept
- void init (basic_streambuf< _CharT, _Traits > *__sb)
- void **move** (basic_ios &__rhs)
- void **move** (basic_ios &&__rhs)
- void **set_rdbuf** (basic_streambuf< _CharT, _Traits > *__sb)
- void **swap** (basic_ostream &__rhs)
- void **swap** (basic_ios &__rhs) noexcept
- void **swap** (basic_istream &__rhs)
- void **swap** (basic_iostream &__rhs)

Protected Attributes

- _Callback_list * **_M_callbacks**
- const __ctype_type * **_M_ctype**
- iostate **_M_exception**
- char_type **_M_fill**
- bool **_M_fill_init**
- fmtflags **_M_flags**
- streamsize _M_gcount
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- const __num_get_type * **_M_num_get**
- const __num_put_type * **_M_num_put**
- streamsize **_M_precision**
- basic_streambuf< _CharT,
  _Traits > * **_M_streambuf**
- iostate **_M_streambuf_state**
- basic_ostream< _CharT, _Traits > * **_M_tie**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.310.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>>class std::basic_stringstream< _CharT, _Traits, _Alloc >

Controlling input and output for std::string.

Template Parameters

_CharT	Type of character stream.
_Traits	Traits for character type, defaults to char_traits<_CharT>.
_Alloc	Allocator type, defaults to allocator<_CharT>.

This class supports reading from and writing to objects of type std::basic_string, using the inherited functions from std::basic_iostream. To control the associated sequence, an instance of std::basic_stringbuf is used, which this page refers to as `sb`.

Definition at line 108 of file iosfwd.

4.310.2 Member Typedef Documentation

4.310.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef num_put<_CharT, ostreambuf_iterator<_CharT, _Traits> > std::basic_ios< _CharT, _Traits >::__num_put_type [inherited]

These are non-standard types.

Definition at line 89 of file basic_ios.h.

4.310.2.2 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i) [inherited]

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.310.2.3 typedef _Ios_Fmtflags std::ios_base::fmtflags [inherited]

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal
- left
- oct
- right
- scientific

- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.310.2.4 typedef _Ios_Iostate std::ios_base::iostate [inherited]

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.310.2.5 typedef _Ios_Openmode std::ios_base::openmode [inherited]

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.310.2.6 typedef _Ios_Seekdir std::ios_base::seekdir [inherited]

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.310.3 Member Enumeration Documentation

4.310.3.1 enum std::ios_base::event [inherited]

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.310.4 Constructor & Destructor Documentation

4.310.4.1 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream ( ) [inline]

Default constructor starts with an empty string buffer.

Initializes sb using the mode in|out, and passes &sb to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 741 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.310.4.2 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream (ios_base::openmode __m) [inline], [explicit]

Starts with an empty string buffer.

Parameters

__m	Whether the buffer can read, or write, or both.

Initializes sb using the mode from __m, and passes &sb to the base class initializer. Does not allocate any buffer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 756 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.310.4.3 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream (const __string_type & *__str,* ios_base::openmode *__m* = ios_base::out | ios_base::in) [inline],[explicit]

Starts with an existing string buffer.

Parameters

__str	A string to copy as a starting buffer.
__m	Whether the buffer can read, or write, or both.

Initializes `sb` using *__str* and `__m`, and passes `&sb` to the base class initializer.

That's a lie. We initialize the base class with NULL, because the string class does its own memory management.

Definition at line 772 of file sstream.

References std::basic_ios< _CharT, _Traits >::init().

4.310.4.4 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> std::basic_stringstream< _CharT, _Traits, _Alloc >::~basic_stringstream ( ) [inline]

The destructor does nothing.

The buffer is deallocated by the stringbuf object, not the formatting stream.

Definition at line 783 of file sstream.

4.310.5 Member Function Documentation

4.310.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline], [inherited]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.310.5.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ostream< _CharT, _Traits >::_M_write (const char_type * *__s*, streamsize *__n*) [inline], [inherited]

Core write functionality, without sentry.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Definition at line 317 of file ostream.

Referenced by std::basic_ostream< _CharT, _Traits >::write().

4.310.5.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::bad ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the badbit is set.

Note that other iostate flags may also be set.

Definition at line 211 of file basic_ios.h.

4.310.5.4 template<typename _CharT , typename _Traits > void std::basic_ios< _CharT, _Traits >::clear (iostate __state = goodbit) [inherited]

[Re]sets the error state.

Parameters

__state	The new state flag(s) to set.

See std::ios_base::iostate for the possible bit values. Most users will not need to pass an argument.

Definition at line 41 of file basic_ios.tcc.

Referenced by std::basic_ios< char, char_traits< char > >::exceptions(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::__detail::operator>>(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.310.5.5 template<typename _CharT , typename _Traits > basic_ios< _CharT, _Traits > & std::basic_ios< _CharT, _Traits >::copyfmt (const basic_ios< _CharT, _Traits > & __rhs) [inherited]

Copies fields of __rhs into this.

Parameters

__rhs	The source values for the copies.

Returns

Reference to this object.

All fields of __rhs are copied into this object except that rdbuf() and rdstate() remain unchanged. All values in the pword and iword arrays are copied. Before copying, each callback is invoked with erase_event. After copying, each (new) callback is invoked with copyfmt_event. The final step is to copy exceptions().

Definition at line 63 of file basic_ios.tcc.

References std::basic_ios< _CharT, _Traits >::exceptions(), std::basic_ios< _CharT, _Traits >::fill(), std::ios_base::flags(), std::ios_base::getloc(), std::ios_base::precision(), std::basic_ios< _CharT, _Traits >::tie(), std::tie(), and std::ios_base::width().

4.310.5.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::eof ( ) const [inline], [inherited]

Fast error checking.

Returns

True if the eofbit is set.

Note that other iostate flags may also be set.

Definition at line 190 of file basic_ios.h.

4.310.5.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::exceptions ( ) const [inline], [inherited]

Throwing exceptions on errors.

Returns

The current exceptions mask.

This changes nothing in the stream. See the one-argument version of exceptions(iostate) for the meaning of the return value.

Definition at line 222 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt().

4.310.5.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::exceptions (iostate *__except*) [inline], [inherited]

Throwing exceptions on errors.

Parameters

__except	The new exceptions mask.

By default, error flags are set silently. You can set an exceptions mask for each stream; if a bit in the mask becomes set in the error flags, then an exception of type std::ios_base::failure is thrown.

If the error flag is already set when the exceptions mask is added, the exception is immediately thrown. Try running the following under GCC 3.1 or later:

```
#include <iostream>
#include <fstream>
#include <exception>

int main()
{
    std::set_terminate (__gnu_cxx::__verbose_terminate_handler
      );

    std::ifstream f ("/etc/motd");

    std::cerr << "Setting badbit\n";
    f.setstate (std::ios_base::badbit);

    std::cerr << "Setting exception mask\n";
    f.exceptions (std::ios_base::badbit);
}
```

Definition at line 257 of file basic_ios.h.

4.310.5.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::fail ( ) const [inline], [inherited]

Fast error checking.

Returns

True if either the badbit or the failbit is set.

Checking the badbit in fail() is historical practice. Note that other iostate flags may also be set.

Definition at line 201 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::operator bool(), std::basic_ios< char, char_traits< char > >::operator!(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.310.5.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill ( ) const [inline], [inherited]

Retrieves the *empty* character.

Returns

The current fill character.

It defaults to a space (' ') in the current locale.

Definition at line 370 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::basic_ios< char, char_traits< char > >::fill().

4.310.5.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::fill (char_type *__ch*) [inline], [inherited]

Sets a new *empty* character.

Parameters

__ch	The new character.

Returns

The previous fill character.

The fill character is used to fill out space when P+ characters have been requested (e.g., via setw), Q characters are actually used, and Q<P. It defaults to a space (' ') in the current locale.

Definition at line 390 of file basic_ios.h.

4.310.5.12 fmtflags std::ios_base::flags ( ) const [inline], [inherited]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.310.5.13 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline], [inherited]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.310.5.14 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::flush ( ) [inherited]

Synchronizing the stream buffer.

Returns

∗this

If `rdbuf()` is a null pointer, changes nothing.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit.

Definition at line 211 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.15 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::gcount ( ) const [inline], [inherited]

Character counting.

Returns

The number of characters extracted by the previous unformatted input function dispatched for this stream.

Definition at line 269 of file istream.

4.310.5.16 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::get (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 244 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.17 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type & __c) [inherited]

Simple extraction.

Parameters

__c	The character in which to store data.

Returns

∗this

Tries to extract a character and store it in *__c*. If none are available, sets failbit and returns traits::eof().

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 280 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.18 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n, char_type __delim) [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *__s*.
__delim	A "stop" character.

Returns

*this

Characters are extracted and stored into *__s* until one of the following happens:

- `__n-1` characters are stored
- the input sequence reaches EOF
- the next character equals *__delim*, in which case the character is not extracted

If no characters are stored, failbit is set in the stream's error state.

In any case, a null character is stored into the next location in the array.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 317 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.310.5.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (char_type * __s, streamsize __n) [inline], [inherited]

Simple multiple-character extraction.

Parameters

__s	Pointer to an array.
__n	Maximum number of characters to store in *s*.

Returns

*this

Returns `get(__s,__n,widen('\n'))`.

Definition at line 354 of file istream.

4.310.5.20 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb,* char_type *__delim*) [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.
__delim	A "stop" character.

Returns

*this

Characters are extracted and inserted into *__sb* until one of the following happens:

- the input sequence reaches EOF
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted)
- the next character equals *__delim* (in this case, the character is not extracted)
- an exception occurs (and in this case is caught)

If no characters are stored, failbit is set in the stream's error state.

Definition at line 364 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_streambuf< _CharT, _Traits >::sputc().

4.310.5.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::get (__streambuf_type & *__sb*) [inline], [inherited]

Extraction into another streambuf.

Parameters

__sb	A streambuf in which to store data.

Returns

*this

Returns `get(__sb,widen('\n'))`.

Definition at line 387 of file istream.

4.310.5.22 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n, char_type __delim) [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.
__delim	A "stop" character.

Returns

*this

Extracts and stores characters into *__s* until one of the following happens. Note that these criteria are required to be tested in the order listed here, to allow an input line to exactly fill the *__s* array without setting failbit.

1. the input sequence reaches end-of-file, in which case eofbit is set in the stream error state
2. the next character equals `__delim`, in which case the character is extracted (and therefore counted in `gcount()`) but not stored
3. `__n-1` characters are stored, in which case failbit is set in the stream error state

If no characters are extracted, failbit is set. (An empty line of input should therefore not cause failbit to be set.)

In any case, a null character is stored in the next location in the array.

Definition at line 408 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

Referenced by std::basic_istream< char >::getline().

4.310.5.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::getline (char_type * __s, streamsize __n) [inline], [inherited]

String extraction.

Parameters

__s	A character array in which to store the data.
__n	Maximum number of characters to extract.

Returns

*this

Returns `getline(__s,__n,widen('\n'))`.

Definition at line 427 of file istream.

4.310.5.24 locale std::ios_base::getloc ( ) const [inline], [inherited]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.310.5.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::good ( ) const [inline], [inherited]

Fast error checking.

Returns

True if no error flags are set.

A wrapper around rdstate.

Definition at line 180 of file basic_ios.h.

Referenced by std::__detail::operator>>(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.310.5.26 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize *__n,* int_type *__delim*) [inherited]

Discarding characters.

Parameters

__n	Number of characters to discard.
__delim	A "stop" character.

Returns

*this

Extracts characters and throws them away until one of the following happens:

- if *__n* != `std::numeric_limits<int>::max()`, *__n* characters are extracted
- the input sequence reaches end-of-file
- the next character equals *__delim* (in this case, the character is extracted); note that this condition will never occur if *__delim* equals `traits::eof()`.

NB: Provide three overloads, instead of the single function (with defaults) mandated by the Standard: this leads to a better performing implementation, while still conforming to the Standard.

Definition at line 563 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.310.5.27 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (streamsize __n) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 501 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), and std::basic_streambuf< _CharT, _Traits >::snextc().

4.310.5.28 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::ignore (void) [inherited]

Simple extraction.

Returns

A character, or eof().

Tries to extract a character. If none are available, sets failbit and returns traits::eof().

Definition at line 468 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.29 template<typename _CharT , typename _Traits > locale std::basic_ios< _CharT, _Traits >::imbue (const locale & __loc) [inherited]

Moves to a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls `ios_base::imbue(loc)`, and if a stream buffer is associated with this stream, calls that buffer's `pubimbue(loc)`.

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.html

Definition at line 114 of file basic_ios.tcc.

References std::ios_base::imbue().

Referenced by std::operator<<().

4.310.5.30 template<typename _CharT, typename _Traits> void std::basic_ios< _CharT, _Traits >::init (basic_streambuf< _CharT, _Traits > * *__sb*) [protected], [inherited]

All setup is performed here.

This is called from the public constructor. It is not virtual and cannot be redefined.

Definition at line 126 of file basic_ios.tcc.

Referenced by std::basic_fstream< _CharT, _Traits >::basic_fstream(), std::basic_ifstream< _CharT, _Traits >::basic_ifstream(), std::basic_ios< char, char_traits< char > >::basic_ios(), std::basic_istream< char >::basic_istream(), std::basic_istringstream< _CharT, _Traits, _Alloc >::basic_istringstream(), std::basic_ofstream< _CharT, _Traits >::basic_ofstream(), std::basic_ostream< char >::basic_ostream(), std::basic_ostringstream< _CharT, _Traits, _Alloc >::basic_ostringstream(), and std::basic_stringstream< _CharT, _Traits, _Alloc >::basic_stringstream().

4.310.5.31 long& std::ios_base::iword (int *__ix*) [inline], [inherited]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.310.5.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> char std::basic_ios< _CharT, _Traits >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Squeezes characters.

Parameters

__c	The character to narrow.
__dfault	The character to narrow.

Returns

The narrowed character.

Maps a character of `char_type` to a character of `char`, if possible.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).narrow(c,dfault)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 430 of file basic_ios.h.

4.310.5.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ios< _CharT, _Traits >::operator bool ( ) const [inline], [explicit], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 117 of file basic_ios.h.

4.310.5.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> bool std::basic_ios< _CharT, _Traits >::operator! ( ) const [inline], [inherited]

The quick-and-easy status check.

This allows you to write constructs such as `if (!a_stream) ...` and `while (a_stream) ...`

Definition at line 125 of file basic_ios.h.

4.310.5.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ostream_type &(*)(__ostream_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 108 of file ostream.

4.310.5.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (__ios_type &(*)(__ios_type &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 117 of file ostream.

4.310.5.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (ios_base &(*)(ios_base &) *__pf*) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::endl` and `std::hex` use these functions in constructs like "std::cout << std::endl". For more information, see the iomanip header.

Definition at line 127 of file ostream.

4.310.5.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long *__n*) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 166 of file ostream.

4.310.5.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 170 of file ostream.

4.310.5.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (bool __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 174 of file ostream.

4.310.5.41 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (short __n) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 92 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.310.5.42 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned short __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 181 of file ostream.

4.310.5.43 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (int *__n*) [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 106 of file ostream.tcc.

References std::ios_base::basefield, std::ios_base::flags(), std::ios_base::hex, and std::ios_base::oct.

4.310.5.44 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned int *__n*) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 192 of file ostream.

4.310.5.45 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long long *__n*) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 201 of file ostream.

4.310.5.46 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (unsigned long long __n) [inline], [inherited]

Integer arithmetic inserters.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 205 of file ostream.

4.310.5.47 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 220 of file ostream.

4.310.5.48 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (float __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to perform numeric formatting.

Definition at line 224 of file ostream.

4.310.5.49 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (long double __f) [inline], [inherited]

Floating point arithmetic inserters.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 232 of file ostream.

4.310.5.50 template<typename _CharT, typename _Traits = char_traits<_CharT>> __ostream_type& std::basic_ostream< _CharT, _Traits >::operator<< (const void * *__p*) [inline], [inherited]

Pointer arithmetic inserters.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to perform numeric formatting.

Definition at line 245 of file ostream.

4.310.5.51 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::operator<< (__streambuf_type * *__sb*) [inherited]

Extracting from another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from `__sb` and inserted into `*this` until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output sequence fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs while getting a character from `__sb`, which sets failbit in the error state

If the function inserts no characters, failbit is set.

Definition at line 120 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.52 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__istream_type &(*)(__istream_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 120 of file istream.

4.310.5.53 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (__ios_type &(*)(__ios_type &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 124 of file istream.

4.310.5.54 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (ios_base &(*)(ios_base &) __pf) [inline], [inherited]

Interface for manipulators.

Manipulators such as `std::ws` and `std::dec` use these functions in constructs like `std::cin >> std::ws`. For more information, see the iomanip header.

Definition at line 131 of file istream.

4.310.5.55 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (bool & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 168 of file istream.

4.310.5.56 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (short & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 122 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.57 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned short & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 175 of file istream.

4.310.5.58 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (int & __n) [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 167 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::failbit, std::num_get< _CharT, _InIter >::get(), std::ios_base::goodbit, and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.59 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned int & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 182 of file istream.

4.310.5.60 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 186 of file istream.

4.310.5.61 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 190 of file istream.

4.310.5.62 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

*this if successful

These functions use the stream's current locale (specifically, the num_get facet) to parse the input data.

Definition at line 195 of file istream.

4.310.5.63 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (unsigned long long & __n) [inline], [inherited]

Integer arithmetic extractors.

Parameters

__n	A variable of builtin integral type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 199 of file istream.

4.310.5.64 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (float & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 214 of file istream.

4.310.5.65 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 218 of file istream.

4.310.5.66 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (long double & __f) [inline], [inherited]

Floating point arithmetic extractors.

Parameters

__f	A variable of builtin floating point type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 222 of file istream.

4.310.5.67 template<typename _CharT, typename _Traits = char_traits<_CharT>> __istream_type& std::basic_istream< _CharT, _Traits >::operator>> (void *& __p) [inline], [inherited]

Basic arithmetic extractors.

Parameters

__p	A variable of pointer type.

Returns

`*this` if successful

These functions use the stream's current locale (specifically, the `num_get` facet) to parse the input data.

Definition at line 235 of file istream.

4.310.5.68 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::operator>> (__streambuf_type * *__sb*) [inherited]

Extracting into another streambuf.

Parameters

__sb	A pointer to a streambuf

This function behaves like one of the basic arithmetic extractors, in that it also constructs a sentry object and has the same error handling behavior.

If `__sb` is NULL, the stream will set failbit in its error state.

Characters are extracted from this stream and inserted into the `__sb` streambuf until one of the following occurs:

- the input stream reaches end-of-file,
- insertion into the output buffer fails (in this case, the character that would have been inserted is not extracted), or
- an exception occurs (and in this case is caught)

If the function inserts no characters, failbit is set.

Definition at line 212 of file istream.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.69 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::int_type std::basic_istream< _CharT, _Traits >::peek (void) [inherited]

Looking ahead in the stream.

Returns

The next character, or eof().

If, after constructing the sentry object, `good()` is false, returns `traits::eof()`. Otherwise reads but does not extract the next input character.

Definition at line 628 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.70 streamsize std::ios_base::precision ( ) const [inline], [inherited]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.310.5.71 streamsize std::ios_base::precision (streamsize __prec) [inline], [inherited]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.310.5.72 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::put (char_type __c) [inherited]

Simple insertion.

Parameters

__c	The character to insert.

Returns

*this

Tries to insert __c.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 149 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.73 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::putback (char_type __c) [inherited]

Unextracting a single character.

Parameters

__c	The character to push back into the input stream.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sputbackc(c)`.

If `rdbuf()` is null or if `sputbackc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 719 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sputbackc().

Referenced by std::operator>>().

4.310.5.74 void*& std::ios_base::pword (int *__ix*) [inline], [inherited]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.310.5.75 template<typename _CharT, typename _Traits> basic_streambuf< _CharT, _Traits > * std::basic_ios< _CharT, _Traits >::rdbuf (basic_streambuf< _CharT, _Traits > * *__sb*) [inherited]

Changing the underlying buffer.

Parameters

__sb	The new stream buffer.

Returns

The previous stream buffer.

Associates a new buffer with the current stream, and clears the error state.

Due to historical accidents which the LWG refuses to correct, the I/O library suffers from a design error: this function is hidden in derived classes by overrides of the zero-argument `rdbuf()`, which is non-virtual for hysterical raisins. As a result, you must use explicit qualifications to access this function via any derived class. For example:

```
std::fstream     foo;         // or some other derived type
std::streambuf*  p = .....;

foo.ios::rdbuf(p);            // ios == basic_ios<char>
```

Definition at line 53 of file basic_ios.tcc.

4.310.5.76 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __stringbuf_type* std::basic_stringstream< _CharT, _Traits, _Alloc >::rdbuf ( ) const [inline]

Accessing the underlying buffer.

Returns

The current basic_stringbuf buffer.

This hides both signatures of std::basic_ios::rdbuf().

Definition at line 823 of file sstream.

4.310.5.77 template<typename _CharT, typename _Traits = char_traits<_CharT>> iostate std::basic_ios< _CharT, _Traits >::rdstate ( ) const [inline], [inherited]

Returns the error state of the stream buffer.

Returns

A bit pattern (well, isn't everything?)

See std::ios_base::iostate for the possible bit values. Most users will call one of the interpreting wrappers, e.g., good().

Definition at line 137 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ios< char, char_traits< char > >::good(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ios< char, char_traits< char > >::setstate(), and std::basic_istream< _CharT, _Traits >::unget().

4.310.5.78 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::read (char_type * __s, streamsize __n) [inherited]

Extraction without delimiters.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

*this

If the stream state is `good()`, extracts characters and stores them into *__s* until one of the following happens:

- *__n* characters are stored
- the input sequence reaches end-of-file, in which case the error state is set to `failbit|eofbit`.

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 658 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.79 template<typename _CharT , typename _Traits > streamsize std::basic_istream< _CharT, _Traits >::readsome (char_type * __s, streamsize __n) [inherited]

Extraction until the buffer is exhausted, but no more.

Parameters

__s	A character array.
__n	Maximum number of characters to store.

Returns

The number of characters extracted.

Extracts characters and stores them into *__s* depending on the number of characters remaining in the streambuf's buffer, `rdbuf()->in_avail()`, called `A` here:

- if `A == -1`, sets eofbit and extracts no characters
- if `A == 0`, extracts no characters
- if `A > 0`, extracts `min(A,n)`

The goal is to empty the current buffer, and to not request any more from the external input sequence controlled by the streambuf.

Definition at line 687 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::goodbit, std::min(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.80 void std::ios_base::register_callback (event_callback __fn, int __index) [inherited]

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.310.5.81 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (pos_type __pos) [inherited]

Changing the current read position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(__pos)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 853 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.82 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::seekg (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current read position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(__off,__dir)`. If that function fails, sets failbit.

Note

This function first clears eofbit. It does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 892 of file istream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::in, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.83 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (pos_type *__pos*) [inherited]

Changing the current write position.

Parameters

__pos	A file position object.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekpos(pos)`. If that function fails, sets failbit.

Definition at line 258 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.84 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::seekp (off_type *__off,* ios_base::seekdir *__dir*) [inherited]

Changing the current write position.

Parameters

__off	A file offset object.
__dir	The direction in which to seek.

Returns

*this

If `fail()` is not true, calls `rdbuf()->pubseekoff(off,dir)`. If that function fails, sets failbit.

Definition at line 290 of file ostream.tcc.

References std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::failbit, std::ios_base::goodbit, std::ios_base::out, std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.85 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.310.5.86 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline],[inherited]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.310.5.87 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_ios< _CharT, _Traits >::setstate (iostate *__state*) [inline], [inherited]

Sets additional flags in the error state.

Parameters

__state	The additional state flag(s) to set.

See std::ios_base::iostate for the possible bit values.

Definition at line 157 of file basic_ios.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::tr2::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.310.5.88 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> __string_type std::basic_stringstream< _CharT, _Traits, _Alloc >::str ( ) const [inline]

Copying out the string buffer.

Returns

`rdbuf()->str()`

Definition at line 831 of file sstream.

4.310.5.89 template<typename _CharT , typename _Traits = char_traits<_CharT>, typename _Alloc = allocator<_CharT>> void std::basic_stringstream< _CharT, _Traits, _Alloc >::str (const __string_type & *__s*) [inline]

Setting a new buffer.

Parameters

__s	The string to use as a new sequence.

Calls `rdbuf()->str(s)`.

Definition at line 841 of file sstream.

4.310.5.90 template<typename _CharT , typename _Traits > int std::basic_istream< _CharT, _Traits >::sync (void) [inherited]

Synchronizing the stream buffer.

Returns

0 on success, -1 on failure

If `rdbuf()` is a null pointer, returns -1.

Otherwise, calls `rdbuf()->pubsync()`, and if that returns -1, sets badbit and returns -1.

Otherwise, returns 0.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`.

Definition at line 789 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::goodbit, std::basic_streambuf< _CharT, _Traits >::pubsync(), std::basic_ios< _CharT, _Traits >::rdbuf(), and std::basic_ios< _CharT, _Traits >::setstate().

4.310.5.91 static bool std::ios_base::sync_with_stdio (bool *__sync* = `true`) [static], [inherited]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea
html#std.io.filestreams.binary

4.310.5.92 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits >::pos_type std::basic_istream< _CharT, _Traits >::tellg (void) [inherited]

Getting the current read position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,in)`.

Note

This function does not count the number of characters extracted, if any, and therefore does not affect the next call to `gcount()`. At variance with putback, unget and seekg, eofbit is not cleared first.

Definition at line 825 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::in, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.310.5.93 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits >::pos_type std::basic_ostream< _CharT, _Traits >::tellp ( ) [inherited]

Getting the current write position.

Returns

A file position object.

If `fail()` is not false, returns `pos_type`(-1) to indicate failure. Otherwise returns `rdbuf()->pubseekoff(0,cur,out)`.

Definition at line 237 of file ostream.tcc.

References std::ios_base::badbit, std::ios_base::cur, std::basic_ios< _CharT, _Traits >::fail(), std::ios_base::out, and std::basic_ios< _CharT, _Traits >::rdbuf().

4.310.5.94 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie ( ) const [inline], [inherited]

Fetches the current *tied* stream.

Returns

A pointer to the tied stream, or NULL if the stream is not tied.

A stream may be *tied* (or synchronized) to a second output stream. When this stream performs any I/O, the tied stream is first flushed. For example, `std::cin` is tied to `std::cout`.

Definition at line 295 of file basic_ios.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.310.5.95 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_ostream<_CharT, _Traits>* std::basic_ios< _CharT, _Traits >::tie (basic_ostream< _CharT, _Traits > * *__tiestr*) [inline], [inherited]

Ties this stream to an output stream.

Parameters

__tiestr	The output stream.

Returns

The previously tied output stream, or NULL if the stream was not tied.

This sets up a new tie; see tie() for more.

Definition at line 307 of file basic_ios.h.

4.310.5.96 template<typename _CharT , typename _Traits > basic_istream< _CharT, _Traits > & std::basic_istream< _CharT, _Traits >::unget (void) [inherited]

Unextracting the previous character.

Returns

*this

If `rdbuf()` is not null, calls `rdbuf()->sungetc(c)`.

If `rdbuf()` is null or if `sungetc()` fails, sets badbit in the error state.

Note

This function first clears eofbit. Since no characters are extracted, the next call to `gcount()` will return 0, as required by DR 60.

Definition at line 754 of file istream.tcc.

References std::basic_istream< _CharT, _Traits >::_M_gcount, std::ios_base::badbit, std::basic_ios< _CharT, _Traits >::clear(), std::ios_base::eofbit, std::ios_base::goodbit, std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::rdstate(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_streambuf< _CharT, _Traits >::sungetc().

Referenced by std::__detail::operator>>().

4.310.5.97 void std::ios_base::unsetf (fmtflags *__mask*) [inline], [inherited]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.310.5.98 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type std::basic_ios< _CharT, _Traits >::widen (char *__c*) const [inline], [inherited]

Widens characters.

Parameters

__c	The character to widen.

Returns

The widened character.

Maps a character of `char` to a character of `char_type`.

Returns the result of

```
std::use_facet<ctype<char_type> >(getloc()).widen(c)
```

Additional I10n notes are at http://gcc.gnu.org/onlinedocs/libstdc++/manual/localization.-html

Definition at line 449 of file basic_ios.h.

Referenced by std::basic_ios< char, char_traits< char > >::fill(), std::basic_istream< char >::get(), std::basic_-istream< char >::getline(), std::getline(), std::tr2::operator>>(), and std::operator>>().

4.310.5.99 streamsize std::ios_base::width ( ) const [inline], [inherited]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std-::operator>>().

4.310.5.100 streamsize std::ios_base::width (streamsize __wide) [inline], [inherited]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.310.5.101 template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & std::basic_ostream< _CharT, _Traits >::write (const char_type * __s, streamsize __n) [inherited]

Character string insertion.

Parameters

__s	The array to insert.
__n	Maximum number of characters to insert.

Returns

*this

Characters are copied from __s and inserted into the stream until one of the following happens:

- __n characters are inserted
- inserting into the output sequence fails (in this case, badbit will be set in the stream's error state)

Note

This function is not overloaded on signed char and unsigned char.

Definition at line 183 of file ostream.tcc.

References std::basic_ostream< _CharT, _Traits >::_M_write(), and std::ios_base::badbit.

4.310.5.102 static int std::ios_base::xalloc ( ) throw) [static], [inherited]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.310.6 Member Data Documentation

4.310.6.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_istream< _CharT, _Traits >::_M_gcount [protected], [inherited]

The number of characters extracted in the previous unformatted function; see gcount().

Definition at line 82 of file istream.

Referenced by std::basic_istream< char >::gcount(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::unget(), and std::basic_istream< char >::~basic_istream().

4.310.6.2 const fmtflags std::ios_base::adjustfield [static], [inherited]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.310.6.3 const openmode std::ios_base::app [static], [inherited]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.310.6.4 const openmode std::ios_base::ate [static], [inherited]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.310.6.5 const iostate std::ios_base::badbit [static], [inherited]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.310.6.6 const fmtflags std::ios_base::basefield [static], [inherited]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.310.6.7 const seekdir std::ios_base::beg [static], [inherited]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.310.6.8 const openmode std::ios_base::binary [static], [inherited]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.310.6.9 const fmtflags std::ios_base::boolalpha [static], [inherited]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.310.6.10 const seekdir std::ios_base::cur [static], [inherited]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_-

filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.310.6.11 const fmtflags std::ios_base::dec [static], [inherited]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.310.6.12 const seekdir std::ios_base::end [static], [inherited]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.310.6.13 const iostate std::ios_base::eofbit [static], [inherited]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.310.6.14 const iostate std::ios_base::failbit [static], [inherited]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.310.6.15 const fmtflags std::ios_base::fixed [static], [inherited]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.310.6.16 const fmtflags std::ios_base::floatfield [static], [inherited]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.310.6.17 const iostate std::ios_base::goodbit [static], [inherited]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.310.6.18 const fmtflags std::ios_base::hex [static], [inherited]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.310.6.19 const openmode std::ios_base::in [static], [inherited]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.310.6.20 const fmtflags std::ios_base::internal [static], [inherited]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.310.6.21 const fmtflags std::ios_base::left [static], [inherited]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.310.6.22 const fmtflags std::ios_base::oct [static], [inherited]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.310.6.23 const openmode std::ios_base::out [static], [inherited]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.310.6.24 const fmtflags std::ios_base::right [static], [inherited]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.310.6.25 const fmtflags std::ios_base::scientific [static], [inherited]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.310.6.26 const fmtflags std::ios_base::showbase [static], [inherited]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.310.6.27 const fmtflags std::ios_base::showpoint [static], [inherited]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.310.6.28 const fmtflags std::ios_base::showpos [static], [inherited]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.310.6.29 const fmtflags std::ios_base::skipws [static], [inherited]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.310.6.30 const openmode std::ios_base::trunc [static], [inherited]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.310.6.31 const fmtflags std::ios_base::unitbuf [static], [inherited]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.310.6.32 const fmtflags std::ios_base::uppercase [static], [inherited]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following files:

- iosfwd
- sstream

4.311 std::bernoulli_distribution Class Reference

Classes

- struct param_type

Public Types

- typedef bool result_type

Public Member Functions

- bernoulli_distribution ()
- bernoulli_distribution (double __p)
- **bernoulli_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)

- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- double p () const
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const bernoulli_distribution &__d1, const bernoulli_distribution &__d2)

4.311.1 Detailed Description

A Bernoulli random number distribution.

Generates a sequence of true and false values with likelihood p that true will come up and $(1-p)$ that false will appear.

Definition at line 3512 of file random.h.

4.311.2 Member Typedef Documentation

4.311.2.1 typedef bool std::bernoulli_distribution::result_type

The type of the range of the distribution.

Definition at line 3516 of file random.h.

4.311.3 Constructor & Destructor Documentation

4.311.3.1 std::bernoulli_distribution::bernoulli_distribution ( ) [inline]

Constructs a Bernoulli distribution with likelihood 0.5.

Definition at line 3552 of file random.h.

4.311.3.2 std::bernoulli_distribution::bernoulli_distribution (double __p) [inline], [explicit]

Constructs a Bernoulli distribution with likelihood p.

Parameters

__p	[IN] The likelihood of a true result being returned. Must be in the interval $[0, 1]$.

Definition at line 3561 of file random.h.

4.311.4 Member Function Documentation

4.311.4.1 result_type std::bernoulli_distribution::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 3611 of file random.h.

References std::numeric_limits< _Tp >::max().

4.311.4.2 result_type std::bernoulli_distribution::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 3604 of file random.h.

References std::numeric_limits< _Tp >::min().

4.311.4.3 template<typename _UniformRandomNumberGenerator > result_type std::bernoulli_distribution::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 3619 of file random.h.

4.311.4.4 double std::bernoulli_distribution::p ( ) const [inline]

Returns the p parameter of the distribution.

Definition at line 3582 of file random.h.

4.311.4.5 param_type std::bernoulli_distribution::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 3589 of file random.h.

Referenced by std::operator>>().

4.311.4.6 void std::bernoulli_distribution::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 3597 of file random.h.

4.311.4.7 void std::bernoulli_distribution::reset ( ) [inline]

Resets the distribution state.

Does nothing for a Bernoulli distribution.

Definition at line 3576 of file random.h.

4.311.5 Friends And Related Function Documentation

4.311.5.1 bool operator== (const bernoulli_distribution & *__d1,* const bernoulli_distribution & *__d2*) [friend]

Return true if two Bernoulli distributions have the same parameters.

Definition at line 3661 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.312 std::bidirectional_iterator_tag Struct Reference

Inheritance diagram for std::bidirectional_iterator_tag:

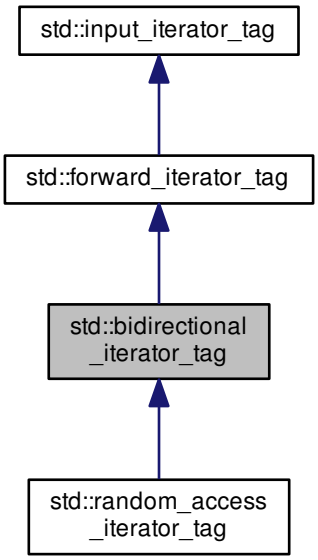

4.312.1 Detailed Description

Bidirectional iterators support a superset of forward iterator operations.

Definition at line 103 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.313 __gnu_pbds::detail::bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >:

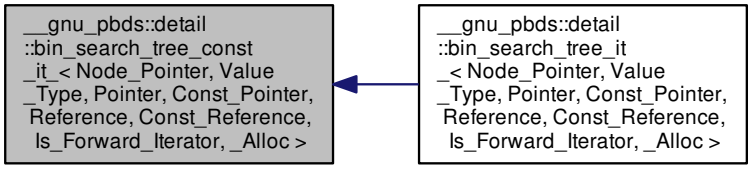

Public Types

- typedef Const_Pointer **const_pointer**
- typedef Const_Reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef Pointer **pointer**
- typedef Reference **reference**
- typedef Value_Type **value_type**

Public Member Functions

- **bin_search_tree_const_it_** (const Node_Pointer p_nd=0)
- **bin_search_tree_const_it_** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other)
- bool **operator!=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other) const
- bool **operator!=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other) const
- const_reference **operator*** () const
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator++** ()
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > **operator++** (int)

- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator--** ()
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > **operator--** (int)
- const_pointer **operator->** () const
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other)
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other)
- bool **operator==** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other) const
- bool **operator==** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other) const

Public Attributes

- Node_Pointer **m_p_nd**

Protected Member Functions

- void **dec** (false_type)
- void **dec** (true_type)
- void **inc** (false_type)
- void **inc** (true_type)

4.313.1 Detailed Description

template<typename Node_Pointer, typename Value_Type, typename Pointer, typename Const_Pointer, typename Reference, typename Const_Reference, bool Is_Forward_Iterator, typename _Alloc>class __gnu_pbds::detail::bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >

Const iterator.

Definition at line 105 of file point_iterators.hpp.

The documentation for this class was generated from the following file:

- point_iterators.hpp

4.314 __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >:



Public Types

- typedef Const_Iterator const_reference
- typedef trivial_iterator_difference_type difference_type
- typedef trivial_iterator_tag iterator_category
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference metadata_const_reference
- typedef Node::metadata_type metadata_type
- typedef Const_Iterator reference
- typedef Const_Iterator value_type

Public Member Functions

- **bin_search_tree_const_node_it_** (const node_pointer p_nd=0)
- bin_search_tree_const_node_it_ < Node, Const_Iterator, Iterator, _Alloc > get_l_child () const
- metadata_const_reference get_metadata () const
- bin_search_tree_const_node_it_ < Node, Const_Iterator, Iterator, _Alloc > get_r_child () const
- bool operator!= (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > &other) const
- const_reference operator* () const
- bool operator== (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > &other) const

Public Attributes

- node_pointer **m_p_nd**

4.314.1 Detailed Description

template<typename Node, class Const_Iterator, class Iterator, typename _Alloc>class __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >

Const node iterator.

Definition at line 58 of file bin_search_tree_/node_iterators.hpp.

4.314.2 Member Typedef Documentation

4.314.2.1 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Const_Iterator __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::const_reference

Iterator's __const reference type.

Definition at line 77 of file bin_search_tree_/node_iterators.hpp.

4.314.2.2 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef trivial_iterator_difference_type __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::difference_type

Difference type.

Definition at line 68 of file bin_search_tree_/node_iterators.hpp.

4.314.2.3 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef trivial_iterator_tag __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::iterator_category

Category.

Definition at line 65 of file bin_search_tree_/node_iterators.hpp.

4.314.2.4 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef rebind_traits<_Alloc, metadata_type>::const_reference __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::metadata_const_reference

Const metadata reference type.

Definition at line 84 of file bin_search_tree_/node_iterators.hpp.

4.314.2.5 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Node::metadata_type __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::metadata_type

Metadata type.

Definition at line 80 of file bin_search_tree_/node_iterators.hpp.

4.314.2.6 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Const_Iterator __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::reference

Iterator's reference type.

Definition at line 74 of file bin_search_tree_/node_iterators.hpp.

4.314.2.7 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Const_Iterator __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::value_type

Iterator's value type.

Definition at line 71 of file bin_search_tree_/node_iterators.hpp.

4.314.3 Member Function Documentation

4.314.3.1 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bin_search_tree_const_node_it_<Node, Const_Iterator, Iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_l_child ( ) const [inline]

Returns the __const node iterator associated with the left node.

Definition at line 103 of file bin_search_tree_/node_iterators.hpp.

4.314.3.2 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > metadata_const_reference __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_metadata ( ) const [inline]

Metadata access.

Definition at line 98 of file bin_search_tree_/node_iterators.hpp.

4.314.3.3 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bin_search_tree_const_node_it_<Node, Const_Iterator, Iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_r_child ( ) const [inline]

Returns the __const node iterator associated with the right node.

Definition at line 108 of file bin_search_tree_/node_iterators.hpp.

4.314.3.4 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bool __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator!= (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > & *other*) const [inline]

Compares (negatively) to a different iterator object.

Definition at line 118 of file bin_search_tree_/node_iterators.hpp.

4.314.3.5 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > const_reference __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator* ( ) const [inline]

Access.

Definition at line 93 of file bin_search_tree_/node_iterators.hpp.

4.314.3.6 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bool __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator== (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > & *other*) const [inline]

Compares to a different iterator object.

Definition at line 113 of file bin_search_tree_/node_iterators.hpp.

The documentation for this class was generated from the following file:

- bin_search_tree_/node_iterators.hpp

4.315 __gnu_pbds::detail::bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >:

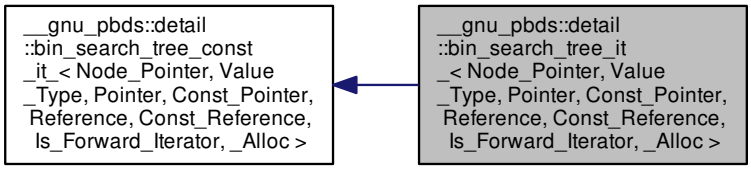

Public Types

- typedef Const_Pointer **const_pointer**
- typedef Const_Reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef std::bidirectional_iterator_tag **iterator_category**
- typedef Pointer **pointer**
- typedef Reference **reference**
- typedef Value_Type **value_type**

Public Member Functions

- **bin_search_tree_it_** (const Node_Pointer p_nd=0)
- **bin_search_tree_it_** (const bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other)
- bool **operator!=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other) const
- bool **operator!=** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other) const
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > ::reference **operator*** () const
- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator++** ()

- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > **operator++** (int)
- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator--** ()
- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > **operator--** (int)
- bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > ::pointer **operator->** () const
- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator=** (const bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other)
- bin_search_tree_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > & **operator=** (const bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other)
- bool **operator==** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > &other) const
- bool **operator==** (const bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference,!Is_Forward_Iterator, _Alloc > &other) const

Public Attributes

- Node_Pointer **m_p_nd**

Protected Types

- typedef bin_search_tree_const_it_ < Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc > **base_it_type**

Protected Member Functions

- void **dec** (false_type)
- void **dec** (true_type)
- void **inc** (false_type)
- void **inc** (true_type)

4.315.1 Detailed Description

template<typename Node_Pointer, typename Value_Type, typename Pointer, typename Const_Pointer, typename Reference, typename Const_Reference, bool Is_Forward_Iterator, typename _Alloc>class __gnu_pbds::detail::bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >

Iterator.

Definition at line 282 of file point_iterators.hpp.

The documentation for this class was generated from the following file:

- point_iterators.hpp

4.316 __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >:



Public Types

- typedef Iterator const_reference
- typedef trivial_iterator_difference_type difference_type
- typedef trivial_iterator_tag iterator_category
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference metadata_const_reference
- typedef Node::metadata_type metadata_type
- typedef Iterator reference
- typedef Iterator value_type

Public Member Functions

- **bin_search_tree_node_it_** (const node_pointer p_nd=0)
- bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc > get_l_child () const
- metadata_const_reference get_metadata () const
- bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc > get_r_child () const
- bool operator!= (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > &other) const
- Iterator operator* () const
- bool operator== (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > &other) const

Public Attributes

- node_pointer **m_p_nd**

4.316.1 Detailed Description

template<typename Node, class Const_Iterator, class Iterator, typename _Alloc>class __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >

Node iterator.

Definition at line 132 of file bin_search_tree_/node_iterators.hpp.

4.316.2 Member Typedef Documentation

4.316.2.1 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Iterator __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::const_reference

Iterator's __const reference type.

Definition at line 146 of file bin_search_tree_/node_iterators.hpp.

4.316.2.2 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef trivial_iterator_difference_type __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::difference_type [inherited]

Difference type.

Definition at line 68 of file bin_search_tree_/node_iterators.hpp.

4.316.2.3 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef trivial_iterator_tag __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::iterator_category [inherited]

Category.

Definition at line 65 of file bin_search_tree_/node_iterators.hpp.

4.316.2.4 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef rebind_traits<_Alloc, metadata_type>::const_reference __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::metadata_const_reference [inherited]

Const metadata reference type.

Definition at line 84 of file bin_search_tree_/node_iterators.hpp.

4.316.2.5 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Node::metadata_type __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::metadata_type [inherited]

Metadata type.

Definition at line 80 of file bin_search_tree_/node_iterators.hpp.

4.316.2.6 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Iterator __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::reference

Iterator's reference type.

Definition at line 143 of file bin_search_tree_/node_iterators.hpp.

4.316.2.7 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > typedef Iterator __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::value_type

Iterator's value type.

Definition at line 140 of file bin_search_tree_/node_iterators.hpp.

4.316.3 Member Function Documentation

4.316.3.1 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_l_child ( ) const [inline]

Returns the node iterator associated with the left node.

Definition at line 160 of file bin_search_tree_/node_iterators.hpp.

4.316.3.2 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > metadata_const_reference __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_metadata ( ) const [inline], [inherited]

Metadata access.

Definition at line 98 of file bin_search_tree_/node_iterators.hpp.

4.316.3.3 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::get_r_child ( ) const [inline]

Returns the node iterator associated with the right node.

Definition at line 168 of file bin_search_tree_/node_iterators.hpp.

4.316.3.4 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bool __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator!= (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > & *other*) const [inline], [inherited]

Compares (negatively) to a different iterator object.

Definition at line 118 of file bin_search_tree_/node_iterators.hpp.

4.316.3.5 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > Iterator __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator* ( ) const [inline]

Access.

Definition at line 155 of file bin_search_tree_/node_iterators.hpp.

4.316.3.6 template<typename Node , class Const_Iterator , class Iterator , typename _Alloc > bool __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >::operator== (const bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc > & *other*) const [inline], [inherited]

Compares to a different iterator object.

Definition at line 113 of file bin_search_tree_/node_iterators.hpp.

The documentation for this class was generated from the following file:

- bin_search_tree_/node_iterators.hpp

4.317 __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc > Struct Template Reference

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**
- typedef Node **node**
- typedef bin_search_tree_const_node_it_ < Node, point_const_iterator, point_iterator, _Alloc > node_const_iterator
- typedef

bin_search_tree_node_it_< Node, point_const_iterator, point_iterator, _Alloc > **node_iterator**

- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**
- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**
- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**
- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_iterator**
- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **reverse_iterator**

4.317.1 Detailed Description

template<typename Key, typename Mapped, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class _Cmp_Fn, typename _Alloc > class Node_Update, class Node, typename _Alloc>struct __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc >

Binary search tree traits, primary template.

Definition at line 63 of file bin_search_tree_/traits.hpp.

4.317.2 Member Typedef Documentation

4.317.2.1 template<typename Key, typename Mapped, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class _Cmp_Fn, typename _Alloc > class Node_Update, class Node, typename _Alloc> typedef bin_search_tree_const_node_it_< Node, point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 128 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- bin_search_tree_/traits.hpp

4.318 __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_Update, Node, _Alloc > Struct Template Reference

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**
- typedef Node **node**
- typedef bin_search_tree_const_node_it_ < Node, point_const_iterator, point_iterator, _Alloc > node_const_iterator
- typedef node_const_iterator **node_iterator**
- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**

- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**
- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**
- typedef point_const_iterator **point_iterator**
- typedef const_reverse_iterator **reverse_iterator**

4.318.1 Detailed Description

template<typename Key, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class _Cmp_Fn, typename _Alloc > class Node_Update, class Node, typename _Alloc>struct __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_-Update, Node, _Alloc >

Specialization.

Definition at line 166 of file bin_search_tree_/traits.hpp.

4.318.2 Member Typedef Documentation

4.318.2.1 template<typename Key , class Cmp_Fn , template< typename Node_CItr, class Node_Itr, class _Cmp_Fn, typename _Alloc > class Node_Update, class Node , typename _Alloc > typedef bin_search_tree_const_node_it_< Node, point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_Update, Node, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 212 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- bin_search_tree_/traits.hpp

4.319 __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 > Class Template Reference

Inheritance diagram for __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 >:

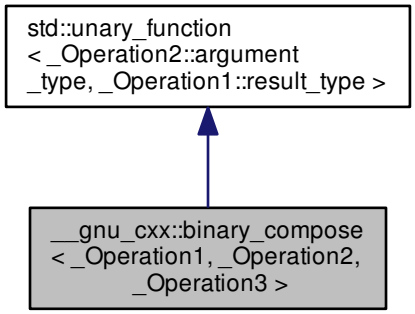

Public Types

- typedef _Operation2::argument_type argument_type
- typedef _Operation1::result_type result_type

Public Member Functions

- **binary_compose** (const _Operation1 &__x, const _Operation2 &__y, const _Operation3 &__z)
- _Operation1::result_type **operator()** (const typename _Operation2::argument_type &__x) const

Protected Attributes

- _Operation1 **_M_fn1**
- _Operation2 **_M_fn2**
- _Operation3 **_M_fn3**

4.319.1 Detailed Description

template<class _Operation1, class _Operation2, class _Operation3>class __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 >

An SGI extension .

Definition at line 142 of file ext/functional.

4.319.2 Member Typedef Documentation

4.319.2.1 typedef _Operation2::argument_type std::unary_function< _Operation2::argument_type , _Operation1::result_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.319.2.2 typedef _Operation1::result_type std::unary_function< _Operation2::argument_type , _Operation1::result_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- ext/functional

4.320 std::binary_function< _Arg1, _Arg2, _Result > Struct Template Reference

Inheritance diagram for std::binary_function< _Arg1, _Arg2, _Result >:



Public Types

- typedef _Arg1 first_argument_type
- typedef _Result result_type
- typedef _Arg2 second_argument_type

4.320.1 Detailed Description

template<typename _Arg1, typename _Arg2, typename _Result>struct std::binary_function< _Arg1, _Arg2, _Result >

This is one of the functor base classes.

Definition at line 118 of file stl_function.h.

4.320.2 Member Typedef Documentation

4.320.2.1 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Arg1 std::binary_function< _Arg1, _Arg2, _Result >::first_argument_type

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.320.2.2 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Result std::binary_function< _Arg1, _Arg2, _Result >::result_type

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.320.2.3 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Arg2 std::binary_function< _Arg1, _Arg2, _Result >::second_argument_type

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.321 __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef cond_dealtor
  < value_type, _Alloc > **cond_dealtor_t**

- typedef binary_heap_const_iterator_ < value_type, entry, simple_value, _Alloc > **const_iterator**
- typedef __rebind_v::const_pointer **const_pointer**
- typedef __rebind_v::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef __conditional_type < simple_value, value_type, pointer >::__type **entry**
- typedef rebind_traits< _Alloc, entry >::allocator_type **entry_allocator**
- typedef entry_cmp< Value_Type, Cmp_Fn, _Alloc, is_simple < Value_Type >::value >::type **entry_cmp**
- typedef rebind_traits< _Alloc, entry >::pointer **entry_pointer**
- typedef const_iterator **iterator**
- typedef binary_heap_point_const_iterator_ < value_type, entry, simple_value, _Alloc > **point_const_iterator**
- typedef point_const_iterator **point_iterator**
- typedef __rebind_v::pointer **pointer**
- typedef __rebind_v::reference **reference**
- typedef __gnu_pbds::detail::resize_policy < typename _Alloc::size_type > **resize_policy**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- **binary_heap** (const cmp_fn &)
- **binary_heap** (const binary_heap &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- void **erase** (point_iterator)
- void **erase_at** (entry_pointer, size_type, false_type)
- void **erase_at** (entry_pointer, size_type, true_type)
- template<typename Pred > binary_heap< Value_Type, Cmp_Fn, _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const

- size_type **get_new_size_for_arbitrary** (size_type) const
- size_type **get_new_size_for_grow** () const
- size_type **get_new_size_for_shrink** () const
- bool **grow_needed** (size_type) const
- void **join** (binary_heap &)
- size_type **max_size** () const
- void **modify** (point_iterator, const_reference)
- void **notify_arbitrary** (size_type)
- void **notify_grow_resize** ()
- void **notify_shrink_resize** ()
- template<typename Pred >
  binary_heap< Value_Type,
  Cmp_Fn, _Alloc >::size_type **partition** (Pred pred)
- void **pop** ()
- point_iterator **push** (const_reference)
- bool **resize_needed_for_grow** (size_type) const
- bool **resize_needed_for_shrink** (size_type) const
- bool **shrink_needed** (size_type) const
- size_type **size** () const
- template<typename Pred >
  void **split** (Pred, binary_heap &)
- void **swap** (resize_policy< _Alloc::size_type > &)
- void **swap** (binary_heap &)
- const_reference **top** () const

Static Public Attributes

- static const _Alloc::size_type **min_size**

Protected Member Functions

- template<typename It >
  void **copy_from_range** (It, It)

4.321.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc >

Binary heaps composed of resize and compare policies.

Based on CLRS.

Definition at line 84 of file binary_heap_.hpp.

The documentation for this class was generated from the following file:

- binary_heap_.hpp

4.322 __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >:

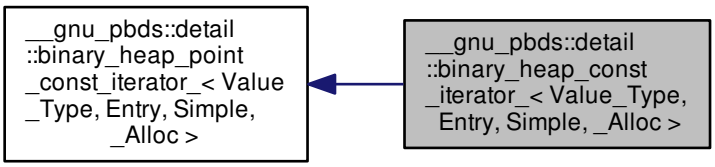

Public Types

- typedef base_type::const_pointer const_pointer
- typedef base_type::const_reference const_reference
- typedef _Alloc::difference_type difference_type
- typedef std::forward_iterator_tag iterator_category
- typedef base_type::pointer pointer
- typedef base_type::reference reference
- typedef base_type::value_type value_type

Public Member Functions

- **binary_heap_const_iterator_** (entry_pointer p_e)
- binary_heap_const_iterator_ ()
- binary_heap_const_iterator_ (const binary_heap_const_iterator_ &other)
- bool operator!= (const binary_heap_const_iterator_ &other) const
- bool operator!= (const binary_heap_point_const_iterator_ &other) const
- const_reference operator* () const
- binary_heap_const_iterator_ & **operator++** ()
- binary_heap_const_iterator_ **operator++** (int)
- const_pointer operator-> () const
- bool operator== (const binary_heap_const_iterator_ &other) const
- bool operator== (const binary_heap_point_const_iterator_ &other) const

Public Attributes

- entry_pointer **m_p_e**

4.322.1 Detailed Description

template<typename Value_Type, typename Entry, bool Simple, typename _Alloc>class __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >

Const point-type iterator.

Definition at line 60 of file binary_heap_/const_iterator.hpp.

4.322.2 Member Typedef Documentation

4.322.2.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef base_type::const_pointer __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::const_pointer

Iterator's const pointer type.

Definition at line 80 of file binary_heap_/const_iterator.hpp.

4.322.2.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef base_type::const_reference __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::const_reference

Iterator's const reference type.

Definition at line 86 of file binary_heap_/const_iterator.hpp.

4.322.2.3 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef _Alloc::difference_type __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::difference_type

Difference type.

Definition at line 71 of file binary_heap_/const_iterator.hpp.

4.322.2.4 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef std::forward_iterator_tag __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::iterator_category

Category.

Definition at line 68 of file binary_heap_/const_iterator.hpp.

4.322.2.5 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef base_type::pointer __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::pointer

Iterator's pointer type.

Definition at line 77 of file binary_heap_/const_iterator.hpp.

4.322.2.6 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef base_type::reference __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::reference

Iterator's reference type.

Definition at line 83 of file binary_heap_/const_iterator.hpp.

4.322.2.7 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef base_type::value_type __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::value_type

Iterator's value type.

Definition at line 74 of file binary_heap_/const_iterator.hpp.

4.322.3 Constructor & Destructor Documentation

4.322.3.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::binary_heap_const_iterator_ ( ) [inline]

Default constructor.

Definition at line 94 of file binary_heap_/const_iterator.hpp.

4.322.3.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::binary_heap_const_iterator_ (const binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) [inline]

Copy constructor.

Definition at line 99 of file binary_heap_/const_iterator.hpp.

4.322.4 Member Function Documentation

4.322.4.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator!= (const binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline]

Compares content (negatively) to a different iterator object.

Definition at line 110 of file binary_heap_/const_iterator.hpp.

4.322.4.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator!= (const binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline], [inherited]

Compares content (negatively) to a different iterator object.

Definition at line 122 of file binary_heap_/point_const_iterator.hpp.

4.322.4.3 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > const_reference __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator* ( ) const [inline], [inherited]

Access.

Definition at line 109 of file binary_heap_/point_const_iterator.hpp.

4.322.4.4 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > const_pointer __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator-> ( ) const [inline], [inherited]

Access.

Definition at line 101 of file binary_heap_/point_const_iterator.hpp.

4.322.4.5 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator== (const binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline]

Compares content to a different iterator object.

Definition at line 105 of file binary_heap_/const_iterator.hpp.

4.322.4.6 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator== (const binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline], [inherited]

Compares content to a different iterator object.

Definition at line 117 of file binary_heap_/point_const_iterator.hpp.

The documentation for this class was generated from the following file:

- binary_heap_/const_iterator.hpp

4.323 __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >:

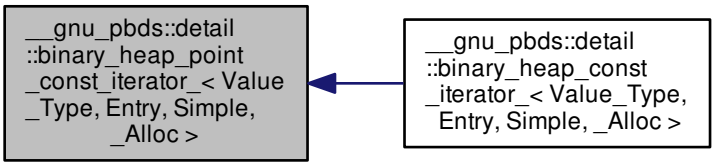

Public Types

- typedef rebind_traits< _Alloc, value_type >::const_pointer const_pointer
- typedef rebind_traits< _Alloc, value_type >::const_reference const_reference
- typedef trivial_iterator_difference_type difference_type
- typedef trivial_iterator_tag iterator_category
- typedef rebind_traits< _Alloc, value_type >::pointer pointer
- typedef rebind_traits< _Alloc, value_type >::reference reference
- typedef Value_Type value_type

Public Member Functions

- **binary_heap_point_const_iterator_** (entry_pointer p_e)
- binary_heap_point_const_iterator_ ()
- binary_heap_point_const_iterator_ (const binary_heap_point_const_iterator_ &other)
- bool operator!= (const binary_heap_point_const_iterator_ &other) const
- const_reference operator* () const
- const_pointer operator-> () const
- bool operator== (const binary_heap_point_const_iterator_ &other) const

Public Attributes

- entry_pointer **m_p_e**

Protected Types

- typedef rebind_traits< _Alloc,
  Entry >::pointer **entry_pointer**

4.323.1 Detailed Description

template<typename Value_Type, typename Entry, bool Simple, typename _Alloc>class __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >

Const point-type iterator.

Definition at line 55 of file binary_heap_/point_const_iterator.hpp.

4.323.2 Member Typedef Documentation

4.323.2.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef rebind_traits<_Alloc, value_type>::const_pointer __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::const_pointer

Iterator's const pointer type.

Definition at line 75 of file binary_heap_/point_const_iterator.hpp.

4.323.2.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef rebind_traits<_Alloc, value_type>::const_reference __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::const_reference

Iterator's const reference type.

Definition at line 83 of file binary_heap_/point_const_iterator.hpp.

4.323.2.3 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef trivial_iterator_difference_type __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::difference_type

Difference type.

Definition at line 65 of file binary_heap_/point_const_iterator.hpp.

4.323.2.4 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef trivial_iterator_tag __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::iterator_category

Category.

Definition at line 62 of file binary_heap_/point_const_iterator.hpp.

4.323.2.5 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef rebind_traits<_Alloc, value_type>::pointer __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::pointer

Iterator's pointer type.

Definition at line 71 of file binary_heap_/point_const_iterator.hpp.

4.323.2.6 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef rebind_traits<_Alloc, value_type>::reference __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::reference

Iterator's reference type.

Definition at line 79 of file binary_heap_/point_const_iterator.hpp.

4.323.2.7 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > typedef Value_Type __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::value_type

Iterator's value type.

Definition at line 68 of file binary_heap_/point_const_iterator.hpp.

4.323.3 Constructor & Destructor Documentation

4.323.3.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::binary_heap_point_const_iterator_ ( ) [inline]

Default constructor.

Definition at line 91 of file binary_heap_/point_const_iterator.hpp.

4.323.3.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::binary_heap_point_const_iterator_ (const binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) [inline]

Copy constructor.

Definition at line 95 of file binary_heap_/point_const_iterator.hpp.

4.323.4 Member Function Documentation

4.323.4.1 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator!= (const binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline]

Compares content (negatively) to a different iterator object.

Definition at line 122 of file binary_heap_/point_const_iterator.hpp.

4.323.4.2 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > const_reference __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator*( ) const [inline]

Access.

Definition at line 109 of file binary_heap_/point_const_iterator.hpp.

4.323.4.3 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > const_pointer __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator->( ) const [inline]

Access.

Definition at line 101 of file binary_heap_/point_const_iterator.hpp.

4.323.4.4 template<typename Value_Type , typename Entry , bool Simple, typename _Alloc > bool __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >::operator==(const binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc > & *other*) const [inline]

Compares content to a different iterator object.

Definition at line 117 of file binary_heap_/point_const_iterator.hpp.

The documentation for this class was generated from the following file:

- binary_heap_/point_const_iterator.hpp

4.324 __gnu_pbds::binary_heap_tag Struct Reference

Inheritance diagram for __gnu_pbds::binary_heap_tag:

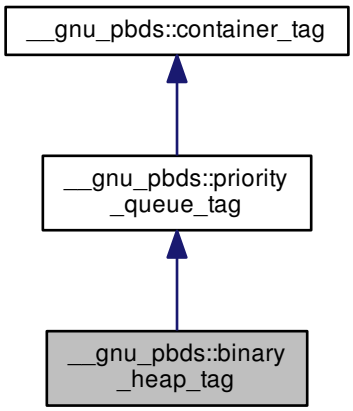

4.324.1 Detailed Description

Binary-heap (array-based).

Definition at line 183 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.325 std::binary_negate< _Predicate > Class Template Reference

Inheritance diagram for std::binary_negate< _Predicate >:



Public Types

- typedef _Predicate::first_argument_type first_argument_type
- typedef bool result_type
- typedef _Predicate::second_argument_type second_argument_type

Public Member Functions

- constexpr **binary_negate** (const _Predicate &__x)
- constexpr bool **operator()** (const typename _Predicate::first_argument_type &__x, const typename _Predicate-::second_argument_type &__y) const

Protected Attributes

- _Predicate **_M_pred**

4.325.1 Detailed Description

template<typename _Predicate>class std::binary_negate< _Predicate >

One of the negation functors.

Definition at line 1029 of file stl_function.h.

4.325.2 Member Typedef Documentation

4.325.2.1 typedef _Predicate::first_argument_type std::binary_function< _Predicate::first_argument_type , _Predicate::second_argument_type , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.325.2.2 typedef bool std::binary_function< _Predicate::first_argument_type , _Predicate::second_argument_type , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.325.2.3 typedef _Predicate::second_argument_type std::binary_function< _Predicate::first_argument_type , _Predicate::second_argument_type , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.326 std::binder1st< _Operation > Class Template Reference

Inheritance diagram for std::binder1st< _Operation >:

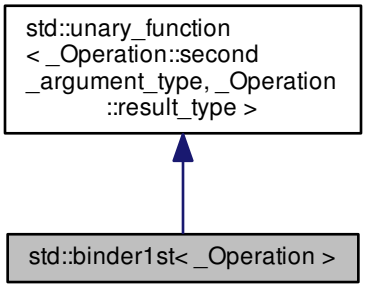

Public Types

- typedef _Operation::second_argument_type argument_type
- typedef _Operation::result_type result_type

Public Member Functions

- **binder1st** (const _Operation &__x, const typename _Operation::first_argument_type &__y)
- _Operation::result_type **operator()** (const typename _Operation::second_argument_type &__x) const
- _Operation::result_type **operator()** (typename _Operation::second_argument_type &__x) const

Protected Attributes

- _Operation **op**
- _Operation::first_argument_type **value**

4.326.1 Detailed Description

template<typename _Operation>class std::binder1st< _Operation >

One of the binder functors.

Definition at line 108 of file binders.h.

4.326.2 Member Typedef Documentation

4.326.2.1 typedef _Operation::second_argument_type std::unary_function< _Operation::second_argument_type , _Operation::result_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.326.2.2 typedef _Operation::result_type std::unary_function< _Operation::second_argument_type , _Operation::result_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- binders.h

4.327 std::binder2nd< _Operation > Class Template Reference

Inheritance diagram for std::binder2nd< _Operation >:

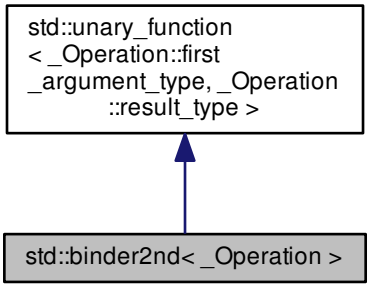

Public Types

- typedef _Operation::first_argument_type argument_type
- typedef _Operation::result_type result_type

Public Member Functions

- **binder2nd** (const _Operation &__x, const typename _Operation::second_argument_type &__y)
- _Operation::result_type **operator()** (const typename _Operation::first_argument_type &__x) const
- _Operation::result_type **operator()** (typename _Operation::first_argument_type &__x) const

Protected Attributes

- _Operation **op**
- _Operation::second_argument_type **value**

4.327.1 Detailed Description

template<typename _Operation>class std::binder2nd< _Operation >

One of the binder functors.

Definition at line 143 of file binders.h.

4.327.2 Member Typedef Documentation

4.327.2.1 typedef _Operation::first_argument_type std::unary_function< _Operation::first_argument_type , _Operation::result_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.327.2.2 typedef _Operation::result_type std::unary_function< _Operation::first_argument_type , _Operation::result_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- binders.h

4.328 std::binomial_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- **binomial_distribution** (_IntType __t, double __p=0.5)
- **binomial_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  binomial_distribution < _IntType >::result_type **_M_waiting** (_UniformRandomNumberGenerator &__urng, _IntType __t, double __q)
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  binomial_distribution < _IntType >::result_type operator() (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)

- double p () const
- param_type param () const
- void param (const param_type &__param)
- void reset ()
- _IntType t () const

Friends

- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::binomial_distribution< _IntType1 > &__x)
- bool operator== (const binomial_distribution &__d1, const binomial_distribution &__d2)
- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::binomial_distribution< _IntType1 > &__x)

4.328.1 Detailed Description

template<typename _IntType = int>class std::binomial_distribution< _IntType >

A discrete binomial random number distribution.

The formula for the binomial probability density function is $p(i|t,p) = \binom{t}{i} p^i (1-p)^{t-i}$ where t and p are the parameters of the distribution.

Definition at line 3729 of file random.h.

4.328.2 Member Typedef Documentation

4.328.2.1 template<typename _IntType = int> typedef _IntType std::binomial_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 3732 of file random.h.

4.328.3 Member Function Documentation

4.328.3.1 template<typename _IntType = int> result_type std::binomial_distribution< _IntType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 3848 of file random.h.

4.328.3.2 template<typename _IntType = int> result_type std::binomial_distribution< _IntType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 3841 of file random.h.

4.328.3.3 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > binomial_distribution<_IntType>::result_type std::binomial_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng,* const param_type & *__param*)

A rejection algorithm when t * p >= 8 and a simple waiting time method - the second in the referenced book - otherwise. NB: The former is available only if _GLIBCXX_USE_C99_MATH_TR1 is defined.

Reference: Devroye, L. Non-Uniform Random Variates Generation. Springer-Verlag, New York, 1986, Ch. X, Sect. 4 (+ Errata!).

Definition at line 1524 of file bits/random.tcc.

References std::abs(), std::numeric_limits< _Tp >::epsilon(), std::log(), and std::numeric_limits< _Tp >::max().

4.328.3.4 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::binomial_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 3856 of file random.h.

4.328.3.5 template<typename _IntType = int> double std::binomial_distribution< _IntType >::p ( ) const [inline]

Returns the distribution p parameter.

Definition at line 3819 of file random.h.

4.328.3.6 template<typename _IntType = int> param_type std::binomial_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 3826 of file random.h.

4.328.3.7 template<typename _IntType = int> void std::binomial_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 3834 of file random.h.

4.328.3.8 template<typename _IntType = int> void std::binomial_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 3805 of file random.h.

References std::normal_distribution< _RealType >::reset().

4.328.3.9 template<typename _IntType = int> _IntType std::binomial_distribution< _IntType >::t ( ) const [inline]

Returns the distribution t parameter.

Definition at line 3812 of file random.h.

4.328.4 Friends And Related Function Documentation

4.328.4.1 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::binomial_distribution< _IntType1 > & *__x*) [friend]

Inserts a binomial_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A binomial_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.328.4.2 template<typename _IntType = int> bool operator== (const binomial_distribution< _IntType > & *__d1*, const binomial_distribution< _IntType > & *__d2*) [friend]

Return true if two binomial distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 3892 of file random.h.

4.328.4.3 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::binomial_distribution< _IntType1 > & *__x*) [friend]

Extracts a binomial_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A binomial_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.329 __gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc >:



Public Types

- typedef base_type::allocator_type **allocator_type**
- typedef base_type::cmp_fn **cmp_fn**

- typedef base_type::const_iterator **const_iterator**
- typedef base_type::const_pointer **const_pointer**
- typedef base_type::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef base_type::pointer **pointer**
- typedef base_type::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- **binomial_heap** (const Cmp_Fn &)
- **binomial_heap** (const binomial_heap &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- void **erase** (point_iterator)
- template<typename Pred > binomial_heap_base< Value_Type, Cmp_Fn, _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **join** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- size_type **max_size** () const
- void **modify** (point_iterator, const_reference)
- void **pop** ()
- point_iterator **push** (const_reference)
- size_type **size** () const
- template<typename Pred > void **split** (Pred, binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, _Alloc::size_type, _Alloc > &)
- const_reference **top** () const

Protected Types

- typedef base_type::node **node**
- typedef alloc_traits::allocator_type **node_allocator**
- typedef _Alloc::size_type **node_metadata**
- typedef std::pair < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- template<typename It >
  void **copy_from_range** (It, It)
- void **find_max** ()
- node_pointer **get_new_node_for_insert** (const_reference)
- node_pointer **prune** (Pred)
- void **swap** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static void **make_child_of** (node_pointer, node_pointer)
- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_max**
- node_pointer **m_p_root**
- size_type **m_size**

4.329.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::binomial_heap< Value_Type, Cmp-_Fn, _Alloc >

Binomial heap.

Definition at line 68 of file binomial_heap_.hpp.

The documentation for this class was generated from the following file:

- binomial_heap_.hpp

4.330 __gnu_pbds::detail::binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::binomial_heap_base< Value_Type, Cmp_Fn, _Alloc >:

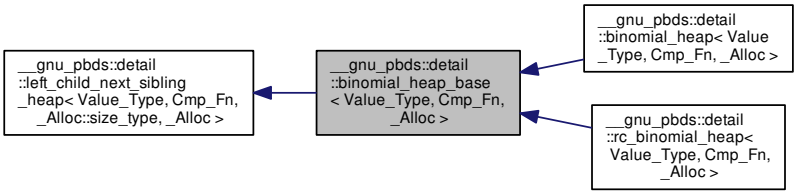

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef base_type::const_iterator **const_iterator**
- typedef __rebind_v::const_pointer **const_pointer**
- typedef __rebind_v::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef __rebind_v::pointer **pointer**
- typedef __rebind_v::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- void **erase** (point_iterator)
- template<typename Pred > binomial_heap_base< Value_Type, Cmp_Fn, _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **join** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- size_type **max_size** () const

- void **modify** (point_iterator, const_reference)
- void **pop** ()
- point_iterator **push** (const_reference)
- size_type **size** () const
- template<typename Pred >
  void **split** (Pred, binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, _Alloc::size_type, _Alloc > &)
- const_reference **top** () const

Protected Types

- typedef base_type::node **node**
- typedef
  alloc_traits::allocator_type **node_allocator**
- typedef
  base_type::node_const_pointer **node_const_pointer**
- typedef _Alloc::size_type **node_metadata**
- typedef base_type::node_pointer **node_pointer**
- typedef std::pair
  < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- **binomial_heap_base** (const Cmp_Fn &)
- **binomial_heap_base** (const binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- template<typename It >
  void **copy_from_range** (It, It)
- void **find_max** ()
- node_pointer **get_new_node_for_insert** (const_reference)
- node_pointer **prune** (Pred)
- void **swap** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static void **make_child_of** (node_pointer, node_pointer)
- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_max**
- node_pointer **m_p_root**
- size_type **m_size**

4.330.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::binomial_heap_base< Value_Type, Cmp_Fn, _Alloc >

Base class for binomial heap.

Definition at line 77 of file binomial_heap_base_.hpp.

The documentation for this class was generated from the following file:

- binomial_heap_base_.hpp

4.331 __gnu_pbds::binomial_heap_tag Struct Reference

Inheritance diagram for __gnu_pbds::binomial_heap_tag:

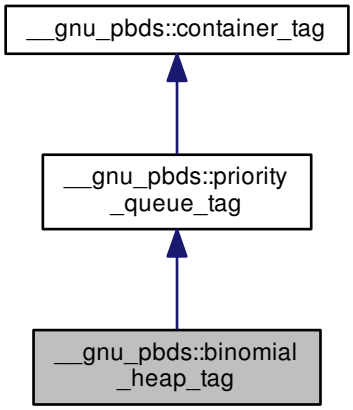

4.331.1 Detailed Description

Binomial-heap.

Definition at line 177 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.332 __gnu_cxx::bitmap_allocator< _Tp > Class Template Reference

Inheritance diagram for __gnu_cxx::bitmap_allocator< _Tp >:

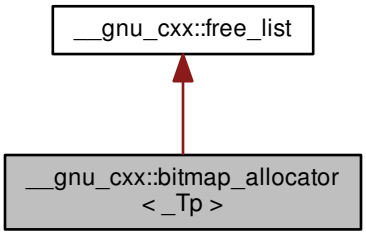

Public Types

- typedef free_list::__mutex_type **__mutex_type**
- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **bitmap_allocator** (const bitmap_allocator &) noexcept
- template<typename _Tp1 >
  bitmap_allocator (const bitmap_allocator< _Tp1 > &) noexcept
- pointer _M_allocate_single_object ()
- void _M_deallocate_single_object (pointer __p) throw ()
- pointer **address** (reference __r) const noexcept
- const_pointer **address** (const_reference __r) const noexcept
- pointer **allocate** (size_type __n)
- pointer **allocate** (size_type __n, typename bitmap_allocator< void >::const_pointer)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n) throw ()
- template<typename _Up >
  void **destroy** (_Up *__p)
- size_type **max_size** () const noexcept

Private Types

- typedef vector_type::iterator **iterator**
- typedef __detail::__mini_vector < value_type > **vector_type**

Private Member Functions

- void _M_clear ()
- std::size_t * _M_get (std::size_t __sz)
- void _M_insert (std::size_t *__addr) throw ()

4.332.1 Detailed Description

template<typename _Tp>class __gnu_cxx::bitmap_allocator< _Tp >

Bitmap Allocator, primary template.

Definition at line 658 of file bitmap_allocator.h.

4.332.2 Member Function Documentation

4.332.2.1 template<typename _Tp > pointer __gnu_cxx::bitmap_allocator< _Tp >::_M_allocate_single_object ( ) [inline]

Allocates memory for a single object of size sizeof(_Tp).

Exceptions

std::bad_alloc.	If memory cannot be allocated.

Complexity: Worst case complexity is O(N), but that is hardly ever hit. If and when this particular case is encountered, the next few cases are guaranteed to have a worst case complexity of O(1)! That's why this function performs very well on average. You can consider this function to have a complexity referred to commonly as: Amortized Constant time.

Definition at line 823 of file bitmap_allocator.h.

References __gnu_cxx::__detail::__bit_allocate(), __gnu_cxx::__detail::__num_bitmaps(), and __gnu_cxx::_Bit_scan_forward().

4.332.2.2 template<typename _Tp > void __gnu_cxx::bitmap_allocator< _Tp >::_M_deallocate_single_object (pointer __p) throw) [inline]

Deallocates memory that belongs to a single object of size sizeof(_Tp).

Complexity: O(lg(N)), but the worst case is not hit often! This is because containers usually deallocate memory close to each other and this case is handled in O(1) time by the deallocate function.

Definition at line 914 of file bitmap_allocator.h.

References __gnu_cxx::__detail::__bit_free(), __gnu_cxx::__detail::__num_bitmaps(), and __gnu_cxx::free_list::_M_insert().

The documentation for this class was generated from the following file:

- bitmap_allocator.h

4.333 std::__debug::bitset< _Nb > Class Template Reference

Inherits bitset< _Nb >.

Public Types

- typedef _Base::reference **reference**

Public Member Functions

- constexpr **bitset** (unsigned long long __val) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bitset (const std::basic_string< _CharT, _Traits, _Alloc > &__str, typename std::basic_string< _CharT, _Traits, _Alloc >::size_type __pos=0, typename std::basic_string< _CharT, _Traits, _Alloc >::size_type __n=(std::basic_string< _CharT, _Traits, _Alloc >::npos))
- template<class _CharT , class _Traits , class _Alloc >
  bitset (const std::basic_string< _CharT, _Traits, _Alloc > &__str, typename std::basic_string< _CharT, _Traits, _Alloc >::size_type __pos, typename std::basic_string< _CharT, _Traits, _Alloc >::size_type __n, _CharT __zero, _CharT __one=_CharT('1'))
- **bitset** (const _Base &__x)
- template<typename _CharT >
  bitset (const _CharT *__str, typename std::basic_string< _CharT >::size_type __n=std::basic_string< _CharT >::npos, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1'))
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- bitset< _Nb > & **flip** () noexcept
- bitset< _Nb > & **flip** (size_t __pos)
- bool **operator!=** (const bitset< _Nb > &__rhs) const noexcept
- bitset< _Nb > & **operator&=** (const bitset< _Nb > &__rhs) noexcept
- bitset< _Nb > **operator**<< (size_t __pos) const noexcept
- bitset< _Nb > & **operator**<<**=** (size_t __pos) noexcept
- bool **operator==** (const bitset< _Nb > &__rhs) const noexcept
- bitset< _Nb > **operator**>> (size_t __pos) const noexcept
- bitset< _Nb > & **operator**>>**=** (size_t __pos) noexcept
- reference **operator[]** (size_t __pos)
- constexpr bool **operator[]** (size_t __pos) const
- bitset< _Nb > & **operator^=** (const bitset< _Nb > &__rhs) noexcept
- bitset< _Nb > & **operator|=** (const bitset< _Nb > &__rhs) noexcept
- bitset< _Nb > **operator~** () const noexcept
- bitset< _Nb > & **reset** () noexcept
- bitset< _Nb > & **reset** (size_t __pos)
- bitset< _Nb > & **set** () noexcept
- bitset< _Nb > & **set** (size_t __pos, bool __val=true)
- template<typename _CharT , typename _Traits , typename _Alloc >
  std::basic_string< _CharT,
  _Traits, _Alloc > **to_string** () const
- template<class _CharT , class _Traits , class _Alloc >
  std::basic_string< _CharT,
  _Traits, _Alloc > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const

- template<typename _CharT , typename _Traits >
  std::basic_string< _CharT,
  _Traits, std::allocator
  < _CharT > > **to_string** () const
- template<class _CharT , class _Traits >
  std::basic_string< _CharT,
  _Traits, std::allocator
  < _CharT > > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const
- template<typename _CharT >
  std::basic_string< _CharT,
  std::char_traits< _CharT >
  , std::allocator< _CharT > > **to_string** () const
- template<class _CharT >
  std::basic_string< _CharT,
  std::char_traits< _CharT >
  , std::allocator< _CharT > > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const
- std::basic_string< char,
  std::char_traits< char >
  , std::allocator< char > > **to_string** () const
- std::basic_string< char,
  std::char_traits< char >
  , std::allocator< char > > **to_string** (char __zero, char __one= '1') const

4.333.1 Detailed Description

template<size_t _Nb>class std::__debug::bitset< _Nb >

Class std::bitset with additional safety/checking/debug instrumentation.

Definition at line 44 of file debug/bitset.

The documentation for this class was generated from the following file:

- debug/bitset

4.334 std::bitset< _Nb > Class Template Reference

Inheritance diagram for std::bitset< _Nb >:

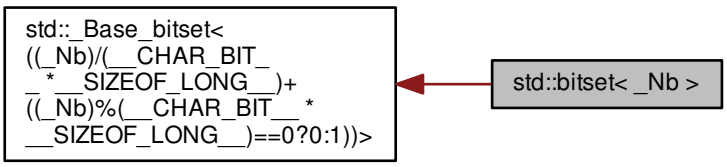

Classes

- class reference

Public Member Functions

- constexpr bitset () noexcept
- constexpr bitset (unsigned long long __val) noexcept
- template<class _CharT , class _Traits , class _Alloc >
  bitset (const std::basic_string< _CharT, _Traits, _Alloc > &__s, size_t __position=0)
- template<class _CharT , class _Traits , class _Alloc >
  bitset (const std::basic_string< _CharT, _Traits, _Alloc > &__s, size_t __position, size_t __n)
- template<class _CharT , class _Traits , class _Alloc >
  bitset (const std::basic_string< _CharT, _Traits, _Alloc > &__s, size_t __position, size_t __n, _CharT __zero, _CharT __one=_CharT('1'))
- template<typename _CharT >
  bitset (const _CharT *__str, typename std::basic_string< _CharT >::size_type __n=std::basic_string< _CharT >::npos, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1'))
- size_t _Find_first () const noexcept
- size_t _Find_next (size_t __prev) const noexcept
- template<class _CharT , class _Traits >
  void **_M_copy_from_ptr** (const _CharT *, size_t, size_t, size_t, _CharT, _CharT)
- template<class _CharT , class _Traits , class _Alloc >
  void **_M_copy_from_string** (const std::basic_string< _CharT, _Traits, _Alloc > &__s, size_t __pos, size_t __n, _CharT __zero, _CharT __one)
- template<class _CharT , class _Traits , class _Alloc >
  void **_M_copy_from_string** (const std::basic_string< _CharT, _Traits, _Alloc > &__s, size_t __pos, size_t __n)
- template<class _CharT , class _Traits , class _Alloc >
  void **_M_copy_to_string** (std::basic_string< _CharT, _Traits, _Alloc > &, _CharT, _CharT) const
- template<class _CharT , class _Traits , class _Alloc >
  void **_M_copy_to_string** (std::basic_string< _CharT, _Traits, _Alloc > &__s) const
- bool all () const noexcept
- bool any () const noexcept
- size_t count () const noexcept
- bitset< _Nb > & flip () noexcept
- bitset< _Nb > & flip (size_t __position)
- bool none () const noexcept
- bitset< _Nb > operator~ () const noexcept
- bitset< _Nb > & reset () noexcept
- bitset< _Nb > & reset (size_t __position)
- bitset< _Nb > & set () noexcept
- bitset< _Nb > & set (size_t __position, bool __val=true)
- constexpr size_t size () const noexcept
- bool test (size_t __position) const
- template<class _CharT , class _Traits , class _Alloc >
  std::basic_string< _CharT,
  _Traits, _Alloc > to_string () const
- template<class _CharT , class _Traits , class _Alloc >
  std::basic_string< _CharT,
  _Traits, _Alloc > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const

- template<class _CharT , class _Traits >
  std::basic_string< _CharT,
  _Traits, std::allocator
  < _CharT > > **to_string** () const
- template<class _CharT , class _Traits >
  std::basic_string< _CharT,
  _Traits, std::allocator
  < _CharT > > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const
- template<class _CharT >
  std::basic_string< _CharT,
  std::char_traits< _CharT >
  , std::allocator< _CharT > > **to_string** () const
- template<class _CharT >
  std::basic_string< _CharT,
  std::char_traits< _CharT >
  , std::allocator< _CharT > > **to_string** (_CharT __zero, _CharT __one=_CharT('1')) const
- std::basic_string< char,
  std::char_traits< char >
  , std::allocator< char > > **to_string** () const
- std::basic_string< char,
  std::char_traits< char >
  , std::allocator< char > > **to_string** (char __zero, char __one= '1') const
- unsigned long long **to_ullong** () const
- unsigned long to_ulong () const

- bitset< _Nb > & operator&= (const bitset< _Nb > &__rhs) noexcept
- bitset< _Nb > & operator|= (const bitset< _Nb > &__rhs) noexcept
- bitset< _Nb > & operator^= (const bitset< _Nb > &__rhs) noexcept

- bitset< _Nb > & operator<<= (size_t __position) noexcept
- bitset< _Nb > & operator>>= (size_t __position) noexcept

- bitset< _Nb > & _Unchecked_set (size_t __pos) noexcept
- bitset< _Nb > & _Unchecked_set (size_t __pos, int __val) noexcept
- bitset< _Nb > & _Unchecked_reset (size_t __pos) noexcept
- bitset< _Nb > & _Unchecked_flip (size_t __pos) noexcept
- constexpr bool _Unchecked_test (size_t __pos) const noexcept

- reference operator[] (size_t __position)
- constexpr bool operator[] (size_t __position) const

- bool operator== (const bitset< _Nb > &__rhs) const noexcept
- bool operator!= (const bitset< _Nb > &__rhs) const noexcept

- bitset< _Nb > operator<< (size_t __position) const noexcept
- bitset< _Nb > operator>> (size_t __position) const noexcept

Private Member Functions

- bool **_M_are_all** () const noexcept
- void **_M_do_and** (const _Base_bitset< _Nw > &__x) noexcept
- size_t **_M_do_count** () const noexcept
- size_t **_M_do_find_first** (size_t) const noexcept
- size_t **_M_do_find_next** (size_t, size_t) const noexcept
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t __shift) noexcept
- void **_M_do_or** (const _Base_bitset< _Nw > &__x) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t __shift) noexcept
- void **_M_do_set** () noexcept
- unsigned long long **_M_do_to_ullong** () const
- unsigned long **_M_do_to_ulong** () const
- void **_M_do_xor** (const _Base_bitset< _Nw > &__x) noexcept
- const _WordT * **_M_getdata** () const noexcept
- _WordT & **_M_getword** (size_t __pos) noexcept
- constexpr _WordT **_M_getword** (size_t __pos) const noexcept
- _WordT & **_M_hiword** () noexcept
- constexpr _WordT **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const _Base_bitset< _Nw > &__x) const noexcept

Static Private Member Functions

- static constexpr _WordT **_S_maskbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbit** (size_t __pos) noexcept
- static constexpr size_t **_S_whichbyte** (size_t __pos) noexcept
- static constexpr size_t **_S_whichword** (size_t __pos) noexcept

Private Attributes

- _WordT _M_w [_Nw]

Friends

- class **reference**
- struct **std::hash**< **bitset** >

4.334.1 Detailed Description

template<**size_t _Nb**>**class std::bitset**< _Nb >

The bitset class represents a *fixed-size* sequence of bits.

(Note that bitset does *not* meet the formal requirements of a `container`. Mainly, it lacks iterators.)

The template argument, *Nb*, may be any non-negative number, specifying the number of bits (e.g., "0", "12", "1024*1024").

In the general unoptimized case, storage is allocated in word-sized blocks. Let B be the number of bits in a word, then (Nb+(B-1))/B words will be used for storage. B - NbB bits are unused. (They are the high-order bits in the highest word.) It is a class invariant that those unused bits are always zero.

If you think of bitset as *a simple array of bits*, be aware that your mental picture is reversed: a bitset behaves the same way as bits in integers do, with the bit at index 0 in the *least significant / right-hand* position, and the bit at index Nb-1 in the *most significant / left-hand* position. Thus, unlike other containers, a bitset's index *counts from right to left*, to put it very loosely.

This behavior is preserved when translating to and from strings. For example, the first line of the following program probably prints *b('a') is 0001100001* on a modern ASCII system.

```
#include <bitset>
#include <iostream>
#include <sstream>

using namespace std;

int main()
{
    long         a = 'a';
    bitset<10>   b(a);

    cout << "b('a') is " << b << endl;

    ostringstream s;
    s << b;
    string  str = s.str();
    cout << "index 3 in the string is " << str[3] << " but\n"
         << "index 3 in the bitset is " << b[3] << endl;
}
```

Also see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/ext_containers.html for a description of extensions.

Most of the actual code isn't contained in bitset<> itself, but in the base class _Base_bitset. The base class works with whole words, not with individual bits. This allows us to specialize _Base_bitset for the important special case where the bitset is only a single word.

Extra confusion can result due to the fact that the storage for _Base_bitset *is* a regular array, and is indexed as such. This is carefully encapsulated.

Definition at line 751 of file bitset.

4.334.2 Constructor & Destructor Documentation

4.334.2.1 template<size_t _Nb> constexpr std::bitset< _Nb >::bitset ( ) [inline], [noexcept]

All bits set to zero.

Definition at line 869 of file bitset.

4.334.2.2 template<size_t _Nb> constexpr std::bitset< _Nb >::bitset (unsigned long long __val) [inline], [noexcept]

Initial bits bitwise-copied from a single word (others set to zero).

Definition at line 874 of file bitset.

4.334.2.3 template<size_t _Nb> template<class _CharT , class _Traits , class _Alloc > std::bitset< _Nb >::bitset (const std::basic_string< _CharT, _Traits, _Alloc > & __s, size_t __position = 0) [inline], [explicit]

Use a subset of a string.

Parameters

__s	A string of *0* and *1* characters.
__position	Index of the first character in *__s* to use; defaults to zero.

Exceptions

std::out_of_range	If *pos* is bigger the size of *__s*.
std::invalid_argument	If a character appears in the string which is neither *0* nor *1*.

Definition at line 893 of file bitset.

4.334.2.4 template<size_t _Nb> template<class _CharT , class _Traits , class _Alloc > std::bitset< _Nb >::bitset (const std::basic_string< _CharT, _Traits, _Alloc > & *__s,* size_t *__position,* size_t *__n*) [inline]

Use a subset of a string.

Parameters

__s	A string of *0* and *1* characters.
__position	Index of the first character in *__s* to use.
__n	The number of characters to copy.

Exceptions

std::out_of_range	If *__position* is bigger the size of *__s*.
std::invalid_argument	If a character appears in the string which is neither *0* nor *1*.

Definition at line 914 of file bitset.

4.334.2.5 template<size_t _Nb> template<typename _CharT > std::bitset< _Nb >::bitset (const _CharT * *__str,* typename std::basic_string< _CharT >::size_type *__n* = std::basic_string<_CharT>::npos, _CharT *__zero* = _CharT('0'), _CharT *__one* = _CharT('1')) [inline],[explicit]

Construct from a character array.

Parameters

__str	An array of characters *zero* and *one*.
__n	The number of characters to use.
__zero	The character corresponding to the value 0.
__one	The character corresponding to the value 1.

Exceptions

std::invalid_argument	If a character appears in the string which is neither *__zero* nor *__one*.

Definition at line 946 of file bitset.

4.334.3 Member Function Documentation

4.334.3.1 template<size_t _Nb> bool std::bitset< _Nb >::all ( ) const [inline],[noexcept]

Tests whether all the bits are on.

Returns

True if all the bits are set.

Definition at line 1336 of file bitset.

4.334.3.2 template<size_t _Nb> bool std::bitset< _Nb >::any ( ) const [inline], [noexcept]

Tests whether any of the bits are on.

Returns

True if at least one bit is set.

Definition at line 1344 of file bitset.

4.334.3.3 template<size_t _Nb> size_t std::bitset< _Nb >::count ( ) const [inline], [noexcept]

Returns the number of bits which are set.

Definition at line 1295 of file bitset.

4.334.3.4 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::flip ( ) [inline], [noexcept]

Toggles every bit to its opposite value.

Definition at line 1123 of file bitset.

Referenced by std::bitset< _Nb >::operator~().

4.334.3.5 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::flip (size_t *__position*) [inline]

Toggles a given bit to its opposite value.

Parameters

__position	The index of the bit.

Exceptions

std::out_of_range	If *pos* is bigger the size of the set.

Definition at line 1136 of file bitset.

4.334.3.6 template<size_t _Nb> bool std::bitset< _Nb >::none ( ) const [inline], [noexcept]

Tests whether any of the bits are on.

Returns

True if none of the bits are set.

Definition at line 1352 of file bitset.

4.334.3.7 template<size_t _Nb> bool std::bitset< _Nb >::operator!= (const bitset< _Nb > & *__rhs*) const [inline], [noexcept]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1311 of file bitset.

4.334.3.8 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::operator&= (const bitset< _Nb > & *__rhs*) [inline], [noexcept]

Operations on bitsets.

Parameters

__rhs	A same-sized bitset.

These should be self-explanatory.

Definition at line 972 of file bitset.

4.334.3.9 template<size_t _Nb> bitset<_Nb> std::bitset< _Nb >::operator<< (size_t *__position*) const [inline], [noexcept]

Self-explanatory.

Definition at line 1358 of file bitset.

4.334.3.10 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::operator<<= (size_t *__position*) [inline], [noexcept]

Operations on bitsets.

Parameters

__position	The number of places to shift.

These should be self-explanatory.

Definition at line 1001 of file bitset.

4.334.3.11 template<size_t _Nb> bool std::bitset< _Nb >::operator== (const bitset< _Nb > & *__rhs*) const [inline], [noexcept]

These comparisons for equality/inequality are, well, *bitwise*.

Definition at line 1306 of file bitset.

4.334.3.12 template<size_t _Nb> bitset<_Nb> std::bitset< _Nb >::operator>> (size_t *__position*) const [inline], [noexcept]

Self-explanatory.

Definition at line 1362 of file bitset.

4.334.3.13 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::operator>>= (size_t *__position*) [inline], [noexcept]

Operations on bitsets.

Parameters

__position	The number of places to shift.

These should be self-explanatory.

Definition at line 1014 of file bitset.

4.334.3.14 template<size_t _Nb> reference std::bitset< _Nb >::operator[] (size_t *__position*) [inline]

Array-indexing support.

Parameters

__position	Index into the bitset.

Returns

A bool for a *const bitset*. For non-const bitsets, an instance of the reference proxy class.

Note

These operators do no range checking and throw no exceptions, as required by DR 11 to the standard.

_GLIBCXX_RESOLVE_LIB_DEFECTS Note that this implementation already resolves DR 11 (items 1 and 2), but does not do the range-checking required by that DR's resolution. -pme The DR has since been changed: range-checking is a precondition (users' responsibility), and these functions must not throw. -pme

Definition at line 1163 of file bitset.

4.334.3.15 template<size_t _Nb> constexpr bool std::bitset< _Nb >::operator[] (size_t *__position*) const [inline]

Array-indexing support.

Parameters

__position	Index into the bitset.

Returns

A bool for a *const bitset*. For non-const bitsets, an instance of the reference proxy class.

Note

These operators do no range checking and throw no exceptions, as required by DR 11 to the standard.

_GLIBCXX_RESOLVE_LIB_DEFECTS Note that this implementation already resolves DR 11 (items 1 and 2), but does not do the range-checking required by that DR's resolution. -pme The DR has since been changed: range-checking is a precondition (users' responsibility), and these functions must not throw. -pme

Definition at line 1167 of file bitset.

4.334.3.16 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::operator^= (const bitset< _Nb > & *__rhs*) [inline],[noexcept]

Operations on bitsets.

Parameters

__rhs	A same-sized bitset.

These should be self-explanatory.

Definition at line 986 of file bitset.

4.334.3.17 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::operator|= (const bitset< _Nb > & *__rhs*) [inline],[noexcept]

Operations on bitsets.

Parameters

__rhs	A same-sized bitset.

These should be self-explanatory.

Definition at line 979 of file bitset.

4.334.3.18 template<size_t _Nb> bitset<_Nb> std::bitset< _Nb >::operator~ ( ) const [inline], [noexcept]

See the no-argument flip().

Definition at line 1144 of file bitset.

References std::bitset< _Nb >::flip().

4.334.3.19 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::reset ( ) [inline], [noexcept]

Sets every bit to false.

Definition at line 1099 of file bitset.

4.334.3.20 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::reset (size_t *__position*) [inline]

Sets a given bit to false.

Parameters

__position	The index of the bit.

Exceptions

std::out_of_range	If *pos* is bigger the size of the set.

Same as writing `set(pos,false)`.

Definition at line 1113 of file bitset.

4.334.3.21 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::set ( ) [inline], [noexcept]

Sets every bit to true.

Definition at line 1075 of file bitset.

4.334.3.22 template<size_t _Nb> bitset<_Nb>& std::bitset< _Nb >::set (size_t *__position*, bool *__val* = `true`) [inline]

Sets a given bit to a particular value.

Parameters

__position	The index of the bit.
__val	Either true or false, defaults to true.

Exceptions

std::out_of_range	If *pos* is bigger the size of the set.

Definition at line 1089 of file bitset.

4.334.3.23 template<size_t _Nb> constexpr size_t std::bitset< _Nb >::size ( ) const [inline], [noexcept]

Returns the total number of bits.

Definition at line 1300 of file bitset.

4.334.3.24 template<size_t _Nb> bool std::bitset< _Nb >::test (size_t __position) const [inline]

Tests the value of a bit.

Parameters

__position	The index of a bit.

Returns

The value at *pos*.

Exceptions

std::out_of_range	If *pos* is bigger the size of the set.

Definition at line 1323 of file bitset.

4.334.3.25 template<size_t _Nb> template<class _CharT , class _Traits , class _Alloc > std::basic_string<_CharT, _Traits, _Alloc> std::bitset< _Nb >::to_string ( ) const [inline]

Returns a character interpretation of the bitset.

Returns

The string equivalent of the bits.

Note the ordering of the bits: decreasing character positions correspond to increasing bit positions (see the main class notes for an example).

Definition at line 1197 of file bitset.

4.334.3.26 template<size_t _Nb> unsigned long std::bitset< _Nb >::to_ulong ( ) const [inline]

Returns a numerical interpretation of the bitset.

Returns

The integral equivalent of the bits.

Exceptions

std::overflow_error	If there are too many bits to be represented in an `unsigned long`.

Definition at line 1178 of file bitset.

The documentation for this class was generated from the following file:

- bitset

4.335 std::tr2::bool_set Class Reference

Public Member Functions

- constexpr bool_set ()
- constexpr bool_set (bool __t)

- bool **contains** (bool_set __b) const
- bool equals (bool_set __b) const
- bool is_emptyset () const
- bool is_indeterminate () const
- bool is_singleton () const
- operator bool () const

Static Public Member Functions

- static bool_set **emptyset** ()
- static bool_set **indeterminate** ()

Friends

- bool_set **operator!** (bool_set __b)
- bool_set **operator&** (bool_set __s, bool_set __t)
- template<typename CharT , typename Traits >
  std::basic_ostream< CharT,
  Traits > & **operator**<< (std::basic_ostream< CharT, Traits > &__out, bool_set __b)
- bool_set **operator==** (bool_set __s, bool_set __t)
- template<typename CharT , typename Traits >
  std::basic_istream< CharT,
  Traits > & **operator**>> (std::basic_istream< CharT, Traits > &__in, bool_set &__b)
- bool_set **operator^** (bool_set __s, bool_set __t)
- bool_set **operator|** (bool_set __s, bool_set __t)

4.335.1 Detailed Description

bool_set

See N2136, Bool_set: multi-valued logic by Hervé Brönnimann, Guillaume Melquiond, Sylvain Pion.

The implicit conversion to bool is slippery! I may use the new explicit conversion. This has been specialized in the language so that in contexts requiring a bool the conversion happens implicitly. Thus most objections should be eliminated.

Definition at line 54 of file bool_set.

4.335.2 Constructor & Destructor Documentation

4.335.2.1 constexpr std::tr2::bool_set::bool_set ( ) [inline]

Default constructor.

Definition at line 59 of file bool_set.

4.335.2.2 constexpr std::tr2::bool_set::bool_set (bool __t) [inline]

Constructor from bool.

Definition at line 62 of file bool_set.

4.335.3 Member Function Documentation

4.335.3.1 bool std::tr2::bool_set::equals (bool_set __b) const [inline]

Return true if states are equal.

Definition at line 69 of file bool_set.

4.335.3.2 bool std::tr2::bool_set::is_emptyset ( ) const [inline]

Return true if this is empty.

Definition at line 73 of file bool_set.

4.335.3.3 bool std::tr2::bool_set::is_indeterminate ( ) const [inline]

Return true if this is indeterminate.

Definition at line 77 of file bool_set.

4.335.3.4 bool std::tr2::bool_set::is_singleton ( ) const [inline]

Return true if this is false or true (normal boolean).

Definition at line 81 of file bool_set.

Referenced by operator bool().

4.335.3.5 std::tr2::bool_set::operator bool ( ) const [inline]

Conversion to bool.

Definition at line 86 of file bool_set.

References is_singleton().

The documentation for this class was generated from the following files:

- bool_set
- bool_set.tcc

4.336 __gnu_pbds::detail::branch_policy< Node_CItr, Node_Itr, _Alloc > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::branch_policy< Node_CItr, Node_Itr, _Alloc >:

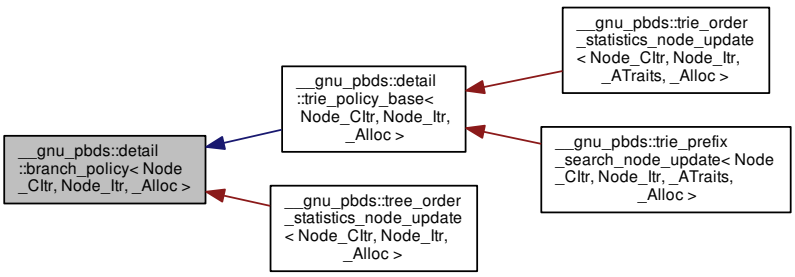

Protected Types

- typedef rebind_v::const_pointer **const_pointer**
- typedef rebind_v::const_reference **const_reference**
- typedef Node_Itr::value_type **it_type**
- typedef rebind_k::const_reference **key_const_reference**
- typedef value_type::first_type **key_type**
- typedef remove_const< key_type > ::type **rckey_type**
- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rckey_type > **rebind_k**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Protected Member Functions

- virtual it_type **end** ()=0
- it_type **end_iterator** () const

Static Protected Member Functions

- static key_const_reference **extract_key** (const_reference r_val)

4.336.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename _Alloc>struct __gnu_pbds::detail::branch_policy< Node_CItr, Node_Itr, _Alloc >

Primary template, base class for branch structure policies.

Definition at line 53 of file branch_policy.hpp.

The documentation for this struct was generated from the following file:

- branch_policy.hpp

4.337 __gnu_pbds::detail::branch_policy< Node_CItr, Node_CItr, _Alloc > Struct Template Reference

Protected Types

- typedef rebind_v::const_pointer **const_pointer**
- typedef rebind_v::const_reference **const_reference**
- typedef Node_CItr::value_type **it_type**
- typedef rebind_v::const_reference **key_const_reference**
- typedef value_type **key_type**

- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Protected Member Functions

- virtual it_type **end** () const =0
- it_type **end_iterator** () const

Static Protected Member Functions

- static key_const_reference **extract_key** (const_reference r_val)

4.337.1 Detailed Description

template<typename Node_Cltr, typename _Alloc>struct __gnu_pbds::detail::branch_policy< Node_Cltr, Node_Cltr, _Alloc >

Specialization for const iterators.

Definition at line 89 of file branch_policy.hpp.

The documentation for this struct was generated from the following file:

- branch_policy.hpp

4.338 std::cauchy_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **cauchy_distribution** (_RealType __a, _RealType __b=1.0)
- **cauchy_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator > void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator > void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator > void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)

- _RealType **a** () const
- _RealType **b** () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  cauchy_distribution< _RealType >
  ::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const cauchy_distribution &__d1, const cauchy_distribution &__d2)

4.338.1 Detailed Description

template<typename _RealType = double>class std::cauchy_distribution< _RealType >

A cauchy_distribution random number distribution.

The formula for the normal probability mass function is $p(x|a,b) = (\pi b(1+(\frac{x-a}{b})^2))^{-1}$

Definition at line 2845 of file random.h.

4.338.2 Member Typedef Documentation

4.338.2.1 template<typename _RealType = double> typedef _RealType std::cauchy_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 2848 of file random.h.

4.338.3 Member Function Documentation

4.338.3.1 template<typename _RealType = double> result_type std::cauchy_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 2943 of file random.h.

References std::numeric_limits< _Tp >::max().

4.338.3.2 template<typename _RealType = double> result_type std::cauchy_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 2936 of file random.h.

References std::numeric_limits< _Tp >::lowest().

4.338.3.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::cauchy_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 2951 of file random.h.

4.338.3.4 template<typename _RealType = double> param_type std::cauchy_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 2921 of file random.h.

Referenced by std::operator>>().

4.338.3.5 template<typename _RealType = double> void std::cauchy_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 2929 of file random.h.

4.338.3.6 template<typename _RealType = double> void std::cauchy_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 2903 of file random.h.

4.338.4 Friends And Related Function Documentation

4.338.4.1 template<typename _RealType = double> bool operator== (const cauchy_distribution< _RealType > & *__d1*, const cauchy_distribution< _RealType > & *__d2*) [friend]

Return true if two Cauchy distributions have the same parameters.

Definition at line 2986 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.339 __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type > Class Template Reference

Public Types

- enum { external_load_access }
- typedef Size_Type **size_type**

Public Member Functions

- cc_hash_max_collision_check_resize_trigger (float load=0.5)

- float get_load () const
- void set_load (float load)
- void **swap** (cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type > &other)

Protected Member Functions

- bool is_grow_needed (size_type size, size_type num_entries) const
- bool is_resize_needed () const
- void notify_cleared ()
- void notify_erase_search_collision ()
- void notify_erase_search_end ()
- void notify_erase_search_start ()
- void notify_erased (size_type num_entries)
- void notify_externally_resized (size_type new_size)
- void notify_find_search_collision ()
- void notify_find_search_end ()
- void notify_find_search_start ()
- void notify_insert_search_collision ()
- void notify_insert_search_end ()
- void notify_insert_search_start ()
- void notify_inserted (size_type num_entries)
- void notify_resized (size_type new_size)

4.339.1 Detailed Description

template<bool External_Load_Access = false, typename Size_Type = std::size_t>class __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >

A resize trigger policy based on collision checks. It keeps the simulated load factor lower than some given load factor.

Definition at line 293 of file hash_policy.hpp.

4.339.2 Member Enumeration Documentation

4.339.2.1 template<bool External_Load_Access = false, typename Size_Type = std::size_t> anonymous enum

Enumerator

external_load_access Specifies whether the load factor can be accessed externally. The two options have different trade-offs in terms of flexibility, genericity, and encapsulation.

Definition at line 298 of file hash_policy.hpp.

4.339.3 Constructor & Destructor Documentation

4.339.3.1 template<bool External_Load_Access, typename Size_Type > __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::cc_hash_max_collision_check_resize_trigger (float *load* = 0.5)

Default constructor, or constructor taking load, a __load factor which it will attempt to maintain.

Definition at line 46 of file hash_policy.hpp.

4.339.4 Member Function Documentation

4.339.4.1 template<bool External_Load_Access, typename Size_Type > float __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::get_load ( ) const [inline]

Returns the current load.

Definition at line 192 of file hash_policy.hpp.

4.339.4.2 template<bool External_Load_Access, typename Size_Type > bool __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::is_grow_needed (size_type *size,* size_type *num_entries*) const [inline], [protected]

Queries whether a grow is needed. This method is called only if this object indicated is needed.

Definition at line 135 of file hash_policy.hpp.

4.339.4.3 template<bool External_Load_Access, typename Size_Type > bool __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::is_resize_needed ( ) const [inline], [protected]

Queries whether a resize is needed.

Definition at line 129 of file hash_policy.hpp.

4.339.4.4 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_cleared ( ) [protected]

Notifies the table was cleared.

Definition at line 123 of file hash_policy.hpp.

4.339.4.5 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_erase_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

Definition at line 99 of file hash_policy.hpp.

4.339.4.6 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_erase_search_end ( ) [inline], [protected]

Notifies a search ended.

Definition at line 105 of file hash_policy.hpp.

4.339.4.7 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_erase_search_start ( ) [inline], [protected]

Notifies an erase search started.

Definition at line 93 of file hash_policy.hpp.

4.339.4.8 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_erased (size_type *num_entries*) [inline], [protected]

Notifies an element was erased.

Definition at line 117 of file hash_policy.hpp.

4.339.4.9 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_externally_resized (size_type *new_size*) [protected]

Notifies the table was resized externally.

Definition at line 174 of file hash_policy.hpp.

4.339.4.10 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_find_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

Definition at line 63 of file hash_policy.hpp.

4.339.4.11 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_find_search_end ( ) [inline], [protected]

Notifies a search ended.

Definition at line 69 of file hash_policy.hpp.

4.339.4.12 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_find_search_start ( ) [inline], [protected]

Notifies a find search started.

Definition at line 57 of file hash_policy.hpp.

4.339.4.13 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_insert_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

Definition at line 81 of file hash_policy.hpp.

4.339.4.14 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_insert_search_end ( ) [inline], [protected]

Notifies a search ended.

Definition at line 87 of file hash_policy.hpp.

4.339.4.15 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_insert_search_start ( ) [inline], [protected]

Notifies an insert search started.

Definition at line 75 of file hash_policy.hpp.

4.339.4.16 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_inserted (size_type *num_entries*) [inline], [protected]

Notifies an element was inserted.

Definition at line 111 of file hash_policy.hpp.

4.339.4.17 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::notify_resized (size_type *new_size*) [protected]

Notifies the table was resized as a result of this object's signifying that a resize is needed.

Definition at line 141 of file hash_policy.hpp.

4.339.4.18 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >::set_load (float *load*)

Sets the load; does not resize the container.

Definition at line 207 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.340 __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >:

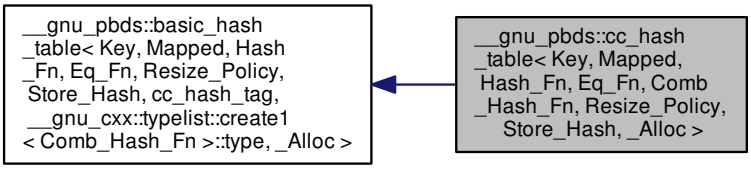

Public Types

- typedef Comb_Hash_Fn **comb_hash_fn**
- typedef cc_hash_tag **container_category**
- typedef Eq_Fn **eq_fn**
- typedef Hash_Fn **hash_fn**
- typedef Resize_Policy **resize_policy**

Public Member Functions

- cc_hash_table ()
- cc_hash_table (const hash_fn &h)
- cc_hash_table (const hash_fn &h, const eq_fn &e)
- cc_hash_table (const hash_fn &h, const eq_fn &e, const comb_hash_fn &ch)
- cc_hash_table (const hash_fn &h, const eq_fn &e, const comb_hash_fn &ch, const resize_policy &rp)
- template<typename It >
  cc_hash_table (It first, It last)
- template<typename It >
  cc_hash_table (It first, It last, const hash_fn &h)
- template<typename It >
  cc_hash_table (It first, It last, const hash_fn &h, const eq_fn &e)
- template<typename It >
  cc_hash_table (It first, It last, const hash_fn &h, const eq_fn &e, const comb_hash_fn &ch)
- template<typename It >
  cc_hash_table (It first, It last, const hash_fn &h, const eq_fn &e, const comb_hash_fn &ch, const resize_policy &rp)
- **cc_hash_table** (const cc_hash_table &other)
- cc_hash_table & **operator=** (const cc_hash_table &other)
- void **swap** (cc_hash_table &other)

4.340.1 Detailed Description

template<typename Key, typename Mapped, typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>>class __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >

A collision-chaining hash-based associative container.

Template Parameters

Key	Key type.
Mapped	Map type.
Hash_Fn	Hashing functor.
Eq_Fn	Equal functor.
Comb_Hash_Fn	Combining hash functor. If Hash_Fn is not null_type, then this is the ranged-hash functor; otherwise, this is the range-hashing functor. XXX(See Design::Hash-Based Containers::Hash Policies.)

Resize_Policy	Resizes hash.
Store_Hash	Indicates whether the hash value will be stored along with each key. If Hash_Fn is null_type, then the container will not compile if this value is true
_Alloc	Allocator type.

Base tag choices are: cc_hash_tag.

Base is basic_hash_table.

Definition at line 204 of file assoc_container.hpp.

4.340.2 Constructor & Destructor Documentation

4.340.2.1 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table ( ) [inline]

Default constructor.

Definition at line 217 of file assoc_container.hpp.

4.340.2.2 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (const hash_fn & *h*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the Hash_Fn object of the container object.

Definition at line 221 of file assoc_container.hpp.

4.340.2.3 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (const hash_fn & *h,* const eq_fn & *e*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, and r_eq_fn will be copied by the eq_fn object of the container object.

Definition at line 228 of file assoc_container.hpp.

4.340.2.4 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (const hash_fn & *h,* const eq_fn & *e,* const comb_hash_fn & *ch*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, and r_comb_hash_fn will be copied by the comb_hash_fn object of the container object.

Definition at line 236 of file assoc_container.hpp.

4.340.2.5 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (const hash_fn & *h,* const eq_fn & *e,* const comb_hash_fn & *ch,* const resize_policy & *rp*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_hash_fn will be copied by the comb_hash_fn object of the container object, and r_resize_policy will be copied by the resize_policy object of the container object.

Definition at line 245 of file assoc_container.hpp.

4.340.2.6 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (It *first,* It *last*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 253 of file assoc_container.hpp.

4.340.2.7 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (It *first,* It *last,* const hash_fn & *h*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 260 of file assoc_container.hpp.

4.340.2.8 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, and r_eq_fn will be copied by the eq_fn object of the container object.

Definition at line 271 of file assoc_container.hpp.

4.340.2.9 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e,* const comb_hash_fn & *ch*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, and r_comb_hash_fn will be copied by the comb_hash_fn object of the container object.

Definition at line 283 of file assoc_container.hpp.

4.340.2.10 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Hash_Fn = detail::default_comb_hash_fn::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Hash_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >::cc_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e,* const comb_hash_fn & *ch,* const resize_policy & *rp*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_hash_fn will be copied by the comb_hash_fn object of the container object, and r_resize_policy will be copied by the resize_policy object of the container object.

Definition at line 297 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.341 __gnu_pbds::cc_hash_tag Struct Reference

Inheritance diagram for __gnu_pbds::cc_hash_tag:

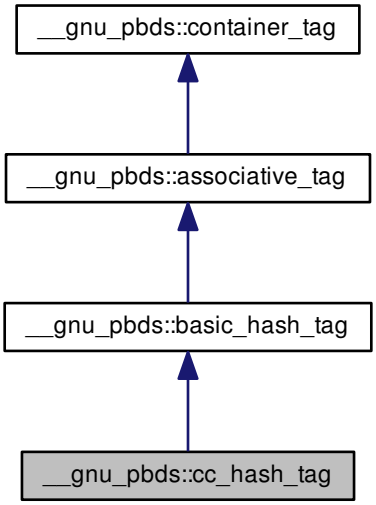

4.341.1 Detailed Description

Collision-chaining hash.

Definition at line 141 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.342 __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb-_Hash_Fn, Resize_Policy >:

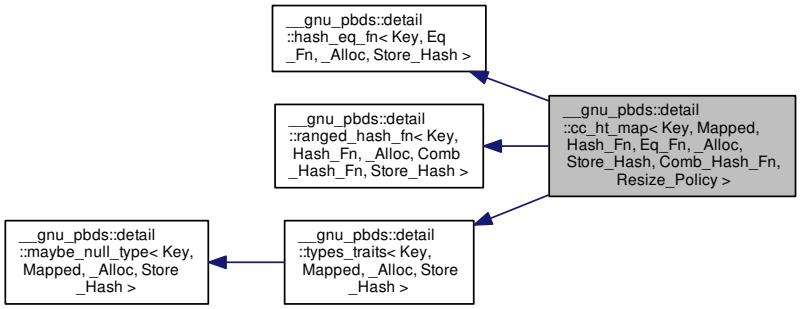

Public Types

- enum { **store_hash** }
- typedef _Alloc **allocator_type**
- typedef Comb_Hash_Fn **comb_hash_fn**
- typedef const_iterator_ **const_iterator**
- typedef traits_base::const_pointer **const_pointer**
- typedef traits_base::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef Eq_Fn **eq_fn**
- typedef Hash_Fn **hash_fn**
- typedef iterator_ **iterator**
- typedef traits_base::key_const_pointer **key_const_pointer**
- typedef traits_base::key_const_reference **key_const_reference**
- typedef traits_base::key_pointer **key_pointer**
- typedef traits_base::key_reference **key_reference**
- typedef traits_base::key_type **key_type**
- typedef traits_base::mapped_const_pointer **mapped_const_pointer**
- typedef traits_base::mapped_const_reference **mapped_const_reference**
- typedef traits_base::mapped_pointer **mapped_pointer**
- typedef traits_base::mapped_reference **mapped_reference**
- typedef traits_base::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef point_const_iterator_ **point_const_iterator**

- typedef point_iterator_ **point_iterator**
- typedef traits_base::pointer **pointer**
- typedef traits_base::reference **reference**
- typedef Resize_Policy **resize_policy**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef traits_base::value_type **value_type**

Public Member Functions

- **cc_ht_map** (const Hash_Fn &)
- **cc_ht_map** (const Hash_Fn &, const Eq_Fn &)
- **cc_ht_map** (const Hash_Fn &, const Eq_Fn &, const Comb_Hash_Fn &)
- **cc_ht_map** (const Hash_Fn &, const Eq_Fn &, const Comb_Hash_Fn &, const Resize_Policy &)
- **cc_ht_map** (const cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- template<typename It > void **copy_from_range** (It, It)
- bool empty () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- template<typename Pred > cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference)
- point_const_iterator **find** (key_const_reference) const
- point_iterator **find_end** ()
- point_const_iterator **find_end** () const
- Comb_Hash_Fn & get_comb_hash_fn ()
- const Comb_Hash_Fn & get_comb_hash_fn () const
- Eq_Fn & get_eq_fn ()
- const Eq_Fn & get_eq_fn () const
- Hash_Fn & get_hash_fn ()
- const Hash_Fn & get_hash_fn () const
- Resize_Policy & get_resize_policy ()
- const Resize_Policy & get_resize_policy () const
- void **initialize** ()
- std::pair< point_iterator, bool > **insert** (const_reference r_val)
- size_type **max_size** () const

- mapped_reference **operator[]** (key_const_reference r_key)
- size_type **size** () const
- void **swap** (cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy > &)

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Friends

- class **const_iterator_**
- class **iterator_**

4.342.1 Detailed Description

template<typename Key, typename Mapped, typename Hash_Fn, typename Eq_Fn, typename _Alloc, bool Store_Hash, typename Comb_Hash_Fn, typename Resize_Policy>class __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >

A collision-chaining hash-based container.

Template Parameters

Key	Key type.
Mapped	Map type.
Hash_Fn	Hashing functor. Default is __gnu_cxx::hash.
Eq_Fn	Equal functor. Default std::equal_to<Key>
_Alloc	Allocator type.
Store_Hash	If key type stores extra metadata. Defaults to false.
Comb_Hash_Fn	Combining hash functor. If Hash_Fn is not null_type, then this is the ranged-hash functor; otherwise, this is the range-hashing functor. XXX(See Design::Hash-Based Containers::Hash Policies.) Default direct_mask_range_hashing.
Resize_Policy	Resizes hash. Defaults to hash_standard_resize_policy, using hash_exponential_size_policy and hash_load_check_resize_trigger.

Bases are: detail::hash_eq_fn, Resize_Policy, detail::ranged_hash_fn, detail::types_traits. (Optional: detail::debug_map_base.)

Definition at line 140 of file cc_ht_map_.hpp.

4.342.2 Member Enumeration Documentation

4.342.2.1 template<typename Key, typename Mapped, typename Hash_Fn, typename Eq_Fn, typename _Alloc, bool Store_Hash, typename Comb_Hash_Fn, typename Resize_Policy> anonymous enum

Value stores hash, true or false.

Definition at line 203 of file cc_ht_map_.hpp.

4.342.3 Member Function Documentation

4.342.3.1 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > bool __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::empty ( ) const [inline]

True if size() == 0.

Definition at line 55 of file cc_ht_map_.hpp.

4.342.3.2 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > Comb_Hash_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_comb_hash_fn ( )

Return current comb_hash_fn.

Definition at line 72 of file cc_ht_map_.hpp.

4.342.3.3 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > const Comb_Hash_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_comb_hash_fn ( ) const

Return current const comb_hash_fn.

Definition at line 78 of file cc_ht_map_.hpp.

4.342.3.4 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > Eq_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_eq_fn ( )

Return current eq_fn.

Definition at line 60 of file cc_ht_map_.hpp.

4.342.3.5 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > const Eq_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_eq_fn ( ) const

Return current const eq_fn.

Definition at line 66 of file cc_ht_map_.hpp.

4.342.3.6 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > Hash_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_hash_fn ( )

Return current hash_fn.

Definition at line 48 of file cc_ht_map_.hpp.

4.342.3.7 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > const Hash_Fn & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_hash_fn ( ) const

Return current const hash_fn.

Definition at line 54 of file cc_ht_map_.hpp.

4.342.3.8 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > Resize_Policy & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_resize_policy ( )

Return current resize_policy.

Definition at line 84 of file cc_ht_map_.hpp.

4.342.3.9 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Hash_Fn , typename Resize_Policy > const Resize_Policy & __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >::get_resize_policy ( ) const

Return current const resize_policy.

Definition at line 90 of file cc_ht_map_.hpp.

The documentation for this class was generated from the following file:

- cc_ht_map_.hpp

4.343 __gnu_cxx::char_traits< _CharT > Struct Template Reference

Inheritance diagram for __gnu_cxx::char_traits< _CharT >:

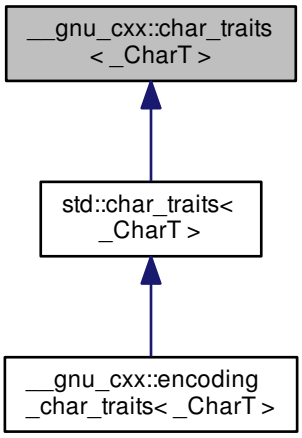

Public Types

- typedef _CharT **char_type**
- typedef _Char_types< _CharT > ::int_type **int_type**
- typedef _Char_types< _CharT > ::off_type **off_type**

- typedef _Char_types< _CharT > ::pos_type **pos_type**
- typedef _Char_types< _CharT > ::state_type **state_type**

Static Public Member Functions

- static constexpr void **assign** (char_type &__c1, const char_type &__c2)
- static constexpr char_type * **assign** (char_type *__s, std::size_t __n, char_type __a)
- static constexpr int **compare** (const char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr char_type * **copy** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **eof** ()
- static constexpr bool **eq** (const char_type &__c1, const char_type &__c2)
- static constexpr bool **eq_int_type** (const int_type &__c1, const int_type &__c2)
- static constexpr const char_type * **find** (const char_type *__s, std::size_t __n, const char_type &__a)
- static constexpr std::size_t **length** (const char_type *__s)
- static constexpr bool **lt** (const char_type &__c1, const char_type &__c2)
- static constexpr char_type * **move** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **not_eof** (const int_type &__c)
- static constexpr char_type **to_char_type** (const int_type &__c)
- static constexpr int_type **to_int_type** (const char_type &__c)

4.343.1 Detailed Description

template<typename _CharT>struct __gnu_cxx::char_traits< _CharT >

Base class used to implement std::char_traits.

Note

For any given actual character type, this definition is probably wrong. (Most of the member functions are likely to be right, but the int_type and state_type typedefs, and the eof() member function, are likely to be wrong.) The reason this class exists is so users can specialize it. Classes in namespace std may not be specialized for fundamental types, but classes in namespace __gnu_cxx may be.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/strings.html#strings.string.character_types for advice on how to make use of this class for *unusual* character types. Also, check out include/ext/pod_char_traits.h.

Definition at line 90 of file char_traits.h.

The documentation for this struct was generated from the following file:

- char_traits.h

4.344 std::char_traits< _CharT > Struct Template Reference

Inheritance diagram for std::char_traits< _CharT >:

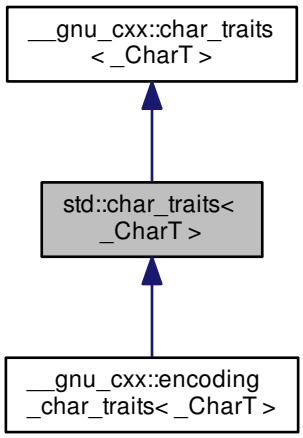

Public Types

- typedef _CharT **char_type**
- typedef _Char_types< _CharT >
  ::int_type **int_type**
- typedef _Char_types< _CharT >
  ::off_type **off_type**
- typedef _Char_types< _CharT >
  ::pos_type **pos_type**
- typedef _Char_types< _CharT >
  ::state_type **state_type**

Static Public Member Functions

- static constexpr void **assign** (char_type &__c1, const char_type &__c2)
- static constexpr char_type * **assign** (char_type *__s, std::size_t __n, char_type __a)
- static constexpr int **compare** (const char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr char_type * **copy** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **eof** ()
- static constexpr bool **eq** (const char_type &__c1, const char_type &__c2)
- static constexpr bool **eq_int_type** (const int_type &__c1, const int_type &__c2)
- static constexpr const char_type * **find** (const char_type *__s, std::size_t __n, const char_type &__a)
- static constexpr std::size_t **length** (const char_type *__s)
- static constexpr bool **lt** (const char_type &__c1, const char_type &__c2)
- static constexpr char_type * **move** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **not_eof** (const int_type &__c)

- static constexpr char_type **to_char_type** (const int_type &__c)
- static constexpr int_type **to_int_type** (const char_type &__c)

4.344.1 Detailed Description

template<class _CharT>struct std::char_traits< _CharT >

Basis for explicit traits specializations.

Note

For any given actual character type, this definition is probably wrong. Since this is just a thin wrapper around __gnu_cxx::char_traits, it is possible to achieve a more appropriate definition by specializing __gnu_cxx::char_traits.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/strings.html#strings.string.character_types for advice on how to make use of this class for *unusual* character types. Also, check out include/ext/pod_char_traits.h.

Definition at line 303 of file char_traits.h.

The documentation for this struct was generated from the following file:

- char_traits.h

4.345 std::char_traits< __gnu_cxx::character< _Value, _Int, _St > > Struct Template Reference

Public Types

- typedef __gnu_cxx::character < _Value, _Int, _St > **char_type**
- typedef char_type::int_type **int_type**
- typedef streamoff **off_type**
- typedef fpos< state_type > **pos_type**
- typedef char_type::state_type **state_type**

Static Public Member Functions

- static void **assign** (char_type &__c1, const char_type &__c2)
- static char_type * **assign** (char_type *__s, size_t __n, char_type __a)
- static int **compare** (const char_type *__s1, const char_type *__s2, size_t __n)
- static char_type * **copy** (char_type *__s1, const char_type *__s2, size_t __n)
- static int_type **eof** ()
- static bool **eq** (const char_type &__c1, const char_type &__c2)
- static bool **eq_int_type** (const int_type &__c1, const int_type &__c2)
- static const char_type * **find** (const char_type *__s, size_t __n, const char_type &__a)
- static size_t **length** (const char_type *__s)
- static bool **lt** (const char_type &__c1, const char_type &__c2)
- static char_type * **move** (char_type *__s1, const char_type *__s2, size_t __n)
- static int_type **not_eof** (const int_type &__c)
- static char_type **to_char_type** (const int_type &__i)
- static int_type **to_int_type** (const char_type &__c)

4.345.1 Detailed Description

template<typename _Value, typename _Int, typename _St>struct std::char_traits< __gnu_cxx::character< _Value, _Int, _St > >

char_traits<__gnu_cxx::character> specialization.

Definition at line 97 of file pod_char_traits.h.

The documentation for this struct was generated from the following file:

- pod_char_traits.h

4.346 std::char_traits< char > Struct Template Reference

Public Types

- typedef char **char_type**
- typedef int **int_type**
- typedef streamoff **off_type**
- typedef streampos **pos_type**
- typedef mbstate_t **state_type**

Static Public Member Functions

- static constexpr void **assign** (char_type &__c1, const char_type &__c2) noexcept
- static constexpr char_type * **assign** (char_type *__s, size_t __n, char_type __a)
- static constexpr int **compare** (const char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr char_type * **copy** (char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr int_type **eof** () noexcept
- static constexpr bool **eq** (const char_type &__c1, const char_type &__c2) noexcept
- static constexpr bool **eq_int_type** (const int_type &__c1, const int_type &__c2) noexcept
- static constexpr const char_type * **find** (const char_type *__s, size_t __n, const char_type &__a)
- static constexpr size_t **length** (const char_type *__s)
- static constexpr bool **lt** (const char_type &__c1, const char_type &__c2) noexcept
- static constexpr char_type * **move** (char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr int_type **not_eof** (const int_type &__c) noexcept
- static constexpr char_type **to_char_type** (const int_type &__c) noexcept
- static constexpr int_type **to_int_type** (const char_type &__c) noexcept

4.346.1 Detailed Description

template<>struct std::char_traits< char >

21.1.3.1 char_traits specializations

Definition at line 309 of file char_traits.h.

The documentation for this struct was generated from the following file:

- char_traits.h

4.347 std::char_traits< wchar_t > Struct Template Reference

Public Types

- typedef wchar_t **char_type**
- typedef wint_t **int_type**
- typedef streamoff **off_type**
- typedef wstreampos **pos_type**
- typedef mbstate_t **state_type**

Static Public Member Functions

- static constexpr void **assign** (char_type &__c1, const char_type &__c2) noexcept
- static constexpr char_type * **assign** (char_type *__s, size_t __n, char_type __a)
- static constexpr int **compare** (const char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr char_type * **copy** (char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr int_type **eof** () noexcept
- static constexpr bool **eq** (const char_type &__c1, const char_type &__c2) noexcept
- static constexpr bool **eq_int_type** (const int_type &__c1, const int_type &__c2) noexcept
- static constexpr const char_type * **find** (const char_type *__s, size_t __n, const char_type &__a)
- static constexpr size_t **length** (const char_type *__s)
- static constexpr bool **lt** (const char_type &__c1, const char_type &__c2) noexcept
- static constexpr char_type * **move** (char_type *__s1, const char_type *__s2, size_t __n)
- static constexpr int_type **not_eof** (const int_type &__c) noexcept
- static constexpr char_type **to_char_type** (const int_type &__c) noexcept
- static constexpr int_type **to_int_type** (const char_type &__c) noexcept

4.347.1 Detailed Description

template<>struct std::char_traits< wchar_t >

21.1.3.2 char_traits specializations

Definition at line 437 of file char_traits.h.

The documentation for this struct was generated from the following file:

- char_traits.h

4.348 __gnu_cxx::character< _Value, _Int, _St > Struct Template Reference

Public Types

- typedef character< _Value, _Int, _St > **char_type**
- typedef _Int **int_type**
- typedef _St **state_type**
- typedef _Value **value_type**

Static Public Member Functions

- template<typename V2 >
  static char_type **from** (const V2 &v)
- template<typename V2 >
  static V2 **to** (const char_type &c)

Public Attributes

- value_type **value**

4.348.1 Detailed Description

template<typename _Value, typename _Int, typename _St = std::mbstate_t>struct __gnu_cxx::character< _Value, _Int, _St >

A POD class that serves as a character abstraction class.

Definition at line 49 of file pod_char_traits.h.

The documentation for this struct was generated from the following file:

- pod_char_traits.h

4.349 std::chi_squared_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **chi_squared_distribution** (_RealType __n)
- **chi_squared_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- result_type min () const
- _RealType **n** () const

- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::chi_squared_distribution< _RealType1 > &__x)
- bool operator== (const chi_squared_distribution &__d1, const chi_squared_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::chi_squared_distribution< _RealType1 > &__x)

4.349.1 Detailed Description

template<typename _RealType = double>class std::chi_squared_distribution< _RealType >

A chi_squared_distribution random number distribution.

The formula for the normal probability mass function is $p(x|n) = \frac{x^{(n/2)-1}e^{-x/2}}{\Gamma(n/2)2^{n/2}}$

Definition at line 2621 of file random.h.

4.349.2 Member Typedef Documentation

4.349.2.1 template<typename _RealType = double> typedef _RealType std::chi_squared_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 2624 of file random.h.

4.349.3 Member Function Documentation

4.349.3.1 template<typename _RealType = double> result_type std::chi_squared_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 2715 of file random.h.

References std::numeric_limits< _Tp >::max().

4.349.3.2 template<typename _RealType = double> result_type std::chi_squared_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 2708 of file random.h.

4.349.3.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::chi_squared_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 2723 of file random.h.

4.349.3.4 template<typename _RealType = double> param_type std::chi_squared_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 2688 of file random.h.

4.349.3.5 template<typename _RealType = double> void std::chi_squared_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 2696 of file random.h.

References std::gamma_distribution< _RealType >::param().

4.349.3.6 template<typename _RealType = double> void std::chi_squared_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 2674 of file random.h.

References std::gamma_distribution< _RealType >::reset().

4.349.4 Friends And Related Function Documentation

4.349.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::chi_squared_distribution< _RealType1 > & *__x*) [friend]

Inserts a chi_squared_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A chi_squared_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.349.4.2 template<typename _RealType = double> bool operator== (const chi_squared_distribution< _RealType > & __d1, const chi_squared_distribution< _RealType > & __d2) [friend]

Return true if two Chi-squared distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 2774 of file random.h.

4.349.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & __is, std::chi_squared_distribution< _RealType1 > & __x) [friend]

Extracts a chi_squared_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A chi_squared_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.350 std::codecvt< _InternT, _ExternT, _StateT > Class Template Reference

Inheritance diagram for std::codecvt< _InternT, _ExternT, _StateT >:

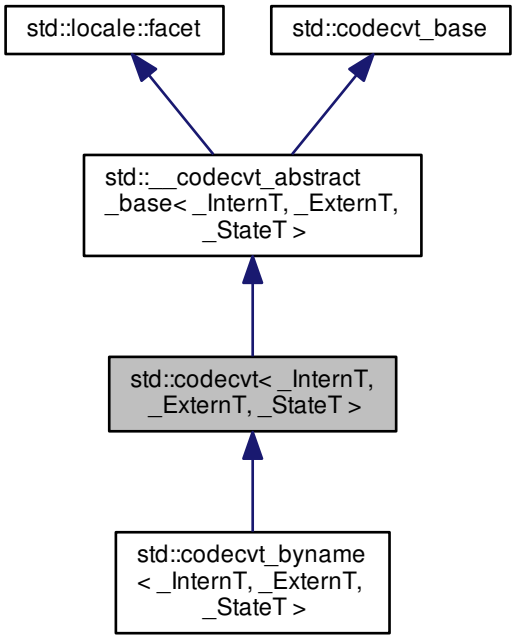

Public Types

- typedef _ExternT **extern_type**
- typedef _InternT **intern_type**
- typedef codecvt_base::result **result**
- typedef _StateT **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- **codecvt** (__c_locale __cloc, size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_-next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_codecvt**

4.350.1 Detailed Description

template<typename _InternT, typename _ExternT, typename _StateT>class std::codecvt< _InternT, _ExternT, _StateT >

Primary class template codecvt.

NB: Generic, mostly useless implementation.

Definition at line 274 of file codecvt.h.

4.350.2 Member Function Documentation

4.350.2.1 template<typename _InternT, typename _ExternT, typename _StateT> virtual result std::codecvt< _InternT, _ExternT, _StateT >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >.

4.350.2.2 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::in (state_type & *__state*, const extern_type * *__from*, const extern_type * *__from_end*, const extern_type *& *__from_next*, intern_type * *__to*, intern_type * *__to_end*, intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.350.2.3 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::out (state_type & *__state*, const intern_type * *__from*, const intern_type * *__from_end*, const intern_type *& *__from_next*, extern_type * *__to*, extern_type * *__to_end*, extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.350.2.4 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.351 std::codecvt< _InternT, _ExternT, encoding_state > Class Template Reference

Inheritance diagram for std::codecvt< _InternT, _ExternT, encoding_state >:

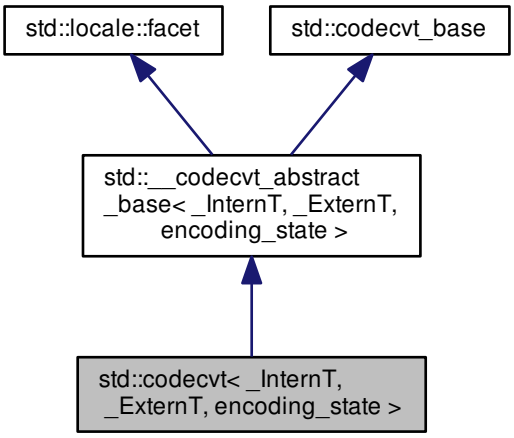

Public Types

- typedef state_type::descriptor_type **descriptor_type**
- typedef _ExternT **extern_type**
- typedef _InternT **intern_type**
- typedef codecvt_base::result **result**
- typedef __gnu_cxx::encoding_state **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- **codecvt** (state_type &__enc, size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_-next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.351.1 Detailed Description

template<typename _InternT, typename _ExternT>class std::codecvt< _InternT, _ExternT, encoding_state >

codecvt<InternT, _ExternT, encoding_state> specialization.

Definition at line 233 of file codecvt_specializations.h.

4.351.2 Member Function Documentation

4.351.2.1 template<typename _InternT , typename _ExternT > codecvt_base::result std::codecvt< _InternT, _ExternT, encoding_state >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< _InternT, _ExternT, encoding_state >.

Definition at line 309 of file codecvt_specializations.h.

4.351.2.2 result std::__codecvt_abstract_base< _InternT, _ExternT, encoding_state >::in (state_type & __state, const extern_type * __from, const extern_type * __from_end, const extern_type *& __from_next, intern_type * __to, intern_type * __to_end, intern_type *& __to_next) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.351.2.3 result std::__codecvt_abstract_base< _InternT, _ExternT, encoding_state >::out (state_type & __state, const intern_type * __from, const intern_type * __from_end, const intern_type *& __from_next, extern_type * __to, extern_type * __to_end, extern_type *& __to_next) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.351.2.4 result std::__codecvt_abstract_base< _InternT, _ExternT, encoding_state >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt_specializations.h

4.352 std::codecvt< char, char, mbstate_t > Class Template Reference

Inheritance diagram for std::codecvt< char, char, mbstate_t >:

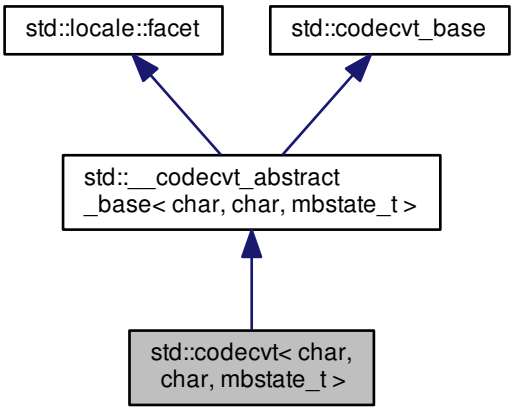

Public Types

- typedef char **extern_type**
- typedef char **intern_type**
- typedef codecvt_base::result **result**
- typedef mbstate_t **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- **codecvt** (__c_locale __cloc, size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()

- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_codecvt**

Friends

- class **messages**< **char** >

4.352.1 Detailed Description

template<><>class std::codecvt< char, char, mbstate_t >

class codecvt<char, char, mbstate_t> specialization.

Definition at line 338 of file codecvt.h.

4.352.2 Member Function Documentation

4.352.2.1 virtual result std::codecvt< char, char, mbstate_t >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< char, char, mbstate_t >.

4.352.2.2 result std::__codecvt_abstract_base< char , char , mbstate_t >::in (state_type & *__state,* const extern_type * *__from,* const extern_type * *__from_end,* const extern_type *& *__from_next,* intern_type * *__to,* intern_type * *__to_end,* intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.352.2.3 result std::__codecvt_abstract_base< char , char , mbstate_t >::out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.352.2.4 result std::__codecvt_abstract_base< char , char , mbstate_t >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.

__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.353 std::codecvt< char16_t, char, mbstate_t > Class Template Reference

Inheritance diagram for std::codecvt< char16_t, char, mbstate_t >:

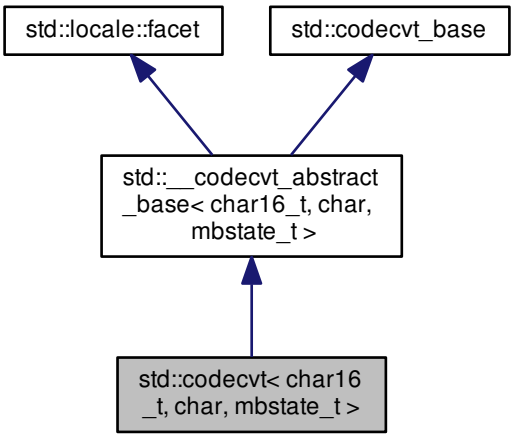

Public Types

- typedef char **extern_type**
- typedef char16_t **intern_type**
- typedef codecvt_base::result **result**
- typedef mbstate_t **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const

- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.353.1 Detailed Description

template<>class std::codecvt< char16_t, char, mbstate_t >

Class codecvt<char16_t, char, mbstate_t> specialization.

Converts between UTF-16 and UTF-8.

Definition at line 467 of file codecvt.h.

4.353.2 Member Function Documentation

4.353.2.1 virtual result std::codecvt< char16_t, char, mbstate_t >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< char16_t, char, mbstate_t >.

4.353.2.2 result std::__codecvt_abstract_base< char16_t , char , mbstate_t >::in (state_type & *__state,* const extern_type * *__from,* const extern_type * *__from_end,* const extern_type *& *__from_next,* intern_type * *__to,* intern_type * *__to_end,* intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.353.2.3 result std::__codecvt_abstract_base< char16_t , char , mbstate_t >::out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.353.2.4 result std::__codecvt_abstract_base< char16_t , char , mbstate_t >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.354 std::codecvt< char32_t, char, mbstate_t > Class Template Reference

Inheritance diagram for std::codecvt< char32_t, char, mbstate_t >:

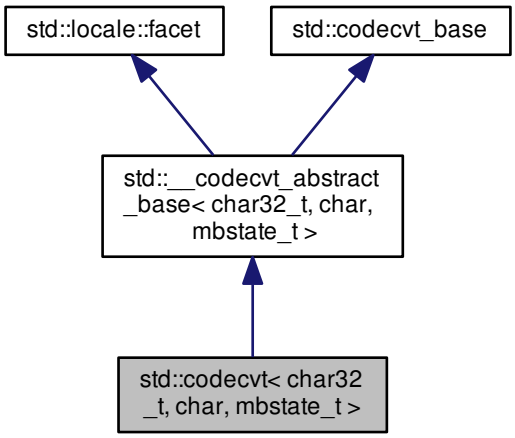

Public Types

- typedef char **extern_type**
- typedef char32_t **intern_type**
- typedef codecvt_base::result **result**
- typedef mbstate_t **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.354.1 Detailed Description

template<>class std::codecvt< char32_t, char, mbstate_t >

Class codecvt<char32_t, char, mbstate_t> specialization.

Converts between UTF-32 and UTF-8.

Definition at line 524 of file codecvt.h.

4.354.2 Member Function Documentation

4.354.2.1 virtual result std::codecvt< char32_t, char, mbstate_t >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< char32_t, char, mbstate_t >.

4.354.2.2 result std::__codecvt_abstract_base< char32_t , char , mbstate_t >::in (state_type & *__state,* const extern_type * *__from,* const extern_type * *__from_end,* const extern_type *& *__from_next,* intern_type * *__to,* intern_type * *__to_end,* intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.354.2.3 result std::__codecvt_abstract_base< char32_t , char , mbstate_t >::out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

References std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::do_out().

4.354.2.4 result std::__codecvt_abstract_base< char32_t , char , mbstate_t >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.355 std::codecvt< wchar_t, char, mbstate_t > Class Template Reference

Inheritance diagram for std::codecvt< wchar_t, char, mbstate_t >:

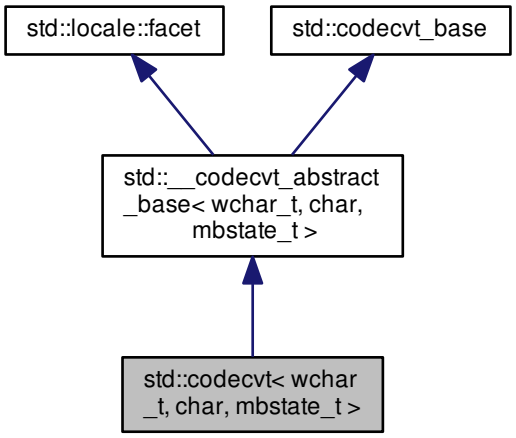

Public Types

- typedef char **extern_type**
- typedef wchar_t **intern_type**
- typedef codecvt_base::result **result**
- typedef mbstate_t **state_type**

Public Member Functions

- **codecvt** (size_t __refs=0)
- **codecvt** (__c_locale __cloc, size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_codecvt**

Friends

- class **messages**< **wchar_t** >

4.355.1 Detailed Description

template<>class std::codecvt< wchar_t, char, mbstate_t >

Class codecvt<wchar_t, char, mbstate_t> specialization.

Converts between narrow and wide characters in the native character set

Definition at line 401 of file codecvt.h.

4.355.2 Member Function Documentation

4.355.2.1 virtual result std::codecvt< wchar_t, char, mbstate_t >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< wchar_t, char, mbstate_t >.

4.355.2.2 result std::__codecvt_abstract_base< wchar_t , char , mbstate_t >::in (state_type & *__state,* const extern_type * *__from,* const extern_type * *__from_end,* const extern_type *& *__from_next,* intern_type * *__to,* intern_type * *__to_end,* intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.355.2.3 result std::__codecvt_abstract_base< wchar_t , char , mbstate_t >::out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.355.2.4 result std::__codecvt_abstract_base< wchar_t , char , mbstate_t >::unshift (state_type & *__state,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [inline],[inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.356 std::codecvt_base Class Reference

Inheritance diagram for std::codecvt_base:

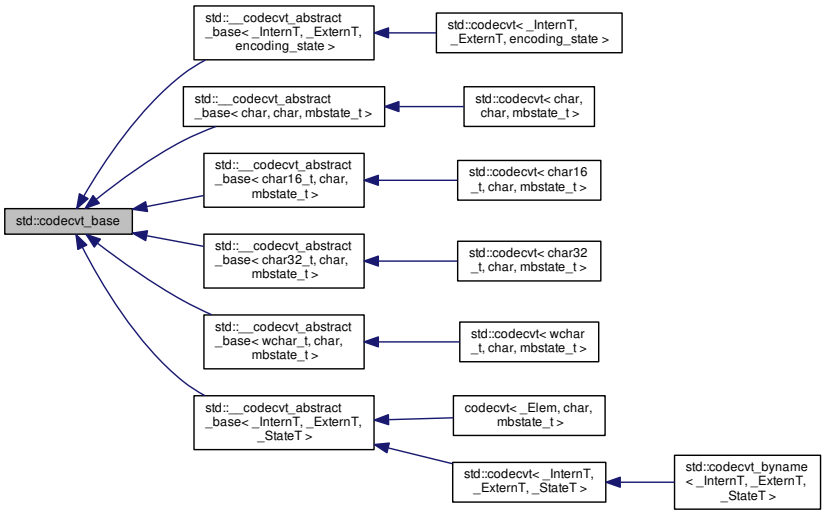

Public Types

- enum **result** { **ok**, **partial**, **error**, **noconv** }

4.356.1 Detailed Description

Empty base class for codecvt facet [22.2.1.5].

Definition at line 46 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.357 std::codecvt_byname< _InternT, _ExternT, _StateT > Class Template Reference

Inheritance diagram for std::codecvt_byname< _InternT, _ExternT, _StateT >:

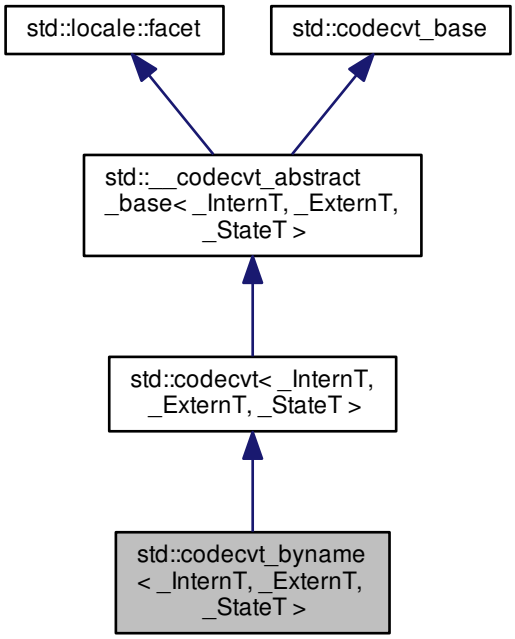

Public Types

- typedef _ExternT **extern_type**
- typedef _InternT **intern_type**
- typedef codecvt_base::result **result**
- typedef _StateT **state_type**

Public Member Functions

- **codecvt_byname** (const char *__s, size_t __refs=0)
- **codecvt_byname** (const string &__s, size_t __refs=0)
- bool **always_noconv** () const throw ()
- int **encoding** () const throw ()
- result in (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- int **length** (state_type &__state, const extern_type *__from, const extern_type *__end, size_t __max) const
- int **max_length** () const throw ()
- result out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- result unshift (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Public Attributes

- static locale::id **id**

Protected Member Functions

- virtual bool **do_always_noconv** () const throw ()
- virtual int **do_encoding** () const throw ()
- virtual result **do_in** (state_type &__state, const extern_type *__from, const extern_type *__from_end, const extern_type *&__from_next, intern_type *__to, intern_type *__to_end, intern_type *&__to_next) const
- virtual int **do_length** (state_type &, const extern_type *__from, const extern_type *__end, size_t __max) const
- virtual int **do_max_length** () const throw ()
- virtual result do_out (state_type &__state, const intern_type *__from, const intern_type *__from_end, const intern_type *&__from_next, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const
- virtual result **do_unshift** (state_type &__state, extern_type *__to, extern_type *__to_end, extern_type *&__to_next) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_codecvt**

4.357.1 Detailed Description

template<typename _InternT, typename _ExternT, typename _StateT>class std::codecvt_byname< _InternT, _ExternT, _StateT >

class codecvt_byname [22.2.1.6].

Definition at line 696 of file codecvt.h.

4.357.2 Member Function Documentation

4.357.2.1 template<typename _InternT, typename _ExternT, typename _StateT> virtual result std::codecvt< _InternT, _ExternT, _StateT >::do_out (state_type & *__state,* const intern_type * *__from,* const intern_type * *__from_end,* const intern_type *& *__from_next,* extern_type * *__to,* extern_type * *__to_end,* extern_type *& *__to_next*) const [protected], [virtual], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This function is a hook for derived classes to change the value returned.

See Also

out for more information.

Implements std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >.

4.357.2.2 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::in (state_type & *__state*, const extern_type * *__from*, const extern_type * *__from_end*, const extern_type *& *__from_next*, intern_type * *__to*, intern_type * *__to_end*, intern_type *& *__to_next*) const [inline], [inherited]

Convert from external to internal character set.

Converts input string of extern_type to output string of intern_type. This is analogous to mbsrtowcs. It does this by calling codecvt::do_in.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 196 of file codecvt.h.

4.357.2.3 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::out (state_type & *__state*, const intern_type * *__from*, const intern_type * *__from_end*, const intern_type *& *__from_next*, extern_type * *__to*, extern_type * *__to_end*, extern_type *& *__to_next*) const [inline], [inherited]

Convert from internal to external character set.

Converts input string of intern_type to output string of extern_type. This is analogous to wcsrtombs. It does this by calling codecvt::do_out.

The source and destination character sets are determined by the facet's locale, internal and external types.

The characters in [from,from_end) are converted and written to [to,to_end). from_next and to_next are set to point to the character following the last successfully converted character, respectively. If the result needed no conversion, from_next and to_next are not affected.

The *state* argument should be initialized if the input is at the beginning and carried from a previous call if continuing conversion. There are no guarantees about how *state* is used.

The result returned is a member of codecvt_base::result. If all the input is converted, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the input ends early or there is insufficient space in the output, returns codecvt_base::partial. Otherwise the conversion failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__from	Start of input.
__from_end	End of input.
__from_next	Returns start of unconverted data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 116 of file codecvt.h.

4.357.2.4 template<typename _InternT, typename _ExternT, typename _StateT> result std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >::unshift (state_type & *__state*, extern_type * *__to*, extern_type * *__to_end*, extern_type *& *__to_next*) const [inline], [inherited]

Reset conversion state.

Writes characters to output that would restore *state* to initial conditions. The idea is that if a partial conversion occurs, then the converting the characters written by this function would leave the state in initial conditions, rather than partial conversion state. It does this by calling codecvt::do_unshift().

For example, if 4 external characters always converted to 1 internal character, and input to in() had 6 external characters with state saved, this function would write two characters to the output and set the state to initialized conditions.

The source and destination character sets are determined by the facet's locale, internal and external types.

The result returned is a member of codecvt_base::result. If the state could be reset and data written, returns codecvt_base::ok. If no conversion is necessary, returns codecvt_base::noconv. If the output has insufficient space, returns codecvt_base::partial. Otherwise the reset failed and codecvt_base::error is returned.

Parameters

__state	Persistent conversion state data.
__to	Start of output buffer.
__to_end	End of output buffer.
__to_next	Returns start of unused output area.

Returns

codecvt_base::result.

Definition at line 155 of file codecvt.h.

The documentation for this class was generated from the following file:

- codecvt.h

4.358 std::collate< _CharT > Class Template Reference

Inheritance diagram for std::collate< _CharT >:

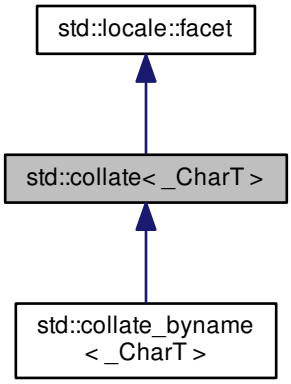

Public Types

- typedef _CharT char_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- collate (size_t __refs=0)
- collate (__c_locale __cloc, size_t __refs=0)
- int **_M_compare** (const _CharT *, const _CharT *) const throw ()
- template<>
  int **_M_compare** (const char *, const char *) const throw()
- template<>
  int **_M_compare** (const wchar_t *, const wchar_t *) const throw()
- size_t **_M_transform** (_CharT *, const _CharT *, size_t) const throw ()
- template<>
  size_t **_M_transform** (char *, const char *, size_t) const throw()
- template<>
  size_t **_M_transform** (wchar_t *, const wchar_t *, size_t) const throw()
- int compare (const _CharT *__lo1, const _CharT *__hi1, const _CharT *__lo2, const _CharT *__hi2) const
- long hash (const _CharT *__lo, const _CharT *__hi) const
- string_type transform (const _CharT *__lo, const _CharT *__hi) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~collate ()
- virtual int do_compare (const _CharT *__lo1, const _CharT *__hi1, const _CharT *__lo2, const _CharT *__hi2) const
- virtual long do_hash (const _CharT *__lo, const _CharT *__hi) const
- virtual string_type do_transform (const _CharT *__lo, const _CharT *__hi) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_collate**

4.358.1 Detailed Description

template<typename _CharT>class std::collate< _CharT >

Facet for localized string comparison.

This facet encapsulates the code to compare strings in a localized manner.

The collate template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the collate facet.

Definition at line 644 of file locale_classes.h.

4.358.2 Member Typedef Documentation

4.358.2.1 template<typename _CharT> typedef _CharT std::collate< _CharT >::char_type

Public typedefs.

Definition at line 650 of file locale_classes.h.

4.358.2.2 template<typename _CharT> typedef basic_string<_CharT> std::collate< _CharT >::string_type

Public typedefs.

Definition at line 651 of file locale_classes.h.

4.358.3 Constructor & Destructor Documentation

4.358.3.1 template<typename _CharT> std::collate< _CharT >::collate (size_t *__refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 671 of file locale_classes.h.

4.358.3.2 template<typename _CharT> std::collate< _CharT >::collate (__c_locale __cloc, size_t __refs = 0) [inline], [explicit]

Internal constructor. Not for general use.

This is a constructor for use by the library itself to set up new locales.

Parameters

__cloc	The C locale.
__refs	Passed to the base facet class.

Definition at line 685 of file locale_classes.h.

4.358.3.3 template<typename _CharT> virtual std::collate< _CharT >::~collate ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 748 of file locale_classes.h.

4.358.4 Member Function Documentation

4.358.4.1 template<typename _CharT> int std::collate< _CharT >::compare (const _CharT * __lo1, const _CharT * __hi1, const _CharT * __lo2, const _CharT * __hi2) const [inline]

Compare two strings.

This function compares two strings and returns the result by calling collate::do_compare().

Parameters

__lo1	Start of string 1.
__hi1	End of string 1.
__lo2	Start of string 2.
__hi2	End of string 2.

Returns

1 if string1 > string2, -1 if string1 < string2, else 0.

Definition at line 702 of file locale_classes.h.

4.358.4.2 template<typename _CharT> int std::collate< _CharT >::do_compare (const _CharT * __lo1, const _CharT * __hi1, const _CharT * __lo2, const _CharT * __hi2) const [protected], [virtual]

Compare two strings.

This function is a hook for derived classes to change the value returned.

See Also

compare().

Parameters

__lo1	Start of string 1.
__hi1	End of string 1.
__lo2	Start of string 2.
__hi2	End of string 2.

Returns

1 if string1 > string2, -1 if string1 < string2, else 0.

Definition at line 161 of file locale_classes.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::basic_string< _CharT, _Traits, _Alloc >::data(), and std::basic_string< _CharT, _Traits, _Alloc >::length().

4.358.4.3 template<typename _CharT> long std::collate< _CharT >::do_hash (const _CharT * *__lo*, const _CharT * *__hi*) const [protected], [virtual]

Return hash of a string.

This function computes and returns a hash on the input string. This function is a hook for derived classes to change the value returned.

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Hash value.

Definition at line 256 of file locale_classes.tcc.

4.358.4.4 template<typename _CharT> collate< _CharT >::string_type std::collate< _CharT >::do_transform (const _CharT * *__lo*, const _CharT * *__hi*) const [protected], [virtual]

Transform string to comparable form.

This function is a hook for derived classes to change the value returned.

Parameters

__lo	Start.
__hi	End.

Returns

transformed string.

Definition at line 200 of file locale_classes.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::append(), std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::basic_string< _CharT, _Traits, _Alloc >::data(), std::basic_string< _CharT, _Traits, _Alloc >::length(), and std::basic_string< _CharT, _Traits, _Alloc >::push_back().

4.358.4.5 template<typename _CharT> long std::collate< _CharT >::hash (const _CharT * *__lo*, const _CharT * *__hi*) const [inline]

Return hash of a string.

This function computes and returns a hash on the input string. It does so by returning collate::do_hash().

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Hash value.

Definition at line 735 of file locale_classes.h.

4.358.4.6 template<typename _CharT> string_type std::collate< _CharT >::transform (const _CharT * __lo, const _CharT * __hi) const [inline]

Transform string to comparable form.

This function is a wrapper for strxfrm functionality. It takes the input string and returns a modified string that can be directly compared to other transformed strings. In the C locale, this function just returns a copy of the input string. In some other locales, it may replace two chars with one, change a char for another, etc. It does so by returning collate::do_transform().

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Transformed string_type.

Definition at line 721 of file locale_classes.h.

4.358.5 Member Data Documentation

4.358.5.1 template<typename _CharT> locale::id std::collate< _CharT >::id [static]

Numpunct facet id.

Definition at line 661 of file locale_classes.h.

The documentation for this class was generated from the following files:

- locale_classes.h
- locale_classes.tcc

4.359 std::collate_byname< _CharT > Class Template Reference

Inheritance diagram for std::collate_byname< _CharT >:

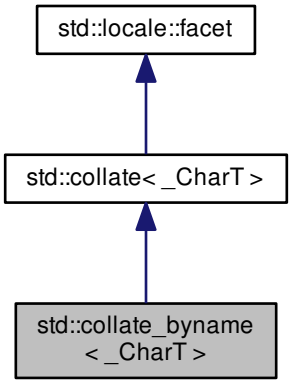

Public Types

- typedef _CharT char_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- **collate_byname** (const char *__s, size_t __refs=0)
- **collate_byname** (const string &__s, size_t __refs=0)
- int **_M_compare** (const _CharT *, const _CharT *) const throw ()
- template<>
  int **_M_compare** (const char *, const char *) const throw()
- template<>
  int **_M_compare** (const wchar_t *, const wchar_t *) const throw()
- size_t **_M_transform** (_CharT *, const _CharT *, size_t) const throw ()
- template<>
  size_t **_M_transform** (char *, const char *, size_t) const throw()
- template<>
  size_t **_M_transform** (wchar_t *, const wchar_t *, size_t) const throw()
- int compare (const _CharT *__lo1, const _CharT *__hi1, const _CharT *__lo2, const _CharT *__hi2) const
- long hash (const _CharT *__lo, const _CharT *__hi) const
- string_type transform (const _CharT *__lo, const _CharT *__hi) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual int do_compare (const _CharT *__lo1, const _CharT *__hi1, const _CharT *__lo2, const _CharT *__hi2) const
- virtual long do_hash (const _CharT *__lo, const _CharT *__hi) const
- virtual string_type do_transform (const _CharT *__lo, const _CharT *__hi) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_collate**

4.359.1 Detailed Description

template<typename _CharT>class std::collate_byname< _CharT >

class collate_byname [22.2.4.2].

Definition at line 818 of file locale_classes.h.

4.359.2 Member Typedef Documentation

4.359.2.1 template<typename _CharT > typedef _CharT std::collate_byname< _CharT >::char_type

Public typedefs.

Definition at line 823 of file locale_classes.h.

4.359.2.2 template<typename _CharT > typedef basic_string<_CharT> std::collate_byname< _CharT >::string_type

Public typedefs.

Definition at line 824 of file locale_classes.h.

4.359.3 Member Function Documentation

4.359.3.1 template<typename _CharT> int std::collate< _CharT >::compare (const _CharT * *__lo1,* const _CharT * *__hi1,* const _CharT * *__lo2,* const _CharT * *__hi2*) const [inline], [inherited]

Compare two strings.

This function compares two strings and returns the result by calling collate::do_compare().

Parameters

__lo1	Start of string 1.
__hi1	End of string 1.
__lo2	Start of string 2.
__hi2	End of string 2.

Returns

1 if string1 > string2, -1 if string1 < string2, else 0.

Definition at line 702 of file locale_classes.h.

4.359.3.2 template<typename _CharT> int std::collate< _CharT >::do_compare (const _CharT * *__lo1*, const _CharT * *__hi1*, const _CharT * *__lo2*, const _CharT * *__hi2*) const [protected], [virtual], [inherited]

Compare two strings.

This function is a hook for derived classes to change the value returned.

See Also

compare().

Parameters

__lo1	Start of string 1.
__hi1	End of string 1.
__lo2	Start of string 2.
__hi2	End of string 2.

Returns

1 if string1 > string2, -1 if string1 < string2, else 0.

Definition at line 161 of file locale_classes.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::basic_string< _CharT, _Traits, _Alloc >::data(), and std::basic_string< _CharT, _Traits, _Alloc >::length().

4.359.3.3 template<typename _CharT> long std::collate< _CharT >::do_hash (const _CharT * *__lo*, const _CharT * *__hi*) const [protected], [virtual], [inherited]

Return hash of a string.

This function computes and returns a hash on the input string. This function is a hook for derived classes to change the value returned.

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Hash value.

Definition at line 256 of file locale_classes.tcc.

4.359.3.4 template<typename _CharT> collate< _CharT >::string_type std::collate< _CharT >::do_transform (const _CharT * __lo, const _CharT * __hi) const [protected], [virtual], [inherited]

Transform string to comparable form.

This function is a hook for derived classes to change the value returned.

Parameters

__lo	Start.
__hi	End.

Returns

transformed string.

Definition at line 200 of file locale_classes.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::append(), std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::basic_string< _CharT, _Traits, _Alloc >::data(), std::basic_string< _CharT, _Traits, _Alloc >::length(), and std::basic_string< _CharT, _Traits, _Alloc >::push_back().

4.359.3.5 template<typename _CharT> long std::collate< _CharT >::hash (const _CharT * __lo, const _CharT * __hi) const [inline], [inherited]

Return hash of a string.

This function computes and returns a hash on the input string. It does so by returning collate::do_hash().

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Hash value.

Definition at line 735 of file locale_classes.h.

4.359.3.6 template<typename _CharT> string_type std::collate< _CharT >::transform (const _CharT * __lo, const _CharT * __hi) const [inline], [inherited]

Transform string to comparable form.

This function is a wrapper for strxfrm functionality. It takes the input string and returns a modified string that can be directly compared to other transformed strings. In the C locale, this function just returns a copy of the input string. In some other locales, it may replace two chars with one, change a char for another, etc. It does so by returning collate::do_transform().

Parameters

__lo	Start of string.
__hi	End of string.

Returns

Transformed string_type.

Definition at line 721 of file locale_classes.h.

4.359.4 Member Data Documentation

4.359.4.1 template<typename _CharT> locale::id std::collate< _CharT >::id [static], [inherited]

Numpunct facet id.

Definition at line 661 of file locale_classes.h.

The documentation for this class was generated from the following file:

- locale_classes.h

4.360 std::common_type< _Tp > Struct Template Reference

Inherited by std::common_type< _Tp1, _Tp2 >.

4.360.1 Detailed Description

template<typename... _Tp>struct std::common_type< _Tp >

common_type

Definition at line 2215 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.361 std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > > Struct Template Reference

Inherits __duration_common_type< common_type< _Rep1, _Rep2 >, _Period1, _Period2 >.

4.361.1 Detailed Description

template<typename _Rep1, typename _Period1, typename _Rep2, typename _Period2>struct std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > >

Specialization of common_type for chrono::duration types.

Definition at line 109 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.362 std::common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > > Struct Template Reference

Inherits __timepoint_common_type< common_type< _Duration1, _Duration2 >, _Clock >.

4.362.1 Detailed Description

template<typename _Clock, typename _Duration1, typename _Duration2>struct std::common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > >

Specialization of common_type for chrono::time_point types.

Definition at line 133 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.363 std::complex< _Tp > Struct Template Reference

Public Types

- typedef _Tp value_type

Public Member Functions

- constexpr complex (const _Tp &__r=_Tp(), const _Tp &__i=_Tp())
- constexpr **complex** (const complex &)=default
- template<typename _Up >
  constexpr complex (const complex< _Up > &__z)
- constexpr complex **__rep** () const
- _GLIBCXX_ABI_TAG_CXX11
  constexpr _Tp **imag** () const
- constexpr void **imag** (_Tp __val)
- constexpr complex< _Tp > & operator*= (const _Tp &)
- template<typename _Up >
  constexpr complex< _Tp > & operator*= (const complex< _Up > &)
- constexpr complex< _Tp > & operator+= (const _Tp &__t)
- template<typename _Up >
  constexpr complex< _Tp > & operator+= (const complex< _Up > &)
- constexpr complex< _Tp > & operator-= (const _Tp &__t)
- template<typename _Up >
  constexpr complex< _Tp > & operator-= (const complex< _Up > &)
- constexpr complex< _Tp > & operator/= (const _Tp &)
- template<typename _Up >
  constexpr complex< _Tp > & operator/= (const complex< _Up > &)
- constexpr complex< _Tp > & operator= (const _Tp &)
- constexpr complex & **operator=** (const complex &)=default
- template<typename _Up >
  constexpr complex< _Tp > & operator= (const complex< _Up > &)
- _GLIBCXX_ABI_TAG_CXX11
  constexpr _Tp **real** () const
- constexpr void **real** (_Tp __val)

4.363.1 Detailed Description

template<typename _Tp>struct std::complex< _Tp >

Template to represent complex numbers.

Specializations for float, double, and long double are part of the library. Results with any other type are not guaranteed.

Parameters

Tp	Type of real and imaginary values.

Definition at line 67 of file complex.

4.363.2 Member Typedef Documentation

4.363.2.1 template<typename _Tp> typedef _Tp std::complex< _Tp >::value_type

Value typedef.

Definition at line 130 of file complex.

4.363.3 Constructor & Destructor Documentation

4.363.3.1 template<typename _Tp> constexpr std::complex< _Tp >::complex (const _Tp & __r = _Tp(), const _Tp & __i = _Tp()) [inline]

Default constructor. First parameter is x, second parameter is y. Unspecified parameters default to 0.

Definition at line 134 of file complex.

4.363.3.2 template<typename _Tp> template<typename _Up > constexpr std::complex< _Tp >::complex (const complex< _Up > & __z) [inline]

Converting constructor.

Definition at line 144 of file complex.

4.363.4 Member Function Documentation

4.363.4.1 template<typename _Tp> constexpr complex<_Tp>& std::complex< _Tp >::operator+= (const _Tp & __t) [inline]

Add a scalar to this complex number.

Definition at line 189 of file complex.

4.363.4.2 template<typename _Tp> constexpr complex<_Tp>& std::complex< _Tp >::operator-= (const _Tp & __t) [inline]

Subtract a scalar from this complex number.

Definition at line 198 of file complex.

The documentation for this struct was generated from the following file:

- complex

4.364 std::complex< double > Struct Template Reference

Public Types

- typedef __complex__ double **_ComplexT**
- typedef double **value_type**

Public Member Functions

- constexpr **complex** (_ComplexT __z)
- constexpr **complex** (double __r=0.0, double __i=0.0)
- constexpr **complex** (const complex< float > &__z)
- constexpr **complex** (const complex< long double > &)
- **__attribute** ((__abi_tag__("cxx11"))) const expr double real() const
- **__attribute** ((__abi_tag__("cxx11"))) const expr double imag() const
- constexpr _ComplexT **__rep** () const
- constexpr void **imag** (double __val)
- constexpr complex & **operator*=** (double __d)
- template<typename _Tp >
  constexpr complex & **operator*=** (const complex< _Tp > &__z)
- constexpr complex & **operator+=** (double __d)
- template<typename _Tp >
  constexpr complex & **operator+=** (const complex< _Tp > &__z)
- constexpr complex & **operator-=** (double __d)
- template<typename _Tp >
  constexpr complex & **operator-=** (const complex< _Tp > &__z)
- constexpr complex & **operator/=** (double __d)
- template<typename _Tp >
  constexpr complex & **operator/=** (const complex< _Tp > &__z)
- constexpr complex & **operator=** (double __d)
- constexpr complex & **operator=** (const complex &)=default
- template<typename _Tp >
  constexpr complex & **operator=** (const complex< _Tp > &__z)
- constexpr void **real** (double __val)

4.364.1 Detailed Description

template<><u>struct std::complex< double ></u>

26.2.3 complex specializations complex<double> specialization

Definition at line 1227 of file complex.

The documentation for this struct was generated from the following file:

- complex

4.365 std::complex< float > Struct Template Reference

Public Types

- typedef __complex__ float **_ComplexT**
- typedef float **value_type**

Public Member Functions

- constexpr **complex** (_ComplexT __z)
- constexpr **complex** (float __r=0.0f, float __i=0.0f)
- constexpr **complex** (const complex< double > &)
- constexpr **complex** (const complex< long double > &)
- **__attribute** ((__abi_tag__("cxx11"))) const expr float real() const
- **__attribute** ((__abi_tag__("cxx11"))) const expr float imag() const
- constexpr _ComplexT **__rep** () const
- constexpr void **imag** (float __val)
- constexpr complex & **operator*=** (float __f)
- template<class _Tp >
  constexpr complex & **operator*=** (const complex< _Tp > &__z)
- constexpr complex & **operator+=** (float __f)
- template<typename _Tp >
  constexpr complex & **operator+=** (const complex< _Tp > &__z)
- constexpr complex & **operator-=** (float __f)
- template<class _Tp >
  constexpr complex & **operator-=** (const complex< _Tp > &__z)
- constexpr complex & **operator/=** (float __f)
- template<class _Tp >
  constexpr complex & **operator/=** (const complex< _Tp > &__z)
- constexpr complex & **operator=** (float __f)
- constexpr complex & **operator=** (const complex &)=default
- template<typename _Tp >
  constexpr complex & **operator=** (const complex< _Tp > &__z)
- constexpr void **real** (float __val)

4.365.1 Detailed Description

template<><u>struct std::complex< float ></u>

26.2.3 complex specializations complex<float> specialization

Definition at line 1082 of file complex.

The documentation for this struct was generated from the following file:

- complex

4.366 std::complex< long double > Struct Template Reference

Public Types

- typedef __complex__ long double **_ComplexT**
- typedef long double **value_type**

Public Member Functions

- constexpr **complex** (_ComplexT __z)
- constexpr **complex** (long double __r=0.0L, long double __i=0.0L)
- constexpr **complex** (const complex< float > &__z)
- constexpr **complex** (const complex< double > &__z)
- **__attribute** ((__abi_tag__("cxx11"))) const expr long double real() const
- **__attribute** ((__abi_tag__("cxx11"))) const expr long double imag() const
- constexpr _ComplexT **__rep** () const
- constexpr void **imag** (long double __val)
- constexpr complex & **operator*=** (long double __r)
- template<typename _Tp >
  constexpr complex & **operator*=** (const complex< _Tp > &__z)
- constexpr complex & **operator+=** (long double __r)
- template<typename _Tp >
  constexpr complex & **operator+=** (const complex< _Tp > &__z)
- constexpr complex & **operator-=** (long double __r)
- template<typename _Tp >
  constexpr complex & **operator-=** (const complex< _Tp > &__z)
- constexpr complex & **operator/=** (long double __r)
- template<typename _Tp >
  constexpr complex & **operator/=** (const complex< _Tp > &__z)
- constexpr complex & **operator=** (long double __r)
- constexpr complex & **operator=** (const complex &)=default
- template<typename _Tp >
  constexpr complex & **operator=** (const complex< _Tp > &__z)
- constexpr void **real** (long double __val)

4.366.1 Detailed Description

template<><u>struct</u> std::complex< long double >

26.2.3 complex specializations complex<long double> specialization

Definition at line 1372 of file complex.

The documentation for this struct was generated from the following file:

- complex

4.367 __gnu_pbds::detail::cond_dealtor< Entry, _Alloc > Class Template Reference

Public Types

- typedef HT_Map::entry **entry**
- typedef HT_Map::entry_allocator **entry_allocator**
- typedef
  alloc_traits::allocator_type **entry_allocator**
- typedef alloc_traits::pointer **entry_pointer**
- typedef HT_Map::key_type **key_type**

Public Member Functions

- **cond_dealtor** (entry_allocator *p_a, entry *p_e)
- **cond_dealtor** (entry_pointer p_e)
- void **set_key_destruct** ()
- void **set_no_action** ()
- void **set_no_action_destructor** ()

Protected Attributes

- bool **m_key_destruct**
- entry_allocator *const **m_p_a**
- entry *const **m_p_e**

4.367.1 Detailed Description

template<typename Entry, typename _Alloc>class __gnu_pbds::detail::cond_dealtor< Entry, _Alloc >

Conditional deallocate constructor argument.

Conditional dey destructor, cc_hash.

Definition at line 52 of file cond_dealtor.hpp.

The documentation for this class was generated from the following files:

- cond_dealtor.hpp
- cond_key_dtor_entry_dealtor.hpp

4.368 __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::cond_dtor< Size_Type > Class Template Reference

Public Member Functions

- **cond_dtor** (value_vector a_vec, iterator &r_last_it, Size_Type total_size)
- void **set_no_action** ()

Protected Attributes

- value_vector **m_a_vec**
- const Size_Type **m_max_size**
- bool **m_no_action**
- iterator & **m_r_last_it**

4.368.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, typename Node_And_It_Traits, typename _Alloc>template<typename Size_Type>class __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::cond_dtor< Size_Type >

Conditional destructor.

Definition at line 184 of file ov_tree_map_.hpp.

The documentation for this class was generated from the following file:

- ov_tree_map_.hpp

4.369 __gnu_cxx::condition_base Struct Reference

Inheritance diagram for __gnu_cxx::condition_base:

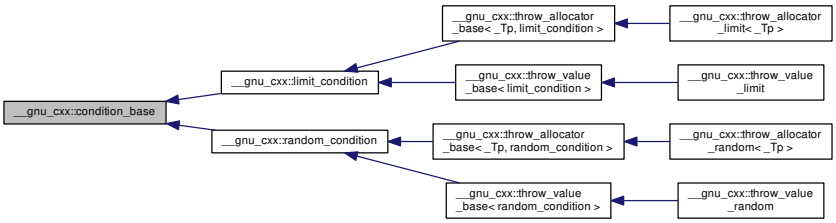

Public Member Functions

- **condition_base** (const condition_base &)=default
- condition_base & **operator=** (const condition_base &)=default

4.369.1 Detailed Description

Base struct for condition policy.

Requires a public member function with the signature void throw_conditionally()

Definition at line 402 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.370 std::condition_variable Class Reference

Public Types

- typedef __native_type * **native_handle_type**

Public Member Functions

- **condition_variable** (const condition_variable &)=delete
- native_handle_type **native_handle** ()
- void **notify_all** () noexcept
- void **notify_one** () noexcept
- condition_variable & **operator=** (const condition_variable &)=delete

- void **wait** (unique_lock< mutex > &__lock) noexcept
- template<typename _Predicate >
  void **wait** (unique_lock< mutex > &__lock, _Predicate __p)
- template<typename _Rep , typename _Period >
  cv_status **wait_for** (unique_lock< mutex > &__lock, const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Rep , typename _Period , typename _Predicate >
  bool **wait_for** (unique_lock< mutex > &__lock, const chrono::duration< _Rep, _Period > &__rtime, _Predicate __p)
- template<typename _Duration >
  cv_status **wait_until** (unique_lock< mutex > &__lock, const chrono::time_point< system_clock, _Duration > &__atime)
- template<typename _Clock , typename _Duration >
  cv_status **wait_until** (unique_lock< mutex > &__lock, const chrono::time_point< _Clock, _Duration > &__atime)
- template<typename _Clock , typename _Duration , typename _Predicate >
  bool **wait_until** (unique_lock< mutex > &__lock, const chrono::time_point< _Clock, _Duration > &__atime, _Predicate __p)

4.370.1 Detailed Description

condition_variable

Definition at line 71 of file condition_variable.

The documentation for this class was generated from the following file:

- condition_variable

4.371 std::_V2::condition_variable_any Class Reference

Public Member Functions

- **condition_variable_any** (const condition_variable_any &)=delete
- void **notify_all** () noexcept
- void **notify_one** () noexcept
- condition_variable_any & **operator=** (const condition_variable_any &)=delete
- template<typename _Lock >
  void **wait** (_Lock &__lock)
- template<typename _Lock , typename _Predicate >
  void **wait** (_Lock &__lock, _Predicate __p)
- template<typename _Lock , typename _Rep , typename _Period >
  cv_status **wait_for** (_Lock &__lock, const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Lock , typename _Rep , typename _Period , typename _Predicate >
  bool **wait_for** (_Lock &__lock, const chrono::duration< _Rep, _Period > &__rtime, _Predicate __p)
- template<typename _Lock , typename _Clock , typename _Duration >
  cv_status **wait_until** (_Lock &__lock, const chrono::time_point< _Clock, _Duration > &__atime)
- template<typename _Lock , typename _Clock , typename _Duration , typename _Predicate >
  bool **wait_until** (_Lock &__lock, const chrono::time_point< _Clock, _Duration > &__atime, _Predicate __p)

4.371.1 Detailed Description

condition_variable_any

Definition at line 253 of file condition_variable.

The documentation for this class was generated from the following file:

- condition_variable

4.372 std::conditional< bool, typename, typename > Struct Template Reference

Public Types

- typedef _Iftrue **type**

4.372.1 Detailed Description

template<bool, typename, typename>struct std::conditional< bool, typename, typename >

Define a member typedef `type` to one of two argument types.

Definition at line 92 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.373 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::const_iterator Struct Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::const_iterator:

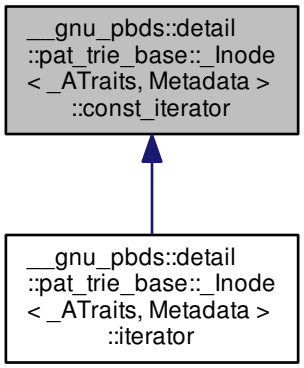

Public Types

- typedef _Alloc::difference_type **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef node_pointer_pointer **pointer**
- typedef node_pointer_reference **reference**
- typedef node_pointer **value_type**

Public Member Functions

- **const_iterator** (node_pointer_pointer p_p_cur=0, node_pointer_pointer p_p_end=0)
- bool **operator!=** (const const_iterator &other) const
- node_const_pointer **operator*** () const
- const_iterator & **operator++** ()
- const_iterator **operator++** (int)
- const node_pointer_pointer **operator->** () const
- bool **operator==** (const const_iterator &other) const

Public Attributes

- node_pointer_pointer **m_p_p_cur**
- node_pointer_pointer **m_p_p_end**

4.373.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::const_iterator

Constant child iterator.

Definition at line 255 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.374 std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg > Class Template Reference

Inheritance diagram for std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg >:



Public Types

- typedef _Tp first_argument_type
- typedef _Ret result_type
- typedef _Arg second_argument_type

Public Member Functions

- **const_mem_fun1_ref_t** (_Ret(_Tp::*__pf)(_Arg) const)
- _Ret **operator()** (const _Tp &__r, _Arg __x) const

4.374.1 Detailed Description

template<typename _Ret, typename _Tp, typename _Arg>class std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg >

One of the adaptors for member pointers.

Definition at line 1329 of file stl_function.h.

4.374.2 Member Typedef Documentation

4.374.2.1 typedef _Tp std::binary_function< _Tp , _Arg , _Ret >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.374.2.2 typedef _Ret std::binary_function< _Tp , _Arg , _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.374.2.3 typedef _Arg std::binary_function< _Tp , _Arg , _Ret >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.375 std::const_mem_fun1_t< _Ret, _Tp, _Arg > Class Template Reference

Inheritance diagram for std::const_mem_fun1_t< _Ret, _Tp, _Arg >:



Public Types

- typedef const _Tp * first_argument_type
- typedef _Ret result_type
- typedef _Arg second_argument_type

Public Member Functions

- **const_mem_fun1_t** (_Ret(_Tp::*__pf)(_Arg) const)
- _Ret **operator()** (const _Tp *__p, _Arg __x) const

4.375.1 Detailed Description

template<typename _Ret, typename _Tp, typename _Arg>class std::const_mem_fun1_t< _Ret, _Tp, _Arg >

One of the adaptors for member pointers.

Definition at line 1293 of file stl_function.h.

4.375.2 Member Typedef Documentation

4.375.2.1 typedef const _Tp * std::binary_function< const _Tp *, _Arg, _Ret >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.375.2.2 typedef _Ret std::binary_function< const _Tp *, _Arg, _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.375.2.3 typedef _Arg std::binary_function< const _Tp *, _Arg, _Ret >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.376 std::const_mem_fun_ref_t< _Ret, _Tp > Class Template Reference

Inheritance diagram for std::const_mem_fun_ref_t< _Ret, _Tp >:



Public Types

- typedef _Tp argument_type
- typedef _Ret result_type

Public Member Functions

- **const_mem_fun_ref_t** (_Ret(_Tp::*__pf)() const)
- _Ret **operator()** (const _Tp &__r) const

4.376.1 Detailed Description

template<typename _Ret, typename _Tp>class std::const_mem_fun_ref_t< _Ret, _Tp >

One of the adaptors for member pointers.

Definition at line 1257 of file stl_function.h.

4.376.2 Member Typedef Documentation

4.376.2.1 typedef _Tp std::unary_function< _Tp , _Ret >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.376.2.2 typedef _Ret std::unary_function< _Tp , _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.377 std::const_mem_fun_t< _Ret, _Tp > Class Template Reference

Inheritance diagram for std::const_mem_fun_t< _Ret, _Tp >:



Public Types

- typedef const _Tp * argument_type
- typedef _Ret result_type

Public Member Functions

- **const_mem_fun_t** (_Ret(_Tp::*__pf)() const)
- _Ret **operator()** (const _Tp *__p) const

4.377.1 Detailed Description

template<typename _Ret, typename _Tp>class std::const_mem_fun_t< _Ret, _Tp >

One of the adaptors for member pointers.

Definition at line 1221 of file stl_function.h.

4.377.2 Member Typedef Documentation

4.377.2.1 typedef const _Tp * std::unary_function< const _Tp *, _Ret >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.377.2.2 typedef _Ret std::unary_function< const _Tp *, _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.378 __gnu_cxx::constant_binary_fun< _Result, _Arg1, _Arg2 > Struct Template Reference

Inherits __gnu_cxx::_Constant_binary_fun< _Result, _Arg1, _Arg2 >.

Public Types

- typedef _Arg1 **first_argument_type**
- typedef _Result **result_type**
- typedef _Arg2 **second_argument_type**

Public Member Functions

- **constant_binary_fun** (const _Result &__v)
- const result_type & **operator()** (const _Arg1 &, const _Arg2 &) const

Public Attributes

- _Result **_M_val**

4.378.1 Detailed Description

template<class _Result, class _Arg1 = _Result, class _Arg2 = _Arg1>struct __gnu_cxx::constant_binary_fun< _Result, _Arg1, _Arg2 >

An SGI extension .

Definition at line 312 of file ext/functional.

The documentation for this struct was generated from the following file:

- ext/functional

4.379 __gnu_parallel::constant_size_blocks_tag Struct Reference

Inheritance diagram for __gnu_parallel::constant_size_blocks_tag:



4.379.1 Detailed Description

Selects the constant block size variant for std::find().

See Also

_GLIBCXX_FIND_CONSTANT_SIZE_BLOCKS

Definition at line 178 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.380 __gnu_cxx::constant_unary_fun< _Result, _Argument > Struct Template Reference

Inherits __gnu_cxx::_Constant_unary_fun< _Result, _Argument >.

Public Types

- typedef _Argument **argument_type**
- typedef _Result **result_type**

Public Member Functions

- **constant_unary_fun** (const _Result &__v)
- const result_type & **operator()** (const _Argument &) const

Public Attributes

- result_type **_M_val**

4.380.1 Detailed Description

template<class _Result, class _Argument = _Result>struct __gnu_cxx::constant_unary_fun< _Result, _Argument >

An SGI extension .

Definition at line 304 of file ext/functional.

The documentation for this struct was generated from the following file:

- ext/functional

4.381 __gnu_cxx::constant_void_fun< _Result > Struct Template Reference

Inherits __gnu_cxx::_Constant_void_fun< _Result >.

Public Types

- typedef _Result **result_type**

Public Member Functions

- **constant_void_fun** (const _Result &__v)
- const result_type & **operator()** () const

Public Attributes

- result_type **_M_val**

4.381.1 Detailed Description

template<class _Result>struct __gnu_cxx::constant_void_fun< _Result >

An SGI extension .

Definition at line 295 of file ext/functional.

The documentation for this struct was generated from the following file:

- ext/functional

4.382 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, Tag, Policy_Tl > Struct Template Reference

4.382.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Tag, typename Policy_Tl = null_type>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, Tag, Policy_Tl >

Dispatch mechanism, primary template for associative types.

Definition at line 449 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.383 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type > Struct Template Reference

Public Types

- typedef binary_heap< _VTp, Cmp_Fn, _Alloc > type

4.383.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type >

Specialization for binary_heap.

Definition at line 95 of file priority_queue_base_dispatch.hpp.

4.383.2 Member Typedef Documentation

4.383.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef binary_heap<_VTp, Cmp_Fn, _Alloc> __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type >::type

Dispatched type.

Definition at line 99 of file priority_queue_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- priority_queue_base_dispatch.hpp

4.384 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type > Struct Template Reference

Public Types

- typedef binomial_heap< _VTp, Cmp_Fn, _Alloc > type

4.384.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type >

Specialization for binomial_heap.

Definition at line 77 of file priority_queue_base_dispatch.hpp.

4.384.2 Member Typedef Documentation

4.384.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef binomial_heap<_VTp, Cmp_Fn, _Alloc> __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type >::type

Dispatched type.

Definition at line 81 of file priority_queue_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- priority_queue_base_dispatch.hpp

4.385 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type > Struct Template Reference

Public Types

- typedef pairing_heap< _VTp, Cmp_Fn, _Alloc > type

4.385.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type >

Specialization for pairing_heap.

Definition at line 68 of file priority_queue_base_dispatch.hpp.

4.385.2 Member Typedef Documentation

4.385.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef pairing_heap<_VTp, Cmp_Fn, _Alloc> __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type >::type

Dispatched type.

Definition at line 72 of file priority_queue_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- priority_queue_base_dispatch.hpp

4.386 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type > Struct Template Reference

Public Types

- typedef rc_binomial_heap< _VTp, Cmp_Fn, _Alloc > type

4.386.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type >

Specialization for rc_binary_heap.

Definition at line 86 of file priority_queue_base_dispatch.hpp.

4.386.2 Member Typedef Documentation

4.386.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef rc_binomial_heap<_VTp, Cmp_Fn, _Alloc> __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type >::type

Dispatched type.

Definition at line 90 of file priority_queue_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- priority_queue_base_dispatch.hpp

4.387 __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type > Struct Template Reference

Public Types

- typedef thin_heap< _VTp, Cmp_Fn, _Alloc > type

4.387.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type >

Specialization for thin_heap.

Definition at line 104 of file priority_queue_base_dispatch.hpp.

4.387.2 Member Typedef Documentation

4.387.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef thin_heap<_VTp, Cmp_Fn, _Alloc> __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type >::type

Dispatched type.

Definition at line 108 of file priority_queue_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- priority_queue_base_dispatch.hpp

4.388 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef cc_ht_map< Key, Mapped,
  at0t, at1t, _Alloc,
  at3t::value, at4t, at2t > type

4.388.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl >

Specialization colision-chaining hash map.

Definition at line 258 of file container_base_dispatch.hpp.

4.388.2 Member Typedef Documentation

4.388.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef cc_ht_map<Key, Mapped, at0t, at1t, _Alloc, at3t::value, at4t, at2t> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl >::type

Dispatched type.

Definition at line 275 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.389 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef gp_ht_map< Key, Mapped, at0t, at1t, _Alloc, at3t::value, at4t, at5t, at2t > type

4.389.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl >

Specialization general-probe hash map.

Definition at line 303 of file container_base_dispatch.hpp.

4.389.2 Member Typedef Documentation

4.389.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef gp_ht_map<Key, Mapped, at0t, at1t, _Alloc, at3t::value, at4t, at5t, at2t> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl >::type

Dispatched type.

Definition at line 322 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.390 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef lu_map< Key, Mapped, at0t, _Alloc, at1t > type

4.390.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl >

Specialization for list-update map.

Definition at line 107 of file container_base_dispatch.hpp.

4.390.2 Member Typedef Documentation

4.390.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef lu_map<Key, Mapped, at0t, _Alloc, at1t> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl >::type

Dispatched type.

Definition at line 118 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.391 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef ov_tree_map< Key, Mapped, at0t, at1t, _Alloc > type

4.391.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl >

Specialization ordered-vector tree map.

Definition at line 227 of file container_base_dispatch.hpp.

4.391.2 Member Typedef Documentation

4.391.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef ov_tree_map<Key, Mapped, at0t, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl >::type

Dispatched type.

Definition at line 237 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.392 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, pat_trie_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef pat_trie_map< Key, Mapped, at1t, _Alloc > **type**

4.392.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, pat_trie_tag, Policy_Tl >

Specialization for PATRICIA trie map.

Definition at line 139 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.393 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef rb_tree_map< Key, Mapped, at0t, at1t, _Alloc > type

4.393.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl >

Specialization for R-B tree map.

Definition at line 165 of file container_base_dispatch.hpp.

4.393.2 Member Typedef Documentation

4.393.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef rb_tree_map<Key, Mapped, at0t, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl >::type

Dispatched type.

Definition at line 175 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.394 __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef splay_tree_map< Key, Mapped, at0t, at1t, _Alloc > type

4.394.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl >

Specialization splay tree map.

Definition at line 195 of file container_base_dispatch.hpp.

4.394.2 Member Typedef Documentation

4.394.2.1 template<typename Key , typename Mapped , typename _Alloc , typename Policy_Tl > typedef splay_tree_map<Key, Mapped, at0t, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl >::type

Dispatched type.

Definition at line 206 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.395 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef cc_ht_set< Key, null_type, at0t, at1t, _Alloc, at3t::value, at4t, at2t > type

4.395.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl >

Specialization colision-chaining hash set.

Definition at line 280 of file container_base_dispatch.hpp.

4.395.2 Member Typedef Documentation

4.395.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef cc_ht_set<Key, null_type, at0t, at1t, _Alloc, at3t::value, at4t, at2t> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl >::type

Dispatched type.

Definition at line 298 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.396 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef gp_ht_set< Key, null_type, at0t, at1t, _Alloc, at3t::value, at4t, at5t, at2t > type

4.396.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl >

Specialization general-probe hash set.

Definition at line 327 of file container_base_dispatch.hpp.

4.396.2 Member Typedef Documentation

4.396.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef gp_ht_set<Key, null_type, at0t, at1t, _Alloc, at3t::value, at4t, at5t, at2t> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl >::type

Dispatched type.

Definition at line 347 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.397 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef lu_set< Key, null_type, at0t, _Alloc, at1t > type

4.397.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl >

Specialization for list-update set.

Definition at line 123 of file container_base_dispatch.hpp.

4.397.2 Member Typedef Documentation

4.397.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef lu_set<Key, null_type, at0t, _Alloc, at1t> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl >::type

Dispatched type.

Definition at line 134 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.398 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef ov_tree_set< Key, null_type, at0t, at1t, _Alloc > type

4.398.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl >

Specialization ordered-vector tree set.

Definition at line 242 of file container_base_dispatch.hpp.

4.398.2 Member Typedef Documentation

4.398.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef ov_tree_set<Key, null_type, at0t, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl >::type

Dispatched type.

Definition at line 253 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.399 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef pat_trie_set< Key, null_type, at1t, _Alloc > type

4.399.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl >

Specialization for PATRICIA trie set.

Definition at line 151 of file container_base_dispatch.hpp.

4.399.2 Member Typedef Documentation

4.399.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef pat_trie_set<Key, null_type, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl >::type

Dispatched type.

Definition at line 160 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.400 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, rb_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef rb_tree_set< Key, null_type, at0t, at1t, _Alloc > **type**

4.400.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, rb_tree_tag, Policy_Tl >

Specialization for R-B tree set.

Definition at line 180 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.401 __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl > Struct Template Reference

Public Types

- typedef splay_tree_set< Key, null_type, at0t, at1t, _Alloc > type

4.401.1 Detailed Description

template<typename Key, typename _Alloc, typename Policy_Tl>struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl >

Specialization splay tree set.

Definition at line 211 of file container_base_dispatch.hpp.

4.401.2 Member Typedef Documentation

4.401.2.1 template<typename Key , typename _Alloc , typename Policy_Tl > typedef splay_tree_set<Key, null_type, at0t, at1t, _Alloc> __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl >::type

Dispatched type.

Definition at line 222 of file container_base_dispatch.hpp.

The documentation for this struct was generated from the following file:

- container_base_dispatch.hpp

4.402 __gnu_pbds::container_error Struct Reference

Inheritance diagram for __gnu_pbds::container_error:

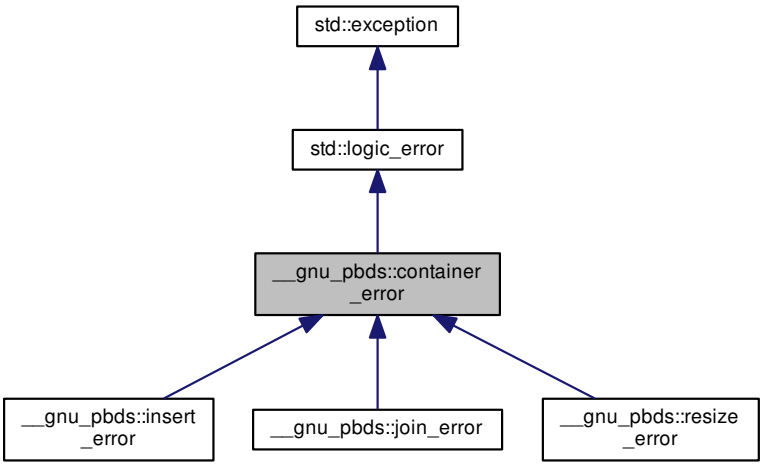

Public Member Functions

- virtual const char * what () const noexcept

4.402.1 Detailed Description

Base class for exceptions.

Definition at line 57 of file exception.hpp.

4.402.2 Member Function Documentation

4.402.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this struct was generated from the following file:

- exception.hpp

4.403 __gnu_pbds::container_tag Struct Reference

Inheritance diagram for __gnu_pbds::container_tag:

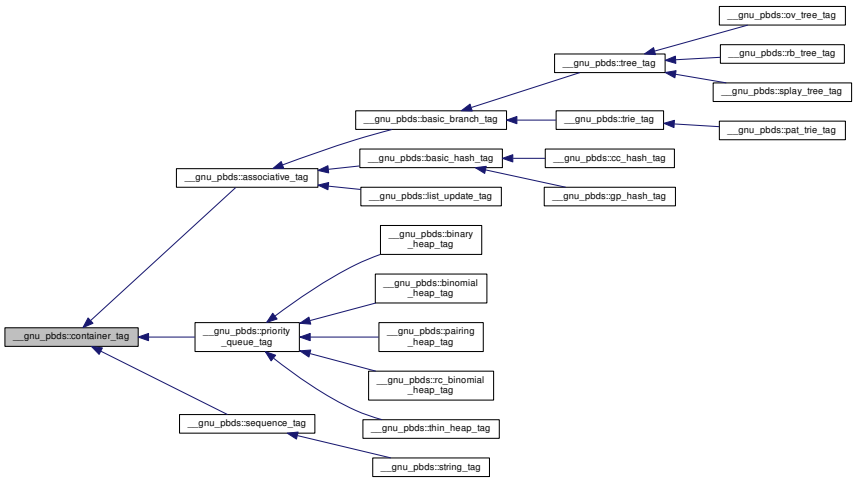

4.403.1 Detailed Description

Base data structure tag.

Definition at line 125 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.404 __gnu_pbds::container_traits< Cntnr > Struct Template Reference

Inheritance diagram for __gnu_pbds::container_traits< Cntnr >:



Public Types

- enum { order_preserving, erase_can_throw, split_join_can_throw, reverse_iteration }
- typedef container_traits_base < container_category > **base_type**
- typedef Cntnr::container_category **container_category**
- typedef Cntnr **container_type**
- typedef base_type::invalidation_guarantee **invalidation_guarantee**

4.404.1 Detailed Description

template<typename Cntnr>struct __gnu_pbds::container_traits< Cntnr >

Container traits.

Definition at line 418 of file tag_and_trait.hpp.

4.404.2 Member Enumeration Documentation

4.404.2.1 template<typename Cntnr > anonymous enum

Enumerator

order_preserving True only if Cntnr objects guarantee storing keys by order.

erase_can_throw True only if erasing a key can throw.

split_join_can_throw True only if split or join operations can throw.

reverse_iteration True only reverse iterators are supported.

Definition at line 426 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.405 __gnu_pbds::container_traits_base< _Tag > Struct Template Reference

4.405.1 Detailed Description

template<typename _Tag>struct __gnu_pbds::container_traits_base< _Tag >

Primary template, container traits base.

Definition at line 220 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.406 __gnu_pbds::container_traits_base< binary_heap_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef binary_heap_tag **container_category**
- typedef basic_invalidation_guarantee **invalidation_guarantee**

4.406.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< binary_heap_tag >

Specialization, binary heap.

Definition at line 400 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.407 __gnu_pbds::container_traits_base< binomial_heap_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef binomial_heap_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.407.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< binomial_heap_tag >

Specialization, binomial heap.

Definition at line 368 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.408 __gnu_pbds::container_traits_base< cc_hash_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef cc_hash_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.408.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< cc_hash_tag >

Specialization, cc hash.

Definition at line 224 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.409 __gnu_pbds::container_traits_base< gp_hash_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef gp_hash_tag **container_category**
- typedef basic_invalidation_guarantee **invalidation_guarantee**

4.409.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< gp_hash_tag >

Specialization, gp hash.

Definition at line 240 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.410 __gnu_pbds::container_traits_base< list_update_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }

- typedef list_update_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.410.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< list_update_tag >

Specialization, list update.

Definition at line 320 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.411 __gnu_pbds::container_traits_base< ov_tree_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef ov_tree_tag **container_category**
- typedef basic_invalidation_guarantee **invalidation_guarantee**

4.411.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< ov_tree_tag >

Specialization, ov tree.

Definition at line 288 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.412 __gnu_pbds::container_traits_base< pairing_heap_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef pairing_heap_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.412.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< pairing_heap_tag >

Specialization, pairing heap.

Definition at line 336 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.413 __gnu_pbds::container_traits_base< pat_trie_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef pat_trie_tag **container_category**
- typedef range_invalidation_guarantee **invalidation_guarantee**

4.413.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< pat_trie_tag >

Specialization, pat trie.

Definition at line 304 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.414 __gnu_pbds::container_traits_base< rb_tree_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef rb_tree_tag **container_category**
- typedef range_invalidation_guarantee **invalidation_guarantee**

4.414.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< rb_tree_tag >

Specialization, rb tree.

Definition at line 256 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.415 __gnu_pbds::container_traits_base< rc_binomial_heap_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }

- typedef rc_binomial_heap_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.415.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< rc_binomial_heap_tag >

Specialization, rc binomial heap.

Definition at line 384 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.416 __gnu_pbds::container_traits_base< splay_tree_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef splay_tree_tag **container_category**
- typedef range_invalidation_guarantee **invalidation_guarantee**

4.416.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< splay_tree_tag >

Specialization, splay tree.

Definition at line 272 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.417 __gnu_pbds::container_traits_base< thin_heap_tag > Struct Template Reference

Public Types

- enum { **order_preserving**, **erase_can_throw**, **split_join_can_throw**, **reverse_iteration** }
- typedef thin_heap_tag **container_category**
- typedef point_invalidation_guarantee **invalidation_guarantee**

4.417.1 Detailed Description

template<>struct __gnu_pbds::container_traits_base< thin_heap_tag >

Specialization, thin heap.

Definition at line 352 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.418 std::ctype< _CharT > Class Template Reference

Inheritance diagram for std::ctype< _CharT >:

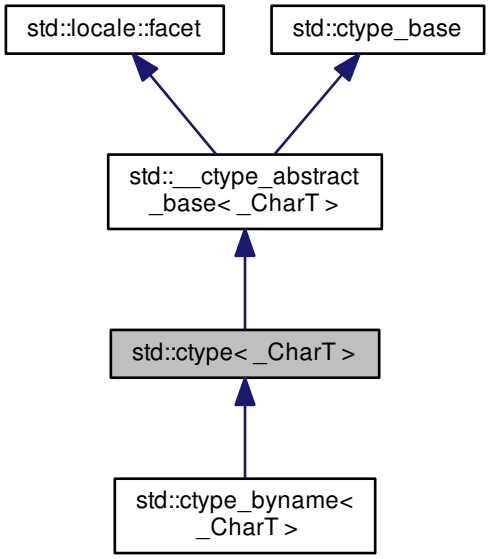

Public Types

- typedef const int * **__to_type**
- typedef _CharT **char_type**
- typedef __ctype_abstract_base < _CharT >::mask **mask**

Public Member Functions

- **ctype** (size_t __refs=0)
- bool is (mask __m, char_type __c) const
- const char_type * is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char_type * scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- const char_type * scan_not (mask __m, const char_type *__lo, const char_type *__hi) const

- char_type tolower (char_type __c) const
- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static locale::id id
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- virtual bool do_is (mask __m, char_type __c) const
- virtual const char_type * do_is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- virtual char do_narrow (char_type, char __dfault) const
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- virtual const char_type * do_scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual const char_type * do_scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual char_type do_tolower (char_type __c) const
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const
- virtual char_type do_toupper (char_type __c) const
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const
- virtual char_type do_widen (char __c) const
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__dest) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.418.1 Detailed Description

template<typename _CharT>class std::ctype< _CharT >

Primary class template ctype facet.

This template class defines classification and conversion functions for character sets. It wraps cctype functionality. Ctype gets used by streams for many I/O operations.

This template provides the protected virtual functions the developer will have to replace in a derived class or specialization to make a working facet. The public functions that access them are defined in __ctype_abstract_base, to allow for implementation flexibility. See ctype<wchar_t> for an example. The functions are documented in __ctype_abstract_base.

Note: implementations are provided for all the protected virtual functions, but will likely not be useful.

Definition at line 612 of file locale_facets.h.

4.418.2 Member Function Documentation

4.418.2.1 template<typename _CharT> virtual bool std::ctype< _CharT >::do_is (mask __m, char_type __c) const [protected], [virtual]

Test char_type classification.

This function finds a mask M for *c* and compares it to mask *m*.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__c	The char_type to find the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.2 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_is (const char_type * __lo, const char_type * __hi, mask * __vec) const [protected], [virtual]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the input.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.

__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.3 template<typename _CharT> virtual char std::ctype< _CharT >::do_narrow (char_type *__c*, char *__dfault*) const [protected], [virtual]

Narrow char_type to char.

This virtual function converts the argument to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::narrow().

4.418.2.4 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_narrow (const char_type * *__lo*, const char_type * *__hi*, char *__dfault*, char * *__to*) const [protected], [virtual]

Narrow char_type array to char.

This virtual function converts each char_type in the range [__lo,__hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any element in the input that cannot be converted, *__dfault* is used instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.5 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_scan_is (mask __m, const char_type * __lo, const char_type * __hi) const [protected], [virtual]

Find char_type matching mask.

This function searches for and returns the first char_type c in [__lo,__hi) for which is(__m,c) is true.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching char_type if found, else *__hi*.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.6 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_scan_not (mask __m, const char_type * __lo, const char_type * __hi) const [protected], [virtual]

Find char_type not matching mask.

This function searches for and returns a pointer to the first char_type c of [lo,hi) for which is(m,c) is false.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching char_type if found, else *__hi*.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.7 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_tolower (char_type __c) const [protected], [virtual]

Convert to lowercase.

This virtual function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::tolower().

4.418.2.8 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_tolower (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual]

Convert array to lowercase.

This virtual function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.9 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_toupper (char_type *__c*) const [protected], [virtual]

Convert to uppercase.

This virtual function converts the char_type argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::toupper().

4.418.2.10 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_toupper (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual]

Convert array to uppercase.

This virtual function converts each char_type in the range [__lo,__hi) to uppercase if possible. Other elements remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.11 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_widen (char __c) const [protected], [virtual]

Widen char.

This virtual function converts the char to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::widen().

4.418.2.12 template<typename _CharT> virtual const char* std::ctype< _CharT >::do_widen (const char * __lo, const char * __hi, char_type * __to) const [protected], [virtual]

Widen char array.

This function converts each char in the input to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start range.
__hi	Pointer to end of range.

__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.418.2.13 template<typename _CharT> bool std::__ctype_abstract_base< _CharT >::is (mask *__m*, char_type *__c*) const [inline], [inherited]

Test char_type classification.

This function finds a mask M for *__c* and compares it to mask *__m*. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__c	The char_type to compare the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Definition at line 169 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), std::ctype< char >::scan_is(), std::ctype< char >::scan_not(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.418.2.14 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::is (const char_type *__lo*, const char_type *__hi*, mask *__vec*) const [inline], [inherited]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the char array. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 186 of file locale_facets.h.

4.418.2.15 template<typename _CharT> char std::__ctype_abstract_base< _CharT >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Narrow char_type to char.

This function converts the char_type to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. It does so by returning ctype<char_type>::do_narrow(__c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 331 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.418.2.16 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::narrow (const char_type * *__lo,* const char_type * *__hi,* char *__dfault,* char * *__to*) const [inline], [inherited]

Narrow array to char array.

This function converts each char_type in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char_type in the input that cannot be converted, *dfault* is used instead. It does so by returning ctype<char_type>::do_narrow(__lo, __hi, __dfault, __to).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 353 of file locale_facets.h.

4.418.2.17 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_is (mask *__m,* const char_type * *__lo,* const char_type * *__hi*) const [inline], [inherited]

Find char_type matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is true. It does so by returning ctype<char_type>::do_scan_is().

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to matching char_type if found, else *__hi*.

Definition at line 202 of file locale_facets.h.

4.418.2.18 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_not (mask __m, const char_type * __lo, const char_type * __hi) const [inline], [inherited]

Find char_type not matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is false. It does so by returning ctype<char_type>::do_scan_not().

Parameters

__m	The mask to compare against.
__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

Pointer to non-matching char if found, else *__hi*.

Definition at line 218 of file locale_facets.h.

4.418.2.19 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::tolower (char_type __c) const [inline], [inherited]

Convert to lowercase.

This function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_tolower(c).

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Definition at line 261 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.418.2.20 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::tolower (char_type * __lo, const char_type * __hi) const [inline], [inherited]

Convert array to lowercase.

This function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_tolower(__lo, __hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 276 of file locale_facets.h.

4.418.2.21 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::toupper (char_type __c) const [inline],[inherited]

Convert to uppercase.

This function converts the argument to uppercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_toupper().

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Definition at line 232 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.418.2.22 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::toupper (char_type * *__lo*, const char_type * *__hi*) const [inline],[inherited]

Convert array to uppercase.

This function converts each char_type in the range [lo,hi) to uppercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_toupper(lo, hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 247 of file locale_facets.h.

4.418.2.23 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::widen (char __c) const [inline],[inherited]

Widen char to char_type.

This function converts the char argument to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type.

Definition at line 293 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::time_put< _CharT, _OutIter >::do_put(), std::money_put< _CharT, _OutIter >::do_put(), std::tr2::operator<<(), and std::operator<<().

4.418.2.24 template<typename _CharT> const char* std::__ctype_abstract_base< _CharT >::widen (const char * __lo, const char * __hi, char_type * __to) const [inline], [inherited]

Widen array to char_type.

This function converts each char in the input to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 312 of file locale_facets.h.

4.418.3 Member Data Documentation

4.418.3.1 template<typename _CharT> locale::id std::ctype< _CharT >::id [static]

The facet id for ctype<char_type>

Definition at line 620 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.419 std::ctype< char > Class Template Reference

Inheritance diagram for std::ctype< char >:

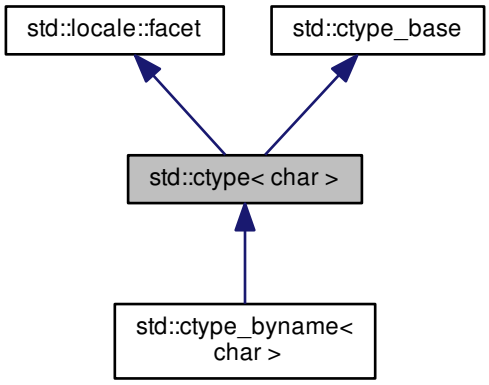

Public Types

- typedef const int * **__to_type**
- typedef char char_type
- typedef char **mask**

Public Member Functions

- ctype (const mask *__table=0, bool __del=false, size_t __refs=0)
- ctype (__c_locale __cloc, const mask *__table=0, bool __del=false, size_t __refs=0)
- bool is (mask __m, char __c) const
- const char * is (const char *__lo, const char *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char * scan_is (mask __m, const char *__lo, const char *__hi) const
- const char * scan_not (mask __m, const char *__lo, const char *__hi) const
- const mask * table () const throw ()
- char_type tolower (char_type __c) const
- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Member Functions

- static const mask * classic_table () throw ()

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static locale::id id
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const size_t table_size
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- virtual ~ctype ()
- virtual char do_narrow (char_type __c, char __dfault) const
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- virtual char_type do_tolower (char_type __c) const
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const
- virtual char_type do_toupper (char_type __c) const
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const
- virtual char_type do_widen (char __c) const
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__to) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_ctype**
- bool **_M_del**
- char **_M_narrow** [1+static_cast< unsigned char >(-1)]
- char **_M_narrow_ok**
- const mask * **_M_table**
- __to_type **_M_tolower**
- __to_type **_M_toupper**
- char **_M_widen** [1+static_cast< unsigned char >(-1)]
- char **_M_widen_ok**

4.419.1 Detailed Description

template<>class std::ctype< char >

The ctype<char> specialization.

This class defines classification and conversion functions for the char type. It gets used by char streams for many I/O operations. The char specialization provides a number of optimizations as well.

Definition at line 681 of file locale_facets.h.

4.419.2 Member Typedef Documentation

4.419.2.1 typedef char std::ctype< char >::char_type

Typedef for the template parameter char.

Definition at line 686 of file locale_facets.h.

4.419.3 Constructor & Destructor Documentation

4.419.3.1 std::ctype< char >::ctype (const mask * *__table* = 0, bool *__del* = false, size_t *__refs* = 0) [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__table	If non-zero, table is used as the per-char mask. Else classic_table() is used.
__del	If true, passes ownership of table to this facet.
__refs	Passed to the base facet class.

4.419.3.2 std::ctype< char >::ctype (__c_locale *__cloc*, const mask * *__table* = 0, bool *__del* = false, size_t *__refs* = 0) [explicit]

Constructor performs static initialization.

This constructor is used to construct the initial C locale facet.

Parameters

__cloc	Handle to C locale data.
__table	If non-zero, table is used as the per-char mask.
__del	If true, passes ownership of table to this facet.
__refs	Passed to the base facet class.

4.419.3.3 virtual std::ctype< char >::~ctype ( ) [protected], [virtual]

Destructor.

This function deletes table() if *del* was true in the constructor.

4.419.4 Member Function Documentation

4.419.4.1 static const mask* std::ctype< char >::classic_table ( ) throw) [static]

Returns a pointer to the C locale mask table.

4.419.4.2 virtual char std::ctype< char >::do_narrow (char_type __c, char __dfault) const [inline], [protected], [virtual]

Narrow char.

This virtual function converts the char to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. For an underived ctype<char> facet, *c* will be returned unchanged.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 1134 of file locale_facets.h.

4.419.4.3 virtual const char_type* std::ctype< char >::do_narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [inline], [protected], [virtual]

Narrow char array to char array.

This virtual function converts each char in the range [lo,hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any char in the input that cannot be converted, *dfault* is used instead. For an underived ctype<char> facet, the argument will be copied unchanged.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 1160 of file locale_facets.h.

4.419.4.4 virtual char_type std::ctype< char >::do_tolower (char_type __c) const [protected], [virtual]

Convert to lowercase.

This virtual function converts the char argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The lowercase char if convertible, else *__c*.

4.419.4.5 virtual const char_type* std::ctype< char >::do_tolower (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual]

Convert array to lowercase.

This virtual function converts each char in the range [lo,hi) to lowercase if possible. Other chars remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

4.419.4.6 virtual char_type std::ctype< char >::do_toupper (char_type *__c*) const [protected], [virtual]

Convert to uppercase.

This virtual function converts the char argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The uppercase char if convertible, else *__c*.

4.419.4.7 virtual const char_type* std::ctype< char >::do_toupper (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual]

Convert array to uppercase.

This virtual function converts each char in the range [lo,hi) to uppercase if possible. Other chars remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

4.419.4.8 virtual char_type std::ctype< char >::do_widen (char __c) const [inline], [protected], [virtual]

Widen char.

This virtual function converts the char to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be returned unchanged.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted character.

Definition at line 1084 of file locale_facets.h.

4.419.4.9 virtual const char* std::ctype< char >::do_widen (const char * __lo, const char * __hi, char_type * __to) const [inline], [protected], [virtual]

Widen char array.

This function converts each char in the range [lo,hi) to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be copied unchanged.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 1107 of file locale_facets.h.

4.419.4.10 bool std::ctype< char >::is (mask __m, char __c) const [inline]

Test char classification.

This function compares the mask table[c] to __*m*.

Parameters

__c	The char to compare the mask of.
__m	The mask to compare against.

Returns

True if __m & table[__c] is true, false otherwise.

Definition at line 43 of file ctype_inline.h.

4.419.4.11 const char * std::ctype< char >::is (const char * *__lo*, const char * *__hi*, mask * *__vec*) const [inline]

Return a mask array.

This function finds the mask for each char in the range [lo, hi) and successively writes it to vec. vec must have as many elements as the char array.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 48 of file ctype_inline.h.

4.419.4.12 char std::ctype< char >::narrow (char_type *__c*, char *__dfault*) const [inline]

Narrow char.

This function converts the char to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. For an underived ctype<char> facet, *c* will be returned unchanged.

This function works as if it returns ctype<char>::do_narrow(c). do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.
__dfault	Char to return if conversion fails.

Returns

The converted character.

Definition at line 931 of file locale_facets.h.

References std::ctype< _CharT >::do_narrow().

4.419.4.13 const char_type* std::ctype< char >::narrow (const char_type * *__lo*, const char_type * *__hi*, char *__dfault*, char * *__to*) const [inline]

Narrow char array.

This function converts each char in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char in the input that cannot be converted, *dfault* is used instead. For an underived ctype<char> facet, the argument will be copied unchanged.

This function works as if it returns ctype<char>::do_narrow(lo, hi, dfault, to). do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 964 of file locale_facets.h.

References std::ctype< _CharT >::do_narrow().

4.419.4.14 const char * std::ctype< char >::scan_is (mask *__m*, const char * *__lo*, const char * *__hi*) const [inline]

Find char matching a mask.

This function searches for and returns the first char in [lo,hi) for which is(m,char) is true.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching char if found, else *__hi*.

Definition at line 57 of file ctype_inline.h.

References std::__ctype_abstract_base< _CharT >::is().

4.419.4.15 const char * std::ctype< char >::scan_not (mask *__m*, const char * *__lo*, const char * *__hi*) const [inline]

Find char not matching a mask.

This function searches for and returns a pointer to the first char in [__lo,__hi) for which is(m,char) is false.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching char if found, else *__hi*.

Definition at line 66 of file ctype_inline.h.

References std::__ctype_abstract_base< _CharT >::is().

4.419.4.16 const mask* std::ctype< char >::table ( ) const throw) [inline]

Returns a pointer to the mask table provided to the constructor, or the default from classic_table() if none was provided.

Definition at line 983 of file locale_facets.h.

4.419.4.17 char_type std::ctype< char >::tolower (char_type *__c*) const [inline]

Convert to lowercase.

This function converts the char argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

tolower() acts as if it returns ctype<char>::do_tolower(__c). do_tolower() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The lowercase char if convertible, else *__c*.

Definition at line 835 of file locale_facets.h.

References std::ctype< _CharT >::do_tolower().

4.419.4.18 const char_type* std::ctype< char >::tolower (char_type * *__lo*, const char_type * *__hi*) const [inline]

Convert array to lowercase.

This function converts each char in the range [lo,hi) to lowercase if possible. Other chars remain untouched.

tolower() acts as if it returns ctype<char>:: do_tolower(__lo, __hi). do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 852 of file locale_facets.h.

References std::ctype< _CharT >::do_tolower().

4.419.4.19 char_type std::ctype< char >::toupper (char_type *__c*) const [inline]

Convert to uppercase.

This function converts the char argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

toupper() acts as if it returns ctype<char>::do_toupper(c). do_toupper() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The uppercase char if convertible, else *__c*.

Definition at line 802 of file locale_facets.h.

References std::ctype< _CharT >::do_toupper().

4.419.4.20 const char_type* std::ctype< char >::toupper (char_type * *__lo*, const char_type * *__hi*) const [inline]

Convert array to uppercase.

This function converts each char in the range [__lo,__hi) to uppercase if possible. Other chars remain untouched.

toupper() acts as if it returns ctype<char>:: do_toupper(__lo, __hi). do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 819 of file locale_facets.h.

References std::ctype< _CharT >::do_toupper().

4.419.4.21 char_type std::ctype< char >::widen (char *__c*) const [inline]

Widen char.

This function converts the char to char_type using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be returned unchanged.

This function works as if it returns ctype<char>::do_widen(c). do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted character.

Definition at line 872 of file locale_facets.h.

References std::ctype< _CharT >::do_widen().

4.419.4.22 const char* std::ctype< char >::widen (const char * __lo, const char * __hi, char_type * __to) const [inline]

Widen char array.

This function converts each char in the input to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be copied unchanged.

This function works as if it returns ctype<char>::do_widen(c). do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 899 of file locale_facets.h.

References std::ctype< _CharT >::do_widen().

4.419.5 Member Data Documentation

4.419.5.1 locale::id std::ctype< char >::id [static]

The facet id for ctype<char>

Definition at line 703 of file locale_facets.h.

4.419.5.2 const size_t std::ctype< char >::table_size [static]

The size of the mask table. It is SCHAR_MAX + 1.

Definition at line 705 of file locale_facets.h.

The documentation for this class was generated from the following files:

- locale_facets.h
- ctype_inline.h

4.420 std::ctype< wchar_t > Class Template Reference

Inheritance diagram for std::ctype< wchar_t >:

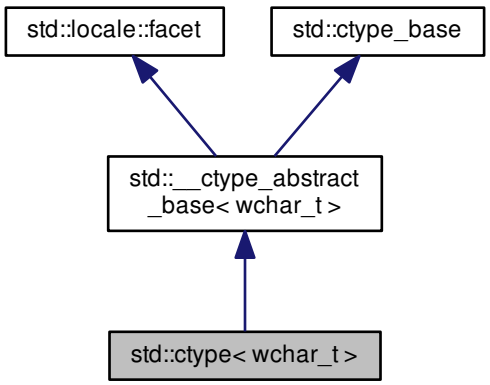

Public Types

- typedef const int * **__to_type**
- typedef wctype_t **__wmask_type**
- typedef wchar_t char_type
- typedef char **mask**

Public Member Functions

- ctype (size_t __refs=0)
- ctype (__c_locale __cloc, size_t __refs=0)
- bool is (mask __m, char_type __c) const
- const char_type * is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char_type * scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- const char_type * scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- char_type tolower (char_type __c) const
- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static locale::id id
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- virtual ~ctype ()
- __wmask_type **_M_convert_to_wmask** (const mask __m) const throw ()
- void **_M_initialize_ctype** () throw ()
- virtual bool do_is (mask __m, char_type __c) const
- virtual const char_type * do_is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- virtual char do_narrow (char_type __c, char __dfault) const
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- virtual const char_type * do_scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual const char_type * do_scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual char_type do_tolower (char_type __c) const
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const
- virtual char_type do_toupper (char_type __c) const
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const
- virtual char_type do_widen (char __c) const
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__to) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- mask **_M_bit** [16]
- __c_locale **_M_c_locale_ctype**
- char **_M_narrow** [128]
- bool **_M_narrow_ok**
- wint_t **_M_widen** [1+static_cast< unsigned char >(-1)]
- __wmask_type **_M_wmask** [16]

4.420.1 Detailed Description

template<>class std::ctype< wchar_t >

The ctype<wchar_t> specialization.

This class defines classification and conversion functions for the wchar_t type. It gets used by wchar_t streams for many I/O operations. The wchar_t specialization provides a number of optimizations as well.

ctype<wchar_t> inherits its public methods from __ctype_abstract_base<wchar_t>.

Definition at line 1186 of file locale_facets.h.

4.420.2 Member Typedef Documentation

4.420.2.1 typedef wchar_t std::ctype< wchar_t >::char_type

Typedef for the template parameter wchar_t.

Definition at line 1191 of file locale_facets.h.

4.420.3 Constructor & Destructor Documentation

4.420.3.1 std::ctype< wchar_t >::ctype (size_t *__refs* = 0) [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

4.420.3.2 std::ctype< wchar_t >::ctype (__c_locale *__cloc*, size_t *__refs* = 0) [explicit]

Constructor performs static initialization.

This constructor is used to construct the initial C locale facet.

Parameters

__cloc	Handle to C locale data.
__refs	Passed to the base facet class.

4.420.3.3 virtual std::ctype< wchar_t >::~ctype ( ) [protected], [virtual]

Destructor.

4.420.4 Member Function Documentation

4.420.4.1 virtual bool std::ctype< wchar_t >::do_is (mask *__m*, char_type *__c*) const [protected], [virtual]

Test wchar_t classification.

This function finds a mask M for *c* and compares it to mask *m*.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__c	The wchar_t to find the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.2 virtual const char_type* std::ctype< wchar_t >::do_is (const char_type * *__lo*, const char_type * *__hi*, mask * *__vec*) const [protected], [virtual]

Return a mask array.

This function finds the mask for each wchar_t in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the input.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.3 virtual char std::ctype< wchar_t >::do_narrow (char_type *__c*, char *__dfault*) const [protected], [virtual]

Narrow wchar_t to char.

This virtual function converts the argument to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. For an underived ctype<wchar_t> facet, *c* will be cast to char and returned.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The wchar_t to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.4 virtual const char_type* std::ctype< wchar_t >::do_narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [protected], [virtual]

Narrow wchar_t array to char array.

This virtual function converts each wchar_t in the range [lo,hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any wchar_t in the input that cannot be converted, *dfault* is used instead. For an underived ctype<wchar_t> facet, the argument will be copied, casting each element to char.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.5 virtual const char_type* std::ctype< wchar_t >::do_scan_is (mask __m, const char_type * __lo, const char_type * __hi) const [protected], [virtual]

Find wchar_t matching mask.

This function searches for and returns the first wchar_t c in [__lo,__hi) for which is(__m,c) is true.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching wchar_t if found, else *__hi*.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.6 virtual const char_type* std::ctype< wchar_t >::do_scan_not (mask __m, const char_type * __lo, const char_type * __hi) const [protected], [virtual]

Find wchar_t not matching mask.

This function searches for and returns a pointer to the first wchar_t c of [__lo,__hi) for which is(__m,c) is false.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching wchar_t if found, else *__hi*.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.7 virtual char_type std::ctype< wchar_t >::do_tolower (char_type __c) const [protected], [virtual]

Convert to lowercase.

This virtual function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The wchar_t to convert.

Returns

The lowercase wchar_t if convertible, else *__c*.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.8 virtual const char_type* std::ctype< wchar_t >::do_tolower (char_type * __lo, const char_type * __hi) const [protected], [virtual]

Convert array to lowercase.

This virtual function converts each wchar_t in the range [lo,hi) to lowercase if possible. Other elements remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.9 virtual char_type std::ctype< wchar_t >::do_toupper (char_type __c) const [protected], [virtual]

Convert to uppercase.

This virtual function converts the wchar_t argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The wchar_t to convert.

Returns

The uppercase wchar_t if convertible, else *__c*.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.10 virtual const char_type* std::ctype< wchar_t >::do_toupper (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual]

Convert array to uppercase.

This virtual function converts each wchar_t in the range [lo,hi) to uppercase if possible. Other elements remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.11 virtual char_type std::ctype< wchar_t >::do_widen (char *__c*) const [protected], [virtual]

Widen char to wchar_t.

This virtual function converts the char to wchar_t using the simplest reasonable transformation. For an underived ctype<wchar_t> facet, the argument will be cast to wchar_t.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted wchar_t.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.12 virtual const char* std::ctype< wchar_t >::do_widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [protected], [virtual]

Widen char array to wchar_t array.

This function converts each char in the input to wchar_t using the simplest reasonable transformation. For an underived ctype<wchar_t> facet, the argument will be copied, casting each element to wchar_t.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< wchar_t >.

4.420.4.13 bool std::__ctype_abstract_base< wchar_t >::is (mask *__m*, char_type *__c*) const [inline], [inherited]

Test char_type classification.

This function finds a mask M for *__c* and compares it to mask *__m*. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__c	The char_type to compare the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Definition at line 169 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_is().

4.420.4.14 const char_type* std::__ctype_abstract_base< wchar_t >::is (const char_type * *__lo*, const char_type * *__hi*, mask * *__vec*) const [inline], [inherited]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the char array. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 186 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_is().

4.420.4.15 char std::__ctype_abstract_base< wchar_t >::narrow (char_type __c, char __dfault) const [inline], [inherited]

Narrow char_type to char.

This function converts the char_type to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. It does so by returning ctype<char_type>::do_narrow(__c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 331 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_narrow().

4.420.4.16 const char_type* std::__ctype_abstract_base< wchar_t >::narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [inline], [inherited]

Narrow array to char array.

This function converts each char_type in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char_type in the input that cannot be converted, *dfault* is used instead. It does so by returning ctype<char_type>::do_narrow(__lo, __hi, __dfault, __to).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 353 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_narrow().

4.420.4.17 const char_type* std::__ctype_abstract_base< wchar_t >::scan_is (mask __m, const char_type * __lo, const char_type * __hi) const [inline], [inherited]

Find char_type matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is true. It does so by returning ctype<char_type>::do_scan_is().

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to matching char_type if found, else *__hi*.

Definition at line 202 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_scan_is().

4.420.4.18 const char_type* std::__ctype_abstract_base< wchar_t >::scan_not (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [inline], [inherited]

Find char_type not matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is false. It does so by returning ctype<char_type>::do_scan_not().

Parameters

__m	The mask to compare against.
__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

Pointer to non-matching char if found, else *__hi*.

Definition at line 218 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_scan_not().

4.420.4.19 char_type std::__ctype_abstract_base< wchar_t >::tolower (char_type *__c*) const [inline], [inherited]

Convert to lowercase.

This function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_tolower(c).

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Definition at line 261 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_tolower().

4.420.4.20 const char_type* std::__ctype_abstract_base< wchar_t >::tolower (char_type * *__lo*, const char_type * *__hi*) const [inline], [inherited]

Convert array to lowercase.

This function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_tolower(__lo, __hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 276 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_tolower().

4.420.4.21 char_type std::__ctype_abstract_base< wchar_t >::toupper (char_type *__c*) const [inline], [inherited]

Convert to uppercase.

This function converts the argument to uppercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_toupper().

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Definition at line 232 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_toupper().

4.420.4.22 const char_type* std::__ctype_abstract_base< wchar_t >::toupper (char_type * *__lo*, const char_type * *__hi*) const [inline], [inherited]

Convert array to uppercase.

This function converts each char_type in the range [lo,hi) to uppercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_toupper(lo, hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 247 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_toupper().

4.420.4.23 char_type std::__ctype_abstract_base< wchar_t >::widen (char *__c*) const [inline], [inherited]

Widen char to char_type.

This function converts the char argument to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type.

Definition at line 293 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_widen().

4.420.4.24 const char* std::__ctype_abstract_base< wchar_t >::widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [inline], [inherited]

Widen array to char_type.

This function converts each char in the input to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 312 of file locale_facets.h.

References std::__ctype_abstract_base< _CharT >::do_widen().

4.420.5 Member Data Documentation

4.420.5.1 locale::id std::ctype< wchar_t >::id [static]

The facet id for ctype<wchar_t>

Definition at line 1209 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.421 std::ctype_base Struct Reference

Inheritance diagram for std::ctype_base:

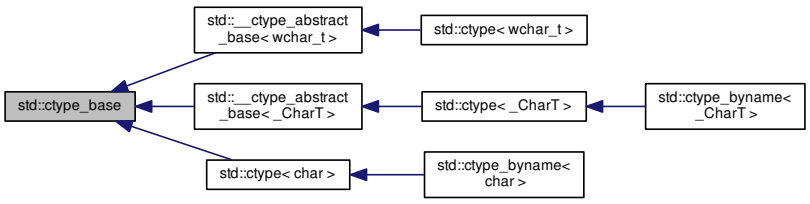

Public Types

- typedef const int * **__to_type**
- typedef char **mask**

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const mask **upper**
- static const mask **xdigit**

4.421.1 Detailed Description

Base class for ctype.

Definition at line 36 of file ctype_base.h.

The documentation for this struct was generated from the following file:

- ctype_base.h

4.422 std::ctype_byname< _CharT > Class Template Reference

Inheritance diagram for std::ctype_byname< _CharT >:

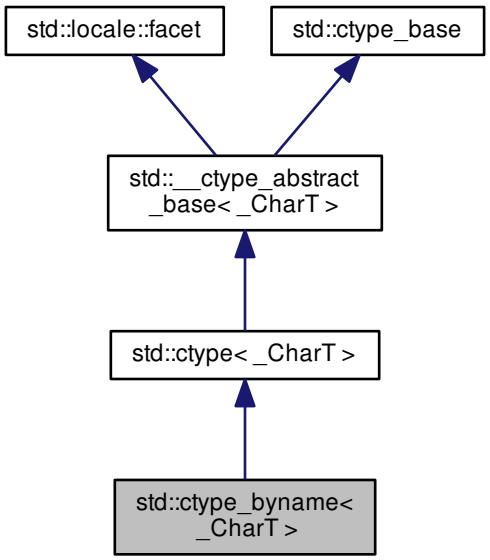

Public Types

- typedef const int * **__to_type**
- typedef _CharT **char_type**
- typedef ctype< _CharT >::mask **mask**

Public Member Functions

- **ctype_byname** (const char *__s, size_t __refs=0)
- **ctype_byname** (const string &__s, size_t __refs=0)
- bool is (mask __m, char_type __c) const
- const char_type * is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char_type * scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- const char_type * scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- char_type tolower (char_type __c) const
- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static locale::id id
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- virtual bool do_is (mask __m, char_type __c) const
- virtual const char_type * do_is (const char_type *__lo, const char_type *__hi, mask *__vec) const
- virtual char do_narrow (char_type, char __dfault) const
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- virtual const char_type * do_scan_is (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual const char_type * do_scan_not (mask __m, const char_type *__lo, const char_type *__hi) const
- virtual char_type do_tolower (char_type __c) const
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const
- virtual char_type do_toupper (char_type __c) const
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const
- virtual char_type do_widen (char __c) const
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__dest) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.422.1 Detailed Description

template<typename _CharT>class std::ctype_byname< _CharT >

class ctype_byname [22.2.1.2].

Definition at line 1478 of file locale_facets.h.

4.422.2 Member Function Documentation

4.422.2.1 template<typename _CharT> virtual bool std::ctype< _CharT >::do_is (mask __m, char_type __c) const [protected], [virtual], [inherited]

Test char_type classification.

This function finds a mask M for *c* and compares it to mask *m*.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__c	The char_type to find the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.2 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_is (const char_type * *__lo*, const char_type * *__hi*, mask * *__vec*) const [protected], [virtual], [inherited]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the input.

do_is() is a hook for a derived facet to change the behavior of classifying. do_is() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.3 template<typename _CharT> virtual char std::ctype< _CharT >::do_narrow (char_type __c, char __dfault) const [protected], [virtual], [inherited]

Narrow char_type to char.

This virtual function converts the argument to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::narrow().

4.422.2.4 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_narrow (const char_type * *__lo*, const char_type * *__hi*, char *__dfault*, char * *__to*) const [protected], [virtual], [inherited]

Narrow char_type array to char.

This virtual function converts each char_type in the range [__lo,__hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any element in the input that cannot be converted, *__dfault* is used instead.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.5 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_scan_is (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual], [inherited]

Find char_type matching mask.

This function searches for and returns the first char_type c in [__lo,__hi) for which is(__m,c) is true.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching char_type if found, else *__hi*.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.6 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_scan_not (mask __m, const char_type * __lo, const char_type * __hi) const [protected], [virtual], [inherited]

Find char_type not matching mask.

This function searches for and returns a pointer to the first char_type c of [lo,hi) for which is(m,c) is false.

do_scan_is() is a hook for a derived facet to change the behavior of match searching. do_is() must always return the same result for the same input.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching char_type if found, else *__hi*.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.7 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_tolower (char_type __c) const [protected], [virtual], [inherited]

Convert to lowercase.

This virtual function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::tolower().

4.422.2.8 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_tolower (char_type * __lo, const char_type * __hi) const [protected], [virtual], [inherited]

Convert array to lowercase.

This virtual function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.9 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_toupper (char_type __c) const [protected], [virtual], [inherited]

Convert to uppercase.

This virtual function converts the char_type argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::toupper().

4.422.2.10 template<typename _CharT> virtual const char_type* std::ctype< _CharT >::do_toupper (char_type * *__lo*, const char_type * *__hi*) const [protected], [virtual], [inherited]

Convert array to uppercase.

This virtual function converts each char_type in the range [__lo,__hi) to uppercase if possible. Other elements remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.11 template<typename _CharT> virtual char_type std::ctype< _CharT >::do_widen (char __c) const [protected], [virtual], [inherited]

Widen char.

This virtual function converts the char to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type

Implements std::__ctype_abstract_base< _CharT >.

Referenced by std::ctype< char >::widen().

4.422.2.12 template<typename _CharT> virtual const char* std::ctype< _CharT >::do_widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [protected], [virtual], [inherited]

Widen char array.

This function converts each char in the input to char_type using the simplest reasonable transformation.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Implements std::__ctype_abstract_base< _CharT >.

4.422.2.13 template<typename _CharT> bool std::__ctype_abstract_base< _CharT >::is (mask *__m*, char_type *__c*) const [inline], [inherited]

Test char_type classification.

This function finds a mask M for *__c* and compares it to mask *__m*. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__c	The char_type to compare the mask of.
__m	The mask to compare against.

Returns

(M & __m) != 0.

Definition at line 169 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), std::ctype< char >::scan_is(), std::ctype< char >::scan_not(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.422.2.14 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::is (const char_type *__lo, const char_type *__hi, mask *__vec) const [inline],[inherited]

Return a mask array.

This function finds the mask for each char_type in the range [lo,hi) and successively writes it to vec. vec must have as many elements as the char array. It does so by returning the value of ctype<char_type>::do_is().

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 186 of file locale_facets.h.

4.422.2.15 template<typename _CharT> char std::__ctype_abstract_base< _CharT >::narrow (char_type *__c*, char *__dfault*) const [inline],[inherited]

Narrow char_type to char.

This function converts the char_type to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. It does so by returning ctype<char_type>::do_narrow(__c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char_type to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 331 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.422.2.16 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::narrow (const char_type *__lo, const char_type *__hi, char *__dfault*, char *__to*) const [inline],[inherited]

Narrow array to char array.

This function converts each char_type in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char_type in the input that cannot be converted, *dfault* is used instead. It does so by returning ctype<char_type>::do_narrow(__lo, __hi, __dfault, __to).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 353 of file locale_facets.h.

4.422.2.17 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_is (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [inline], [inherited]

Find char_type matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is true. It does so by returning ctype<char_type>::do_scan_is().

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to matching char_type if found, else *__hi*.

Definition at line 202 of file locale_facets.h.

4.422.2.18 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::scan_not (mask *__m*, const char_type * *__lo*, const char_type * *__hi*) const [inline], [inherited]

Find char_type not matching a mask.

This function searches for and returns the first char_type c in [lo,hi) for which is(m,c) is false. It does so by returning ctype<char_type>::do_scan_not().

Parameters

__m	The mask to compare against.
__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

Pointer to non-matching char if found, else *__hi*.

Definition at line 218 of file locale_facets.h.

4.422.2.19 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::tolower (char_type *__c*) const [inline], [inherited]

Convert to lowercase.

This function converts the argument to lowercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_tolower(c).

Parameters

__c	The char_type to convert.

Returns

The lowercase char_type if convertible, else *__c*.

Definition at line 261 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.422.2.20 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::tolower (char_type *__lo, const char_type *__hi) const [inline], [inherited]

Convert array to lowercase.

This function converts each char_type in the range [__lo,__hi) to lowercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_tolower(__lo, __hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 276 of file locale_facets.h.

4.422.2.21 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::toupper (char_type *__c*) const [inline], [inherited]

Convert to uppercase.

This function converts the argument to uppercase if possible. If not possible (for example, '2'), returns the argument. It does so by returning ctype<char_type>::do_toupper().

Parameters

__c	The char_type to convert.

Returns

The uppercase char_type if convertible, else *__c*.

Definition at line 232 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::get().

4.422.2.22 template<typename _CharT> const char_type* std::__ctype_abstract_base< _CharT >::toupper (char_type *__lo, const char_type *__hi) const [inline], [inherited]

Convert array to uppercase.

This function converts each char_type in the range [lo,hi) to uppercase if possible. Other elements remain untouched. It does so by returning ctype<char_type>:: do_toupper(lo, hi).

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 247 of file locale_facets.h.

4.422.2.23 template<typename _CharT> char_type std::__ctype_abstract_base< _CharT >::widen (char *__c*) const [inline],[inherited]

Widen char to char_type.

This function converts the char argument to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted char_type.

Definition at line 293 of file locale_facets.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::time_put< _CharT, _OutIter >::do_put(), std::money_put< _CharT, _OutIter >::do_put(), std::tr2::operator<<(), and std::operator<<().

4.422.2.24 template<typename _CharT> const char* std::__ctype_abstract_base< _CharT >::widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [inline],[inherited]

Widen array to char_type.

This function converts each char in the input to char_type using the simplest reasonable transformation. It does so by returning ctype<char_type>::do_widen(c).

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 312 of file locale_facets.h.

4.422.3 Member Data Documentation

4.422.3.1 template<typename _CharT> locale::id std::ctype< _CharT >::id [static], [inherited]

The facet id for ctype<char_type>

Definition at line 620 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.423 std::ctype_byname< char > Class Template Reference

Inheritance diagram for std::ctype_byname< char >:

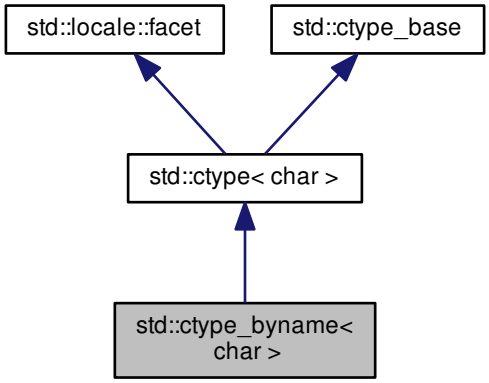

Public Types

- typedef const int * **__to_type**
- typedef char char_type
- typedef char **mask**

Public Member Functions

- **ctype_byname** (const char *__s, size_t __refs=0)
- **ctype_byname** (const string &__s, size_t __refs=0)
- bool is (mask __m, char __c) const
- const char * is (const char *__lo, const char *__hi, mask *__vec) const
- char narrow (char_type __c, char __dfault) const
- const char_type * narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- const char * scan_is (mask __m, const char *__lo, const char *__hi) const
- const char * scan_not (mask __m, const char *__lo, const char *__hi) const
- const mask * table () const throw ()
- char_type tolower (char_type __c) const

- const char_type * tolower (char_type *__lo, const char_type *__hi) const
- char_type toupper (char_type __c) const
- const char_type * toupper (char_type *__lo, const char_type *__hi) const
- char_type widen (char __c) const
- const char * widen (const char *__lo, const char *__hi, char_type *__to) const

Static Public Member Functions

- static const mask * classic_table () throw ()

Static Public Attributes

- static const mask **alnum**
- static const mask **alpha**
- static const mask **blank**
- static const mask **cntrl**
- static const mask **digit**
- static const mask **graph**
- static locale::id id
- static const mask **lower**
- static const mask **print**
- static const mask **punct**
- static const mask **space**
- static const size_t table_size
- static const mask **upper**
- static const mask **xdigit**

Protected Member Functions

- virtual char do_narrow (char_type __c, char __dfault) const
- virtual const char_type * do_narrow (const char_type *__lo, const char_type *__hi, char __dfault, char *__to) const
- virtual char_type do_tolower (char_type __c) const
- virtual const char_type * do_tolower (char_type *__lo, const char_type *__hi) const
- virtual char_type do_toupper (char_type __c) const
- virtual const char_type * do_toupper (char_type *__lo, const char_type *__hi) const
- virtual char_type do_widen (char __c) const
- virtual const char * do_widen (const char *__lo, const char *__hi, char_type *__to) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_ctype**
- bool **_M_del**
- char **_M_narrow** [1+static_cast< unsigned char >(-1)]
- char **_M_narrow_ok**
- const mask * **_M_table**
- __to_type **_M_tolower**
- __to_type **_M_toupper**
- char **_M_widen** [1+static_cast< unsigned char >(-1)]
- char **_M_widen_ok**

4.423.1 Detailed Description

template<>class std::ctype_byname< char >

22.2.1.4 Class ctype_byname specializations.

Definition at line 1499 of file locale_facets.h.

4.423.2 Member Typedef Documentation

4.423.2.1 typedef char std::ctype< char >::char_type [inherited]

Typedef for the template parameter char.

Definition at line 686 of file locale_facets.h.

4.423.3 Member Function Documentation

4.423.3.1 static const mask* std::ctype< char >::classic_table ( ) throw) [static], [inherited]

Returns a pointer to the C locale mask table.

4.423.3.2 virtual char std::ctype< char >::do_narrow (char_type *__c,* char *__dfault*) const [inline], [protected], [virtual], [inherited]

Narrow char.

This virtual function converts the char to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. For an underived ctype<char> facet, *c* will be returned unchanged.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.
__dfault	Char to return if conversion fails.

Returns

The converted char.

Definition at line 1134 of file locale_facets.h.

4.423.3.3 virtual const char_type* std::ctype< char >::do_narrow (const char_type * __lo, const char_type * __hi, char __dfault, char * __to) const [inline], [protected], [virtual], [inherited]

Narrow char array to char array.

This virtual function converts each char in the range [lo,hi) to char using the simplest reasonable transformation and writes the results to the destination array. For any char in the input that cannot be converted, *dfault* is used instead. For an underived ctype<char> facet, the argument will be copied unchanged.

do_narrow() is a hook for a derived facet to change the behavior of narrowing. do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 1160 of file locale_facets.h.

4.423.3.4 virtual char_type std::ctype< char >::do_tolower (char_type __c) const [protected], [virtual], [inherited]

Convert to lowercase.

This virtual function converts the char argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The lowercase char if convertible, else *__c*.

4.423.3.5 virtual const char_type* std::ctype< char >::do_tolower (char_type * __lo, const char_type * __hi) const [protected], [virtual], [inherited]

Convert array to lowercase.

This virtual function converts each char in the range [lo,hi) to lowercase if possible. Other chars remain untouched.

do_tolower() is a hook for a derived facet to change the behavior of lowercasing. do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

4.423.3.6 virtual char_type std::ctype< char >::do_toupper (char_type __c) const [protected], [virtual], [inherited]

Convert to uppercase.

This virtual function converts the char argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The uppercase char if convertible, else *__c*.

4.423.3.7 virtual const char_type* std::ctype< char >::do_toupper (char_type * __lo, const char_type * __hi) const [protected], [virtual], [inherited]

Convert array to uppercase.

This virtual function converts each char in the range [lo,hi) to uppercase if possible. Other chars remain untouched.

do_toupper() is a hook for a derived facet to change the behavior of uppercasing. do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

__hi.

4.423.3.8 virtual char_type std::ctype< char >::do_widen (char __c) const [inline], [protected], [virtual], [inherited]

Widen char.

This virtual function converts the char to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be returned unchanged.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted character.

Definition at line 1084 of file locale_facets.h.

4.423.3.9 virtual const char* std::ctype< char >::do_widen (const char * *__lo*, const char * *__hi*, char_type * *__to*) const [inline], [protected], [virtual], [inherited]

Widen char array.

This function converts each char in the range [lo,hi) to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be copied unchanged.

do_widen() is a hook for a derived facet to change the behavior of widening. do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 1107 of file locale_facets.h.

4.423.3.10 bool std::ctype< char >::is (mask *__m*, char *__c*) const [inline], [inherited]

Test char classification.

This function compares the mask table[c] to *__m*.

Parameters

__c	The char to compare the mask of.
__m	The mask to compare against.

Returns

True if __m & table[__c] is true, false otherwise.

Definition at line 43 of file ctype_inline.h.

4.423.3.11 const char * std::ctype< char >::is (const char * *__lo*, const char * *__hi*, mask * *__vec*) const [inline], [inherited]

Return a mask array.

This function finds the mask for each char in the range [lo, hi) and successively writes it to vec. vec must have as many elements as the char array.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.
__vec	Pointer to an array of mask storage.

Returns

__hi.

Definition at line 48 of file ctype_inline.h.

4.423.3.12 char std::ctype< char >::narrow (char_type *__c*, char *__dfault*) const [inline], [inherited]

Narrow char.

This function converts the char to char using the simplest reasonable transformation. If the conversion fails, dfault is returned instead. For an underived ctype<char> facet, *c* will be returned unchanged.

This function works as if it returns ctype<char>::do_narrow(c). do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.
__dfault	Char to return if conversion fails.

Returns

The converted character.

Definition at line 931 of file locale_facets.h.

References std::ctype< _CharT >::do_narrow().

4.423.3.13 const char_type* std::ctype< char >::narrow (const char_type * *__lo*, const char_type * *__hi*, char *__dfault*, char * *__to*) const [inline], [inherited]

Narrow char array.

This function converts each char in the input to char using the simplest reasonable transformation and writes the results to the destination array. For any char in the input that cannot be converted, *dfault* is used instead. For an underived ctype<char> facet, the argument will be copied unchanged.

This function works as if it returns ctype<char>::do_narrow(lo, hi, dfault, to). do_narrow() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to start of range.
__hi	Pointer to end of range.

__dfault	Char to use if conversion fails.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 964 of file locale_facets.h.

References std::ctype< _CharT >::do_narrow().

4.423.3.14 const char * std::ctype< char >::scan_is (mask *__m*, const char * *__lo*, const char * *__hi*) const [inline], [inherited]

Find char matching a mask.

This function searches for and returns the first char in [lo,hi) for which is(m,char) is true.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a matching char if found, else *__hi*.

Definition at line 57 of file ctype_inline.h.

References std::__ctype_abstract_base< _CharT >::is().

4.423.3.15 const char * std::ctype< char >::scan_not (mask *__m*, const char * *__lo*, const char * *__hi*) const [inline], [inherited]

Find char not matching a mask.

This function searches for and returns a pointer to the first char in [__lo,__hi) for which is(m,char) is false.

Parameters

__m	The mask to compare against.
__lo	Pointer to start of range.
__hi	Pointer to end of range.

Returns

Pointer to a non-matching char if found, else *__hi*.

Definition at line 66 of file ctype_inline.h.

References std::__ctype_abstract_base< _CharT >::is().

4.423.3.16 const mask* std::ctype< char >::table ( ) const throw) [inline], [inherited]

Returns a pointer to the mask table provided to the constructor, or the default from classic_table() if none was provided.

Definition at line 983 of file locale_facets.h.

4.423.3.17 char_type std::ctype< char >::tolower (char_type __c) const [inline], [inherited]

Convert to lowercase.

This function converts the char argument to lowercase if possible. If not possible (for example, '2'), returns the argument.

tolower() acts as if it returns ctype<char>::do_tolower(__c). do_tolower() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The lowercase char if convertible, else *__c*.

Definition at line 835 of file locale_facets.h.

References std::ctype< _CharT >::do_tolower().

4.423.3.18 const char_type* std::ctype< char >::tolower (char_type * __lo, const char_type * __hi) const [inline], [inherited]

Convert array to lowercase.

This function converts each char in the range [lo,hi) to lowercase if possible. Other chars remain untouched.

tolower() acts as if it returns ctype<char>:: do_tolower(__lo, __hi). do_tolower() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 852 of file locale_facets.h.

References std::ctype< _CharT >::do_tolower().

4.423.3.19 char_type std::ctype< char >::toupper (char_type __c) const [inline], [inherited]

Convert to uppercase.

This function converts the char argument to uppercase if possible. If not possible (for example, '2'), returns the argument.

toupper() acts as if it returns ctype<char>::do_toupper(c). do_toupper() must always return the same result for the same input.

Parameters

__c	The char to convert.

Returns

The uppercase char if convertible, else *__c*.

Definition at line 802 of file locale_facets.h.

References std::ctype< _CharT >::do_toupper().

4.423.3.20 const char_type* std::ctype< char >::toupper (char_type * __lo, const char_type * __hi) const [inline],[inherited]

Convert array to uppercase.

This function converts each char in the range [__lo,__hi) to uppercase if possible. Other chars remain untouched.

toupper() acts as if it returns ctype<char>:: do_toupper(__lo, __hi). do_toupper() must always return the same result for the same input.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.

Returns

__hi.

Definition at line 819 of file locale_facets.h.

References std::ctype< _CharT >::do_toupper().

4.423.3.21 char_type std::ctype< char >::widen (char __c) const [inline],[inherited]

Widen char.

This function converts the char to char_type using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be returned unchanged.

This function works as if it returns ctype<char>::do_widen(c). do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__c	The char to convert.

Returns

The converted character.

Definition at line 872 of file locale_facets.h.

References std::ctype< _CharT >::do_widen().

4.423.3.22 const char* std::ctype< char >::widen (const char * __lo, const char * __hi, char_type * __to) const [inline],[inherited]

Widen char array.

This function converts each char in the input to char using the simplest reasonable transformation. For an underived ctype<char> facet, the argument will be copied unchanged.

This function works as if it returns ctype<char>::do_widen(c). do_widen() must always return the same result for the same input.

Note: this is not what you want for codepage conversions. See codecvt for that.

Parameters

__lo	Pointer to first char in range.
__hi	Pointer to end of range.
__to	Pointer to the destination array.

Returns

__hi.

Definition at line 899 of file locale_facets.h.

References std::ctype< _CharT >::do_widen().

4.423.4 Member Data Documentation

4.423.4.1 locale::id std::ctype< char >::id [static], [inherited]

The facet id for ctype<char>

Definition at line 703 of file locale_facets.h.

4.423.4.2 const size_t std::ctype< char >::table_size [static], [inherited]

The size of the mask table. It is SCHAR_MAX + 1.

Definition at line 705 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.424 __gnu_cxx::debug_allocator< _Alloc > Class Template Reference

Public Types

- typedef _Traits::const_pointer **const_pointer**
- typedef _Traits::const_reference **const_reference**
- typedef _Traits::difference_type **difference_type**
- typedef _Traits::pointer **pointer**
- typedef _Traits::reference **reference**
- typedef _Traits::size_type **size_type**
- typedef _Traits::value_type **value_type**

Public Member Functions

- template<typename _Alloc2 >
  debug_allocator (const debug_allocator< _Alloc2 > &__a2, typename __convertible< _Alloc2 >::__type=0)
- **debug_allocator** (const _Alloc &__a)
- pointer **allocate** (size_type __n)
- pointer **allocate** (size_type __n, const void *__hint)
- void **construct** (pointer __p, const value_type &__val)
- template<typename _Tp , typename... _Args>
  void **construct** (_Tp *__p, _Args &&...__args)

- void **deallocate** (pointer __p, size_type __n)
- template<typename _Tp >
  void **destroy** (_Tp *__p)
- size_type **max_size** () const throw ()

Friends

- template<typename >
  class **debug_allocator**
- template<typename _Alloc2 >
  bool **operator!=** (const debug_allocator &__lhs, const debug_allocator< _Alloc2 > &__rhs) noexcept
- template<typename _Alloc2 >
  bool **operator==** (const debug_allocator &__lhs, const debug_allocator< _Alloc2 > &__rhs) noexcept

4.424.1 Detailed Description

template<typename _Alloc>class __gnu_cxx::debug_allocator< _Alloc >

A meta-allocator with debugging bits.

This is precisely the allocator defined in the C++03 Standard.

Definition at line 60 of file debug_allocator.h.

The documentation for this class was generated from the following file:

- debug_allocator.h

4.425 std::decay< _Tp > Class Template Reference

Public Types

- typedef __decay_selector
  < __remove_type >::__type **type**

4.425.1 Detailed Description

template<typename _Tp>class std::decay< _Tp >

decay

Definition at line 2147 of file type_traits.

The documentation for this class was generated from the following file:

- type_traits

4.426 std::decimal::decimal128 Class Reference

Public Types

- typedef float **__decfloat128**

Public Member Functions

- **decimal128** (decimal32 d32)
- **decimal128** (decimal64 d64)
- **decimal128** (float __r)
- **decimal128** (double __r)
- **decimal128** (long double __r)
- **decimal128** (int __z)
- **decimal128** (unsigned int __z)
- **decimal128** (long __z)
- **decimal128** (unsigned long __z)
- **decimal128** (long long __z)
- **decimal128** (unsigned long long __z)
- decimal128 (__decfloat128 __z)
- __decfloat128 **__getval** (void)
- void **__setval** (__decfloat128 __x)
- **operator long long** () const
- decimal128 & **operator*=** (decimal32 __rhs)
- decimal128 & **operator*=** (decimal64 __rhs)
- decimal128 & **operator*=** (decimal128 __rhs)
- decimal128 & **operator*=** (int __rhs)
- decimal128 & **operator*=** (unsigned int __rhs)
- decimal128 & **operator*=** (long __rhs)
- decimal128 & **operator*=** (long long __rhs)
- decimal128 & **operator*=** (unsigned long long __rhs)
- decimal128 & **operator*=** (unsigned long __rhs)
- decimal128 & **operator++** ()
- decimal128 **operator++** (int)
- decimal128 & **operator+=** (decimal32 __rhs)
- decimal128 & **operator+=** (decimal64 __rhs)
- decimal128 & **operator+=** (unsigned int __rhs)
- decimal128 & **operator+=** (unsigned long long __rhs)
- decimal128 & **operator+=** (long __rhs)
- decimal128 & **operator+=** (unsigned long __rhs)
- decimal128 & **operator+=** (long long __rhs)
- decimal128 & **operator+=** (int __rhs)
- decimal128 & **operator+=** (decimal128 __rhs)
- decimal128 & **operator--** ()
- decimal128 **operator--** (int)
- decimal128 & **operator-=** (int __rhs)
- decimal128 & **operator-=** (decimal32 __rhs)
- decimal128 & **operator-=** (unsigned long __rhs)
- decimal128 & **operator-=** (decimal64 __rhs)
- decimal128 & **operator-=** (long long __rhs)
- decimal128 & **operator-=** (long __rhs)
- decimal128 & **operator-=** (decimal128 __rhs)
- decimal128 & **operator-=** (unsigned int __rhs)
- decimal128 & **operator-=** (unsigned long long __rhs)
- decimal128 & **operator/=** (decimal64 __rhs)
- decimal128 & **operator/=** (unsigned long __rhs)
- decimal128 & **operator/=** (unsigned long long __rhs)

- decimal128 & **operator/=** (long __rhs)
- decimal128 & **operator/=** (long long __rhs)
- decimal128 & **operator/=** (int __rhs)
- decimal128 & **operator/=** (decimal128 __rhs)
- decimal128 & **operator/=** (unsigned int __rhs)
- decimal128 & **operator/=** (decimal32 __rhs)

4.426.1 Detailed Description

3.2.4 Class decimal128.

Definition at line 399 of file decimal.

4.426.2 Constructor & Destructor Documentation

4.426.2.1 std::decimal::decimal128::decimal128 (__decfloat128 __z) [inline]

Conforming extension: Conversion from scalar decimal type.

Definition at line 424 of file decimal.

The documentation for this class was generated from the following file:

- decimal

4.427 std::decimal::decimal32 Class Reference

Public Types

- typedef float **__decfloat32**

Public Member Functions

- **decimal32** (decimal64 __d64)
- **decimal32** (decimal128 __d128)
- **decimal32** (float __r)
- **decimal32** (double __r)
- **decimal32** (long double __r)
- **decimal32** (int __z)
- **decimal32** (unsigned int __z)
- **decimal32** (long __z)
- **decimal32** (unsigned long __z)
- **decimal32** (long long __z)
- **decimal32** (unsigned long long __z)
- decimal32 (__decfloat32 __z)
- __decfloat32 **__getval** (void)
- void **__setval** (__decfloat32 __x)
- **operator long long** () const
- decimal32 & **operator*=** (decimal32 __rhs)
- decimal32 & **operator*=** (decimal64 __rhs)
- decimal32 & **operator*=** (decimal128 __rhs)

- decimal32 & **operator*=** (int __rhs)
- decimal32 & **operator*=** (unsigned int __rhs)
- decimal32 & **operator*=** (long __rhs)
- decimal32 & **operator*=** (long long __rhs)
- decimal32 & **operator*=** (unsigned long long __rhs)
- decimal32 & **operator*=** (unsigned long __rhs)
- decimal32 & **operator++** ()
- decimal32 **operator++** (int)
- decimal32 & **operator+=** (decimal32 __rhs)
- decimal32 & **operator+=** (decimal64 __rhs)
- decimal32 & **operator+=** (unsigned int __rhs)
- decimal32 & **operator+=** (unsigned long long __rhs)
- decimal32 & **operator+=** (long __rhs)
- decimal32 & **operator+=** (unsigned long __rhs)
- decimal32 & **operator+=** (long long __rhs)
- decimal32 & **operator+=** (int __rhs)
- decimal32 & **operator+=** (decimal128 __rhs)
- decimal32 & **operator--** ()
- decimal32 **operator--** (int)
- decimal32 & **operator-=** (int __rhs)
- decimal32 & **operator-=** (decimal32 __rhs)
- decimal32 & **operator-=** (unsigned long __rhs)
- decimal32 & **operator-=** (decimal64 __rhs)
- decimal32 & **operator-=** (long long __rhs)
- decimal32 & **operator-=** (long __rhs)
- decimal32 & **operator-=** (decimal128 __rhs)
- decimal32 & **operator-=** (unsigned int __rhs)
- decimal32 & **operator-=** (unsigned long long __rhs)
- decimal32 & **operator/=** (decimal64 __rhs)
- decimal32 & **operator/=** (unsigned long __rhs)
- decimal32 & **operator/=** (unsigned long long __rhs)
- decimal32 & **operator/=** (long __rhs)
- decimal32 & **operator/=** (long long __rhs)
- decimal32 & **operator/=** (int __rhs)
- decimal32 & **operator/=** (decimal128 __rhs)
- decimal32 & **operator/=** (unsigned int __rhs)
- decimal32 & **operator/=** (decimal32 __rhs)

4.427.1 Detailed Description

3.2.2 Class decimal32.

Definition at line 227 of file decimal.

4.427.2 Constructor & Destructor Documentation

4.427.2.1 std::decimal::decimal32::decimal32 (__decfloat32 __z) [inline]

Conforming extension: Conversion from scalar decimal type.

Definition at line 251 of file decimal.

The documentation for this class was generated from the following file:

- decimal

4.428 std::decimal::decimal64 Class Reference

Public Types

- typedef float **__decfloat64**

Public Member Functions

- **decimal64** (decimal32 d32)
- **decimal64** (decimal128 d128)
- **decimal64** (float __r)
- **decimal64** (double __r)
- **decimal64** (long double __r)
- **decimal64** (int __z)
- **decimal64** (unsigned int __z)
- **decimal64** (long __z)
- **decimal64** (unsigned long __z)
- **decimal64** (long long __z)
- **decimal64** (unsigned long long __z)
- decimal64 (__decfloat64 __z)
- __decfloat64 **__getval** (void)
- void **__setval** (__decfloat64 __x)
- **operator long long** () const
- decimal64 & **operator*=** (decimal32 __rhs)
- decimal64 & **operator*=** (decimal64 __rhs)
- decimal64 & **operator*=** (decimal128 __rhs)
- decimal64 & **operator*=** (int __rhs)
- decimal64 & **operator*=** (unsigned int __rhs)
- decimal64 & **operator*=** (long __rhs)
- decimal64 & **operator*=** (long long __rhs)
- decimal64 & **operator*=** (unsigned long long __rhs)
- decimal64 & **operator*=** (unsigned long __rhs)
- decimal64 & **operator++** ()
- decimal64 **operator++** (int)
- decimal64 & **operator+=** (decimal32 __rhs)
- decimal64 & **operator+=** (decimal64 __rhs)
- decimal64 & **operator+=** (unsigned int __rhs)
- decimal64 & **operator+=** (unsigned long long __rhs)
- decimal64 & **operator+=** (long __rhs)

- decimal64 & **operator+=** (unsigned long __rhs)
- decimal64 & **operator+=** (long long __rhs)
- decimal64 & **operator+=** (int __rhs)
- decimal64 & **operator+=** (decimal128 __rhs)
- decimal64 & **operator--** ()
- decimal64 **operator--** (int)
- decimal64 & **operator-=** (int __rhs)
- decimal64 & **operator-=** (decimal32 __rhs)
- decimal64 & **operator-=** (unsigned long __rhs)
- decimal64 & **operator-=** (decimal64 __rhs)
- decimal64 & **operator-=** (long long __rhs)
- decimal64 & **operator-=** (long __rhs)
- decimal64 & **operator-=** (decimal128 __rhs)
- decimal64 & **operator-=** (unsigned int __rhs)
- decimal64 & **operator-=** (unsigned long long __rhs)
- decimal64 & **operator/=** (decimal64 __rhs)
- decimal64 & **operator/=** (unsigned long __rhs)
- decimal64 & **operator/=** (unsigned long long __rhs)
- decimal64 & **operator/=** (long __rhs)
- decimal64 & **operator/=** (long long __rhs)
- decimal64 & **operator/=** (int __rhs)
- decimal64 & **operator/=** (decimal128 __rhs)
- decimal64 & **operator/=** (unsigned int __rhs)
- decimal64 & **operator/=** (decimal32 __rhs)

4.428.1 Detailed Description

3.2.3 Class decimal64.

Definition at line 313 of file decimal.

4.428.2 Constructor & Destructor Documentation

4.428.2.1 std::decimal::decimal64::decimal64 (__decfloat64 __z) [inline]

Conforming extension: Conversion from scalar decimal type.

Definition at line 337 of file decimal.

The documentation for this class was generated from the following file:

- decimal

4.429 __gnu_pbds::detail::default_comb_hash_fn Struct Reference

Public Types

- typedef direct_mask_range_hashing type

4.429.1 Detailed Description

Primary template, default_comb_hash_fn.

Definition at line 80 of file standard_policies.hpp.

4.429.2 Member Typedef Documentation

4.429.2.1 typedef direct_mask_range_hashing __gnu_pbds::detail::default_comb_hash_fn::type

Dispatched type.

Definition at line 83 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.430 std::default_delete< _Tp > Struct Template Reference

Public Member Functions

- constexpr default_delete () noexcept=default
- template<typename _Up , typename = _Require<is_convertible<_Up*, _Tp*>>>
  default_delete (const default_delete< _Up > &) noexcept
- void operator() (_Tp *__ptr) const

4.430.1 Detailed Description

template<typename _Tp>struct std::default_delete< _Tp >

Primary template of default_delete, used by unique_ptr for single objects.

Definition at line 63 of file unique_ptr.h.

4.430.2 Constructor & Destructor Documentation

4.430.2.1 template<typename _Tp> constexpr std::default_delete< _Tp >::default_delete ( ) [default], [noexcept]

Default constructor.

4.430.2.2 template<typename _Tp> template<typename _Up , typename = _Require<is_convertible<_Up*, _Tp*>>> std::default_delete< _Tp >::default_delete (const default_delete< _Up > &) [inline], [noexcept]

Converting constructor.

Allows conversion from a deleter for objects of another type, _Up, only if _Up* is convertible to _Tp*.

Definition at line 75 of file unique_ptr.h.

4.430.3 Member Function Documentation

4.430.3.1 template<typename _Tp> void std::default_delete< _Tp >::operator() (_Tp * __ptr) const [inline]

Calls `delete __ptr`

Definition at line 79 of file unique_ptr.h.

The documentation for this struct was generated from the following file:

- unique_ptr.h

4.431 std::default_delete< _Tp[]> Struct Template Reference

Public Member Functions

- constexpr default_delete () noexcept=default
- template<typename _Up , typename = _Require<is_convertible<_Up(*)[], _Tp(*)[]>>>
  default_delete (const default_delete< _Up[]> &) noexcept
- template<typename _Up >
  enable_if< is_convertible< _Up(*)[],
  _Tp(*)[]>::value >::type operator() (_Up *__ptr) const

4.431.1 Detailed Description

template<typename _Tp>struct std::default_delete< _Tp[]>

Specialization of default_delete for arrays, used by `unique_ptr<T[]>`

Definition at line 94 of file unique_ptr.h.

4.431.2 Constructor & Destructor Documentation

4.431.2.1 template<typename _Tp > constexpr std::default_delete< _Tp[]>::default_delete ( ) [default], [noexcept]

Default constructor.

4.431.2.2 template<typename _Tp > template<typename _Up , typename = _Require<is_convertible<_Up(*)[], _Tp(*)[]>>> std::default_delete< _Tp[]>::default_delete (const default_delete< _Up[]> &) [inline], [noexcept]

Converting constructor.

Allows conversion from a deleter for arrays of another type, such as a const-qualified version of `_Tp`.

Conversions from types derived from `_Tp` are not allowed because it is undefined to `delete[]` an array of derived types through a pointer to the base type.

Definition at line 111 of file unique_ptr.h.

4.431.3 Member Function Documentation

4.431.3.1 template<typename _Tp > template<typename _Up > enable_if<is_convertible<_Up(*)[], _Tp(*)[]>::value>::type std::default_delete< _Tp[]>::operator() (_Up * __ptr) const [inline]

Calls `delete[] __ptr`

Definition at line 116 of file unique_ptr.h.

The documentation for this struct was generated from the following file:

- unique_ptr.h

4.432 __gnu_pbds::detail::default_eq_fn< Key > Struct Template Reference

Public Types

- typedef std::equal_to< Key > type

4.432.1 Detailed Description

template<typename Key>struct __gnu_pbds::detail::default_eq_fn< Key >

Primary template, default_eq_fn.

Definition at line 67 of file standard_policies.hpp.

4.432.2 Member Typedef Documentation

4.432.2.1 template<typename Key> typedef std::equal_to<Key> __gnu_pbds::detail::default_eq_fn< Key >::type

Dispatched type.

Definition at line 70 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.433 __gnu_pbds::detail::default_hash_fn< Key > Struct Template Reference

Public Types

- typedef std::tr1::hash< Key > type

4.433.1 Detailed Description

template<typename Key>struct __gnu_pbds::detail::default_hash_fn< Key >

Primary template, default_hash_fn.

Definition at line 59 of file standard_policies.hpp.

4.433.2 Member Typedef Documentation

4.433.2.1 template<typename Key> typedef std::tr1::hash<Key> __gnu_pbds::detail::default_hash_fn< Key >::type

Dispatched type.

Definition at line 62 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.434 __gnu_parallel::default_parallel_tag Struct Reference

Inheritance diagram for __gnu_parallel::default_parallel_tag:

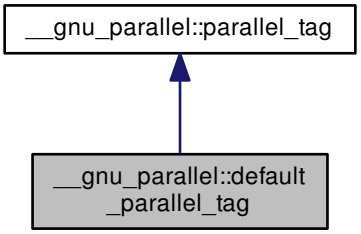

Public Member Functions

- **default_parallel_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.434.1 Detailed Description

Recommends parallel execution using the default parallel algorithm.

Definition at line 79 of file tags.h.

4.434.2 Member Function Documentation

4.434.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline],[inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.434.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.435 __gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn > Struct Template Reference

Public Types

- typedef cond_type::__type type

4.435.1 Detailed Description

template<typename Comb_Probe_Fn>struct __gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn >

Primary template, default_probe_fn.

Definition at line 117 of file standard_policies.hpp.

4.435.2 Member Typedef Documentation

4.435.2.1 template<typename Comb_Probe_Fn > typedef cond_type::__type __gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn >::type

Dispatched type.

Definition at line 129 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.436 __gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn > Struct Template Reference

Public Types

- typedef hash_standard_resize_policy < size_policy_type, trigger,

false, size_type > type

4.436.1 Detailed Description

template<typename Comb_Hash_Fn>struct __gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn >

Primary template, default_resize_policy.

Definition at line 88 of file standard_policies.hpp.

4.436.2 Member Typedef Documentation

4.436.2.1 template<typename Comb_Hash_Fn> typedef hash_standard_resize_policy<size_policy_type, trigger, false, size_type> __gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn >::type

Dispatched type.

Definition at line 105 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.437 __gnu_pbds::detail::default_trie_access_traits< Key > Struct Template Reference

4.437.1 Detailed Description

template<typename Key>struct __gnu_pbds::detail::default_trie_access_traits< Key >

Primary template, default_trie_access_traits.

Definition at line 135 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.438 __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > > Struct Template Reference

Public Types

- typedef trie_string_access_traits < string_type > type

4.438.1 Detailed Description

template<typename Char, typename Char_Traits>struct __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > >

Partial specialization, default_trie_access_traits.

Definition at line 142 of file standard_policies.hpp.

4.438.2 Member Typedef Documentation

4.438.2.1 template<typename Char , typename Char_Traits > typedef trie_string_access_traits<string_type> __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > >::type

Dispatched type.

Definition at line 149 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.439 __gnu_pbds::detail::default_update_policy Struct Reference

Public Types

- typedef lu_move_to_front_policy type

4.439.1 Detailed Description

Default update policy.

Definition at line 109 of file standard_policies.hpp.

4.439.2 Member Typedef Documentation

4.439.2.1 typedef lu_move_to_front_policy __gnu_pbds::detail::default_update_policy::type

Dispatched type.

Definition at line 112 of file standard_policies.hpp.

The documentation for this struct was generated from the following file:

- standard_policies.hpp

4.440 std::defer_lock_t Struct Reference

4.440.1 Detailed Description

Do not acquire ownership of the mutex.

Definition at line 129 of file std_mutex.h.

The documentation for this struct was generated from the following file:

- std_mutex.h

4.441 std::deque< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::deque< _Tp, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef _Base::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef _Alloc_traits::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef ptrdiff_t **difference_type**
- typedef _Base::iterator **iterator**
- typedef _Alloc_traits::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- deque ()=default
- deque (const allocator_type &__a)
- deque (size_type __n, const allocator_type &__a=allocator_type())
- deque (size_type __n, const value_type &__value, const allocator_type &__a=allocator_type())
- deque (const deque &__x)
- deque (deque &&)=default
- deque (const deque &__x, const allocator_type &__a)
- deque (deque &&__x, const allocator_type &__a)
- deque (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> deque (_InputIterator __first, _InputIterator __last, const allocator_type &__a=allocator_type())

- ~deque ()
- template<typename... _Args>
  deque< _Tp, _Alloc >::iterator **_M_insert_aux** (iterator __pos, _Args &&...__args)
- void assign (size_type __n, const value_type &__val)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void assign (_InputIterator __first, _InputIterator __last)
- void assign (initializer_list< value_type > __l)
- reference at (size_type __n)
- const_reference at (size_type __n) const
- reference back () noexcept
- const_reference back () const noexcept
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- template<typename... _Args>
  deque< _Tp, _Alloc >::iterator **emplace** (const_iterator __position, _Args &&...__args)
- template<typename... _Args>
  iterator emplace (const_iterator __position, _Args &&...__args)
- template<typename... _Args>
  void **emplace_back** (_Args &&...__args)
- template<typename... _Args>
  void **emplace_front** (_Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- iterator erase (const_iterator __position)
- iterator erase (const_iterator __first, const_iterator __last)
- reference front () noexcept
- const_reference front () const noexcept
- allocator_type get_allocator () const noexcept
- iterator insert (const_iterator __position, const value_type &__x)
- iterator insert (const_iterator __position, value_type &&__x)
- iterator insert (const_iterator __p, initializer_list< value_type > __l)
- iterator insert (const_iterator __position, size_type __n, const value_type &__x)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator insert (const_iterator __position, _InputIterator __first, _InputIterator __last)
- size_type max_size () const noexcept
- deque & operator= (const deque &__x)
- deque & operator= (deque &&__x) noexcept(_Alloc_traits::_S_always_equal())
- deque & operator= (initializer_list< value_type > __l)
- reference operator[] (size_type __n) noexcept
- const_reference operator[] (size_type __n) const noexcept
- void pop_back () noexcept
- void pop_front () noexcept
- void push_back (const value_type &__x)
- void **push_back** (value_type &&__x)
- void push_front (const value_type &__x)

- void **push_front** (value_type &&__x)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- void resize (size_type __new_size)
- void resize (size_type __new_size, const value_type &__x)
- void shrink_to_fit () noexcept
- size_type size () const noexcept
- void swap (deque &__x) noexcept

Protected Types

- enum { **_S_initial_map_size** }
- typedef __gnu_cxx::__alloc_traits < _Map_alloc_type > **_Map_alloc_traits**
- typedef _Alloc_traits::template rebind < _Ptr >::other **_Map_alloc_type**
- typedef _Alloc_traits::pointer **_Ptr**
- typedef _Alloc_traits::const_pointer **_Ptr_const**

Protected Member Functions

- _Map_pointer **_M_allocate_map** (size_t __n)
- _Ptr **_M_allocate_node** ()
- template<typename _InputIterator > void **_M_assign_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator > void **_M_assign_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_create_nodes** (_Map_pointer __nstart, _Map_pointer __nfinish)
- void **_M_deallocate_map** (_Map_pointer __p, size_t __n) noexcept
- void **_M_deallocate_node** (_Ptr __p) noexcept
- void **_M_default_append** (size_type __n)
- void **_M_default_initialize** ()
- template<typename _Alloc1 > void **_M_destroy_data** (iterator __first, iterator __last, const _Alloc1 &)
- void **_M_destroy_data** (iterator __first, iterator __last, const std::allocator< _Tp > &)
- void **_M_destroy_data_aux** (iterator __first, iterator __last)
- void **_M_destroy_nodes** (_Map_pointer __nstart, _Map_pointer __nfinish) noexcept
- iterator **_M_erase** (iterator __pos)
- iterator **_M_erase** (iterator __first, iterator __last)
- void **_M_erase_at_begin** (iterator __pos)
- void **_M_erase_at_end** (iterator __pos)
- void **_M_fill_assign** (size_type __n, const value_type &__val)
- void _M_fill_initialize (const value_type &__value)
- void **_M_fill_insert** (iterator __pos, size_type __n, const value_type &__x)
- _Map_alloc_type **_M_get_map_allocator** () const noexcept

- _Tp_alloc_type & **_M_get_Tp_allocator** () noexcept
- const _Tp_alloc_type & **_M_get_Tp_allocator** () const noexcept
- void _M_initialize_map (size_t)
- template<typename... _Args>
  iterator **_M_insert_aux** (iterator __pos, _Args &&...__args)
- void **_M_insert_aux** (iterator __pos, size_type __n, const value_type &__x)
- template<typename _ForwardIterator >
  void **_M_insert_aux** (iterator __pos, _ForwardIterator __first, _ForwardIterator __last, size_type __n)
- void **_M_move_assign1** (deque &&__x, true_type) noexcept
- void **_M_move_assign1** (deque &&__x, false_type)
- void **_M_move_assign2** (deque &&__x, true_type)
- void **_M_move_assign2** (deque &&__x, false_type)
- void _M_range_check (size_type __n) const
- template<typename _InputIterator >
  void **_M_range_insert_aux** (iterator __pos, _InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_range_insert_aux** (iterator __pos, _ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename... _Args>
  void **_M_replace_map** (_Args &&...__args)
- bool **_M_shrink_to_fit** ()

- template<typename _InputIterator >
  void _M_range_initialize (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void _M_range_initialize (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)

- template<typename... _Args>
  void _M_push_back_aux (_Args &&...__args)
- template<typename... _Args>
  void _M_push_front_aux (_Args &&...__args)
- void _M_pop_back_aux ()
- void _M_pop_front_aux ()

- iterator _M_reserve_elements_at_front (size_type __n)
- iterator _M_reserve_elements_at_back (size_type __n)
- void _M_new_elements_at_front (size_type __new_elements)
- void _M_new_elements_at_back (size_type __new_elements)

- void _M_reserve_map_at_back (size_type __nodes_to_add=1)
- void _M_reserve_map_at_front (size_type __nodes_to_add=1)
- void _M_reallocate_map (size_type __nodes_to_add, bool __add_at_front)

Static Protected Member Functions

- static size_t **_S_check_init_len** (size_t __n, const allocator_type &__a)
- static size_type **_S_max_size** (const _Tp_alloc_type &__a) noexcept

Protected Attributes

- _Deque_impl **_M_impl**

4.441.1 Detailed Description

template<typename _Tp, typename _Alloc = std::allocator<_Tp>>class std::deque< _Tp, _Alloc >

A standard container using fixed-size memory allocation and constant-time manipulation of elements at either end.

Template Parameters

_Tp	Type of element.
_Alloc	Allocator type, defaults to allocator<_Tp>.

Meets the requirements of a container, a reversible container, and a sequence, including the optional sequence requirements.

In previous HP/SGI versions of deque, there was an extra template parameter so users could control the node size. This extension turned out to violate the C++ standard (it can be detected using template template parameters), and it was removed.

Here's how a deque<Tp> manages memory. Each deque has 4 members:

- Tp** _M_map
- size_t _M_map_size
- iterator _M_start, _M_finish

map_size is at least 8. map is an array of map_size pointers-to-*nodes*. (The name map has nothing to do with the std::map class, and **nodes** should not be confused with std::list's usage of *node*.)

A *node* has no specific type name as such, but it is referred to as *node* in this file. It is a simple array-of-Tp. If Tp is very large, there will be one Tp element per node (i.e., an *array* of one). For non-huge Tp's, node size is inversely related to Tp size: the larger the Tp, the fewer Tp's will fit in a node. The goal here is to keep the total size of a node relatively small and constant over different Tp's, to improve allocator efficiency.

Not every pointer in the map array will point to a node. If the initial number of elements in the deque is small, the /middle/ map pointers will be valid, and the ones at the edges will be unused. This same situation will arise as the map grows: available map pointers, if any, will be on the ends. As new nodes are created, only a subset of the map's pointers need to be copied *outward*.

Class invariants:

- For any nonsingular iterator i:
  - i.node points to a member of the map array. (Yes, you read that correctly: i.node does not actually point to a node.) The member of the map array is what actually points to the node.
  - i.first == *(i.node) (This points to the node (first Tp element).)
  - i.last == i.first + node_size
  - i.cur is a pointer in the range [i.first, i.last). NOTE: the implication of this is that i.cur is always a dereferenceable pointer, even if i is a past-the-end iterator.
- Start and Finish are always nonsingular iterators. NOTE: this means that an empty deque must have one node, a deque with <N elements (where N is the node buffer size) must have one node, a deque with N through (2N-1) elements must have two nodes, etc.
- For every node other than start.node and finish.node, every element in the node is an initialized object. If start.node == finish.node, then [start.cur, finish.cur) are initialized objects, and the elements outside that range are uninitialized storage. Otherwise, [start.cur, start.last) and [finish.first, finish.cur) are initialized objects, and [start.first, start.cur) and [finish.cur, finish.last) are uninitialized storage.

- [map, map + map_size) is a valid, non-empty range.
- [start.node, finish.node] is a valid range contained within [map, map + map_size).
- A pointer in the range [map, map + map_size) points to an allocated node if and only if the pointer is in the range [start.node, finish.node].

  Here's the magic: nothing in deque is **aware** of the discontiguous storage!

  The memory setup and layout occurs in the parent, _Base, and the iterator class is entirely responsible for *leaping* from one node to the next. All the implementation routines for deque itself work only through the start and finish iterators. This keeps the routines simple and sane, and we can use other standard algorithms as well.

Definition at line 764 of file stl_deque.h.

4.441.2 Constructor & Destructor Documentation

4.441.2.1 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque ( ) [default]

Creates a deque with no elements.

4.441.2.2 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (const allocator_type & __a) [inline], [explicit]

Creates a deque with no elements.

Parameters

__a	An allocator object.

Definition at line 841 of file stl_deque.h.

4.441.2.3 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (size_type __n, const allocator_type & __a = allocator_type()) [inline], [explicit]

Creates a deque with default constructed elements.

Parameters

__n	The number of elements to initially create.
__a	An allocator.

This constructor fills the deque with *n* default constructed elements.

Definition at line 854 of file stl_deque.h.

4.441.2.4 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (size_type __n, const value_type & __value, const allocator_type & __a = allocator_type()) [inline]

Creates a deque with copies of an exemplar element.

Parameters

__n	The number of elements to initially create.
__value	An element to copy.

__a	An allocator.

This constructor fills the deque with *__n* copies of *__value*.

Definition at line 866 of file stl_deque.h.

4.441.2.5 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (const deque< _Tp, _Alloc > & __x) [inline]

Deque copy constructor.

Parameters

__x	A deque of identical element and allocator types.

The newly-created deque uses a copy of the allocator object used by *__x* (unless the allocator traits dictate a different object).

Definition at line 893 of file stl_deque.h.

4.441.2.6 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (deque< _Tp, _Alloc > &&) [default]

Deque move constructor.

The newly-created deque contains the exact contents of the moved instance. The contents of the moved instance are a valid, but unspecified deque.

4.441.2.7 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (const deque< _Tp, _Alloc > & __x, const allocator_type & __a) [inline]

Copy constructor with alternative allocator.

Definition at line 912 of file stl_deque.h.

4.441.2.8 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (deque< _Tp, _Alloc > && __x, const allocator_type & __a) [inline]

Move constructor with alternative allocator.

Definition at line 919 of file stl_deque.h.

4.441.2.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::deque (initializer_list< value_type > __l, const allocator_type & __a = allocator_type()) [inline]

Builds a deque from an initializer list.

Parameters

__l	An initializer_list.
__a	An allocator object.

Create a deque consisting of copies of the elements in the initializer_list *__l*.

This will call the element type's copy constructor N times (where N is __l.size()) and do no memory reallocation.

Definition at line 952 of file stl_deque.h.

4.441.2.10 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> std::deque< _Tp, _Alloc >::deque (_InputIterator __first, _InputIterator __last, const allocator_type & __a = allocator_type()) [inline]

Builds a deque from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__a	An allocator object.

Create a deque consisting of copies of the elements from [__first, __last).

If the iterators are forward, bidirectional, or random-access, then this will call the elements' copy constructor N times (where N is distance(__first,__last)) and do no memory reallocation. But if only input iterators are used, then this will do at most 2N calls to the copy constructor, and logN memory reallocations.

Definition at line 979 of file stl_deque.h.

4.441.2.11 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::deque< _Tp, _Alloc >::~deque ( ) [inline]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1003 of file stl_deque.h.

4.441.3 Member Function Documentation

4.441.3.1 template<typename _Tp , typename _Alloc > void deque::_M_fill_initialize (const value_type & *__value*) [protected]

Fills the deque with copies of value.

Parameters

__value	Initial value.

Returns

Nothing.

Precondition

_M_start and _M_finish have already been initialized, but none of the deque's elements have yet been constructed.

This function is called only when the user provides an explicit size (with or without an explicit exemplar value).

Definition at line 394 of file deque.tcc.

References std::_Destroy().

Referenced by std::deque< _StateSeqT >::deque().

4.441.3.2 template<typename _Tp , typename _Alloc > void std::_Deque_base< _Tp, _Alloc >::_M_initialize_map (size_t *__num_elements*) [protected], [inherited]

Layout storage.

Parameters

__num_elements	The count of T's for which to allocate space at first.

Returns

Nothing.

The initial underlying memory layout is a bit complicated...

Definition at line 615 of file stl_deque.h.

References std::max().

4.441.3.3 template<typename _Tp , typename _Alloc > void deque::_M_new_elements_at_back (size_type *__new_elements*) [protected]

Memory-handling helpers for the previous internal insert functions.

Definition at line 904 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::_M_reserve_elements_at_back().

4.441.3.4 template<typename _Tp , typename _Alloc > void deque::_M_new_elements_at_front (size_type *__new_elements*) [protected]

Memory-handling helpers for the previous internal insert functions.

Definition at line 879 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::_M_reserve_elements_at_front().

4.441.3.5 template<typename _Tp , typename _Alloc > void deque::_M_pop_back_aux ( ) [protected]

Helper functions for push_* and pop_*.

Definition at line 558 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::pop_back().

4.441.3.6 template<typename _Tp , typename _Alloc > void deque::_M_pop_front_aux ( ) [protected]

Helper functions for push_* and pop_*.

Definition at line 574 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::pop_front().

4.441.3.7 template<typename _Tp , typename _Alloc > template<typename... _Args> void deque::_M_push_back_aux (_Args &&... *__args*) [protected]

Helper functions for push_* and pop_*.

Definition at line 482 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::push_back().

4.441.3.8 template<typename _Tp , typename _Alloc > template<typename... _Args> void deque::_M_push_front_aux (_Args &&... *__args*) [protected]

Helper functions for push_* and pop_*.

Definition at line 521 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::push_front().

4.441.3.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::_M_range_check (size_type __n) const [inline], [protected]

Safety check used only from at().

Definition at line 1351 of file stl_deque.h.

Referenced by std::deque< _StateSeqT >::at().

4.441.3.10 template<typename _Tp , typename _Alloc > template<typename _InputIterator > void deque::_M_range_initialize (_InputIterator __first, _InputIterator __last, std::input_iterator_tag) [protected]

Fills the deque with whatever is in [first,last).

Parameters

__first	An input iterator.
__last	An input iterator.

Returns

Nothing.

If the iterators are actually forward iterators (or better), then the memory layout can be done all at once. Else we move forward using push_back on each value from the iterator.

Definition at line 420 of file deque.tcc.

Referenced by std::deque< _StateSeqT >::deque().

4.441.3.11 template<typename _Tp , typename _Alloc > template<typename _ForwardIterator > void deque::_M_range_initialize (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag) [protected]

Fills the deque with whatever is in [first,last).

Parameters

__first	An input iterator.
__last	An input iterator.

Returns

Nothing.

If the iterators are actually forward iterators (or better), then the memory layout can be done all at once. Else we move forward using push_back on each value from the iterator.

Definition at line 444 of file deque.tcc.

References std::_Destroy(), std::advance(), and std::distance().

4.441.3.12 template<typename _Tp , typename _Alloc > void deque::_M_reallocate_map (size_type __nodes_to_add, bool __add_at_front) [protected]

Memory-handling helpers for the major map.

Makes sure the _M_map has space for new nodes. Does not actually add the nodes. Can invalidate _M_map pointers. (And consequently, deque iterators.)

Definition at line 929 of file deque.tcc.

References std::copy_backward(), and std::max().

Referenced by std::deque< _StateSeqT >::_M_reserve_map_at_back(), and std::deque< _StateSeqT >::_M_reserve-_map_at_front().

4.441.3.13 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::_M_reserve_elements_at_back (size_type __n) [inline], [protected]

Memory-handling helpers for the previous internal insert functions.

Definition at line 2097 of file stl_deque.h.

4.441.3.14 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::_M_reserve_elements_at_front (size_type __n) [inline], [protected]

Memory-handling helpers for the previous internal insert functions.

Definition at line 2087 of file stl_deque.h.

4.441.3.15 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::_M_reserve_map_at_back (size_type __nodes_to_add = 1) [inline], [protected]

Memory-handling helpers for the major map.

Makes sure the _M_map has space for new nodes. Does not actually add the nodes. Can invalidate _M_map pointers. (And consequently, deque iterators.)

Definition at line 2123 of file stl_deque.h.

4.441.3.16 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::_M_reserve_map_at_front (size_type __nodes_to_add = 1) [inline], [protected]

Memory-handling helpers for the major map.

Makes sure the _M_map has space for new nodes. Does not actually add the nodes. Can invalidate _M_map pointers. (And consequently, deque iterators.)

Definition at line 2131 of file stl_deque.h.

4.441.3.17 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::assign (size_type __n, const value_type & __val) [inline]

Assigns a given value to a deque.

Parameters

__n	Number of elements to be assigned.
__val	Value to be assigned.

This function fills a deque with *n* copies of the given value. Note that the assignment completely changes the deque and that the resulting deque's size is the same as the number of elements assigned.

Definition at line 1066 of file stl_deque.h.

4.441.3.18 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void std::deque< _Tp, _Alloc >::assign (_InputIterator __first, _InputIterator __last) [inline]

Assigns a range to a deque.

Parameters

__first	An input iterator.
__last	An input iterator.

This function fills a deque with copies of the elements in the range [__first,__last).

Note that the assignment completely changes the deque and that the resulting deque's size is the same as the number of elements assigned.

Definition at line 1085 of file stl_deque.h.

4.441.3.19 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::assign (initializer_list< value_type > __l) [inline]

Assigns an initializer list to a deque.

Parameters

__l	An initializer_list.

This function fills a deque with copies of the elements in the initializer_list *__l*.

Note that the assignment completely changes the deque and that the resulting deque's size is the same as the number of elements assigned.

Definition at line 1110 of file stl_deque.h.

4.441.3.20 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::deque< _Tp, _Alloc >::at (size_type __n) [inline]

Provides access to the data contained in the deque.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read/write reference to data.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the deque. The function throws out_of_range if the check fails.

Definition at line 1373 of file stl_deque.h.

4.441.3.21 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::deque< _Tp, _Alloc >::at (size_type __n) const [inline]

Provides access to the data contained in the deque.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read-only (constant) reference to data.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the deque. The function throws out_of_range if the check fails.

Definition at line 1391 of file stl_deque.h.

4.441.3.22 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::deque< _Tp, _Alloc >::back ( ) [inline], [noexcept]

Returns a read/write reference to the data at the last element of the deque.

Definition at line 1424 of file stl_deque.h.

4.441.3.23 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::deque< _Tp, _Alloc >::back ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the last element of the deque.

Definition at line 1437 of file stl_deque.h.

4.441.3.24 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the deque. Iteration is done in ordinary element order.

Definition at line 1125 of file stl_deque.h.

Referenced by std::deque< _StateSeqT >::clear(), std::deque< _StateSeqT >::deque(), std::deque< _StateSeqT >::front(), std::deque< _StateSeqT >::insert(), std::deque< _Tp, _Alloc >::operator=(), std::operator==(), and std::deque< _StateSeqT >::~deque().

4.441.3.25 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::deque< _Tp, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the deque. Iteration is done in ordinary element order.

Definition at line 1133 of file stl_deque.h.

4.441.3.26 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::deque< _Tp, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the deque. Iteration is done in ordinary element order.

Definition at line 1196 of file stl_deque.h.

Referenced by std::deque< _StateSeqT >::insert().

4.441.3.27 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::deque< _Tp, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the deque. Iteration is done in ordinary element order.

Definition at line 1205 of file stl_deque.h.

4.441.3.28 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::clear ( ) [inline], [noexcept]

Erases all the elements. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1790 of file stl_deque.h.

4.441.3.29 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::deque< _Tp, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the deque. Iteration is done in reverse element order.

Definition at line 1214 of file stl_deque.h.

4.441.3.30 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::deque< _Tp, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the deque. Iteration is done in reverse element order.

Definition at line 1223 of file stl_deque.h.

4.441.3.31 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename... _Args> iterator std::deque< _Tp, _Alloc >::emplace (const_iterator *__position,* _Args &&... *__args*)

Inserts an object in deque before specified iterator.

Parameters

__position	A const_iterator into the deque.
__args	Arguments.

Returns

An iterator that points to the inserted data.

This function will insert an object of type T constructed with T(std::forward<Args>(args)...) before the specified location.

Referenced by std::deque< _StateSeqT >::insert().

4.441.3.32 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> bool std::deque< _Tp, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the deque is empty. (Thus begin() would equal end().)

Definition at line 1308 of file stl_deque.h.

4.441.3.33 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the deque. Iteration is done in ordinary element order.

Definition at line 1142 of file stl_deque.h.

Referenced by std::deque< _StateSeqT >::back(), std::deque< _StateSeqT >::deque(), std::deque< _Tp, _Alloc >::operator=(), std::operator==(), and std::deque< _StateSeqT >::~deque().

4.441.3.34 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::deque< _Tp, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the deque. Iteration is done in ordinary element order.

Definition at line 1151 of file stl_deque.h.

4.441.3.35 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::erase (const_iterator *__position*) [inline]

Remove element at given position.

Parameters

__position	Iterator pointing to element to be erased.

Returns

An iterator pointing to the next element (or end()).

This function will erase the element at the given position and thus shorten the deque by one.

The user is cautioned that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1730 of file stl_deque.h.

4.441.3.36 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Remove a range of elements.

Parameters

__first	Iterator pointing to the first element to be erased.
__last	Iterator pointing to one past the last element to be erased.

Returns

An iterator pointing to the element pointed to by *last* prior to erasing (or end()).

This function will erase the elements in the range [__first,__last) and shorten the deque accordingly.

The user is cautioned that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1754 of file stl_deque.h.

4.441.3.37 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::deque< _Tp, _Alloc >::front ( ) [inline], [noexcept]

Returns a read/write reference to the data at the first element of the deque.

Definition at line 1402 of file stl_deque.h.

4.441.3.38 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::deque< _Tp, _Alloc >::front ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the first element of the deque.

Definition at line 1413 of file stl_deque.h.

4.441.3.39 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> allocator_type std::deque< _Tp, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Get a copy of the memory allocation object.

Definition at line 1116 of file stl_deque.h.

Referenced by std::deque< _Tp, _Alloc >::operator=().

4.441.3.40 template<typename _Tp , typename _Alloc > deque< _Tp, _Alloc >::iterator deque::insert (const_iterator __position, const value_type & __x)

Inserts given value into deque before specified iterator.

Parameters

__position	A const_iterator into the deque.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given value before the specified location.

Definition at line 212 of file deque.tcc.

4.441.3.41 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::insert (const_iterator __position, value_type && __x) [inline]

Inserts given rvalue into deque before specified iterator.

Parameters

__position	A const_iterator into the deque.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given rvalue before the specified location.

Definition at line 1616 of file stl_deque.h.

4.441.3.42 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::insert (const_iterator __p, initializer_list< value_type > __l) [inline]

Inserts an initializer list into the deque.

Parameters

__p	An iterator into the deque.
__l	An initializer_list.

Returns

An iterator that points to the inserted data.

This function will insert copies of the data in the initializer_list *__l* into the deque before the location specified by *__p*. This is known as *list insert*.

Definition at line 1630 of file stl_deque.h.

4.441.3.43 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::deque< _Tp, _Alloc >::insert (const_iterator *__position,* size_type *__n,* const value_type & *__x*) [inline]

Inserts a number of copies of given data into the deque.

Parameters

__position	A const_iterator into the deque.
__n	Number of elements to be inserted.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a specified number of copies of the given data before the location specified by *__position*.

Definition at line 1649 of file stl_deque.h.

4.441.3.44 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> iterator std::deque< _Tp, _Alloc >::insert (const_iterator *__position,* _InputIterator *__first,* _InputIterator *__last*) [inline]

Inserts a range into the deque.

Parameters

__position	A const_iterator into the deque.
__first	An input iterator.
__last	An input iterator.

Returns

An iterator that points to the inserted data.

This function will insert copies of the data in the range [__first,__last) into the deque before the location specified by *__position*. This is known as *range insert*.

Definition at line 1685 of file stl_deque.h.

4.441.3.45 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::deque< _Tp, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the size() of the largest possible deque.

Definition at line 1235 of file stl_deque.h.

4.441.3.46 template<typename _Tp , typename _Alloc > deque< _Tp, _Alloc > & deque::operator= (const deque< _Tp, _Alloc > & *__x*)

Deque assignment operator.

Parameters

__x	A deque of identical element and allocator types.

All the elements of *x* are copied.

The newly-created deque uses a copy of the allocator object used by *__x* (unless the allocator traits dictate a different object).

Definition at line 96 of file deque.tcc.

References std::deque< _Tp, _Alloc >::begin(), std::deque< _Tp, _Alloc >::end(), std::deque< _Tp, _Alloc >::get_allocator(), and std::deque< _Tp, _Alloc >::size().

4.441.3.47 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> deque& std::deque< _Tp, _Alloc >::operator= (deque< _Tp, _Alloc > && *__x*) [inline], [noexcept]

Deque move assignment operator.

Parameters

__x	A deque of identical element and allocator types.

The contents of *__x* are moved into this deque (without copying, if the allocators permit it). *__x* is a valid, but unspecified deque.

Definition at line 1028 of file stl_deque.h.

4.441.3.48 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> deque& std::deque< _Tp, _Alloc >::operator= (initializer_list< value_type > *__l*) [inline]

Assigns an initializer list to a deque.

Parameters

__l	An initializer_list.

This function fills a deque with copies of the elements in the initializer_list *__l*.

Note that the assignment completely changes the deque and that the resulting deque's size is the same as the number of elements assigned.

Definition at line 1047 of file stl_deque.h.

4.441.3.49 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::deque< _Tp, _Alloc >::operator[] (size_type *__n*) [inline], [noexcept]

Subscript access to the data contained in the deque.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read/write reference to data.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 1324 of file stl_deque.h.

4.441.3.50 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::deque< _Tp, _Alloc >::operator[] (size_type __n) const [inline], [noexcept]

Subscript access to the data contained in the deque.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read-only (constant) reference to data.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 1342 of file stl_deque.h.

4.441.3.51 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::pop_back ( ) [inline], [noexcept]

Removes last element.

This is a typical stack operation. It shrinks the deque by one.

Note that no data is returned, and if the last element's data is needed, it should be retrieved before pop_back() is called.

Definition at line 1552 of file stl_deque.h.

4.441.3.52 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::pop_front ( ) [inline], [noexcept]

Removes first element.

This is a typical stack operation. It shrinks the deque by one.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop_front() is called.

Definition at line 1529 of file stl_deque.h.

4.441.3.53 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::push_back (const value_type & *__x*) [inline]

Add data to the end of the deque.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the end of the deque and assigns the given data to it. Due to the nature of a deque this operation can be done in constant time.

Definition at line 1493 of file stl_deque.h.

4.441.3.54 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::push_front (const value_type & *__x*) [inline]

Add data to the front of the deque.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the front of the deque and assigns the given data to it. Due to the nature of a deque this operation can be done in constant time.

Definition at line 1456 of file stl_deque.h.

4.441.3.55 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::deque< _Tp, _Alloc >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last element in the deque. Iteration is done in reverse element order.

Definition at line 1160 of file stl_deque.h.

4.441.3.56 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::deque< _Tp, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the deque. Iteration is done in reverse element order.

Definition at line 1169 of file stl_deque.h.

4.441.3.57 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::deque< _Tp, _Alloc >::rend ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to one before the first element in the deque. Iteration is done in reverse element order.

Definition at line 1178 of file stl_deque.h.

4.441.3.58 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::deque< _Tp, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the deque. Iteration is done in reverse element order.

Definition at line 1187 of file stl_deque.h.

4.441.3.59 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::resize (size_type *__new_size*) [inline]

Resizes the deque to the specified number of elements.

Parameters

__new_size	Number of elements the deque should contain.

This function will resize the deque to the specified number of elements. If the number is smaller than the deque's current size the deque is truncated, otherwise default constructed elements are appended.

Definition at line 1249 of file stl_deque.h.

4.441.3.60 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::resize (size_type *__new_size,* const value_type & *__x*) [inline]

Resizes the deque to the specified number of elements.

Parameters

__new_size	Number of elements the deque should contain.
__x	Data with which new elements should be populated.

This function will resize the deque to the specified number of elements. If the number is smaller than the deque's current size the deque is truncated, otherwise the deque is extended and new elements are populated with given data.

Definition at line 1271 of file stl_deque.h.

4.441.3.61 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::shrink_to_fit ( ) [inline], [noexcept]

A non-binding request to reduce memory use.

Definition at line 1299 of file stl_deque.h.

4.441.3.62 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::deque< _Tp, _Alloc >::size ( ) const [inline], [noexcept]

Returns the number of elements in the deque.

Definition at line 1230 of file stl_deque.h.

Referenced by std::deque< _StateSeqT >::_M_range_check(), std::deque< _Tp, _Alloc >::operator=(), std::operator==(), and std::deque< _StateSeqT >::resize().

4.441.3.63 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::deque< _Tp, _Alloc >::swap (deque< _Tp, _Alloc > & __x) [inline], [noexcept]

Swaps data with another deque.

Parameters

__x	A deque of the same element and allocator types.

This exchanges the elements between two deques in constant time. (Four pointers, so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(d1,d2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 1772 of file stl_deque.h.

The documentation for this class was generated from the following files:

- stl_deque.h
- deque.tcc

4.442 std::__debug::deque< _Tp, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::deque< _Tp, _Allocator >:

Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, deque > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**

- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, deque > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **deque** (const deque &)=default
- **deque** (deque &&)=default
- **deque** (const deque &__d, const _Allocator &__a)
- **deque** (deque &&__d, const _Allocator &__a)
- **deque** (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- **deque** (const _Allocator &__a)
- **deque** (size_type __n, const _Allocator &__a=_Allocator())
- **deque** (size_type __n, const _Tp &__value, const _Allocator &__a=_Allocator())
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> **deque** (_InputIterator __first, _InputIterator __last, const _Allocator &__a=_Allocator())
- **deque** (const _Base &__x)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void **assign** (_InputIterator __first, _InputIterator __last)
- void **assign** (size_type __n, const _Tp &__t)
- void **assign** (initializer_list< value_type > __l)
- reference **back** () noexcept
- const_reference **back** () const noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args> iterator **emplace** (const_iterator __position, _Args &&...__args)
- template<typename... _Args> void **emplace_back** (_Args &&...__args)
- template<typename... _Args> void **emplace_front** (_Args &&...__args)
- iterator **end** () noexcept

- const_iterator **end** () const noexcept
- iterator **erase** (const_iterator __position)
- iterator **erase** (const_iterator __first, const_iterator __last)
- reference **front** () noexcept
- const_reference **front** () const noexcept
- iterator **insert** (const_iterator __position, const _Tp &__x)
- iterator **insert** (const_iterator __position, _Tp &&__x)
- iterator **insert** (const_iterator __position, initializer_list< value_type > __l)
- iterator **insert** (const_iterator __position, size_type __n, const _Tp &__x)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator **insert** (const_iterator __position, _InputIterator __first, _InputIterator __last)
- deque & **operator=** (const deque &)=default
- deque & **operator=** (deque &&)=default
- deque & **operator=** (initializer_list< value_type > __l)
- reference **operator[]** (size_type __n) noexcept
- const_reference **operator[]** (size_type __n) const noexcept
- void **pop_back** () noexcept
- void **pop_front** () noexcept
- void **push_back** (const _Tp &__x)
- void **push_back** (_Tp &&__x)
- void **push_front** (const _Tp &__x)
- void **push_front** (_Tp &&__x)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **resize** (size_type __sz)
- void **resize** (size_type __sz, const _Tp &__c)
- void **shrink_to_fit** () noexcept
- void **swap** (deque &__x) noexcept(/*conditional */)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.442.1 Detailed Description

template<typename _Tp, typename _Allocator>class std::__debug::deque< _Tp, _Allocator >

Class std::deque with safety/checking/debug instrumentation.

Definition at line 36 of file debug/deque.

4.442.2 Member Function Documentation

4.442.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.442.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.442.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.442.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.442.2.5 void __gnu_debug::_Safe_sequence< deque< _Tp, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.442.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.442.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.442.2.8 void __gnu_debug::_Safe_sequence< deque< _Tp, _Allocator > >::_M_transfer_from_if (_Safe_sequence< deque< _Tp, _Allocator > > & *__from*, _Predicate *__pred*) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.442.3 Member Data Documentation

4.442.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.442.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.442.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/deque

4.443 std::tr2::direct_bases< _Tp > Struct Template Reference

Public Types

- typedef __reflection_typelist < __direct_bases(_Tp)...> **type**

4.443.1 Detailed Description

template<typename _Tp>struct std::tr2::direct_bases< _Tp >

Enumerate all the direct base classes of a class. Form of a typelist.

Definition at line 95 of file tr2/type_traits.

The documentation for this struct was generated from the following file:

- tr2/type_traits

4.444 __gnu_pbds::direct_mask_range_hashing< Size_Type > Class Template Reference

Inheritance diagram for __gnu_pbds::direct_mask_range_hashing< Size_Type >:

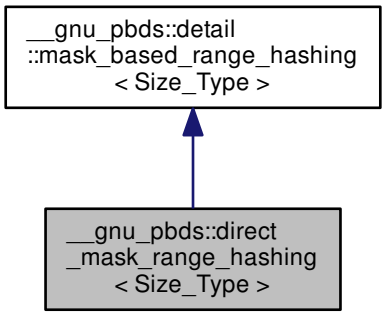

Public Types

- typedef Size_Type **size_type**

Public Member Functions

- void **swap** (direct_mask_range_hashing< Size_Type > &other)

Protected Member Functions

- void **notify_resized** (size_type size)
- size_type operator() (size_type hash) const
- size_type **range_hash** (size_type hash) const
- void **swap** (mask_based_range_hashing &other)

4.444.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::direct_mask_range_hashing< Size_Type >

A mask range-hashing class (uses a bitmask).

Definition at line 109 of file hash_policy.hpp.

4.444.2 Member Function Documentation

4.444.2.1 template<typename Size_Type > direct_mask_range_hashing< Size_Type >::size_type __gnu_pbds::direct_mask_range_hashing< Size_Type >::operator() (size_type *hash*) const [inline], [protected]

Transforms the __hash value hash into a ranged-hash value (using a bit-mask).

Definition at line 59 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.445 __gnu_pbds::direct_mod_range_hashing< Size_Type > Class Template Reference

Inheritance diagram for __gnu_pbds::direct_mod_range_hashing< Size_Type >:

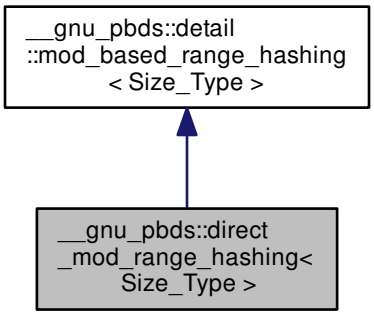

Public Types

- typedef Size_Type **size_type**

Public Member Functions

- void **swap** (direct_mod_range_hashing< Size_Type > &other)

Protected Member Functions

- void **notify_resized** (size_type size)
- size_type operator() (size_type hash) const
- size_type **range_hash** (size_type s) const
- void **swap** (mod_based_range_hashing &other)

4.445.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::direct_mod_range_hashing< Size_Type >

A mod range-hashing class (uses the modulo function).

Definition at line 141 of file hash_policy.hpp.

4.445.2 Member Function Documentation

4.445.2.1 template<typename Size_Type > direct_mod_range_hashing< Size_Type >::size_type __gnu_pbds::direct_mod_range_hashing< Size_Type >::operator() (size_type *hash*) const [inline], [protected]

Transforms the __hash value hash into a ranged-hash value (using a modulo operation).

Definition at line 59 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.446 std::discard_block_engine< _RandomNumberEngine, __p, __r > Class Template Reference

Public Types

- template<typename _Sseq >
  using **_If_seed_seq** = typename enable_if< __detail::__is_seed_seq< _Sseq, discard_block_engine, result_type >::value >::type
- typedef
  _RandomNumberEngine::result_type result_type

Public Member Functions

- discard_block_engine ()
- discard_block_engine (const _RandomNumberEngine &__rng)
- discard_block_engine (_RandomNumberEngine &&__rng)
- discard_block_engine (result_type __s)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  discard_block_engine (_Sseq &__q)
- const _RandomNumberEngine & base () const noexcept
- void discard (unsigned long long __z)
- result_type operator() ()
- void seed ()
- void seed (result_type __s)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > seed (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Static Public Attributes

- static constexpr size_t **block_size**
- static constexpr size_t **used_block**

Friends

- template<typename _RandomNumberEngine1 , size_t __p1, size_t __r1, typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::discard_block_engine< _RandomNumberEngine1, __p1, __r1 > &__x)
- bool operator== (const discard_block_engine &__lhs, const discard_block_engine &__rhs)
- template<typename _RandomNumberEngine1 , size_t __p1, size_t __r1, typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::discard_block_engine< _RandomNumberEngine1, __p1, __r1 > &__x)

4.446.1 Detailed Description

template<typename _RandomNumberEngine, size_t __p, size_t __r>class std::discard_block_engine< _RandomNumberEngine, __p, __r >

Produces random numbers from some base engine by discarding blocks of data.

0 <= __r <= __p

Definition at line 875 of file random.h.

4.446.2 Member Typedef Documentation

4.446.2.1 template<typename _RandomNumberEngine, size_t __p, size_t __r> typedef _RandomNumberEngine::result_type std::discard_block_engine< _RandomNumberEngine, __p, __r >::result_type

The type of the generated random value.

Definition at line 878 of file random.h.

4.446.3 Constructor & Destructor Documentation

4.446.3.1 template<typename _RandomNumberEngine, size_t __p, size_t __r> std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard_block_engine ( ) [inline]

Constructs a default discard_block_engine engine.

The underlying engine is default constructed as well.

Definition at line 897 of file random.h.

4.446.3.2 template<typename _RandomNumberEngine, size_t __p, size_t __r> std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard_block_engine (const _RandomNumberEngine & *__rng*) [inline], [explicit]

Copy constructs a discard_block_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 907 of file random.h.

4.446.3.3 template<typename _RandomNumberEngine, size_t __p, size_t __r> std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard_block_engine (_RandomNumberEngine && *__rng*) [inline], [explicit]

Move constructs a discard_block_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 917 of file random.h.

4.446.3.4 template<typename _RandomNumberEngine, size_t __p, size_t __r> std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard_block_engine (result_type *__s*) [inline], [explicit]

Seed constructs a discard_block_engine engine.

Constructs the underlying generator engine seeded with __s.

Parameters

__s	A seed value for the base class engine.

Definition at line 927 of file random.h.

4.446.3.5 template<typename _RandomNumberEngine, size_t __p, size_t __r> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard_block_engine (_Sseq & *__q*) [inline], [explicit]

Generator construct a discard_block_engine engine.

Parameters

__q	A seed sequence.

Definition at line 937 of file random.h.

4.446.4 Member Function Documentation

4.446.4.1 template<typename _RandomNumberEngine, size_t __p, size_t __r> const _RandomNumberEngine& std::discard_block_engine< _RandomNumberEngine, __p, __r >::base ( ) const [inline], [noexcept]

Gets a const reference to the underlying generator engine object.

Definition at line 981 of file random.h.

4.446.4.2 template<typename _RandomNumberEngine, size_t __p, size_t __r> void std::discard_block_engine< _RandomNumberEngine, __p, __r >::discard (unsigned long long *__z*) [inline]

Discard a sequence of random numbers.

Definition at line 1002 of file random.h.

4.446.4.3 template<typename _RandomNumberEngine, size_t __p, size_t __r> static constexpr result_type std::discard_block_engine< _RandomNumberEngine, __p, __r >::max ( ) [inline], [static]

Gets the maximum value in the generated random number range.

Definition at line 995 of file random.h.

References std::max().

4.446.4.4 template<typename _RandomNumberEngine, size_t __p, size_t __r> static constexpr result_type std::discard_block_engine< _RandomNumberEngine, __p, __r >::min ( ) [inline], [static]

Gets the minimum value in the generated random number range.

Definition at line 988 of file random.h.

References std::min().

4.446.4.5 template<typename _RandomNumberEngine , size_t __p, size_t __r> discard_block_engine< _RandomNumberEngine, __p, __r >::result_type std::discard_block_engine< _RandomNumberEngine, __p, __r >::operator() ( )

Gets the next value in the generated random number sequence.

Definition at line 682 of file bits/random.tcc.

4.446.4.6 template<typename _RandomNumberEngine, size_t __p, size_t __r> void std::discard_block_engine< _RandomNumberEngine, __p, __r >::seed ( ) [inline]

Reseeds the discard_block_engine object with the default seed for the underlying base class generator engine.

Definition at line 946 of file random.h.

4.446.4.7 template<typename _RandomNumberEngine, size_t __p, size_t __r> void std::discard_block_engine< _RandomNumberEngine, __p, __r >::seed (result_type __s) [inline]

Reseeds the discard_block_engine object with the default seed for the underlying base class generator engine.

Definition at line 957 of file random.h.

4.446.4.8 template<typename _RandomNumberEngine, size_t __p, size_t __r> template<typename _Sseq > _If_seed_seq<_Sseq> std::discard_block_engine< _RandomNumberEngine, __p, __r >::seed (_Sseq & __q) [inline]

Reseeds the discard_block_engine object with the given seed sequence.

Parameters

__q	A seed generator function.

Definition at line 970 of file random.h.

4.446.5 Friends And Related Function Documentation

4.446.5.1 template<typename _RandomNumberEngine, size_t __p, size_t __r> template<typename _RandomNumberEngine1 , size_t __p1, size_t __r1, typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::discard_block_engine< _RandomNumberEngine1, __p1, __r1 > & __x) [friend]

Inserts the current state of a discard_block_engine random number generator engine __x into the output stream __os.

Parameters

__os	An output stream.
__x	A discard_block_engine random number generator engine.

Returns

The output stream with the state of __x inserted or in an error state.

4.446.5.2 template<typename _RandomNumberEngine, size_t __p, size_t __r> bool operator== (const discard_block_engine< _RandomNumberEngine, __p, __r > & *__lhs*, const discard_block_engine< _RandomNumberEngine, __p, __r > & *__rhs*) [friend]

Compares two discard_block_engine random number generator objects of the same type for equality.

Parameters

__lhs	A discard_block_engine random number generator object.
__rhs	Another discard_block_engine random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 1026 of file random.h.

4.446.5.3 template<typename _RandomNumberEngine, size_t __p, size_t __r> template<typename _RandomNumberEngine1 , size_t __p1, size_t __r1, typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::discard_block_engine< _RandomNumberEngine1, __p1, __r1 > & *__x*) [friend]

Extracts the current state of a % subtract_with_carry_engine random number generator engine __x from the input stream __is.

Parameters

__is	An input stream.
__x	A discard_block_engine random number generator engine.

Returns

The input stream with the state of __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.447 std::discrete_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- template<typename _InputIterator >
  discrete_distribution (_InputIterator __wbegin, _InputIterator __wend)
- **discrete_distribution** (initializer_list< double > __wl)
- template<typename _Func >
  discrete_distribution (size_t __nw, double __xmin, double __xmax, _Func __fw)
- **discrete_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  discrete_distribution
  < _IntType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- std::vector< double > probabilities () const
- void reset ()

Friends

- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::discrete_distribution< _IntType1 > &__x)
- bool operator== (const discrete_distribution &__d1, const discrete_distribution &__d2)
- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::discrete_distribution< _IntType1 > &__x)

4.447.1 Detailed Description

template<typename _IntType = int>class std::discrete_distribution< _IntType >

A discrete_distribution random number distribution.

The formula for the discrete probability mass function is

Definition at line 5268 of file random.h.

4.447.2 Member Typedef Documentation

4.447.2.1 template<typename _IntType = int> typedef _IntType std::discrete_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 5271 of file random.h.

4.447.3 Member Function Documentation

4.447.3.1 template<typename _IntType = int> result_type std::discrete_distribution< _IntType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 5393 of file random.h.

References std::vector< _Tp, _Alloc >::empty(), and std::vector< _Tp, _Alloc >::size().

4.447.3.2 template<typename _IntType = int> result_type std::discrete_distribution< _IntType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 5386 of file random.h.

4.447.3.3 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::discrete_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 5404 of file random.h.

4.447.3.4 template<typename _IntType = int> param_type std::discrete_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 5371 of file random.h.

4.447.3.5 template<typename _IntType = int> void std::discrete_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 5379 of file random.h.

4.447.3.6 template<typename _IntType = int> std::vector<double> std::discrete_distribution< _IntType >::probabilities ( ) const [inline]

Returns the probabilities of the distribution.

Definition at line 5361 of file random.h.

References std::vector< _Tp, _Alloc >::empty().

4.447.3.7 template<typename _IntType = int> void std::discrete_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 5354 of file random.h.

4.447.4 Friends And Related Function Documentation

4.447.4.1 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::discrete_distribution< _IntType1 > & *__x*) [friend]

Inserts a discrete_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A discrete_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.447.4.2 template<typename _IntType = int> bool operator== (const discrete_distribution< _IntType > & *__d1,* const discrete_distribution< _IntType > & *__d2*) [friend]

Return true if two discrete distributions have the same parameters.

Definition at line 5439 of file random.h.

4.447.4.3 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::discrete_distribution< _IntType1 > & *__x*) [friend]

Extracts a discrete_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.

__x	A discrete_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.448 std::divides< _Tp > Struct Template Reference

Inheritance diagram for std::divides< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef _Tp result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x, const _Tp &__y) const

4.448.1 Detailed Description

template<typename _Tp = void>struct std::divides< _Tp >

One of the math functors.

Definition at line 156 of file stl_function.h.

4.448.2 Member Typedef Documentation

4.448.2.1 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.448.2.2 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.448.2.3 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.449 std::divides< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)/std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)/std::forward< _Up >(__u))

4.449.1 Detailed Description

template<>struct std::divides< void >

One of the math functors.

Definition at line 275 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.450 std::domain_error Class Reference

Inheritance diagram for std::domain_error:

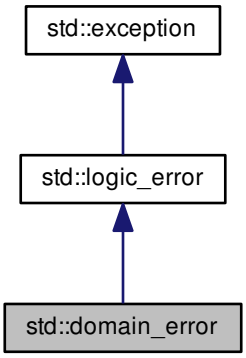

Public Member Functions

- **domain_error** (const string &__arg) _GLIBCXX_TXN_SAFE
- **domain_error** (const char *) _GLIBCXX_TXN_SAFE
- **domain_error** (const domain_error &)=default
- **domain_error** (domain_error &&)=default
- domain_error & **operator=** (const domain_error &)=default
- domain_error & **operator=** (domain_error &&)=default
- virtual const char * what () const noexcept

4.450.1 Detailed Description

Thrown by the library, or by you, to report domain errors (domain in the mathematical sense).

Definition at line 153 of file stdexcept.

4.450.2 Member Function Documentation

4.450.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- stdexcept

4.451 __gnu_pbds::detail::dumnode_const_iterator< Key, Data, _Alloc > Struct Template Reference

Public Types

- typedef const_iterator **const_reference**
- typedef const_reference **reference**
- typedef const_iterator **value_type**

4.451.1 Detailed Description

template<typename Key, typename Data, typename _Alloc>struct __gnu_pbds::detail::dumnode_const_iterator< Key, Data, _Alloc >

Constant node iterator.

Definition at line 52 of file null_node_metadata.hpp.

The documentation for this struct was generated from the following file:

- null_node_metadata.hpp

4.452 std::chrono::duration< _Rep, _Period > Struct Template Reference

Public Types

- typedef _Period **period**
- typedef _Rep **rep**

Public Member Functions

- **duration** (const duration &)=default
- template<typename _Rep2 , typename = _Require< is_convertible<const _Rep2&, rep>, __or_<__is_float<rep>, __not_<__is_float<_Rep2>>>>>
  constexpr **duration** (const _Rep2 &__rep)
- template<typename _Rep2 , typename _Period2 , typename = _Require< __or_<__is_float<rep>, __and_<__is_harmonic<_Period2>, __not_<__is_float<_Rep2>>>>>>
  constexpr **duration** (const duration< _Rep2, _Period2 > &__d)
- constexpr rep **count** () const
- template<typename _Rep2 = rep>
  constexpr enable_if
  <!treat_as_floating_point
  < _Rep2 >::value, duration & >
  ::type **operator%=** (const rep &__rhs)
- template<typename _Rep2 = rep>
  constexpr enable_if
  <!treat_as_floating_point
  < _Rep2 >::value, duration & >
  ::type **operator%=** (const duration &__d)
- constexpr duration & **operator*=** (const rep &__rhs)
- constexpr duration **operator+** () const
- constexpr duration & **operator++** ()
- constexpr duration **operator++** (int)

- constexpr duration & **operator+=** (const duration &__d)
- constexpr duration **operator-** () const
- constexpr duration & **operator--** ()
- constexpr duration **operator--** (int)
- constexpr duration & **operator-=** (const duration &__d)
- constexpr duration & **operator/=** (const rep &__rhs)
- duration & **operator=** (const duration &)=default

Static Public Member Functions

- static constexpr duration **max** () noexcept
- static constexpr duration **min** () noexcept
- static constexpr duration **zero** () noexcept

Related Functions

(Note that these are not member functions.)

- template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 >
  constexpr common_type
  < duration< _Rep1, _Period1 >
  , duration< _Rep2, _Period2 >
  >::type operator+ (const duration< _Rep1, _Period1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)
- template<typename _Rep1 , typename _Period1 , typename _Rep2 , typename _Period2 >
  constexpr common_type
  < duration< _Rep1, _Period1 >
  , duration< _Rep2, _Period2 >
  >::type operator- (const duration< _Rep1, _Period1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)

- template<typename _Rep1 , typename _Period , typename _Rep2 >
  constexpr duration
  < __common_rep_t< _Rep1, _Rep2 >
  , _Period > operator* (const duration< _Rep1, _Period > &__d, const _Rep2 &__s)
- template<typename _Rep1 , typename _Rep2 , typename _Period >
  constexpr duration
  < __common_rep_t< _Rep2, _Rep1 >
  , _Period > operator* (const _Rep1 &__s, const duration< _Rep2, _Period > &__d)

4.452.1 Detailed Description

template<typename _Rep, typename _Period = ratio<1>>struct std::chrono::duration< _Rep, _Period >

duration

Definition at line 71 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.453 std::chrono::duration_values< _Rep > Struct Template Reference

Static Public Member Functions

- static constexpr _Rep **max** () noexcept
- static constexpr _Rep **min** () noexcept
- static constexpr _Rep **zero** () noexcept

4.453.1 Detailed Description

template<typename _Rep>struct std::chrono::duration_values< _Rep >

duration_values

Definition at line 360 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.454 std::tr2::dynamic_bitset< _WordT, _Alloc > Class Template Reference

Inheritance diagram for std::tr2::dynamic_bitset< _WordT, _Alloc >:



Classes

- class reference

Public Types

- typedef __dynamic_bitset_base < _WordT, _Alloc > **_Base**
- typedef _Alloc **allocator_type**
- typedef _WordT **block_type**

- typedef bool **const_reference**
- typedef size_t **size_type**

Public Member Functions

- dynamic_bitset ()=default
- dynamic_bitset (const allocator_type &__alloc)
- dynamic_bitset (size_type __nbits, unsigned long long __val=0ULL, const allocator_type &__alloc=allocator_type())
- **dynamic_bitset** (initializer_list< block_type > __il, const allocator_type &__alloc=allocator_type())
- template<typename _CharT , typename _Traits , typename _Alloc1 >
  dynamic_bitset (const std::basic_string< _CharT, _Traits, _Alloc1 > &__str, typename basic_string< _CharT, _Traits, _Alloc1 >::size_type __pos=0, typename basic_string< _CharT, _Traits, _Alloc1 >::size_type __n=std::basic_string< _CharT, _Traits, _Alloc1 >::npos, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1'), const allocator_type &__alloc=allocator_type())
- dynamic_bitset (const char *__str, const allocator_type &__alloc=allocator_type())
- dynamic_bitset (const dynamic_bitset &)=default
- dynamic_bitset (dynamic_bitset &&__b) noexcept
- template<typename _Traits = std::char_traits<char>, typename _CharT = typename _Traits::char_type>
  void **_M_copy_from_ptr** (const _CharT *, size_t, size_t, size_t, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1'))
- template<typename _CharT , typename _Traits , typename _Alloc1 >
  void **_M_copy_from_string** (const basic_string< _CharT, _Traits, _Alloc1 > &__str, size_t __pos, size_t __n, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1'))
- template<typename _CharT , typename _Traits , typename _Alloc1 >
  void **_M_copy_to_string** (std::basic_string< _CharT, _Traits, _Alloc1 > &__str, _CharT __zero=_CharT('0'), _CharT __one=_CharT('1')) const
- bool all () const
- bool any () const
- void append (block_type __block)
- void **append** (initializer_list< block_type > __il)
- template<typename _BlockInputIterator >
  void append (_BlockInputIterator __first, _BlockInputIterator __last)
- void clear ()
- size_type count () const noexcept
- bool empty () const noexcept
- size_type find_first () const
- size_type find_next (size_t __prev) const
- dynamic_bitset & flip ()
- dynamic_bitset & flip (size_type __pos)
- allocator_type get_allocator () const noexcept
- bool **is_proper_subset_of** (const dynamic_bitset &__b) const
- bool **is_subset_of** (const dynamic_bitset &__b) const
- constexpr size_type max_size () noexcept
- bool none () const
- size_type num_blocks () const noexcept
- dynamic_bitset & operator= (const dynamic_bitset &)=default
- dynamic_bitset & operator= (dynamic_bitset &&__b) noexcept(std::is_nothrow_move_assignable< _Base >::value)
- dynamic_bitset operator~ () const
- void push_back (bool __bit)

- dynamic_bitset & reset ()
- dynamic_bitset & reset (size_type __pos)
- void resize (size_type __nbits, bool __value=false)
- dynamic_bitset & set ()
- dynamic_bitset & set (size_type __pos, bool __val=true)
- size_type size () const noexcept
- void swap (dynamic_bitset &__b) noexcept
- bool test (size_type __pos) const
- template<typename _CharT = char, typename _Traits = std::char_traits<_CharT>, typename _Alloc1 = std::allocator<_CharT>> std::basic_string< _CharT, _Traits, _Alloc1 > to_string (_CharT __zero=_CharT('0'), _CharT __one=_CharT('1')) const
- unsigned long long to_ullong () const
- unsigned long to_ulong () const

- dynamic_bitset & operator&= (const dynamic_bitset &__rhs)
- dynamic_bitset & operator&= (dynamic_bitset &&__rhs)
- dynamic_bitset & operator|= (const dynamic_bitset &__rhs)
- dynamic_bitset & operator^= (const dynamic_bitset &__rhs)
- dynamic_bitset & operator-= (const dynamic_bitset &__rhs)

- dynamic_bitset & operator<<= (size_type __pos)
- dynamic_bitset & operator>>= (size_type __pos)

- reference operator[] (size_type __pos)
- const_reference operator[] (size_type __pos) const

- dynamic_bitset operator<< (size_type __pos) const
- dynamic_bitset operator>> (size_type __pos) const

Static Public Attributes

- static const size_type **bits_per_block**
- static const size_type **npos**

Private Member Functions

- size_t **_M_are_all_aux** () const noexcept
- void **_M_clear** () noexcept
- void **_M_do_and** (const __dynamic_bitset_base &__x) noexcept
- void **_M_do_append_block** (block_type __block, size_type __pos)
- size_t **_M_do_count** () const noexcept
- void **_M_do_dif** (const __dynamic_bitset_base &__x) noexcept
- size_type **_M_do_find_first** (size_t __not_found) const
- size_type **_M_do_find_next** (size_t __prev, size_t __not_found) const
- void **_M_do_flip** () noexcept
- void **_M_do_left_shift** (size_t __shift)
- void **_M_do_or** (const __dynamic_bitset_base &__x) noexcept
- void **_M_do_reset** () noexcept
- void **_M_do_right_shift** (size_t __shift)
- void **_M_do_set** () noexcept

- unsigned long long **_M_do_to_ullong** () const
- unsigned long **_M_do_to_ulong** () const
- void **_M_do_xor** (const __dynamic_bitset_base &__x) noexcept
- allocator_type **_M_get_allocator** () const noexcept
- block_type & **_M_getword** (size_type __pos) noexcept
- block_type **_M_getword** (size_type __pos) const noexcept
- block_type & **_M_hiword** () noexcept
- block_type **_M_hiword** () const noexcept
- bool **_M_is_any** () const noexcept
- bool **_M_is_equal** (const __dynamic_bitset_base &__x) const noexcept
- bool **_M_is_less** (const __dynamic_bitset_base &__x) const noexcept
- bool **_M_is_proper_subset_of** (const __dynamic_bitset_base &__b) const noexcept
- bool **_M_is_subset_of** (const __dynamic_bitset_base &__b) noexcept
- void **_M_resize** (size_t __nbits, bool __value)
- size_type **_M_size** () const noexcept
- void **_M_swap** (__dynamic_bitset_base &__b) noexcept

Static Private Member Functions

- static block_type **_S_maskbit** (size_type __pos) noexcept
- static size_type **_S_whichbit** (size_type __pos) noexcept
- static size_type **_S_whichbyte** (size_type __pos) noexcept
- static size_type **_S_whichword** (size_type __pos) noexcept

Private Attributes

- std::vector< block_type, allocator_type > _M_w

Static Private Attributes

- static const size_type **_S_bits_per_block**

Friends

- bool **operator<** (const dynamic_bitset &__lhs, const dynamic_bitset &__rhs) noexcept
- bool **operator==** (const dynamic_bitset &__lhs, const dynamic_bitset &__rhs) noexcept
- class **reference**

4.454.1 Detailed Description

template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>>class std::tr2::dynamic_bitset< _WordT, _Alloc >

The dynamic_bitset class represents a sequence of bits.

See N2050, Proposal to Add a Dynamically Sizeable Bitset to the Standard Library. http://www.open-std.org/jtc1/sc22/wg21/docs/papers/2006/n2050.pdf

In the general unoptimized case, storage is allocated in word-sized blocks. Let B be the number of bits in a word, then (Nb+(B-1))/B words will be used for storage. B - NbB bits are unused. (They are the high-order bits in the highest word.) It is a class invariant that those unused bits are always zero.

If you think of dynamic_bitset as "a simple array of bits," be aware that your mental picture is reversed: a dynamic_bitset behaves the same way as bits in integers do, with the bit at index 0 in the "least significant / right-hand" position, and the bit at index Nb-1 in the "most significant / left-hand" position. Thus, unlike other containers, a dynamic_bitset's index "counts from right to left," to put it very loosely.

This behavior is preserved when translating to and from strings. For example, the first line of the following program probably prints "b('a') is 0001100001" on a modern ASCII system.

```
#include <dynamic_bitset>
#include <iostream>
#include <sstream>

using namespace std;

int main()
{
    long         a = 'a';
    dynamic_bitset<> b(a);

    cout << "b('a') is " << b << endl;

    ostringstream s;
    s << b;
    string  str = s.str();
    cout << "index 3 in the string is " << str[3] << " but\n"
         << "index 3 in the bitset is " << b[3] << endl;
}
```

Most of the actual code isn't contained in dynamic_bitset<> itself, but in the base class __dynamic_bitset_base. The base class works with whole words, not with individual bits. This allows us to specialize __dynamic_bitset_base for the important special case where the dynamic_bitset is only a single word.

Extra confusion can result due to the fact that the storage for __dynamic_bitset_base *is* a vector, and is indexed as such. This is carefully encapsulated.

Definition at line 419 of file dynamic_bitset.

4.454.2 Constructor & Destructor Documentation

4.454.2.1 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset ( ) [default]

All bits set to zero.

Referenced by std::tr2::dynamic_bitset< _WordT, _Alloc >::operator<<(), and std::tr2::dynamic_bitset< _WordT, _Alloc >::operator>>().

4.454.2.2 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (const allocator_type & *__alloc*) [inline], [explicit]

All bits set to zero.

Definition at line 578 of file dynamic_bitset.

4.454.2.3 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (size_type *__nbits*, unsigned long long *__val* = 0ULL, const allocator_type & *__alloc* = allocator_type()) [inline], [explicit]

Initial bits bitwise-copied from a single word (others set to zero).

Definition at line 584 of file dynamic_bitset.

4.454.2.4 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> template<typename _CharT , typename _Traits , typename _Alloc1 > std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (const std::basic_string< _CharT, _Traits, _Alloc1 > & *__str,* typename basic_string< _CharT, _Traits, _Alloc1 >::size_type *__pos* = 0, typename basic_string< _CharT, _Traits, _Alloc1 >::size_type *__n* = std::basic_string<_CharT, _Traits, _Alloc1>::npos, _CharT *__zero* = _CharT('0'), _CharT *__one* = _CharT('1'), const allocator_type & *__alloc* = allocator_type()) [inline], [explicit]

Use a subset of a string.

Parameters

__str	A string of '0' and '1' characters.
__pos	Index of the first character in __str to use.
__n	The number of characters to copy.
__zero	The character to use for unset bits.
__one	The character to use for set bits.
__alloc	An allocator.

Exceptions

std::out_of_range	If __pos is bigger the size of __str.
std::invalid_argument	If a character appears in the string which is neither '0' nor '1'.

Definition at line 609 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::resize(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

4.454.2.5 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (const char * *__str,* const allocator_type & *__alloc* = allocator_type()) [inline], [explicit]

Construct from a string.

Parameters

__str	A string of '0' and '1' characters.
__alloc	An allocator.

Exceptions

std::invalid_argument	If a character appears in the string which is neither '0' nor '1'.

Definition at line 636 of file dynamic_bitset.

4.454.2.6 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (const dynamic_bitset< _WordT, _Alloc > &) [default]

Copy constructor.

4.454.2.7 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset (dynamic_bitset< _WordT, _Alloc > && *__b*) [inline], [noexcept]

Move constructor.

Definition at line 648 of file dynamic_bitset.

4.454.3 Member Function Documentation

4.454.3.1 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> bool std::tr2::dynamic_bitset< _WordT, _Alloc >::all ( ) const [inline]

Tests whether all the bits are on.

Returns

True if all the bits are set.

Definition at line 1036 of file dynamic_bitset.

4.454.3.2 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> bool std::tr2::dynamic_bitset< _WordT, _Alloc >::any ( ) const [inline]

Tests whether any of the bits are on.

Returns

True if at least one bit is set.

Definition at line 1044 of file dynamic_bitset.

4.454.3.3 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> void std::tr2::dynamic_bitset< _WordT, _Alloc >::append (block_type *__block*) [inline]

Append a block.

Definition at line 726 of file dynamic_bitset.

Referenced by std::tr2::dynamic_bitset< _WordT, _Alloc >::append().

4.454.3.4 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> template<typename _BlockInputIterator > void std::tr2::dynamic_bitset< _WordT, _Alloc >::append (_BlockInputIterator *__first,* _BlockInputIterator *__last*) [inline]

Append an iterator range of blocks.

Definition at line 744 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::append().

4.454.3.5 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> void std::tr2::dynamic_bitset< _WordT, _Alloc >::clear ( ) [inline]

Clear the bitset.

Definition at line 701 of file dynamic_bitset.

4.454.3.6 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::count ( ) const [inline], [noexcept]

Returns the number of bits which are set.

Definition at line 992 of file dynamic_bitset.

4.454.3.7 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> bool std::tr2::dynamic_bitset< _WordT, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the dynamic_bitset is empty.

Definition at line 1007 of file dynamic_bitset.

4.454.3.8 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::find_first ( ) const [inline]

Finds the index of the first "on" bit.

Returns

The index of the first bit set, or size() if not found.

See Also

find_next

Definition at line 1072 of file dynamic_bitset.

4.454.3.9 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::find_next (size_t *__prev*) const [inline]

Finds the index of the next "on" bit after prev.

Returns

The index of the next bit set, or size() if not found.

Parameters

__prev	Where to start searching.

See Also

find_first

Definition at line 1082 of file dynamic_bitset.

4.454.3.10 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::flip ( ) [inline]

Toggles every bit to its opposite value.

Definition at line 883 of file dynamic_bitset.

Referenced by std::tr2::dynamic_bitset< _WordT, _Alloc >::operator~().

4.454.3.11 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::flip (size_type *__pos*) [inline]

Toggles a given bit to its opposite value.

Parameters

__pos	The index of the bit.

Exceptions

std::out_of_range	If *__pos* is bigger the size of the set.

Definition at line 896 of file dynamic_bitset.

4.454.3.12 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> allocator_type std::tr2::dynamic_bitset< _WordT, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Return the allocator for the bitset.

Definition at line 681 of file dynamic_bitset.

Referenced by std::tr2::dynamic_bitset< _WordT, _Alloc >::operator=().

4.454.3.13 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> constexpr size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::max_size ( ) [inline], [noexcept]

Returns the maximum size of a dynamic_bitset object having the same type as *this. The real answer is max() * bits_per_block but is likely to overflow.

Definition at line 1014 of file dynamic_bitset.

References std::numeric_limits< _Tp >::max().

4.454.3.14 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> bool std::tr2::dynamic_bitset< _WordT, _Alloc >::none ( ) const [inline]

Tests whether any of the bits are on.

Returns

True if none of the bits are set.

Definition at line 1052 of file dynamic_bitset.

4.454.3.15 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::num_blocks ( ) const [inline], [noexcept]

Returns the total number of blocks.

Definition at line 1002 of file dynamic_bitset.

4.454.3.16 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator&= (const dynamic_bitset< _WordT, _Alloc > & *__rhs*) [inline]

Operations on dynamic_bitsets.

Parameters

__rhs	A same-sized dynamic_bitset.

These should be self-explanatory.

Definition at line 759 of file dynamic_bitset.

4.454.3.17 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator&= (dynamic_bitset< _WordT, _Alloc > && *__rhs*) [inline]

Operations on dynamic_bitsets.

Parameters

__rhs	A same-sized dynamic_bitset.

These should be self-explanatory.

Definition at line 766 of file dynamic_bitset.

References std::move().

4.454.3.18 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator-= (const dynamic_bitset< _WordT, _Alloc > & *__rhs*) [inline]

Operations on dynamic_bitsets.

Parameters

__rhs	A same-sized dynamic_bitset.

These should be self-explanatory.

Definition at line 787 of file dynamic_bitset.

4.454.3.19 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset std::tr2::dynamic_bitset< _WordT, _Alloc >::operator<< (size_type *__pos*) const [inline]

Self-explanatory.

Definition at line 1058 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset().

4.454.3.20 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator<<= (size_type *__pos*) [inline]

Operations on dynamic_bitsets.

Parameters

__pos	The number of places to shift.

These should be self-explanatory.

Definition at line 802 of file dynamic_bitset.

4.454.3.21 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator= (const dynamic_bitset< _WordT, _Alloc > &) [default]

Copy assignment operator.

4.454.3.22 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator= (dynamic_bitset< _WordT, _Alloc > && *__b*) [inline], [noexcept]

Move assignment operator.

Definition at line 665 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::get_allocator().

4.454.3.23 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset std::tr2::dynamic_bitset< _WordT, _Alloc >::operator>> (size_type __pos) const [inline]

Self-explanatory.

Definition at line 1062 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset().

4.454.3.24 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator>>= (size_type __pos) [inline]

Operations on dynamic_bitsets.

Parameters

__pos	The number of places to shift.

These should be self-explanatory.

Definition at line 815 of file dynamic_bitset.

4.454.3.25 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> reference std::tr2::dynamic_bitset< _WordT, _Alloc >::operator[] (size_type __pos) [inline]

Array-indexing support.

Parameters

__pos	Index into the dynamic_bitset.

Returns

A bool for a 'const dynamic_bitset'. For non-const bitsets, an instance of the reference proxy class.

Note

These operators do no range checking and throw no exceptions, as required by DR 11 to the standard.

Definition at line 918 of file dynamic_bitset.

4.454.3.26 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> const_reference std::tr2::dynamic_bitset< _WordT, _Alloc >::operator[] (size_type __pos) const [inline]

Array-indexing support.

Parameters

__pos	Index into the dynamic_bitset.

Returns

A bool for a 'const dynamic_bitset'. For non-const bitsets, an instance of the reference proxy class.

Note

These operators do no range checking and throw no exceptions, as required by DR 11 to the standard.

Definition at line 922 of file dynamic_bitset.

4.454.3.27 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator^= (const dynamic_bitset< _WordT, _Alloc > & *__rhs*) [inline]

Operations on dynamic_bitsets.

Parameters

__rhs	A same-sized dynamic_bitset.

These should be self-explanatory.

Definition at line 780 of file dynamic_bitset.

4.454.3.28 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::operator|= (const dynamic_bitset< _WordT, _Alloc > & *__rhs*) [inline]

Operations on dynamic_bitsets.

Parameters

__rhs	A same-sized dynamic_bitset.

These should be self-explanatory.

Definition at line 773 of file dynamic_bitset.

4.454.3.29 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset std::tr2::dynamic_bitset< _WordT, _Alloc >::operator~ ( ) const [inline]

See the no-argument flip().

Definition at line 905 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::flip().

4.454.3.30 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> void std::tr2::dynamic_bitset< _WordT, _Alloc >::push_back (bool *__bit*) [inline]

Push a bit onto the high end of the bitset.

Definition at line 711 of file dynamic_bitset.

References std::tr2::dynamic_bitset< _WordT, _Alloc >::size().

4.454.3.31 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::reset ( ) [inline]

Sets every bit to false.

Definition at line 858 of file dynamic_bitset.

4.454.3.32 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::reset (size_type *__pos*) [inline]

Sets a given bit to false.

Parameters

__pos	The index of the bit.

Exceptions

std::out_of_range	If *__pos* is bigger the size of the set.

Same as writing `set(__pos, false)`.

Definition at line 872 of file dynamic_bitset.

4.454.3.33 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> void std::tr2::dynamic_bitset< _WordT, _Alloc >::resize (size_type __nbits, bool __value = false) [inline]

Resize the bitset.

Definition at line 688 of file dynamic_bitset.

Referenced by std::tr2::dynamic_bitset< _WordT, _Alloc >::dynamic_bitset(), and std::tr2::operator>>().

4.454.3.34 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::set ( ) [inline]

Sets every bit to true.

Definition at line 833 of file dynamic_bitset.

4.454.3.35 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> dynamic_bitset& std::tr2::dynamic_bitset< _WordT, _Alloc >::set (size_type __pos, bool __val = true) [inline]

Sets a given bit to a particular value.

Parameters

__pos	The index of the bit.
__val	Either true or false, defaults to true.

Exceptions

std::out_of_range	If *__pos* is bigger the size of the set.

Definition at line 847 of file dynamic_bitset.

4.454.3.36 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> size_type std::tr2::dynamic_bitset< _WordT, _Alloc >::size ( ) const [inline], [noexcept]

Returns the total number of bits.

Definition at line 997 of file dynamic_bitset.

Referenced by std::tr2::operator>>(), and std::tr2::dynamic_bitset< _WordT, _Alloc >::push_back().

4.454.3.37 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> void std::tr2::dynamic_bitset< _WordT, _Alloc >::swap (dynamic_bitset< _WordT, _Alloc > & __b) [inline], [noexcept]

Swap with another bitset.

Definition at line 654 of file dynamic_bitset.

4.454.3.38 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> bool std::tr2::dynamic_bitset< _WordT, _Alloc >::test (size_type __pos) const [inline]

Tests the value of a bit.

Parameters

__pos	The index of a bit.

Returns

The value at *__pos*.

Exceptions

std::out_of_range	If *__pos* is bigger the size of the set.

Definition at line 1024 of file dynamic_bitset.

4.454.3.39 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> template<typename _CharT = char, typename _Traits = std::char_traits<_CharT>, typename _Alloc1 = std::allocator<_CharT>> **std::basic_string**<_CharT, _Traits, _Alloc1> **std::tr2::dynamic_bitset**< _WordT, _Alloc >::to_string (_CharT *__zero* = `_CharT('0')`, _CharT *__one* = `_CharT('1')`) const [inline]

Returns a character interpretation of the dynamic_bitset.

Returns

The string equivalent of the bits.

Note the ordering of the bits: decreasing character positions correspond to increasing bit positions (see the main class notes for an example).

Definition at line 958 of file dynamic_bitset.

4.454.3.40 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> unsigned long long **std::tr2::dynamic_bitset**< _WordT, _Alloc >::to_ullong ( ) const [inline]

Returns a numerical interpretation of the dynamic_bitset.

Returns

The integral equivalent of the bits.

Exceptions

std::overflow_error	If there are too many bits to be represented in an `unsigned long`.

Definition at line 943 of file dynamic_bitset.

4.454.3.41 template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>> unsigned long **std::tr2::dynamic_bitset**< _WordT, _Alloc >::to_ulong ( ) const [inline]

Returns a numerical interpretation of the dynamic_bitset.

Returns

The integral equivalent of the bits.

Exceptions

std::overflow_error	If there are too many bits to be represented in an `unsigned long`.

Definition at line 933 of file dynamic_bitset.

The documentation for this class was generated from the following files:

- dynamic_bitset
- dynamic_bitset.tcc

4.455 std::enable_if< bool, _Tp > Struct Template Reference

4.455.1 Detailed Description

template<bool, typename _Tp = void>struct std::enable_if< bool, _Tp >

Define a member typedef `type` only if a boolean constant is true.

Definition at line 2182 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.456 std::enable_shared_from_this< _Tp > Class Template Reference

Public Member Functions

- shared_ptr< _Tp > **shared_from_this** ()
- shared_ptr< const _Tp > **shared_from_this** () const
- weak_ptr< _Tp > **weak_from_this** () noexcept
- weak_ptr< const _Tp > **weak_from_this** () const noexcept

Protected Member Functions

- **enable_shared_from_this** (const enable_shared_from_this &) noexcept
- enable_shared_from_this & **operator=** (const enable_shared_from_this &) noexcept

Friends

- const enable_shared_from_this * **__enable_shared_from_this_base** (const __shared_count<> &, const enable_shared_from_this *__p)
- template<typename , _Lock_policy >
  class **__shared_ptr**

4.456.1 Detailed Description

template<typename _Tp>class std::enable_shared_from_this< _Tp >

Base class allowing use of member function shared_from_this.

Definition at line 791 of file bits/shared_ptr.h.

The documentation for this class was generated from the following file:

- bits/shared_ptr.h

4.457 __gnu_cxx::enc_filebuf< _CharT > Class Template Reference

Inheritance diagram for __gnu_cxx::enc_filebuf< _CharT >:

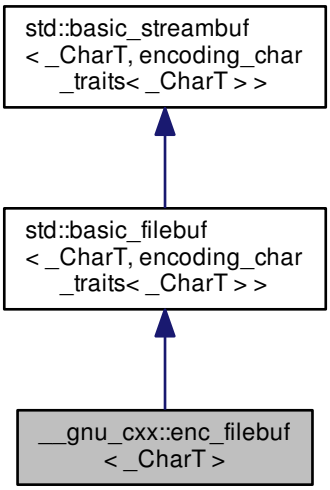

Public Types

- typedef codecvt< char_type, char, __state_type > **__codecvt_type**
- typedef __basic_file< char > **__file_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef traits_type::state_type **__state_type**
- typedef basic_streambuf < char_type, traits_type > **__streambuf_type**
- typedef _CharT **char_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::off_type **off_type**
- typedef traits_type::pos_type **pos_type**
- typedef traits_type::state_type **state_type**
- typedef encoding_char_traits < _CharT > **traits_type**

Public Member Functions

- **enc_filebuf** (state_type &__state)
- __filebuf_type * close ()
- locale getloc () const
- streamsize in_avail ()

- bool is_open () const throw ()
- __filebuf_type * open (const char *__s, ios_base::openmode __mode)
- __filebuf_type * open (const std::string &__s, ios_base::openmode __mode)
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- int_type sungetc ()
- void **swap** (basic_filebuf &)

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void **_M_allocate_internal_buffer** ()
- bool **_M_convert_to_external** (char_type *, streamsize)
- void _M_create_pback ()
- void **_M_destroy_internal_buffer** () throw ()
- void _M_destroy_pback () throw ()
- int **_M_get_ext_pos** (__state_type &__state)
- pos_type **_M_seek** (off_type __off, ios_base::seekdir __way, __state_type __state)
- void _M_set_buffer (streamsize __off)
- bool **_M_terminate_output** ()
- void gbump (int __n)
- virtual void **imbue** (const locale &__loc)
- virtual int_type **overflow** (int_type __c=encoding_char_traits< _CharT >::eof())
- virtual int_type **pbackfail** (int_type __c=encoding_char_traits< _CharT >::eof())
- void pbump (int __n)
- virtual pos_type **seekoff** (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual pos_type **seekpos** (pos_type __pos, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual __streambuf_type * setbuf (char_type *__s, streamsize __n)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize **showmanyc** ()
- void **swap** (basic_streambuf &__sb)
- virtual int **sync** ()
- virtual int_type uflow ()
- virtual int_type **underflow** ()
- virtual streamsize **xsgetn** (char_type *__s, streamsize __n)

- virtual streamsize **xsputn** (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- char_type * _M_buf
- bool **_M_buf_allocated**
- locale _M_buf_locale
- size_t _M_buf_size
- const __codecvt_type * **_M_codecvt**
- char * _M_ext_buf
- streamsize _M_ext_buf_size
- char * **_M_ext_end**
- const char * _M_ext_next
- __file_type **_M_file**
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- __c_lock **_M_lock**
- ios_base::openmode _M_mode
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end
- bool _M_reading
- __state_type **_M_state_beg**
- __state_type **_M_state_cur**
- __state_type **_M_state_last**
- bool **_M_writing**

- char_type _M_pback
- char_type * **_M_pback_cur_save**
- char_type * **_M_pback_end_save**
- bool **_M_pback_init**

4.457.1 Detailed Description

template<typename _CharT>class __gnu_cxx::enc_filebuf< _CharT >

class enc_filebuf.

Definition at line 42 of file enc_filebuf.h.

4.457.2 Member Function Documentation

4.457.2.1 void std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_create_pback ( ) [inline], [protected], [inherited]

Initializes pback buffers, and moves normal buffers to safety. Assumptions: _M_in_cur has already been moved back

Definition at line 199 of file fstream.

4.457.2.2 void std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_destroy_pback ( ) throw) [inline], [protected], [inherited]

Deactivates pback buffer contents, and restores normal buffer. Assumptions: The pback buffer has only moved forward.

Definition at line 216 of file fstream.

4.457.2.3 void std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_set_buffer (streamsize *__off*) [inline], [protected], [inherited]

This function sets the pointers of the internal buffer, both get and put areas. Typically:

__off == egptr() - eback() upon underflow/uflow (**read** mode); __off == 0 upon overflow (**write** mode); __off == -1 upon open, setbuf, seekoff/pos (**uncommitted** mode).

NB: epptr() - pbase() == _M_buf_size - 1, since _M_buf_size reflects the actual allocated memory and the last cell is reserved for the overflow char of a full put area.

Definition at line 459 of file fstream.

4.457.2.4 __filebuf_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::close ( ) [inherited]

Closes the currently associated file.

Returns

`this` on success, NULL on failure

If no file is currently open, this function immediately fails.

If a *put buffer area* exists, `overflow(eof)` is called to flush all the characters. The file is then closed.

If any operations fail, this function also fails.

4.457.2.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.457.2.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.457.2.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.457.2.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.457.2.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.457.2.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.457.2.11 virtual void std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::imbue (const locale & *__loc*) [protected], [virtual], [inherited]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.457.2.13 bool std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::is_open ( ) const throw) [inline], [inherited]

Returns true if the external file is open.

Definition at line 265 of file fstream.

4.457.2.14 __filebuf_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::open (const char * __s, ios_base::openmode __mode) [inherited]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

If a file is already open, this function immediately fails. Otherwise it tries to open the file named *__s* using the flags given in *__mode*.

Table 92, adapted here, gives the relation between openmode combinations and the equivalent `fopen()` flags. (NB: lines app, in|out|app, in|app, binary|app, binary|in|out|app, and binary|in|app per DR 596)

ios_base Flag combination				stdio equivalent
binary	in	out	trunc	app	
		+			w
		+		+	a
				+	a
		+	+		w
	+				r
	+	+			r+
	+	+	+		w+
	+	+		+	a+
	+			+	a+
+		+			wb
+		+		+	ab
+				+	ab
+		+	+		wb
+	+				rb
+	+	+			r+b
+	+	+	+		w+b
+	+	+		+	a+b
+	+			+	a+b

4.457.2.15 __filebuf_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::open (const std::string & __s, ios_base::openmode __mode) [inline], [inherited]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

Definition at line 331 of file fstream.

4.457.2.16 virtual int_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::overflow (int_type *__c* = _Traits::eof()) [protected], [virtual], [inherited]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually *__c*, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if *__c* is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.17 virtual int_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::pbackfail (int_type *__c* = _Traits::eof()) [protected], [virtual], [inherited]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.457.2.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.457.2.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.457.2.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & __loc) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.457.2.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.457.2.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.457.2.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.457.2.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.457.2.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.457.2.27 virtual pos_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::seekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode = ios_base::in | ios_base::out) [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.28 virtual pos_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::seekpos (pos_type __pos, ios_base::openmode __mode = ios_base::in | ios_base::out) [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.29 virtual __streambuf_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::setbuf (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Manipulates the buffer.

Parameters

__s	Pointer to a buffer area.
__n	Size of *__s*.

Returns

`this`

If no file has been opened, and both *__s* and *__n* are zero, then the stream becomes unbuffered. Otherwise, *__s* is used as a buffer; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*) [inline], [protected], [inherited]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.457.2.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.457.2.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.457.2.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * __s, streamsize __n) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill __s[0] through __s[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.457.2.34 virtual streamsize std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::showmanyc ( ) [protected], [virtual], [inherited]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.457.2.36 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type __c) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.457.2.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type __c) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.457.2.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * __s, streamsize __n) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.457.2.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.457.2.40 virtual int std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::sync (void) [protected], [virtual], [inherited]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented in __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 707 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc().

4.457.2.42 virtual int_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::underflow ( ) [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.43 virtual streamsize std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.2.44 virtual streamsize std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes __s[0] through __s[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

4.457.3 Member Data Documentation

4.457.3.1 char_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_buf [protected], [inherited]

Pointer to the beginning of internal buffer.

Definition at line 136 of file fstream.

4.457.3.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.457.3.3 size_t std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_buf_size [protected], [inherited]

Actual size of internal buffer. This number is equal to the size of the put area + 1 position, reserved for the overflow char of a full area.

Definition at line 143 of file fstream.

4.457.3.4 char* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_ext_buf [protected], [inherited]

Buffer for external characters. Used for input when codecvt::always_noconv() == false. When valid, this corresponds to eback().

Definition at line 178 of file fstream.

4.457.3.5 streamsize std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_ext_buf_size [protected], [inherited]

Size of buffer held by _M_ext_buf.

Definition at line 183 of file fstream.

4.457.3.6 const char* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_ext_next [protected], [inherited]

Pointers into the buffer held by _M_ext_buf that delimit a subsequence of bytes that have been read but not yet converted. When valid, _M_ext_next corresponds to egptr().

Definition at line 190 of file fstream.

4.457.3.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.457.3.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.457.3.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.457.3.10 ios_base::openmode std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_mode [protected], [inherited]

Place to stash in || out || in | out settings for current filebuf.

Definition at line 121 of file fstream.

4.457.3.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.457.3.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.457.3.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.457.3.14 char_type std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_pback [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 164 of file fstream.

4.457.3.15 char_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_pback_cur_save [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 165 of file fstream.

4.457.3.16 char_type* std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_pback_end_save [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 166 of file fstream.

4.457.3.17 bool std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_pback_init [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 167 of file fstream.

4.457.3.18 bool std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >::_M_reading [protected], [inherited]

_M_reading == false && _M_writing == false for **uncommitted** mode; _M_reading == true for **read** mode; _M_writing == true for **write** mode;

NB: _M_reading == true && _M_writing == true is unused.

Definition at line 155 of file fstream.

The documentation for this class was generated from the following file:

- enc_filebuf.h

4.458 __gnu_cxx::encoding_char_traits< _CharT > Struct Template Reference

Inheritance diagram for __gnu_cxx::encoding_char_traits< _CharT >:

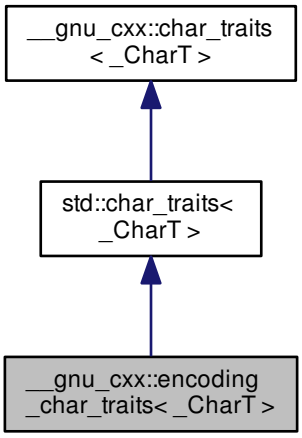

Public Types

- typedef _CharT **char_type**
- typedef _Char_types< _CharT >
  ::int_type **int_type**
- typedef _Char_types< _CharT >
  ::off_type **off_type**
- typedef std::fpos< state_type > **pos_type**
- typedef encoding_state **state_type**

Static Public Member Functions

- static constexpr void **assign** (char_type &__c1, const char_type &__c2)
- static constexpr char_type * **assign** (char_type *__s, std::size_t __n, char_type __a)
- static constexpr int **compare** (const char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr char_type * **copy** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **eof** ()
- static constexpr bool **eq** (const char_type &__c1, const char_type &__c2)
- static constexpr bool **eq_int_type** (const int_type &__c1, const int_type &__c2)
- static constexpr const char_type * **find** (const char_type *__s, std::size_t __n, const char_type &__a)
- static constexpr std::size_t **length** (const char_type *__s)
- static constexpr bool **lt** (const char_type &__c1, const char_type &__c2)
- static constexpr char_type * **move** (char_type *__s1, const char_type *__s2, std::size_t __n)
- static constexpr int_type **not_eof** (const int_type &__c)
- static constexpr char_type **to_char_type** (const int_type &__c)
- static constexpr int_type **to_int_type** (const char_type &__c)

4.458.1 Detailed Description

template<typename _CharT>struct __gnu_cxx::encoding_char_traits< _CharT >

encoding_char_traits

Definition at line 211 of file codecvt_specializations.h.

The documentation for this struct was generated from the following file:

- codecvt_specializations.h

4.459 __gnu_cxx::encoding_state Class Reference

Public Types

- typedef iconv_t **descriptor_type**

Public Member Functions

- **encoding_state** (const char *__int, const char *__ext, int __ibom=0, int __ebom=0, int __bytes=1)
- **encoding_state** (const encoding_state &__obj)
- int **character_ratio** () const
- int **external_bom** () const
- const std::string **external_encoding** () const
- bool **good** () const throw ()
- const descriptor_type & **in_descriptor** () const
- int **internal_bom** () const
- const std::string **internal_encoding** () const
- encoding_state & **operator=** (const encoding_state &__obj)
- const descriptor_type & **out_descriptor** () const

Protected Member Functions

- void **construct** (const encoding_state &__obj)
- void **destroy** () throw ()
- void **init** ()

Protected Attributes

- int **_M_bytes**
- int **_M_ext_bom**
- std::string **_M_ext_enc**
- descriptor_type **_M_in_desc**
- int **_M_int_bom**
- std::string **_M_int_enc**
- descriptor_type **_M_out_desc**

4.459.1 Detailed Description

Extension to use iconv for dealing with character encodings.

Definition at line 51 of file codecvt_specializations.h.

The documentation for this class was generated from the following file:

- codecvt_specializations.h

4.460 __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, No_Throw > Struct Template Reference

4.460.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc, bool No_Throw>struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, No_Throw >

Entry compare, primary template.

Definition at line 50 of file entry_cmp.hpp.

The documentation for this struct was generated from the following file:

- entry_cmp.hpp

4.461 __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false > Struct Template Reference

Classes

- struct type

Public Types

- typedef __rebind_v::const_pointer **entry**

4.461.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >

Specialization, false.

Definition at line 62 of file entry_cmp.hpp.

The documentation for this struct was generated from the following file:

- entry_cmp.hpp

4.462 __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true > Struct Template Reference

Public Types

- typedef Cmp_Fn type

4.462.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true >

Specialization, true.

Definition at line 54 of file entry_cmp.hpp.

4.462.2 Member Typedef Documentation

4.462.2.1 template<typename _VTp , typename Cmp_Fn , typename _Alloc > typedef Cmp_Fn __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true >::type

Compare.

Definition at line 57 of file entry_cmp.hpp.

The documentation for this struct was generated from the following file:

- entry_cmp.hpp

4.463 __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, No_Throw > Struct Template Reference

4.463.1 Detailed Description

template<typename _VTp, typename Pred, typename _Alloc, bool No_Throw>struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, No_Throw >

Entry predicate primary class template.

Definition at line 50 of file entry_pred.hpp.

The documentation for this struct was generated from the following file:

- entry_pred.hpp

4.464 __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, false > Struct Template Reference

Public Types

- typedef __rebind_v::const_pointer **entry**

4.464.1 Detailed Description

template<typename _VTp, typename Pred, typename _Alloc>struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, false >

Specialization, false.

Definition at line 61 of file entry_pred.hpp.

The documentation for this struct was generated from the following file:

- entry_pred.hpp

4.465 __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, true > Struct Template Reference

Public Types

- typedef Pred **type**

4.465.1 Detailed Description

template<typename _VTp, typename Pred, typename _Alloc>struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, true >

Specialization, true.

Definition at line 54 of file entry_pred.hpp.

The documentation for this struct was generated from the following file:

- entry_pred.hpp

4.466 __gnu_pbds::detail::eq_by_less< Key, Cmp_Fn > Struct Template Reference

Inherits Cmp_Fn.

Public Member Functions

- bool **operator()** (const Key &r_lhs, const Key &r_rhs) const

4.466.1 Detailed Description

template<typename Key, class Cmp_Fn>struct __gnu_pbds::detail::eq_by_less< Key, Cmp_Fn >

Equivalence function.

Definition at line 56 of file eq_by_less.hpp.

The documentation for this struct was generated from the following file:

- eq_by_less.hpp

4.467 __gnu_parallel::equal_split_tag Struct Reference

Inheritance diagram for __gnu_parallel::equal_split_tag:



4.467.1 Detailed Description

Selects the equal splitting variant for std::find().

See Also

_GLIBCXX_FIND_EQUAL_SPLIT

Definition at line 182 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.468 std::equal_to< _Tp > Struct Template Reference

Inheritance diagram for std::equal_to< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.468.1 Detailed Description

template<typename _Tp = void>struct std::equal_to< _Tp >

One of the comparison functors.

Definition at line 331 of file stl_function.h.

4.468.2 Member Typedef Documentation

4.468.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.468.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.468.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.469 std::equal_to< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)==std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)==std::forward< _Up >(__u))

4.469.1 Detailed Description

template<><u>struct</u> std::equal_to< void >

One of the comparison functors.

Definition at line 488 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.470 std::_V2::error_category Class Reference

Public Member Functions

- **error_category** (const error_category &)=delete
- virtual error_condition **default_error_condition** (int __i) const noexcept
- virtual bool **equivalent** (int __i, const error_condition &__cond) const noexcept
- virtual bool **equivalent** (const error_code &__code, int __i) const noexcept
- virtual string **message** (int) const =0
- virtual const char * **name** () const noexcept=0
- bool **operator!=** (const error_category &__other) const noexcept
- bool **operator<** (const error_category &__other) const noexcept
- error_category & **operator=** (const error_category &)=delete
- bool **operator==** (const error_category &__other) const noexcept

4.470.1 Detailed Description

Abstract base class for types defining a category of error codes.

An error category defines a context that give meaning to the integer stored in an `error_code` or `error_condition` object. For example, the standard `errno` constants such a `EINVAL` and `ENOMEM` are associated with the "generic" category and other OS-specific error numbers are associated with the "system" category, but a user-defined category might give different meanings to the same numerical values.

Definition at line 89 of file system_error.

The documentation for this class was generated from the following file:

- system_error

4.471 std::error_code Struct Reference

Public Member Functions

- **error_code** (int __v, const error_category &__cat) noexcept
- template<typename _ErrorCodeEnum , typename = typename enable_if<is_error_code_enum<_ErrorCodeEnum>::value>::type> **error_code** (_ErrorCodeEnum __e) noexcept
- void **assign** (int __v, const error_category &__cat) noexcept
- const error_category & **category** () const noexcept
- void **clear** () noexcept
- error_condition **default_error_condition** () const noexcept

- _GLIBCXX_DEFAULT_ABI_TAG string **message** () const
- **operator bool** () const noexcept
- template<typename _ErrorCodeEnum >
  enable_if< is_error_code_enum
  < _ErrorCodeEnum >::value,
  error_code & >::type **operator=** (_ErrorCodeEnum __e) noexcept
- int **value** () const noexcept

Related Functions

(Note that these are not member functions.)

- error_condition **make_error_condition** (errc) noexcept
- bool operator!= (const error_code &__lhs, const error_code &__rhs) noexcept
- bool operator== (const error_code &__lhs, const error_code &__rhs) noexcept

- error_code make_error_code (errc __e) noexcept

4.471.1 Detailed Description

Class error_code

This class is a value type storing an integer error number and a category that gives meaning to the error number. Typically this is done close the the point where the error happens, to capture the original error value.

An `error_code` object can be used to store the original error value emitted by some subsystem, with a category relevant to the subsystem. For example, errors from POSIX library functions can be represented by an `errno` value and the "generic" category, but errors from an HTTP library might be represented by an HTTP response status code (e.g. 404) and a custom category defined by the library.

Definition at line 180 of file system_error.

The documentation for this struct was generated from the following file:

- system_error

4.472 std::error_condition Struct Reference

Public Member Functions

- **error_condition** (int __v, const error_category &__cat) noexcept
- template<typename _ErrorConditionEnum , typename = typename enable_if<is_error_condition_enum<_ErrorConditionEnum>::value>-
  ::type>
  error_condition (_ErrorConditionEnum __e) noexcept
- void **assign** (int __v, const error_category &__cat) noexcept
- const error_category & **category** () const noexcept
- void **clear** () noexcept
- _GLIBCXX_DEFAULT_ABI_TAG string **message** () const
- **operator bool** () const noexcept
- template<typename _ErrorConditionEnum >
  enable_if
  < is_error_condition_enum
  < _ErrorConditionEnum >::value,
  error_condition & >::type **operator=** (_ErrorConditionEnum __e) noexcept

- int **value** () const noexcept

Related Functions

(Note that these are not member functions.)

- error_condition make_error_condition (errc __e) noexcept
- bool **operator!=** (const error_code &__lhs, const error_condition &__rhs) noexcept
- bool **operator!=** (const error_condition &__lhs, const error_code &__rhs) noexcept
- bool operator!= (const error_condition &__lhs, const error_condition &__rhs) noexcept
- bool operator< (const error_condition &__lhs, const error_condition &__rhs) noexcept
- bool **operator==** (const error_code &__lhs, const error_condition &__rhs) noexcept
- bool operator== (const error_condition &__lhs, const error_condition &__rhs) noexcept
- bool **operator==** (const error_condition &__lhs, const error_code &__rhs) noexcept

4.472.1 Detailed Description

Class error_condition

This class represents error conditions that may be visible at an API boundary. Different `error_code` values that can occur within a library or module might map to the same `error_condition`.

An `error_condition` represents something that the program can test for, and subsequently take appropriate action.

Definition at line 278 of file system_error.

The documentation for this struct was generated from the following file:

- system_error

4.473 __gnu_parallel::exact_tag Struct Reference

Inheritance diagram for __gnu_parallel::exact_tag:

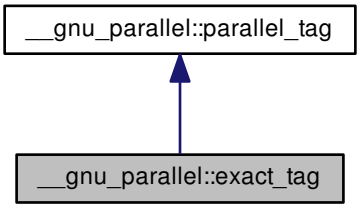

Public Member Functions

- **exact_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.473.1 Detailed Description

Forces parallel merging with exact splitting, at compile time.

Definition at line 109 of file tags.h.

4.473.2 Member Function Documentation

4.473.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.473.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.474 std::exception Class Reference

Inheritance diagram for std::exception:

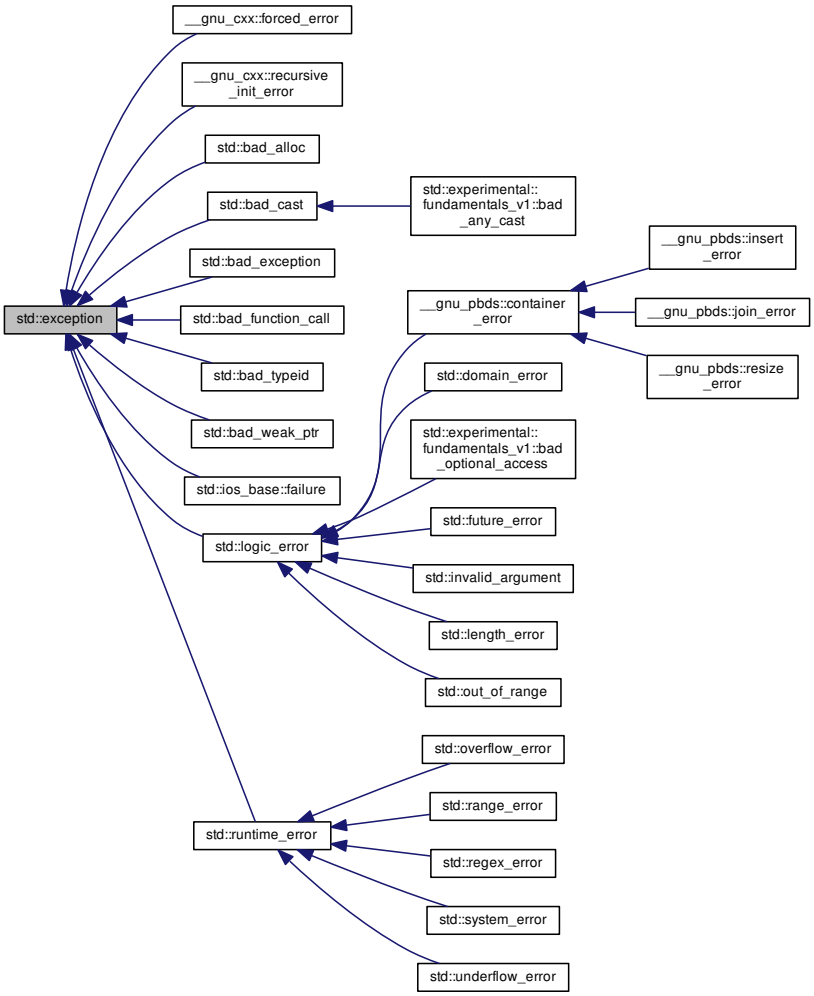

Public Member Functions

- **exception** (const exception &)=default
- **exception** (exception &&)=default
- exception & **operator=** (const exception &)=default
- exception & **operator=** (exception &&)=default
- virtual const char * what () const noexcept

4.474.1 Detailed Description

Base class for all library exceptions.

This is the base class for all exceptions thrown by the standard library, and by certain language expressions. You are free to derive your own exception classes, or use a different hierarchy, or to throw non-class data (e.g., fundamental types).

Definition at line 60 of file exception.h.

The documentation for this class was generated from the following file:

- exception.h

4.475 std::__exception_ptr::exception_ptr Class Reference

Public Member Functions

- **exception_ptr** (const exception_ptr &) noexcept
- **exception_ptr** (nullptr_t) noexcept
- **exception_ptr** (exception_ptr &&__o) noexcept
- const class std::type_info * **__cxa_exception_type** () const noexcept
- **operator bool** () const
- exception_ptr & **operator=** (const exception_ptr &) noexcept
- exception_ptr & **operator=** (exception_ptr &&__o) noexcept
- void **swap** (exception_ptr &) noexcept

Friends

- bool **operator==** (const exception_ptr &, const exception_ptr &) noexcept
- exception_ptr **std::current_exception** () noexcept
- template<typename _Ex >
  exception_ptr **std::make_exception_ptr** (_Ex) noexcept
- void **std::rethrow_exception** (exception_ptr)

Related Functions

(Note that these are not member functions.)

- bool operator== (const exception_ptr &, const exception_ptr &) noexcept

4.475.1 Detailed Description

An opaque pointer to an arbitrary exception.

Definition at line 80 of file exception_ptr.h.

4.475.2 Friends And Related Function Documentation

4.475.2.1 bool operator== (const exception_ptr & , const exception_ptr &) [related]

The documentation for this class was generated from the following file:

- exception_ptr.h

4.476 std::exponential_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- exponential_distribution ()
- exponential_distribution (_RealType __lambda)
- **exponential_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType lambda () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const exponential_distribution &__d1, const exponential_distribution &__d2)

4.476.1 Detailed Description

template<typename _RealType = double>class std::exponential_distribution< _RealType >

An exponential continuous distribution for random numbers.

The formula for the exponential probability density function is $p(x|\lambda) = \lambda e^{-\lambda x}$.

Definition at line 4636 of file random.h.

Mean	$\frac{1}{\lambda}$
Median	$\frac{\ln 2}{\lambda}$
Mode	$zero$
Range	$[0, \infty]$
Standard Deviation	$\frac{1}{\lambda}$

Table 2: Distribution Statistics

4.476.2 Member Typedef Documentation

4.476.2.1 template<typename _RealType = double> typedef _RealType std::exponential_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 4639 of file random.h.

4.476.3 Constructor & Destructor Documentation

4.476.3.1 template<typename _RealType = double> std::exponential_distribution< _RealType >::exponential_distribution ( ) [inline]

Constructs an exponential distribution with inverse scale parameter 1.0.

Definition at line 4680 of file random.h.

4.476.3.2 template<typename _RealType = double> std::exponential_distribution< _RealType >::exponential_distribution (_RealType *__lambda*) [inline], [explicit]

Constructs an exponential distribution with inverse scale parameter λ.

Definition at line 4687 of file random.h.

4.476.4 Member Function Documentation

4.476.4.1 template<typename _RealType = double> _RealType std::exponential_distribution< _RealType >::lambda ( ) const [inline]

Returns the inverse scale parameter of the distribution.

Definition at line 4708 of file random.h.

4.476.4.2 template<typename _RealType = double> result_type std::exponential_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 4737 of file random.h.

References std::numeric_limits< _Tp >::max().

4.476.4.3 template<typename _RealType = double> result_type std::exponential_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 4730 of file random.h.

4.476.4.4 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::exponential_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 4745 of file random.h.

4.476.4.5 template<typename _RealType = double> param_type std::exponential_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 4715 of file random.h.

Referenced by std::operator>>().

4.476.4.6 template<typename _RealType = double> void std::exponential_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 4723 of file random.h.

4.476.4.7 template<typename _RealType = double> void std::exponential_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Has no effect on exponential distributions.

Definition at line 4702 of file random.h.

4.476.5 Friends And Related Function Documentation

4.476.5.1 template<typename _RealType = double> bool operator== (const exponential_distribution< _RealType > & *__d1*, const exponential_distribution< _RealType > & *__d2*) [friend]

Return true if two exponential distributions have the same parameters.

Definition at line 4785 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.477 std::extent< _Tp > Struct Template Reference

Inheritance diagram for std::extent< _Tp >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.477.1 Detailed Description

template<typename _Tp>struct std::extent< _Tp >

extent

Definition at line 782 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.478 std::extreme_value_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **extreme_value_distribution** (_RealType __a, _RealType __b=_RealType(1))
- **extreme_value_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType a () const
- _RealType b () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  extreme_value_distribution
  < _RealType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const extreme_value_distribution &__d1, const extreme_value_distribution &__d2)

4.478.1 Detailed Description

template<typename _RealType = double>class std::extreme_value_distribution< _RealType >

A extreme_value_distribution random number distribution.

The formula for the normal probability mass function is

$$p(x|a,b) = \frac{1}{b}\exp(\frac{a-x}{b} - \exp(\frac{a-x}{b}))$$

Definition at line 5061 of file random.h.

4.478.2 Member Typedef Documentation

4.478.2.1 template<typename _RealType = double> typedef _RealType std::extreme_value_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 5064 of file random.h.

4.478.3 Member Function Documentation

4.478.3.1 template<typename _RealType = double> _RealType std::extreme_value_distribution< _RealType >::a ( ) const [inline]

Return the a parameter of the distribution.

Definition at line 5126 of file random.h.

4.478.3.2 template<typename _RealType = double> _RealType std::extreme_value_distribution< _RealType >::b ( ) const [inline]

Return the b parameter of the distribution.

Definition at line 5133 of file random.h.

4.478.3.3 template<typename _RealType = double> result_type std::extreme_value_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 5162 of file random.h.

References std::numeric_limits< _Tp >::max().

4.478.3.4 template<typename _RealType = double> result_type std::extreme_value_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 5155 of file random.h.

References std::numeric_limits< _Tp >::lowest().

4.478.3.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::extreme_value_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 5170 of file random.h.

4.478.3.6 template<typename _RealType = double> param_type std::extreme_value_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 5140 of file random.h.

Referenced by std::operator>>().

4.478.3.7 template<typename _RealType = double> void std::extreme_value_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 5148 of file random.h.

4.478.3.8 template<typename _RealType = double> void std::extreme_value_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 5119 of file random.h.

4.478.4 Friends And Related Function Documentation

4.478.4.1 template<typename _RealType = double> bool operator== (const extreme_value_distribution< _RealType > & *__d1*, const extreme_value_distribution< _RealType > & *__d2*) [friend]

Return true if two extreme value distributions have the same parameters.

Definition at line 5205 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.479 std::locale::facet Class Reference

Inheritance diagram for std::locale::facet:

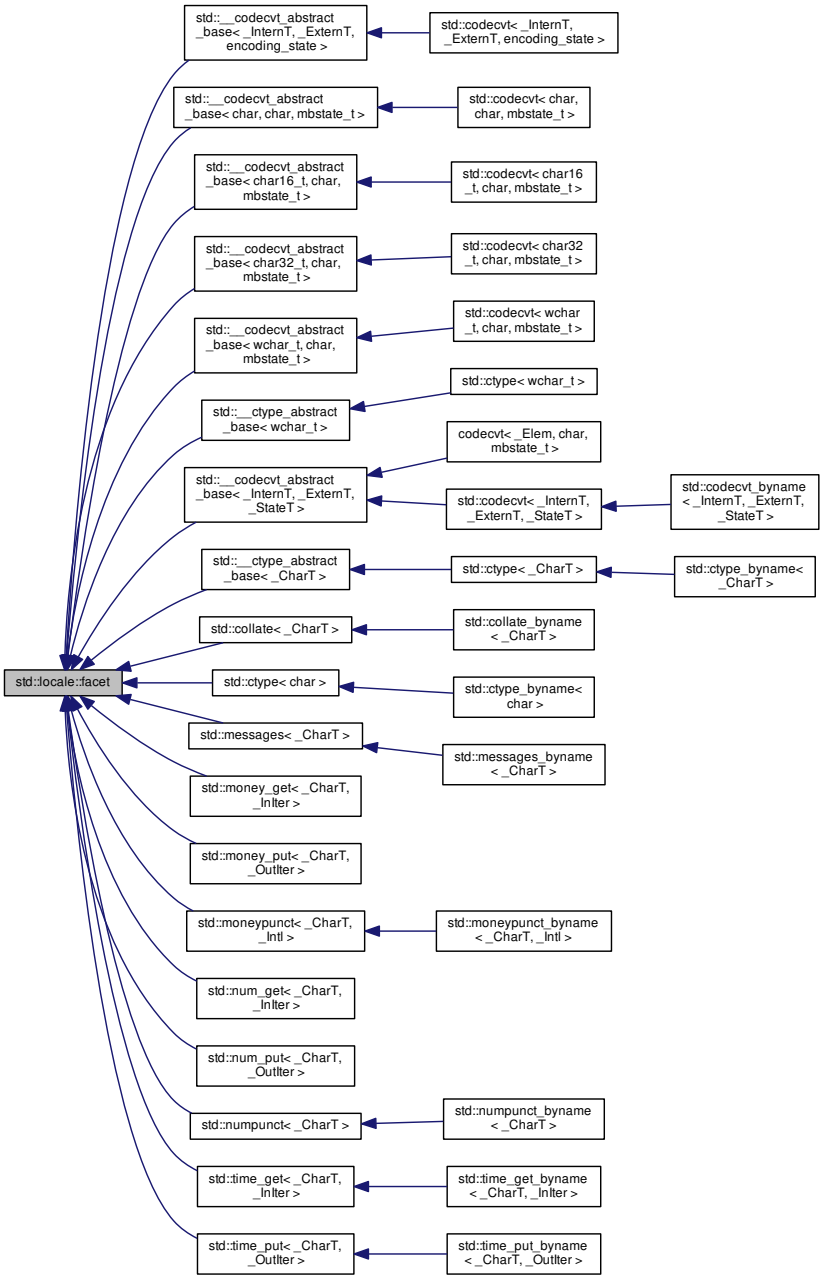

Protected Member Functions

- facet (size_t __refs=0) throw ()
- **facet** (const facet &)=delete

- virtual ~facet ()
- facet & **operator=** (const facet &)=delete

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Friends

- class **locale**
- class **locale::_Impl**

4.479.1 Detailed Description

Localization functionality base class.

The facet class is the base class for a localization feature, such as money, time, and number printing. It provides common support for facets and reference management.

Facets may not be copied or assigned.

Definition at line 373 of file locale_classes.h.

4.479.2 Constructor & Destructor Documentation

4.479.2.1 std::locale::facet::facet (size_t *__refs* = 0) throw) [inline], [explicit], [protected]

Facet constructor.

This is the constructor provided by the standard. If refs is 0, the facet is destroyed when the last referencing locale is destroyed. Otherwise the facet will never be destroyed.

Parameters

__refs	The initial value for reference count.

Definition at line 405 of file locale_classes.h.

4.479.2.2 virtual std::locale::facet::~facet ( ) [protected], [virtual]

Facet destructor.

The documentation for this class was generated from the following file:

- locale_classes.h

4.480 std::ios_base::failure Class Reference

Inheritance diagram for std::ios_base::failure:



Public Member Functions

- **failure** (const string &__str) throw ()
- **failure** (const string &__s, const error_code &) noexcept
- **failure** (const char *__s, const error_code &=error_code{})
- error_code **code** () const noexcept
- virtual const char * what () const throw ()

4.480.1 Detailed Description

These are thrown to indicate problems with io.

27.4.2.1.1 Class ios_base::failure.

Definition at line 276 of file ios_base.h.

4.480.2 Member Function Documentation

4.480.2.1 virtual const char* std::ios_base::failure::what ( ) const throw) [virtual]

Returns a C-style character string describing the general cause of the current error.

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- ios_base.h

4.481 __gnu_parallel::find_tag Struct Reference

Inheritance diagram for __gnu_parallel::find_tag:

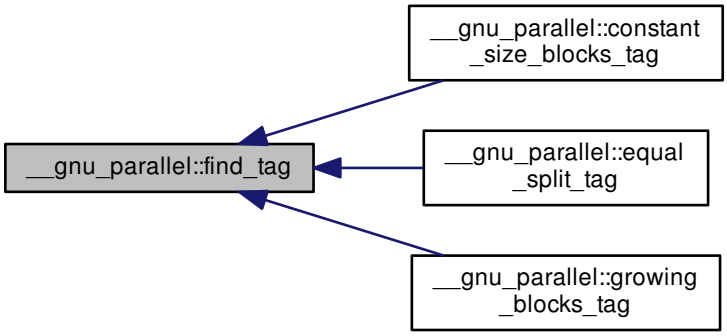

4.481.1 Detailed Description

Base class for for std::find() variants.

Definition at line 104 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.482 std::fisher_f_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **fisher_f_distribution** (_RealType __m, _RealType __n=_RealType(1))
- **fisher_f_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)

- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType **m** () const
- result_type max () const
- result_type min () const
- _RealType **n** () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::fisher_f_distribution< _RealType1 > &__x)
- bool operator== (const fisher_f_distribution &__d1, const fisher_f_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::fisher_f_distribution< _RealType1 > &__x)

4.482.1 Detailed Description

template<typename _RealType = double>class std::fisher_f_distribution< _RealType >

A fisher_f_distribution random number distribution.

The formula for the normal probability mass function is

$$p(x|m,n) = \frac{\Gamma((m+n)/2)}{\Gamma(m/2)\Gamma(n/2)}(\frac{m}{n})^{m/2}x^{(m/2)-1}(1+\frac{mx}{n})^{-(m+n)/2}$$

Definition at line 3053 of file random.h.

4.482.2 Member Typedef Documentation

4.482.2.1 template<typename _RealType = double> typedef _RealType std::fisher_f_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 3056 of file random.h.

4.482.3 Member Function Documentation

4.482.3.1 template<typename _RealType = double> result_type std::fisher_f_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 3155 of file random.h.

References std::numeric_limits< _Tp >::max().

4.482.3.2 template<typename _RealType = double> result_type std::fisher_f_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 3148 of file random.h.

4.482.3.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::fisher_f_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 3163 of file random.h.

4.482.3.4 template<typename _RealType = double> param_type std::fisher_f_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 3133 of file random.h.

4.482.3.5 template<typename _RealType = double> void std::fisher_f_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 3141 of file random.h.

4.482.3.6 template<typename _RealType = double> void std::fisher_f_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 3112 of file random.h.

References std::gamma_distribution< _RealType >::reset().

4.482.4 Friends And Related Function Documentation

4.482.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::fisher_f_distribution< _RealType1 > & *__x*) [friend]

Inserts a fisher_f_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A fisher_f_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.482.4.2 template<typename _RealType = double> bool operator== (const fisher_f_distribution< _RealType > & __d1, const fisher_f_distribution< _RealType > & __d2) [friend]

Return true if two Fisher f distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 3211 of file random.h.

4.482.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & __is, std::fisher_f_distribution< _RealType1 > & __x) [friend]

Extracts a fisher_f_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A fisher_f_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.483 __gnu_cxx::forced_error Struct Reference

Inheritance diagram for __gnu_cxx::forced_error:



Public Member Functions

- virtual const char ∗ what () const noexcept

4.483.1 Detailed Description

Thown by exception safety machinery.

Definition at line 75 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.484 std::forward_iterator_tag Struct Reference

Inheritance diagram for std::forward_iterator_tag:

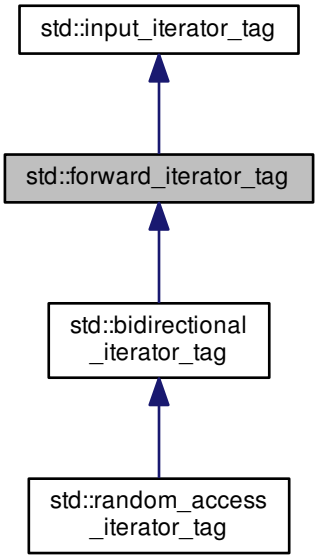

4.484.1 Detailed Description

Forward iterators support a superset of input iterator operations.

Definition at line 99 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.485 std::__debug::forward_list< _Tp, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::forward_list< _Tp, _Allocator >:



Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, forward_list > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, forward_list > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef _Base::size_type **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **forward_list** (const allocator_type &__al) noexcept
- **forward_list** (const forward_list &__list, const allocator_type &__al)
- **forward_list** (forward_list &&__list, const allocator_type &__al)
- **forward_list** (size_type __n, const allocator_type &__al=allocator_type())
- **forward_list** (size_type __n, const _Tp &__value, const allocator_type &__al=allocator_type())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> **forward_list** (_InputIterator __first, _InputIterator __last, const allocator_type &__al=allocator_type())
- **forward_list** (const forward_list &)=default
- **forward_list** (forward_list &&)=default
- **forward_list** (std::initializer_list< _Tp > __il, const allocator_type &__al=allocator_type())
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void **assign** (_InputIterator __first, _InputIterator __last)
- void **assign** (size_type __n, const _Tp &__val)
- void **assign** (std::initializer_list< _Tp > __il)
- iterator **before_begin** () noexcept

- const_iterator **before_begin** () const noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbefore_begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- template<typename... _Args>
  iterator **emplace_after** (const_iterator __pos, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- iterator **erase_after** (const_iterator __pos)
- iterator **erase_after** (const_iterator __pos, const_iterator __last)
- reference **front** ()
- const_reference **front** () const
- iterator **insert_after** (const_iterator __pos, const _Tp &__val)
- iterator **insert_after** (const_iterator __pos, _Tp &&__val)
- iterator **insert_after** (const_iterator __pos, size_type __n, const _Tp &__val)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator **insert_after** (const_iterator __pos, _InputIterator __first, _InputIterator __last)
- iterator **insert_after** (const_iterator __pos, std::initializer_list< _Tp > __il)
- void **merge** (forward_list &&__list)
- void **merge** (forward_list &__list)
- template<typename _Comp >
  void **merge** (forward_list &&__list, _Comp __comp)
- template<typename _Comp >
  void **merge** (forward_list &__list, _Comp __comp)
- forward_list & **operator=** (const forward_list &)=default
- forward_list & **operator=** (forward_list &&)=default
- forward_list & **operator=** (std::initializer_list< _Tp > __il)
- void **pop_front** ()
- __remove_return_type **remove** (const _Tp &__val)
- template<typename _Pred >
  __remove_return_type **remove_if** (_Pred __pred)
- void **resize** (size_type __sz)
- void **resize** (size_type __sz, const value_type &__val)
- void **splice_after** (const_iterator __pos, forward_list &&__list)
- void **splice_after** (const_iterator __pos, forward_list &__list)
- void **splice_after** (const_iterator __pos, forward_list &&__list, const_iterator __i)
- void **splice_after** (const_iterator __pos, forward_list &__list, const_iterator __i)
- void **splice_after** (const_iterator __pos, forward_list &&__list, const_iterator __before, const_iterator __last)
- void **splice_after** (const_iterator __pos, forward_list &__list, const_iterator __before, const_iterator __last)
- void **swap** (forward_list &__list) noexcept(noexcept(declval< _Base & >().swap(__list)))
- __remove_return_type **unique** ()
- template<typename _BinPred >
  __remove_return_type **unique** (_BinPred __binary_pred)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void **_M_swap** (_Safe_sequence_base &) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.485.1 Detailed Description

template<typename _Tp, typename _Allocator>class std::__debug::forward_list< _Tp, _Allocator >

Class std::forward_list with safety/checking/debug instrumentation.

Definition at line 36 of file debug/forward_list.

4.485.2 Member Function Documentation

4.485.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.485.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.485.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.485.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.485.2.5 void __gnu_debug::_Safe_sequence< forward_list< _Tp, _Alloc > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.485.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.485.2.7 void __gnu_debug::_Safe_sequence< forward_list< _Tp, _Alloc > >::_M_transfer_from_if (_Safe_sequence< forward_list< _Tp, _Alloc > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.485.3 Member Data Documentation

4.485.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.485.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.485.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/forward_list

4.486 std::forward_list< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::forward_list< _Tp, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef _Base::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Base::iterator **iterator**
- typedef _Alloc_traits::pointer **pointer**
- typedef value_type & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- forward_list ()=default
- forward_list (const _Alloc &__al) noexcept
- forward_list (const forward_list &__list, const _Alloc &__al)
- forward_list (forward_list &&__list, const _Alloc &__al) noexcept(_Node_alloc_traits::_S_always_equal())
- forward_list (size_type __n, const _Alloc &__al=_Alloc())
- forward_list (size_type __n, const _Tp &__value, const _Alloc &__al=_Alloc())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  forward_list (_InputIterator __first, _InputIterator __last, const _Alloc &__al=_Alloc())
- forward_list (const forward_list &__list)
- forward_list (forward_list &&)=default
- forward_list (std::initializer_list< _Tp > __il, const _Alloc &__al=_Alloc())
- ~forward_list () noexcept
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void assign (_InputIterator __first, _InputIterator __last)
- void assign (size_type __n, const _Tp &__val)

- void assign (std::initializer_list< _Tp > __il)
- iterator before_begin () noexcept
- const_iterator before_begin () const noexcept
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const_iterator cbefore_begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- template<typename... _Args>
  iterator emplace_after (const_iterator __pos, _Args &&...__args)
- template<typename... _Args>
  void emplace_front (_Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- iterator erase_after (const_iterator __pos)
- iterator erase_after (const_iterator __pos, const_iterator __last)
- reference front ()
- const_reference front () const
- allocator_type get_allocator () const noexcept
- template<typename _InputIterator , typename >
  forward_list< _Tp, _Alloc >
  ::iterator **insert_after** (const_iterator __pos, _InputIterator __first, _InputIterator __last)
- iterator insert_after (const_iterator __pos, const _Tp &__val)
- iterator **insert_after** (const_iterator __pos, _Tp &&__val)
- iterator insert_after (const_iterator __pos, size_type __n, const _Tp &__val)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator insert_after (const_iterator __pos, _InputIterator __first, _InputIterator __last)
- iterator insert_after (const_iterator __pos, std::initializer_list< _Tp > __il)
- size_type max_size () const noexcept
- void merge (forward_list &&__list)
- void **merge** (forward_list &__list)
- template<typename _Comp >
  void merge (forward_list &&__list, _Comp __comp)
- template<typename _Comp >
  void **merge** (forward_list &__list, _Comp __comp)
- forward_list & operator= (const forward_list &__list)
- forward_list & operator= (forward_list &&__list) noexcept(_Node_alloc_traits::_S_nothrow_move())
- forward_list & operator= (std::initializer_list< _Tp > __il)
- void pop_front ()
- void push_front (const _Tp &__val)
- void **push_front** (_Tp &&__val)
- __remove_return_type remove (const _Tp &__val)
- template<typename _Pred >
  auto **remove_if** (_Pred __pred) -> __remove_return_type
- template<typename _Pred >
  __remove_return_type remove_if (_Pred __pred)
- void resize (size_type __sz)
- void resize (size_type __sz, const value_type &__val)
- void reverse () noexcept

- void sort ()
- template<typename _Comp >
  void sort (_Comp __comp)
- void splice_after (const_iterator __pos, forward_list &&__list) noexcept
- void **splice_after** (const_iterator __pos, forward_list &__list) noexcept
- void splice_after (const_iterator __pos, forward_list &&__list, const_iterator __i) noexcept
- void **splice_after** (const_iterator __pos, forward_list &__list, const_iterator __i) noexcept
- void swap (forward_list &__list) noexcept
- template<typename _BinPred >
  auto **unique** (_BinPred __binary_pred) -> __remove_return_type
- __remove_return_type unique ()
- template<typename _BinPred >
  __remove_return_type unique (_BinPred __binary_pred)

- void splice_after (const_iterator __pos, forward_list &&, const_iterator __before, const_iterator __last) noexcept
- void splice_after (const_iterator __pos, forward_list &, const_iterator __before, const_iterator __last) noexcept

Private Member Functions

- template<typename... _Args>
  _Node * **_M_create_node** (_Args &&...__args)
- _Fwd_list_node_base * **_M_erase_after** (_Fwd_list_node_base *__pos)
- _Fwd_list_node_base * **_M_erase_after** (_Fwd_list_node_base *__pos, _Fwd_list_node_base *__last)
- _Node * **_M_get_node** ()
- _Node_alloc_type & **_M_get_Node_allocator** () noexcept
- const _Node_alloc_type & **_M_get_Node_allocator** () const noexcept
- template<typename... _Args>
  _Fwd_list_node_base * **_M_insert_after** (const_iterator __pos, _Args &&...__args)
- void **_M_put_node** (_Node *__p)

Private Attributes

- _Fwd_list_impl **_M_impl**

4.486.1 Detailed Description

template<typename _Tp, typename _Alloc = allocator<_Tp>>class std::forward_list< _Tp, _Alloc >

A standard container with linear time access to elements, and fixed time insertion/deletion at any point in the sequence.

Template Parameters

_Tp	Type of element.
_Alloc	Allocator type, defaults to allocator<_Tp>.

Meets the requirements of a `container`, a `sequence`, including the `optional sequence requirements` with the exception of `at` and `operator[]`.

This is a *singly linked* list. Traversal up the list requires linear time, but adding and removing elements (or *nodes*) is done in constant time, regardless of where the change takes place. Unlike std::vector and std::deque, random-access iterators are not provided, so subscripting ([]) access is not allowed. For algorithms which only need sequential access, this lack makes no difference.

Also unlike the other standard containers, std::forward_list provides specialized algorithms unique to linked lists, such as splicing, sorting, and in-place reversal.

Definition at line 423 of file forward_list.h.

4.486.2 Constructor & Destructor Documentation

4.486.2.1 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list ( ) [default]

Creates a forward_list with no elements.

4.486.2.2 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (const _Alloc & *__al*) [inline], [explicit], [noexcept]

Creates a forward_list with no elements.

Parameters

__al	An allocator object.

Definition at line 466 of file forward_list.h.

4.486.2.3 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (const forward_list< _Tp, _Alloc > & *__list,* const _Alloc & *__al*) [inline]

Copy constructor with allocator argument.

Parameters

__list	Input list to copy.
__al	An allocator object.

Definition at line 475 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::begin(), and std::forward_list< _Tp, _Alloc >::end().

4.486.2.4 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (forward_list< _Tp, _Alloc > && *__list,* const _Alloc & *__al*) [inline], [noexcept]

Move constructor with allocator argument.

Parameters

__list	Input list to move.
__al	An allocator object.

Definition at line 503 of file forward_list.h.

4.486.2.5 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (size_type *__n,* const _Alloc & *__al* = _Alloc()) [inline], [explicit]

Creates a forward_list with default constructed elements.

Parameters

__n	The number of elements to initially create.
__al	An allocator object.

This constructor creates the forward_list with *__n* default constructed elements.

Definition at line 518 of file forward_list.h.

4.486.2.6 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (size_type *__n*, const _Tp & *__value*, const _Alloc & *__al* = _Alloc()) [inline]

Creates a forward_list with copies of an exemplar element.

Parameters

__n	The number of elements to initially create.
__value	An element to copy.
__al	An allocator object.

This constructor fills the forward_list with *__n* copies of *__value*.

Definition at line 531 of file forward_list.h.

4.486.2.7 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> std::forward_list< _Tp, _Alloc >::forward_list (_InputIterator *__first*, _InputIterator *__last*, const _Alloc & *__al* = _Alloc()) [inline]

Builds a forward_list from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__al	An allocator object.

Create a forward_list consisting of copies of the elements from [*__first*,*__last*). This is linear in N (where N is distance(*__first*,*__last*)).

Definition at line 548 of file forward_list.h.

4.486.2.8 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (const forward_list< _Tp, _Alloc > & *__list*) [inline]

The forward_list copy constructor.

Parameters

__list	A forward_list of identical element and allocator types.

Definition at line 558 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::begin(), and std::forward_list< _Tp, _Alloc >::end().

4.486.2.9 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (forward_list< _Tp, _Alloc > &&) [default]

The forward_list move constructor.

Parameters

__list	A forward_list of identical element and allocator types.

The newly-created forward_list contains the exact contents of the moved instance. The contents of the moved instance are a valid, but unspecified forward_list.

4.486.2.10 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::forward_list (std::initializer_list< _Tp > *__il,* const _Alloc & *__al* = _Alloc()) [inline]

Builds a forward_list from an initializer_list.

Parameters

__il	An initializer_list of value_type.
__al	An allocator object.

Create a forward_list consisting of copies of the elements in the initializer_list *__il*. This is linear in __il.size().

Definition at line 582 of file forward_list.h.

4.486.2.11 template<typename _Tp, typename _Alloc = allocator<_Tp>> std::forward_list< _Tp, _Alloc >::~forward_list ( ) [inline], [noexcept]

The forward_list dtor.

Definition at line 590 of file forward_list.h.

4.486.3 Member Function Documentation

4.486.3.1 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void std::forward_list< _Tp, _Alloc >::assign (_InputIterator *__first,* _InputIterator *__last*) [inline]

Assigns a range to a forward_list.

Parameters

__first	An input iterator.
__last	An input iterator.

This function fills a forward_list with copies of the elements in the range [*__first*,*__last*).

Note that the assignment completely changes the forward_list and that the number of elements of the resulting forward_list is the same as the number of elements assigned.

Definition at line 658 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::assign(), and std::forward_list< _Tp, _Alloc >::operator=().

4.486.3.2 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::assign (size_type *__n,* const _Tp & *__val*) [inline]

Assigns a given value to a forward_list.

Parameters

__n	Number of elements to be assigned.
__val	Value to be assigned.

This function fills a forward_list with *__n* copies of the given value. Note that the assignment completely changes the forward_list, and that the resulting forward_list has __n elements.

Definition at line 675 of file forward_list.h.

4.486.3.3 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::assign (std::initializer_list< _Tp > __il) [inline]

Assigns an initializer_list to a forward_list.

Parameters

__il	An initializer_list of value_type.

Replace the contents of the forward_list with copies of the elements in the initializer_list *__il*. This is linear in il.size().

Definition at line 687 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::assign().

4.486.3.4 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::before_begin ( ) [inline], [noexcept]

Returns a read/write iterator that points before the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 702 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::insert_after().

4.486.3.5 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::before_begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points before the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 711 of file forward_list.h.

4.486.3.6 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 719 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::forward_list().

4.486.3.7 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 728 of file forward_list.h.

4.486.3.8 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::cbefore_begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points before the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 764 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::emplace_front(), and std::forward_list< _Tp, _Alloc >::push_front().

4.486.3.9 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the forward_list. Iteration is done in ordinary element order.

Definition at line 755 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::operator=(), and std::operator==().

4.486.3.10 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::cend ( ) const [inline],[noexcept]

Returns a read-only (constant) iterator that points one past the last element in the forward_list. Iteration is done in ordinary element order.

Definition at line 773 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::operator=(), and std::operator==().

4.486.3.11 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::clear ( ) [inline],[noexcept]

Erases all the elements.

Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1086 of file forward_list.h.

4.486.3.12 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename... _Args> iterator std::forward_list< _Tp, _Alloc >::emplace_after (const_iterator *__pos*, _Args &&... *__args*) [inline]

Constructs object in forward_list after the specified iterator.

Parameters

__pos	A const_iterator into the forward_list.
__args	Arguments.

Returns

An iterator that points to the inserted data.

This function will insert an object of type T constructed with T(std::forward<Args>(args)...) after the specified location. Due to the nature of a forward_list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 895 of file forward_list.h.

4.486.3.13 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename... _Args> void std::forward_list< _Tp, _Alloc >::emplace_front (_Args &&... *__args*) [inline]

Constructs object in forward_list at the front of the list.

Parameters

__args	Arguments.

This function will insert an object of type Tp constructed with Tp(std::forward<Args>(args)...) at the front of the list Due to the nature of a forward_list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 834 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::cbefore_begin(), and std::forward_list< _Tp, _Alloc >::front().

4.486.3.14 template<typename _Tp, typename _Alloc = allocator<_Tp>> bool std::forward_list< _Tp, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the forward_list is empty. (Thus begin() would equal end().)

Definition at line 781 of file forward_list.h.

4.486.3.15 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the forward_list. Iteration is done in ordinary element order.

Definition at line 737 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::forward_list(), and std::forward_list< _Tp, _Alloc >::insert_after().

4.486.3.16 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_iterator std::forward_list< _Tp, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only iterator that points one past the last element in the forward_list. Iteration is done in ordinary element order.

Definition at line 746 of file forward_list.h.

4.486.3.17 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::erase_after (const_iterator *__pos*) [inline]

Removes the element pointed to by the iterator following `pos`.

Parameters

__pos	Iterator pointing before element to be erased.

Returns

An iterator pointing to the element following the one that was erased, or end() if no such element exists.

This function will erase the element at the given position and thus shorten the forward_list by one.

Due to the nature of a forward_list this operation can be done in constant time, and only invalidates iterators/references to the element being removed. The user is also cautioned that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 998 of file forward_list.h.

4.486.3.18 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::erase_after (const_iterator *__pos*, const_iterator *__last*) [inline]

Remove a range of elements.

Parameters

__pos	Iterator pointing before the first element to be erased.
__last	Iterator pointing to one past the last element to be erased.

Returns

@ __last.

This function will erase the elements in the range (__pos,__last) and shorten the forward_list accordingly.

This operation is linear time in the size of the range and only invalidates iterators/references to the element being removed. The user is also cautioned that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1021 of file forward_list.h.

4.486.3.19 template<typename _Tp, typename _Alloc = allocator<_Tp>> reference std::forward_list< _Tp, _Alloc >::front ( ) [inline]

Returns a read/write reference to the data at the first element of the forward_list.

Definition at line 798 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::emplace_front().

4.486.3.20 template<typename _Tp, typename _Alloc = allocator<_Tp>> const_reference std::forward_list< _Tp, _Alloc >::front ( ) const [inline]

Returns a read-only (constant) reference to the data at the first element of the forward_list.

Definition at line 809 of file forward_list.h.

4.486.3.21 template<typename _Tp, typename _Alloc = allocator<_Tp>> allocator_type std::forward_list< _Tp, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Get a copy of the memory allocation object.

Definition at line 692 of file forward_list.h.

4.486.3.22 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::insert_after (const_iterator *__pos,* const _Tp & *__val*) [inline]

Inserts given value into forward_list after specified iterator.

Parameters

__pos	An iterator into the forward_list.
__val	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given value after the specified location. Due to the nature of a forward_list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 912 of file forward_list.h.

Referenced by std::forward_list< _Tp, _Alloc >::insert_after().

4.486.3.23 template<typename _Tp, typename _Alloc > forward_list< _Tp, _Alloc >::iterator forward_list::insert_after (const_iterator *__pos,* size_type *__n,* const _Tp & *__val*)

Inserts a number of copies of given data into the forward_list.

Parameters

__pos	An iterator into the forward_list.
__n	Number of elements to be inserted.
__val	Data to be inserted.

Returns

An iterator pointing to the last inserted copy of *val* or *pos* if *n* == 0.

This function will insert a specified number of copies of the given data after the location specified by *pos*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

Definition at line 256 of file forward_list.tcc.

References std::forward_list< _Tp, _Alloc >::before_begin(), and std::forward_list< _Tp, _Alloc >::end().

4.486.3.24 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> iterator std::forward_list< _Tp, _Alloc >::insert_after (const_iterator *__pos*, _InputIterator *__first*, _InputIterator *__last*)

Inserts a range into the forward_list.

Parameters

__pos	An iterator into the forward_list.
__first	An input iterator.
__last	An input iterator.

Returns

An iterator pointing to the last inserted element or *__pos* if *__first* == *__last*.

This function will insert copies of the data in the range [*__first*,*__last*) into the forward_list after the location specified by *__pos*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

4.486.3.25 template<typename _Tp, typename _Alloc = allocator<_Tp>> iterator std::forward_list< _Tp, _Alloc >::insert_after (const_iterator *__pos*, std::initializer_list< _Tp > *__il*) [inline]

Inserts the contents of an initializer_list into forward_list after the specified iterator.

Parameters

__pos	An iterator into the forward_list.
__il	An initializer_list of value_type.

Returns

An iterator pointing to the last inserted element or *__pos* if *__il* is empty.

This function will insert copies of the data in the initializer_list *__il* into the forward_list before the location specified by *__pos*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

Definition at line 977 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::insert_after().

4.486.3.26 template<typename _Tp, typename _Alloc = allocator<_Tp>> size_type std::forward_list< _Tp, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the largest possible number of elements of forward_list.

Definition at line 788 of file forward_list.h.

References std::allocator_traits< _Alloc >::max_size().

4.486.3.27 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::merge (forward_list< _Tp, _Alloc > && *__list*) [inline]

Merge sorted lists.

Parameters

__list	Sorted list to merge.

Assumes that both *list* and this list are sorted according to operator<(). Merges elements of *__list* into this list in sorted order, leaving *__list* empty when complete. Elements in this list precede elements in *__list* that are equal.

Definition at line 1242 of file forward_list.h.

References std::move().

4.486.3.28 template<typename _Tp , typename _Alloc > template<typename _Comp > void forward_list::merge (forward_list< _Tp, _Alloc > && *__list,* _Comp *__comp*)

Merge sorted lists according to comparison function.

Parameters

__list	Sorted list to merge.
__comp	Comparison function defining sort order.

Assumes that both *__list* and this list are sorted according to comp. Merges elements of *__list* into this list in sorted order, leaving *__list* empty when complete. Elements in this list precede elements in *__list* that are equivalent according to comp().

Definition at line 373 of file forward_list.tcc.

References std::move().

4.486.3.29 template<typename _Tp , typename _Alloc > forward_list< _Tp, _Alloc > & forward_list::operator= (const forward_list< _Tp, _Alloc > & *__list*)

The forward_list assignment operator.

Parameters

__list	A forward_list of identical element and allocator types.

All the elements of *__list* are copied.

Whether the allocator is copied depends on the allocator traits.

Definition at line 140 of file forward_list.tcc.

References std::__addressof(), std::forward_list< _Tp, _Alloc >::cbegin(), and std::forward_list< _Tp, _Alloc >::cend().

4.486.3.30 template<typename _Tp, typename _Alloc = allocator<_Tp>> forward_list& std::forward_list< _Tp, _Alloc >::operator= (forward_list< _Tp, _Alloc > && *__list*) [inline], [noexcept]

The forward_list move assignment operator.

Parameters

__list	A forward_list of identical element and allocator types.

The contents of *__list* are moved into this forward_list (without copying, if the allocators permit it).

Afterwards *__list* is a valid, but unspecified forward_list

Whether the allocator is moved depends on the allocator traits.

Definition at line 618 of file forward_list.h.

References std::move().

4.486.3.31 template<typename _Tp, typename _Alloc = allocator<_Tp>> forward_list& std::forward_list< _Tp, _Alloc >::operator= (std::initializer_list< _Tp > *__il*) [inline]

The forward_list initializer list assignment operator.

Parameters

__il	An initializer_list of value_type.

Replace the contents of the forward_list with copies of the elements in the initializer_list *__il*. This is linear in __il.size().

Definition at line 637 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::assign().

4.486.3.32 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::pop_front ( ) [inline]

Removes first element.

This is a typical stack operation. It shrinks the forward_list by one. Due to the nature of a forward_list this operation can be done in constant time, and only invalidates iterators/references to the element being removed.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop_front() is called.

Definition at line 877 of file forward_list.h.

4.486.3.33 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::push_front (const _Tp & *__val*) [inline]

Add data to the front of the forward_list.

Parameters

__val	Data to be added.

This is a typical stack operation. The function creates an element at the front of the forward_list and assigns the given data to it. Due to the nature of a forward_list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 854 of file forward_list.h.

References std::forward_list< _Tp, _Alloc >::cbefore_begin().

4.486.3.34 template<typename _Tp, typename _Alloc > auto forward_list::remove (const _Tp & *__val*)

Remove all elements equal to value.

Parameters

__val	The value to remove.

Removes every element in the list equal to *__val*. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 290 of file forward_list.tcc.

References std::__addressof().

4.486.3.35 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename _Pred > __remove_return_type std::forward_list< _Tp, _Alloc >::remove_if (_Pred *__pred*)

Remove all elements satisfying a predicate.

Parameters

__pred	Unary predicate function or object.

Removes every element in the list for which the predicate returns true. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.486.3.36 template<typename _Tp , typename _Alloc > void forward_list::resize (size_type *__sz*)

Resizes the forward_list to the specified number of elements.

Parameters

__sz	Number of elements the forward_list should contain.

This function will resize the forward_list to the specified number of elements. If the number is smaller than the forward_list's current number of elements the forward_list is truncated, otherwise the forward_list is extended and the new elements are default constructed.

Definition at line 182 of file forward_list.tcc.

References std::initializer_list< _E >::end().

4.486.3.37 template<typename _Tp , typename _Alloc > void forward_list::resize (size_type *__sz,* const value_type & *__val*)

Resizes the forward_list to the specified number of elements.

Parameters

__sz	Number of elements the forward_list should contain.
__val	Data with which new elements should be populated.

This function will resize the forward_list to the specified number of elements. If the number is smaller than the forward_list's current number of elements the forward_list is truncated, otherwise the forward_list is extended and new elements are populated with given data.

Definition at line 201 of file forward_list.tcc.

References std::initializer_list< _E >::end().

4.486.3.38 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::reverse ( ) [inline], [noexcept]

Reverse the elements in list.

Reverse the order of elements in the list in linear time.

Definition at line 1295 of file forward_list.h.

4.486.3.39 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::sort ( ) [inline]

Sort the elements of the list.

Sorts the elements of this list in NlogN time. Equivalent elements remain in list order.

Definition at line 1276 of file forward_list.h.

4.486.3.40 template<typename _Tp , class _Alloc > template<typename _Comp > void forward_list::sort (_Comp __comp)

Sort the forward_list using a comparison function.

Sorts the elements of this list in NlogN time. Equivalent elements remain in list order.

Definition at line 417 of file forward_list.tcc.

4.486.3.41 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::splice_after (const_iterator __pos, forward_list< _Tp, _Alloc > && __list) [inline], [noexcept]

Insert contents of another forward_list.

Parameters

__pos	Iterator referencing the element to insert after.
__list	Source list.

The elements of *list* are inserted in constant time after the element referenced by *pos*. *list* becomes an empty list.

Requires this != *x*.

Definition at line 1103 of file forward_list.h.

4.486.3.42 template<typename _Tp , typename _Alloc > void forward_list::splice_after (const_iterator __pos, forward_list< _Tp, _Alloc > && __list, const_iterator __i) [noexcept]

Insert element from another forward_list.

Parameters

__pos	Iterator referencing the element to insert after.
__list	Source list.
__i	Iterator referencing the element before the element to move.

Removes the element in list *list* referenced by *i* and inserts it into the current list after *pos*.

Definition at line 239 of file forward_list.tcc.

4.486.3.43 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::splice_after (const_iterator __pos, forward_list< _Tp, _Alloc > && , const_iterator __before, const_iterator __last) [inline], [noexcept]

Insert range from another forward_list.

Parameters

__pos	Iterator referencing the element to insert after.

__list	Source list.
__before	Iterator referencing before the start of range in list.
__last	Iterator referencing the end of range in list.

Removes elements in the range (__before,__last) and inserts them after *__pos* in constant time.

Undefined if *__pos* is in (__before,__last).

Definition at line 1147 of file forward_list.h.

4.486.3.44 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::splice_after (const_iterator *__pos,* forward_list< _Tp, _Alloc > & , const_iterator *__before,* const_iterator *__last*) [inline],[noexcept]

Insert range from another forward_list.

Parameters

__pos	Iterator referencing the element to insert after.
__list	Source list.
__before	Iterator referencing before the start of range in list.
__last	Iterator referencing the end of range in list.

Removes elements in the range (__before,__last) and inserts them after *__pos* in constant time.

Undefined if *__pos* is in (__before,__last).

Definition at line 1152 of file forward_list.h.

4.486.3.45 template<typename _Tp, typename _Alloc = allocator<_Tp>> void std::forward_list< _Tp, _Alloc >::swap (forward_list< _Tp, _Alloc > & *__list*) [inline],[noexcept]

Swaps data with another forward_list.

Parameters

__list	A forward_list of the same element and allocator types.

This exchanges the elements between two lists in constant time. Note that the global std::swap() function is specialized such that std::swap(l1,l2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 1040 of file forward_list.h.

4.486.3.46 template<typename _Tp, typename _Alloc = allocator<_Tp>> __remove_return_type std::forward_list< _Tp, _Alloc >::unique ( ) [inline]

Remove consecutive duplicate elements.

For each consecutive set of elements with the same value, remove all but the first one. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1211 of file forward_list.h.

4.486.3.47 template<typename _Tp, typename _Alloc = allocator<_Tp>> template<typename _BinPred > __remove_return_type std::forward_list< _Tp, _Alloc >::unique (_BinPred *__binary_pred*)

Remove consecutive elements satisfying a predicate.

Parameters

__binary_pred	Binary predicate function or object.

For each consecutive set of elements [first,last) that satisfy predicate(first,i) where i is an iterator in [first,last), remove all but the first one. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

The documentation for this class was generated from the following files:

- forward_list.h
- forward_list.tcc

4.487 std::fpos< _StateT > Class Template Reference

Public Member Functions

- fpos (streamoff __off)
- **fpos** (const fpos &)=default
- operator streamoff () const
- fpos operator+ (streamoff __off) const
- fpos & operator+= (streamoff __off)
- fpos operator- (streamoff __off) const
- streamoff operator- (const fpos &__other) const
- fpos & operator-= (streamoff __off)
- fpos & **operator=** (const fpos &)=default
- void state (_StateT __st)
- _StateT state () const

4.487.1 Detailed Description

template<typename _StateT>class std::fpos< _StateT >

Class representing stream positions.

The standard places no requirements upon the template parameter StateT. In this implementation StateT must be DefaultConstructible, CopyConstructible and Assignable. The standard only requires that fpos should contain a member of type StateT. In this implementation it also contains an offset stored as a signed integer.

Parameters

StateT	Type passed to and returned from state().

Definition at line 112 of file postypes.h.

4.487.2 Constructor & Destructor Documentation

4.487.2.1 template<typename _StateT> std::fpos< _StateT >::fpos (streamoff __off) [inline]

Construct position from offset.

Definition at line 133 of file postypes.h.

4.487.3 Member Function Documentation

4.487.3.1 template<typename _StateT> std::fpos< _StateT >::operator streamoff ( ) const [inline]

Convert to streamoff.

Definition at line 143 of file postypes.h.

4.487.3.2 template<typename _StateT> fpos std::fpos< _StateT >::operator+ (streamoff __off) const [inline]

Add position and offset.

Definition at line 184 of file postypes.h.

4.487.3.3 template<typename _StateT> fpos& std::fpos< _StateT >::operator+= (streamoff __off) [inline]

Add offset to this position.

Definition at line 160 of file postypes.h.

4.487.3.4 template<typename _StateT> fpos std::fpos< _StateT >::operator- (streamoff __off) const [inline]

Subtract offset from position.

Definition at line 198 of file postypes.h.

4.487.3.5 template<typename _StateT> streamoff std::fpos< _StateT >::operator- (const fpos< _StateT > & __other) const [inline]

Subtract position to return offset.

Definition at line 211 of file postypes.h.

4.487.3.6 template<typename _StateT> fpos& std::fpos< _StateT >::operator-= (streamoff __off) [inline]

Subtract offset from this position.

Definition at line 171 of file postypes.h.

4.487.3.7 template<typename _StateT> void std::fpos< _StateT >::state (_StateT __st) [inline]

Remember the value of *st*.

Definition at line 147 of file postypes.h.

4.487.3.8 template<typename _StateT> _StateT std::fpos< _StateT >::state ( ) const [inline]

Return the last set value of *st*.

Definition at line 152 of file postypes.h.

The documentation for this class was generated from the following file:

- postypes.h

4.488 __gnu_cxx::free_list Class Reference

Inheritance diagram for __gnu_cxx::free_list:

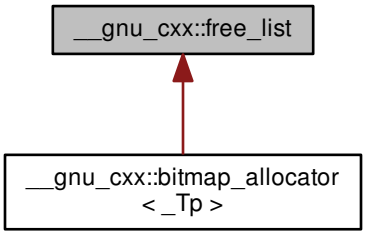

Public Types

- typedef __mutex **__mutex_type**
- typedef vector_type::iterator **iterator**
- typedef std::size_t * **value_type**
- typedef __detail::__mini_vector < value_type > **vector_type**

Public Member Functions

- void _M_clear ()
- std::size_t * _M_get (std::size_t __sz)
- void _M_insert (std::size_t *__addr) throw ()

4.488.1 Detailed Description

The free list class for managing chunks of memory to be given to and returned by the bitmap_allocator.

Definition at line 516 of file bitmap_allocator.h.

4.488.2 Member Function Documentation

4.488.2.1 void __gnu_cxx::free_list::_M_clear ( )

This function just clears the internal Free List, and gives back all the memory to the OS.

4.488.2.2 std::size_t* __gnu_cxx::free_list::_M_get (std::size_t *__sz*)

This function gets a block of memory of the specified size from the free list.

Parameters

__sz	The size in bytes of the memory required.

Returns

A pointer to the new memory block of size at least equal to that requested.

4.488.2.3 void __gnu_cxx::free_list::_M_insert (std::size_t * *__addr*) throw) [inline]

This function returns the block of memory to the internal free list.

Parameters

__addr	The pointer to the memory block that was given by a call to the _M_get function.

Definition at line 626 of file bitmap_allocator.h.

Referenced by __gnu_cxx::bitmap_allocator< _Tp >::_M_deallocate_single_object().

The documentation for this class was generated from the following file:

- bitmap_allocator.h

4.489 std::from_chars_result Struct Reference

Public Attributes

- errc **ec**
- const char * **ptr**

4.489.1 Detailed Description

Result type of std::from_chars.

Definition at line 67 of file charconv.

The documentation for this struct was generated from the following file:

- charconv

4.490 std::front_insert_iterator< _Container > Class Template Reference

Inheritance diagram for std::front_insert_iterator< _Container >:



Public Types

- typedef _Container container_type
- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

Public Member Functions

- constexpr front_insert_iterator (_Container &__x)
- constexpr front_insert_iterator & operator* ()
- constexpr front_insert_iterator & operator++ ()
- constexpr front_insert_iterator operator++ (int)
- constexpr front_insert_iterator & operator= (const typename _Container::value_type &__value)
- constexpr front_insert_iterator & **operator=** (typename _Container::value_type &&__value)

Protected Attributes

- _Container * **container**

4.490.1 Detailed Description

template<typename _Container>class std::front_insert_iterator< _Container >

Turns assignment into insertion.

These are output iterators, constructed from a container-of-T. Assigning a T to the iterator prepends it to the container using push_front.

Tip: Using the front_inserter function to create these iterators can save typing.

Definition at line 699 of file bits/stl_iterator.h.

4.490.2 Member Typedef Documentation

4.490.2.1 template<typename _Container > typedef _Container std::front_insert_iterator< _Container >::container_type

A nested typedef for the type of whatever container you used.

Definition at line 707 of file bits/stl_iterator.h.

4.490.2.2 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.490.2.3 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.490.2.4 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.490.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.490.2.6 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.490.3 Constructor & Destructor Documentation

4.490.3.1 template<typename _Container > constexpr std::front_insert_iterator< _Container >::front_insert_iterator (_Container & __x) [inline], [explicit]

The only way to create this iterator is with a container.

Definition at line 716 of file bits/stl_iterator.h.

4.490.4 Member Function Documentation

4.490.4.1 template<typename _Container > constexpr front_insert_iterator& std::front_insert_iterator< _Container >::operator* ( ) [inline]

Simply returns *this.

Definition at line 758 of file bits/stl_iterator.h.

4.490.4.2 template<typename _Container > constexpr front_insert_iterator& std::front_insert_iterator< _Container >::operator++ ( ) [inline]

Simply returns ∗this. (This iterator does not *move*.)

Definition at line 764 of file bits/stl_iterator.h.

4.490.4.3 template<typename _Container > constexpr front_insert_iterator std::front_insert_iterator< _Container >::operator++ (int) [inline]

Simply returns ∗this. (This iterator does not *move*.)

Definition at line 770 of file bits/stl_iterator.h.

4.490.4.4 template<typename _Container > constexpr front_insert_iterator& std::front_insert_iterator< _Container >::operator= (const typename _Container::value_type & *__value*) [inline]

Parameters

__value	An instance of whatever type container_type::const_reference is; presumably a reference-to-const T for container<T>.

Returns

This iterator, for chained operations.

This kind of iterator doesn't really have a *position* in the container (you can think of the position as being permanently at the front, if you like). Assigning a value to the iterator will always prepend the value to the front of the container.

Definition at line 740 of file bits/stl_iterator.h.

The documentation for this class was generated from the following file:

- bits/stl_iterator.h

4.491 std::function< _Res(_ArgTypes...)> Class Template Reference

Inheritance diagram for std::function< _Res(_ArgTypes...)>:



Public Types

- typedef _Res **result_type**

Public Member Functions

- function () noexcept
- function (nullptr_t) noexcept
- function (const function &__x)
- function (function &&__x) noexcept
- template<typename _Functor , typename = _Requires<__not_<is_same<_Functor, function>>, void>, typename = _Requires<_-Callable<_Functor>, void>>
  function (_Functor)
- operator bool () const noexcept
- _Res operator() (_ArgTypes...__args) const
- function & operator= (const function &__x)
- function & operator= (function &&__x) noexcept
- function & operator= (nullptr_t) noexcept
- template<typename _Functor >
  _Requires< _Callable< typename
  decay< _Functor >::type >
  , function & > operator= (_Functor &&__f)
- template<typename _Functor >
  function & operator= (reference_wrapper< _Functor > __f) noexcept
- void swap (function &__x) noexcept
- const type_info & target_type () const noexcept

- template<typename _Functor >
  _Functor * target () noexcept
- template<typename _Functor >
  const _Functor * target () const noexcept

Private Types

- typedef bool(* **_Manager_type**)(_Any_data &, const _Any_data &, _Manager_operation)

Private Member Functions

- bool **_M_empty** () const

Private Attributes

- _Any_data **_M_functor**
- _Manager_type **_M_manager**

Static Private Attributes

- static const size_t **_M_max_align**
- static const size_t **_M_max_size**

4.491.1 Detailed Description

template<typename _Res, typename... _ArgTypes>class std::function< _Res(_ArgTypes...)>

Primary class template for std::function.

Polymorphic function wrapper.

Definition at line 303 of file std_function.h.

4.491.2 Constructor & Destructor Documentation

4.491.2.1 template<typename _Res , typename... _ArgTypes> std::function< _Res(_ArgTypes...)>::function ( ) [inline], [noexcept]

Default construct creates an empty function call wrapper.

Postcondition

! (bool)*this

Definition at line 330 of file std_function.h.

4.491.2.2 template<typename _Res , typename... _ArgTypes> std::function< _Res(_ArgTypes...)>::function (nullptr_t) [inline], [noexcept]

Creates an empty function call wrapper.

Postcondition

! (bool)*this

Definition at line 337 of file std_function.h.

4.491.2.3 template<typename _Res , typename... _ArgTypes> std::function< _Res(_ArgTypes...)>::function (const function< _Res(_ArgTypes...)> & __x)

Function copy constructor.

Parameters

__x	A function object with identical call signature.

Postcondition

`bool(*this)` == bool(__x)

The newly-created function contains a copy of the target of __x (if it has one).

Definition at line 588 of file std_function.h.

4.491.2.4 template<typename _Res , typename... _ArgTypes> std::function< _Res(_ArgTypes...)>::function (function< _Res(_ArgTypes...)> && __x) [inline], [noexcept]

Function move constructor.

Parameters

__x	A function object rvalue with identical call signature.

The newly-created function contains the target of *__x* (if it has one).

Definition at line 357 of file std_function.h.

4.491.2.5 template<typename _Res , typename... _ArgTypes> template<typename _Functor , typename , typename > std::function< _Res(_ArgTypes...)>::function (_Functor __f)

Builds a function that targets a copy of the incoming function object.

Parameters

__f	A function object that is callable with parameters of type `T1`, `T2`, ..., `TN` and returns a value convertible to `Res`.

The newly-created function object will target a copy of *__f*. If *__f* is `reference_wrapper<F>`, then this function object will contain a reference to the function object `__f.get()`. If *__f* is a NULL function pointer or NULL pointer-to-member, the newly-created object will be empty.

If *__f* is a non-NULL function pointer or an object of type `reference_wrapper<F>`, this function will not throw.

Definition at line 602 of file std_function.h.

References std::move().

4.491.3 Member Function Documentation

4.491.3.1 template<typename _Res , typename... _ArgTypes> std::function< _Res(_ArgTypes...)>::operator bool ( ) const [inline],[explicit],[noexcept]

Determine if the function wrapper has a target.

Returns

`true` when this function object contains a target, or `false` when it is empty.

This function will not throw an exception.

Definition at line 498 of file std_function.h.

4.491.3.2 template<typename _Res , typename... _ArgTypes> _Res std::function< _Res(_ArgTypes...)>::operator() (_ArgTypes... *__args*) const

Invokes the function targeted by `*this`.

Returns

the result of the target.

Exceptions

bad_function_call	when !(bool)*this

The function call operator invokes the target function object stored by `this`.

Definition at line 618 of file std_function.h.

4.491.3.3 template<typename _Res , typename... _ArgTypes> function& std::function< _Res(_ArgTypes...)>::operator= (const function< _Res(_ArgTypes...)> & __x) [inline]

Function assignment operator.

Parameters

__x	A function with identical call signature.

Postcondition

(bool)*this == (bool)x

Returns

*this

The target of *__x* is copied to *this. If *__x* has no target, then *this will be empty.

If *__x* targets a function pointer or a reference to a function object, then this operation will not throw an exception.

Definition at line 396 of file std_function.h.

4.491.3.4 template<typename _Res , typename... _ArgTypes> function& std::function< _Res(_ArgTypes...)>::operator= (function< _Res(_ArgTypes...)> && *__x*) [inline], [noexcept]

Function move-assignment operator.

Parameters

__x	A function rvalue with identical call signature.

Returns

*this

The target of *__x* is moved to *this. If *__x* has no target, then *this will be empty.

If *__x* targets a function pointer or a reference to a function object, then this operation will not throw an exception.

Definition at line 414 of file std_function.h.

References std::move().

4.491.3.5 template<typename _Res , typename... _ArgTypes> function& std::function< _Res(_ArgTypes...)>::operator= (nullptr_t) [inline], [noexcept]

Function assignment to zero.

Postcondition

! (bool)*this

Returns

*this

The target of *this is deallocated, leaving it empty.

Definition at line 428 of file std_function.h.

4.491.3.6 template<typename _Res , typename... _ArgTypes> template<typename _Functor > _Requires<_Callable<typename decay<_Functor>::type>, function&> std::function< _Res(_ArgTypes...)>::operator= (_Functor && *__f*) [inline]

Function assignment to a new target.

Parameters

__f	A function object that is callable with parameters of type `T1`, `T2`, ..., `TN` and returns a value convertible to `Res`.

Returns

`*this`

This function object wrapper will target a copy of *__f*. If *__f* is `reference_wrapper<F>`, then this function object will contain a reference to the function object `__f.get()`. If *__f* is a NULL function pointer or NULL pointer-to-member, `this` object will be empty.

If *__f* is a non-NULL function pointer or an object of type `reference_wrapper<F>`, this function will not throw.

Definition at line 457 of file std_function.h.

4.491.3.7 template<typename _Res , typename... _ArgTypes> template<typename _Functor > function& std::function< _Res(_ArgTypes...)>::operator= (reference_wrapper< _Functor > __f) [inline], [noexcept]

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

Definition at line 466 of file std_function.h.

4.491.3.8 template<typename _Res , typename... _ArgTypes> void std::function< _Res(_ArgTypes...)>::swap (function< _Res(_ArgTypes...)> & __x) [inline], [noexcept]

Swap the targets of two function objects.

Parameters

__x	A function with identical call signature.

Swap the targets of `this` function object and *__f*. This function will not throw an exception.

Definition at line 481 of file std_function.h.

4.491.3.9 template<typename _Res , typename... _ArgTypes> template<typename _Functor > _Functor * std::function< _Res(_ArgTypes...)>::target ( ) [noexcept]

Access the stored target function object.

Returns

Returns a pointer to the stored target function object, if `typeid(_Functor)`.equals(target_type()); otherwise, a NULL pointer.

This function does not throw exceptions.

Definition at line 645 of file std_function.h.

4.491.3.10 template<typename _Res , typename... _ArgTypes> template<typename _Functor > const _Functor * std::function< _Res(_ArgTypes...)>::target ( ) const [noexcept]

Access the stored target function object.

Returns

Returns a pointer to the stored target function object, if `typeid(_Functor)`.equals(target_type()); otherwise, a NULL pointer.

This function does not throw exceptions.

Definition at line 656 of file std_function.h.

4.491.3.11 template<typename _Res , typename... _ArgTypes> const type_info & std::function< _Res(_ArgTypes...)>::target_type ( ) const [noexcept]

Determine the type of the target of this function object wrapper.

Returns

the type identifier of the target function object, or `typeid(void)` if ! (bool)*this.

This function will not throw an exception.

Definition at line 629 of file std_function.h.

The documentation for this class was generated from the following file:

- std_function.h

4.492 std::future< _Res > Class Template Reference

Inheritance diagram for std::future< _Res >:

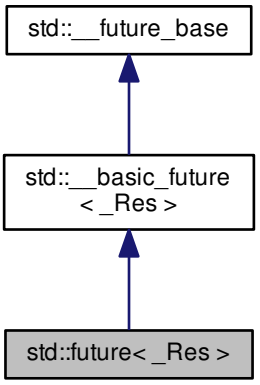

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- future (future &&__uf) noexcept
- **future** (const future &)=delete
- _Res get ()
- future & **operator=** (const future &)=delete
- future & **operator=** (future &&__fut) noexcept
- shared_future< _Res > **share** () noexcept
- bool **valid** () const noexcept
- void **wait** () const
- template<typename _Rep , typename _Period >
  future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- template<typename _Clock , typename _Duration >
  future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < _Res > & **__result_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

Friends

- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > **async** (launch, _Fn &&, _Args &&...)
- template<typename >
  class **packaged_task**
- class **promise**< **_Res** >

4.492.1 Detailed Description

template<typename _Res>class std::future< _Res >

Primary template for future.

Definition at line 125 of file future.

4.492.2 Member Typedef Documentation

4.492.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.492.3 Constructor & Destructor Documentation

4.492.3.1 template<typename _Res > std::future< _Res >::future (future< _Res > && *__uf*) [inline], [noexcept]

Move constructor.

Definition at line 782 of file future.

4.492.4 Member Function Documentation

4.492.4.1 template<typename _Res> __result_type std::__basic_future< _Res >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

Referenced by std::future< _Res >::get(), std::future< _Res & >::get(), std::future< void >::get(), std::shared_future< _Res >::get(), and std::shared_future< _Res & >::get().

4.492.4.2 template<typename _Res > _Res std::future< _Res >::get ( ) [inline]

Retrieving the value.

Definition at line 796 of file future.

References std::__basic_future< _Res >::_M_get_result(), and std::move().

The documentation for this class was generated from the following file:

- future

4.493 std::future< _Res & > Class Template Reference

Inheritance diagram for std::future< _Res & >:

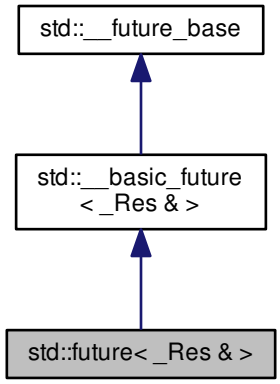

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- future (future &&__uf) noexcept
- **future** (const future &)=delete
- _Res & get ()
- future & **operator=** (const future &)=delete
- future & **operator=** (future &&__fut) noexcept
- shared_future< _Res & > **share** () noexcept
- bool **valid** () const noexcept
- void **wait** () const
- future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)

- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < _Res & > & **__result_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

Friends

- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > **async** (launch, _Fn &&, _Args &&...)
- template<typename >
  class **packaged_task**
- class **promise**< **_Res &** >

4.493.1 Detailed Description

template<typename _Res>class std::future< _Res & >

Partial specialization for future<R&>

Definition at line 807 of file future.

4.493.2 Member Typedef Documentation

4.493.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.493.3 Constructor & Destructor Documentation

4.493.3.1 template<typename _Res > std::future< _Res & >::future (future< _Res & > && __uf) [inline], [noexcept]

Move constructor.

Definition at line 825 of file future.

4.493.4 Member Function Documentation

4.493.4.1 __result_type std::__basic_future< _Res & >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

References std::rethrow_exception().

4.493.4.2 template<typename _Res > _Res& std::future< _Res & >::get ( ) [inline]

Retrieving the value.

Definition at line 839 of file future.

References std::__basic_future< _Res >::_M_get_result().

The documentation for this class was generated from the following file:

- future

4.494 std::future< void > Class Template Reference

Inheritance diagram for std::future< void >:

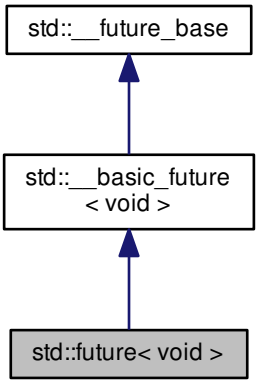

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- future (future &&__uf) noexcept
- **future** (const future &)=delete
- void get ()
- future & **operator=** (const future &)=delete
- future & **operator=** (future &&__fut) noexcept
- shared_future< void > **share** () noexcept
- bool **valid** () const noexcept
- void **wait** () const
- future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < void > & **__result_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

Friends

- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn, _Args...> > **async** (launch, _Fn &&, _Args &&...)
- template<typename >
  class **packaged_task**
- class **promise< void >**

4.494.1 Detailed Description

template<>class std::future< void >

Explicit specialization for future<void>

Definition at line 850 of file future.

4.494.2 Member Typedef Documentation

4.494.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.494.3 Constructor & Destructor Documentation

4.494.3.1 std::future< void >::future (future< void > && *__uf*) [inline], [noexcept]

Move constructor.

Definition at line 868 of file future.

4.494.4 Member Function Documentation

4.494.4.1 __result_type std::__basic_future< void >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

4.494.4.2 void std::future< void >::get ( ) [inline]

Retrieving the value.

Definition at line 882 of file future.

References std::__basic_future< _Res >::_M_get_result().

The documentation for this class was generated from the following file:

- future

4.495 std::future_error Class Reference

Inheritance diagram for std::future_error:

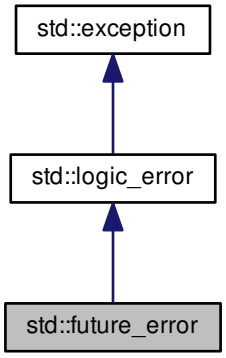

Public Member Functions

- **future_error** (future_errc __errc)
- const error_code & **code** () const noexcept
- virtual const char * what () const noexcept

Friends

- void **__throw_future_error** (int)

4.495.1 Detailed Description

Exception type thrown by futures.

Definition at line 96 of file future.

4.495.2 Member Function Documentation

4.495.2.1 virtual const char* std::future_error::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::logic_error.

The documentation for this class was generated from the following file:

- future

4.496 std::gamma_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- gamma_distribution ()
- gamma_distribution (_RealType __alpha_val, _RealType __beta_val=_RealType(1))
- **gamma_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType alpha () const
- _RealType beta () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  gamma_distribution< _RealType >
  ::result_type operator() (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::gamma_distribution< _RealType1 > &__x)
- bool operator== (const gamma_distribution &__d1, const gamma_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::gamma_distribution< _RealType1 > &__x)

4.496.1 Detailed Description

template<typename _RealType = double>class std::gamma_distribution< _RealType >

A gamma continuous distribution for random numbers.

The formula for the gamma probability density function is:

$$p(x|\alpha,\beta) = \frac{1}{\beta\Gamma(\alpha)}(x/\beta)^{\alpha-1}e^{-x/\beta}$$

Definition at line 2393 of file random.h.

4.496.2 Member Typedef Documentation

4.496.2.1 template<typename _RealType = double> typedef _RealType std::gamma_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 2396 of file random.h.

4.496.3 Constructor & Destructor Documentation

4.496.3.1 template<typename _RealType = double> std::gamma_distribution< _RealType >::gamma_distribution ( ) [inline]

Constructs a gamma distribution with parameters 1 and 1.

Definition at line 2449 of file random.h.

4.496.3.2 template<typename _RealType = double> std::gamma_distribution< _RealType >::gamma_distribution (_RealType *__alpha_val,* _RealType *__beta_val* = _RealType(1)) [inline],[explicit]

Constructs a gamma distribution with parameters α and β.

Definition at line 2456 of file random.h.

4.496.4 Member Function Documentation

4.496.4.1 template<typename _RealType = double> _RealType std::gamma_distribution< _RealType >::alpha ( ) const [inline]

Returns the α of the distribution.

Definition at line 2477 of file random.h.

4.496.4.2 template<typename _RealType = double> _RealType std::gamma_distribution< _RealType >::beta ( ) const [inline]

Returns the β of the distribution.

Definition at line 2484 of file random.h.

4.496.4.3 template<typename _RealType = double> result_type std::gamma_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 2513 of file random.h.

4.496.4.4 template<typename _RealType = double> result_type std::gamma_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 2506 of file random.h.

4.496.4.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > gamma_distribution<_RealType>::result_type std::gamma_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng,* const param_type & *__param*)

Marsaglia, G. and Tsang, W. W. "A Simple Method for Generating Gamma Variables" ACM Transactions on Mathematical Software, 26, 3, 363-372, 2000.

Definition at line 2321 of file bits/random.tcc.

References std::log(), and std::pow().

4.496.4.6 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::gamma_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 2521 of file random.h.

Referenced by std::gamma_distribution< result_type >::operator()().

4.496.4.7 template<typename _RealType = double> param_type std::gamma_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 2491 of file random.h.

Referenced by std::chi_squared_distribution< _RealType >::param().

4.496.4.8 template<typename _RealType = double> void std::gamma_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 2499 of file random.h.

4.496.4.9 template<typename _RealType = double> void std::gamma_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 2470 of file random.h.

Referenced by std::chi_squared_distribution< _RealType >::reset(), std::fisher_f_distribution< _RealType >::reset(), std::student_t_distribution< _RealType >::reset(), and std::negative_binomial_distribution< _IntType >::reset().

4.496.5 Friends And Related Function Documentation

4.496.5.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::gamma_distribution< _RealType1 > & __x) [friend]

Inserts a gamma_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A gamma_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.496.5.2 template<typename _RealType = double> bool operator== (const gamma_distribution< _RealType > & *__d1*, const gamma_distribution< _RealType > & *__d2*) [friend]

Return true if two gamma distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 2557 of file random.h.

4.496.5.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::gamma_distribution< _RealType1 > & *__x*) [friend]

Extracts a gamma_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A gamma_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.497 std::geometric_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- **geometric_distribution** (double __p)
- **geometric_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  geometric_distribution
  < _IntType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- double p () const
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const geometric_distribution &__d1, const geometric_distribution &__d2)

4.497.1 Detailed Description

template<typename _IntType = int>class std::geometric_distribution< _IntType >

A discrete geometric random number distribution.

The formula for the geometric probability density function is $p(i|p) = p(1-p)^i$ where p is the parameter of the distribution.

Definition at line 3969 of file random.h.

4.497.2 Member Typedef Documentation

4.497.2.1 template<typename _IntType = int> typedef _IntType std::geometric_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 3972 of file random.h.

4.497.3 Member Function Documentation

4.497.3.1 template<typename _IntType = int> result_type std::geometric_distribution< _IntType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 4071 of file random.h.

References std::numeric_limits< _Tp >::max().

4.497.3.2 template<typename _IntType = int> result_type std::geometric_distribution< _IntType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 4064 of file random.h.

4.497.3.3 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::geometric_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 4079 of file random.h.

4.497.3.4 template<typename _IntType = int> double std::geometric_distribution< _IntType >::p ( ) const [inline]

Returns the distribution parameter p.

Definition at line 4042 of file random.h.

4.497.3.5 template<typename _IntType = int> param_type std::geometric_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 4049 of file random.h.

Referenced by std::operator>>().

4.497.3.6 template<typename _IntType = int> void std::geometric_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 4057 of file random.h.

4.497.3.7 template<typename _IntType = int> void std::geometric_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Does nothing for the geometric distribution.

Definition at line 4036 of file random.h.

4.497.4 Friends And Related Function Documentation

4.497.4.1 template<typename _IntType = int> bool operator== (const geometric_distribution< _IntType > & *__d1*, const geometric_distribution< _IntType > & *__d2*) [friend]

Return true if two geometric distributions have the same parameters.

Definition at line 4114 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.498 __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >:

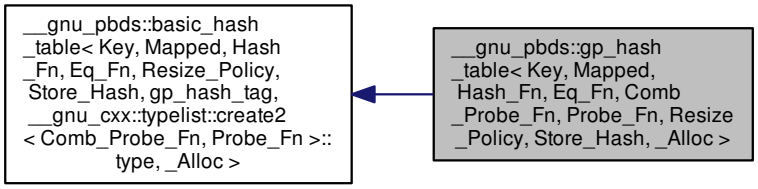

Public Types

- typedef Comb_Probe_Fn **comb_probe_fn**
- typedef gp_hash_tag **container_category**
- typedef Eq_Fn **eq_fn**
- typedef Hash_Fn **hash_fn**
- typedef Probe_Fn **probe_fn**
- typedef Resize_Policy **resize_policy**

Public Member Functions

- gp_hash_table ()
- gp_hash_table (const hash_fn &h)
- gp_hash_table (const hash_fn &h, const eq_fn &e)
- gp_hash_table (const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp)
- gp_hash_table (const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp, const probe_fn &p)
- gp_hash_table (const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp, const probe_fn &p, const resize_policy &rp)

- template<typename It >
  gp_hash_table (It first, It last)
- template<typename It >
  gp_hash_table (It first, It last, const hash_fn &h)
- template<typename It >
  gp_hash_table (It first, It last, const hash_fn &h, const eq_fn &e)
- template<typename It >
  gp_hash_table (It first, It last, const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp)
- template<typename It >
  gp_hash_table (It first, It last, const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp, const probe_fn &p)
- template<typename It >
  gp_hash_table (It first, It last, const hash_fn &h, const eq_fn &e, const comb_probe_fn &cp, const probe_fn &p, const resize_policy &rp)
- **gp_hash_table** (const gp_hash_table &other)
- gp_hash_table & **operator=** (const gp_hash_table &other)
- void **swap** (gp_hash_table &other)

4.498.1 Detailed Description

template<typename Key, typename Mapped, typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>>class __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >

A general-probing hash-based associative container.

Template Parameters

Key	Key type.
Mapped	Map type.
Hash_Fn	Hashing functor.
Eq_Fn	Equal functor.
Comb_Probe_Fn	Combining probe functor. If Hash_Fn is not null_type, then this is the ranged-probe functor; otherwise, this is the range-hashing functor. XXX See Design::Hash-Based Containers::Hash Policies.
Probe_Fn	Probe functor.
Resize_Policy	Resizes hash.
Store_Hash	Indicates whether the hash value will be stored along with each key. If Hash_Fn is null_type, then the container will not compile if this value is true
_Alloc	Allocator type.

Base tag choices are: gp_hash_tag.

Base is basic_hash_table.

Definition at line 368 of file assoc_container.hpp.

4.498.2 Constructor & Destructor Documentation

4.498.2.1 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table ( ) [inline]

Default constructor.

Definition at line 382 of file assoc_container.hpp.

4.498.2.2 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (const hash_fn & *h*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object.

Definition at line 386 of file assoc_container.hpp.

4.498.2.3 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (const hash_fn & *h,* const eq_fn & *e*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, and r_eq_fn will be copied by the eq_fn object of the container object.

Definition at line 393 of file assoc_container.hpp.

4.498.2.4 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, and r_comb_probe_fn will be copied by the comb_probe_fn object of the container object.

Definition at line 401 of file assoc_container.hpp.

4.498.2.5 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp,* const probe_fn & *p*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_probe_fn will be copied by the comb_probe_fn object of the container object, and r_probe_fn will be copied by the probe_fn object of the container object.

Definition at line 410 of file assoc_container.hpp.

4.498.2.6 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp,* const probe_fn & *p,* const resize_policy & *rp*) [inline]

Constructor taking some policy objects. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_probe_fn will be copied by the comb_probe_fn object of the container object, r_probe_fn will be copied by the probe_fn object of the container object, and r_resize_policy will be copied by the Resize_Policy object of the container object.

Definition at line 422 of file assoc_container.hpp.

4.498.2.7 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 430 of file assoc_container.hpp.

4.498.2.8 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last,* const hash_fn & *h*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object.

Definition at line 438 of file assoc_container.hpp.

4.498.2.9 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, and r_eq_fn will be copied by the eq_fn object of the container object.

Definition at line 449 of file assoc_container.hpp.

4.498.2.10 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, and r_comb_probe_fn will be copied by the comb_probe_fn object of the container object.

Definition at line 461 of file assoc_container.hpp.

4.498.2.11 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp,* const probe_fn & *p*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_probe_fn will be copied by the comb_probe_fn object of the container object, and r_probe_fn will be copied by the probe_fn object of the container object.

Definition at line 475 of file assoc_container.hpp.

4.498.2.12 template<typename Key , typename Mapped , typename Hash_Fn = typename detail::default_hash_fn<Key>::type, typename Eq_Fn = typename detail::default_eq_fn<Key>::type, typename Comb_Probe_Fn = detail::default_comb_hash_fn::type, typename Probe_Fn = typename detail::default_probe_fn<Comb_Probe_Fn>::type, typename Resize_Policy = typename detail::default_resize_policy<Comb_Probe_Fn>::type, bool Store_Hash = detail::default_store_hash, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >::gp_hash_table (It *first,* It *last,* const hash_fn & *h,* const eq_fn & *e,* const comb_probe_fn & *cp,* const probe_fn & *p,* const resize_policy & *rp*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object. r_hash_fn will be copied by the hash_fn object of the container

object, r_eq_fn will be copied by the eq_fn object of the container object, r_comb_probe_fn will be copied by the comb-_probe_fn object of the container object, r_probe_fn will be copied by the probe_fn object of the container object, and r_resize_policy will be copied by the resize_policy object of the container object.

Definition at line 491 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.499 __gnu_pbds::gp_hash_tag Struct Reference

Inheritance diagram for __gnu_pbds::gp_hash_tag:

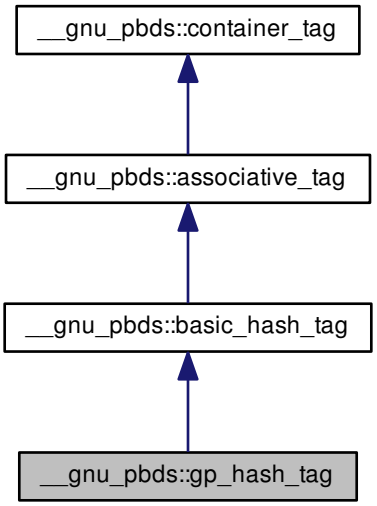

4.499.1 Detailed Description

General-probing hash.

Definition at line 144 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.500 __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >:

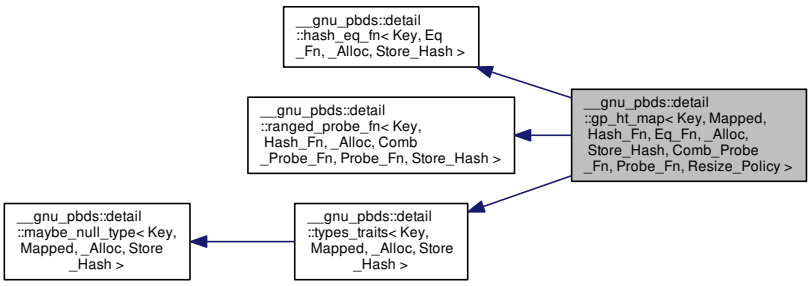

Public Types

- enum { **store_hash** }
- typedef _Alloc **allocator_type**
- typedef Comb_Probe_Fn **comb_probe_fn**
- typedef const_iterator_ **const_iterator**
- typedef traits_base::const_pointer **const_pointer**
- typedef traits_base::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef Eq_Fn **eq_fn**
- typedef Hash_Fn **hash_fn**
- typedef iterator_ **iterator**
- typedef traits_base::key_const_pointer **key_const_pointer**
- typedef traits_base::key_const_reference **key_const_reference**
- typedef traits_base::key_pointer **key_pointer**
- typedef traits_base::key_reference **key_reference**
- typedef traits_base::key_type **key_type**
- typedef traits_base::mapped_const_pointer **mapped_const_pointer**
- typedef traits_base::mapped_const_reference **mapped_const_reference**
- typedef traits_base::mapped_pointer **mapped_pointer**
- typedef traits_base::mapped_reference **mapped_reference**
- typedef traits_base::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef point_const_iterator_ **point_const_iterator**
- typedef point_iterator_ **point_iterator**

- typedef traits_base::pointer **pointer**
- typedef Probe_Fn **probe_fn**
- typedef traits_base::reference **reference**
- typedef Resize_Policy **resize_policy**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef traits_base::value_type **value_type**

Public Member Functions

- **gp_ht_map** (const gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy > &)
- **gp_ht_map** (const Hash_Fn &)
- **gp_ht_map** (const Hash_Fn &, const Eq_Fn &)
- **gp_ht_map** (const Hash_Fn &, const Eq_Fn &, const Comb_Probe_Fn &)
- **gp_ht_map** (const Hash_Fn &, const Eq_Fn &, const Comb_Probe_Fn &, const Probe_Fn &)
- **gp_ht_map** (const Hash_Fn &, const Eq_Fn &, const Comb_Probe_Fn &, const Probe_Fn &, const Resize_Policy &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- template<typename It > void **copy_from_range** (It, It)
- bool empty () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- template<typename Pred > gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy > ::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference)
- point_const_iterator **find** (key_const_reference) const
- point_iterator **find_end** ()
- point_const_iterator **find_end** () const
- Comb_Probe_Fn & get_comb_probe_fn ()
- const Comb_Probe_Fn & get_comb_probe_fn () const
- Eq_Fn & get_eq_fn ()
- const Eq_Fn & get_eq_fn () const
- Hash_Fn & get_hash_fn ()
- const Hash_Fn & get_hash_fn () const
- Probe_Fn & get_probe_fn ()
- const Probe_Fn & get_probe_fn () const

- Resize_Policy & get_resize_policy ()
- const Resize_Policy & get_resize_policy () const
- std::pair< point_iterator, bool > **insert** (const_reference r_val)
- size_type **max_size** () const
- mapped_reference **operator[]** (key_const_reference r_key)
- size_type **size** () const
- void **swap** (gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy > &)

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Friends

- class **const_iterator_**
- class **iterator_**

4.500.1 Detailed Description

template<typename Key, typename Mapped, typename Hash_Fn, typename Eq_Fn, typename _Alloc, bool Store_Hash, typename Comb_Probe_Fn, typename Probe_Fn, typename Resize_Policy>class __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >

A general-probing hash-based container.

Template Parameters

Key	Key type.
Mapped	Map type.
Hash_Fn	Hashing functor. Default is __gnu_cxx::hash.
Eq_Fn	Equal functor. Default std::equal_to<Key>
_Alloc	Allocator type.
Store_Hash	If key type stores extra metadata. Defaults to false.
Comb_Probe_Fn	Combining probe functor. If Hash_Fn is not null_type, then this is the ranged-probe functor; otherwise, this is the range-hashing functor. XXX See Design::Hash-Based Containers::Hash Policies. Default direct_mask_range_hashing.
Probe_Fn	Probe functor. Defaults to linear_probe_fn, also quadratic_probe_fn.
Resize_Policy	Resizes hash. Defaults to hash_standard_resize_policy, using hash_exponential_size_policy and hash_load_check_resize_trigger.

Bases are: detail::hash_eq_fn, Resize_Policy, detail::ranged_probe_fn, detail::types_traits. (Optional: detail::debug_map_base.)

Definition at line 142 of file gp_ht_map_.hpp.

4.500.2 Member Enumeration Documentation

4.500.2.1 template<typename Key, typename Mapped, typename Hash_Fn, typename Eq_Fn, typename _Alloc, bool Store_Hash, typename Comb_Probe_Fn, typename Probe_Fn, typename Resize_Policy> anonymous enum

Value stores hash, true or false.

Definition at line 209 of file gp_ht_map_.hpp.

4.500.3 Member Function Documentation

4.500.3.1 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > bool __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::empty ( ) const [inline]

True if size() == 0.

Definition at line 61 of file gp_ht_map_.hpp.

4.500.3.2 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > Comb_Probe_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_comb_probe_fn ( )

Return current comb_probe_fn.

Definition at line 84 of file gp_ht_map_.hpp.

4.500.3.3 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > const Comb_Probe_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_comb_probe_fn ( ) const

Return current const comb_probe_fn.

Definition at line 90 of file gp_ht_map_.hpp.

4.500.3.4 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > Eq_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_eq_fn ( )

Return current eq_fn.

Definition at line 60 of file gp_ht_map_.hpp.

4.500.3.5 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > const Eq_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_eq_fn ( ) const

Return current const eq_fn.

Definition at line 66 of file gp_ht_map_.hpp.

4.500.3.6 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > Hash_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_hash_fn ( )

Return current hash_fn.

Definition at line 48 of file gp_ht_map_.hpp.

4.500.3.7 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > const Hash_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_hash_fn ( ) const

Return current const hash_fn.

Definition at line 54 of file gp_ht_map_.hpp.

4.500.3.8 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > Probe_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_probe_fn ( )

Return current probe_fn.

Definition at line 72 of file gp_ht_map_.hpp.

4.500.3.9 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > const Probe_Fn & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_probe_fn ( ) const

Return current const probe_fn.

Definition at line 78 of file gp_ht_map_.hpp.

4.500.3.10 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > Resize_Policy & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_resize_policy ( )

Return current resize_policy.

Definition at line 96 of file gp_ht_map_.hpp.

4.500.3.11 template<typename Key , typename Mapped , typename Hash_Fn , typename Eq_Fn , typename _Alloc , bool Store_Hash, typename Comb_Probe_Fn , typename Probe_Fn , typename Resize_Policy > const Resize_Policy & __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >::get_resize_policy ( ) const

Return current const resize_policy.

Definition at line 102 of file gp_ht_map_.hpp.

The documentation for this class was generated from the following file:

- gp_ht_map_.hpp

4.501 std::greater< _Tp > Struct Template Reference

Inheritance diagram for std::greater< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.501.1 Detailed Description

template<typename _Tp = void>struct std::greater< _Tp >

One of the comparison functors.

Definition at line 337 of file stl_function.h.

4.501.2 Member Typedef Documentation

4.501.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.501.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.501.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.502 std::greater< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t) > std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t) > std::forward< _Up >(__u))
- template<typename _Tp , typename _Up >
  constexpr bool **operator()** (_Tp *__t, _Up *__u) const noexcept

4.502.1 Detailed Description

template<>struct std::greater< void >

One of the comparison functors.

Definition at line 516 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.503 std::greater_equal< _Tp > Struct Template Reference

Inheritance diagram for std::greater_equal< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.503.1 Detailed Description

template<typename _Tp = void>struct std::greater_equal< _Tp >

One of the comparison functors.

Definition at line 343 of file stl_function.h.

4.503.2 Member Typedef Documentation

4.503.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.503.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.503.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.504 std::greater_equal< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t) >=std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t) >=std::forward< _Up >(__u))
- template<typename _Tp , typename _Up >
  constexpr bool **operator()** (_Tp *__t, _Up *__u) const noexcept

4.504.1 Detailed Description

template<><>struct std::greater_equal< void >

One of the comparison functors.

Definition at line 640 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.505 __gnu_cxx::random_condition::group_adjustor Struct Reference

Inherits __gnu_cxx::random_condition::adjustor_base.

Public Member Functions

- **group_adjustor** (size_t size)

4.505.1 Detailed Description

Group condition.

Definition at line 506 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.506 __gnu_parallel::growing_blocks_tag Struct Reference

Inheritance diagram for __gnu_parallel::growing_blocks_tag:



4.506.1 Detailed Description

Selects the growing block size variant for std::find().

See Also

_GLIBCXX_FIND_GROWING_BLOCKS

Definition at line 174 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.507 std::gslice Class Reference

Public Member Functions

- gslice ()
- gslice (size_t __o, const valarray< size_t > &__l, const valarray< size_t > &__s)
- gslice (const gslice &)
- ~gslice ()
- gslice & operator= (const gslice &)
- valarray< size_t > size () const
- size_t start () const
- valarray< size_t > stride () const

Friends

- template<typename _Tp >
  class **valarray**

4.507.1 Detailed Description

Class defining multi-dimensional subset of an array.

The slice class represents a multi-dimensional subset of an array, specified by three parameter sets: start offset, size array, and stride array. The start offset is the index of the first element of the array that is part of the subset. The size and stride array describe each dimension of the slice. Size is the number of elements in that dimension, and stride is the distance in the array between successive elements in that dimension. Each dimension's size and stride is taken to begin at an array element described by the previous dimension. The size array and stride array must be the same size.

For example, if you have offset==3, stride[0]==11, size[1]==3, stride[1]==3, then slice[0,0]==array[3], slice[0,1]==array[6], slice[0,2]==array[9], slice[1,0]==array[14], slice[1,1]==array[17], slice[1,2]==array[20].

Definition at line 64 of file gslice.h.

The documentation for this class was generated from the following file:

- gslice.h

4.508 std::gslice_array< _Tp > Class Template Reference

Public Types

- typedef _Tp **value_type**

Public Member Functions

- gslice_array (const gslice_array &)
- void operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator%=** (const _Expr< _Dom, _Tp > &) const
- void operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator&=** (const _Expr< _Dom, _Tp > &) const
- void operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator*=** (const _Expr< _Dom, _Tp > &) const
- void operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator+=** (const _Expr< _Dom, _Tp > &) const
- void operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator-=** (const _Expr< _Dom, _Tp > &) const
- void operator/= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator/=** (const _Expr< _Dom, _Tp > &) const
- void operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator<<=** (const _Expr< _Dom, _Tp > &) const
- gslice_array & operator= (const gslice_array &)
- void operator= (const valarray< _Tp > &) const
- void operator= (const _Tp &) const
- template<class _Dom >
  void **operator=** (const _Expr< _Dom, _Tp > &) const

- void operator>>= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator**>>**=** (const _Expr< _Dom, _Tp > &) const
- void operator^= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator**^**=** (const _Expr< _Dom, _Tp > &) const
- void operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator**|**=** (const _Expr< _Dom, _Tp > &) const

Friends

- class **valarray**< **_Tp** >

4.508.1 Detailed Description

template<class _Tp>class std::gslice_array< _Tp >

Reference to multi-dimensional subset of an array.

A gslice_array is a reference to the actual elements of an array specified by a gslice. The way to get a gslice_array is to call operator[](gslice) on a valarray. The returned gslice_array then permits carrying operations out on the referenced subset of elements in the original valarray. For example, operator+=(valarray) will add values to the subset of elements in the underlying valarray this gslice_array refers to.

Parameters

Tp	Element type.

Definition at line 93 of file valarray.

The documentation for this class was generated from the following files:

- valarray
- gslice_array.h

4.509 std::has_virtual_destructor< _Tp > Struct Template Reference

Inheritance diagram for std::has_virtual_destructor< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.509.1 Detailed Description

template<typename _Tp>struct std::has_virtual_destructor< _Tp >

has_virtual_destructor

Definition at line 1338 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.510 std::hash< _Tp > Struct Template Reference

Inherits std::__hash_enum< _Tp, bool >.

4.510.1 Detailed Description

template<typename _Tp>struct std::hash< _Tp >

Primary class template hash.

Primary class template hash, usable for enum types only.

Definition at line 110 of file typeindex.

The documentation for this struct was generated from the following file:

- typeindex

4.511 std::hash< __debug::bitset< _Nb > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __debug::bitset< _Nb > &__b) const noexcept

4.511.1 Detailed Description

template<size_t _Nb>struct std::hash< __debug::bitset< _Nb > >

std::hash specialization for bitset.

Definition at line 418 of file debug/bitset.

The documentation for this struct was generated from the following file:

- debug/bitset

4.512 std::hash< __debug::vector< bool, _Alloc > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __debug::vector< bool, _Alloc > &__b) const noexcept

4.512.1 Detailed Description

template<typename _Alloc>struct std::hash< __debug::vector< bool, _Alloc > >

std::hash specialization for vector<bool>.

Definition at line 795 of file debug/vector.

The documentation for this struct was generated from the following file:

- debug/vector

4.513 std::hash< __gnu_cxx::__u16vstring > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __gnu_cxx::__u16vstring &__s) const noexcept

4.513.1 Detailed Description

template<>struct std::hash< __gnu_cxx::__u16vstring >

std::hash specialization for __u16vstring.

Definition at line 2939 of file vstring.h.

The documentation for this struct was generated from the following file:

- vstring.h

4.514 std::hash< __gnu_cxx::__u32vstring > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __gnu_cxx::__u32vstring &__s) const noexcept

4.514.1 Detailed Description

template<>struct std::hash< __gnu_cxx::__u32vstring >

std::hash specialization for __u32vstring.

Definition at line 2950 of file vstring.h.

The documentation for this struct was generated from the following file:

- vstring.h

4.515 std::hash< __gnu_cxx::__vstring > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __gnu_cxx::__vstring &__s) const noexcept

4.515.1 Detailed Description

template<>struct std::hash< __gnu_cxx::__vstring >

std::hash specialization for __vstring.

Definition at line 2916 of file vstring.h.

The documentation for this struct was generated from the following file:

- vstring.h

4.516 std::hash< __gnu_cxx::__wvstring > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __gnu_cxx::__wvstring &__s) const noexcept

4.516.1 Detailed Description

template<>struct std::hash< __gnu_cxx::__wvstring >

std::hash specialization for __wvstring.

Definition at line 2927 of file vstring.h.

The documentation for this struct was generated from the following file:

- vstring.h

4.517 std::hash< __gnu_cxx::throw_value_limit > Struct Template Reference

Inheritance diagram for std::hash< __gnu_cxx::throw_value_limit >:



Public Types

- typedef __gnu_cxx::throw_value_limit argument_type
- typedef size_t result_type

Public Member Functions

- size_t **operator()** (const __gnu_cxx::throw_value_limit &__val) const

4.517.1 Detailed Description

template<>struct std::hash< __gnu_cxx::throw_value_limit >

Explicit specialization of std::hash for __gnu_cxx::throw_value_limit.

Definition at line 961 of file throw_allocator.h.

4.517.2 Member Typedef Documentation

4.517.2.1 typedef __gnu_cxx::throw_value_limit std::unary_function< __gnu_cxx::throw_value_limit , size_t >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.517.2.2 typedef size_t std::unary_function< __gnu_cxx::throw_value_limit , size_t >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.518 std::hash< __gnu_cxx::throw_value_random > Struct Template Reference

Inheritance diagram for std::hash< __gnu_cxx::throw_value_random >:



Public Types

- typedef __gnu_cxx::throw_value_random argument_type
- typedef size_t result_type

Public Member Functions

- size_t **operator()** (const __gnu_cxx::throw_value_random &__val) const

4.518.1 Detailed Description

template<>struct std::hash< __gnu_cxx::throw_value_random >

Explicit specialization of std::hash for __gnu_cxx::throw_value_random.

Definition at line 977 of file throw_allocator.h.

4.518.2 Member Typedef Documentation

4.518.2.1 typedef __gnu_cxx::throw_value_random std::unary_function< __gnu_cxx::throw_value_random , size_t >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.518.2.2 typedef size_t std::unary_function< __gnu_cxx::throw_value_random , size_t >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.519 std::hash< __shared_ptr< _Tp, _Lp > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const __shared_ptr< _Tp, _Lp > &__s) const noexcept

4.519.1 Detailed Description

template<typename _Tp, _Lock_policy _Lp>struct std::hash< __shared_ptr< _Tp, _Lp > >

std::hash specialization for __shared_ptr.

Definition at line 1884 of file shared_ptr_base.h.

The documentation for this struct was generated from the following file:

- shared_ptr_base.h

4.520 std::hash< _Tp * > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (_Tp *__p) const noexcept

4.520.1 Detailed Description

template<typename _Tp>struct std::hash< _Tp * >

Partial specializations for pointer types.

Definition at line 106 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.521 std::hash< bool > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (bool __val) const noexcept

4.521.1 Detailed Description

template<>struct std::hash< bool >

Explicit specialization for bool.

Definition at line 124 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.522 std::hash< char > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (char __val) const noexcept

4.522.1 Detailed Description

template<>struct std::hash< char >

Explicit specialization for char.

Definition at line 127 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.523 std::hash< char16_t > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (char16_t __val) const noexcept

4.523.1 Detailed Description

template<>struct std::hash< char16_t >

Explicit specialization for char16_t.

Definition at line 144 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.524 std::hash< char32_t > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (char32_t __val) const noexcept

4.524.1 Detailed Description

template<>struct std::hash< char32_t >

Explicit specialization for char32_t.

Definition at line 147 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.525 std::hash< double > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (double __val) const noexcept

4.525.1 Detailed Description

template<>struct std::hash< double >

Specialization for double.

Definition at line 243 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.526 std::hash< error_code > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const error_code &__e) const noexcept

4.526.1 Detailed Description

template<>struct std::hash< error_code >

std::hash specialization for error_code.

Definition at line 479 of file system_error.

The documentation for this struct was generated from the following file:

- system_error

4.527 std::hash< experimental::optional< _Tp > > Struct Template Reference

Public Types

- using **argument_type** = experimental::optional< _Tp >
- using **result_type** = size_t

Public Member Functions

- size_t **operator()** (const experimental::optional< _Tp > &__t) const noexcept(noexcept(hash< _Tp >{}(*__t)))

4.527.1 Detailed Description

template<typename _Tp>struct std::hash< experimental::optional< _Tp > >

std::hash partial specialization for experimental::optional

Definition at line 922 of file experimental/optional.

The documentation for this struct was generated from the following file:

- experimental/optional

4.528 std::hash< experimental::shared_ptr< _Tp > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const experimental::shared_ptr< _Tp > &__s) const noexcept

4.528.1 Detailed Description

template<typename _Tp>struct std::hash< experimental::shared_ptr< _Tp > >

std::hash specialization for shared_ptr.

Definition at line 665 of file experimental/bits/shared_ptr.h.

The documentation for this struct was generated from the following file:

- experimental/bits/shared_ptr.h

4.529 std::hash< float > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (float __val) const noexcept

4.529.1 Detailed Description

template<>struct std::hash< float >

Specialization for float.

Definition at line 231 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.530 std::hash< int > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (int __val) const noexcept

4.530.1 Detailed Description

template<>struct std::hash< int >

Explicit specialization for int.

Definition at line 153 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.531 std::hash< long > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (long __val) const noexcept

4.531.1 Detailed Description

template<>struct std::hash< long >

Explicit specialization for long.

Definition at line 156 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.532 std::hash< long double > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (long double __val) const noexcept

4.532.1 Detailed Description

template<><u>struct std::hash< long double ></u>

Specialization for long double.

Definition at line 255 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.533 std::hash< long long > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (long long __val) const noexcept

4.533.1 Detailed Description

template<><u>struct std::hash< long long ></u>

Explicit specialization for long long.

Definition at line 159 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.534 std::hash< shared_ptr< _Tp > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const shared_ptr< _Tp > &__s) const noexcept

4.534.1 Detailed Description

template<typename _Tp>struct std::hash< shared_ptr< _Tp > >

std::hash specialization for shared_ptr.

Definition at line 881 of file bits/shared_ptr.h.

The documentation for this struct was generated from the following file:

- bits/shared_ptr.h

4.535 std::hash< short > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (short __val) const noexcept

4.535.1 Detailed Description

template<>struct std::hash< short >

Explicit specialization for short.

Definition at line 150 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.536 std::hash< signed char > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (signed char __val) const noexcept

4.536.1 Detailed Description

template<>struct std::hash< signed char >

Explicit specialization for signed char.

Definition at line 130 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.537 std::hash< string > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const string &__s) const noexcept

4.537.1 Detailed Description

template<>struct std::hash< string >

std::hash specialization for string.

Definition at line 6808 of file basic_string.h.

The documentation for this struct was generated from the following file:

- basic_string.h

4.538 std::hash< thread::id > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const thread::id &__id) const noexcept

4.538.1 Detailed Description

template<>struct std::hash< thread::id >

std::hash specialization for thread::id.

Definition at line 338 of file thread.

The documentation for this struct was generated from the following file:

- thread

4.539 std::hash< type_index > Struct Template Reference

Public Types

- typedef type_index **argument_type**
- typedef size_t **result_type**

Public Member Functions

- size_t **operator()** (const type_index &__ti) const noexcept

4.539.1 Detailed Description

template<>struct std::hash< type_index >

std::hash specialization for type_index.

Definition at line 114 of file typeindex.

The documentation for this struct was generated from the following file:

- typeindex

4.540 std::hash< u16string > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const u16string &__s) const noexcept

4.540.1 Detailed Description

template<>struct std::hash< u16string >

std::hash specialization for u16string.

Definition at line 6857 of file basic_string.h.

The documentation for this struct was generated from the following file:

- basic_string.h

4.541 std::hash< u32string > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const u32string &__s) const noexcept

4.541.1 Detailed Description

template<>struct std::hash< u32string >

std::hash specialization for u32string.

Definition at line 6872 of file basic_string.h.

The documentation for this struct was generated from the following file:

- basic_string.h

4.542 std::hash< unique_ptr< _Tp, _Dp > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >, and __uniq_ptr_hash< unique_ptr< _Tp, _Dp > >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

4.542.1 Detailed Description

template<typename _Tp, typename _Dp>struct std::hash< unique_ptr< _Tp, _Dp > >

std::hash specialization for unique_ptr.

Definition at line 933 of file unique_ptr.h.

The documentation for this struct was generated from the following file:

- unique_ptr.h

4.543 std::hash< unsigned char > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (unsigned char __val) const noexcept

4.543.1 Detailed Description

template<>struct std::hash< unsigned char >

Explicit specialization for unsigned char.

Definition at line 133 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.544 std::hash< unsigned int > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (unsigned int __val) const noexcept

4.544.1 Detailed Description

template<>struct std::hash< unsigned int >

Explicit specialization for unsigned int.

Definition at line 165 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.545 std::hash< unsigned long > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (unsigned long __val) const noexcept

4.545.1 Detailed Description

template<>struct std::hash< unsigned long >

Explicit specialization for unsigned long.

Definition at line 168 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.546 std::hash< unsigned long long > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (unsigned long long __val) const noexcept

4.546.1 Detailed Description

template<>struct std::hash< unsigned long long >

Explicit specialization for unsigned long long.

Definition at line 171 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.547 std::hash< unsigned short > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (unsigned short __val) const noexcept

4.547.1 Detailed Description

template<>struct std::hash< unsigned short >

Explicit specialization for unsigned short.

Definition at line 162 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.548 std::hash< wchar_t > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (wchar_t __val) const noexcept

4.548.1 Detailed Description

template<>struct std::hash< wchar_t >

Explicit specialization for wchar_t.

Definition at line 136 of file functional_hash.h.

The documentation for this struct was generated from the following file:

- functional_hash.h

4.549 std::hash< wstring > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const wstring &__s) const noexcept

4.549.1 Detailed Description

template<>struct std::hash< wstring >

std::hash specialization for wstring.

Definition at line 6823 of file basic_string.h.

The documentation for this struct was generated from the following file:

- basic_string.h

4.550 std::hash<::bitset< _Nb > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const ::bitset< _Nb > &__b) const noexcept

4.550.1 Detailed Description

template<size_t _Nb>struct std::hash<::bitset< _Nb > >

std::hash specialization for bitset.

Definition at line 1569 of file bitset.

The documentation for this struct was generated from the following file:

- bitset

4.551 std::hash<::vector< bool, _Alloc > > Struct Template Reference

Inherits std::__hash_base< _Result, _Arg >.

Public Types

- typedef _Arg **argument_type**
- typedef _Result **result_type**

Public Member Functions

- size_t **operator()** (const ::vector< bool, _Alloc > &) const noexcept

4.551.1 Detailed Description

template<typename _Alloc>struct std::hash<::vector< bool, _Alloc > >

std::hash specialization for vector<bool>.

Definition at line 1351 of file stl_bvector.h.

The documentation for this struct was generated from the following files:

- stl_bvector.h
- vector.tcc

4.552 __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, Store_Hash > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, Store_Hash >:

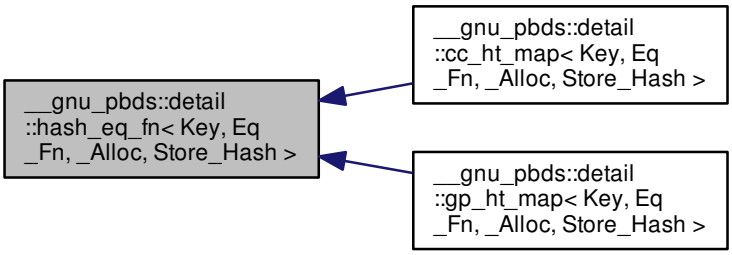

4.552.1 Detailed Description

template<typename Key, typename Eq_Fn, typename _Alloc, bool Store_Hash>struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, Store_Hash >

Primary template.

Definition at line 55 of file hash_eq_fn.hpp.

The documentation for this struct was generated from the following file:

- hash_eq_fn.hpp

4.553 __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, false > Struct Template Reference

Inherits Eq_Fn.

Public Types

- typedef Eq_Fn **eq_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**

Public Member Functions

- **hash_eq_fn** (const Eq_Fn &r_eq_fn)
- bool **operator()** (key_const_reference r_lhs_key, key_const_reference r_rhs_key) const
- void **swap** (const hash_eq_fn &other)

4.553.1 Detailed Description

template<typename Key, typename Eq_Fn, typename _Alloc>struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, false >

Specialization 1 - The client requests that hash values not be stored.

Definition at line 59 of file hash_eq_fn.hpp.

The documentation for this struct was generated from the following file:

- hash_eq_fn.hpp

4.554 __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, true > Struct Template Reference

Inherits Eq_Fn.

Public Types

- typedef Eq_Fn **eq_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef _Alloc::size_type **size_type**

Public Member Functions

- **hash_eq_fn** (const Eq_Fn &r_eq_fn)
- bool **operator()** (key_const_reference r_lhs_key, size_type lhs_hash, key_const_reference r_rhs_key, size_type rhs_hash) const
- void **swap** (const hash_eq_fn &other)

4.554.1 Detailed Description

template<typename Key, class Eq_Fn, class _Alloc>struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, true >

Specialization 2 - The client requests that hash values be stored.

Definition at line 82 of file hash_eq_fn.hpp.

The documentation for this struct was generated from the following file:

- hash_eq_fn.hpp

4.555 __gnu_pbds::hash_exponential_size_policy< Size_Type > Class Template Reference

Public Types

- typedef Size_Type **size_type**

Public Member Functions

- hash_exponential_size_policy (size_type start_size=8, size_type grow_factor=2)
- void **swap** (hash_exponential_size_policy< Size_Type > &other)

Protected Member Functions

- size_type **get_nearest_larger_size** (size_type size) const
- size_type **get_nearest_smaller_size** (size_type size) const

4.555.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::hash_exponential_size_policy< Size_Type >

A size policy whose sequence of sizes form an exponential sequence (typically powers of 2.

Definition at line 413 of file hash_policy.hpp.

4.555.2 Constructor & Destructor Documentation

4.555.2.1 template<typename Size_Type > __gnu_pbds::hash_exponential_size_policy< Size_Type >::hash_exponential_size_policy (size_type *start_size* = 8, size_type *grow_factor* = 2)

Default constructor, or onstructor taking a start_size, or constructor taking a start size and grow_factor. The policy will use the sequence of sizes start_size, start_size∗ grow_factor, start_size∗ grow_factor^2, ...

Definition at line 46 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.556 __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type > Class Template Reference

Inheritance diagram for __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >:



Public Types

- enum { external_load_access }
- typedef Size_Type **size_type**

Public Member Functions

- hash_load_check_resize_trigger (float load_min=0.125, float load_max=0.5)

- std::pair< float, float > get_loads () const
- void set_loads (std::pair< float, float > load_pair)
- void **swap** (hash_load_check_resize_trigger &other)

Protected Member Functions

- bool **is_grow_needed** (size_type size, size_type num_entries) const
- bool **is_resize_needed** () const
- void notify_cleared ()
- void **notify_erase_search_collision** ()
- void **notify_erase_search_end** ()
- void **notify_erase_search_start** ()
- void **notify_erased** (size_type num_entries)
- void **notify_externally_resized** (size_type new_size)
- void **notify_find_search_collision** ()
- void **notify_find_search_end** ()
- void **notify_find_search_start** ()
- void **notify_insert_search_collision** ()
- void **notify_insert_search_end** ()
- void **notify_insert_search_start** ()
- void notify_inserted (size_type num_entries)
- void notify_resized (size_type new_size)

4.556.1 Detailed Description

template<bool External_Load_Access = false, typename Size_Type = std::size_t>class __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >

A resize trigger policy based on a load check. It keeps the load factor between some load factors load_min and load_max.

Definition at line 175 of file hash_policy.hpp.

4.556.2 Member Enumeration Documentation

4.556.2.1 template<bool External_Load_Access = false, typename Size_Type = std::size_t> anonymous enum

Enumerator

external_load_access Specifies whether the load factor can be accessed externally. The two options have different trade-offs in terms of flexibility, genericity, and encapsulation.

Definition at line 180 of file hash_policy.hpp.

4.556.3 Constructor & Destructor Documentation

4.556.3.1 template<bool External_Load_Access, typename Size_Type > __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::hash_load_check_resize_trigger (float *load_min* = 0.125, float *load_max* = 0.5)

Default constructor, or constructor taking load_min and load_max load factors between which this policy will keep the actual load.

Definition at line 49 of file hash_policy.hpp.

4.556.4 Member Function Documentation

4.556.4.1 template<bool External_Load_Access, typename Size_Type > std::pair< float, float > __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::get_loads ( ) const [inline]

Returns a pair of the minimal and maximal loads, respectively.

Definition at line 238 of file hash_policy.hpp.

4.556.4.2 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::notify_cleared ( ) [protected]

Notifies the table was cleared.

Definition at line 208 of file hash_policy.hpp.

4.556.4.3 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::notify_inserted (size_type *num_entries*) [inline], [protected]

Notifies an element was inserted. The total number of entries in the table is num_entries.

Definition at line 111 of file hash_policy.hpp.

4.556.4.4 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::notify_resized (size_type *new_size*) [protected]

Notifies the table was resized as a result of this object's signifying that a resize is needed.

Definition at line 153 of file hash_policy.hpp.

4.556.4.5 template<bool External_Load_Access, typename Size_Type > void __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >::set_loads (std::pair< float, float > *load_pair*)

Sets the loads through a pair of the minimal and maximal loads, respectively.

Definition at line 247 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.557 __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, Hold_Size > Class Template Reference

4.557.1 Detailed Description

template<typename Size_Type, bool Hold_Size>class __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, Hold_Size >

Primary template.

Definition at line 50 of file hash_load_check_resize_trigger_size_base.hpp.

The documentation for this class was generated from the following file:

- hash_load_check_resize_trigger_size_base.hpp

4.558 __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, true > Class Template Reference

Protected Types

- typedef Size_Type **size_type**

Protected Member Functions

- size_type **get_size** () const
- void **set_size** (size_type size)
- void **swap** (hash_load_check_resize_trigger_size_base &other)

4.558.1 Detailed Description

template<typename Size_Type>class __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, true >

Specializations.

Definition at line 54 of file hash_load_check_resize_trigger_size_base.hpp.

The documentation for this class was generated from the following file:

- hash_load_check_resize_trigger_size_base.hpp

4.559 __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc > Class Template Reference

Public Types

- typedef _Ht::allocator_type **allocator_type**
- typedef _Ht::const_iterator **const_iterator**
- typedef _Ht::const_pointer **const_pointer**
- typedef _Ht::const_reference **const_reference**
- typedef _Tp **data_type**
- typedef _Ht::difference_type **difference_type**
- typedef _Ht::hasher **hasher**
- typedef _Ht::iterator **iterator**
- typedef _Ht::key_equal **key_equal**
- typedef _Ht::key_type **key_type**
- typedef _Tp **mapped_type**
- typedef _Ht::pointer **pointer**
- typedef _Ht::reference **reference**
- typedef _Ht::size_type **size_type**
- typedef _Ht::value_type **value_type**

Public Member Functions

- **hash_map** (size_type __n)
- **hash_map** (size_type __n, const hasher &__hf)
- **hash_map** (size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- template<class _InputIterator >
  hash_map (_InputIterator __f, _InputIterator __l)
- template<class _InputIterator >
  hash_map (_InputIterator __f, _InputIterator __l, size_type __n)
- template<class _InputIterator >
  hash_map (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf)
- template<class _InputIterator >
  hash_map (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- iterator **begin** ()
- const_iterator **begin** () const
- size_type **bucket_count** () const
- void **clear** ()
- size_type **count** (const key_type &__key) const
- size_type **elems_in_bucket** (size_type __n) const
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- pair< iterator, iterator > **equal_range** (const key_type &__key)
- pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- void **erase** (iterator __it)
- void **erase** (iterator __f, iterator __l)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const
- allocator_type **get_allocator** () const
- hasher **hash_funct** () const
- pair< iterator, bool > **insert** (const value_type &__obj)
- template<class _InputIterator >
  void **insert** (_InputIterator __f, _InputIterator __l)
- pair< iterator, bool > **insert_noresize** (const value_type &__obj)
- key_equal **key_eq** () const
- size_type **max_bucket_count** () const
- size_type **max_size** () const
- _Tp & **operator[]** (const key_type &__key)
- void **resize** (size_type __hint)
- size_type **size** () const
- void **swap** (hash_map &__hs)

Friends

- template<class _K1 , class _T1 , class _HF , class _EqK , class _Al >
  bool **operator==** (const hash_map< _K1, _T1, _HF, _EqK, _Al > &, const hash_map< _K1, _T1, _HF, _EqK, _Al > &)

4.559.1 Detailed Description

template<class _Key, class _Tp, class _HashFn = hash<_Key>, class _EqualKey = equal_to<_Key>, class _Alloc = allocator<_Tp>>class __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 83 of file hash_map.

The documentation for this class was generated from the following file:

- hash_map

4.560 __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc > Class Template Reference

Public Types

- typedef _Ht::allocator_type **allocator_type**
- typedef _Ht::const_iterator **const_iterator**
- typedef _Ht::const_pointer **const_pointer**
- typedef _Ht::const_reference **const_reference**
- typedef _Tp **data_type**
- typedef _Ht::difference_type **difference_type**
- typedef _Ht::hasher **hasher**
- typedef _Ht::iterator **iterator**
- typedef _Ht::key_equal **key_equal**
- typedef _Ht::key_type **key_type**
- typedef _Tp **mapped_type**
- typedef _Ht::pointer **pointer**
- typedef _Ht::reference **reference**
- typedef _Ht::size_type **size_type**
- typedef _Ht::value_type **value_type**

Public Member Functions

- **hash_multimap** (size_type __n)
- **hash_multimap** (size_type __n, const hasher &__hf)
- **hash_multimap** (size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- template<class _InputIterator >
  hash_multimap (_InputIterator __f, _InputIterator __l)
- template<class _InputIterator >
  hash_multimap (_InputIterator __f, _InputIterator __l, size_type __n)
- template<class _InputIterator >
  hash_multimap (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf)
- template<class _InputIterator >
  hash_multimap (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())

- iterator **begin** ()
- const_iterator **begin** () const
- size_type **bucket_count** () const
- void **clear** ()
- size_type **count** (const key_type &__key) const
- size_type **elems_in_bucket** (size_type __n) const
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- pair< iterator, iterator > **equal_range** (const key_type &__key)
- pair< const_iterator, const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- void **erase** (iterator __it)
- void **erase** (iterator __f, iterator __l)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const
- allocator_type **get_allocator** () const
- hasher **hash_funct** () const
- iterator **insert** (const value_type &__obj)
- template<class _InputIterator > void **insert** (_InputIterator __f, _InputIterator __l)
- iterator **insert_noresize** (const value_type &__obj)
- key_equal **key_eq** () const
- size_type **max_bucket_count** () const
- size_type **max_size** () const
- void **resize** (size_type __hint)
- size_type **size** () const
- void **swap** (hash_multimap &__hs)

Friends

- template<class _K1 , class _T1 , class _HF , class _EqK , class _Al > bool **operator==** (const hash_multimap< _K1, _T1, _HF, _EqK, _Al > &, const hash_multimap< _K1, _T1, _HF, _EqK, _Al > &)

4.560.1 Detailed Description

template<class _Key, class _Tp, class _HashFn = hash<_Key>, class _EqualKey = equal_to<_Key>, class _Alloc = allocator<_Tp>>class __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 296 of file hash_map.

The documentation for this class was generated from the following file:

- hash_map

4.561 __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc > Class Template Reference

Public Types

- typedef _Ht::allocator_type **allocator_type**
- typedef _Ht::const_iterator **const_iterator**
- typedef _Alloc::const_pointer **const_pointer**
- typedef _Alloc::const_reference **const_reference**
- typedef _Ht::difference_type **difference_type**
- typedef _Ht::hasher **hasher**
- typedef _Ht::const_iterator **iterator**
- typedef _Ht::key_equal **key_equal**
- typedef _Ht::key_type **key_type**
- typedef _Alloc::pointer **pointer**
- typedef _Alloc::reference **reference**
- typedef _Ht::size_type **size_type**
- typedef _Ht::value_type **value_type**

Public Member Functions

- **hash_multiset** (size_type __n)
- **hash_multiset** (size_type __n, const hasher &__hf)
- **hash_multiset** (size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- template<class _InputIterator >
  hash_multiset (_InputIterator __f, _InputIterator __l)
- template<class _InputIterator >
  hash_multiset (_InputIterator __f, _InputIterator __l, size_type __n)
- template<class _InputIterator >
  hash_multiset (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf)
- template<class _InputIterator >
  hash_multiset (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- iterator **begin** () const
- size_type **bucket_count** () const
- void **clear** ()
- size_type **count** (const key_type &__key) const
- size_type **elems_in_bucket** (size_type __n) const
- bool **empty** () const
- iterator **end** () const
- pair< iterator, iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- void **erase** (iterator __it)
- void **erase** (iterator __f, iterator __l)
- iterator **find** (const key_type &__key) const
- allocator_type **get_allocator** () const
- hasher **hash_funct** () const
- iterator **insert** (const value_type &__obj)
- template<class _InputIterator >
  void **insert** (_InputIterator __f, _InputIterator __l)
- iterator **insert_noresize** (const value_type &__obj)

- key_equal **key_eq** () const
- size_type **max_bucket_count** () const
- size_type **max_size** () const
- void **resize** (size_type __hint)
- size_type **size** () const
- void **swap** (hash_multiset &hs)

Friends

- template<class _Val , class _HF , class _EqK , class _Al >
  bool **operator==** (const hash_multiset< _Val, _HF, _EqK, _Al > &, const hash_multiset< _Val, _HF, _EqK, _Al > &)

4.561.1 Detailed Description

template<class _Value, class _HashFcn = hash<_Value>, class _EqualKey = equal_to<_Value>, class _Alloc = allocator<_Value>>class __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 287 of file hash_set.

The documentation for this class was generated from the following file:

- hash_set

4.562 __gnu_pbds::hash_prime_size_policy Class Reference

Public Types

- typedef std::size_t size_type

Public Member Functions

- hash_prime_size_policy (size_type start_size=8)
- void **swap** (hash_prime_size_policy &other)

Protected Member Functions

- size_type **get_nearest_larger_size** (size_type size) const
- size_type **get_nearest_smaller_size** (size_type size) const

4.562.1 Detailed Description

A size policy whose sequence of sizes form a nearly-exponential sequence of primes.

Definition at line 450 of file hash_policy.hpp.

4.562.2 Member Typedef Documentation

4.562.2.1 typedef std::size_t __gnu_pbds::hash_prime_size_policy::size_type

Size type.

Definition at line 454 of file hash_policy.hpp.

4.562.3 Constructor & Destructor Documentation

4.562.3.1 __gnu_pbds::hash_prime_size_policy::hash_prime_size_policy (size_type *start_size* = 8) [inline]

Default constructor, or onstructor taking a start_size The policy will use the sequence of sizes approximately start_size, start_size∗ 2, start_size∗ 2^2, ...

Definition at line 129 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.563 __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc > Class Template Reference

Public Types

- typedef _Ht::allocator_type **allocator_type**
- typedef _Ht::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef _Alloc_traits::const_reference **const_reference**
- typedef _Ht::difference_type **difference_type**
- typedef _Ht::hasher **hasher**
- typedef _Ht::const_iterator **iterator**
- typedef _Ht::key_equal **key_equal**
- typedef _Ht::key_type **key_type**
- typedef _Alloc_traits::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef _Ht::size_type **size_type**
- typedef _Ht::value_type **value_type**

Public Member Functions

- **hash_set** (size_type __n)
- **hash_set** (size_type __n, const hasher &__hf)
- **hash_set** (size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- template<class _InputIterator >
  hash_set (_InputIterator __f, _InputIterator __l)
- template<class _InputIterator >
  hash_set (_InputIterator __f, _InputIterator __l, size_type __n)
- template<class _InputIterator >
  hash_set (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf)

- template<class _InputIterator >
  hash_set (_InputIterator __f, _InputIterator __l, size_type __n, const hasher &__hf, const key_equal &__eql, const allocator_type &__a=allocator_type())
- iterator **begin** () const
- size_type **bucket_count** () const
- void **clear** ()
- size_type **count** (const key_type &__key) const
- size_type **elems_in_bucket** (size_type __n) const
- bool **empty** () const
- iterator **end** () const
- pair< iterator, iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- void **erase** (iterator __it)
- void **erase** (iterator __f, iterator __l)
- iterator **find** (const key_type &__key) const
- allocator_type **get_allocator** () const
- hasher **hash_funct** () const
- pair< iterator, bool > **insert** (const value_type &__obj)
- template<class _InputIterator >
  void **insert** (_InputIterator __f, _InputIterator __l)
- pair< iterator, bool > **insert_noresize** (const value_type &__obj)
- key_equal **key_eq** () const
- size_type **max_bucket_count** () const
- size_type **max_size** () const
- void **resize** (size_type __hint)
- size_type **size** () const
- void **swap** (hash_set &__hs)

Friends

- template<class _Val , class _HF , class _EqK , class _Al >
  bool **operator==** (const hash_set< _Val, _HF, _EqK, _Al > &, const hash_set< _Val, _HF, _EqK, _Al > &)

4.563.1 Detailed Description

template<class _Value, class _HashFcn = hash<_Value>, class _EqualKey = equal_to<_Value>, class _Alloc = allocator<_Value>>class __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 84 of file hash_set.

The documentation for this class was generated from the following file:

- hash_set

4.564 __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type > Class Template Reference

Inherits Size_Policy, and Trigger_Policy.

Public Types

- enum { **external_size_access** }
- typedef Size_Policy **size_policy**
- typedef Size_Type **size_type**
- typedef Trigger_Policy **trigger_policy**

Public Member Functions

- hash_standard_resize_policy ()
- hash_standard_resize_policy (const Size_Policy &r_size_policy)
- hash_standard_resize_policy (const Size_Policy &r_size_policy, const Trigger_Policy &r_trigger_policy)
- size_type get_actual_size () const
- Size_Policy & get_size_policy ()
- const Size_Policy & get_size_policy () const
- Trigger_Policy & get_trigger_policy ()
- const Trigger_Policy & get_trigger_policy () const
- void resize (size_type suggested_new_size)
- void **swap** (hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type > &other)

Protected Member Functions

- size_type get_new_size (size_type size, size_type num_used_e) const
- bool **is_resize_needed** () const
- void **notify_cleared** ()
- void **notify_erase_search_collision** ()
- void **notify_erase_search_end** ()
- void **notify_erase_search_start** ()
- void **notify_erased** (size_type num_e)
- void **notify_find_search_collision** ()
- void **notify_find_search_end** ()
- void **notify_find_search_start** ()
- void **notify_insert_search_collision** ()
- void **notify_insert_search_end** ()
- void **notify_insert_search_start** ()
- void **notify_inserted** (size_type num_e)
- void **notify_resized** (size_type new_size)

4.564.1 Detailed Description

template<typename Size_Policy = hash_exponential_size_policy<>, typename Trigger_Policy = hash_load_check_resize_trigger<>, bool External_Size_Access = false, typename Size_Type = std::size_t>class __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >

A resize policy which delegates operations to size and trigger policies.

Definition at line 489 of file hash_policy.hpp.

4.564.2 Constructor & Destructor Documentation

4.564.2.1 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::hash_standard_resize_policy ( )

Default constructor.

Definition at line 46 of file hash_policy.hpp.

4.564.2.2 template<typename Size_Policy, typename Trigger_Policy , bool External_Size_Access, typename Size_Type > __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::hash_standard_resize_policy (const Size_Policy & *r_size_policy*)

constructor taking some policies r_size_policy will be copied by the Size_Policy object of this object.

Definition at line 52 of file hash_policy.hpp.

4.564.2.3 template<typename Size_Policy, typename Trigger_Policy, bool External_Size_Access, typename Size_Type > __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::hash_standard_resize_policy (const Size_Policy & *r_size_policy,* const Trigger_Policy & *r_trigger_policy*)

constructor taking some policies. r_size_policy will be copied by the Size_Policy object of this object. r_trigger_policy will be copied by the Trigger_Policy object of this object.

Definition at line 58 of file hash_policy.hpp.

4.564.3 Member Function Documentation

4.564.3.1 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::size_type __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_actual_size ( ) const [inline]

Returns the actual size of the container.

Definition at line 179 of file hash_policy.hpp.

4.564.3.2 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::size_type __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_new_size (size_type *size,* size_type *num_used_e*) const [protected]

Queries what the new size should be, when the container is resized naturally. The current __size of the container is size, and the number of used entries within the container is num_used_e.

Definition at line 160 of file hash_policy.hpp.

4.564.3.3 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > Size_Policy & __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_size_policy ( )

Access to the Size_Policy object used.

Definition at line 244 of file hash_policy.hpp.

4.564.3.4 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > const Size_Policy & __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_size_policy ( ) const

Const access to the Size_Policy object used.

Definition at line 250 of file hash_policy.hpp.

4.564.3.5 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > Trigger_Policy & __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_trigger_policy ( )

Access to the Trigger_Policy object used.

Definition at line 232 of file hash_policy.hpp.

4.564.3.6 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > const Trigger_Policy & __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::get_trigger_policy ( ) const

Access to the Trigger_Policy object used.

Definition at line 238 of file hash_policy.hpp.

4.564.3.7 template<typename Size_Policy , typename Trigger_Policy , bool External_Size_Access, typename Size_Type > void __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >::resize (size_type *suggested_new_size*)

Resizes the container to suggested_new_size, a suggested size (the actual size will be determined by the Size_Policy object).

Definition at line 188 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.565 std::locale::id Class Reference

Public Member Functions

- id ()
- size_t **_M_id** () const throw ()

Friends

- template<typename _Facet >
  bool has_facet (const locale &) throw ()
- class **locale**

- class **locale::_Impl**
- template<typename _Facet >
  const _Facet & use_facet (const locale &)

4.565.1 Detailed Description

Facet ID class.

The ID class provides facets with an index used to identify them. Every facet class must define a public static member locale::id, or be derived from a facet that provides this member, otherwise the facet cannot be used in a locale. The locale::id ensures that each class type gets a unique identifier.

Definition at line 485 of file locale_classes.h.

4.565.2 Constructor & Destructor Documentation

4.565.2.1 std::locale::id::id ( ) [inline]

Constructor.

Definition at line 516 of file locale_classes.h.

4.565.3 Friends And Related Function Documentation

4.565.3.1 template<typename _Facet > bool has_facet (const locale &) throw) [friend]

Test for the presence of a facet.

has_facet tests the locale argument for the presence of the facet type provided as the template parameter. Facets derived from the facet parameter will also return true.

Template Parameters

_Facet	The facet type to test the presence of.

Parameters

__loc	The locale to test.

Returns

true if __loc contains a facet of type _Facet, else false.

Definition at line 104 of file locale_classes.tcc.

4.565.3.2 template<typename _Facet > const _Facet& use_facet (const locale &) [friend]

Return a facet.

use_facet looks for and returns a reference to a facet of type Facet where Facet is the template parameter. If has_facet(locale) is true, there is a suitable facet to return. It throws std::bad_cast if the locale doesn't contain a facet of type Facet.

Template Parameters

_Facet	The facet type to access.

Parameters

__loc	The locale to use.

Returns

Reference to facet of type Facet.

Exceptions

std::bad_cast	if `__loc` doesn't contain a facet of type _Facet.

Definition at line 132 of file locale_classes.tcc.

The documentation for this class was generated from the following file:

- locale_classes.h

4.566 std::thread::id Class Reference

Public Member Functions

- **id** (native_handle_type __id)

Friends

- class **hash**< **id** >
- bool **operator**< (id __x, id __y) noexcept
- template<class _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & **operator**<< (basic_ostream< _CharT, _Traits > &__out, id __id)
- bool **operator==** (id __x, id __y) noexcept
- class **thread**

4.566.1 Detailed Description

thread::id

Definition at line 88 of file thread.

The documentation for this class was generated from the following file:

- thread

4.567 std::experimental::fundamentals_v1::in_place_t Struct Reference

4.567.1 Detailed Description

Tag type for in-place construction.

Definition at line 74 of file experimental/optional.

The documentation for this struct was generated from the following file:

- experimental/optional

4.568 std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > Class Template Reference

Public Types

- typedef _UIntType result_type

Public Member Functions

- independent_bits_engine ()
- independent_bits_engine (const _RandomNumberEngine &__rng)
- independent_bits_engine (_RandomNumberEngine &&__rng)
- independent_bits_engine (result_type __s)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  independent_bits_engine (_Sseq &__q)
- const _RandomNumberEngine & base () const noexcept
- void discard (unsigned long long __z)
- result_type operator() ()
- void seed ()
- void seed (result_type __s)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > seed (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Friends

- bool operator== (const independent_bits_engine &__lhs, const independent_bits_engine &__rhs)
- template<typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::independent_bits_engine< _-
  RandomNumberEngine, __w, _UIntType > &__x)

4.568.1 Detailed Description

template<typename _RandomNumberEngine, size_t __w, typename _UIntType>class std::independent_bits_engine< _Random-NumberEngine, __w, _UIntType >

Produces random numbers by combining random numbers from some base engine to produce random numbers with a specifies number of bits __w.

Definition at line 1096 of file random.h.

4.568.2 Member Typedef Documentation

4.568.2.1 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> typedef _UIntType std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::result_type

The type of the generated random value.

Definition at line 1109 of file random.h.

4.568.3 Constructor & Destructor Documentation

4.568.3.1 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::independent_bits_engine ( ) [inline]

Constructs a default independent_bits_engine engine.

The underlying engine is default constructed as well.

Definition at line 1116 of file random.h.

4.568.3.2 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::independent_bits_engine (const _RandomNumberEngine & *__rng*) [inline], [explicit]

Copy constructs a independent_bits_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 1126 of file random.h.

4.568.3.3 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::independent_bits_engine (_RandomNumberEngine && *__rng*) [inline], [explicit]

Move constructs a independent_bits_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 1136 of file random.h.

4.568.3.4 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::independent_bits_engine (result_type *__s*) [inline], [explicit]

Seed constructs a independent_bits_engine engine.

Constructs the underlying generator engine seeded with __s.

Parameters

__s	A seed value for the base class engine.

Definition at line 1146 of file random.h.

4.568.3.5 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::independent_bits_engine (_Sseq & *__q*) [inline], [explicit]

Generator construct a independent_bits_engine engine.

Parameters

__q	A seed sequence.

Definition at line 1156 of file random.h.

4.568.4 Member Function Documentation

4.568.4.1 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> const _RandomNumberEngine& std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::base ( ) const [inline], [noexcept]

Gets a const reference to the underlying generator engine object.

Definition at line 1191 of file random.h.

Referenced by std::operator<<().

4.568.4.2 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> void std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::discard (unsigned long long *__z*) [inline]

Discard a sequence of random numbers.

Definition at line 1212 of file random.h.

4.568.4.3 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> static constexpr result_type std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::max ( ) [inline], [static]

Gets the maximum value in the generated random number range.

Definition at line 1205 of file random.h.

4.568.4.4 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> static constexpr result_type std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::min ( ) [inline], [static]

Gets the minimum value in the generated random number range.

Definition at line 1198 of file random.h.

4.568.4.5 template<typename _RandomNumberEngine , size_t __w, typename _UIntType > independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::result_type std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::operator() ( )

Gets the next value in the generated random number sequence.

Definition at line 737 of file bits/random.tcc.

References std::__lg(), std::numeric_limits< _Tp >::max(), and std::numeric_limits< _Tp >::min().

4.568.4.6 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> void std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::seed ( ) [inline]

Reseeds the independent_bits_engine object with the default seed for the underlying base class generator engine.

Definition at line 1165 of file random.h.

4.568.4.7 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> void std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::seed (result_type __s) [inline]

Reseeds the independent_bits_engine object with the default seed for the underlying base class generator engine.

Definition at line 1173 of file random.h.

4.568.4.8 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> template<typename _Sseq > _If_seed_seq<_Sseq> std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::seed (_Sseq & __q) [inline]

Reseeds the independent_bits_engine object with the given seed sequence.

Parameters

__q	A seed generator function.

Definition at line 1183 of file random.h.

4.568.5 Friends And Related Function Documentation

4.568.5.1 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> bool operator== (const independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__lhs,* const independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__rhs*) [friend]

Compares two independent_bits_engine random number generator objects of the same type for equality.

Parameters

__lhs	A independent_bits_engine random number generator object.
__rhs	Another independent_bits_engine random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 1237 of file random.h.

4.568.5.2 template<typename _RandomNumberEngine, size_t __w, typename _UIntType> template<typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > & *__x*) [friend]

Extracts the current state of a % subtract_with_carry_engine random number generator engine __x from the input stream __is.

Parameters

__is	An input stream.
__x	A independent_bits_engine random number generator engine.

Returns

The input stream with the state of __x extracted or in an error state.

Definition at line 1255 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.569 std::indirect_array< _Tp > Class Template Reference

Public Types

- typedef _Tp **value_type**

Public Member Functions

- indirect_array (const indirect_array &)
- void operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator%=** (const _Expr< _Dom, _Tp > &) const
- void operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator&=** (const _Expr< _Dom, _Tp > &) const
- void operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator*=** (const _Expr< _Dom, _Tp > &) const
- void operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator+=** (const _Expr< _Dom, _Tp > &) const
- void operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator-=** (const _Expr< _Dom, _Tp > &) const
- void operator/= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator/=** (const _Expr< _Dom, _Tp > &) const
- void operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator<<=** (const _Expr< _Dom, _Tp > &) const
- indirect_array & operator= (const indirect_array &)
- void operator= (const valarray< _Tp > &) const
- void operator= (const _Tp &) const
- template<class _Dom >
  void **operator=** (const _Expr< _Dom, _Tp > &) const
- void operator>>= (const valarray< _Tp > &) const

- template<class _Dom >
  void **operator>>=** (const _Expr< _Dom, _Tp > &) const
- void operator^= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator^=** (const _Expr< _Dom, _Tp > &) const
- void operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator|=** (const _Expr< _Dom, _Tp > &) const

Friends

- class **gslice_array**< **_Tp** >
- class **valarray**< **_Tp** >

4.569.1 Detailed Description

template<class _Tp>class std::indirect_array< _Tp >

Reference to arbitrary subset of an array.

An indirect_array is a reference to the actual elements of an array specified by an ordered array of indices. The way to get an indirect_array is to call operator[](valarray<size_t>) on a valarray. The returned indirect_array then permits carrying operations out on the referenced subset of elements in the original valarray.

For example, if an indirect_array is obtained using the array (4,2,0) as an argument, and then assigned to an array containing (1,2,3), then the underlying array will have array[0]==3, array[2]==2, and array[4]==1.

Parameters

Tp	Element type.

Definition at line 95 of file valarray.

The documentation for this class was generated from the following files:

- valarray
- indirect_array.h

4.570 std::initializer_list< _E > Class Template Reference

Public Types

- typedef const _E * **const_iterator**
- typedef const _E & **const_reference**
- typedef const _E * **iterator**
- typedef const _E & **reference**
- typedef size_t **size_type**
- typedef _E **value_type**

Public Member Functions

- constexpr const_iterator **begin** () const noexcept
- constexpr const_iterator **end** () const noexcept
- constexpr size_type **size** () const noexcept

Related Functions

(Note that these are not member functions.)

- template<class _Tp >
  constexpr const _Tp * begin (initializer_list< _Tp > __ils) noexcept
- template<class _Tp >
  constexpr const _Tp * end (initializer_list< _Tp > __ils) noexcept

4.570.1 Detailed Description

template<class _E>class std::initializer_list< _E >

initializer_list

Definition at line 47 of file initializer_list.

4.570.2 Friends And Related Function Documentation

4.570.2.1 template<class _Tp > constexpr const _Tp * begin (initializer_list< _Tp > __ils) [related]

Return an iterator pointing to the first element of the initializer_list.

Parameters

__ils	Initializer list.

Definition at line 90 of file initializer_list.

4.570.2.2 template<class _Tp > constexpr const _Tp * end (initializer_list< _Tp > __ils) [related]

Return an iterator pointing to one past the last element of the initializer_list.

Parameters

__ils	Initializer list.

Definition at line 101 of file initializer_list.

Referenced by std::forward_list< _Tp, _Alloc >::resize().

The documentation for this class was generated from the following file:

- initializer_list

4.571 std::input_iterator_tag Struct Reference

Inheritance diagram for std::input_iterator_tag:

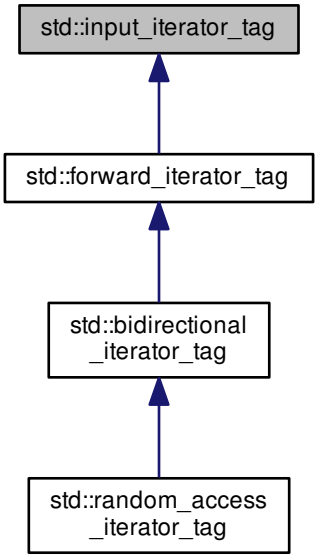

4.571.1 Detailed Description

Marking input iterators.

Definition at line 93 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.572 __gnu_pbds::insert_error Struct Reference

Inheritance diagram for __gnu_pbds::insert_error:

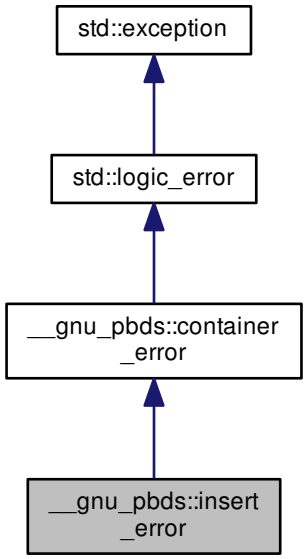

Public Member Functions

- virtual const char ∗ what () const noexcept

4.572.1 Detailed Description

An entry cannot be inserted into a container object for logical reasons (not, e.g., if memory is unabvailable, in which case the allocator_type's exception will be thrown).

Definition at line 66 of file exception.hpp.

4.572.2 Member Function Documentation

4.572.2.1 virtual const char∗ std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this struct was generated from the following file:

- exception.hpp

4.573 std::insert_iterator< _Container > Class Template Reference

Inheritance diagram for std::insert_iterator< _Container >:



Public Types

- typedef _Container container_type
- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

Public Member Functions

- constexpr insert_iterator (_Container &__x, _Iter __i)
- constexpr insert_iterator & operator* ()
- constexpr insert_iterator & operator++ ()
- constexpr insert_iterator & operator++ (int)
- constexpr insert_iterator & operator= (const typename _Container::value_type &__value)
- constexpr insert_iterator & **operator=** (typename _Container::value_type &&__value)

Protected Attributes

- _Container * **container**
- _Iter **iter**

4.573.1 Detailed Description

template<typename _Container>class std::insert_iterator< _Container >

Turns assignment into insertion.

These are output iterators, constructed from a container-of-T. Assigning a T to the iterator inserts it in the container at the iterator's position, rather than overwriting the value at that position.

(Sequences will actually insert a *copy* of the value before the iterator's position.)

Tip: Using the inserter function to create these iterators can save typing.

Definition at line 806 of file bits/stl_iterator.h.

4.573.2 Member Typedef Documentation

4.573.2.1 template<typename _Container> typedef _Container std::insert_iterator< _Container >::container_type

A nested typedef for the type of whatever container you used.

Definition at line 825 of file bits/stl_iterator.h.

4.573.2.2 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.573.2.3 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.573.2.4 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.573.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.573.2.6 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.573.3 Constructor & Destructor Documentation

4.573.3.1 template<typename _Container> constexpr std::insert_iterator< _Container >::insert_iterator (_Container & *__x*, _Iter *__i*) [inline]

The only way to create this iterator is with a container and an initial position (a normal iterator into the container).

Definition at line 838 of file bits/stl_iterator.h.

4.573.4 Member Function Documentation

4.573.4.1 template<typename _Container> constexpr insert_iterator& std::insert_iterator< _Container >::operator* ( ) [inline]

Simply returns *this.

Definition at line 895 of file bits/stl_iterator.h.

4.573.4.2 template<typename _Container> constexpr insert_iterator& std::insert_iterator< _Container >::operator++ ( ) [inline]

Simply returns *this. (This iterator does not *move*.)

Definition at line 901 of file bits/stl_iterator.h.

4.573.4.3 template<typename _Container> constexpr insert_iterator& std::insert_iterator< _Container >::operator++ (int) [inline]

Simply returns *this. (This iterator does not *move*.)

Definition at line 907 of file bits/stl_iterator.h.

4.573.4.4 template<typename _Container> constexpr insert_iterator& std::insert_iterator< _Container >::operator= (const typename _Container::value_type & *__value*) [inline]

Parameters

__value	An instance of whatever type container_type::const_reference is; presumably a reference-to-const T for container<T>.

Returns

This iterator, for chained operations.

This kind of iterator maintains its own position in the container. Assigning a value to the iterator will insert the value into the container at the place before the iterator.

The position is maintained such that subsequent assignments will insert values immediately after one another. For example,

```
// vector v contains A and Z

insert_iterator i (v, ++v.begin());
i = 1;
i = 2;
i = 3;

// vector v contains A, 1, 2, 3, and Z
```

Definition at line 875 of file bits/stl_iterator.h.

The documentation for this class was generated from the following file:

- bits/stl_iterator.h

4.574 std::integer_sequence< _Tp, _Idx > Struct Template Reference

Public Types

- typedef _Tp **value_type**

Static Public Member Functions

- static constexpr size_t **size** () noexcept

4.574.1 Detailed Description

template<typename _Tp, _Tp... _Idx>struct std::integer_sequence< _Tp, _Idx >

Class template integer_sequence.

Definition at line 326 of file utility.

The documentation for this struct was generated from the following file:

- utility

4.575 std::integral_constant< _Tp, __v > Struct Template Reference

Inheritance diagram for std::integral_constant< _Tp, __v >:

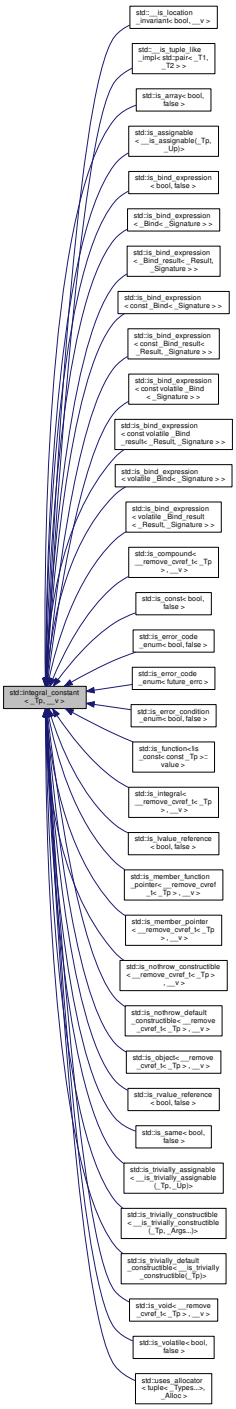

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.575.1 Detailed Description

template<typename _Tp, _Tp __v>struct std::integral_constant< _Tp, __v >

integral_constant

Definition at line 57 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.576 std::invalid_argument Class Reference

Inheritance diagram for std::invalid_argument:

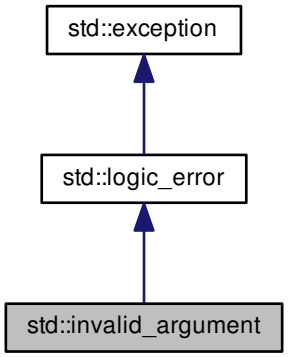

Public Member Functions

- **invalid_argument** (const string &__arg) _GLIBCXX_TXN_SAFE
- **invalid_argument** (const char *) _GLIBCXX_TXN_SAFE
- **invalid_argument** (const invalid_argument &)=default
- **invalid_argument** (invalid_argument &&)=default
- invalid_argument & **operator=** (const invalid_argument &)=default
- invalid_argument & **operator=** (invalid_argument &&)=default
- virtual const char * what () const noexcept

4.576.1 Detailed Description

Thrown to report invalid arguments to functions.

Definition at line 168 of file stdexcept.

4.576.2 Member Function Documentation

4.576.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- stdexcept

4.577 std::ios_base Class Reference

Inheritance diagram for std::ios_base:

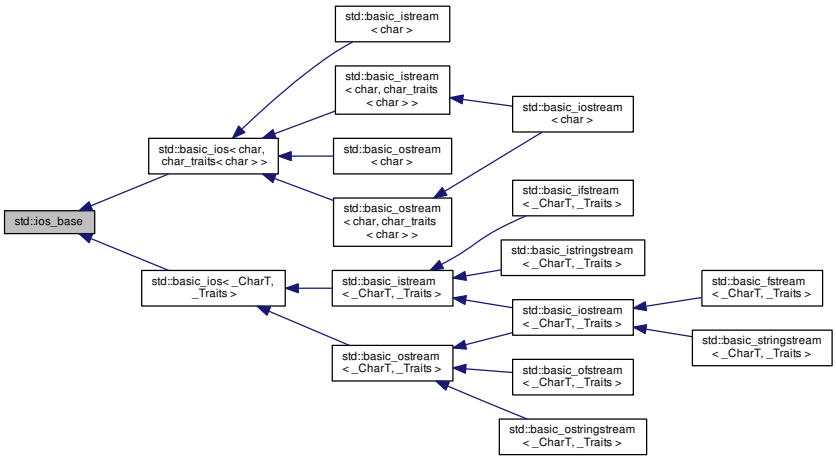

Classes

- class failure

Public Types

- typedef int io_state **_GLIBCXX_DEPRECATED_SUGGEST** ("std::iostate")
- typedef int open_mode **_GLIBCXX_DEPRECATED_SUGGEST** ("std::openmode")
- typedef int seek_dir **_GLIBCXX_DEPRECATED_SUGGEST** ("std::seekdir")
- typedef std::streampos streampos **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streampos")
- typedef std::streamoff streamoff **_GLIBCXX_DEPRECATED_SUGGEST** ("std::streamoff")
- enum event { **erase_event**, **imbue_event**, **copyfmt_event** }
- typedef void(∗ event_callback)(event __e, ios_base &__b, int __i)
- typedef _Ios_Fmtflags fmtflags
- typedef _Ios_Iostate iostate
- typedef _Ios_Openmode openmode
- typedef _Ios_Seekdir seekdir

Public Member Functions

- **ios_base** (const ios_base &)=delete
- virtual ∼ios_base ()
- const locale & _M_getloc () const
- fmtflags flags () const
- fmtflags flags (fmtflags __fmtfl)
- locale getloc () const
- locale imbue (const locale &__loc) throw ()
- long & iword (int __ix)
- ios_base & **operator=** (const ios_base &)=delete
- streamsize precision () const
- streamsize precision (streamsize __prec)
- void ∗& pword (int __ix)
- void register_callback (event_callback __fn, int __index)
- fmtflags setf (fmtflags __fmtfl)
- fmtflags setf (fmtflags __fmtfl, fmtflags __mask)
- void unsetf (fmtflags __mask)
- streamsize width () const
- streamsize width (streamsize __wide)

Static Public Member Functions

- static bool sync_with_stdio (bool __sync=true)
- static int xalloc () throw ()

Static Public Attributes

- static const fmtflags adjustfield
- static const openmode app
- static const openmode ate
- static const iostate badbit
- static const fmtflags basefield
- static const seekdir beg
- static const openmode binary
- static const fmtflags boolalpha
- static const seekdir cur
- static const fmtflags dec
- static const seekdir end
- static const iostate eofbit
- static const iostate failbit
- static const fmtflags fixed
- static const fmtflags floatfield
- static const iostate goodbit
- static const fmtflags hex
- static const openmode in
- static const fmtflags internal
- static const fmtflags left
- static const fmtflags oct
- static const openmode out
- static const fmtflags right
- static const fmtflags scientific
- static const fmtflags showbase
- static const fmtflags showpoint
- static const fmtflags showpos
- static const fmtflags skipws
- static const openmode trunc
- static const fmtflags unitbuf
- static const fmtflags uppercase

Protected Types

- enum { **_S_local_word_size** }

Protected Member Functions

- void **_M_call_callbacks** (event __ev) throw ()
- void **_M_dispose_callbacks** (void) throw ()
- _Words & **_M_grow_words** (int __index, bool __iword)
- void **_M_init** () throw ()
- void **_M_move** (ios_base &) noexcept
- void **_M_swap** (ios_base &__rhs) noexcept

Protected Attributes

- _Callback_list * **_M_callbacks**
- iostate **_M_exception**
- fmtflags **_M_flags**
- locale **_M_ios_locale**
- _Words **_M_local_word** [_S_local_word_size]
- streamsize **_M_precision**
- iostate **_M_streambuf_state**
- streamsize **_M_width**
- _Words * **_M_word**
- int **_M_word_size**
- _Words **_M_word_zero**

4.577.1 Detailed Description

The base of the I/O class hierarchy.

This class defines everything that can be defined about I/O that does not depend on the type of characters being input or output. Most people will only see `ios_base` when they need to specify the full name of the various I/O flags (e.g., the openmodes).

Definition at line 228 of file ios_base.h.

4.577.2 Member Typedef Documentation

4.577.2.1 typedef void(* std::ios_base::event_callback)(event __e, ios_base &__b, int __i)

The type of an event callback function.

Parameters

__e	One of the members of the event enum.
__b	Reference to the ios_base object.
__i	The integer provided when the callback was registered.

Event callbacks are user defined functions that get called during several ios_base and basic_ios functions, specifically imbue(), copyfmt(), and ~ios().

Definition at line 529 of file ios_base.h.

4.577.2.2 typedef _Ios_Fmtflags std::ios_base::fmtflags

This is a bitmask type.

_Ios_Fmtflags is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type fmtflags are:

- boolalpha
- dec
- fixed
- hex
- internal

- left
- oct
- right
- scientific
- showbase
- showpoint
- showpos
- skipws
- unitbuf
- uppercase
- adjustfield
- basefield
- floatfield

Definition at line 341 of file ios_base.h.

4.577.2.3 typedef _Ios_Iostate std::ios_base::iostate

This is a bitmask type.

_Ios_Iostate is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type iostate are:

- badbit
- eofbit
- failbit
- goodbit

Definition at line 416 of file ios_base.h.

4.577.2.4 typedef _Ios_Openmode std::ios_base::openmode

This is a bitmask type.

_Ios_Openmode is implementation-defined, but it is valid to perform bitwise operations on these values and expect the Right Thing to happen. Defined objects of type openmode are:

- app
- ate
- binary
- in
- out
- trunc

Definition at line 447 of file ios_base.h.

4.577.2.5 typedef _Ios_Seekdir std::ios_base::seekdir

This is an enumerated type.

_Ios_Seekdir is implementation-defined. Defined values of type seekdir are:

- beg
- cur, equivalent to SEEK_CUR in the C standard library.
- end, equivalent to SEEK_END in the C standard library.

Definition at line 479 of file ios_base.h.

4.577.3 Member Enumeration Documentation

4.577.3.1 enum std::ios_base::event

The set of events that may be passed to an event callback.

erase_event is used during ~ios() and copyfmt(). imbue_event is used during imbue(). copyfmt_event is used during copyfmt().

Definition at line 512 of file ios_base.h.

4.577.4 Constructor & Destructor Documentation

4.577.4.1 virtual std::ios_base::~ios_base ( ) [virtual]

Invokes each callback with erase_event. Destroys local storage.

Note that the ios_base object for the standard streams never gets destroyed. As a result, any callbacks registered with the standard streams will not get invoked with erase_event (unless copyfmt is used).

4.577.5 Member Function Documentation

4.577.5.1 const locale& std::ios_base::_M_getloc ( ) const [inline]

Locale access.

Returns

A reference to the current locale.

Like getloc above, but returns a reference instead of generating a copy.

Definition at line 804 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::money_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_put< _CharT, _OutIter >::do_put(), std::num_put< _CharT, _OutIter >::do_put(), std::time_get< _CharT, _InIter >::get(), and std::time_put< _CharT, _OutIter >::put().

4.577.5.2 fmtflags std::ios_base::flags ( ) const [inline]

Access to format flags.

Returns

The format control flags for both input and output.

Definition at line 649 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::operator<<(), std::__detail::operator>>(), std::operator>>(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.577.5.3 fmtflags std::ios_base::flags (fmtflags *__fmtfl*) [inline]

Setting new format flags all at once.

Parameters

__fmtfl	The new flags to set.

Returns

The previous format control flags.

This function overwrites all the format flags with *__fmtfl*.

Definition at line 660 of file ios_base.h.

4.577.5.4 locale std::ios_base::getloc ( ) const [inline]

Locale access.

Returns

A copy of the current locale.

If `imbue(loc)` has previously been called, then this function returns `loc`. Otherwise, it returns a copy of `std::locale()`, the global C++ locale.

Definition at line 793 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::money_put< _CharT, _OutIter >::do_put(), std::operator>>(), and std::ws().

4.577.5.5 locale std::ios_base::imbue (const locale & *__loc*) throw)

Setting a new locale.

Parameters

__loc	The new locale.

Returns

The previous locale.

Sets the new locale for this stream, and then invokes each callback with imbue_event.

Referenced by std::basic_ios< _CharT, _Traits >::imbue().

4.577.5.6 long& std::ios_base::iword (int __ix) [inline]

Access to integer array.

Parameters

__ix	Index into the array.

Returns

A reference to an integer associated with the index.

The iword function provides access to an array of integers that can be used for any purpose. The array grows as required to hold the supplied index. All integers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 839 of file ios_base.h.

4.577.5.7 streamsize std::ios_base::precision ( ) const [inline]

Flags access.

Returns

The precision to generate on certain output operations.

Be careful if you try to give a definition of *precision* here; see DR 189.

Definition at line 719 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), and std::operator<<().

4.577.5.8 streamsize std::ios_base::precision (streamsize *__prec*) [inline]

Changing flags.

Parameters

__prec	The new precision value.

Returns

The previous value of precision().

Definition at line 728 of file ios_base.h.

4.577.5.9 void*& std::ios_base::pword (int *__ix*) [inline]

Access to void pointer array.

Parameters

__ix	Index into the array.

Returns

A reference to a void* associated with the index.

The pword function provides access to an array of pointers that can be used for any purpose. The array grows as required to hold the supplied index. All pointers in the array are initialized to 0.

The implementation reserves several indices. You should use xalloc to obtain an index that is safe to use. Also note that since the array can grow dynamically, it is not safe to hold onto the reference.

Definition at line 860 of file ios_base.h.

4.577.5.10 void std::ios_base::register_callback (event_callback *__fn,* int *__index*)

Add the callback __fn with parameter __index.

Parameters

__fn	The function to add.
__index	The integer to pass to the function when invoked.

Registers a function as an event callback with an integer parameter to be passed to the function when invoked. Multiple copies of the function are allowed. If there are multiple callbacks, they are invoked in the order they were registered.

4.577.5.11 fmtflags std::ios_base::setf (fmtflags *__fmtfl*) [inline]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.

Returns

The previous format control flags.

This function sets additional flags in format control. Flags that were previously set remain set.

Definition at line 676 of file ios_base.h.

Referenced by std::boolalpha(), std::dec(), std::fixed(), std::hex(), std::hexfloat(), std::left(), std::oct(), std::__detail::operator>>(), std::right(), std::scientific(), std::showbase(), std::showpoint(), std::showpos(), std::skipws(), std::unitbuf(), and std::uppercase().

4.577.5.12 fmtflags std::ios_base::setf (fmtflags *__fmtfl,* fmtflags *__mask*) [inline]

Setting new format flags.

Parameters

__fmtfl	Additional flags to set.
__mask	The flags mask for *fmtfl*.

Returns

The previous format control flags.

This function clears *mask* in the format flags, then sets *fmtfl* `&` *mask*. An example mask is `ios_base::adjustfield`.

Definition at line 693 of file ios_base.h.

4.577.5.13 static bool std::ios_base::sync_with_stdio (bool *__sync* = `true`) [static]

Interaction with the standard C I/O objects.

Parameters

__sync	Whether to synchronize or not.

Returns

True if the standard streams were previously synchronized.

The synchronization referred to is *only* that between the standard C facilities (e.g., stdout) and the standard C++ objects (e.g., cout). User-declared streams are unaffected. See https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstrea html#std.io.filestreams.binary

4.577.5.14 void std::ios_base::unsetf (fmtflags *__mask*) [inline]

Clearing format flags.

Parameters

__mask	The flags to unset.

This function clears *__mask* in the format flags.

Definition at line 708 of file ios_base.h.

Referenced by std::defaultfloat(), std::noboolalpha(), std::noshowbase(), std::noshowpoint(), std::noshowpos(), std::noskipws(), std::nounitbuf(), and std::nouppercase().

4.577.5.15 streamsize std::ios_base::width ( ) const [inline]

Flags access.

Returns

The minimum field width to generate on output operations.

Minimum field width refers to the number of characters.

Definition at line 742 of file ios_base.h.

Referenced by std::basic_ios< _CharT, _Traits >::copyfmt(), std::num_put< _CharT, _OutIter >::do_put(), and std::operator>>().

4.577.5.16 streamsize std::ios_base::width (streamsize *__wide*) [inline]

Changing flags.

Parameters

__wide	The new width value.

Returns

The previous value of width().

Definition at line 751 of file ios_base.h.

4.577.5.17 static int std::ios_base::xalloc ( ) throw) [static]

Access to unique indices.

Returns

An integer different from all previous calls.

This function returns a unique integer every time it is called. It can be used for any purpose, but is primarily intended to be a unique index for the iword and pword functions. The expectation is that an application calls xalloc in order to obtain an index in the iword and pword arrays that can be used without fear of conflict.

The implementation maintains a static variable that is incremented and returned on each invocation. xalloc is guaranteed to return an index that is safe to use in the iword and pword arrays.

4.577.6 Member Data Documentation

4.577.6.1 const fmtflags std::ios_base::adjustfield [static]

A mask of left|right|internal. Useful for the 2-arg form of `setf`.

Definition at line 396 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::internal(), std::left(), and std::right().

4.577.6.2 const openmode std::ios_base::app [static]

Seek to end before each write.

Definition at line 450 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_filebuf< _CharT, _Traits >::overflow(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.577.6.3 const openmode std::ios_base::ate [static]

Open and seek to end immediately after opening.

Definition at line 453 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open().

4.577.6.4 const iostate std::ios_base::badbit [static]

Indicates a loss of integrity in an input or output sequence (such as an irrecoverable read error from a file).

Definition at line 420 of file ios_base.h.

Referenced by std::basic_ostream< char >::_M_write(), std::basic_ios< char, char_traits< char > >::bad(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::operator<<(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::sync(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_ostream< _CharT, _Traits >::tellp(), std::basic_istream< _CharT, _Traits >::unget(), std::basic_ostream< _CharT, _Traits >::write(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.577.6.5 const fmtflags std::ios_base::basefield [static]

A mask of dec|oct|hex. Useful for the 2-arg form of `setf`.

Definition at line 399 of file ios_base.h.

Referenced by std::dec(), std::num_get< _CharT, _InIter >::do_get(), std::hex(), std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.577.6.6 const seekdir std::ios_base::beg [static]

Request a seek relative to the beginning of the stream.

Definition at line 482 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::seekpos().

4.577.6.7 const openmode std::ios_base::binary [static]

Perform input and output in binary mode (as opposed to text mode). This is probably not what you think it is; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/fstreams.html#std.io.filestreams.binary.

Definition at line 458 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::showmanyc().

4.577.6.8 const fmtflags std::ios_base::boolalpha [static]

Insert/extract `bool` in alphabetic rather than numeric format.

Definition at line 344 of file ios_base.h.

Referenced by std::boolalpha(), std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), and std::noboolalpha().

4.577.6.9 const seekdir std::ios_base::cur [static]

Request a seek relative to the current position within the sequence.

Definition at line 485 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::imbue(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_filebuf< _CharT, _Traits >::seekoff(), std::basic_istream< _CharT, _Traits >::tellg(), and std::basic_ostream< _CharT, _Traits >::tellp().

4.577.6.10 const fmtflags std::ios_base::dec [static]

Converts integer input or generates integer output in decimal base.

Definition at line 347 of file ios_base.h.

Referenced by std::dec().

4.577.6.11 const seekdir std::ios_base::end [static]

Request a seek relative to the current end of the sequence.

Definition at line 488 of file ios_base.h.

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff().

4.577.6.12 const iostate std::ios_base::eofbit [static]

Indicates that an input operation reached the end of an input sequence.

Definition at line 423 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_date(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_time(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::eof(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _Traits >::unget(), and std::ws().

4.577.6.13 const iostate std::ios_base::failbit [static]

Indicates that an input operation failed to read the expected characters, or that an output operation failed to generate the desired characters.

Definition at line 428 of file ios_base.h.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ios< char, char_traits< char > >::fail(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_fstream< _CharT, _Traits >::open(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_ostream< _CharT, _Traits >::sentry::sentry(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.577.6.14 const fmtflags std::ios_base::fixed [static]

Generate floating-point output in fixed-point notation.

Definition at line 350 of file ios_base.h.

Referenced by std::fixed(), and std::hexfloat().

4.577.6.15 const fmtflags std::ios_base::floatfield [static]

A mask of scientific|fixed. Useful for the 2-arg form of `setf`.

Definition at line 402 of file ios_base.h.

Referenced by std::defaultfloat(), std::fixed(), std::hexfloat(), and std::scientific().

4.577.6.16 const iostate std::ios_base::goodbit [static]

Indicates all is well.

Definition at line 431 of file ios_base.h.

Referenced by std::time_get< _CharT, _InIter >::do_get(), std::num_get< _CharT, _InIter >::do_get(), std::time_get< _CharT, _InIter >::do_get_monthname(), std::time_get< _CharT, _InIter >::do_get_weekday(), std::time_get< _CharT, _InIter >::do_get_year(), std::basic_ostream< _CharT, _Traits >::flush(), std::basic_istream< _CharT, _Traits >::get(), std::time_get< _CharT, _InIter >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::basic_ostream< _CharT, _Traits >::operator<<(), std::basic_istream< _CharT, _Traits >::operator>>(), std::operator>>(), std::basic_istream< _CharT, _Traits >::peek(), std::basic_ostream< _CharT, _Traits >::put(), std::basic_istream< _CharT, _Traits >::putback(), std::basic_istream< _CharT, _Traits >::read(), std::basic_istream< _CharT, _Traits >::readsome(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), std::basic_istream< _CharT, _-

Traits >::sync(), and std::basic_istream< _CharT, _Traits >::unget().

4.577.6.17 const fmtflags std::ios_base::hex [static]

Converts integer input or generates integer output in hexadecimal base.

Definition at line 353 of file ios_base.h.

Referenced by std::num_get< _CharT, _InIter >::do_get(), std::num_put< _CharT, _OutIter >::do_put(), std::hex(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.577.6.18 const openmode std::ios_base::in [static]

Open for input. Default for `ifstream` and fstream.

Definition at line 461 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::pbackfail(), std::basic_istream< _CharT, _Traits >::seekg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_filebuf< _CharT, _Traits >::showmanyc(), std::basic_istream< _CharT, _Traits >::tellg(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::underflow(), std::basic_filebuf< _CharT, _Traits >::underflow(), and std::basic_filebuf< _CharT, _Traits >::xsgetn().

4.577.6.19 const fmtflags std::ios_base::internal [static]

Adds fill characters at a designated internal point in certain generated output, or identical to `right` if no such point is designated.

Definition at line 358 of file ios_base.h.

Referenced by std::internal().

4.577.6.20 const fmtflags std::ios_base::left [static]

Adds fill characters on the right (final positions) of certain generated output. (I.e., the thing you print is flush left.)

Definition at line 362 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), and std::left().

4.577.6.21 const fmtflags std::ios_base::oct [static]

Converts integer input or generates integer output in octal base.

Definition at line 365 of file ios_base.h.

Referenced by std::oct(), and std::basic_ostream< _CharT, _Traits >::operator<<().

4.577.6.22 const openmode std::ios_base::out [static]

Open for output. Default for `ofstream` and fstream.

Definition at line 464 of file ios_base.h.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer(), std::basic_ofstream< _CharT, _Traits >::open(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::overflow(), std::basic_filebuf< _CharT, _Traits >::overflow(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::pbackfail(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekoff(), std::basic_ostream< _CharT, _Traits >::seekp(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::seekpos(), std::basic_ostream< _CharT, _Traits >::tellp(), and std::basic_filebuf< _CharT, _Traits >::xsputn().

4.577.6.23 const fmtflags std::ios_base::right [static]

Adds fill characters on the left (initial positions) of certain generated output. (I.e., the thing you print is flush right.)

Definition at line 369 of file ios_base.h.

Referenced by std::right().

4.577.6.24 const fmtflags std::ios_base::scientific [static]

Generates floating-point output in scientific notation.

Definition at line 372 of file ios_base.h.

Referenced by std::hexfloat(), and std::scientific().

4.577.6.25 const fmtflags std::ios_base::showbase [static]

Generates a prefix indicating the numeric base of generated integer output.

Definition at line 376 of file ios_base.h.

Referenced by std::noshowbase(), and std::showbase().

4.577.6.26 const fmtflags std::ios_base::showpoint [static]

Generates a decimal-point character unconditionally in generated floating-point output.

Definition at line 380 of file ios_base.h.

Referenced by std::noshowpoint(), and std::showpoint().

4.577.6.27 const fmtflags std::ios_base::showpos [static]

Generates a + sign in non-negative generated numeric output.

Definition at line 383 of file ios_base.h.

Referenced by std::noshowpos(), and std::showpos().

4.577.6.28 const fmtflags std::ios_base::skipws [static]

Skips leading white space before certain input operations.

Definition at line 386 of file ios_base.h.

Referenced by std::noskipws(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::skipws().

4.577.6.29 const openmode std::ios_base::trunc [static]

Truncate an existing stream when opening. Default for `ofstream`.

Definition at line 467 of file ios_base.h.

4.577.6.30 const fmtflags std::ios_base::unitbuf [static]

Flushes output after each output operation.

Definition at line 389 of file ios_base.h.

Referenced by std::nounitbuf(), std::unitbuf(), and std::basic_ostream< _CharT, _Traits >::sentry::~sentry().

4.577.6.31 const fmtflags std::ios_base::uppercase [static]

Replaces certain lowercase letters with their uppercase equivalents in generated output.

Definition at line 393 of file ios_base.h.

Referenced by std::num_put< _CharT, _OutIter >::do_put(), std::nouppercase(), and std::uppercase().

The documentation for this class was generated from the following file:

- ios_base.h

4.578 std::is_abstract< _Tp > Struct Template Reference

Inheritance diagram for std::is_abstract< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.578.1 Detailed Description

template<typename _Tp>struct std::is_abstract< _Tp >

is_abstract

Definition at line 736 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.579 std::is_arithmetic< _Tp > Struct Template Reference

Inherits type< is_integral< _Tp >, is_floating_point< _Tp > >.

4.579.1 Detailed Description

template<typename _Tp>struct std::is_arithmetic< _Tp >

is_arithmetic

Definition at line 534 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.580 std::is_array< typename > Struct Template Reference

Inheritance diagram for std::is_array< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.580.1 Detailed Description

template<typename>struct std::is_array< typename >

is_array

Definition at line 399 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.581 std::is_assignable< _Tp, _Up > Struct Template Reference

Inheritance diagram for std::is_assignable< _Tp, _Up >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.581.1 Detailed Description

template<typename _Tp, typename _Up>struct std::is_assignable< _Tp, _Up >

is_assignable

Definition at line 1069 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.582 std::is_base_of< _Base, _Derived > Struct Template Reference

Inheritance diagram for std::is_base_of< _Base, _Derived >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.582.1 Detailed Description

template<typename _Base, typename _Derived>struct std::is_base_of< _Base, _Derived >

is_base_of

Definition at line 1411 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.583 std::is_bind_expression< _Tp > Struct Template Reference

Inheritance diagram for std::is_bind_expression< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.583.1 Detailed Description

template<typename _Tp>struct std::is_bind_expression< _Tp >

Determines if the given type _Tp is a function object that should be treated as a subexpression when evaluating calls to function objects returned by bind().

C++11 [func.bind.isbind].

Definition at line 184 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.584 std::is_bind_expression< _Bind< _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< _Bind< _Signature > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.584.1 Detailed Description

template<typename _Signature>struct std::is_bind_expression< _Bind< _Signature > >

Class template _Bind is always a bind expression.

Definition at line 670 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.585 std::is_bind_expression< _Bind_result< _Result, _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< _Bind_result< _Result, _Signature > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.585.1 Detailed Description

template<typename _Result, typename _Signature>struct std::is_bind_expression< _Bind_result< _Result, _Signature > >

Class template _Bind_result is always a bind expression.

Definition at line 702 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.586 std::is_bind_expression< const _Bind< _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< const _Bind< _Signature > >:

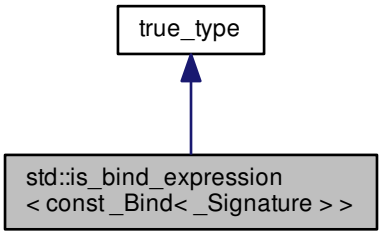

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.586.1 Detailed Description

template<typename _Signature>struct std::is_bind_expression< const _Bind< _Signature > >

Class template _Bind is always a bind expression.

Definition at line 678 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.587 std::is_bind_expression< const _Bind_result< _Result, _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< const _Bind_result< _Result, _Signature > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.587.1 Detailed Description

template<typename _Result, typename _Signature>struct std::is_bind_expression< const _Bind_result< _Result, _Signature > >

Class template _Bind_result is always a bind expression.

Definition at line 710 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.588 std::is_bind_expression< const volatile _Bind< _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< const volatile _Bind< _Signature > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.588.1 Detailed Description

template<typename _Signature>struct std::is_bind_expression< const volatile _Bind< _Signature > >

Class template _Bind is always a bind expression.

Definition at line 694 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.589 std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > >:

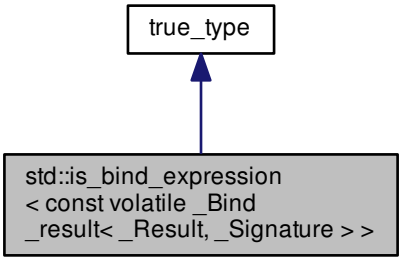

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.589.1 Detailed Description

template<typename _Result, typename _Signature>struct std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > >

Class template _Bind_result is always a bind expression.

Definition at line 726 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.590 std::is_bind_expression< volatile _Bind< _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< volatile _Bind< _Signature > >:

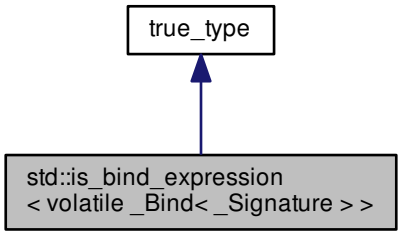

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.590.1 Detailed Description

template<typename _Signature>struct std::is_bind_expression< volatile _Bind< _Signature > >

Class template _Bind is always a bind expression.

Definition at line 686 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.591 std::is_bind_expression< volatile _Bind_result< _Result, _Signature > > Struct Template Reference

Inheritance diagram for std::is_bind_expression< volatile _Bind_result< _Result, _Signature > >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.591.1 Detailed Description

template<typename _Result, typename _Signature>struct std::is_bind_expression< volatile _Bind_result< _Result, _Signature > >

Class template _Bind_result is always a bind expression.

Definition at line 718 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.592 std::is_class< _Tp > Struct Template Reference

Inheritance diagram for std::is_class< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.592.1 Detailed Description

template<typename _Tp>struct std::is_class< _Tp >

is_class

Definition at line 484 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.593 std::is_compound< _Tp > Struct Template Reference

Inheritance diagram for std::is_compound< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.593.1 Detailed Description

template<typename _Tp>struct std::is_compound< _Tp >

is_compound

Definition at line 564 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.594 std::is_const< typename > Struct Template Reference

Inheritance diagram for std::is_const< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.594.1 Detailed Description

template<typename>struct std::is_const< typename >

is_const

Definition at line 234 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.595 std::is_constructible< _Tp, _Args > Struct Template Reference

Inherits std::__is_constructible_impl< _Tp, _Args >.

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.595.1 Detailed Description

template<typename _Tp, typename... _Args>struct std::is_constructible< _Tp, _Args >

is_constructible

Definition at line 906 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.596 std::is_convertible< _From, _To > Struct Template Reference

Inherits type< _From, _To >.

4.596.1 Detailed Description

template<typename _From, typename _To>struct std::is_convertible< _From, _To >

is_convertible

Definition at line 1447 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.597 std::is_copy_assignable< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.597.1 Detailed Description

template<typename _Tp>struct std::is_copy_assignable< _Tp >

is_copy_assignable

Definition at line 1090 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.598 std::is_copy_constructible< _Tp > Struct Template Reference

Inherits std::__is_copy_constructible_impl< _Tp, bool >.

Inherited by std::__is_copy_insertable< allocator< _Tp > >.

4.598.1 Detailed Description

template<typename _Tp>struct std::is_copy_constructible< _Tp >

is_copy_constructible

Definition at line 936 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.599 std::is_default_constructible< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.599.1 Detailed Description

template<typename _Tp>struct std::is_default_constructible< _Tp >

is_default_constructible

Definition at line 915 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.600 std::is_destructible< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.600.1 Detailed Description

template<typename _Tp>struct std::is_destructible< _Tp >

is_destructible

Definition at line 841 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.601 std::is_empty< _Tp > Struct Template Reference

Inheritance diagram for std::is_empty< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.601.1 Detailed Description

template<typename _Tp>struct std::is_empty< _Tp >

is_empty

Definition at line 715 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.602 std::is_enum< _Tp > Struct Template Reference

Inheritance diagram for std::is_enum< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.602.1 Detailed Description

template<typename _Tp>struct std::is_enum< _Tp >

is_enum

Definition at line 472 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.603 std::is_error_code_enum< _Tp > Struct Template Reference

Inheritance diagram for std::is_error_code_enum< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.603.1 Detailed Description

template<typename _Tp>struct std::is_error_code_enum< _Tp >

is_error_code_enum

Definition at line 60 of file system_error.

The documentation for this struct was generated from the following file:

- system_error

4.604 std::is_error_code_enum< future_errc > Struct Template Reference

Inheritance diagram for std::is_error_code_enum< future_errc >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.604.1 Detailed Description

template<><>struct std::is_error_code_enum< future_errc >

Specialization.

Definition at line 76 of file future.

The documentation for this struct was generated from the following file:

- future

4.605 std::is_error_condition_enum< _Tp > Struct Template Reference

Inheritance diagram for std::is_error_condition_enum< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.605.1 Detailed Description

template<typename _Tp>struct std::is_error_condition_enum< _Tp >

is_error_condition_enum

Definition at line 64 of file system_error.

The documentation for this struct was generated from the following file:

- system_error

4.606 std::is_final< _Tp > Struct Template Reference

Inheritance diagram for std::is_final< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.606.1 Detailed Description

template<typename _Tp>struct std::is_final< _Tp >

is_final

Definition at line 729 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.607 std::is_floating_point< _Tp > Struct Template Reference

Inherits type< __remove_cv_t< _Tp > >.

4.607.1 Detailed Description

template<typename _Tp>struct std::is_floating_point< _Tp >

is_floating_point

Definition at line 393 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.608 std::is_function< typename > Struct Template Reference

Inheritance diagram for std::is_function< typename >:

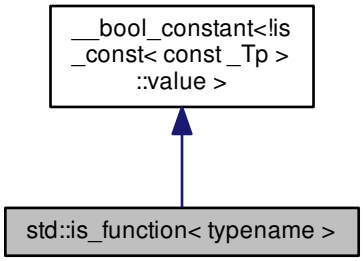

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.608.1 Detailed Description

template<typename>struct std::is_function< typename >

is_function

Definition at line 191 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.609 std::is_fundamental< _Tp > Struct Template Reference

Inherits type< is_arithmetic< _Tp >, is_void< _Tp >, is_null_pointer< _Tp > >.

4.609.1 Detailed Description

template<typename _Tp>struct std::is_fundamental< _Tp >

is_fundamental

Definition at line 540 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.610 std::is_integral< _Tp > Struct Template Reference

Inheritance diagram for std::is_integral< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.610.1 Detailed Description

template<typename _Tp>struct std::is_integral< _Tp >

is_integral

Definition at line 365 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.611 std::is_literal_type< _Tp > Struct Template Reference

Inheritance diagram for std::is_literal_type< _Tp >:

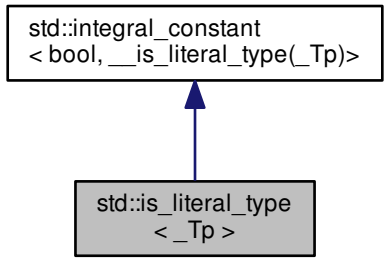

Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.611.1 Detailed Description

template<typename _Tp>struct std::is_literal_type< _Tp >

is_literal_type

Definition at line 706 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.612 std::is_lvalue_reference< typename > Struct Template Reference

Inheritance diagram for std::is_lvalue_reference< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.612.1 Detailed Description

template<typename>struct std::is_lvalue_reference< typename >

is_lvalue_reference

Definition at line 426 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.613 std::is_member_function_pointer< _Tp > Struct Template Reference

Inheritance diagram for std::is_member_function_pointer< _Tp >:

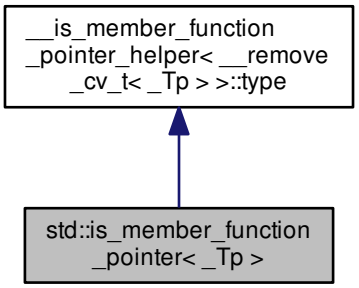

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.613.1 Detailed Description

template<typename _Tp>struct std::is_member_function_pointer< _Tp >

is_member_function_pointer

Definition at line 466 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.614 std::is_member_object_pointer< _Tp > Struct Template Reference

Inherits type< __remove_cv_t< _Tp > >.

4.614.1 Detailed Description

template<typename _Tp>struct std::is_member_object_pointer< _Tp >

is_member_object_pointer

Definition at line 452 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.615 std::is_member_pointer< typename > Struct Template Reference

Inheritance diagram for std::is_member_pointer< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**

- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.615.1 Detailed Description

template<typename>struct std::is_member_pointer< typename >

is_member_pointer

Definition at line 553 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.616 std::is_move_assignable< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.616.1 Detailed Description

template<typename _Tp>struct std::is_move_assignable< _Tp >

is_move_assignable

Definition at line 1111 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.617 std::is_move_constructible< _Tp > Struct Template Reference

Inherits std::__is_move_constructible_impl< _Tp, bool >.

Inherited by std::__is_move_insertable< allocator< _Tp > >.

4.617.1 Detailed Description

template<typename _Tp>struct std::is_move_constructible< _Tp >

is_move_constructible

Definition at line 957 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.618 std::is_nothrow_assignable< _Tp, _Up > Struct Template Reference

Inherits std::__is_nothrow_assignable_impl< _Tp, _Up >.

4.618.1 Detailed Description

template<typename _Tp, typename _Up>struct std::is_nothrow_assignable< _Tp, _Up >

is_nothrow_assignable

Definition at line 1131 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.619 std::is_nothrow_constructible< _Tp, _Args > Struct Template Reference

Inheritance diagram for std::is_nothrow_constructible< _Tp, _Args >:

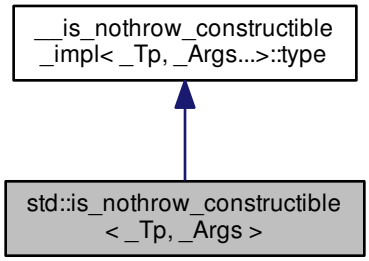

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.619.1 Detailed Description

template<typename _Tp, typename... _Args>struct std::is_nothrow_constructible< _Tp, _Args >

is_nothrow_constructible

Definition at line 1008 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.620 std::is_nothrow_copy_assignable< _Tp > Struct Template Reference

Inherits std::__is_nt_copy_assignable_impl< _Tp, bool >.

4.620.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_copy_assignable< _Tp >

is_nothrow_copy_assignable

Definition at line 1152 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.621 std::is_nothrow_copy_constructible< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.621.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_copy_constructible< _Tp >

is_nothrow_copy_constructible

Definition at line 1039 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.622 std::is_nothrow_default_constructible< _Tp > Struct Template Reference

Inheritance diagram for std::is_nothrow_default_constructible< _Tp >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.622.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_default_constructible< _Tp >

is_nothrow_default_constructible

Definition at line 1017 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.623 std::is_nothrow_destructible< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.623.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_destructible< _Tp >

is_nothrow_destructible

Definition at line 892 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.624 std::is_nothrow_move_assignable< _Tp > Struct Template Reference

Inherits std::__is_nt_move_assignable_impl< _Tp, bool >.

4.624.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_move_assignable< _Tp >

is_nothrow_move_assignable

Definition at line 1173 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.625 std::is_nothrow_move_constructible< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.625.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_move_constructible< _Tp >

is_nothrow_move_constructible

Definition at line 1060 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.626 std::is_nothrow_swappable< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.626.1 Detailed Description

template<typename _Tp>struct std::is_nothrow_swappable< _Tp >

is_nothrow_swappable

Definition at line 2729 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.627 std::is_nothrow_swappable_with< _Tp, _Up > Struct Template Reference

Inherits type< _Tp, _Up >.

4.627.1 Detailed Description

template<typename _Tp, typename _Up>struct std::is_nothrow_swappable_with< _Tp, _Up >

is_nothrow_swappable_with

Definition at line 2816 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.628 std::is_null_pointer< _Tp > Struct Template Reference

Inheritance diagram for std::is_null_pointer< _Tp >:



4.628.1 Detailed Description

template<typename _Tp>struct std::is_null_pointer< _Tp >

is_null_pointer (LWG 2247).

Definition at line 513 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.629 std::is_object< _Tp > Struct Template Reference

Inheritance diagram for std::is_object< _Tp >:

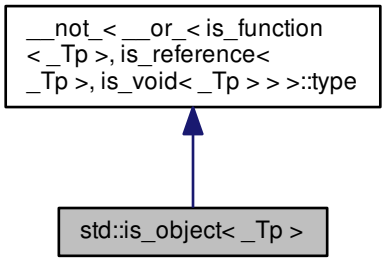

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.629.1 Detailed Description

template<typename _Tp>struct std::is_object< _Tp >

is_object

Definition at line 547 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.630 std::is_placeholder< _Tp > Struct Template Reference

Inheritance diagram for std::is_placeholder< _Tp >:



Public Types

- typedef integral_constant< int, __v > **type**
- typedef int **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr int **value**

4.630.1 Detailed Description

template<typename _Tp>struct std::is_placeholder< _Tp >

Determines if the given type _Tp is a placeholder in a bind() expression and, if so, which placeholder it is.

C++11 [func.bind.isplace].

Definition at line 195 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.631 std::is_placeholder< _Placeholder< _Num > > Struct Template Reference

Inheritance diagram for std::is_placeholder< _Placeholder< _Num > >:



Public Types

- typedef integral_constant< int, __v > **type**
- typedef int **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr int **value**

4.631.1 Detailed Description

template<int _Num>struct std::is_placeholder< _Placeholder< _Num > >

Partial specialization of is_placeholder that provides the placeholder number for the placeholder objects defined by libstdc++.

Definition at line 258 of file functional.

The documentation for this struct was generated from the following file:

- functional

4.632 std::is_pod< _Tp > Struct Template Reference

Inheritance diagram for std::is_pod< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.632.1 Detailed Description

template<typename _Tp>struct std::is_pod< _Tp >

is_pod (deprecated in C++20)

Definition at line 695 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.633 std::is_pointer< _Tp > Struct Template Reference

Inherits type< __remove_cv_t< _Tp > >.

4.633.1 Detailed Description

template<typename _Tp>struct std::is_pointer< _Tp >

is_pointer

Definition at line 420 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.634 std::is_polymorphic< _Tp > Struct Template Reference

Inheritance diagram for std::is_polymorphic< _Tp >:

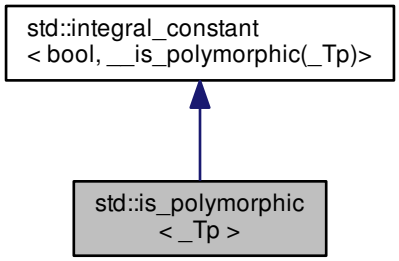

Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.634.1 Detailed Description

template<typename _Tp>struct std::is_polymorphic< _Tp >

is_polymorphic

Definition at line 721 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.635 std::is_reference< typename > Struct Template Reference

Inherits type< is_lvalue_reference< _Tp >, is_rvalue_reference< _Tp > >.

4.635.1 Detailed Description

template<typename>struct std::is_reference< typename >

is_reference

Definition at line 189 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.636 std::is_rvalue_reference< typename > Struct Template Reference

Inheritance diagram for std::is_rvalue_reference< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.636.1 Detailed Description

template<typename>struct std::is_rvalue_reference< typename >

is_rvalue_reference

Definition at line 435 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.637 std::is_same< typename, typename > Struct Template Reference

Inheritance diagram for std::is_same< typename, typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.637.1 Detailed Description

template<typename, typename>struct std::is_same< typename, typename >

is_same

Definition at line 582 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.638 std::is_scalar< _Tp > Struct Template Reference

Inherits type< is_arithmetic< _Tp >, is_enum< _Tp >, is_pointer< _Tp >, is_member_pointer< _Tp >, is_null_pointer< _Tp > >.

4.638.1 Detailed Description

template<typename _Tp>struct std::is_scalar< _Tp >

is_scalar

Definition at line 557 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.639 std::is_standard_layout< _Tp > Struct Template Reference

Inheritance diagram for std::is_standard_layout< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.639.1 Detailed Description

template<typename _Tp>struct std::is_standard_layout< _Tp >

is_standard_layout

Definition at line 685 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.640 std::is_swappable< _Tp > Struct Template Reference

Inherits type< _Tp >.

4.640.1 Detailed Description

template<typename _Tp>struct std::is_swappable< _Tp >

Metafunctions used for detecting swappable types: p0185r1.

is_swappable

Definition at line 2720 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.641 std::is_swappable_with< _Tp, _Up > Struct Template Reference

Inherits type< _Tp, _Up >.

4.641.1 Detailed Description

template<typename _Tp, typename _Up>struct std::is_swappable_with< _Tp, _Up >

is_swappable_with

Definition at line 2810 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.642 std::is_trivial< _Tp > Struct Template Reference

Inheritance diagram for std::is_trivial< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.642.1 Detailed Description

template<typename _Tp>struct std::is_trivial< _Tp >

is_trivial

Definition at line 667 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.643 std::is_trivially_assignable< _Tp, _Up > Struct Template Reference

Inheritance diagram for std::is_trivially_assignable< _Tp, _Up >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.643.1 Detailed Description

template<typename _Tp, typename _Up>struct std::is_trivially_assignable< _Tp, _Up >

is_trivially_assignable

Definition at line 1276 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.644 std::is_trivially_constructible< _Tp, _Args > Struct Template Reference

Inheritance diagram for std::is_trivially_constructible< _Tp, _Args >:

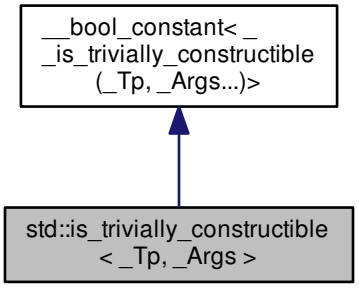

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.644.1 Detailed Description

template<typename _Tp, typename... _Args>struct std::is_trivially_constructible< _Tp, _Args >

is_trivially_constructible

Definition at line 1182 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.645 std::is_trivially_copy_assignable< _Tp > Struct Template Reference

Inherits std::__is_trivially_copy_assignable_impl< _Tp, bool >.

4.645.1 Detailed Description

template<typename _Tp>struct std::is_trivially_copy_assignable< _Tp >

is_trivially_copy_assignable

Definition at line 1297 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.646 std::is_trivially_copy_constructible< _Tp > Struct Template Reference

Inherits std::__is_trivially_copy_constructible_impl< _Tp, bool >.

4.646.1 Detailed Description

template<typename _Tp>struct std::is_trivially_copy_constructible< _Tp >

is_trivially_copy_constructible

Definition at line 1244 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.647 std::is_trivially_default_constructible< _Tp > Struct Template Reference

Inheritance diagram for std::is_trivially_default_constructible< _Tp >:

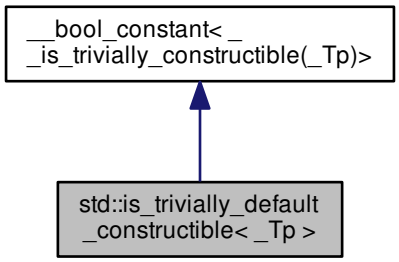

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.647.1 Detailed Description

template<typename _Tp>struct std::is_trivially_default_constructible< _Tp >

is_trivially_default_constructible

Definition at line 1191 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.648 std::is_trivially_destructible< _Tp > Struct Template Reference

Inherits std::__and_<>.

4.648.1 Detailed Description

template<typename _Tp>struct std::is_trivially_destructible< _Tp >

is_trivially_destructible

Definition at line 1327 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.649 std::is_trivially_move_assignable< _Tp > Struct Template Reference

Inherits std::__is_trivially_move_assignable_impl< _Tp, bool >.

4.649.1 Detailed Description

template<typename _Tp>struct std::is_trivially_move_assignable< _Tp >

is_trivially_move_assignable

Definition at line 1318 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.650 std::is_trivially_move_constructible< _Tp > Struct Template Reference

Inherits std::__is_trivially_move_constructible_impl< _Tp, bool >.

4.650.1 Detailed Description

template<typename _Tp>struct std::is_trivially_move_constructible< _Tp >

is_trivially_move_constructible

Definition at line 1267 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.651 std::is_union< _Tp > Struct Template Reference

Inheritance diagram for std::is_union< _Tp >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.651.1 Detailed Description

template<typename _Tp>struct std::is_union< _Tp >

is_union

Definition at line 478 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.652 std::is_void< typename > Struct Template Reference

Inheritance diagram for std::is_void< typename >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.652.1 Detailed Description

template<typename>struct std::is_void< typename >

is_void

Definition at line 193 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.653 std::is_volatile< typename > Struct Template Reference

Inheritance diagram for std::is_volatile< typename >:

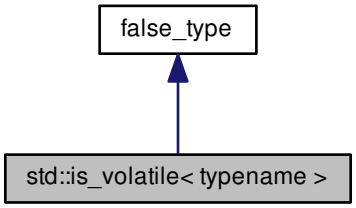

Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.653.1 Detailed Description

template<typename>struct std::is_volatile< typename >

is_volatile

Definition at line 658 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.654 std::istream_iterator< _Tp, _CharT, _Traits, _Dist > Class Template Reference

Inheritance diagram for std::istream_iterator< _Tp, _CharT, _Traits, _Dist >:



Public Types

- typedef _CharT **char_type**
- typedef _Dist difference_type
- typedef basic_istream< _CharT, _Traits > **istream_type**
- typedef input_iterator_tag iterator_category
- typedef const _Tp * pointer
- typedef const _Tp & reference
- typedef _Traits **traits_type**
- typedef _Tp value_type

Public Member Functions

- constexpr istream_iterator ()
- istream_iterator (istream_type &__s)
- **istream_iterator** (const istream_iterator &__obj)

- const _Tp & **operator*** () const
- istream_iterator & **operator++** ()
- istream_iterator **operator++** (int)
- const _Tp * **operator->** () const
- istream_iterator & **operator=** (const istream_iterator &)=default

Friends

- bool operator!= (const istream_iterator &__x, const istream_iterator &__y)
- bool operator== (const istream_iterator &__x, const istream_iterator &__y)

4.654.1 Detailed Description

template<typename _Tp, typename _CharT = char, typename _Traits = char_traits<_CharT>, typename _Dist = ptrdiff_t>class std::istream_iterator< _Tp, _CharT, _Traits, _Dist >

Provides input iterator semantics for streams.

Definition at line 49 of file stream_iterator.h.

4.654.2 Member Typedef Documentation

4.654.2.1 typedef _Dist std::iterator< input_iterator_tag , _Tp, _Dist , const _Tp * , const _Tp & >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.654.2.2 typedef input_iterator_tag std::iterator< input_iterator_tag , _Tp, _Dist , const _Tp * , const _Tp & >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.654.2.3 typedef const _Tp * std::iterator< input_iterator_tag , _Tp, _Dist , const _Tp * , const _Tp & >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.654.2.4 typedef const _Tp & std::iterator< input_iterator_tag , _Tp, _Dist , const _Tp * , const _Tp & >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.654.2.5 typedef _Tp std::iterator< input_iterator_tag , _Tp, _Dist , const _Tp * , const _Tp & >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.654.3 Constructor & Destructor Documentation

4.654.3.1 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>, typename _Dist = ptrdiff_t> constexpr std::istream_iterator< _Tp, _CharT, _Traits, _Dist >::istream_iterator ( ) [inline]

Construct end of input stream iterator.

Definition at line 67 of file stream_iterator.h.

4.654.3.2 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>, typename _Dist = ptrdiff_t> std::istream_iterator< _Tp, _CharT, _Traits, _Dist >::istream_iterator (istream_type & __s) [inline]

Construct start of input stream iterator.

Definition at line 71 of file stream_iterator.h.

4.654.4 Friends And Related Function Documentation

4.654.4.1 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>, typename _Dist = ptrdiff_t> bool operator!= (const istream_iterator< _Tp, _CharT, _Traits, _Dist > & __x, const istream_iterator< _Tp, _CharT, _Traits, _Dist > & __y) [friend]

Return true if the iterators refer to different streams, or if one is at end-of-stream and the other is not.

Definition at line 153 of file stream_iterator.h.

4.654.4.2 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>, typename _Dist = ptrdiff_t> bool operator== (const istream_iterator< _Tp, _CharT, _Traits, _Dist > & __x, const istream_iterator< _Tp, _CharT, _Traits, _Dist > & __y) [friend]

Return true if the iterators refer to the same stream, or are both at end-of-stream.

Definition at line 147 of file stream_iterator.h.

The documentation for this class was generated from the following file:

- stream_iterator.h

4.655 std::istreambuf_iterator< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::istreambuf_iterator< _CharT, _Traits >:



Public Types

- typedef _Traits::off_type difference_type
- typedef input_iterator_tag iterator_category
- typedef _CharT * pointer
- typedef _CharT reference
- typedef _CharT value_type

- typedef _CharT char_type
- typedef _Traits traits_type
- typedef _Traits::int_type int_type
- typedef basic_streambuf < _CharT, _Traits > streambuf_type
- typedef basic_istream< _CharT, _Traits > istream_type

Public Member Functions

- constexpr istreambuf_iterator () noexcept
- **istreambuf_iterator** (const istreambuf_iterator &) noexcept=default
- istreambuf_iterator (istream_type &__s) noexcept
- istreambuf_iterator (streambuf_type *__s) noexcept
- bool equal (const istreambuf_iterator &__b) const
- char_type operator* () const
- istreambuf_iterator & operator++ ()
- istreambuf_iterator operator++ (int)
- istreambuf_iterator & **operator=** (const istreambuf_iterator &) noexcept=default

Friends

- template<bool _IsMove, typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, _CharT2 * >::__type **__copy_move_a2** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _-CharT2 >, _CharT2 *)
- template<typename _CharT2 , typename _Size >
  __enable_if_t< __is_char
  < _CharT2 >::__value, _CharT2 * > **__copy_n_a** (istreambuf_iterator< _CharT2 >, _Size, _CharT2 *)
- template<typename _CharT2 , typename _Distance >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, void >::__type **advance** (istreambuf_iterator< _CharT2 > &, _Distance)
- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, ostreambuf_iterator
  < _CharT2 > >::__type **copy** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _CharT2 >, ostreambuf-_iterator< _CharT2 >)
- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, istreambuf_iterator
  < _CharT2 > >::__type **find** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _CharT2 >, const _CharT2 &)

4.655.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::istreambuf_iterator< _CharT, _Traits >

Provides input iterator semantics for streambufs.

Definition at line 125 of file iosfwd.

4.655.2 Member Typedef Documentation

4.655.2.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef _CharT std::istreambuf_iterator< _CharT, _Traits >::char_type

Public typedefs.

Definition at line 66 of file streambuf_iterator.h.

4.655.2.2 typedef _Traits::off_type std::iterator< input_iterator_tag , _CharT , _Traits::off_type , _CharT * , _CharT >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.655.2.3 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef _Traits::int_type std::istreambuf_iterator< _CharT, _Traits >::int_type

Public typedefs.

Definition at line 68 of file streambuf_iterator.h.

4.655.2.4 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef basic_istream<_CharT, _Traits> std::istreambuf_iterator< _CharT, _Traits >::istream_type

Public typedefs.

Definition at line 70 of file streambuf_iterator.h.

4.655.2.5 typedef input_iterator_tag std::iterator< input_iterator_tag , _CharT , _Traits::off_type , _CharT * , _CharT >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.655.2.6 typedef _CharT * std::iterator< input_iterator_tag , _CharT , _Traits::off_type , _CharT * , _CharT >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.655.2.7 typedef _CharT std::iterator< input_iterator_tag , _CharT , _Traits::off_type , _CharT * , _CharT >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.655.2.8 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef basic_streambuf<_CharT, _Traits> std::istreambuf_iterator< _CharT, _Traits >::streambuf_type

Public typedefs.

Definition at line 69 of file streambuf_iterator.h.

4.655.2.9 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef _Traits std::istreambuf_iterator< _CharT, _Traits >::traits_type

Public typedefs.

Definition at line 67 of file streambuf_iterator.h.

4.655.2.10 typedef _CharT std::iterator< input_iterator_tag , _CharT , _Traits::off_type , _CharT * , _CharT >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.655.3 Constructor & Destructor Documentation

4.655.3.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> constexpr std::istreambuf_iterator< _CharT, _Traits >::istreambuf_iterator ( ) [inline], [noexcept]

Construct end of input stream iterator.

Definition at line 115 of file streambuf_iterator.h.

4.655.3.2 template<typename _CharT , typename _Traits = char_traits<_CharT>> std::istreambuf_iterator< _CharT, _Traits >::istreambuf_iterator (istream_type & __s) [inline], [noexcept]

Construct start of input stream iterator.

Definition at line 130 of file streambuf_iterator.h.

4.655.3.3 template<typename _CharT , typename _Traits = char_traits<_CharT>> std::istreambuf_iterator< _CharT, _Traits >::istreambuf_iterator (streambuf_type * __s) [inline], [noexcept]

Construct start of streambuf iterator.

Definition at line 134 of file streambuf_iterator.h.

4.655.4 Member Function Documentation

4.655.4.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> bool std::istreambuf_iterator< _CharT, _Traits >::equal (const istreambuf_iterator< _CharT, _Traits > & __b) const [inline]

Return true both iterators are end or both are not end.

Definition at line 194 of file streambuf_iterator.h.

4.655.4.2 template<typename _CharT , typename _Traits = char_traits<_CharT>> char_type std::istreambuf_iterator< _CharT, _Traits >::operator* ( ) const [inline]

Return the current character pointed to by iterator. This returns streambuf.sgetc(). It cannot be assigned. NB: The result of operator*() on an end of stream is undefined.

Definition at line 146 of file streambuf_iterator.h.

4.655.4.3 template<typename _CharT , typename _Traits = char_traits<_CharT>> istreambuf_iterator& std::istreambuf_iterator< _CharT, _Traits >::operator++ ( ) [inline]

Advance the iterator. Calls streambuf.sbumpc().

Definition at line 162 of file streambuf_iterator.h.

References std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_streambuf< _CharT, _Traits >::sgetc().

4.655.4.4 template<typename _CharT , typename _Traits = char_traits<_CharT>> istreambuf_iterator std::istreambuf_iterator< _CharT, _Traits >::operator++ (int) [inline]

Advance the iterator. Calls streambuf.sbumpc().

Definition at line 176 of file streambuf_iterator.h.

References std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_streambuf< _CharT, _Traits >::sgetc().

The documentation for this class was generated from the following files:

- iosfwd
- streambuf_iterator.h

4.656 std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference > Struct Template Reference

Public Types

- typedef _Distance difference_type

- typedef _Category iterator_category
- typedef _Pointer pointer
- typedef _Reference reference
- typedef _Tp value_type

4.656.1 Detailed Description

template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&>struct std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >

Common iterator class.

This class does nothing but define nested typedefs. Iterator classes can inherit from this class to save some work. The typedefs are then used in specializations and overloading.

In particular, there are no default implementations of requirements such as `operator++` and the like. (How could there be?)

Definition at line 127 of file stl_iterator_base_types.h.

4.656.2 Member Typedef Documentation

4.656.2.1 template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&> typedef _Distance std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >::difference_type

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.656.2.2 template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&> typedef _Category std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >::iterator_category

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.656.2.3 template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&> typedef _Pointer std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >::pointer

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.656.2.4 template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&> typedef _Reference std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >::reference

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.656.2.5 template<typename _Category, typename _Tp, typename _Distance = ptrdiff_t, typename _Pointer = _Tp*, typename _Reference = _Tp&> typedef _Tp std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >::value_type

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.657 __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::iterator Struct Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::iterator:

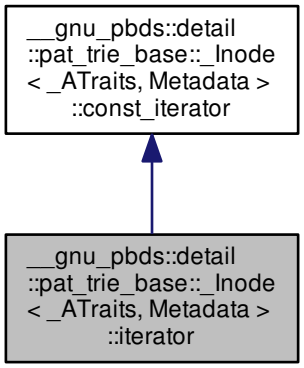

Public Types

- typedef _Alloc::difference_type **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef node_pointer_pointer **pointer**
- typedef node_pointer_reference **reference**
- typedef node_pointer **value_type**

Public Member Functions

- **iterator** (node_pointer_pointer p_p_cur=0, node_pointer_pointer p_p_end=0)
- bool **operator!=** (const const_iterator &other) const
- bool **operator!=** (const iterator &other) const
- node_const_pointer **operator*** () const
- node_pointer **operator*** ()
- iterator & **operator++** ()
- iterator **operator++** (int)
- const node_pointer_pointer **operator->** () const
- node_pointer_pointer **operator->** ()
- bool **operator==** (const const_iterator &other) const
- bool **operator==** (const iterator &other) const

Public Attributes

- node_pointer_pointer **m_p_p_cur**
- node_pointer_pointer **m_p_p_end**

4.657.1 Detailed Description

template<typename _ATraits, typename Metadata>struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::iterator

Child iterator.

Definition at line 320 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.658 std::iterator_traits< typename > Struct Template Reference

Inherits std::__iterator_traits< _Iterator, typename >.

4.658.1 Detailed Description

template<typename>struct std::iterator_traits< typename >

Traits class for iterators.

This class does nothing but define nested typedefs. The general version simply *forwards* the nested typedefs from the Iterator argument. Specialized versions for pointers and pointers-to-const provide tighter, more correct semantics.

Definition at line 423 of file cpp_type_traits.h.

The documentation for this struct was generated from the following file:

- cpp_type_traits.h

4.659 std::iterator_traits< _Tp * > Struct Template Reference

Public Types

- typedef ptrdiff_t **difference_type**
- typedef random_access_iterator_tag **iterator_category**
- typedef _Tp * **pointer**
- typedef _Tp & **reference**
- typedef _Tp **value_type**

4.659.1 Detailed Description

template<typename _Tp>struct std::iterator_traits< _Tp * >

Partial specialization for pointer types.

Definition at line 210 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.660 std::iterator_traits< const _Tp * > Struct Template Reference

Public Types

- typedef ptrdiff_t **difference_type**
- typedef random_access_iterator_tag **iterator_category**
- typedef const _Tp * **pointer**
- typedef const _Tp & **reference**
- typedef _Tp **value_type**

4.660.1 Detailed Description

template<typename _Tp>struct std::iterator_traits< const _Tp * >

Partial specialization for const pointer types.

Definition at line 221 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.661 __gnu_pbds::join_error Struct Reference

Inheritance diagram for __gnu_pbds::join_error:

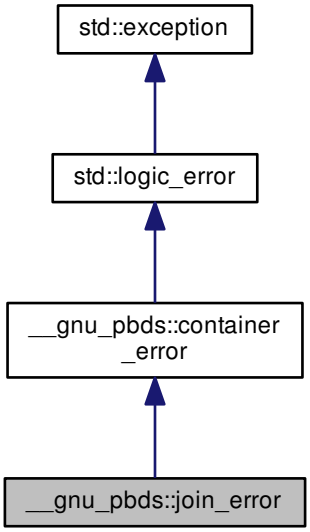

Public Member Functions

- virtual const char * what () const noexcept

4.661.1 Detailed Description

A join cannot be performed logical reasons (i.e., the ranges of the two container objects being joined overlaps.

Definition at line 70 of file exception.hpp.

4.661.2 Member Function Documentation

4.661.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this struct was generated from the following file:

- exception.hpp

4.662 __gnu_pbds::detail::left_child_next_sibling_heap< Value_Type, Cmp_Fn, Node_Metadata, _Alloc > Class Template Reference

Inherits Cmp_Fn.

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef left_child_next_sibling_heap_const_iterator_ < node, _Alloc > **const_iterator**
- typedef __rebind_v::const_pointer **const_pointer**
- typedef __rebind_v::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef const_iterator **iterator**
- typedef left_child_next_sibling_heap_node_ < Value_Type, Node_Metadata, _Alloc > **node**
- typedef left_child_next_sibling_heap_node_point_const_iterator_ < node, _Alloc > **point_const_iterator**
- typedef point_const_iterator **point_iterator**
- typedef __rebind_v::pointer **pointer**
- typedef __rebind_v::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- **left_child_next_sibling_heap** (const Cmp_Fn &)
- **left_child_next_sibling_heap** (const left_child_next_sibling_heap &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- size_type **max_size** () const
- template<typename Pred > left_child_next_sibling_heap < Value_Type, Cmp_Fn, Node_Metadata, _Alloc > ::node_pointer **prune** (Pred pred)
- size_type **size** () const
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, Node_Metadata, _Alloc > &)

Protected Types

- typedef alloc_traits::allocator_type **node_allocator**
- typedef alloc_traits::const_pointer **node_const_pointer**
- typedef Node_Metadata **node_metadata**
- typedef alloc_traits::pointer **node_pointer**
- typedef std::pair < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- node_pointer **get_new_node_for_insert** (const_reference)
- template<typename Pred > node_pointer **prune** (Pred)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static void **make_child_of** (node_pointer, node_pointer)
- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_root**
- size_type **m_size**

4.662.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename Node_Metadata, typename _Alloc>class __gnu_pbds::detail::left_child_next_sibling_heap< Value_Type, Cmp_Fn, Node_Metadata, _Alloc >

Base class for a basic heap.

Definition at line 90 of file left_child_next_sibling_heap_.hpp.

The documentation for this class was generated from the following file:

- left_child_next_sibling_heap_.hpp

4.663 __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >:



Public Types

- typedef base_type::const_pointer const_pointer
- typedef base_type::const_reference const_reference
- typedef _Alloc::difference_type difference_type
- typedef std::forward_iterator_tag iterator_category
- typedef base_type::pointer pointer
- typedef base_type::reference reference
- typedef base_type::value_type value_type

Public Member Functions

- **left_child_next_sibling_heap_const_iterator_** (node_pointer p_nd)
- left_child_next_sibling_heap_const_iterator_ ()
- left_child_next_sibling_heap_const_iterator_ (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > &other)
- bool operator!= (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > &other) const
- bool operator!= (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > &other) const
- const_reference operator* () const
- left_child_next_sibling_heap_const_iterator_ < Node, _Alloc > & **operator++** ()
- left_child_next_sibling_heap_const_iterator_ < Node, _Alloc > **operator++** (int)
- const_pointer operator-> () const
- bool operator== (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > &other) const
- bool operator== (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > &other) const

Public Attributes

- node_pointer **m_p_nd**

4.663.1 Detailed Description

template<typename Node, typename _Alloc>class __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >

Const point-type iterator.

Definition at line 60 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2 Member Typedef Documentation

4.663.2.1 template<typename Node , typename _Alloc > typedef base_type::const_pointer __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::const_pointer

Iterator's const pointer type.

Definition at line 81 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.2 template<typename Node , typename _Alloc > typedef base_type::const_reference __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::const_reference

Iterator's const reference type.

Definition at line 87 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.3 template<typename Node , typename _Alloc > typedef _Alloc::difference_type __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::difference_type

Difference type.

Definition at line 72 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.4 template<typename Node , typename _Alloc > typedef std::forward_iterator_tag __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::iterator_category

Category.

Definition at line 69 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.5 template<typename Node , typename _Alloc > typedef base_type::pointer __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::pointer

Iterator's pointer type.

Definition at line 78 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.6 template<typename Node , typename _Alloc > typedef base_type::reference __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::reference

Iterator's reference type.

Definition at line 84 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.2.7 template<typename Node , typename _Alloc > typedef base_type::value_type __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::value_type

Iterator's value type.

Definition at line 75 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.3 Constructor & Destructor Documentation

4.663.3.1 template<typename Node , typename _Alloc > __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::left_child_next_sibling_heap_const_iterator_ ( ) [inline]

Default constructor.

Definition at line 96 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.3.2 template<typename Node , typename _Alloc > __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::left_child_next_sibling_heap_const_iterator_ (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > & *other*) [inline]

Copy constructor.

Definition at line 101 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.4 Member Function Documentation

4.663.4.1 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::operator!= (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > & *other*) const [inline]

Compares content (negatively) to a different iterator object.

Definition at line 111 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.4.2 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator!= (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > & *other*) const [inline], [inherited]

Compares content (negatively) to a different iterator object.

Definition at line 127 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.663.4.3 template<typename Node , typename _Alloc > const_reference __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator* ( ) const [inline], [inherited]

Access.

Definition at line 114 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.663.4.4 template<typename Node , typename _Alloc > const_pointer __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator-> ( ) const [inline], [inherited]

Access.

Definition at line 106 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.663.4.5 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >::operator== (const left_child_next_sibling_heap_const_iterator_< Node, _Alloc > & *other*) const [inline]

Compares content to a different iterator object.

Definition at line 106 of file left_child_next_sibling_heap_/const_iterator.hpp.

4.663.4.6 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator== (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > & *other*) const [inline], [inherited]

Compares content to a different iterator object.

Definition at line 122 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

The documentation for this class was generated from the following file:

- left_child_next_sibling_heap_/const_iterator.hpp

4.664 __gnu_pbds::detail::left_child_next_sibling_heap_node_< _Value, _Metadata, _Alloc > Struct Template Reference

Public Types

- typedef _Metadata **metadata_type**
- typedef rebind_traits< _Alloc, this_type >::pointer **node_pointer**
- typedef _Alloc::size_type **size_type**
- typedef _Value **value_type**

Public Attributes

- metadata_type **m_metadata**
- node_pointer **m_p_l_child**
- node_pointer **m_p_next_sibling**
- node_pointer **m_p_prev_or_parent**
- value_type **m_value**

4.664.1 Detailed Description

template<typename _Value, typename _Metadata, typename _Alloc>struct __gnu_pbds::detail::left_child_next_sibling_heap_node_< _Value, _Metadata, _Alloc >

Node.

Definition at line 52 of file left_child_next_sibling_heap_/node.hpp.

The documentation for this struct was generated from the following file:

- left_child_next_sibling_heap_/node.hpp

4.665 __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >:

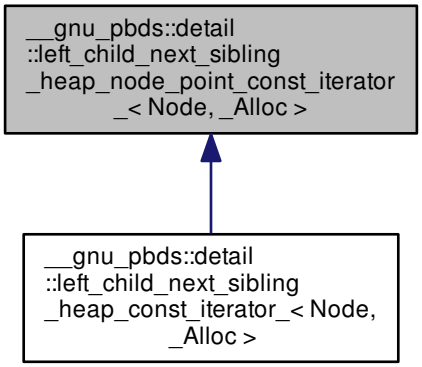

Public Types

- typedef rebind_traits< _Alloc, value_type >::const_pointer const_pointer
- typedef rebind_traits< _Alloc, value_type >::const_reference const_reference
- typedef trivial_iterator_difference_type difference_type
- typedef trivial_iterator_tag iterator_category
- typedef rebind_traits< _Alloc, value_type >::pointer pointer
- typedef rebind_traits< _Alloc, value_type >::reference reference
- typedef Node::value_type value_type

Public Member Functions

- **left_child_next_sibling_heap_node_point_const_iterator_** (node_pointer p_nd)
- left_child_next_sibling_heap_node_point_const_iterator_ ()
- left_child_next_sibling_heap_node_point_const_iterator_ (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > &other)
- bool operator!= (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > &other) const
- const_reference operator* () const
- const_pointer operator-> () const
- bool operator== (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > &other) const

Public Attributes

- node_pointer **m_p_nd**

Protected Types

- typedef rebind_traits< _Alloc, Node >::pointer **node_pointer**

4.665.1 Detailed Description

template<typename Node, typename _Alloc>class __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >

Const point-type iterator.

Definition at line 61 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2 Member Typedef Documentation

4.665.2.1 template<typename Node , typename _Alloc > typedef rebind_traits<_Alloc, value_type>::const_pointer __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::const_pointer

Iterator's const pointer type.

Definition at line 81 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.2 template<typename Node , typename _Alloc > typedef rebind_traits<_Alloc, value_type>::const_reference __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::const_reference

Iterator's const reference type.

Definition at line 88 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.3 template<typename Node , typename _Alloc > typedef trivial_iterator_difference_type __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::difference_type

Difference type.

Definition at line 71 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.4 template<typename Node , typename _Alloc > typedef trivial_iterator_tag __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::iterator_category

Category.

Definition at line 68 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.5 template<typename Node , typename _Alloc > typedef rebind_traits<_Alloc, value_type>::pointer __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::pointer

Iterator's pointer type.

Definition at line 77 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.6 template<typename Node , typename _Alloc > typedef rebind_traits<_Alloc, value_type>::reference __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::reference

Iterator's reference type.

Definition at line 84 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.2.7 template<typename Node , typename _Alloc > typedef Node::value_type __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::value_type

Iterator's value type.

Definition at line 74 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.3 Constructor & Destructor Documentation

4.665.3.1 template<typename Node , typename _Alloc > __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::left_child_next_sibling_heap_node_point_const_iterator_ ( ) [inline]

Default constructor.

Definition at line 96 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.3.2 template<typename Node , typename _Alloc > __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::left_child_next_sibling_heap_node_point_const_iterator_ (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > & *other*) [inline]

Copy constructor.

Definition at line 101 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.4 Member Function Documentation

4.665.4.1 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator!= (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > & *other*) const [inline]

Compares content (negatively) to a different iterator object.

Definition at line 127 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.4.2 template<typename Node , typename _Alloc > const_reference __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator* ( ) const [inline]

Access.

Definition at line 114 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.4.3 template<typename Node , typename _Alloc > const_pointer __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator-> ( ) const [inline]

Access.

Definition at line 106 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

4.665.4.4 template<typename Node , typename _Alloc > bool __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >::operator== (const left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc > & *other*) const [inline]

Compares content to a different iterator object.

Definition at line 122 of file left_child_next_sibling_heap_/point_const_iterator.hpp.

The documentation for this class was generated from the following file:

- left_child_next_sibling_heap_/point_const_iterator.hpp

4.666 std::length_error Class Reference

Inheritance diagram for std::length_error:

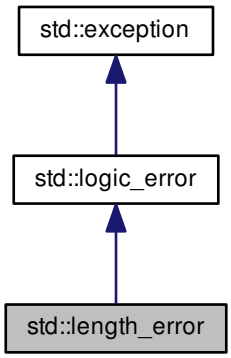

Public Member Functions

- **length_error** (const string &__arg) _GLIBCXX_TXN_SAFE
- **length_error** (const char *) _GLIBCXX_TXN_SAFE
- **length_error** (const length_error &)=default
- **length_error** (length_error &&)=default
- length_error & **operator=** (const length_error &)=default
- length_error & **operator=** (length_error &&)=default
- virtual const char * what () const noexcept

4.666.1 Detailed Description

Thrown when an object is constructed that would exceed its maximum permitted size (e.g., a basic_string instance).

Definition at line 184 of file stdexcept.

4.666.2 Member Function Documentation

4.666.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- stdexcept

4.667 std::less< _Tp > Struct Template Reference

Inheritance diagram for std::less< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.667.1 Detailed Description

template<typename _Tp = void>struct std::less< _Tp >

One of the comparison functors.

Definition at line 340 of file stl_function.h.

4.667.2 Member Typedef Documentation

4.667.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.667.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.667.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.668 std::less< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)< std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)< std::forward< _Up >(__u))
- template<typename _Tp , typename _Up >
  constexpr bool **operator()** (_Tp *__t, _Up *__u) const noexcept

4.668.1 Detailed Description

template<>struct std::less< void >

One of the comparison functors.

Definition at line 578 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.669 std::less_equal< _Tp > Struct Template Reference

Inheritance diagram for std::less_equal< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.669.1 Detailed Description

template<typename _Tp = void>struct std::less_equal< _Tp >

One of the comparison functors.

Definition at line 346 of file stl_function.h.

4.669.2 Member Typedef Documentation

4.669.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.669.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.669.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.670 std::less_equal< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)<=std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)<=std::forward< _Up >(__u))
- template<typename _Tp , typename _Up >
  constexpr bool **operator()** (_Tp *__t, _Up *__u) const noexcept

4.670.1 Detailed Description

template<>struct std::less_equal< void >

One of the comparison functors.

Definition at line 702 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.671 __gnu_cxx::limit_condition::limit_adjustor Struct Reference

Inherits __gnu_cxx::limit_condition::adjustor_base.

Public Member Functions

- **limit_adjustor** (const size_t __l)

4.671.1 Detailed Description

Enter the nth condition.

Definition at line 446 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.672 __gnu_cxx::limit_condition Struct Reference

Inheritance diagram for __gnu_cxx::limit_condition:



Classes

- struct always_adjustor
- struct limit_adjustor
- struct never_adjustor

Static Public Member Functions

- static size_t & **count** ()
- static size_t & **limit** ()
- static void **set_limit** (const size_t __l)
- static void **throw_conditionally** ()

4.672.1 Detailed Description

Base class for incremental control and throw.

Definition at line 416 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.673 std::linear_congruential_engine< _UIntType, __a, __c, __m > Class Template Reference

Public Types

- typedef _UIntType result_type

Public Member Functions

- linear_congruential_engine ()
- linear_congruential_engine (result_type __s)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  linear_congruential_engine (_Sseq &__q)
- void discard (unsigned long long __z)
- result_type operator() ()
- template<typename _Sseq >
  auto seed (_Sseq &__q) -> _If_seed_seq< _Sseq >

- void seed (result_type __s=default_seed)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > seed (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Static Public Attributes

- static constexpr result_type **default_seed**
- static constexpr result_type increment
- static constexpr result_type modulus
- static constexpr result_type multiplier

Friends

- template<typename _UIntType1 , _UIntType1 __a1, _UIntType1 __c1, _UIntType1 __m1, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::linear_congruential_engine< _UIntType1, __a1, __c1, __m1 > &__lcr)
- bool operator== (const linear_congruential_engine &__lhs, const linear_congruential_engine &__rhs)
- template<typename _UIntType1 , _UIntType1 __a1, _UIntType1 __c1, _UIntType1 __m1, typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::linear_congruential_engine< _UIntType1, __a1, __c1, __m1 > &__lcr)

4.673.1 Detailed Description

template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m>class std::linear_congruential_engine< _UIntType, __a, __c, __m >

A model of a linear congruential random number generator.

A random number generator that produces pseudorandom numbers via linear function:

$$x_{i+1} \leftarrow (ax_i + c) \bmod m$$

The template parameter `_UIntType` must be an unsigned integral type large enough to store values up to (__m-1). If the template parameter `__m` is 0, the modulus `__m` used is std::numeric_limits<_UIntType>::max() plus 1. Otherwise, the template parameters `__a` and `__c` must be less than `__m`.

The size of the state is 1.

Definition at line 246 of file random.h.

4.673.2 Member Typedef Documentation

4.673.2.1 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> typedef _UIntType std::linear_congruential_engine< _UIntType, __a, __c, __m >::result_type

The type of the generated random value.

Definition at line 259 of file random.h.

4.673.3 Constructor & Destructor Documentation

4.673.3.1 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> std::linear_congruential_engine< _UIntType, __a, __c, __m >::linear_congruential_engine ( ) [inline]

Constructs a linear_congruential_engine random number generator engine with seed 1.

Definition at line 273 of file random.h.

4.673.3.2 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> std::linear_congruential_engine< _UIntType, __a, __c, __m >::linear_congruential_engine (result_type __s) [inline], [explicit]

Constructs a linear_congruential_engine random number generator engine with seed __s. The default seed value is 1.

Parameters

__s	The initial seed value.

Definition at line 284 of file random.h.

References std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed().

4.673.3.3 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::linear_congruential_engine< _UIntType, __a, __c, __m >::linear_congruential_engine (_Sseq & *__q*) [inline], [explicit]

Constructs a linear_congruential_engine random number generator engine seeded from the seed sequence __q.

Parameters

__q	the seed sequence.

Definition at line 295 of file random.h.

References std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed().

4.673.4 Member Function Documentation

4.673.4.1 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> void std::linear_congruential_engine< _UIntType, __a, __c, __m >::discard (unsigned long long *__z*) [inline]

Discard a sequence of random numbers.

Definition at line 339 of file random.h.

4.673.4.2 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> static constexpr result_type std::linear_congruential_engine< _UIntType, __a, __c, __m >::max ( ) [inline], [static]

Gets the largest possible value in the output range.

Definition at line 332 of file random.h.

4.673.4.3 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> static constexpr result_type std::linear_congruential_engine< _UIntType, __a, __c, __m >::min ( ) [inline], [static]

Gets the smallest possible value in the output range.

The minimum depends on the __c parameter: if it is zero, the minimum generated must be > 0, otherwise 0 is allowed.

Definition at line 325 of file random.h.

4.673.4.4 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> result_type std::linear_congruential_engine< _UIntType, __a, __c, __m >::operator() ( ) [inline]

Gets the next random number in the sequence.

Definition at line 349 of file random.h.

4.673.4.5 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> template<typename _Sseq > auto std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed (_Sseq & __q) -> _If_seed_seq<_Sseq>

Seeds the LCR engine with a value generated by __q.

Definition at line 133 of file bits/random.tcc.

References std::__lg().

4.673.4.6 template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m> void std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed (result_type __s = default_seed)

Reseeds the linear_congruential_engine random number generator engine sequence to the seed __s.

Parameters

__s	The new seed.

Seeds the LCR with integral value __s, adjusted so that the ring identity is never a member of the convergence set.

Definition at line 117 of file bits/random.tcc.

Referenced by std::linear_congruential_engine< _UIntType, __a, __c, __m >::linear_congruential_engine().

4.673.4.7 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> template<typename _Sseq > _If_seed_seq<_Sseq> std::linear_congruential_engine< _UIntType, __a, __c, __m >::seed (_Sseq & __q)

Reseeds the linear_congruential_engine random number generator engine sequence using values from the seed sequence __q.

Parameters

__q	the seed sequence.

4.673.5 Friends And Related Function Documentation

4.673.5.1 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> template<typename _UIntType1 , _UIntType1 __a1, _UIntType1 __c1, _UIntType1 __m1, typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::linear_congruential_engine< _UIntType1, __a1, __c1, __m1 > & __lcr) [friend]

Writes the textual representation of the state x(i) of x to __os.

Parameters

__os	The output stream.
__lcr	A % linear_congruential_engine random number generator.

Returns

__os.

4.673.5.2 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> bool operator== (const linear_congruential_engine< _UIntType, __a, __c, __m > & *__lhs,* const linear_congruential_engine< _UIntType, __a, __c, __m > & *__rhs*) [friend]

Compares two linear congruential random number generator objects of the same type for equality.

Parameters

__lhs	A linear congruential random number generator object.
__rhs	Another linear congruential random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 367 of file random.h.

4.673.5.3 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> template<typename _UIntType1 , _UIntType1 __a1, _UIntType1 __c1, _UIntType1 __m1, typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::linear_congruential_engine< _UIntType1, __a1, __c1, __m1 > & *__lcr*) [friend]

Sets the state of the engine by reading its textual representation from __is.

The textual representation must have been previously written using an output stream whose imbued locale and whose type's template specialization arguments _CharT and _Traits were the same as those of __is.

Parameters

__is	The input stream.
__lcr	A % linear_congruential_engine random number generator.

Returns

__is.

4.673.6 Member Data Documentation

4.673.6.1 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> constexpr _UIntType std::linear_congruential_engine< _UIntType, __a, __c, __m >::increment [static]

An increment.

Definition at line 264 of file random.h.

4.673.6.2 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> constexpr _UIntType std::linear_congruential_engine< _UIntType, __a, __c, __m >::modulus [static]

The modulus.

Definition at line 266 of file random.h.

4.673.6.3 template<typename _UIntType, _UIntType __a, _UIntType __c, _UIntType __m> constexpr _UIntType std::linear_congruential_engine< _UIntType, __a, __c, __m >::multiplier [static]

The multiplier.

Definition at line 262 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.674 __gnu_pbds::linear_probe_fn< Size_Type > Class Template Reference

Public Types

- typedef Size_Type **size_type**

Public Member Functions

- void **swap** (linear_probe_fn< Size_Type > &other)

Protected Member Functions

- size_type operator() (size_type i) const

4.674.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::linear_probe_fn< Size_Type >

A probe sequence policy using fixed increments.

Definition at line 61 of file hash_policy.hpp.

4.674.2 Member Function Documentation

4.674.2.1 template<typename Size_Type > linear_probe_fn< Size_Type >::size_type __gnu_pbds::linear_probe_fn< Size_Type >::operator() (size_type *i*) const [inline], [protected]

Returns the i-th offset from the hash value.

Definition at line 53 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.675 std::__debug::list< _Tp, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::list< _Tp, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**
- typedef
  __gnu_debug::_Safe_iterator
  < _Base_const_iterator, list > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator
  < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef
  __gnu_debug::_Safe_iterator
  < _Base_iterator, list > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator
  < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **list** (const list &)=default
- **list** (list &&)=default
- **list** (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- **list** (const list &__x, const allocator_type &__a)
- **list** (list &&__x, const allocator_type &__a)
- **list** (const _Allocator &__a) noexcept
- **list** (size_type __n, const allocator_type &__a=allocator_type())
- **list** (size_type __n, const _Tp &__value, const _Allocator &__a=_Allocator())
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  list (_InputIterator __first, _InputIterator __last, const _Allocator &__a=_Allocator())
- **list** (const _Base &__x)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- void **assign** (initializer_list< value_type > __l)

- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void **assign** (_InputIterator __first, _InputIterator __last)
- void **assign** (size_type __n, const _Tp &__t)
- reference **back** () noexcept
- const_reference **back** () const noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args>
  iterator **emplace** (const_iterator __position, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- iterator **erase** (const_iterator __position) noexcept
- iterator **erase** (const_iterator __first, const_iterator __last) noexcept
- reference **front** () noexcept
- const_reference **front** () const noexcept
- iterator **insert** (const_iterator __position, const _Tp &__x)
- iterator **insert** (const_iterator __position, _Tp &&__x)
- iterator **insert** (const_iterator __p, initializer_list< value_type > __l)
- iterator **insert** (const_iterator __position, size_type __n, const _Tp &__x)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator **insert** (const_iterator __position, _InputIterator __first, _InputIterator __last)
- void **merge** (list &&__x)
- void **merge** (list &__x)
- template<class _Compare >
  void **merge** (list &&__x, _Compare __comp)
- template<typename _Compare >
  void **merge** (list &__x, _Compare __comp)
- list & **operator=** (const list &)=default
- list & **operator=** (list &&)=default
- list & **operator=** (initializer_list< value_type > __l)
- void **pop_back** () noexcept
- void **pop_front** () noexcept
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- __remove_return_type **remove** (const _Tp &__value)
- template<class _Predicate >
  __remove_return_type **remove_if** (_Predicate __pred)
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **resize** (size_type __sz)
- void **resize** (size_type __sz, const _Tp &__c)
- void **sort** ()
- template<typename _StrictWeakOrdering >
  void **sort** (_StrictWeakOrdering __pred)
- void **splice** (const_iterator __position, list &&__x) noexcept
- void **splice** (const_iterator __position, list &__x) noexcept

- void **splice** (const_iterator __position, list &&__x, const_iterator __i) noexcept
- void **splice** (const_iterator __position, list &__x, const_iterator __i) noexcept
- void **splice** (const_iterator __position, list &&__x, const_iterator __first, const_iterator __last) noexcept
- void **splice** (const_iterator __position, list &__x, const_iterator __first, const_iterator __last) noexcept
- void **swap** (list &__x) noexcept(/*conditional */)
- __remove_return_type **unique** ()
- template<class _BinaryPredicate >
  __remove_return_type **unique** (_BinaryPredicate __binary_pred)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.675.1 Detailed Description

template<typename _Tp, typename _Allocator>class std::__debug::list< _Tp, _Allocator >

Class std::list with safety/checking/debug instrumentation.

Definition at line 36 of file debug/list.

4.675.2 Member Function Documentation

4.675.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.675.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.675.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.675.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.675.2.5 void __gnu_debug::_Safe_sequence< list< _Tp, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.675.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.675.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.675.2.8 void __gnu_debug::_Safe_sequence< list< _Tp, _Allocator > >::_M_transfer_from_if (_Safe_sequence< list< _Tp, _Allocator > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.675.3 Member Data Documentation

4.675.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.675.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.675.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/list

4.676 std::list< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::list< _Tp, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef _List_const_iterator< _Tp > **const_iterator**
- typedef _Tp_alloc_traits::const_pointer **const_pointer**
- typedef _Tp_alloc_traits::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef ptrdiff_t **difference_type**
- typedef _List_iterator< _Tp > **iterator**
- typedef _Tp_alloc_traits::pointer **pointer**
- typedef _Tp_alloc_traits::reference **reference**

- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- list ()=default
- list (const allocator_type &__a) noexcept
- list (size_type __n, const allocator_type &__a=allocator_type())
- list (size_type __n, const value_type &__value, const allocator_type &__a=allocator_type())
- list (const list &__x)
- list (list &&)=default
- list (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- **list** (const list &__x, const allocator_type &__a)
- **list** (list &&__x, const allocator_type &__a) noexcept(_Node_alloc_traits::_S_always_equal())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> list (_InputIterator __first, _InputIterator __last, const allocator_type &__a=allocator_type())
- ~list ()=default
- void assign (size_type __n, const value_type &__val)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void assign (_InputIterator __first, _InputIterator __last)
- void assign (initializer_list< value_type > __l)
- reference back () noexcept
- const_reference back () const noexcept
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- template<typename... _Args> list< _Tp, _Alloc >::iterator **emplace** (const_iterator __position, _Args &&...__args)
- template<typename... _Args> iterator emplace (const_iterator __position, _Args &&...__args)
- template<typename... _Args> void **emplace_back** (_Args &&...__args)
- template<typename... _Args> void **emplace_front** (_Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- iterator erase (const_iterator __position) noexcept
- iterator erase (const_iterator __first, const_iterator __last) noexcept
- reference front () noexcept
- const_reference front () const noexcept
- allocator_type get_allocator () const noexcept
- template<typename _InputIterator , typename > list< _Tp, _Alloc >::iterator **insert** (const_iterator __position, _InputIterator __first, _InputIterator __last)
- iterator insert (const_iterator __position, const value_type &__x)

- iterator insert (const_iterator __position, value_type &&__x)
- iterator insert (const_iterator __p, initializer_list< value_type > __l)
- iterator insert (const_iterator __position, size_type __n, const value_type &__x)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator insert (const_iterator __position, _InputIterator __first, _InputIterator __last)
- size_type max_size () const noexcept
- void merge (list &&__x)
- void **merge** (list &__x)
- template<typename _StrictWeakOrdering >
  void merge (list &&__x, _StrictWeakOrdering __comp)
- template<typename _StrictWeakOrdering >
  void **merge** (list &__x, _StrictWeakOrdering __comp)
- list & operator= (const list &__x)
- list & operator= (list &&__x) noexcept(_Node_alloc_traits::_S_nothrow_move())
- list & operator= (initializer_list< value_type > __l)
- void pop_back () noexcept
- void pop_front () noexcept
- void push_back (const value_type &__x)
- void **push_back** (value_type &&__x)
- void push_front (const value_type &__x)
- void **push_front** (value_type &&__x)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- __remove_return_type remove (const _Tp &__value)
- template<typename _Predicate >
  list< _Tp, _Alloc >
  ::__remove_return_type **remove_if** (_Predicate __pred)
- template<typename _Predicate >
  __remove_return_type remove_if (_Predicate)
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- void resize (size_type __new_size)
- void resize (size_type __new_size, const value_type &__x)
- void reverse () noexcept
- size_type size () const noexcept
- void sort ()
- template<typename _StrictWeakOrdering >
  void sort (_StrictWeakOrdering)
- void splice (const_iterator __position, list &&__x) noexcept
- void **splice** (const_iterator __position, list &__x) noexcept
- void splice (const_iterator __position, list &&__x, const_iterator __i) noexcept
- void splice (const_iterator __position, list &__x, const_iterator __i) noexcept
- void splice (const_iterator __position, list &&__x, const_iterator __first, const_iterator __last) noexcept
- void splice (const_iterator __position, list &__x, const_iterator __first, const_iterator __last) noexcept
- void swap (list &__x) noexcept
- template<typename _BinaryPredicate >
  list< _Tp, _Alloc >
  ::__remove_return_type **unique** (_BinaryPredicate __binary_pred)
- __remove_return_type unique ()
- template<typename _BinaryPredicate >
  __remove_return_type unique (_BinaryPredicate)

Protected Types

- typedef _List_node< _Tp > **_Node**

Protected Member Functions

- template<typename _Integer >
  void **_M_assign_dispatch** (_Integer __n, _Integer __val, __true_type)
- template<typename _InputIterator >
  void **_M_assign_dispatch** (_InputIterator __first, _InputIterator __last, __false_type)
- void **_M_check_equal_allocators** (list &__x) noexcept
- void **_M_clear** () noexcept
- template<typename... _Args>
  _Node * _M_create_node (_Args &&...__args)
- void **_M_dec_size** (size_t)
- void **_M_default_append** (size_type __n)
- void **_M_default_initialize** (size_type __n)
- size_t **_M_distance** (const void *, const void *) const
- void **_M_erase** (iterator __position) noexcept
- void **_M_fill_assign** (size_type __n, const value_type &__val)
- void **_M_fill_initialize** (size_type __n, const value_type &__x)
- _Node_alloc_traits::pointer **_M_get_node** ()
- _Node_alloc_type & **_M_get_Node_allocator** () noexcept
- const _Node_alloc_type & **_M_get_Node_allocator** () const noexcept
- size_t **_M_get_size** () const
- void **_M_inc_size** (size_t)
- void **_M_init** () noexcept
- template<typename _Integer >
  void **_M_initialize_dispatch** (_Integer __n, _Integer __x, __true_type)
- template<typename _InputIterator >
  void **_M_initialize_dispatch** (_InputIterator __first, _InputIterator __last, __false_type)
- template<typename... _Args>
  void **_M_insert** (iterator __position, _Args &&...__args)
- void **_M_move_assign** (list &&__x, true_type) noexcept
- void **_M_move_assign** (list &&__x, false_type)
- void **_M_move_nodes** (_List_base &&__x)
- size_t **_M_node_count** () const
- void **_M_put_node** (typename _Node_alloc_traits::pointer __p) noexcept
- const_iterator **_M_resize_pos** (size_type &__new_size) const
- void **_M_set_size** (size_t)
- void **_M_transfer** (iterator __position, iterator __first, iterator __last)

Static Protected Member Functions

- static size_t **_S_distance** (const __detail::_List_node_base *__first, const __detail::_List_node_base *__last)
- static size_t **_S_distance** (const_iterator, const_iterator)

Protected Attributes

- _List_impl **_M_impl**

4.676.1 Detailed Description

template<typename _Tp, typename _Alloc = std::allocator<_Tp>>class std::list< _Tp, _Alloc >

A standard container with linear time access to elements, and fixed time insertion/deletion at any point in the sequence.

Template Parameters

_Tp	Type of element.
_Alloc	Allocator type, defaults to allocator<_Tp>.

Meets the requirements of a `container`, a `reversible container`, and a `sequence`, including the `optional sequence requirements` with the exception of `at` and `operator[]`.

This is a *doubly linked* list. Traversal up and down the list requires linear time, but adding and removing elements (or *nodes*) is done in constant time, regardless of where the change takes place. Unlike std::vector and std::deque, random-access iterators are not provided, so subscripting ([]) access is not allowed. For algorithms which only need sequential access, this lack makes no difference.

Also unlike the other standard containers, std::list provides specialized algorithms unique to linked lists, such as splicing, sorting, and in-place reversal.

A couple points on memory allocation for list<Tp>:

First, we never actually allocate a Tp, we allocate List_node<Tp>'s and trust [20.1.5]/4 to DTRT. This is to ensure that after elements from list<X,Alloc1> are spliced into list<X,Alloc2>, destroying the memory of the second list is a valid operation, i.e., Alloc1 giveth and Alloc2 taketh away.

Second, a list conceptually represented as

```
A <---> B <---> C <---> D
```

is actually circular; a link exists between A and D. The list class holds (as its only data member) a private list::iterator pointing to *D*, not to *A!* To get to the head of the list, we start at the tail and move forward by one. When this member iterator's next/previous pointers refer to itself, the list is empty.

Definition at line 556 of file stl_list.h.

4.676.2 Constructor & Destructor Documentation

4.676.2.1 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list ( ) [default]

Creates a list with no elements.

4.676.2.2 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (const allocator_type & *__a*) [inline], [explicit], [noexcept]

Creates a list with no elements.

Parameters

__a	An allocator object.

Definition at line 683 of file stl_list.h.

4.676.2.3 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (size_type *__n*, const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Creates a list with default constructed elements.

Parameters

__n	The number of elements to initially create.
__a	An allocator object.

This constructor fills the list with *__n* default constructed elements.

Definition at line 696 of file stl_list.h.

4.676.2.4 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (size_type *__n*, const value_type & *__value*, const allocator_type & *__a* = allocator_type()) [inline]

Creates a list with copies of an exemplar element.

Parameters

__n	The number of elements to initially create.
__value	An element to copy.
__a	An allocator object.

This constructor fills the list with *__n* copies of *__value*.

Definition at line 708 of file stl_list.h.

4.676.2.5 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (const list< _Tp, _Alloc > & *__x*) [inline]

List copy constructor.

Parameters

__x	A list of identical element and allocator types.

The newly-created list uses a copy of the allocation object used by *__x* (unless the allocator traits dictate a different object).

Definition at line 735 of file stl_list.h.

4.676.2.6 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (list< _Tp, _Alloc > &&) [default]

List move constructor.

The newly-created list contains the exact contents of the moved instance. The contents of the moved instance are a valid, but unspecified list.

4.676.2.7 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::list (initializer_list< value_type > *__l*, const allocator_type & *__a* = allocator_type()) [inline]

Builds a list from an initializer_list.

Parameters

__l	An initializer_list of value_type.
__a	An allocator object.

Create a list consisting of copies of the elements in the initializer_list *__l*. This is linear in __l.size().

Definition at line 758 of file stl_list.h.

4.676.2.8 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> std::list< _Tp, _Alloc >::list (_InputIterator *__first,* _InputIterator *__last,* const allocator_type & *__a* = allocator_type()) [inline]

Builds a list from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__a	An allocator object.

Create a list consisting of copies of the elements from [*__first*,*__last*). This is linear in N (where N is distance(*__first*,*__last*)).

Definition at line 803 of file stl_list.h.

4.676.2.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::list< _Tp, _Alloc >::~list ( ) [default]

No explicit dtor needed as the _Base dtor takes care of things. The _Base dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.676.3 Member Function Documentation

4.676.3.1 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename... _Args> _Node* std::list< _Tp, _Alloc >::_M_create_node (_Args &&... *__args*) [inline], [protected]

Parameters

__args	An instance of user data.

Allocates space for a new node and constructs a copy of *__args* in it.

Definition at line 632 of file stl_list.h.

4.676.3.2 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::assign (size_type *__n,* const value_type & *__val*) [inline]

Assigns a given value to a list.

Parameters

__n	Number of elements to be assigned.
__val	Value to be assigned.

This function fills a list with *__n* copies of the given value. Note that the assignment completely changes the list and that the resulting list's size is the same as the number of elements assigned.

Definition at line 889 of file stl_list.h.

Referenced by std::list< __inp, __rebind_inp >::operator=().

4.676.3.3 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void std::list< _Tp, _Alloc >::assign (_InputIterator *__first,* _InputIterator *__last*) [inline]

Assigns a range to a list.

Parameters

__first	An input iterator.

__last	An input iterator.

This function fills a list with copies of the elements in the range [*__first*,*__last*).

Note that the assignment completely changes the list and that the resulting list's size is the same as the number of elements assigned.

Definition at line 908 of file stl_list.h.

4.676.3.4 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::assign (initializer_list< value_type > __l) [inline]

Assigns an initializer_list to a list.

Parameters

__l	An initializer_list of value_type.

Replace the contents of the list with copies of the elements in the initializer_list *__l*. This is linear in __l.size().

Definition at line 930 of file stl_list.h.

4.676.3.5 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::list< _Tp, _Alloc >::back ( ) [inline], [noexcept]

Returns a read/write reference to the data at the last element of the list.

Definition at line 1130 of file stl_list.h.

4.676.3.6 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::list< _Tp, _Alloc >::back ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the last element of the list.

Definition at line 1142 of file stl_list.h.

4.676.3.7 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::list< _Tp, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the list. Iteration is done in ordinary element order.

Definition at line 945 of file stl_list.h.

Referenced by std::list< __inp, __rebind_inp >::crend(), std::list< __inp, __rebind_inp >::front(), std::list< _Tp, _Alloc >::insert(), std::list< __inp, __rebind_inp >::list(), std::list< _Tp, _Alloc >::merge(), std::list< _Tp, _Alloc >::operator=(), std::operator==(), std::list< __inp, __rebind_inp >::pop_front(), std::list< __inp, __rebind_inp >::push_front(), std::list< __inp, __rebind_inp >::rend(), std::list< _Tp, _Alloc >::sort(), and std::list< __inp, __rebind_inp >::splice().

4.676.3.8 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::list< _Tp, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the list. Iteration is done in ordinary element order.

Definition at line 954 of file stl_list.h.

4.676.3.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::list< _Tp, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the list. Iteration is done in ordinary element order.

Definition at line 1018 of file stl_list.h.

4.676.3.10 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::list< _Tp, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the list. Iteration is done in ordinary element order.

Definition at line 1027 of file stl_list.h.

4.676.3.11 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::clear ( ) [inline], [noexcept]

Erases all the elements. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1498 of file stl_list.h.

4.676.3.12 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::list< _Tp, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the list. Iteration is done in reverse element order.

Definition at line 1036 of file stl_list.h.

4.676.3.13 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::list< _Tp, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the list. Iteration is done in reverse element order.

Definition at line 1045 of file stl_list.h.

4.676.3.14 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename... _Args> iterator std::list< _Tp, _Alloc >::emplace (const_iterator *__position*, _Args &&... *__args*)

Constructs object in list before specified iterator.

Parameters

__position	A const_iterator into the list.
__args	Arguments.

Returns

An iterator that points to the inserted data.

This function will insert an object of type T constructed with T(std::forward<Args>(args)...) before the specified location. Due to the nature of a list this operation can be done in constant time, and does not invalidate iterators and references.

Referenced by std::list< __inp, __rebind_inp >::insert().

4.676.3.15 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> bool std::list< _Tp, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the list is empty. (Thus begin() would equal end().)

Definition at line 1055 of file stl_list.h.

Referenced by std::list< _Tp, _Alloc >::sort(), and std::list< __inp, __rebind_inp >::splice().

4.676.3.16 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::list< _Tp, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the list. Iteration is done in ordinary element order.

Definition at line 963 of file stl_list.h.

Referenced by std::list< __inp, __rebind_inp >::back(), std::list< __inp, __rebind_inp >::crbegin(), std::list< __inp, __rebind_inp >::list(), std::list< _Tp, _Alloc >::merge(), std::list< _Tp, _Alloc >::operator=(), std::operator==(), std::list< __inp, __rebind_inp >::push_back(), std::list< __inp, __rebind_inp >::rbegin(), and std::list< __inp, __rebind_inp >::splice().

4.676.3.17 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::list< _Tp, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the list. Iteration is done in ordinary element order.

Definition at line 972 of file stl_list.h.

4.676.3.18 template<typename _Tp , typename _Alloc > list< _Tp, _Alloc >::iterator list::erase (const_iterator *__position*) [noexcept]

Remove element at given position.

Parameters

__position	Iterator pointing to element to be erased.

Returns

An iterator pointing to the next element (or end()).

This function will erase the element at the given position and thus shorten the list by one.

Due to the nature of a list this operation can be done in constant time, and only invalidates iterators/references to the element being removed. The user is also cautioned that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 152 of file list.tcc.

Referenced by std::list< __inp, __rebind_inp >::erase().

4.676.3.19 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::list< _Tp, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline], [noexcept]

Remove a range of elements.

Parameters

__first	Iterator pointing to the first element to be erased.
__last	Iterator pointing to one past the last element to be erased.

Returns

An iterator pointing to the element pointed to by *last* prior to erasing (or end()).

This function will erase the elements in the range [first,last) and shorten the list accordingly.

This operation is linear time in the size of the range and only invalidates iterators/references to the element being removed. The user is also cautioned that this function only erases the elements, and that if the elements themselves

are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1456 of file stl_list.h.

4.676.3.20 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::list< _Tp, _Alloc >::front ( ) [inline], [noexcept]

Returns a read/write reference to the data at the first element of the list.

Definition at line 1114 of file stl_list.h.

4.676.3.21 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::list< _Tp, _Alloc >::front ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the first element of the list.

Definition at line 1122 of file stl_list.h.

4.676.3.22 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> allocator_type std::list< _Tp, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Get a copy of the memory allocation object.

Definition at line 936 of file stl_list.h.

4.676.3.23 template<typename _Tp , typename _Alloc > list< _Tp, _Alloc >::iterator list::insert (const_iterator *__position,* const value_type & *__x*)

Inserts given value into list before specified iterator.

Parameters

__position	A const_iterator into the list.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given value before the specified location. Due to the nature of a list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 103 of file list.tcc.

Referenced by std::list< __inp, __rebind_inp >::insert().

4.676.3.24 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::list< _Tp, _Alloc >::insert (const_iterator *__position,* value_type && *__x*) [inline]

Inserts given rvalue into list before specified iterator.

Parameters

__position	A const_iterator into the list.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given rvalue before the specified location. Due to the nature of a list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 1308 of file stl_list.h.

4.676.3.25 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::list< _Tp, _Alloc >::insert (const_iterator __p, initializer_list< value_type > __l) [inline]

Inserts the contents of an initializer_list into list before specified const_iterator.

Parameters

__p	A const_iterator into the list.
__l	An initializer_list of value_type.

Returns

An iterator pointing to the first element inserted (or __position).

This function will insert copies of the data in the initializer_list *l* into the list before the location specified by *p*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

Definition at line 1327 of file stl_list.h.

4.676.3.26 template<typename _Tp , typename _Alloc > list< _Tp, _Alloc >::iterator list::insert (const_iterator __position, size_type __n, const value_type & __x)

Inserts a number of copies of given data into the list.

Parameters

__position	A const_iterator into the list.
__n	Number of elements to be inserted.
__x	Data to be inserted.

Returns

An iterator pointing to the first element inserted (or __position).

This function will insert a specified number of copies of the given data before the location specified by *position*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

Definition at line 118 of file list.tcc.

References std::list< _Tp, _Alloc >::begin().

4.676.3.27 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> iterator std::list< _Tp, _Alloc >::insert (const_iterator __position, _InputIterator __first, _InputIterator __last)

Inserts a range into the list.

Parameters

__position	A const_iterator into the list.
__first	An input iterator.
__last	An input iterator.

Returns

An iterator pointing to the first element inserted (or __position).

This function will insert copies of the data in the range [*first*,*last*) into the list before the location specified by *position*.

This operation is linear in the number of elements inserted and does not invalidate iterators and references.

4.676.3.28 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::list< _Tp, _Alloc >::max_size ( ) const [inline],[noexcept]

Returns the size() of the largest possible list.

Definition at line 1065 of file stl_list.h.

4.676.3.29 template<typename _Tp , typename _Alloc > void list::merge (list< _Tp, _Alloc > && __x)

Merge sorted lists.

Parameters

__x	Sorted list to merge.

Assumes that both *__x* and this list are sorted according to operator<(). Merges elements of *__x* into this list in sorted order, leaving *__x* empty when complete. Elements in this list precede elements in *__x* that are equal.

Definition at line 394 of file list.tcc.

References std::__addressof(), std::list< _Tp, _Alloc >::begin(), std::begin(), std::distance(), std::list< _Tp, _Alloc >::end(), std::end(), and std::list< _Tp, _Alloc >::size().

Referenced by std::list< _Tp, _Alloc >::sort().

4.676.3.30 template<typename _Tp , typename _Alloc > template<typename _StrictWeakOrdering > void list::merge (list< _Tp, _Alloc > && __x, _StrictWeakOrdering __comp)

Merge sorted lists according to comparison function.

Template Parameters

_StrictWeakOrdering	Comparison function defining sort order.

Parameters

__x	Sorted list to merge.
__comp	Comparison functor.

Assumes that both *__x* and this list are sorted according to StrictWeakOrdering. Merges elements of *__x* into this list in sorted order, leaving *__x* empty when complete. Elements in this list precede elements in *__x* that are equivalent according to StrictWeakOrdering().

Definition at line 441 of file list.tcc.

References std::__addressof(), std::list< _Tp, _Alloc >::begin(), std::begin(), std::distance(), std::list< _Tp, _Alloc >::end(), std::end(), and std::list< _Tp, _Alloc >::size().

4.676.3.31 template<typename _Tp , typename _Alloc > list< _Tp, _Alloc > & list::operator= (const list< _Tp, _Alloc > & __x)

List assignment operator.

Parameters

__x	A list of identical element and allocator types.

All the elements of *__x* are copied.

Whether the allocator is copied depends on the allocator traits.

Definition at line 268 of file list.tcc.

References std::__addressof(), std::list< _Tp, _Alloc >::begin(), and std::list< _Tp, _Alloc >::end().

4.676.3.32 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> list& std::list< _Tp, _Alloc >::operator= (list< _Tp, _Alloc > && *__x*) [inline], [noexcept]

List move assignment operator.

Parameters

__x	A list of identical element and allocator types.

The contents of *__x* are moved into this list (without copying).

Afterwards *__x* is a valid, but unspecified list

Whether the allocator is moved depends on the allocator traits.

Definition at line 853 of file stl_list.h.

4.676.3.33 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> list& std::list< _Tp, _Alloc >::operator= (initializer_list< value_type > *__l*) [inline]

List initializer list assignment operator.

Parameters

__l	An initializer_list of value_type.

Replace the contents of the list with copies of the elements in the initializer_list *__l*. This is linear in l.size().

Definition at line 871 of file stl_list.h.

4.676.3.34 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::pop_back ( ) [inline], [noexcept]

Removes last element.

This is a typical stack operation. It shrinks the list by one. Due to the nature of a list this operation can be done in constant time, and only invalidates iterators/references to the element being removed.

Note that no data is returned, and if the last element's data is needed, it should be retrieved before pop_back() is called.

Definition at line 1246 of file stl_list.h.

4.676.3.35 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::pop_front ( ) [inline], [noexcept]

Removes first element.

This is a typical stack operation. It shrinks the list by one. Due to the nature of a list this operation can be done in constant time, and only invalidates iterators/references to the element being removed.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop_front() is called.

Definition at line 1197 of file stl_list.h.

4.676.3.36 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::push_back (const value_type & __x) [inline]

Add data to the end of the list.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the end of the list and assigns the given data to it. Due to the nature of a list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 1211 of file stl_list.h.

4.676.3.37 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::push_front (const value_type & *__x*) [inline]

Add data to the front of the list.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the front of the list and assigns the given data to it. Due to the nature of a list this operation can be done in constant time, and does not invalidate iterators and references.

Definition at line 1161 of file stl_list.h.

4.676.3.38 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::list< _Tp, _Alloc >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last element in the list. Iteration is done in reverse element order.

Definition at line 981 of file stl_list.h.

4.676.3.39 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::list< _Tp, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the list. Iteration is done in reverse element order.

Definition at line 990 of file stl_list.h.

4.676.3.40 template<typename _Tp, typename _Alloc > list< _Tp, _Alloc >::__remove_return_type list::remove (const _Tp & *__value*)

Remove all elements equal to value.

Parameters

__value	The value to remove.

Removes every element in the list equal to *value*. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 332 of file list.tcc.

References std::__addressof(), std::begin(), and std::end().

4.676.3.41 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _Predicate > __remove_return_type std::list< _Tp, _Alloc >::remove_if (_Predicate)

Remove all elements satisfying a predicate.

Template Parameters

_Predicate	Unary predicate function or object.

Removes every element in the list for which the predicate returns true. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.676.3.42 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::list< _Tp, _Alloc >::rend ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to one before the first element in the list. Iteration is done in reverse element order.

Definition at line 999 of file stl_list.h.

4.676.3.43 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::list< _Tp, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the list. Iteration is done in reverse element order.

Definition at line 1008 of file stl_list.h.

4.676.3.44 template<typename _Tp , typename _Alloc > void list::resize (size_type *__new_size*)

Resizes the list to the specified number of elements.

Parameters

__new_size	Number of elements the list should contain.

This function will resize the list to the specified number of elements. If the number is smaller than the list's current size the list is truncated, otherwise default constructed elements are appended.

Definition at line 231 of file list.tcc.

References std::end().

4.676.3.45 template<typename _Tp , typename _Alloc > void list::resize (size_type *__new_size,* const value_type & *__x*)

Resizes the list to the specified number of elements.

Parameters

__new_size	Number of elements the list should contain.
__x	Data with which new elements should be populated.

This function will resize the list to the specified number of elements. If the number is smaller than the list's current size the list is truncated, otherwise the list is extended and new elements are populated with given data.

Definition at line 243 of file list.tcc.

References std::end().

4.676.3.46 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::reverse ( ) [inline], [noexcept]

Reverse the elements in list.

Reverse the order of elements in the list in linear time.

Definition at line 1798 of file stl_list.h.

4.676.3.47 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::list< _Tp, _Alloc >::size ( ) const [inline], [noexcept]

Returns the number of elements in the list.

Definition at line 1060 of file stl_list.h.

Referenced by std::list< _Tp, _Alloc >::merge(), and std::operator==().

4.676.3.48 template<typename _Tp , typename _Alloc > void list::sort ( )

Sort the elements.

Sorts the elements of this list in NlogN time. Equivalent elements remain in list order.

Definition at line 487 of file list.tcc.

References std::list< _Tp, _Alloc >::begin(), std::begin(), std::list< _Tp, _Alloc >::empty(), std::end(), std::list< _Tp, _Alloc >::merge(), std::list< _Tp, _Alloc >::splice(), and std::list< _Tp, _Alloc >::swap().

4.676.3.49 template<typename _Tp , typename _Alloc > template<typename _StrictWeakOrdering > void list::sort (_StrictWeakOrdering __comp)

Sort the elements according to comparison function.

Sorts the elements of this list in NlogN time. Equivalent elements remain in list order.

Definition at line 585 of file list.tcc.

References std::list< _Tp, _Alloc >::begin(), std::begin(), std::list< _Tp, _Alloc >::empty(), std::end(), std::list< _Tp, _Alloc >::merge(), std::list< _Tp, _Alloc >::splice(), and std::list< _Tp, _Alloc >::swap().

4.676.3.50 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::splice (const_iterator __position, list< _Tp, _Alloc > && __x) [inline], [noexcept]

Insert contents of another list.

Parameters

__position	Iterator referencing the element to insert before.
__x	Source list.

The elements of *__x* are inserted in constant time in front of the element referenced by *__position*. *__x* becomes an empty list.

Requires this != *__x*.

Definition at line 1518 of file stl_list.h.

Referenced by std::list< _Tp, _Alloc >::sort(), and std::list< __inp, __rebind_inp >::splice().

4.676.3.51 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::splice (const_iterator __position, list< _Tp, _Alloc > && __x, const_iterator __i) [inline], [noexcept]

Insert element from another list.

Parameters

__position	Const_iterator referencing the element to insert before.
__x	Source list.

__i	Const_iterator referencing the element to move.

Removes the element in list *__x* referenced by *__i* and inserts it into the current list before *__position*.

Definition at line 1553 of file stl_list.h.

4.676.3.52 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::splice (const_iterator *__position,* list< _Tp, _Alloc > & *__x,* const_iterator *__i*) [inline],[noexcept]

Insert element from another list.

Parameters

__position	Const_iterator referencing the element to insert before.
__x	Source list.
__i	Const_iterator referencing the element to move.

Removes the element in list *__x* referenced by *__i* and inserts it into the current list before *__position*.

Definition at line 1595 of file stl_list.h.

4.676.3.53 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::splice (const_iterator *__position,* list< _Tp, _Alloc > && *__x,* const_iterator *__first,* const_iterator *__last*) [inline],[noexcept]

Insert range from another list.

Parameters

__position	Const_iterator referencing the element to insert before.
__x	Source list.
__first	Const_iterator referencing the start of range in x.
__last	Const_iterator referencing the end of range in x.

Removes elements in the range [__first,__last) and inserts them before *__position* in constant time.

Undefined if *__position* is in [__first,__last).

Definition at line 1614 of file stl_list.h.

4.676.3.54 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::splice (const_iterator *__position,* list< _Tp, _Alloc > & *__x,* const_iterator *__first,* const_iterator *__last*) [inline],[noexcept]

Insert range from another list.

Parameters

__position	Const_iterator referencing the element to insert before.
__x	Source list.
__first	Const_iterator referencing the start of range in x.
__last	Const_iterator referencing the end of range in x.

Removes elements in the range [__first,__last) and inserts them before *__position* in constant time.

Undefined if *__position* is in [__first,__last).

Definition at line 1664 of file stl_list.h.

4.676.3.55 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::list< _Tp, _Alloc >::swap (list< _Tp, _Alloc > & *__x*) [inline],[noexcept]

Swaps data with another list.

Parameters

__x	A list of the same element and allocator types.

This exchanges the elements between two lists in constant time. Note that the global std::swap() function is specialized such that std::swap(l1,l2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 1478 of file stl_list.h.

Referenced by std::list< _Tp, _Alloc >::sort().

4.676.3.56 template<typename _Tp , typename _Alloc > list< _Tp, _Alloc >::__remove_return_type list::unique ( )

Remove consecutive duplicate elements.

For each consecutive set of elements with the same value, remove all but the first one. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 368 of file list.tcc.

References std::begin(), and std::end().

4.676.3.57 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _BinaryPredicate > __remove_return_type std::list< _Tp, _Alloc >::unique (_BinaryPredicate)

Remove consecutive elements satisfying a predicate.

Template Parameters

_BinaryPredicate	Binary predicate function or object.

For each consecutive set of elements [first,last) that satisfy predicate(first,i) where i is an iterator in [first,last), remove all but the first one. Remaining elements stay in list order. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

The documentation for this class was generated from the following files:

- stl_list.h
- list.tcc

4.677 __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc > Class Template Reference

Inherits type< Key, Mapped, _Alloc, list_update_tag, __gnu_cxx::typelist::create2< Eq_Fn, Update_Policy >::type >.

Public Types

- typedef list_update_tag **container_category**
- typedef Eq_Fn **eq_fn**
- typedef Update_Policy **update_policy**

Public Member Functions

- template<typename It >
  list_update (It first, It last)
- **list_update** (const list_update &other)

- list_update & **operator=** (const list_update &other)

- void **swap** (list_update &other)

4.677.1 Detailed Description

template<typename Key, typename Mapped, class Eq_Fn = typename detail::default_eq_fn<Key>::type, class Update_Policy = detail::default_update_policy::type, class _Alloc = std::allocator<char>>class __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc >

A list-update based associative container.

Template Parameters

Key	Key type.
Mapped	Map type.
Eq_Fn	Equal functor.
Update_Policy	Update policy, determines when an element will be moved to the front of the list.
_Alloc	Allocator type.

Base is detail::lu_map.

Definition at line 815 of file assoc_container.hpp.

4.677.2 Constructor & Destructor Documentation

4.677.2.1 template<typename Key , typename Mapped , class Eq_Fn = typename detail::default_eq_fn<Key>::type, class Update_Policy = detail::default_update_policy::type, class _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc >::list_update (It *first,* It *last*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 831 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.678 __gnu_pbds::list_update_tag Struct Reference

Inheritance diagram for __gnu_pbds::list_update_tag:

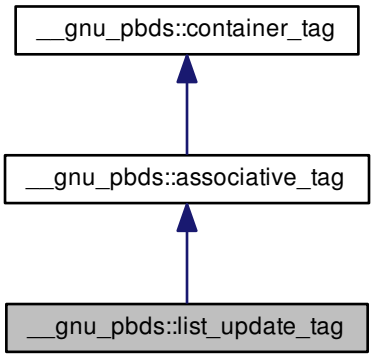

4.678.1 Detailed Description

List-update.

Definition at line 168 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.679 std::locale Class Reference

Classes

- class facet
- class id

Public Types

- typedef int category

Public Member Functions

- locale () throw ()
- locale (const locale &__other) throw ()
- locale (const char *__s)
- locale (const locale &__base, const char *__s, category __cat)
- locale (const std::string &__s)

- locale (const locale &__base, const std::string &__s, category __cat)
- locale (const locale &__base, const locale &__add, category __cat)
- template<typename _Facet >
  locale (const locale &__other, _Facet *__f)
- ~locale () throw ()
- template<typename _Facet >
  locale combine (const locale &__other) const
- _GLIBCXX_DEFAULT_ABI_TAG string name () const
- bool operator!= (const locale &__other) const throw ()
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool **operator()** (const basic_string< _CharT, _Traits, _Alloc > &__s1, const basic_string< _CharT, _Traits, _Alloc > &__s2) const
- template<typename _Char , typename _Traits , typename _Alloc >
  bool operator() (const basic_string< _Char, _Traits, _Alloc > &__s1, const basic_string< _Char, _Traits, _Alloc > &__s2) const
- const locale & operator= (const locale &__other) throw ()
- bool operator== (const locale &__other) const throw ()

Static Public Member Functions

- static const locale & classic ()
- static locale global (const locale &__loc)

Static Public Attributes

- static const category none
- static const category ctype
- static const category numeric
- static const category collate
- static const category time
- static const category monetary
- static const category messages
- static const category all

Friends

- template<typename _Cache >
  struct **__use_cache**
- class **_Impl**
- class **facet**
- template<typename _Facet >
  bool has_facet (const locale &) throw ()
- template<typename _Facet >
  const _Facet & use_facet (const locale &)

4.679.1 Detailed Description

Container class for localization functionality.

The locale class is first a class wrapper for C library locales. It is also an extensible container for user-defined localization. A locale is a collection of facets that implement various localization features such as money, time, and number printing.

Constructing C++ locales does not change the C library locale.

This library supports efficient construction and copying of locales through a reference counting implementation of the locale class.

Definition at line 62 of file locale_classes.h.

4.679.2 Member Typedef Documentation

4.679.2.1 typedef int std::locale::category

Definition of locale::category.

Definition at line 67 of file locale_classes.h.

4.679.3 Constructor & Destructor Documentation

4.679.3.1 std::locale::locale ( ) throw)

Default constructor.

Constructs a copy of the global locale. If no locale has been explicitly set, this is the C locale.

Referenced by combine().

4.679.3.2 std::locale::locale (const locale & *__other*) throw)

Copy constructor.

Constructs a copy of *other*.

Parameters

__other	The locale to copy.

4.679.3.3 std::locale::locale (const char * *__s*) [explicit]

Named locale constructor.

Constructs a copy of the named C library locale.

Parameters

__s	Name of the locale to construct.

Exceptions

std::runtime_error	if __s is null or an undefined locale.

4.679.3.4 std::locale::locale (const locale & *__base,* const char * *__s,* category *__cat*)

Construct locale with facets from another locale.

Constructs a copy of the locale *base*. The facets specified by *cat* are replaced with those from the locale named by *s*. If base is named, this locale instance will also be named.

Parameters

__base	The locale to copy.
__s	Name of the locale to use facets from.
__cat	Set of categories defining the facets to use from __s.

Exceptions

std::runtime_error	if __s is null or an undefined locale.

4.679.3.5 std::locale::locale (const std::string & __s) [inline],[explicit]

Named locale constructor.

Constructs a copy of the named C library locale.

Parameters

__s	Name of the locale to construct.

Exceptions

std::runtime_error	if __s is an undefined locale.

Definition at line 163 of file locale_classes.h.

4.679.3.6 std::locale::locale (const locale & *__base*, const std::string & *__s*, category *__cat*) [inline]

Construct locale with facets from another locale.

Constructs a copy of the locale *base*. The facets specified by *cat* are replaced with those from the locale named by *s*. If base is named, this locale instance will also be named.

Parameters

__base	The locale to copy.
__s	Name of the locale to use facets from.
__cat	Set of categories defining the facets to use from __s.

Exceptions

std::runtime_error	if __s is an undefined locale.

Definition at line 177 of file locale_classes.h.

4.679.3.7 std::locale::locale (const locale & *__base*, const locale & *__add*, category *__cat*)

Construct locale with facets from another locale.

Constructs a copy of the locale *base*. The facets specified by *cat* are replaced with those from the locale *add*. If *base* and *add* are named, this locale instance will also be named.

Parameters

__base	The locale to copy.
__add	The locale to use facets from.
__cat	Set of categories defining the facets to use from add.

4.679.3.8 template<typename _Facet> std::locale::locale (const locale & *__other*, _Facet * *__f*)

Construct locale with another facet.

Constructs a copy of the locale *__other*. The facet *__f* is added to *__other*, replacing an existing facet of type Facet if there is one. If *__f* is null, this locale is a copy of *__other*.

Parameters

__other	The locale to copy.
__f	The facet to add in.

Definition at line 45 of file locale_classes.tcc.

4.679.3.9 std::locale::~locale ( ) throw)

Locale destructor.

4.679.4 Member Function Documentation

4.679.4.1 static const locale& std::locale::classic ( ) [static]

Return reference to the C locale.

4.679.4.2 template<typename _Facet> locale std::locale::combine (const locale & *__other*) const

Construct locale with another facet.

Constructs and returns a new copy of this locale. Adds or replaces an existing facet of type Facet from the locale *other* into the new locale.

Template Parameters

_Facet	The facet type to copy from other

Parameters

__other	The locale to copy from.

Returns

Newly constructed locale.

Exceptions

std::runtime_error	if __other has no facet of type _Facet.

Definition at line 63 of file locale_classes.tcc.

References locale().

4.679.4.3 static locale std::locale::global (const locale & *__loc*) [static]

Set global locale.

This function sets the global locale to the argument and returns a copy of the previous global locale. If the argument has a name, it will also call std::setlocale(LC_ALL, loc.name()).

Parameters

__loc	The new locale to make global.

Returns

Copy of the old global locale.

4.679.4.4 _GLIBCXX_DEFAULT_ABI_TAG string std::locale::name ( ) const

Return locale name.

Returns

Locale name or "*" if unnamed.

4.679.4.5 bool std::locale::operator!= (const locale & *__other*) const throw) [inline]

Locale inequality.

Parameters

__other	The locale to compare against.

Returns

! (*this == __other)

Definition at line 265 of file locale_classes.h.

References operator==().

4.679.4.6 template<typename _Char , typename _Traits , typename _Alloc > bool std::locale::operator() (const basic_string< _Char, _Traits, _Alloc > & *__s1*, const basic_string< _Char, _Traits, _Alloc > & *__s2*) const

Compare two strings according to collate.

Template operator to compare two strings using the compare function of the collate facet in this locale. One use is to provide the locale to the sort function. For example, a vector v of strings could be sorted according to locale loc by doing:

```
std::sort(v.begin(), v.end(), loc);
```

Parameters

__s1	First string to compare.
__s2	Second string to compare.

Returns

True if collate<_Char> facet compares __s1 < __s2, else false.

4.679.4.7 const locale& std::locale::operator= (const locale & *__other*) throw)

Assignment operator.

Set this locale to be a copy of *other*.

Parameters

__other	The locale to copy.

Returns

A reference to this locale.

4.679.4.8 bool std::locale::operator== (const locale & __other) const throw)

Locale equality.

Parameters

__other	The locale to compare against.

Returns

True if other and this refer to the same locale instance, are copies, or have the same name. False otherwise.

Referenced by operator!=().

4.679.5 Friends And Related Function Documentation

4.679.5.1 template<typename _Facet > bool has_facet (const locale &) throw) [friend]

Test for the presence of a facet.

has_facet tests the locale argument for the presence of the facet type provided as the template parameter. Facets derived from the facet parameter will also return true.

Template Parameters

_Facet	The facet type to test the presence of.

Parameters

__loc	The locale to test.

Returns

true if `__loc` contains a facet of type _Facet, else false.

Definition at line 104 of file locale_classes.tcc.

4.679.5.2 template<typename _Facet > const _Facet& use_facet (const locale &) [friend]

Return a facet.

use_facet looks for and returns a reference to a facet of type Facet where Facet is the template parameter. If has_facet(locale) is true, there is a suitable facet to return. It throws std::bad_cast if the locale doesn't contain a facet of type Facet.

Template Parameters

_Facet	The facet type to access.

Parameters

__loc	The locale to use.

Returns

Reference to facet of type Facet.

Exceptions

std::bad_cast	if `__loc` doesn't contain a facet of type _Facet.

Definition at line 132 of file locale_classes.tcc.

4.679.6 Member Data Documentation

4.679.6.1 const category std::locale::all [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 105 of file locale_classes.h.

4.679.6.2 const category std::locale::collate [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 101 of file locale_classes.h.

4.679.6.3 const category std::locale::ctype [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 99 of file locale_classes.h.

4.679.6.4 const category std::locale::messages [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 104 of file locale_classes.h.

4.679.6.5 const category std::locale::monetary [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 103 of file locale_classes.h.

4.679.6.6 const category std::locale::none [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 98 of file locale_classes.h.

4.679.6.7 const category std::locale::numeric [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 100 of file locale_classes.h.

4.679.6.8 const category std::locale::time [static]

Category values.

The standard category values are none, ctype, numeric, collate, time, monetary, and messages. They form a bitmask that supports union and intersection. The category all is the union of these values.

NB: Order must match _S_facet_categories definition in locale.cc

Definition at line 102 of file locale_classes.h.

The documentation for this class was generated from the following files:

- locale_classes.h
- locale_classes.tcc

4.680 std::lock_guard< _Mutex > Class Template Reference

Public Types

- typedef _Mutex **mutex_type**

Public Member Functions

- **lock_guard** (mutex_type &__m)
- **lock_guard** (mutex_type &__m, adopt_lock_t) noexcept
- **lock_guard** (const lock_guard &)=delete
- lock_guard & **operator=** (const lock_guard &)=delete

4.680.1 Detailed Description

template<typename _Mutex>class std::lock_guard< _Mutex >

A simple scoped lock type.

A lock_guard controls mutex ownership within a scope, releasing ownership in the destructor.

Definition at line 153 of file std_mutex.h.

The documentation for this class was generated from the following file:

- std_mutex.h

4.681 std::logic_error Class Reference

Inheritance diagram for std::logic_error:

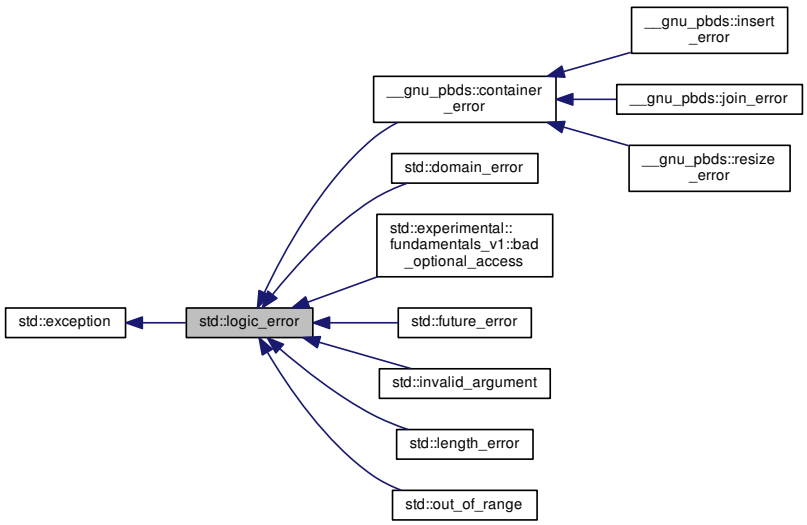

Public Member Functions

- logic_error (const string &__arg) _GLIBCXX_TXN_SAFE
- **logic_error** (const char *) _GLIBCXX_TXN_SAFE
- **logic_error** (logic_error &&) noexcept
- **logic_error** (const logic_error &)=default
- logic_error & **operator=** (logic_error &&) noexcept
- logic_error & **operator=** (const logic_error &)=default
- virtual const char * what () const noexcept

4.681.1 Detailed Description

One of two subclasses of exception.

Logic errors represent problems in the internal logic of a program; in theory, these are preventable, and even detectable before the program runs (e.g., violations of class invariants).

Definition at line 113 of file stdexcept.

4.681.2 Constructor & Destructor Documentation

4.681.2.1 std::logic_error::logic_error (const string & *__arg*) [explicit]

Takes a character string describing the error.

4.681.3 Member Function Documentation

4.681.3.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- stdexcept

4.682 std::logical_and< _Tp > Struct Template Reference

Inheritance diagram for std::logical_and< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.682.1 Detailed Description

template<typename _Tp = void>struct std::logical_and< _Tp >

One of the Boolean operations functors.

Definition at line 775 of file stl_function.h.

4.682.2 Member Typedef Documentation

4.682.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.682.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.682.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.683 std::logical_and< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)&&std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)&&std::forward< _Up >(__u))

4.683.1 Detailed Description

template<>struct std::logical_and< void >

One of the Boolean operations functors.

Definition at line 817 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.684 std::logical_not< _Tp > Struct Template Reference

Inheritance diagram for std::logical_not< _Tp >:



Public Types

- typedef _Tp argument_type
- typedef bool result_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x) const

4.684.1 Detailed Description

template<typename _Tp = void>struct std::logical_not< _Tp >

One of the Boolean operations functors.

Definition at line 781 of file stl_function.h.

4.684.2 Member Typedef Documentation

4.684.2.1 typedef _Tp std::unary_function< _Tp , bool >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.684.2.2 typedef bool std::unary_function< _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.685 std::logical_not< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp >
  constexpr auto **operator()** (_Tp &&__t) const noexcept(noexcept(!std::forward< _Tp >(__t))) -> decltype(!std::forward< _Tp >(__t))

4.685.1 Detailed Description

template<>struct std::logical_not< void >

One of the Boolean operations functors.

Definition at line 847 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.686 std::logical_or< _Tp > Struct Template Reference

Inheritance diagram for std::logical_or< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.686.1 Detailed Description

template<typename _Tp = void>struct std::logical_or< _Tp >

One of the Boolean operations functors.

Definition at line 778 of file stl_function.h.

4.686.2 Member Typedef Documentation

4.686.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.686.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.686.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.687 std::logical_or< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)||std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)||std::forward< _Up >(__u))

4.687.1 Detailed Description

template<>struct std::logical_or< void >

One of the Boolean operations functors.

Definition at line 832 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.688 std::lognormal_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **lognormal_distribution** (_RealType __m, _RealType __s=_RealType(1))
- **lognormal_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType **m** () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()
- _RealType **s** () const

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::lognormal_distribution< _RealType1 > &__x)

- bool operator== (const lognormal_distribution &__d1, const lognormal_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::lognormal_distribution< _RealType1 > &__x)

4.688.1 Detailed Description

template<typename _RealType = double>class std::lognormal_distribution< _RealType >

A lognormal_distribution random number distribution.

The formula for the normal probability mass function is

$$p(x|m,s) = \frac{1}{sx\sqrt{2\pi}} \exp -\frac{(\ln x - m)^2}{2s^2}$$

Definition at line 2182 of file random.h.

4.688.2 Member Typedef Documentation

4.688.2.1 template<typename _RealType = double> typedef _RealType std::lognormal_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 2185 of file random.h.

4.688.3 Member Function Documentation

4.688.3.1 template<typename _RealType = double> result_type std::lognormal_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 2280 of file random.h.

References std::numeric_limits< _Tp >::max().

4.688.3.2 template<typename _RealType = double> result_type std::lognormal_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 2273 of file random.h.

4.688.3.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::lognormal_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 2288 of file random.h.

4.688.3.4 template<typename _RealType = double> param_type std::lognormal_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 2258 of file random.h.

4.688.3.5 template<typename _RealType = double> void std::lognormal_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 2266 of file random.h.

4.688.3.6 template<typename _RealType = double> void std::lognormal_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 2240 of file random.h.

References std::normal_distribution< _RealType >::reset().

4.688.4 Friends And Related Function Documentation

4.688.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::lognormal_distribution< _RealType1 > & *__x*) [friend]

Inserts a lognormal_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A lognormal_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.688.4.2 template<typename _RealType = double> bool operator== (const lognormal_distribution< _RealType > & *__d1,* const lognormal_distribution< _RealType > & *__d2*) [friend]

Return true if two lognormal distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 2325 of file random.h.

4.688.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::lognormal_distribution< _RealType1 > & *__x*) [friend]

Extracts a lognormal_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A lognormal_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.689 __gnu_pbds::detail::lu_counter_metadata< Size_Type > Class Template Reference

Public Types

- typedef Size_Type **size_type**

Friends

- class **lu_counter_policy_base**< **size_type** >

4.689.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::detail::lu_counter_metadata< Size_Type >

A list-update metadata type that moves elements to the front of the list based on the counter algorithm.

Definition at line 51 of file lu_counter_metadata.hpp.

The documentation for this class was generated from the following file:

- lu_counter_metadata.hpp

4.690 __gnu_pbds::lu_counter_policy< Max_Count, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >:

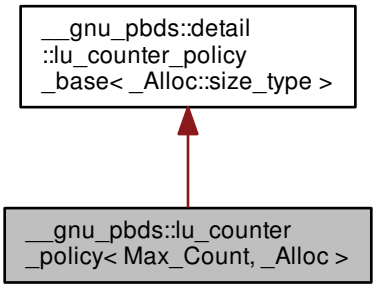

Public Types

- enum { max_count }
- typedef _Alloc **allocator_type**
- typedef detail::rebind_traits < _Alloc, metadata_type > ::reference metadata_reference
- typedef detail::lu_counter_metadata < size_type > metadata_type
- typedef allocator_type::size_type **size_type**

Public Member Functions

- metadata_type operator() () const
- bool operator() (metadata_reference r_data) const

Private Member Functions

- lu_counter_metadata< size_type > **operator()** (size_type max_size) const
- bool **operator()** (Metadata_Reference r_data, size_type m_max_count) const

4.690.1 Detailed Description

template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>>class __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >

A list-update policy that moves elements to the front of the list based on the counter algorithm.

Definition at line 91 of file list_update_policy.hpp.

4.690.2 Member Typedef Documentation

4.690.2.1 template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>> typedef detail::rebind_traits<_Alloc, metadata_type>::reference __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::metadata_reference

Reference to metadata on which this functor operates.

Definition at line 114 of file list_update_policy.hpp.

4.690.2.2 template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>> typedef detail::lu_counter_metadata<size_type> __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::metadata_type

Metadata on which this functor operates.

Definition at line 106 of file list_update_policy.hpp.

4.690.3 Member Enumeration Documentation

4.690.3.1 template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>> anonymous enum

Enumerator

max_count When some element is accessed this number of times, it will be moved to the front of the list.

Definition at line 98 of file list_update_policy.hpp.

4.690.4 Member Function Documentation

4.690.4.1 template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>> metadata_type __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::operator() ( ) const [inline]

Creates a metadata object.

Definition at line 118 of file list_update_policy.hpp.

References __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::max_count.

4.690.4.2 template<std::size_t Max_Count = 5, typename _Alloc = std::allocator<char>> bool __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::operator() (metadata_reference *r_data*) const [inline]

Decides whether a metadata object should be moved to the front of the list.

Definition at line 124 of file list_update_policy.hpp.

References __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >::max_count.

The documentation for this class was generated from the following file:

- list_update_policy.hpp

4.691 __gnu_pbds::detail::lu_counter_policy_base< Size_Type > Class Template Reference

Protected Types

- typedef Size_Type **size_type**

Protected Member Functions

- lu_counter_metadata< size_type > **operator()** (size_type max_size) const
- template<typename Metadata_Reference >
  bool **operator()** (Metadata_Reference r_data, size_type m_max_count) const

4.691.1 Detailed Description

template<typename Size_Type>class __gnu_pbds::detail::lu_counter_policy_base< Size_Type >

Base class for list-update counter policy.

Definition at line 46 of file lu_counter_metadata.hpp.

The documentation for this class was generated from the following file:

- lu_counter_metadata.hpp

4.692 __gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy >:

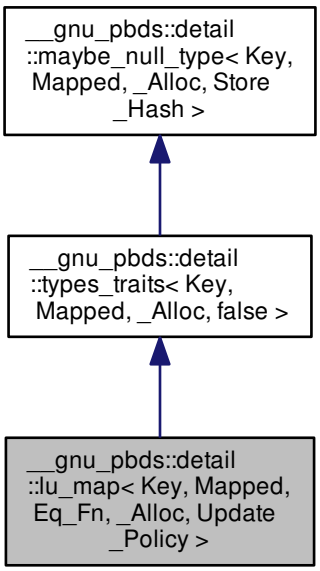

Public Types

- typedef _Alloc **allocator_type**
- typedef std::pair< size_type,
  size_type > **comp_hash**

- typedef const_iterator_ **const_iterator**
- typedef traits_base::const_pointer **const_pointer**
- typedef traits_base::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef Eq_Fn **eq_fn**
- typedef iterator_ **iterator**
- typedef traits_base::key_const_pointer **key_const_pointer**
- typedef traits_base::key_const_reference **key_const_reference**
- typedef traits_base::key_pointer **key_pointer**
- typedef traits_base::key_reference **key_reference**
- typedef traits_base::key_type **key_type**
- typedef traits_base::mapped_const_pointer **mapped_const_pointer**
- typedef traits_base::mapped_const_reference **mapped_const_reference**
- typedef traits_base::mapped_pointer **mapped_pointer**
- typedef traits_base::mapped_reference **mapped_reference**
- typedef traits_base::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef point_const_iterator_ **point_const_iterator**
- typedef point_iterator_ **point_iterator**
- typedef traits_base::pointer **pointer**
- typedef traits_base::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef Update_Policy::metadata_type **update_metadata**
- typedef Update_Policy **update_policy**
- typedef traits_base::value_type **value_type**

Public Member Functions

- **lu_map** (const lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy > &)
- template<typename It >
  lu_map (It, It)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)

- template<typename Pred >
  lu_map< Key, Mapped, Eq_Fn,
  _Alloc, Update_Policy >
  ::size_type **erase_if** (Pred pred)
- template<typename Pred >
  size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference r_key)
- point_const_iterator **find** (key_const_reference r_key) const
- std::pair< point_iterator, bool > **insert** (const_reference)
- size_type **max_size** () const
- mapped_reference **operator[]** (key_const_reference r_key)
- size_type **size** () const
- void **swap** (lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy > &)

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Protected Member Functions

- template<typename It >
  void **copy_from_range** (It, It)

Friends

- class **const_iterator_**
- class **iterator_**

4.692.1 Detailed Description

template<typename Key, typename Mapped, typename Eq_Fn, typename _Alloc, typename Update_Policy>class __gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy >

list-based (with updates) associative container. Skip to the lu, my darling.

Definition at line 91 of file lu_map_.hpp.

The documentation for this class was generated from the following file:

- lu_map_.hpp

4.693 __gnu_pbds::lu_move_to_front_policy< _Alloc > Class Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef detail::rebind_traits
  < _Alloc, metadata_type >
  ::reference metadata_reference
- typedef null_type metadata_type

Public Member Functions

- metadata_type operator() () const
- bool operator() (metadata_reference r_metadata) const

4.693.1 Detailed Description

template<typename _Alloc = std::allocator<char>>class __gnu_pbds::lu_move_to_front_policy< _Alloc >

A list-update policy that unconditionally moves elements to the front of the list. A null type means that each link in a list-based container does not actually need metadata.

Definition at line 58 of file list_update_policy.hpp.

4.693.2 Member Typedef Documentation

4.693.2.1 template<typename _Alloc = std::allocator<char>> typedef detail::rebind_traits<_Alloc, metadata_type>::reference __gnu_pbds::lu_move_to_front_policy< _Alloc >::metadata_reference

Reference to metadata on which this functor operates.

Definition at line 69 of file list_update_policy.hpp.

4.693.2.2 template<typename _Alloc = std::allocator<char>> typedef null_type __gnu_pbds::lu_move_to_front_policy< _Alloc >::metadata_type

Metadata on which this functor operates.

Definition at line 64 of file list_update_policy.hpp.

4.693.3 Member Function Documentation

4.693.3.1 template<typename _Alloc = std::allocator<char>> metadata_type __gnu_pbds::lu_move_to_front_policy< _Alloc >::operator() ( ) const [inline]

Creates a metadata object.

Definition at line 73 of file list_update_policy.hpp.

4.693.3.2 template<typename _Alloc = std::allocator<char>> bool __gnu_pbds::lu_move_to_front_policy< _Alloc >::operator() (metadata_reference *r_metadata*) const [inline]

Decides whether a metadata object should be moved to the front of the list.

Definition at line 79 of file list_update_policy.hpp.

The documentation for this class was generated from the following file:

- list_update_policy.hpp

4.694 std::make_signed< _Tp > Struct Template Reference

Public Types

- typedef __make_signed_selector < _Tp >::__type **type**

4.694.1 Detailed Description

template<typename _Tp>struct std::make_signed< _Tp >

make_signed

Definition at line 1951 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.695 std::make_unsigned< _Tp > Struct Template Reference

Public Types

- typedef __make_unsigned_selector< _Tp > ::__type **type**

4.695.1 Detailed Description

template<typename _Tp>struct std::make_unsigned< _Tp >

make_unsigned

Definition at line 1825 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.696 __gnu_cxx::malloc_allocator< _Tp > Class Template Reference

Public Types

- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **malloc_allocator** (const malloc_allocator &) noexcept
- template<typename _Tp1 >
  constexpr **malloc_allocator** (const malloc_allocator< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- _Tp * **allocate** (size_type __n, const void *=0)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args) noexcept(std::is_nothrow_constructible< _Up, _Args...>::value)
- void **deallocate** (_Tp *__p, size_type)
- template<typename _Up >
  void **destroy** (_Up *__p) noexcept(std::is_nothrow_destructible< _Up >::value)
- size_type **max_size** () const noexcept

Friends

- template<typename _Up >
  constexpr bool **operator!=** (const malloc_allocator &, const malloc_allocator< _Up > &) noexcept
- template<typename _Up >
  constexpr bool **operator==** (const malloc_allocator< _Up > &) noexcept

4.696.1 Detailed Description

template<typename _Tp>class __gnu_cxx::malloc_allocator< _Tp >

An allocator that uses malloc.

This is precisely the allocator defined in the C++ Standard.

- all allocation calls malloc
- all deallocation calls free

Definition at line 54 of file malloc_allocator.h.

The documentation for this class was generated from the following file:

- malloc_allocator.h

4.697 std::__debug::map< _Key, _Tp, _Compare, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::map< _Key, _Tp, _Compare, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, map > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, map > **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Tp **mapped_type**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef std::pair< const _Key, _Tp > **value_type**

Public Member Functions

- **map** (const map &)=default
- **map** (map &&)=default
- **map** (initializer_list< value_type > __l, const _Compare &__c=_Compare(), const allocator_type &__a=allocator-_type())
- **map** (const allocator_type &__a)
- **map** (const map &__m, const allocator_type &__a)
- **map** (map &&__m, const allocator_type &__a) noexcept(noexcept(_Base(std::move(__m._M_base()), __a)))
- **map** (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator > **map** (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- **map** (const _Base &__x)
- **map** (const _Compare &__comp, const _Allocator &__a=_Allocator())
- template<typename _InputIterator > **map** (_InputIterator __first, _InputIterator __last, const _Compare &__comp=_Compare(), const _Allocator &__-a=_Allocator())
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept

- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args>
  std::pair< iterator, bool > **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __pos, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- std::pair< iterator, iterator > **equal_range** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< iterator, iterator > **equal_range** (const _Kt &__x)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< const_iterator,
  const_iterator > **equal_range** (const _Kt &__x) const
- iterator **erase** (const_iterator __position)
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (iterator __position)
- size_type **erase** (const key_type &__x)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **find** (const _Kt &__x)
- const_iterator **find** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **find** (const _Kt &__x) const
- std::pair< iterator, bool > **insert** (const value_type &__x)
- std::pair< iterator, bool > **insert** (value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  std::pair< iterator, bool > **insert** (_Pair &&__x)
- void **insert** (std::initializer_list< value_type > __list)
- iterator **insert** (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  iterator **insert** (const_iterator __position, _Pair &&__x)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- iterator **lower_bound** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **lower_bound** (const _Kt &__x)
- const_iterator **lower_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **lower_bound** (const _Kt &__x) const
- map & **operator=** (const map &)=default
- map & **operator=** (map &&)=default
- map & **operator=** (initializer_list< value_type > __l)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept

- void **swap** (map &__x) noexcept(/*conditional */)
- iterator **upper_bound** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type> iterator **upper_bound** (const _Kt &__x)
- const_iterator **upper_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type> const_iterator **upper_bound** (const _Kt &__x) const

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT > class **::__gnu_debug::_Safe_iterator**

4.697.1 Detailed Description

template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Allocator = std::allocator<std::pair<const _Key, _Tp> >>class std::__debug::map< _Key, _Tp, _Compare, _Allocator >

Class std::map with safety/checking/debug instrumentation.

Definition at line 44 of file map.h.

4.697.2 Member Function Documentation

4.697.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.697.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.697.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.697.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.697.2.5 void __gnu_debug::_Safe_sequence< map< _Key, _Tp, _Compare, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.697.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.697.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.697.2.8 void __gnu_debug::_Safe_sequence< map< _Key, _Tp, _Compare, _Allocator > >::_M_transfer_from_if (_Safe_sequence< map< _Key, _Tp, _Compare, _Allocator > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.697.3 Member Data Documentation

4.697.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.697.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.697.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- map.h

4.698 std::map< _Key, _Tp, _Compare, _Alloc > Class Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef _Rep_type::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef _Alloc_traits::const_reference **const_reference**
- typedef _Rep_type::const_reverse_iterator **const_reverse_iterator**
- typedef _Rep_type::difference_type **difference_type**
- typedef _Rep_type::iterator **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Tp **mapped_type**
- typedef _Alloc_traits::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef _Rep_type::reverse_iterator **reverse_iterator**
- typedef _Rep_type::size_type **size_type**
- typedef std::pair< const _Key, _Tp > **value_type**

Public Member Functions

- map ()=default
- map (const _Compare &__comp, const allocator_type &__a=allocator_type())
- map (const map &)=default
- map (map &&)=default
- map (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- map (const allocator_type &__a)
- map (const map &__m, const allocator_type &__a)

- map (map &&__m, const allocator_type &__a) noexcept(is_nothrow_copy_constructible< _Compare >::value &&_Alloc_traits::_S_always_equal())
- map (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator >
  map (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- template<typename _InputIterator >
  map (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  map (_InputIterator __first, _InputIterator __last, const _Compare &__comp, const allocator_type &__a=allocator_type())
- ~map ()=default
- mapped_type & at (const key_type &__k)
- const mapped_type & **at** (const key_type &__k) const
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- template<typename... _Args>
  std::pair< iterator, bool > emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- void insert (std::initializer_list< value_type > __list)
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- key_compare key_comp () const
- size_type max_size () const noexcept
- map & operator= (const map &)=default
- map & operator= (map &&)=default
- map & operator= (initializer_list< value_type > __l)
- mapped_type & operator[] (const key_type &__k)
- mapped_type & **operator[]** (key_type &&__k)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- size_type size () const noexcept
- void swap (map &__x) noexcept(/*conditional */)
- value_compare value_comp () const

- std::pair< iterator, bool > insert (const value_type &__x)
- std::pair< iterator, bool > insert (value_type &&__x)

- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair >::value, pair< iterator,
  bool > > insert (_Pair &&__x)

- iterator insert (const_iterator __position, const value_type &__x)
- iterator insert (const_iterator __position, value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair >::value, iterator > insert (const_iterator __position, _Pair &&__x)

- iterator erase (const_iterator __position)
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (iterator __position)

- iterator find (const key_type &__x)
- template<typename _Kt >
  auto find (const _Kt &__x) -> decltype(_M_t._M_find_tr(__x))

- const_iterator find (const key_type &__x) const
- template<typename _Kt >
  auto find (const _Kt &__x) const -> decltype(_M_t._M_find_tr(__x))

- size_type count (const key_type &__x) const
- template<typename _Kt >
  auto count (const _Kt &__x) const -> decltype(_M_t._M_count_tr(__x))

- iterator lower_bound (const key_type &__x)
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x)))

- const_iterator lower_bound (const key_type &__x) const
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x)))

- iterator upper_bound (const key_type &__x)
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))

- const_iterator upper_bound (const key_type &__x) const
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) const -> decltype(const_iterator(_M_t._M_upper_bound_tr(__x)))

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- template<typename _Kt >
  auto equal_range (const _Kt &__x) -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))

- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const
- template<typename _Kt >
  auto equal_range (const _Kt &__x) const -> decltype(pair< const_iterator, const_iterator >(_M_t._M_equal_-
  range_tr(__x)))

Friends

- template<typename _K1 , typename _T1 , typename _C1 , typename _A1 >
  bool **operator**< (const map< _K1, _T1, _C1, _A1 > &, const map< _K1, _T1, _C1, _A1 > &)
- template<typename _K1 , typename _T1 , typename _C1 , typename _A1 >
  bool **operator==** (const map< _K1, _T1, _C1, _A1 > &, const map< _K1, _T1, _C1, _A1 > &)

4.698.1 Detailed Description

template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >>class std::map< _Key, _Tp, _Compare, _Alloc >

A standard container made up of (key,value) pairs, which can be retrieved based on a key, in logarithmic time.

Template Parameters

_Key	Type of key objects.
_Tp	Type of mapped objects.
_Compare	Comparison function object type, defaults to less<_Key>.
_Alloc	Allocator type, defaults to allocator<pair<const _Key, _Tp>.

Meets the requirements of a `container`, a `reversible container`, and an `associative container` (using unique keys). For a `map<Key,T>` the key_type is Key, the mapped_type is T, and the value_type is std::pair<const Key,T>.

Maps support bidirectional iterators.

The private tree data is declared exactly the same way for map and multimap; the distinction is made entirely in how the tree functions are called (*_unique versus *_equal, same as the standard).

Definition at line 100 of file stl_map.h.

4.698.2 Constructor & Destructor Documentation

4.698.2.1 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map ( ) [default]

Default constructor creates no elements.

4.698.2.2 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (const _Compare & *__comp*, const allocator_type & *__a* = `allocator_type()`) [inline], [explicit]

Creates a map with no elements.

Parameters

__comp	A comparison object.
__a	An allocator object.

Definition at line 194 of file stl_map.h.

4.698.2.3 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (const map< _Key, _Tp, _Compare, _Alloc > &) [default]

Map copy constructor.

Whether the allocator is copied depends on the allocator traits.

4.698.2.4 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (map< _Key, _Tp, _Compare, _Alloc > &&) [default]

Map move constructor.

The newly-created map contains the exact contents of the moved instance. The moved instance is a valid, but unspecified, map.

4.698.2.5 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (initializer_list< value_type > __l, const _Compare & __comp = _Compare(), const allocator_type & __a = allocator_type()) [inline]

Builds a map from an initializer_list.

Parameters

__l	An initializer_list.
__comp	A comparison object.
__a	An allocator object.

Create a map consisting of copies of the elements in the initializer_list *__l*. This is linear in N if the range is already sorted, and NlogN otherwise (where N is *__l.size()*).

Definition at line 228 of file stl_map.h.

4.698.2.6 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (const allocator_type & __a) [inline], [explicit]

Allocator-extended default constructor.

Definition at line 236 of file stl_map.h.

4.698.2.7 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (const map< _Key, _Tp, _Compare, _Alloc > & __m, const allocator_type & __a) [inline]

Allocator-extended copy constructor.

Definition at line 240 of file stl_map.h.

4.698.2.8 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (map< _Key, _Tp, _Compare, _Alloc > && __m, const allocator_type & __a) [inline], [noexcept]

Allocator-extended move constructor.

Definition at line 244 of file stl_map.h.

4.698.2.9 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::map (initializer_list< value_type > __l, const allocator_type & __a) [inline]

Allocator-extended initialier-list constructor.

Definition at line 250 of file stl_map.h.

4.698.2.10 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _InputIterator > std::map< _Key, _Tp, _Compare, _Alloc >::map (_InputIterator __first, _InputIterator __last, const allocator_type & __a) [inline]

Allocator-extended range constructor.

Definition at line 256 of file stl_map.h.

4.698.2.11 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _InputIterator > std::map< _Key, _Tp, _Compare, _Alloc >::map (_InputIterator __first, _InputIterator __last) [inline]

Builds a map from a range.

Parameters

__first	An input iterator.
__last	An input iterator.

Create a map consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 273 of file stl_map.h.

4.698.2.12 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _InputIterator > std::map< _Key, _Tp, _Compare, _Alloc >::map (_InputIterator __first, _InputIterator __last, const _Compare & __comp, const allocator_type & __a = allocator_type()) [inline]

Builds a map from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__comp	A comparison functor.
__a	An allocator object.

Create a map consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 290 of file stl_map.h.

4.698.2.13 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::map< _Key, _Tp, _Compare, _Alloc >::~map ( ) [default]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.698.3 Member Function Documentation

4.698.3.1 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> mapped_type& std::map< _Key, _Tp, _Compare, _Alloc >::at (const key_type & __k) [inline]

Access to map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data whose key is equivalent to *__k*, if such a data is present in the map.

Exceptions

std::out_of_range	If no such data is present.

Definition at line 537 of file stl_map.h.

References std::map< _Key, _Tp, _Compare, _Alloc >::end(), std::map< _Key, _Tp, _Compare, _Alloc >::key_comp(), and std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound().

4.698.3.2 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 356 of file stl_map.h.

4.698.3.3 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 365 of file stl_map.h.

4.698.3.4 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 429 of file stl_map.h.

4.698.3.5 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 438 of file stl_map.h.

4.698.3.6 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> void std::map< _Key, _Tp, _Compare, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in a map. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1133 of file stl_map.h.

4.698.3.7 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> size_type std::map< _Key, _Tp, _Compare, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements with given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Number of elements with specified key.

This function only makes sense for multimaps; for map the result will either be 0 (not present) or 1 (present).

Definition at line 1215 of file stl_map.h.

4.698.3.8 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::count (const _Kt & __x) const -> decltype(_M_t._M_count_tr(__x)) [inline]

Finds the number of elements with given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Number of elements with specified key.

This function only makes sense for multimaps; for map the result will either be 0 (not present) or 1 (present).

Definition at line 1221 of file stl_map.h.

4.698.3.9 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the map. Iteration is done in descending order according to the keys.

Definition at line 447 of file stl_map.h.

4.698.3.10 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first pair in the map. Iteration is done in descending order according to the keys.

Definition at line 456 of file stl_map.h.

4.698.3.11 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename... _Args> std::pair<iterator, bool> std::map< _Key, _Tp, _Compare, _Alloc >::emplace (_Args &&... *__args*) [inline]

Attempts to build and insert a std::pair into the map.

Parameters

__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to build and insert a (key, value) pair into the map. A map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the map.

Insertion requires logarithmic time.

Definition at line 576 of file stl_map.h.

4.698.3.12 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename... _Args> iterator std::map< _Key, _Tp, _Compare, _Alloc >::emplace_hint (const_iterator *__pos*, _Args &&... *__args*) [inline]

Attempts to build and insert a std::pair into the map.

Parameters

__pos	An iterator that serves as a hint as to where the pair should be inserted.
__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the element with key of the std::pair built from *__args* (may or may not be that std::pair).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument emplace() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 606 of file stl_map.h.

4.698.3.13 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> bool std::map< _Key, _Tp, _Compare, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the map is empty. (Thus begin() would equal end().)

Definition at line 465 of file stl_map.h.

4.698.3.14 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 374 of file stl_map.h.

Referenced by std::map< _Key, _Tp, _Compare, _Alloc >::at(), and std::map< _Key, _Tp, _Compare, _Alloc >::operator[]().

4.698.3.15 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last pair in the map. Iteration is done in ascending order according to the keys.

Definition at line 383 of file stl_map.h.

4.698.3.16 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::pair<iterator, iterator> std::map< _Key, _Tp, _Compare, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multimaps.

Definition at line 1352 of file stl_map.h.

4.698.3.17 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::equal_range (const _Kt & __x) -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multimaps.

Definition at line 1358 of file stl_map.h.

4.698.3.18 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::pair<const_iterator, const_iterator> std::map< _Key, _Tp, _Compare, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of read-only (constant) iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multimaps.

Definition at line 1381 of file stl_map.h.

4.698.3.19 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::equal_range (const _Kt & __x) const -> decltype(pair<const_iterator, const_iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of read-only (constant) iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multimaps.

Definition at line 1387 of file stl_map.h.

4.698.3.20 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from a map.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1031 of file stl_map.h.

4.698.3.21 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> _GLIBCXX_ABI_TAG_CXX11 iterator std::map< _Key, _Tp, _Compare, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from a map.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1037 of file stl_map.h.

4.698.3.22 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> size_type std::map< _Key, _Tp, _Compare, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from a map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1068 of file stl_map.h.

4.698.3.23 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Erases a [first,last) range of elements from a map.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from a map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1088 of file stl_map.h.

4.698.3.24 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::find (const key_type & __x) [inline]

Tries to locate an element in a map.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1169 of file stl_map.h.

4.698.3.25 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::find (const _Kt & __x) -> decltype(_M_t._M_find_tr(__x)) [inline]

Tries to locate an element in a map.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1175 of file stl_map.h.

4.698.3.26 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::find (const key_type & __x) const [inline]

Tries to locate an element in a map.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns a constant iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1194 of file stl_map.h.

4.698.3.27 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::find (const _Kt & __x) const -> decltype(_M_t._M_find_tr(__x)) [inline]

Tries to locate an element in a map.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns a constant iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1200 of file stl_map.h.

4.698.3.28 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> allocator_type std::map< _Key, _Tp, _Compare, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Get a copy of the memory allocation object.

Definition at line 346 of file stl_map.h.

4.698.3.29 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::pair<iterator, bool> std::map< _Key, _Tp, _Compare, _Alloc >::insert (const value_type & __x) [inline]

Attempts to insert a std::pair into the map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the map. A map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the map.

Insertion requires logarithmic time.

Definition at line 803 of file stl_map.h.

Referenced by std::map< _Key, _Tp, _Compare, _Alloc >::insert(), and std::map< _Key, _Tp, _Compare, _Alloc >::operator[]().

4.698.3.30 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> std::pair<iterator, bool> std::map< _Key, _Tp, _Compare, _Alloc >::insert (value_type && __x) [inline]

Attempts to insert a std::pair into the map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the map. A map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the map.

Insertion requires logarithmic time.

Definition at line 810 of file stl_map.h.

References std::move().

4.698.3.31 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair>::value, pair<iterator, bool> > std::map< _Key, _Tp, _Compare, _Alloc >::insert (_Pair && __x) [inline]

Attempts to insert a std::pair into the map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the map. A map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the map.

Insertion requires logarithmic time.

Definition at line 816 of file stl_map.h.

4.698.3.32 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> void std::map< _Key, _Tp, _Compare, _Alloc >::insert (std::initializer_list< value_type > __list) [inline]

Attempts to insert a list of std::pairs into the map.

Parameters

__list	A std::initializer_list<value_type> of pairs to be inserted.

Complexity similar to that of the range constructor.

Definition at line 830 of file stl_map.h.

References std::map< _Key, _Tp, _Compare, _Alloc >::insert().

4.698.3.33 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position*, const value_type & *__x*) [inline]

Attempts to insert a std::pair into the map.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 860 of file stl_map.h.

4.698.3.34 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position*, value_type && *__x*) [inline]

Attempts to insert a std::pair into the map.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 870 of file stl_map.h.

References std::move().

4.698.3.35 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair>::value, iterator> std::map< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position,* _Pair && *__x*) [inline]

Attempts to insert a std::pair into the map.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 875 of file stl_map.h.

4.698.3.36 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _InputIterator > void std::map< _Key, _Tp, _Compare, _Alloc >::insert (_InputIterator *__first*, _InputIterator *__last*) [inline]

Template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 893 of file stl_map.h.

4.698.3.37 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> key_compare std::map< _Key, _Tp, _Compare, _Alloc >::key_comp ( ) const [inline]

Returns the key comparison object out of which the map was constructed.

Definition at line 1142 of file stl_map.h.

Referenced by std::map< _Key, _Tp, _Compare, _Alloc >::at(), and std::map< _Key, _Tp, _Compare, _Alloc >::operator[]().

4.698.3.38 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound (const key_type & *__x*) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 1258 of file stl_map.h.

Referenced by std::map< _Key, _Tp, _Compare, _Alloc >::at(), and std::map< _Key, _Tp, _Compare, _Alloc >::operator[]().

4.698.3.39 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 1264 of file stl_map.h.

4.698.3.40 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound (const key_type & __x) const [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 1283 of file stl_map.h.

4.698.3.41 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound (const _Kt & __x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 1289 of file stl_map.h.

4.698.3.42 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> size_type std::map< _Key, _Tp, _Compare, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the map.

Definition at line 475 of file stl_map.h.

4.698.3.43 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> map& std::map< _Key, _Tp, _Compare, _Alloc >::operator= (const map< _Key, _Tp, _Compare, _Alloc > &) [default]

Map assignment operator.

Whether the allocator is copied depends on the allocator traits.

4.698.3.44 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> map& std::map< _Key, _Tp, _Compare, _Alloc >::operator= (map< _Key, _Tp, _Compare, _Alloc > &&) [default]

Move assignment operator.

4.698.3.45 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> map& std::map< _Key, _Tp, _Compare, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Map list assignment operator.

Parameters

__l	An initializer_list.

This function fills a map with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the map and that the resulting map's size is the same as the number of elements assigned.

Definition at line 337 of file stl_map.h.

4.698.3.46 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> mapped_type& std::map< _Key, _Tp, _Compare, _Alloc >::operator[] (const key_type & *__k*) [inline]

Subscript ([]) access to map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data of the (key,data) pair.

Allows for easy lookup with the subscript ([]) operator. Returns data associated with the key specified in subscript. If the key does not exist, a pair with that key is created using default values, which is then returned.

Lookup requires logarithmic time.

Definition at line 492 of file stl_map.h.

References std::map< _Key, _Tp, _Compare, _Alloc >::end(), std::map< _Key, _Tp, _Compare, _Alloc >::insert(), std::map< _Key, _Tp, _Compare, _Alloc >::key_comp(), std::map< _Key, _Tp, _Compare, _Alloc >::lower_bound(), and std::piecewise_construct.

4.698.3.47 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last pair in the map. Iteration is done in descending order according to the keys.

Definition at line 392 of file stl_map.h.

4.698.3.48 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the map. Iteration is done in descending order according to the keys.

Definition at line 401 of file stl_map.h.

4.698.3.49 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::rend ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to one before the first pair in the map. Iteration is done in descending order according to the keys.

Definition at line 410 of file stl_map.h.

4.698.3.50 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_reverse_iterator std::map< _Key, _Tp, _Compare, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first pair in the map. Iteration is done in descending order according to the keys.

Definition at line 419 of file stl_map.h.

4.698.3.51 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> size_type std::map< _Key, _Tp, _Compare, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the map.

Definition at line 470 of file stl_map.h.

4.698.3.52 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> void std::map< _Key, _Tp, _Compare, _Alloc >::swap (map< _Key, _Tp, _Compare, _Alloc > & __x) [inline], [noexcept]

Swaps data with another map.

Parameters

__x	A map of the same element and allocator types.

This exchanges the elements between two maps in constant time. (It is only swapping a pointer, an integer, and an instance of the Compare type (which itself is often stateless and empty), so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(m1,m2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 1122 of file stl_map.h.

4.698.3.53 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> iterator std::map< _Key, _Tp, _Compare, _Alloc >::upper_bound (const key_type & __x) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 1303 of file stl_map.h.

4.698.3.54 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::upper_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 1309 of file stl_map.h.

4.698.3.55 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> const_iterator std::map< _Key, _Tp, _Compare, _Alloc >::upper_bound (const key_type & __x) const [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first iterator greater than key, or end().

Definition at line 1323 of file stl_map.h.

4.698.3.56 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> template<typename _Kt > auto std::map< _Key, _Tp, _Compare, _Alloc >::upper_bound (const _Kt & __x) const -> decltype(const_iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first iterator greater than key, or end().

Definition at line 1329 of file stl_map.h.

4.698.3.57 template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >> value_compare std::map< _Key, _Tp, _Compare, _Alloc >::value_comp ( ) const [inline]

Returns a value comparison object, built from the key comparison object out of which the map was constructed.

Definition at line 1150 of file stl_map.h.

The documentation for this class was generated from the following file:

- stl_map.h

4.699 std::mask_array< _Tp > Class Template Reference

Public Types

- typedef _Tp **value_type**

Public Member Functions

- mask_array (const mask_array &)
- void operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator%=** (const _Expr< _Dom, _Tp > &) const
- void operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator&=** (const _Expr< _Dom, _Tp > &) const
- void operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator*=** (const _Expr< _Dom, _Tp > &) const
- void operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator+=** (const _Expr< _Dom, _Tp > &) const
- void operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator-=** (const _Expr< _Dom, _Tp > &) const
- void operator/= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator/=** (const _Expr< _Dom, _Tp > &) const
- void operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator<<=** (const _Expr< _Dom, _Tp > &) const
- mask_array & operator= (const mask_array &)

- void **operator=** (const valarray< _Tp > &) const
- void operator= (const _Tp &) const
- template<class _Dom >
  void **operator=** (const _Expr< _Dom, _Tp > &) const
- template<class _Ex >
  void **operator=** (const _Expr< _Ex, _Tp > &__e) const
- void operator>>= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator>>=** (const _Expr< _Dom, _Tp > &) const
- void operator^= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator^=** (const _Expr< _Dom, _Tp > &) const
- void operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator|=** (const _Expr< _Dom, _Tp > &) const

Friends

- class **valarray< _Tp >**

4.699.1 Detailed Description

template<class _Tp>class std::mask_array< _Tp >

Reference to selected subset of an array.

A mask_array is a reference to the actual elements of an array specified by a bitmask in the form of an array of bool. The way to get a mask_array is to call operator[](valarray<bool>) on a valarray. The returned mask_array then permits carrying operations out on the referenced subset of elements in the original valarray.

For example, if a mask_array is obtained using the array (false, true, false, true) as an argument, the mask array has two elements referring to array[1] and array[3] in the underlying array.

Parameters

Tp	Element type.

Definition at line 94 of file valarray.

The documentation for this class was generated from the following files:

- valarray
- mask_array.h

4.700 __gnu_pbds::detail::mask_based_range_hashing< Size_Type > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::mask_based_range_hashing< Size_Type >:

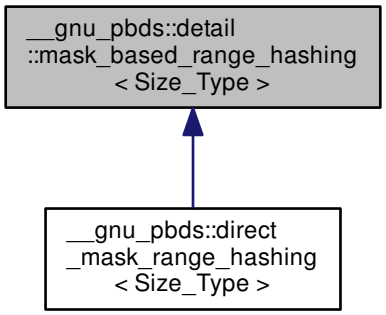

Protected Types

- typedef Size_Type **size_type**

Protected Member Functions

- void **notify_resized** (size_type size)
- size_type **range_hash** (size_type hash) const
- void **swap** (mask_based_range_hashing &other)

4.700.1 Detailed Description

template<typename Size_Type>class __gnu_pbds::detail::mask_based_range_hashing< Size_Type >

Range hashing policy.

Definition at line 50 of file mask_based_range_hashing.hpp.

The documentation for this class was generated from the following file:

- mask_based_range_hashing.hpp

4.701 std::match_results< typename, typename > Class Template Reference

Inheritance diagram for std::match_results< typename, typename >:

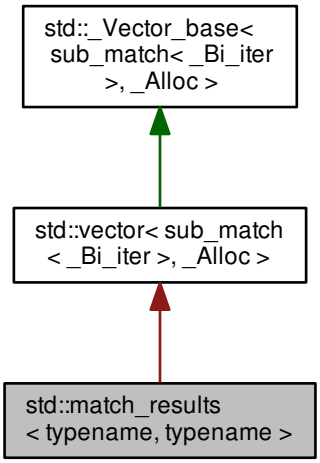

Public Types

28.10 Public Types

- typedef sub_match< _Bi_iter > **value_type**
- typedef const value_type & **const_reference**
- typedef value_type & **reference**
- typedef _Base_type::const_iterator **const_iterator**
- typedef const_iterator **iterator**
- typedef __iter_traits::difference_type **difference_type**
- typedef allocator_traits < _Alloc >::size_type **size_type**
- typedef _Alloc **allocator_type**
- typedef __iter_traits::value_type **char_type**
- typedef std::basic_string < char_type > **string_type**

Public Member Functions

- bool ready () const noexcept

28.10.1 Construction, Copying, and Destruction

- match_results ()
- match_results (const _Alloc &__a) noexcept
- match_results (const match_results &)=default

- match_results (match_results &&) noexcept=default
- match_results & operator= (const match_results &)=default
- match_results & operator= (match_results &&)=default
- ~match_results ()=default

28.10.2 Size

- size_type size () const noexcept
- size_type max_size () const noexcept
- bool empty () const noexcept

28.10.4 Element Access

- difference_type length (size_type __sub=0) const
- difference_type position (size_type __sub=0) const
- string_type str (size_type __sub=0) const
- const_reference operator[] (size_type __sub) const
- const_reference prefix () const
- const_reference suffix () const
- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator end () const noexcept
- const_iterator cend () const noexcept

28.10.5 Formatting

These functions perform formatted substitution of the matched character sequences into their target. The format specifiers and escape sequences accepted by these functions are determined by their `flags` *parameter as documented above.*

- template<typename _Out_iter >
  _Out_iter format (_Out_iter __out, const char_type *__fmt_first, const char_type *__fmt_last, match_flag_type __flags=regex_constants::format_default) const
- template<typename _Out_iter , typename _St , typename _Sa >
  _Out_iter format (_Out_iter __out, const basic_string< char_type, _St, _Sa > &__fmt, match_flag_type __flags=regex_constants::format_default) const
- template<typename _St , typename _Sa >
  basic_string< char_type, _St, _Sa > format (const basic_string< char_type, _St, _Sa > &__fmt, match_flag_type __flags=regex_constants::format_default) const
- string_type format (const char_type *__fmt, match_flag_type __flags=regex_constants::format_default) const

28.10.6 Allocator

- allocator_type get_allocator () const noexcept

28.10.7 Swap

- void swap (match_results &__that) noexcept

Private Types

- typedef
  _Alloc_traits::const_pointer **const_pointer**
- typedef std::reverse_iterator
  < const_iterator > **const_reverse_iterator**
- typedef _Base::pointer **pointer**
- typedef std::reverse_iterator
  < iterator > **reverse_iterator**

Private Member Functions

- pointer **_M_allocate** (size_t __n)
- pointer _M_allocate_and_copy (size_type __n, _ForwardIterator __first, _ForwardIterator __last)
- void **_M_assign_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- void **_M_assign_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_assign_dispatch** (_Integer __n, _Integer __val, __true_type)
- void **_M_assign_dispatch** (_InputIterator __first, _InputIterator __last, __false_type)
- size_type **_M_check_len** (size_type __n, const char *__s) const
- void **_M_create_storage** (size_t __n)
- void **_M_deallocate** (pointer __p, size_t __n)
- void **_M_default_append** (size_type __n)
- void **_M_default_initialize** (size_type __n)
- iterator **_M_emplace_aux** (const_iterator __position, _Args &&...__args)
- iterator **_M_emplace_aux** (const_iterator __position, value_type &&__v)
- iterator **_M_erase** (iterator __position)
- iterator **_M_erase** (iterator __first, iterator __last)
- void **_M_erase_at_end** (pointer __pos) noexcept
- void **_M_fill_assign** (size_type __n, const value_type &__val)
- void **_M_fill_initialize** (size_type __n, const value_type &__value)
- void **_M_fill_insert** (iterator __pos, size_type __n, const value_type &__x)
- _Tp_alloc_type & **_M_get_Tp_allocator** () noexcept
- const _Tp_alloc_type & **_M_get_Tp_allocator** () const noexcept
- void **_M_insert_aux** (iterator __position, _Arg &&__arg)
- void **_M_insert_dispatch** (iterator __pos, _Integer __n, _Integer __val, __true_type)
- void **_M_insert_dispatch** (iterator __pos, _InputIterator __first, _InputIterator __last, __false_type)
- iterator **_M_insert_rval** (const_iterator __position, value_type &&__v)
- void _M_range_check (size_type __n) const
- void **_M_range_initialize** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- void **_M_range_initialize** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_range_insert** (iterator __pos, _InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- void **_M_range_insert** (iterator __pos, _ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_realloc_insert** (iterator __position, _Args &&...__args)
- bool **_M_shrink_to_fit** ()
- void assign (size_type __n, const value_type &__val)
- void assign (_InputIterator __first, _InputIterator __last)
- void assign (initializer_list< value_type > __l)
- reference at (size_type __n)
- const_reference at (size_type __n) const
- reference back () noexcept
- const_reference back () const noexcept
- iterator begin () noexcept
- size_type capacity () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- sub_match< _Bi_iter > * data () noexcept
- const sub_match< _Bi_iter > * **data** () const noexcept
- iterator emplace (const_iterator __position, _Args &&...__args)
- void **emplace_back** (_Args &&...__args)

- iterator end () noexcept
- iterator erase (const_iterator __position)
- iterator erase (const_iterator __first, const_iterator __last)
- reference front () noexcept
- const_reference front () const noexcept
- iterator insert (const_iterator __position, const value_type &__x)
- iterator insert (const_iterator __position, value_type &&__x)
- iterator insert (const_iterator __position, initializer_list< value_type > __l)
- iterator insert (const_iterator __position, size_type __n, const value_type &__x)
- iterator insert (const_iterator __position, _InputIterator __first, _InputIterator __last)
- reference operator[] (size_type __n) noexcept
- const_reference operator[] (size_type __n) const noexcept
- void pop_back () noexcept
- void push_back (const value_type &__x)
- void **push_back** (value_type &&__x)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- void reserve (size_type __n)
- void resize (size_type __new_size)
- void resize (size_type __new_size, const value_type &__x)
- void shrink_to_fit ()
- void swap (vector &__x) noexcept

Static Private Member Functions

- static size_type **_S_check_init_len** (size_type __n, const allocator_type &__a)
- static size_type **_S_max_size** (const _Tp_alloc_type &__a) noexcept

Private Attributes

- _Vector_impl **_M_impl**

Friends

- template<typename , typename , typename >
  class **regex_iterator**

4.701.1 Detailed Description

template<typename, typename>class std::match_results< typename, typename >

The results of a match or search operation.

A collection of character sequences representing the result of a regular expression match. Storage for the collection is allocated and freed as necessary by the member functions of class template match_results.

This class satisfies the Sequence requirements, with the exception that only the operations defined for a const-qualified Sequence are supported.

The sub_match object stored at index 0 represents sub-expression 0, i.e. the whole match. In this case the sub_match member matched is always true. The sub_match object stored at index n denotes what matched the marked sub-expression n within the matched expression. If the sub-expression n participated in a regular expression match then the sub_match member matched evaluates to true, and members first and second denote the range of characters [first, second) which formed that match. Otherwise matched is false, and members first and second point to the end of the sequence that was searched.

Definition at line 39 of file regex.h.

4.701.2 Constructor & Destructor Documentation

4.701.2.1 template<typename , typename > std::match_results< typename, typename >::match_results ( ) [inline]

Constructs a default match_results container.

Postcondition

size() returns 0 and str() returns an empty string.

Definition at line 1728 of file regex.h.

4.701.2.2 template<typename , typename > std::match_results< typename, typename >::match_results (const _Alloc & *__a*) [inline], [explicit], [noexcept]

Constructs a default match_results container.

Postcondition

size() returns 0 and str() returns an empty string.

Definition at line 1735 of file regex.h.

4.701.2.3 template<typename , typename > std::match_results< typename, typename >::match_results (const match_results< typename, typename > &) [default]

Copy constructs a match_results.

4.701.2.4 template<typename , typename > std::match_results< typename, typename >::match_results (match_results< typename, typename > &&) [default], [noexcept]

Move constructs a match_results.

4.701.2.5 template<typename , typename > std::match_results< typename, typename >::~match_results ( ) [default]

Destroys a match_results object.

4.701.3 Member Function Documentation

4.701.3.1 template<typename , typename > const_iterator std::match_results< typename, typename >::begin ( ) const [inline], [noexcept]

Gets an iterator to the start of the sub_match collection.

Definition at line 1908 of file regex.h.

Referenced by std::match_results< _Bi_iter >::cbegin(), and std::operator==().

4.701.3.2 template<typename , typename > const_iterator std::match_results< typename, typename >::cbegin ( ) const [inline], [noexcept]

Gets an iterator to the start of the sub_match collection.

Definition at line 1915 of file regex.h.

4.701.3.3 template<typename , typename > const_iterator std::match_results< typename, typename >::cend ( ) const [inline], [noexcept]

Gets an iterator to one-past-the-end of the collection.

Definition at line 1929 of file regex.h.

4.701.3.4 template<typename , typename > bool std::match_results< typename, typename >::empty ( ) const [inline], [noexcept]

Indicates if the match_results contains no results.

Return values

true	The match_results object is empty.
false	The match_results object is not empty.

Definition at line 1804 of file regex.h.

Referenced by std::match_results< _Bi_iter >::end(), std::operator==(), std::match_results< _Bi_iter >::prefix(), and std::match_results< _Bi_iter >::suffix().

4.701.3.5 template<typename , typename > const_iterator std::match_results< typename, typename >::end ( ) const [inline], [noexcept]

Gets an iterator to one-past-the-end of the collection.

Definition at line 1922 of file regex.h.

Referenced by std::match_results< _Bi_iter >::cend(), and std::operator==().

4.701.3.6 template<typename , typename > template<typename _Out_iter > _Out_iter std::match_results< typename, typename >::format (_Out_iter *__out,* const char_type * *__fmt_first,* const char_type * *__fmt_last,* match_flag_type *__flags* = regex_constants::format_default) const

Precondition

ready() == true

Referenced by std::match_results< _Bi_iter >::format().

4.701.3.7 template<typename , typename > template<typename _Out_iter , typename _St , typename _Sa > _Out_iter std::match_results< typename, typename >::format (_Out_iter *__out,* const basic_string< char_type, _St, _Sa > & *__fmt,* match_flag_type *__flags* = regex_constants::format_default) const [inline]

Precondition

ready() == true

Definition at line 1958 of file regex.h.

4.701.3.8 template<typename , typename > template<typename _St , typename _Sa > basic_string<char_type, _St, _Sa> std::match_results< typename, typename >::format (const basic_string< char_type, _St, _Sa > & *__fmt,* match_flag_type *__flags* = regex_constants::format_default) const [inline]

Precondition

ready() == true

Definition at line 1970 of file regex.h.

4.701.3.9 template<typename , typename > string_type std::match_results< typename, typename >::format (const char_type * *__fmt,* match_flag_type *__flags* = regex_constants::format_default) const [inline]

Precondition

ready() == true

Definition at line 1982 of file regex.h.

4.701.3.10 template<typename , typename > allocator_type std::match_results< typename, typename >::get_allocator ( ) const [inline], [noexcept]

Gets a copy of the allocator.

Definition at line 2004 of file regex.h.

4.701.3.11 template<typename , typename > difference_type std::match_results< typename, typename >::length (size_type *__sub* = 0) const [inline]

Gets the length of the indicated submatch.

Parameters

__sub	indicates the submatch.

Precondition

ready() == true

This function returns the length of the indicated submatch, or the length of the entire match if __sub is zero (the default).

Definition at line 1823 of file regex.h.

4.701.3.12 template<typename , typename > size_type std::match_results< typename, typename >::max_size ( ) const [inline], [noexcept]

Gets the number of matches and submatches.

The number of matches for a given regular expression will be either 0 if there was no match or mark_count() + 1 if a match was successful. Some matches may be empty.

Returns

the number of matches found.

Definition at line 1795 of file regex.h.

4.701.3.13 template<typename , typename > match_results& std::match_results< typename, typename >::operator= (const match_results< typename, typename > &) [default]

Assigns rhs to *this.

4.701.3.14 template<typename , typename > match_results& std::match_results< typename, typename >::operator= (match_results< typename, typename > &&) [default]

Move-assigns rhs to *this.

4.701.3.15 template<typename , typename > const_reference std::match_results< typename, typename >::operator[] (size_type *__sub*) const [inline]

Gets a sub_match reference for the match or submatch.

Parameters

__sub	indicates the submatch.

Precondition

ready() == true

This function gets a reference to the indicated submatch, or the entire match if __sub is zero.

If __sub >= size() then this function returns a sub_match with a special value indicating no submatch.

Definition at line 1866 of file regex.h.

4.701.3.16 template<typename , typename > difference_type std::match_results< typename, typename >::position (size_type *__sub* = 0) const [inline]

Gets the offset of the beginning of the indicated submatch.

Parameters

__sub	indicates the submatch.

Precondition

ready() == true

This function returns the offset from the beginning of the target sequence to the beginning of the submatch, unless the value of __sub is zero (the default), in which case this function returns the offset from the beginning of the target sequence to the beginning of the match.

Definition at line 1838 of file regex.h.

4.701.3.17 template<typename , typename > const_reference std::match_results< typename, typename >::prefix ( ) const [inline]

Gets a sub_match representing the match prefix.

Precondition

ready() == true

This function gets a reference to a sub_match object representing the part of the target range between the start of the target range and the start of the match.

Definition at line 1883 of file regex.h.

Referenced by std::operator==().

4.701.3.18 template<typename , typename > bool std::match_results< typename, typename >::ready ( ) const [inline], [noexcept]

Indicates if the match_results is ready.

Return values

true	The object has a fully-established result state.
false	The object is not ready.

Definition at line 1774 of file regex.h.

Referenced by std::operator==(), std::match_results< _Bi_iter >::operator[](), std::match_results< _Bi_iter >::prefix(), and std::match_results< _Bi_iter >::suffix().

4.701.3.19 template<typename , typename > size_type std::match_results< typename, typename >::size ( ) const [inline], [noexcept]

Gets the number of matches and submatches.

The number of matches for a given regular expression will be either 0 if there was no match or mark_count() + 1 if a match was successful. Some matches may be empty.

Returns

the number of matches found.

Definition at line 1791 of file regex.h.

Referenced by std::match_results< _Bi_iter >::empty(), std::operator==(), and std::match_results< _Bi_iter >::operator[]().

4.701.3.20 template<typename , typename > string_type std::match_results< typename, typename >::str (size_type __sub = 0) const [inline]

Gets the match or submatch converted to a string type.

Parameters

__sub	indicates the submatch.

Precondition

ready() == true

This function gets the submatch (or match, if __sub is zero) extracted from the target range and converted to the associated string type.

Definition at line 1851 of file regex.h.

4.701.3.21 template<typename , typename > const_reference std::match_results< typename, typename >::suffix ( ) const [inline]

Gets a sub_match representing the match suffix.

Precondition

ready() == true

This function gets a reference to a sub_match object representing the part of the target range between the end of the match and the end of the target range.

Definition at line 1898 of file regex.h.

Referenced by std::operator==().

4.701.3.22 template<typename , typename > void std::match_results< typename, typename >::swap (match_results< typename, typename > & *__that*) [inline], [noexcept]

Swaps the contents of two match_results.

Definition at line 2018 of file regex.h.

Referenced by std::match_results< _Bi_iter >::swap().

The documentation for this class was generated from the following file:

- regex.h

4.702 __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash >:

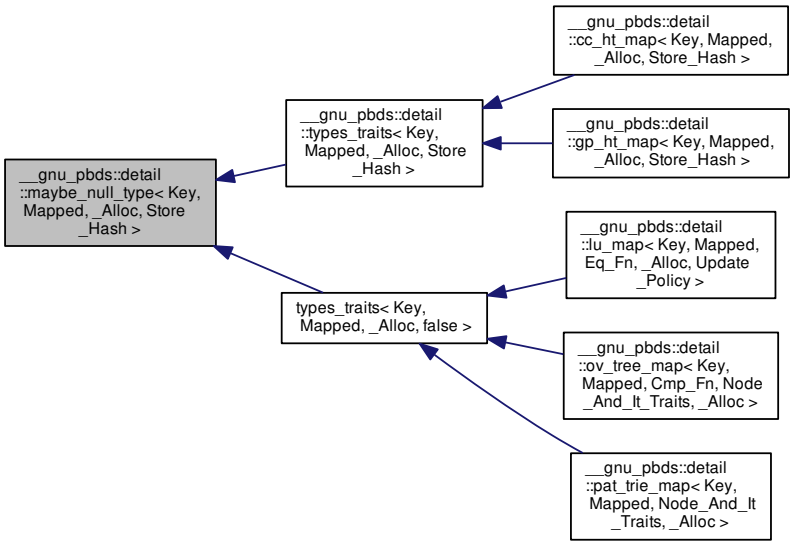

4.702.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, bool Store_Hash>struct __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash >

Base class for conditionally defining a static data member.

Definition at line 121 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.703 __gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash > Struct Template Reference

Static Public Attributes

- static null_type **s_null_type**

4.703.1 Detailed Description

template<typename Key, typename _Alloc, bool Store_Hash>struct __gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash >

Specialization that defines a static data member of type null_type.

Definition at line 126 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.704 std::mem_fun1_ref_t< _Ret, _Tp, _Arg > Class Template Reference

Inheritance diagram for std::mem_fun1_ref_t< _Ret, _Tp, _Arg >:



Public Types

- typedef _Tp first_argument_type

- typedef _Ret result_type
- typedef _Arg second_argument_type

Public Member Functions

- **mem_fun1_ref_t** (_Ret(_Tp::*__pf)(_Arg))
- _Ret **operator()** (_Tp &__r, _Arg __x) const

4.704.1 Detailed Description

template<typename _Ret, typename _Tp, typename _Arg>class std::mem_fun1_ref_t< _Ret, _Tp, _Arg >

One of the adaptors for member pointers.

Definition at line 1311 of file stl_function.h.

4.704.2 Member Typedef Documentation

4.704.2.1 typedef _Tp std::binary_function< _Tp , _Arg , _Ret >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.704.2.2 typedef _Ret std::binary_function< _Tp , _Arg , _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.704.2.3 typedef _Arg std::binary_function< _Tp , _Arg , _Ret >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.705 std::mem_fun1_t< _Ret, _Tp, _Arg > Class Template Reference

Inheritance diagram for std::mem_fun1_t< _Ret, _Tp, _Arg >:



Public Types

- typedef _Tp * first_argument_type
- typedef _Ret result_type
- typedef _Arg second_argument_type

Public Member Functions

- **mem_fun1_t** (_Ret(_Tp::*__pf)(_Arg))
- _Ret **operator()** (_Tp *__p, _Arg __x) const

4.705.1 Detailed Description

template<typename _Ret, typename _Tp, typename _Arg>class std::mem_fun1_t< _Ret, _Tp, _Arg >

One of the adaptors for member pointers.

Definition at line 1275 of file stl_function.h.

4.705.2 Member Typedef Documentation

4.705.2.1 typedef _Tp * std::binary_function< _Tp *, _Arg, _Ret >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.705.2.2 typedef _Ret std::binary_function< _Tp *, _Arg, _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.705.2.3 typedef _Arg std::binary_function< _Tp *, _Arg, _Ret >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.706 std::mem_fun_ref_t< _Ret, _Tp > Class Template Reference

Inheritance diagram for std::mem_fun_ref_t< _Ret, _Tp >:



Public Types

- typedef _Tp argument_type
- typedef _Ret result_type

Public Member Functions

- **mem_fun_ref_t** (_Ret(_Tp::*__pf)())
- _Ret **operator()** (_Tp &__r) const

4.706.1 Detailed Description

template<typename _Ret, typename _Tp>class std::mem_fun_ref_t< _Ret, _Tp >

One of the adaptors for member pointers.

Definition at line 1239 of file stl_function.h.

4.706.2 Member Typedef Documentation

4.706.2.1 typedef _Tp std::unary_function< _Tp , _Ret >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.706.2.2 typedef _Ret std::unary_function< _Tp , _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.707 std::mem_fun_t< _Ret, _Tp > Class Template Reference

Inheritance diagram for std::mem_fun_t< _Ret, _Tp >:



Public Types

- typedef _Tp * argument_type
- typedef _Ret result_type

Public Member Functions

- **mem_fun_t** (_Ret(_Tp::*__pf)())
- _Ret **operator()** (_Tp *__p) const

4.707.1 Detailed Description

template<typename _Ret, typename _Tp>class std::mem_fun_t< _Ret, _Tp >

One of the adaptors for member pointers.

Definition at line 1203 of file stl_function.h.

4.707.2 Member Typedef Documentation

4.707.2.1 typedef _Tp * std::unary_function< _Tp *, _Ret >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.707.2.2 typedef _Ret std::unary_function< _Tp *, _Ret >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.708 std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > Class Template Reference

Public Types

- typedef _UIntType result_type

Public Member Functions

- **mersenne_twister_engine** (result_type __sd)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  mersenne_twister_engine (_Sseq &__q)
- void discard (unsigned long long __z)
- result_type **operator()** ()
- template<typename _Sseq >
  auto **seed** (_Sseq &__q) -> _If_seed_seq< _Sseq >
- void **seed** (result_type __sd=default_seed)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > **seed** (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Static Public Attributes

- static constexpr result_type **default_seed**
- static constexpr result_type **initialization_multiplier**
- static constexpr size_t **mask_bits**
- static constexpr size_t **shift_size**
- static constexpr size_t **state_size**
- static constexpr result_type **tempering_b**
- static constexpr result_type **tempering_c**

- static constexpr result_type **tempering_d**
- static constexpr size_t **tempering_l**
- static constexpr size_t **tempering_s**
- static constexpr size_t **tempering_t**
- static constexpr size_t **tempering_u**
- static constexpr size_t **word_size**
- static constexpr result_type **xor_mask**

Friends

- template<typename _UIntType1 , size_t __w1, size_t __n1, size_t __m1, size_t __r1, _UIntType1 __a1, size_t __u1, _UIntType1 __d1, size_t __s1, _UIntType1 __b1, size_t __t1, _UIntType1 __c1, size_t __l1, _UIntType1 __f1, typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::mersenne_twister_engine< _UIntType1, __w1, __n1, __m1, __r1, __a1, __u1, __d1, __s1, __b1, __t1, __c1, __l1, __f1 > &__x)
- bool operator== (const mersenne_twister_engine &__lhs, const mersenne_twister_engine &__rhs)
- template<typename _UIntType1 , size_t __w1, size_t __n1, size_t __m1, size_t __r1, _UIntType1 __a1, size_t __u1, _UIntType1 __d1, size_t __s1, _UIntType1 __b1, size_t __t1, _UIntType1 __c1, size_t __l1, _UIntType1 __f1, typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::mersenne_twister_engine< _UIntType1, __w1, __n1, __m1, __r1, __a1, __u1, __d1, __s1, __b1, __t1, __c1, __l1, __f1 > &__x)

4.708.1 Detailed Description

template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f>class std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >

A generalized feedback shift register discrete random number generator.

This algorithm avoids multiplication and division and is designed to be friendly to a pipelined architecture. If the parameters are chosen correctly, this generator will produce numbers with a very long period and fairly good apparent entropy, although still not cryptographically strong.

The best way to use this generator is with the predefined mt19937 class.

This algorithm was originally invented by Makoto Matsumoto and Takuji Nishimura.

Template Parameters

__w	Word size, the number of bits in each element of the state vector.
__n	The degree of recursion.
__m	The period parameter.
__r	The separation point bit index.
__a	The last row of the twist matrix.
__u	The first right-shift tempering matrix parameter.
__d	The first right-shift tempering matrix mask.
__s	The first left-shift tempering matrix parameter.
__b	The first left-shift tempering matrix mask.

__t	The second left-shift tempering matrix parameter.
__c	The second left-shift tempering matrix mask.
__l	The second right-shift tempering matrix parameter.
__f	Initialization multiplier.

Definition at line 463 of file random.h.

4.708.2 Member Typedef Documentation

4.708.2.1 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> typedef _UIntType std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >::result_type

The type of the generated random value.

Definition at line 498 of file random.h.

4.708.3 Constructor & Destructor Documentation

4.708.3.1 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >::mersenne_twister_engine (_Sseq & *__q*) [inline], [explicit]

Constructs a mersenne_twister_engine random number generator engine seeded from the seed sequence __q.

Parameters

__q	the seed sequence.

Definition at line 532 of file random.h.

4.708.4 Member Function Documentation

4.708.4.1 template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> void std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >::discard (unsigned long long *__z*)

Discard a sequence of random numbers.

Definition at line 432 of file bits/random.tcc.

4.708.4.2 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> static constexpr result_type std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >::max ( ) [inline], [static]

Gets the largest possible value in the output range.

Definition at line 553 of file random.h.

4.708.4.3 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> static constexpr result_type std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >::min ( ) [inline], [static]

Gets the smallest possible value in the output range.

Definition at line 546 of file random.h.

4.708.5 Friends And Related Function Documentation

4.708.5.1 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> template<typename _UIntType1 , size_t __w1, size_t __n1, size_t __m1, size_t __r1, _UIntType1 __a1, size_t __u1, _UIntType1 __d1, size_t __s1, _UIntType1 __b1, size_t __t1, _UIntType1 __c1, size_t __l1, _UIntType1 __f1, typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::mersenne_twister_engine< _UIntType1, __w1, __n1, __m1, __r1, __a1, __u1, __d1, __s1, __b1, __t1, __c1, __l1, __f1 > & *__x*) [friend]

Inserts the current state of a % mersenne_twister_engine random number generator engine __x into the output stream __os.

Parameters

__os	An output stream.
__x	A % mersenne_twister_engine random number generator engine.

Returns

The output stream with the state of __x inserted or in an error state.

4.708.5.2 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> bool operator== (const mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > & *__lhs,* const mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > & *__rhs*) [friend]

Compares two % mersenne_twister_engine random number generator objects of the same type for equality.

Parameters

__lhs	A % mersenne_twister_engine random number generator object.
__rhs	Another % mersenne_twister_engine random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 578 of file random.h.

4.708.5.3 template<typename _UIntType, size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f> template<typename _UIntType1 , size_t __w1, size_t __n1, size_t __m1, size_t __r1, _UIntType1 __a1, size_t __u1, _UIntType1 __d1, size_t __s1, _UIntType1 __b1, size_t __t1, _UIntType1 __c1, size_t __l1, _UIntType1 __f1, typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::mersenne_twister_engine< _UIntType1, __w1, __n1, __m1, __r1, __a1, __u1, __d1, __s1, __b1, __t1, __c1, __l1, __f1 > & *__x*) [friend]

Extracts the current state of a % mersenne_twister_engine random number generator engine `__x` from the input stream `__is`.

Parameters

__is	An input stream.
__x	A % mersenne_twister_engine random number generator engine.

Returns

The input stream with the state of __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.709 std::messages< _CharT > Class Template Reference

Inheritance diagram for std::messages< _CharT >:

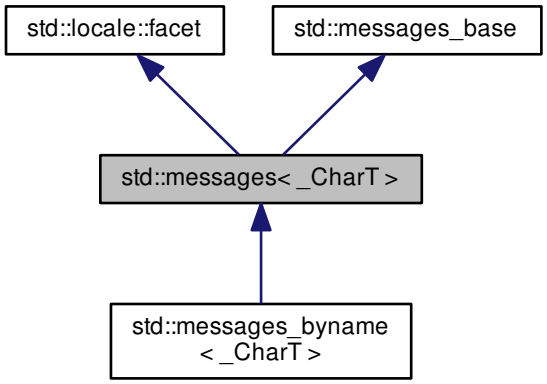

Public Types

- typedef int **catalog**

- typedef _CharT char_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- messages (size_t __refs=0)
- messages (__c_locale __cloc, const char *__s, size_t __refs=0)
- void **close** (catalog __c) const
- string_type **get** (catalog __c, int __set, int __msgid, const string_type &__s) const
- catalog **open** (const basic_string< char > &__s, const locale &__loc) const
- catalog **open** (const basic_string< char > &, const locale &, const char *) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~messages ()
- string_type **_M_convert_from_char** (char *) const
- char * **_M_convert_to_char** (const string_type &__msg) const
- virtual void **do_close** (catalog) const
- virtual string_type **do_get** (catalog, int, int, const string_type &__dfault) const
- template<>
  string **do_get** (catalog, int, int, const string &) const
- template<>
  wstring **do_get** (catalog, int, int, const wstring &) const
- virtual catalog **do_open** (const basic_string< char > &, const locale &) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_messages**
- const char * **_M_name_messages**

4.709.1 Detailed Description

template<typename _CharT>class std::messages< _CharT >

Primary class template messages.

This facet encapsulates the code to retrieve messages from message catalogs. The only thing defined by the standard for this facet is the interface. All underlying functionality is implementation-defined.

This library currently implements 3 versions of the message facet. The first version (gnu) is a wrapper around gettext, provided by libintl. The second version (ieee) is a wrapper around catgets. The final version (default) does no actual translation. These implementations are only provided for char and wchar_t instantiations.

The messages template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the messages facet.

Definition at line 1799 of file locale_facets_nonio.h.

4.709.2 Member Typedef Documentation

4.709.2.1 template<typename _CharT > typedef _CharT std::messages< _CharT >::char_type

Public typedefs.

Definition at line 1805 of file locale_facets_nonio.h.

4.709.2.2 template<typename _CharT > typedef basic_string<_CharT> std::messages< _CharT >::string_type

Public typedefs.

Definition at line 1806 of file locale_facets_nonio.h.

4.709.3 Constructor & Destructor Documentation

4.709.3.1 template<typename _CharT > std::messages< _CharT >::messages (size_t __refs = 0) [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 42 of file messages_members.h.

4.709.3.2 template<typename _CharT > std::messages< _CharT >::messages (__c_locale __cloc, const char * __s, size_t __refs = 0) [explicit]

Internal constructor. Not for general use.

This is a constructor for use by the library itself to set up new locales.

Parameters

__cloc	The C locale.
__s	The name of a locale.
__refs	Refcount to pass to the base class.

Definition at line 47 of file messages_members.h.

4.709.3.3 template<typename _CharT > std::messages< _CharT >::~messages ( ) [protected], [virtual]

Destructor.

Definition at line 59 of file messages_members.h.

4.709.4 Member Data Documentation

4.709.4.1 template<typename _CharT > locale::id std::messages< _CharT >::id [static]

Numpunct facet id.

Definition at line 1817 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h

- messages_members.h

4.710 std::messages_base Struct Reference

Inheritance diagram for std::messages_base:

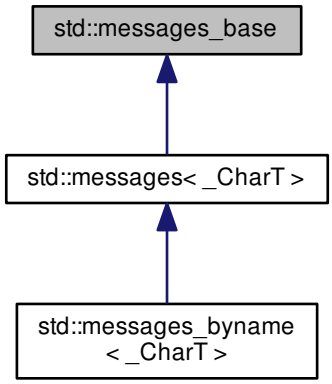

Public Types

- typedef int **catalog**

4.710.1 Detailed Description

Messages facet base class providing catalog typedef.

Definition at line 1770 of file locale_facets_nonio.h.

The documentation for this struct was generated from the following file:

- locale_facets_nonio.h

4.711 std::messages_byname< _CharT > Class Template Reference

Inheritance diagram for std::messages_byname< _CharT >:

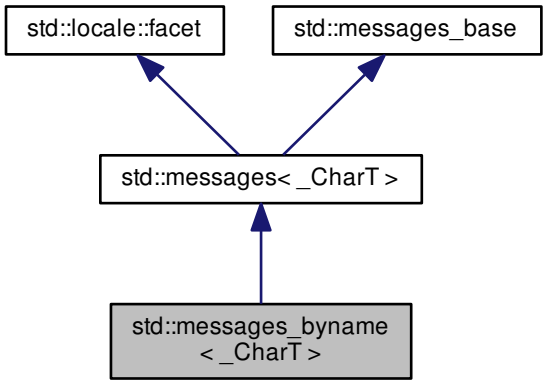

Public Types

- typedef int **catalog**
- typedef _CharT **char_type**
- typedef basic_string< _CharT > **string_type**

Public Member Functions

- **messages_byname** (const char *__s, size_t __refs=0)
- **messages_byname** (const string &__s, size_t __refs=0)
- void **close** (catalog __c) const
- string_type **get** (catalog __c, int __set, int __msgid, const string_type &__s) const
- catalog **open** (const basic_string< char > &__s, const locale &__loc) const
- catalog **open** (const basic_string< char > &, const locale &, const char *) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- string_type **_M_convert_from_char** (char *) const
- char * **_M_convert_to_char** (const string_type &__msg) const
- virtual void **do_close** (catalog) const
- virtual string_type **do_get** (catalog, int, int, const string_type &__dfault) const

- template<>
  string **do_get** (catalog, int, int, const string &) const
- template<>
  wstring **do_get** (catalog, int, int, const wstring &) const
- virtual catalog **do_open** (const basic_string< char > &, const locale &) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __c_locale **_M_c_locale_messages**
- const char * **_M_name_messages**

4.711.1 Detailed Description

template<typename _CharT>class std::messages_byname< _CharT >

class messages_byname [22.2.7.2].

Definition at line 1983 of file locale_facets_nonio.h.

4.711.2 Member Data Documentation

4.711.2.1 template<typename _CharT > locale::id std::messages< _CharT >::id [static],[inherited]

Numpunct facet id.

Definition at line 1817 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h
- messages_members.h

4.712 std::minus< _Tp > Struct Template Reference

Inheritance diagram for std::minus< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef _Tp result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x, const _Tp &__y) const

4.712.1 Detailed Description

template<typename _Tp = void>struct std::minus< _Tp >

One of the math functors.

Definition at line 150 of file stl_function.h.

4.712.2 Member Typedef Documentation

4.712.2.1 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.712.2.2 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.712.2.3 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.713 std::minus< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)-std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)-std::forward< _Up >(__u))

4.713.1 Detailed Description

template<><>struct std::minus< void >

One of the math functors.

Definition at line 245 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.714 __gnu_pbds::detail::mod_based_range_hashing< Size_Type > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::mod_based_range_hashing< Size_Type >:

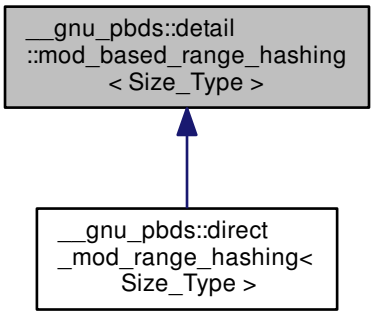

Protected Types

- typedef Size_Type **size_type**

Protected Member Functions

- void **notify_resized** (size_type s)
- size_type **range_hash** (size_type s) const
- void **swap** (mod_based_range_hashing &other)

4.714.1 Detailed Description

template<typename Size_Type>class __gnu_pbds::detail::mod_based_range_hashing< Size_Type >

Mod based range hashing.

Definition at line 50 of file mod_based_range_hashing.hpp.

The documentation for this class was generated from the following file:

- mod_based_range_hashing.hpp

4.715 std::modulus< _Tp > Struct Template Reference

Inheritance diagram for std::modulus< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef _Tp result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x, const _Tp &__y) const

4.715.1 Detailed Description

template<typename _Tp = void>struct std::modulus< _Tp >

One of the math functors.

Definition at line 159 of file stl_function.h.

4.715.2 Member Typedef Documentation

4.715.2.1 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.715.2.2 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.715.2.3 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.716 std::modulus< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)%std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)%std::forward< _Up >(__u))

4.716.1 Detailed Description

template<><>struct std::modulus< void >

One of the math functors.

Definition at line 290 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.717 std::money_base Class Reference

Inheritance diagram for std::money_base:

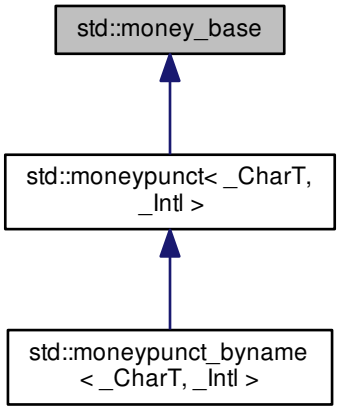

Public Types

- enum { **_S_minus**, **_S_zero**, **_S_end** }
- enum **part** {
  none, **space**, **symbol**, **sign**,
  value }

Static Public Member Functions

- static pattern **_S_construct_pattern** (char __precedes, char __space, char __posn) throw ()

Static Public Attributes

- static const char * **_S_atoms**
- static const pattern **_S_default_pattern**

4.717.1 Detailed Description

Money format ordering data.

This class contains an ordered array of 4 fields to represent the pattern for formatting a money amount. Each field may contain one entry from the part enum. symbol, sign, and value must be present and the remaining field must contain either none or space.

See Also

moneypunct::pos_format() and moneypunct::neg_format() for details of how these fields are interpreted.

Definition at line 928 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.718 std::money_get< _CharT, _InIter > Class Template Reference

Inheritance diagram for std::money_get< _CharT, _InIter >:



Public Types

- typedef _CharT char_type
- typedef _InIter iter_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- money_get (size_t __refs=0)
- template<bool _Intl>
  _GLIBCXX_BEGIN_NAMESPACE_LDBL_OR_CXX11
  _InIter **_M_extract** (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, string &__units) const
- iter_type get (iter_type __s, iter_type __end, bool __intl, ios_base &__io, ios_base::iostate &__err, long double &__units) const
- iter_type get (iter_type __s, iter_type __end, bool __intl, ios_base &__io, ios_base::iostate &__err, string_type &__digits) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~money_get ()
- template<bool _Intl>
  iter_type **_M_extract** (iter_type __s, iter_type __end, ios_base &__io, ios_base::iostate &__err, string &__digits) const
- virtual iter_type do_get (iter_type __s, iter_type __end, bool __intl, ios_base &__io, ios_base::iostate &__err, long double &__units) const
- virtual iter_type do_get (iter_type __s, iter_type __end, bool __intl, ios_base &__io, ios_base::iostate &__err, string_type &__digits) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.718.1 Detailed Description

template<typename _CharT, typename _InIter>class std::money_get< _CharT, _InIter >

Primary class template money_get.

This facet encapsulates the code to parse and return a monetary amount from a string.

The money_get template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the money_get facet.

Definition at line 1468 of file locale_facets_nonio.h.

4.718.2 Member Typedef Documentation

4.718.2.1 template<typename _CharT , typename _InIter > typedef _CharT std::money_get< _CharT, _InIter >::char_type

Public typedefs.

Definition at line 1474 of file locale_facets_nonio.h.

4.718.2.2 template<typename _CharT , typename _InIter > typedef _InIter std::money_get< _CharT, _InIter >::iter_type

Public typedefs.

Definition at line 1475 of file locale_facets_nonio.h.

4.718.2.3 template<typename _CharT , typename _InIter > typedef basic_string<_CharT> std::money_get< _CharT, _InIter >::string_type

Public typedefs.

Definition at line 1476 of file locale_facets_nonio.h.

4.718.3 Constructor & Destructor Documentation

4.718.3.1 template<typename _CharT , typename _InIter > std::money_get< _CharT, _InIter >::money_get (size_t __refs = 0) [inline],[explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 1490 of file locale_facets_nonio.h.

4.718.3.2 template<typename _CharT , typename _InIter > virtual std::money_get< _CharT, _InIter >::~money_get ( ) [inline],[protected],[virtual]

Destructor.

Definition at line 1558 of file locale_facets_nonio.h.

4.718.4 Member Function Documentation

4.718.4.1 template<typename _CharT , typename _InIter > _InIter std::money_get< _CharT, _InIter >::do_get (iter_type __s, iter_type __end, bool __intl, ios_base & __io, ios_base::iostate & __err, long double & __units) const [protected],[virtual]

Read and parse a monetary value.

This function reads and parses characters representing a monetary value. This function is a hook for derived classes to change the value returned.

See Also

get() for details.

Definition at line 371 of file locale_facets_nonio.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str().

Referenced by std::money_get< _CharT, _InIter >::get().

4.718.4.2 template<typename _CharT , typename _InIter > _InIter std::money_get< _CharT, _InIter >::do_get (iter_type __s, iter_type __end, bool __intl, ios_base & __io, ios_base::iostate & __err, string_type & __digits) const [protected],[virtual]

Read and parse a monetary value.

This function reads and parses characters representing a monetary value. This function is a hook for derived classes to change the value returned.

See Also

get() for details.

Definition at line 384 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::basic_string< _CharT, _Traits, _Alloc >::resize(), and std::__ctype_abstract_base< _CharT >::widen().

4.718.4.3 template<typename _CharT , typename _InIter > iter_type std::money_get< _CharT, _InIter >::get (iter_type __s, iter_type __end, bool __intl, ios_base & __io, ios_base::iostate & __err, long double & __units) const [inline]

Read and parse a monetary value.

This function reads characters from *__s*, interprets them as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and returns the result in *units* as an integral value moneypunct::frac_digits() * the actual amount. For example, the string $10.01 in a US locale would store 1001 in *units*.

Any characters not part of a valid money amount are not consumed.

If a money value cannot be parsed from the input stream, sets err=(err|io.failbit). If the stream is consumed before finishing parsing, sets err=(err|io.failbit|io.eofbit). *units* is unchanged if parsing fails.

This function works by returning the result of do_get().

Parameters

__s	Start of characters to parse.
__end	End of characters to parse.
__intl	Parameter to use_facet<moneypunct<CharT,intl> >.
__io	Source of facets and io state.
__err	Error field to set if parsing fails.
__units	Place to store result of parsing.

Returns

Iterator referencing first character beyond valid money amount.

Definition at line 1520 of file locale_facets_nonio.h.

References std::money_get< _CharT, _InIter >::do_get().

4.718.4.4 template<typename _CharT , typename _InIter > iter_type std::money_get< _CharT, _InIter >::get (iter_type __s, iter_type __end, bool __intl, ios_base & __io, ios_base::iostate & __err, string_type & __digits) const [inline]

Read and parse a monetary value.

This function reads characters from *__s*, interprets them as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and returns the result in *digits*. For example, the string $10.01 in a US locale would store `1001` in *digits*.

Any characters not part of a valid money amount are not consumed.

If a money value cannot be parsed from the input stream, sets err=(err|io.failbit). If the stream is consumed before finishing parsing, sets err=(err|io.failbit|io.eofbit).

This function works by returning the result of do_get().

Parameters

__s	Start of characters to parse.
__end	End of characters to parse.
__intl	Parameter to use_facet<moneypunct<CharT,intl> >.

__io	Source of facets and io state.
__err	Error field to set if parsing fails.
__digits	Place to store result of parsing.

Returns

Iterator referencing first character beyond valid money amount.

Definition at line 1551 of file locale_facets_nonio.h.

References std::money_get< _CharT, _InIter >::do_get().

4.718.5 Member Data Documentation

4.718.5.1 template<typename _CharT , typename _InIter > locale::id std::money_get< _CharT, _InIter >::id [static]

Numpunct facet id.

Definition at line 1480 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h
- locale_facets_nonio.tcc

4.719 std::money_put< _CharT, _OutIter > Class Template Reference

Inheritance diagram for std::money_put< _CharT, _OutIter >:



Public Types

- typedef _CharT char_type
- typedef _OutIter iter_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- money_put (size_t __refs=0)
- template<bool _Intl>
  _OutIter **_M_insert** (iter_type __s, ios_base &__io, char_type __fill, const string_type &__digits) const
- iter_type put (iter_type __s, bool __intl, ios_base &__io, char_type __fill, long double __units) const
- iter_type put (iter_type __s, bool __intl, ios_base &__io, char_type __fill, const string_type &__digits) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~money_put ()
- template<bool _Intl>
  iter_type **_M_insert** (iter_type __s, ios_base &__io, char_type __fill, const string_type &__digits) const
- virtual iter_type do_put (iter_type __s, bool __intl, ios_base &__io, char_type __fill, long double __units) const
- virtual iter_type do_put (iter_type __s, bool __intl, ios_base &__io, char_type __fill, const string_type &__digits) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.719.1 Detailed Description

template<typename _CharT, typename _OutIter>class std::money_put< _CharT, _OutIter >

Primary class template money_put.

This facet encapsulates the code to format and output a monetary amount.

The money_put template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the money_put facet.

Definition at line 1621 of file locale_facets_nonio.h.

4.719.2 Member Typedef Documentation

4.719.2.1 template<typename _CharT , typename _OutIter > typedef _CharT std::money_put< _CharT, _OutIter >::char_type

Public typedefs.

Definition at line 1626 of file locale_facets_nonio.h.

4.719.2.2 template<typename _CharT , typename _OutIter > typedef _OutIter std::money_put< _CharT, _OutIter >::iter_type

Public typedefs.

Definition at line 1627 of file locale_facets_nonio.h.

4.719.2.3 template<typename _CharT , typename _OutIter > typedef basic_string<_CharT> std::money_put< _CharT, _OutIter >::string_type

Public typedefs.

Definition at line 1628 of file locale_facets_nonio.h.

4.719.3 Constructor & Destructor Documentation

4.719.3.1 template<typename _CharT , typename _OutIter > std::money_put< _CharT, _OutIter >::money_put (size_t *__refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 1642 of file locale_facets_nonio.h.

4.719.3.2 template<typename _CharT , typename _OutIter > virtual std::money_put< _CharT, _OutIter >::~money_put ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 1692 of file locale_facets_nonio.h.

4.719.4 Member Function Documentation

4.719.4.1 template<typename _CharT , typename _OutIter > _OutIter std::money_put< _CharT, _OutIter >::do_put (iter_type *__s,* bool *__intl,* ios_base & *__io,* char_type *__fill,* long double *__units*) const [protected], [virtual]

Format and output a monetary value.

This function formats *units* as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and writes the resulting characters to *__s*. For example, the value 1001 in a US locale would write `$10.01` to *__s*.

This function is a hook for derived classes to change the value returned.

See Also

put().

Parameters

__s	The stream to write to.

__intl	Parameter to use_facet<moneypunct<CharT,intl> >.
__io	Source of facets and io state.
__fill	char_type to use for padding.
__units	Place to store result of parsing.

Returns

Iterator after writing.

Definition at line 577 of file locale_facets_nonio.tcc.

References std::ios_base::getloc(), and std::__ctype_abstract_base< _CharT >::widen().

Referenced by std::money_put< _CharT, _OutIter >::put().

4.719.4.2 template<typename _CharT , typename _OutIter > _OutIter std::money_put< _CharT, _OutIter >::do_put (iter_type *__s*, bool *__intl*, ios_base & *__io*, char_type *__fill*, const string_type & *__digits*) const [protected], [virtual]

Format and output a monetary value.

This function formats *digits* as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and writes the resulting characters to *__s*. For example, the string `1001` in a US locale would write `$10.01` to *__s*.

This function is a hook for derived classes to change the value returned.

See Also

put().

Parameters

__s	The stream to write to.
__intl	Parameter to use_facet<moneypunct<CharT,intl> >.
__io	Source of facets and io state.
__fill	char_type to use for padding.
__digits	Place to store result of parsing.

Returns

Iterator after writing.

Definition at line 615 of file locale_facets_nonio.tcc.

4.719.4.3 template<typename _CharT , typename _OutIter > iter_type std::money_put< _CharT, _OutIter >::put (iter_type *__s*, bool *__intl*, ios_base & *__io*, char_type *__fill*, long double *__units*) const [inline]

Format and output a monetary value.

This function formats *units* as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and writes the resulting characters to *__s*. For example, the value 1001 in a US locale would write `$10.01` to *__s*.

This function works by returning the result of do_put().

Parameters

__s	The stream to write to.
__intl	Parameter to use_facet<moneypunct<CharT,intl> >.
__io	Source of facets and io state.
__fill	char_type to use for padding.
__units	Place to store result of parsing.

Returns

Iterator after writing.

Definition at line 1662 of file locale_facets_nonio.h.

References std::money_put< _CharT, _OutIter >::do_put().

4.719.4.4 template<typename _CharT , typename _OutIter > iter_type std::money_put< _CharT, _OutIter >::put (iter_type *__s*, bool *__intl*, ios_base & *__io*, char_type *__fill*, const string_type & *__digits*) const [inline]

Format and output a monetary value.

This function formats *digits* as a monetary value according to moneypunct and ctype facets retrieved from io.getloc(), and writes the resulting characters to *__s*. For example, the string `1001` in a US locale would write `$10.01` to *__s*.

This function works by returning the result of do_put().

Parameters

__s	The stream to write to.
__intl	Parameter to use_facet<moneypunct<CharT,intl> >.
__io	Source of facets and io state.
__fill	char_type to use for padding.
__digits	Place to store result of parsing.

Returns

Iterator after writing.

Definition at line 1685 of file locale_facets_nonio.h.

References std::money_put< _CharT, _OutIter >::do_put().

4.719.5 Member Data Documentation

4.719.5.1 template<typename _CharT , typename _OutIter > locale::id std::money_put< _CharT, _OutIter >::id [static]

Numpunct facet id.

Definition at line 1632 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h
- locale_facets_nonio.tcc

4.720 std::moneypunct< _CharT, _Intl > Class Template Reference

Inheritance diagram for std::moneypunct< _CharT, _Intl >:

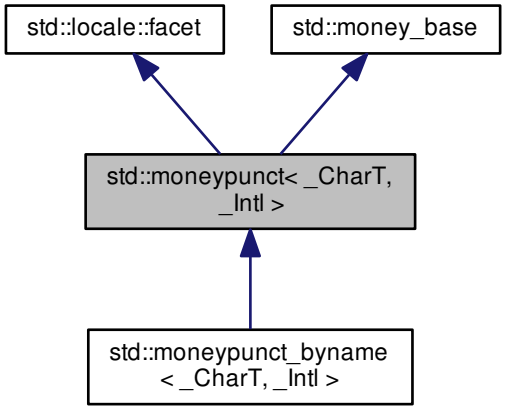

Public Types

- enum { **_S_minus**, **_S_zero**, **_S_end** }
- typedef __moneypunct_cache < _CharT, _Intl > **__cache_type**
- enum **part** { **none**, **space**, **symbol**, **sign**, **value** }

- typedef _CharT char_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- moneypunct (size_t __refs=0)
- moneypunct (__cache_type *__cache, size_t __refs=0)
- moneypunct (__c_locale __cloc, const char *__s, size_t __refs=0)
- string_type curr_symbol () const
- char_type decimal_point () const
- int frac_digits () const
- string grouping () const
- string_type negative_sign () const
- string_type positive_sign () const
- char_type thousands_sep () const

- pattern pos_format () const
- pattern neg_format () const

Static Public Member Functions

- static pattern **_S_construct_pattern** (char __precedes, char __space, char __posn) throw ()

Static Public Attributes

- static const char * **_S_atoms**
- static const pattern **_S_default_pattern**
- static locale::id id
- static const bool intl

Protected Member Functions

- virtual ~moneypunct ()
- void **_M_initialize_moneypunct** (__c_locale __cloc=0, const char *__name=0)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- virtual string_type do_curr_symbol () const
- virtual char_type do_decimal_point () const
- virtual int do_frac_digits () const
- virtual string do_grouping () const
- virtual pattern do_neg_format () const
- virtual string_type do_negative_sign () const
- virtual pattern do_pos_format () const
- virtual string_type do_positive_sign () const
- virtual char_type do_thousands_sep () const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.720.1 Detailed Description

template<typename _CharT, bool _Intl>class std::moneypunct< _CharT, _Intl >

Primary class template moneypunct.

This facet encapsulates the punctuation, grouping and other formatting features of money amount string representations.

Definition at line 1024 of file locale_facets_nonio.h.

4.720.2 Member Typedef Documentation

4.720.2.1 template<typename _CharT , bool _Intl> typedef _CharT std::moneypunct< _CharT, _Intl >::char_type

Public typedefs.

Definition at line 1030 of file locale_facets_nonio.h.

4.720.2.2 template<typename _CharT , bool _Intl> typedef basic_string<_CharT> std::moneypunct< _CharT, _Intl >::string_type

Public typedefs.

Definition at line 1031 of file locale_facets_nonio.h.

4.720.3 Constructor & Destructor Documentation

4.720.3.1 template<typename _CharT , bool _Intl> std::moneypunct< _CharT, _Intl >::moneypunct (size_t *__refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 1053 of file locale_facets_nonio.h.

4.720.3.2 template<typename _CharT , bool _Intl> std::moneypunct< _CharT, _Intl >::moneypunct (__cache_type * *__cache*, size_t *__refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is an internal constructor.

Parameters

__cache	Cache for optimization.
__refs	Passed to the base facet class.

Definition at line 1066 of file locale_facets_nonio.h.

4.720.3.3 template<typename _CharT , bool _Intl> std::moneypunct< _CharT, _Intl >::moneypunct (__c_locale *__cloc*, const char * *__s*, size_t *__refs* = 0) [inline], [explicit]

Internal constructor. Not for general use.

This is a constructor for use by the library itself to set up new locales.

Parameters

__cloc	The C locale.
__s	The name of a locale.
__refs	Passed to the base facet class.

Definition at line 1081 of file locale_facets_nonio.h.

4.720.3.4 template<typename _CharT , bool _Intl> virtual std::moneypunct< _CharT, _Intl >::~moneypunct ( ) [protected], [virtual]

Destructor.

4.720.4 Member Function Documentation

4.720.4.1 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::curr_symbol ( ) const [inline]

Return currency symbol string.

This function returns a string_type to use as a currency symbol. It does so by returning returning moneypunct<char_type>::do_curr_symbol().

Returns

string_type representing a currency symbol.

Definition at line 1151 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_curr_symbol().

4.720.4.2 template<typename _CharT , bool _Intl> char_type std::moneypunct< _CharT, _Intl >::decimal_point ( ) const [inline]

Return decimal point character.

This function returns a char_type to use as a decimal point. It does so by returning returning moneypunct<char_type>::do_decimal_point().

Returns

char_type representing a decimal point.

Definition at line 1095 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_decimal_point().

4.720.4.3 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_curr_symbol ( ) const [inline], [protected], [virtual]

Return currency symbol string.

This function returns a string_type to use as a currency symbol. This function is a hook for derived classes to change the value returned.

See Also

curr_symbol() for details.

Returns

string_type representing a currency symbol.

Definition at line 1297 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::curr_symbol().

4.720.4.4 template<typename _CharT , bool _Intl> virtual char_type std::moneypunct< _CharT, _Intl >::do_decimal_point ( ) const [inline],[protected],[virtual]

Return decimal point character.

Returns a char_type to use as a decimal point. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a decimal point.

Definition at line 1259 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::decimal_point().

4.720.4.5 template<typename _CharT , bool _Intl> virtual int std::moneypunct< _CharT, _Intl >::do_frac_digits ( ) const [inline],[protected],[virtual]

Return number of digits in fraction.

This function returns the exact number of digits that make up the fractional part of a money amount. This function is a hook for derived classes to change the value returned.

See Also

frac_digits() for details.

Returns

Number of digits in amount fraction.

Definition at line 1337 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::frac_digits().

4.720.4.6 template<typename _CharT , bool _Intl> virtual string std::moneypunct< _CharT, _Intl >::do_grouping ( ) const [inline],[protected],[virtual]

Return grouping specification.

Returns a string representing groupings for the integer part of a number. This function is a hook for derived classes to change the value returned.

See Also

grouping() for details.

Returns

String representing grouping specification.

Definition at line 1284 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::grouping().

4.720.4.7 template<typename _CharT , bool _Intl> virtual pattern std::moneypunct< _CharT, _Intl >::do_neg_format ( ) const [inline],[protected],[virtual]

Return pattern for money values.

This function returns a pattern describing the formatting of a negative valued money amount. This function is a hook for derived classes to change the value returned.

See Also

neg_format() for details.

Returns

Pattern for money values.

Definition at line 1365 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::neg_format().

4.720.4.8 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_negative_sign ( ) const [inline], [protected], [virtual]

Return negative sign string.

This function returns a string_type to use as a sign for negative amounts. This function is a hook for derived classes to change the value returned.

See Also

negative_sign() for details.

Returns

string_type representing a negative sign.

Definition at line 1323 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::negative_sign().

4.720.4.9 template<typename _CharT , bool _Intl> virtual pattern std::moneypunct< _CharT, _Intl >::do_pos_format ( ) const [inline], [protected], [virtual]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive valued money amount. This function is a hook for derived classes to change the value returned.

See Also

pos_format() for details.

Returns

Pattern for money values.

Definition at line 1351 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::pos_format().

4.720.4.10 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_positive_sign ( ) const [inline], [protected], [virtual]

Return positive sign string.

This function returns a string_type to use as a sign for positive amounts. This function is a hook for derived classes to change the value returned.

See Also

positive_sign() for details.

Returns

string_type representing a positive sign.

Definition at line 1310 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::positive_sign().

4.720.4.11 template<typename _CharT , bool _Intl> virtual char_type std::moneypunct< _CharT, _Intl >::do_thousands_sep ( ) const [inline],[protected],[virtual]

Return thousands separator character.

Returns a char_type to use as a thousands separator. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a thousands separator.

Definition at line 1271 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::thousands_sep().

4.720.4.12 template<typename _CharT , bool _Intl> int std::moneypunct< _CharT, _Intl >::frac_digits ( ) const [inline]

Return number of digits in fraction.

This function returns the exact number of digits that make up the fractional part of a money amount. It does so by returning returning moneypunct<char_type>::do_frac_digits().

The fractional part of a money amount is optional. But if it is present, there must be frac_digits() digits.

Returns

Number of digits in amount fraction.

Definition at line 1201 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_frac_digits().

4.720.4.13 template<typename _CharT , bool _Intl> string std::moneypunct< _CharT, _Intl >::grouping ( ) const [inline]

Return grouping specification.

This function returns a string representing groupings for the integer part of an amount. Groupings indicate where thousands separators should be inserted.

Each char in the return string is interpret as an integer rather than a character. These numbers represent the number of digits in a group. The first char in the string represents the number of digits in the least significant group. If a char is negative, it indicates an unlimited number of digits for the group. If more chars from the string are required to group a number, the last char is used repeatedly.

For example, if the grouping() returns `\003\002` and is applied to the number 123456789, this corresponds to 12,34,56,789. Note that if the string was `32`, this would put more than 50 digits into the least significant group if the character set is ASCII.

The string is returned by calling moneypunct<char_type>::do_grouping().

Returns

string representing grouping specification.

Definition at line 1138 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_grouping().

4.720.4.14 template<typename _CharT , bool _Intl> pattern std::moneypunct< _CharT, _Intl >::neg_format ( ) const [inline]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive or negative valued money amount. It does so by returning returning moneypunct<char_type>::do_pos_format() or moneypunct<char_type>::do_neg_format().

The pattern has 4 fields describing the ordering of symbol, sign, value, and none or space. There must be one of each in the pattern. The none and space enums may not appear in the first field and space may not appear in the final field.

The parts of a money string must appear in the order indicated by the fields of the pattern. The symbol field indicates that the value of curr_symbol() may be present. The sign field indicates that the value of positive_sign() or negative_sign() must be present. The value field indicates that the absolute value of the money amount is present. none indicates 0 or more whitespace characters, except at the end, where it permits no whitespace. space indicates that 1 or more whitespace characters must be present.

For example, for the US locale and pos_format() pattern {symbol,sign,value,none}, curr_symbol() == '$' positive_sign() == '+', and value 10.01, and options set to force the symbol, the corresponding string is `$+10.01`.

Returns

Pattern for money values.

Definition at line 1241 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_neg_format().

4.720.4.15 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::negative_sign ( ) const [inline]

Return negative sign string.

This function returns a string_type to use as a sign for negative amounts. It does so by returning returning moneypunct<char_type>::do_negative_sign().

If the return value contains more than one character, the first character appears in the position indicated by neg_format() and the remainder appear at the end of the formatted string.

Returns

string_type representing a negative sign.

Definition at line 1185 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_negative_sign().

4.720.4.16 template<typename _CharT , bool _Intl> pattern std::moneypunct< _CharT, _Intl >::pos_format ( ) const [inline]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive or negative valued money amount. It does so by returning returning moneypunct<char_type>::do_pos_format() or moneypunct<char_type>::do_neg_format().

The pattern has 4 fields describing the ordering of symbol, sign, value, and none or space. There must be one of each in the pattern. The none and space enums may not appear in the first field and space may not appear in the final field.

The parts of a money string must appear in the order indicated by the fields of the pattern. The symbol field indicates that the value of curr_symbol() may be present. The sign field indicates that the value of positive_sign() or negative_sign() must be present. The value field indicates that the absolute value of the money amount is present. none indicates 0 or more whitespace characters, except at the end, where it permits no whitespace. space indicates that 1 or more whitespace characters must be present.

For example, for the US locale and pos_format() pattern {symbol,sign,value,none}, curr_symbol() == '$' positive_sign() == '+', and value 10.01, and options set to force the symbol, the corresponding string is `$+10.01`.

Returns

Pattern for money values.

Definition at line 1237 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_pos_format().

4.720.4.17 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::positive_sign ( ) const [inline]

Return positive sign string.

This function returns a string_type to use as a sign for positive amounts. It does so by returning returning moneypunct<char_type>::do_positive_sign().

If the return value contains more than one character, the first character appears in the position indicated by pos_format() and the remainder appear at the end of the formatted string.

Returns

string_type representing a positive sign.

Definition at line 1168 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_positive_sign().

4.720.4.18 template<typename _CharT , bool _Intl> char_type std::moneypunct< _CharT, _Intl >::thousands_sep ( ) const [inline]

Return thousands separator character.

This function returns a char_type to use as a thousands separator. It does so by returning returning moneypunct<char_type>::do_thousands_sep().

Returns

char_type representing a thousands separator.

Definition at line 1108 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_thousands_sep().

4.720.5 Member Data Documentation

4.720.5.1 template<typename _CharT , bool _Intl> locale::id std::moneypunct< _CharT, _Intl >::id [static]

Numpunct facet id.

Definition at line 1043 of file locale_facets_nonio.h.

4.720.5.2 template<typename _CharT , bool _Intl> const bool std::moneypunct< _CharT, _Intl >::intl [static]

This value is provided by the standard, but no reason for its existence.

Definition at line 1041 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.721 std::moneypunct_byname< _CharT, _Intl > Class Template Reference

Inheritance diagram for std::moneypunct_byname< _CharT, _Intl >:

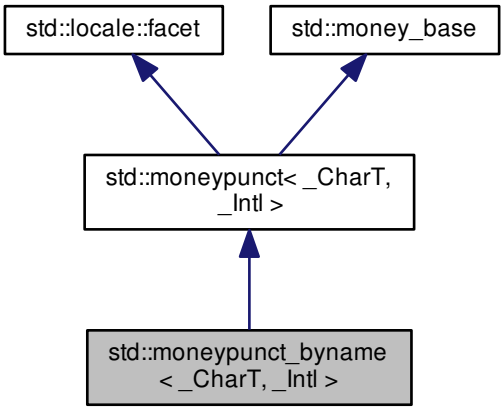

Public Types

- enum { **_S_minus**, **_S_zero**, **_S_end** }
- typedef __moneypunct_cache < _CharT, _Intl > **__cache_type**
- typedef _CharT **char_type**
- enum **part** { **none**, **space**, **symbol**, **sign**, **value** }
- typedef basic_string< _CharT > **string_type**

Public Member Functions

- **moneypunct_byname** (const char *__s, size_t __refs=0)
- **moneypunct_byname** (const string &__s, size_t __refs=0)
- string_type curr_symbol () const
- char_type decimal_point () const
- int frac_digits () const
- string grouping () const
- string_type negative_sign () const
- string_type positive_sign () const
- char_type thousands_sep () const

- pattern pos_format () const
- pattern neg_format () const

Static Public Member Functions

- static pattern **_S_construct_pattern** (char __precedes, char __space, char __posn) throw ()

Static Public Attributes

- static const char * **_S_atoms**
- static const pattern **_S_default_pattern**
- static locale::id id
- static const bool **intl**

Protected Member Functions

- void **_M_initialize_moneypunct** (__c_locale __cloc=0, const char *__name=0)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- template<>
  void **_M_initialize_moneypunct** (__c_locale, const char *)
- virtual string_type do_curr_symbol () const
- virtual char_type do_decimal_point () const
- virtual int do_frac_digits () const
- virtual string do_grouping () const
- virtual pattern do_neg_format () const
- virtual string_type do_negative_sign () const
- virtual pattern do_pos_format () const
- virtual string_type do_positive_sign () const
- virtual char_type do_thousands_sep () const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.721.1 Detailed Description

template<typename _CharT, bool _Intl>class std::moneypunct_byname< _CharT, _Intl >

class moneypunct_byname [22.2.6.4].

Definition at line 1414 of file locale_facets_nonio.h.

4.721.2 Member Function Documentation

4.721.2.1 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::curr_symbol ( ) const [inline], [inherited]

Return currency symbol string.

This function returns a string_type to use as a currency symbol. It does so by returning returning moneypunct<char_type>::do_curr_symbol().

Returns

string_type representing a currency symbol.

Definition at line 1151 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_curr_symbol().

4.721.2.2 template<typename _CharT , bool _Intl> char_type std::moneypunct< _CharT, _Intl >::decimal_point ( ) const [inline], [inherited]

Return decimal point character.

This function returns a char_type to use as a decimal point. It does so by returning returning moneypunct<char_type>::do_decimal_point().

Returns

char_type representing a decimal point.

Definition at line 1095 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_decimal_point().

4.721.2.3 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_curr_symbol ( ) const [inline], [protected], [virtual], [inherited]

Return currency symbol string.

This function returns a string_type to use as a currency symbol. This function is a hook for derived classes to change the value returned.

See Also

curr_symbol() for details.

Returns

string_type representing a currency symbol.

Definition at line 1297 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::curr_symbol().

4.721.2.4 template<typename _CharT , bool _Intl> virtual char_type std::moneypunct< _CharT, _Intl >::do_decimal_point ( ) const [inline], [protected], [virtual], [inherited]

Return decimal point character.

Returns a char_type to use as a decimal point. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a decimal point.

Definition at line 1259 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::decimal_point().

4.721.2.5 template<typename _CharT , bool _Intl> virtual int std::moneypunct< _CharT, _Intl >::do_frac_digits ( ) const [inline], [protected], [virtual], [inherited]

Return number of digits in fraction.

This function returns the exact number of digits that make up the fractional part of a money amount. This function is a hook for derived classes to change the value returned.

See Also

frac_digits() for details.

Returns

Number of digits in amount fraction.

Definition at line 1337 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::frac_digits().

4.721.2.6 template<typename _CharT , bool _Intl> virtual string std::moneypunct< _CharT, _Intl >::do_grouping ( ) const [inline], [protected], [virtual], [inherited]

Return grouping specification.

Returns a string representing groupings for the integer part of a number. This function is a hook for derived classes to change the value returned.

See Also

grouping() for details.

Returns

String representing grouping specification.

Definition at line 1284 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::grouping().

4.721.2.7 template<typename _CharT , bool _Intl> virtual pattern std::moneypunct< _CharT, _Intl >::do_neg_format ( ) const [inline], [protected], [virtual], [inherited]

Return pattern for money values.

This function returns a pattern describing the formatting of a negative valued money amount. This function is a hook for derived classes to change the value returned.

See Also

neg_format() for details.

Returns

Pattern for money values.

Definition at line 1365 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::neg_format().

4.721.2.8 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_negative_sign ( ) const [inline], [protected], [virtual], [inherited]

Return negative sign string.

This function returns a string_type to use as a sign for negative amounts. This function is a hook for derived classes to change the value returned.

See Also

negative_sign() for details.

Returns

string_type representing a negative sign.

Definition at line 1323 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::negative_sign().

4.721.2.9 template<typename _CharT , bool _Intl> virtual pattern std::moneypunct< _CharT, _Intl >::do_pos_format ( ) const [inline], [protected], [virtual], [inherited]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive valued money amount. This function is a hook for derived classes to change the value returned.

See Also

pos_format() for details.

Returns

Pattern for money values.

Definition at line 1351 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::pos_format().

4.721.2.10 template<typename _CharT , bool _Intl> virtual string_type std::moneypunct< _CharT, _Intl >::do_positive_sign ( ) const [inline], [protected], [virtual], [inherited]

Return positive sign string.

This function returns a string_type to use as a sign for positive amounts. This function is a hook for derived classes to change the value returned.

See Also

positive_sign() for details.

Returns

string_type representing a positive sign.

Definition at line 1310 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::positive_sign().

4.721.2.11 template<typename _CharT , bool _Intl> virtual char_type std::moneypunct< _CharT, _Intl >::do_thousands_sep ( ) const [inline], [protected], [virtual], [inherited]

Return thousands separator character.

Returns a char_type to use as a thousands separator. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a thousands separator.

Definition at line 1271 of file locale_facets_nonio.h.

Referenced by std::moneypunct< _CharT, _Intl >::thousands_sep().

4.721.2.12 template<typename _CharT , bool _Intl> int std::moneypunct< _CharT, _Intl >::frac_digits ( ) const [inline], [inherited]

Return number of digits in fraction.

This function returns the exact number of digits that make up the fractional part of a money amount. It does so by returning returning moneypunct<char_type>::do_frac_digits().

The fractional part of a money amount is optional. But if it is present, there must be frac_digits() digits.

Returns

Number of digits in amount fraction.

Definition at line 1201 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_frac_digits().

4.721.2.13 template<typename _CharT , bool _Intl> string std::moneypunct< _CharT, _Intl >::grouping ( ) const [inline], [inherited]

Return grouping specification.

This function returns a string representing groupings for the integer part of an amount. Groupings indicate where thousands separators should be inserted.

Each char in the return string is interpret as an integer rather than a character. These numbers represent the number of digits in a group. The first char in the string represents the number of digits in the least significant group. If a char is negative, it indicates an unlimited number of digits for the group. If more chars from the string are required to group a number, the last char is used repeatedly.

For example, if the grouping() returns `\003\002` and is applied to the number 123456789, this corresponds to 12,34,56,789. Note that if the string was `32`, this would put more than 50 digits into the least significant group if the character set is ASCII.

The string is returned by calling moneypunct<char_type>::do_grouping().

Returns

string representing grouping specification.

Definition at line 1138 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_grouping().

4.721.2.14 template<typename _CharT , bool _Intl> pattern std::moneypunct< _CharT, _Intl >::neg_format ( ) const [inline], [inherited]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive or negative valued money amount. It does so by returning returning moneypunct<char_type>::do_pos_format() or moneypunct<char_type>::do_neg_format().

The pattern has 4 fields describing the ordering of symbol, sign, value, and none or space. There must be one of each in the pattern. The none and space enums may not appear in the first field and space may not appear in the final field.

The parts of a money string must appear in the order indicated by the fields of the pattern. The symbol field indicates that the value of curr_symbol() may be present. The sign field indicates that the value of positive_sign() or negative_sign() must be present. The value field indicates that the absolute value of the money amount is present. none indicates 0 or more whitespace characters, except at the end, where it permits no whitespace. space indicates that 1 or more whitespace characters must be present.

For example, for the US locale and pos_format() pattern {symbol,sign,value,none}, curr_symbol() == '$' positive_sign() == '+', and value 10.01, and options set to force the symbol, the corresponding string is `$+10.01`.

Returns

Pattern for money values.

Definition at line 1241 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_neg_format().

4.721.2.15 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::negative_sign ( ) const [inline], [inherited]

Return negative sign string.

This function returns a string_type to use as a sign for negative amounts. It does so by returning returning moneypunct<char_type>::do_negative_sign().

If the return value contains more than one character, the first character appears in the position indicated by neg_format() and the remainder appear at the end of the formatted string.

Returns

string_type representing a negative sign.

Definition at line 1185 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_negative_sign().

4.721.2.16 template<typename _CharT , bool _Intl> pattern std::moneypunct< _CharT, _Intl >::pos_format ( ) const [inline], [inherited]

Return pattern for money values.

This function returns a pattern describing the formatting of a positive or negative valued money amount. It does so by returning returning moneypunct<char_type>::do_pos_format() or moneypunct<char_type>::do_neg_format().

The pattern has 4 fields describing the ordering of symbol, sign, value, and none or space. There must be one of each in the pattern. The none and space enums may not appear in the first field and space may not appear in the final field.

The parts of a money string must appear in the order indicated by the fields of the pattern. The symbol field indicates that the value of curr_symbol() may be present. The sign field indicates that the value of positive_sign() or negative_sign() must be present. The value field indicates that the absolute value of the money amount is present. none indicates 0 or more whitespace characters, except at the end, where it permits no whitespace. space indicates that 1 or more whitespace characters must be present.

For example, for the US locale and pos_format() pattern {symbol,sign,value,none}, curr_symbol() == '$' positive_sign() == '+', and value 10.01, and options set to force the symbol, the corresponding string is `$+10.01`.

Returns

Pattern for money values.

Definition at line 1237 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_pos_format().

4.721.2.17 template<typename _CharT , bool _Intl> string_type std::moneypunct< _CharT, _Intl >::positive_sign ( ) const [inline], [inherited]

Return positive sign string.

This function returns a string_type to use as a sign for positive amounts. It does so by returning returning moneypunct<char_type>::do_positive_sign().

If the return value contains more than one character, the first character appears in the position indicated by pos_format() and the remainder appear at the end of the formatted string.

Returns

string_type representing a positive sign.

Definition at line 1168 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_positive_sign().

4.721.2.18 template<typename _CharT , bool _Intl> char_type std::moneypunct< _CharT, _Intl >::thousands_sep ( ) const [inline], [inherited]

Return thousands separator character.

This function returns a char_type to use as a thousands separator. It does so by returning returning moneypunct<char-_type>::do_thousands_sep().

Returns

char_type representing a thousands separator.

Definition at line 1108 of file locale_facets_nonio.h.

References std::moneypunct< _CharT, _Intl >::do_thousands_sep().

4.721.3 Member Data Documentation

4.721.3.1 template<typename _CharT , bool _Intl> locale::id std::moneypunct< _CharT, _Intl >::id [static], [inherited]

Numpunct facet id.

Definition at line 1043 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.722 std::move_iterator< _Iterator > Class Template Reference

Public Types

- typedef __traits_type::difference_type **difference_type**
- typedef __traits_type::iterator_category **iterator_category**
- using **iterator_type** = _Iterator
- typedef _Iterator **pointer**
- typedef conditional < is_reference< __base_ref > ::value, typename remove_reference< __base_ref > ::type &&, __base_ref >::type **reference**
- typedef __traits_type::value_type **value_type**

Public Member Functions

- constexpr **move_iterator** (iterator_type __i)
- template<typename _Iter > constexpr **move_iterator** (const move_iterator< _Iter > &__i)
- constexpr iterator_type **base** () const
- constexpr reference **operator*** () const
- constexpr move_iterator **operator+** (difference_type __n) const
- constexpr move_iterator & **operator++** ()
- constexpr move_iterator **operator++** (int)
- constexpr move_iterator & **operator+=** (difference_type __n)
- constexpr move_iterator **operator-** (difference_type __n) const

- constexpr move_iterator & **operator--** ()
- constexpr move_iterator **operator--** (int)
- constexpr move_iterator & **operator-=** (difference_type __n)
- constexpr pointer **operator->** () const
- constexpr reference **operator[]** (difference_type __n) const

4.722.1 Detailed Description

template<typename _Iterator>class std::move_iterator< _Iterator >

Class template move_iterator is an iterator adapter with the same behavior as the underlying iterator except that its dereference operator implicitly converts the value returned by the underlying iterator's dereference operator to an rvalue reference. Some generic algorithms can be called with move iterators to replace copying with moving.

Definition at line 1286 of file bits/stl_iterator.h.

The documentation for this class was generated from the following file:

- bits/stl_iterator.h

4.723 std::__debug::multimap< _Key, _Tp, _Compare, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::multimap< _Key, _Tp, _Compare, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, multimap > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, multimap > **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Tp **mapped_type**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**

- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef std::pair< const _Key, _Tp > **value_type**

Public Member Functions

- **multimap** (const multimap &)=default
- **multimap** (multimap &&)=default
- **multimap** (initializer_list< value_type > __l, const _Compare &__c=_Compare(), const allocator_type &__a=allocator_type())
- **multimap** (const allocator_type &__a)
- **multimap** (const multimap &__m, const allocator_type &__a)
- **multimap** (multimap &&__m, const allocator_type &__a) noexcept(noexcept(_Base(std::move(__m._M_base()), __a)))
- **multimap** (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator > **multimap** (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- **multimap** (const _Compare &__comp, const _Allocator &__a=_Allocator())
- template<typename _InputIterator > **multimap** (_InputIterator __first, _InputIterator __last, const _Compare &__comp=_Compare(), const _Allocator &__a=_Allocator())
- **multimap** (const _Base &__x)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args> iterator **emplace** (_Args &&...__args)
- template<typename... _Args> iterator **emplace_hint** (const_iterator __pos, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- std::pair< iterator, iterator > **equal_range** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type> std::pair< iterator, iterator > **equal_range** (const _Kt &__x)
- std::pair< const_iterator, const_iterator > **equal_range** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type> std::pair< const_iterator, const_iterator > **equal_range** (const _Kt &__x) const
- iterator **erase** (const_iterator __position)

- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (iterator __position)
- size_type **erase** (const key_type &__x)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **find** (const _Kt &__x)
- const_iterator **find** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **find** (const _Kt &__x) const
- iterator **insert** (const value_type &__x)
- iterator **insert** (value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  iterator **insert** (_Pair &&__x)
- void **insert** (std::initializer_list< value_type > __list)
- iterator **insert** (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  iterator **insert** (const_iterator __position, _Pair &&__x)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- iterator **lower_bound** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **lower_bound** (const _Kt &__x)
- const_iterator **lower_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **lower_bound** (const _Kt &__x) const
- multimap & **operator=** (const multimap &)=default
- multimap & **operator=** (multimap &&)=default
- multimap & **operator=** (initializer_list< value_type > __l)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **swap** (multimap &__x) noexcept(/*conditional */)
- iterator **upper_bound** (const key_type &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **upper_bound** (const _Kt &__x)
- const_iterator **upper_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **upper_bound** (const _Kt &__x) const

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.723.1 Detailed Description

template<typename _Key, typename _Tp, typename _Compare = std::less<_Key>, typename _Allocator = std::allocator<std::pair<const _Key, _Tp> >>class std::__debug::multimap< _Key, _Tp, _Compare, _Allocator >

Class std::multimap with safety/checking/debug instrumentation.

Definition at line 44 of file multimap.h.

4.723.2 Member Function Documentation

4.723.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.723.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.723.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.723.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.723.2.5 void __gnu_debug::_Safe_sequence< multimap< _Key, _Tp, _Compare, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.723.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.723.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.723.2.8 void __gnu_debug::_Safe_sequence< multimap< _Key, _Tp, _Compare, _Allocator > >::_M_transfer_from_if (_Safe_sequence< multimap< _Key, _Tp, _Compare, _Allocator > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.723.3 Member Data Documentation

4.723.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.723.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.723.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- multimap.h

4.724 std::multimap< _Key, _Tp, _Compare, _Alloc > Class Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef _Rep_type::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef _Alloc_traits::const_reference **const_reference**
- typedef _Rep_type::const_reverse_iterator **const_reverse_iterator**
- typedef _Rep_type::difference_type **difference_type**
- typedef _Rep_type::iterator **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Tp **mapped_type**
- typedef _Alloc_traits::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef _Rep_type::reverse_iterator **reverse_iterator**
- typedef _Rep_type::size_type **size_type**
- typedef std::pair< const _Key, _Tp > **value_type**

Public Member Functions

- multimap ()=default
- multimap (const _Compare &__comp, const allocator_type &__a=allocator_type())
- multimap (const multimap &)=default
- multimap (multimap &&)=default
- multimap (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- multimap (const allocator_type &__a)
- multimap (const multimap &__m, const allocator_type &__a)
- multimap (multimap &&__m, const allocator_type &__a) noexcept(is_nothrow_copy_constructible< _Compare >::value &&_Alloc_traits::_S_always_equal())
- multimap (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator > multimap (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- template<typename _InputIterator > multimap (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator > multimap (_InputIterator __first, _InputIterator __last, const _Compare &__comp, const allocator_type &__a=allocator_type())
- ~multimap ()=default
- iterator begin () noexcept
- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept

- template<typename... _Args>
  iterator emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_compare key_comp () const
- size_type max_size () const noexcept
- multimap & operator= (const multimap &)=default
- multimap & operator= (multimap &&)=default
- multimap & operator= (initializer_list< value_type > __l)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- size_type size () const noexcept
- void swap (multimap &__x) noexcept(/*conditional */)
- value_compare value_comp () const

- iterator insert (const value_type &__x)
- iterator insert (value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair >::value, iterator > insert (_Pair &&__x)

- iterator insert (const_iterator __position, const value_type &__x)
- iterator insert (const_iterator __position, value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair && >::value, iterator > insert (const_iterator __position, _Pair &&__x)

- iterator erase (const_iterator __position)
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (iterator __position)

- iterator find (const key_type &__x)
- template<typename _Kt >
  auto find (const _Kt &__x) -> decltype(_M_t._M_find_tr(__x))

- const_iterator find (const key_type &__x) const
- template<typename _Kt >
  auto find (const _Kt &__x) const -> decltype(_M_t._M_find_tr(__x))

- size_type count (const key_type &__x) const
- template<typename _Kt >
  auto count (const _Kt &__x) const -> decltype(_M_t._M_count_tr(__x))

- iterator lower_bound (const key_type &__x)
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x)))

- const_iterator lower_bound (const key_type &__x) const
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x)))

- iterator upper_bound (const key_type &__x)
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))

- const_iterator upper_bound (const key_type &__x) const
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) const -> decltype(const_iterator(_M_t._M_upper_bound_tr(__x)))

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- template<typename _Kt >
  auto equal_range (const _Kt &__x) -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))

- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const
- template<typename _Kt >
  auto equal_range (const _Kt &__x) const -> decltype(pair< const_iterator, const_iterator >(_M_t._M_equal_range_tr(__x)))

Friends

- template<typename _K1 , typename _T1 , typename _C1 , typename _A1 >
  bool **operator**< (const multimap< _K1, _T1, _C1, _A1 > &, const multimap< _K1, _T1, _C1, _A1 > &)
- template<typename _K1 , typename _T1 , typename _C1 , typename _A1 >
  bool **operator==** (const multimap< _K1, _T1, _C1, _A1 > &, const multimap< _K1, _T1, _C1, _A1 > &)

4.724.1 Detailed Description

template<typename _Key, typename _Tp, typename _Compare, typename _Alloc>class std::multimap< _Key, _Tp, _Compare, _Alloc >

A standard container made up of (key,value) pairs, which can be retrieved based on a key, in logarithmic time.

Template Parameters

_Key	Type of key objects.

_Tp	Type of mapped objects.
_Compare	Comparison function object type, defaults to less<_Key>.
_Alloc	Allocator type, defaults to allocator<pair<const _Key, _Tp>>.

Meets the requirements of a container, a reversible container, and an associative container (using equivalent keys). For a multimap<Key,T> the key_type is Key, the mapped_type is T, and the value_type is std::pair<const Key,T>.

Multimaps support bidirectional iterators.

The private tree data is declared exactly the same way for map and multimap; the distinction is made entirely in how the tree functions are called (*_unique versus *_equal, same as the standard).

Definition at line 72 of file stl_map.h.

4.724.2 Constructor & Destructor Documentation

4.724.2.1 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap ( ) [default]

Default constructor creates no elements.

4.724.2.2 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (const _Compare & *__comp*, const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Creates a multimap with no elements.

Parameters

__comp	A comparison object.
__a	An allocator object.

Definition at line 191 of file stl_multimap.h.

4.724.2.3 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (const multimap< _Key, _Tp, _Compare, _Alloc > &) [default]

Multimap copy constructor.

Whether the allocator is copied depends on the allocator traits.

4.724.2.4 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (multimap< _Key, _Tp, _Compare, _Alloc > &&) [default]

Multimap move constructor.

The newly-created multimap contains the exact contents of the moved instance. The moved instance is a valid, but unspecified multimap.

4.724.2.5 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (initializer_list< value_type > *__l*, const _Compare & *__comp* = _Compare(), const allocator_type & *__a* = allocator_type()) [inline]

Builds a multimap from an initializer_list.

Parameters

__l	An initializer_list.
__comp	A comparison functor.
__a	An allocator object.

Create a multimap consisting of copies of the elements from the initializer_list. This is linear in N if the list is already sorted, and NlogN otherwise (where N is *__l.size()*).

Definition at line 225 of file stl_multimap.h.

4.724.2.6 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (const allocator_type & *__a*) [inline], [explicit]

Allocator-extended default constructor.

Definition at line 233 of file stl_multimap.h.

4.724.2.7 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (const multimap< _Key, _Tp, _Compare, _Alloc > & *__m,* const allocator_type & *__a*) [inline]

Allocator-extended copy constructor.

Definition at line 237 of file stl_multimap.h.

4.724.2.8 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (multimap< _Key, _Tp, _Compare, _Alloc > && *__m,* const allocator_type & *__a*) [inline], [noexcept]

Allocator-extended move constructor.

Definition at line 241 of file stl_multimap.h.

4.724.2.9 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (initializer_list< value_type > *__l,* const allocator_type & *__a*) [inline]

Allocator-extended initialier-list constructor.

Definition at line 247 of file stl_multimap.h.

4.724.2.10 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _InputIterator > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (_InputIterator *__first,* _InputIterator *__last,* const allocator_type & *__a*) [inline]

Allocator-extended range constructor.

Definition at line 253 of file stl_multimap.h.

4.724.2.11 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _InputIterator > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (_InputIterator *__first,* _InputIterator *__last*) [inline]

Builds a multimap from a range.

Parameters

__first	An input iterator.
__last	An input iterator.

Create a multimap consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 269 of file stl_multimap.h.

4.724.2.12 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _InputIterator > std::multimap< _Key, _Tp, _Compare, _Alloc >::multimap (_InputIterator __first, _InputIterator __last, const _Compare & __comp, const allocator_type & __a = allocator_type()) [inline]

Builds a multimap from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__comp	A comparison functor.
__a	An allocator object.

Create a multimap consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 285 of file stl_multimap.h.

4.724.2.13 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::multimap< _Key, _Tp, _Compare, _Alloc >::~multimap ( ) [default]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.724.3 Member Function Documentation

4.724.3.1 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 351 of file stl_multimap.h.

4.724.3.2 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 360 of file stl_multimap.h.

4.724.3.3 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 424 of file stl_multimap.h.

4.724.3.4 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 433 of file stl_multimap.h.

4.724.3.5 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > void std::multimap< _Key, _Tp, _Compare, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in a multimap. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 808 of file stl_multimap.h.

4.724.3.6 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > size_type std::multimap< _Key, _Tp, _Compare, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements with given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Number of elements with specified key.

Definition at line 885 of file stl_multimap.h.

4.724.3.7 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::count (const _Kt & __x) const -> decltype(_M_t._M_count_tr(__x)) [inline]

Finds the number of elements with given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Number of elements with specified key.

Definition at line 891 of file stl_multimap.h.

4.724.3.8 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 442 of file stl_multimap.h.

4.724.3.9 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 451 of file stl_multimap.h.

4.724.3.10 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename... _Args> iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::emplace (_Args &&... *__args*) [inline]

Build and insert a std::pair into the multimap.

Parameters

__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the inserted (key,value) pair.

This function builds and inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted.

Insertion requires logarithmic time.

Definition at line 491 of file stl_multimap.h.

4.724.3.11 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename... _Args> iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::emplace_hint (const_iterator *__pos*, _Args &&... *__args*) [inline]

Builds and inserts a std::pair into the multimap.

Parameters

__pos	An iterator that serves as a hint as to where the pair should be inserted.
__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 518 of file stl_multimap.h.

4.724.3.12 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > bool std::multimap< _Key, _Tp, _Compare, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the multimap is empty.

Definition at line 458 of file stl_multimap.h.

4.724.3.13 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 369 of file stl_multimap.h.

4.724.3.14 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last pair in the multimap. Iteration is done in ascending order according to the keys.

Definition at line 378 of file stl_multimap.h.

4.724.3.15 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::pair<iterator, iterator> std::multimap< _Key, _Tp, _Compare, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

Definition at line 1020 of file stl_multimap.h.

4.724.3.16 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::equal_range (const _Kt & __x) -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

Definition at line 1026 of file stl_multimap.h.

4.724.3.17 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > std::pair<const_iterator, const_iterator> std::multimap< _Key, _Tp, _Compare, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of read-only (constant) iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

Definition at line 1047 of file stl_multimap.h.

4.724.3.18 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::equal_range (const _Kt & *__x*) const -> decltype(pair<const_iterator, const_iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key of (key, value) pairs to be located.

Returns

Pair of read-only (constant) iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

Definition at line 1053 of file stl_multimap.h.

4.724.3.19 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from a multimap.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 702 of file stl_multimap.h.

4.724.3.20 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > _GLIBCXX_ABI_TAG_CXX11 iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from a multimap.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 708 of file stl_multimap.h.

4.724.3.21 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > size_type std::multimap< _Key, _Tp, _Compare, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all elements located by the given key from a multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 739 of file stl_multimap.h.

4.724.3.22 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::erase (const_iterator *__first*, const_iterator *__last*) [inline]

Erases a [first,last) range of elements from a multimap.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased .

Returns

The iterator *__last*.

This function erases a sequence of elements from a multimap. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 760 of file stl_multimap.h.

4.724.3.23 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::find (const key_type & *__x*) [inline]

Tries to locate an element in a multimap.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 843 of file stl_multimap.h.

4.724.3.24 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::find (const _Kt & *__x*) -> decltype(_M_t._M_find_tr(__x)) [inline]

Tries to locate an element in a multimap.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 849 of file stl_multimap.h.

4.724.3.25 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::find (const key_type & *__x*) const [inline]

Tries to locate an element in a multimap.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns a constant iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 867 of file stl_multimap.h.

4.724.3.26 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::find (const _Kt & *__x*) const -> decltype(_M_t._M_find_tr(__x)) [inline]

Tries to locate an element in a multimap.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns a constant iterator pointing to the sought after pair. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 873 of file stl_multimap.h.

4.724.3.27 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > allocator_type std::multimap< _Key, _Tp, _Compare, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Get a copy of the memory allocation object.

Definition at line 341 of file stl_multimap.h.

4.724.3.28 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (const value_type & *__x*) [inline]

Inserts a std::pair into the multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted.

Insertion requires logarithmic time.

Definition at line 539 of file stl_multimap.h.

Referenced by std::multimap< _Key, _Tp, _Compare, _Alloc >::insert().

4.724.3.29 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (value_type && *__x*) [inline]

Inserts a std::pair into the multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted.

Insertion requires logarithmic time.

Definition at line 546 of file stl_multimap.h.

References std::move().

4.724.3.30 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair>::value, iterator> std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (_Pair && __x) [inline]

Inserts a std::pair into the multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted.

Insertion requires logarithmic time.

Definition at line 551 of file stl_multimap.h.

4.724.3.31 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position,* const value_type & *__x*) [inline]

Inserts a std::pair into the multimap.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 579 of file stl_multimap.h.

4.724.3.32 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position,* value_type && *__x*) [inline]

Inserts a std::pair into the multimap.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 589 of file stl_multimap.h.

References std::move().

4.724.3.33 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair&&>::value, iterator> std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (const_iterator *__position,* _Pair && *__x*) [inline]

Inserts a std::pair into the multimap.

Parameters

__position	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted (key,value) pair.

This function inserts a (key, value) pair into the multimap. Contrary to a std::map the multimap does not rely on unique keys and thus multiple pairs with the same key can be inserted. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 594 of file stl_multimap.h.

4.724.3.34 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _InputIterator > void std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (_InputIterator *__first,* _InputIterator *__last*) [inline]

A template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 613 of file stl_multimap.h.

4.724.3.35 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > void std::multimap< _Key, _Tp, _Compare, _Alloc >::insert (initializer_list< value_type > *__l*) [inline]

Attempts to insert a list of std::pairs into the multimap.

Parameters

__l	A std::initializer_list<value_type> of pairs to be inserted.

Complexity similar to that of the range constructor.

Definition at line 625 of file stl_multimap.h.

References std::multimap< _Key, _Tp, _Compare, _Alloc >::insert().

4.724.3.36 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > key_compare std::multimap< _Key, _Tp, _Compare, _Alloc >::key_comp ( ) const [inline]

Returns the key comparison object out of which the multimap was constructed.

Definition at line 817 of file stl_multimap.h.

4.724.3.37 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::lower_bound (const key_type & __x) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 928 of file stl_multimap.h.

4.724.3.38 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::lower_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 934 of file stl_multimap.h.

4.724.3.39 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::lower_bound (const key_type & __x) const [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful the iterator will point to the next greatest element or, if no such greater element exists, to end().

Definition at line 953 of file stl_multimap.h.

4.724.3.40 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::lower_bound (const _Kt & __x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful the iterator will point to the next greatest element or, if no such greater element exists, to end().

Definition at line 959 of file stl_multimap.h.

4.724.3.41 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > size_type std::multimap< _Key, _Tp, _Compare, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the multimap.

Definition at line 468 of file stl_multimap.h.

4.724.3.42 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > multimap& std::multimap< _Key, _Tp, _Compare, _Alloc >::operator= (const multimap< _Key, _Tp, _Compare, _Alloc > &) [default]

Multimap assignment operator.

Whether the allocator is copied depends on the allocator traits.

4.724.3.43 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > multimap& std::multimap< _Key, _Tp, _Compare, _Alloc >::operator= (multimap< _Key, _Tp, _Compare, _Alloc > &&) [default]

Move assignment operator.

4.724.3.44 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > multimap& std::multimap< _Key, _Tp, _Compare, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Multimap list assignment operator.

Parameters

__l	An initializer_list.

This function fills a multimap with copies of the elements in the initializer list __l.

Note that the assignment completely changes the multimap and that the resulting multimap's size is the same as the number of elements assigned.

Definition at line 332 of file stl_multimap.h.

4.724.3.45 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 387 of file stl_multimap.h.

4.724.3.46 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 396 of file stl_multimap.h.

4.724.3.47 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::rend ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to one before the first pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 405 of file stl_multimap.h.

4.724.3.48 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_reverse_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first pair in the multimap. Iteration is done in descending order according to the keys.

Definition at line 414 of file stl_multimap.h.

4.724.3.49 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > size_type std::multimap< _Key, _Tp, _Compare, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the multimap.

Definition at line 463 of file stl_multimap.h.

4.724.3.50 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > void std::multimap< _Key, _Tp, _Compare, _Alloc >::swap (multimap< _Key, _Tp, _Compare, _Alloc > & __x) [inline], [noexcept]

Swaps data with another multimap.

Parameters

__x	A multimap of the same element and allocator types.

This exchanges the elements between two multimaps in constant time. (It is only swapping a pointer, an integer, and an instance of the `Compare` type (which itself is often stateless and empty), so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(m1,m2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 797 of file stl_multimap.h.

4.724.3.51 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::upper_bound (const key_type & __x) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 973 of file stl_multimap.h.

4.724.3.52 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::upper_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 979 of file stl_multimap.h.

4.724.3.53 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > const_iterator std::multimap< _Key, _Tp, _Compare, _Alloc >::upper_bound (const key_type & __x) const [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first iterator greater than key, or end().

Definition at line 993 of file stl_multimap.h.

4.724.3.54 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > template<typename _Kt > auto std::multimap< _Key, _Tp, _Compare, _Alloc >::upper_bound (const _Kt & __x) const -> decltype(const_iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key of (key, value) pair to be located.

Returns

Read-only (constant) iterator pointing to first iterator greater than key, or end().

Definition at line 999 of file stl_multimap.h.

4.724.3.55 template<typename _Key , typename _Tp , typename _Compare , typename _Alloc > value_compare std::multimap< _Key, _Tp, _Compare, _Alloc >::value_comp ( ) const [inline]

Returns a value comparison object, built from the key comparison object out of which the multimap was constructed.

Definition at line 825 of file stl_multimap.h.

The documentation for this class was generated from the following files:

- stl_map.h
- stl_multimap.h

4.725 std::multiplies< _Tp > Struct Template Reference

Inheritance diagram for std::multiplies< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef _Tp result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x, const _Tp &__y) const

4.725.1 Detailed Description

template<typename _Tp = void>struct std::multiplies< _Tp >

One of the math functors.

Definition at line 153 of file stl_function.h.

4.725.2 Member Typedef Documentation

4.725.2.1 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.725.2.2 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.725.2.3 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.726 std::multiplies< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)*std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)*std::forward< _Up >(__u))

4.726.1 Detailed Description

template<>struct std::multiplies< void >

One of the math functors.

Definition at line 260 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.727 std::multiset< _Key, _Compare, _Alloc > Class Template Reference

Public Types

- typedef _Alloc **allocator_type**
- typedef _Rep_type::const_iterator **const_iterator**
- typedef _Alloc_traits::const_pointer **const_pointer**
- typedef _Alloc_traits::const_reference **const_reference**
- typedef _Rep_type::const_reverse_iterator **const_reverse_iterator**
- typedef _Rep_type::difference_type **difference_type**
- typedef _Rep_type::const_iterator **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Alloc_traits::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef _Rep_type::const_reverse_iterator **reverse_iterator**
- typedef _Rep_type::size_type **size_type**
- typedef _Compare **value_compare**
- typedef _Key **value_type**

Public Member Functions

- multiset ()=default
- multiset (const _Compare &__comp, const allocator_type &__a=allocator_type())
- template<typename _InputIterator >
  multiset (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  multiset (_InputIterator __first, _InputIterator __last, const _Compare &__comp, const allocator_type &__a=allocator_type())
- multiset (const multiset &)=default
- multiset (multiset &&)=default
- multiset (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- multiset (const allocator_type &__a)
- multiset (const multiset &__m, const allocator_type &__a)
- multiset (multiset &&__m, const allocator_type &__a) noexcept(is_nothrow_copy_constructible< _Compare >::value && _Alloc_traits::_S_always_equal())
- multiset (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator >
  multiset (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- ~multiset ()=default
- iterator begin () const noexcept
- iterator cbegin () const noexcept
- iterator cend () const noexcept
- void clear () noexcept
- reverse_iterator crbegin () const noexcept
- reverse_iterator crend () const noexcept

- template<typename... _Args>
  iterator emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () const noexcept
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (const_iterator __position)
- size_type erase (const key_type &__x)
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- iterator insert (const value_type &__x)
- iterator **insert** (value_type &&__x)
- iterator insert (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_compare key_comp () const
- size_type max_size () const noexcept
- multiset & operator= (const multiset &)=default
- multiset & operator= (multiset &&)=default
- multiset & operator= (initializer_list< value_type > __l)
- reverse_iterator rbegin () const noexcept
- reverse_iterator rend () const noexcept
- size_type size () const noexcept
- void swap (multiset &__x) noexcept(/*conditional */)
- value_compare value_comp () const

- size_type count (const key_type &__x) const
- template<typename _Kt >
  auto count (const _Kt &__x) const -> decltype(_M_t._M_count_tr(__x))

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const
- template<typename _Kt >
  auto find (const _Kt &__x) -> decltype(iterator
- template<typename _Kt >
  auto find (const _Kt &__x) const -> decltype(const_iterator

- iterator lower_bound (const key_type &__x)
- const_iterator lower_bound (const key_type &__x) const
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x)))
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) const -> decltype(iterator(_M_t._M_lower_bound_tr(__x)))

- iterator upper_bound (const key_type &__x)
- const_iterator upper_bound (const key_type &__x) const
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))

- template<typename _Kt >
  auto upper_bound (const _Kt &__x) const -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const
- template<typename _Kt >
  auto equal_range (const _Kt &__x) -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))
- template<typename _Kt >
  auto equal_range (const _Kt &__x) const -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))

Friends

- template<typename _K1 , typename _C1 , typename _A1 >
  bool **operator**< (const multiset< _K1, _C1, _A1 > &, const multiset< _K1, _C1, _A1 > &)
- template<typename _K1 , typename _C1 , typename _A1 >
  bool **operator==** (const multiset< _K1, _C1, _A1 > &, const multiset< _K1, _C1, _A1 > &)

4.727.1 Detailed Description

template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>>class std::multiset< _Key, _Compare, _Alloc >

A standard container made up of elements, which can be retrieved in logarithmic time.

Template Parameters

_Key	Type of key objects.
_Compare	Comparison function object type, defaults to less<_Key>.
_Alloc	Allocator type, defaults to allocator<_Key>.

Meets the requirements of a `container`, a `reversible container`, and an `associative container` (using equivalent keys). For a `multiset<Key>` the key_type and value_type are Key.

Multisets support bidirectional iterators.

The private tree data is declared exactly the same way for set and multiset; the distinction is made entirely in how the tree functions are called (*_unique versus *_equal, same as the standard).

Definition at line 96 of file stl_multiset.h.

4.727.2 Constructor & Destructor Documentation

4.727.2.1 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset ( ) [default]

Default constructor creates no elements.

4.727.2.2 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (const _Compare & *__comp*, const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Creates a multiset with no elements.

Parameters

__comp	Comparator to use.
__a	An allocator object.

Definition at line 173 of file stl_multiset.h.

4.727.2.3 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _InputIterator > std::multiset< _Key, _Compare, _Alloc >::multiset (_InputIterator *__first,* _InputIterator *__last*) [inline]

Builds a multiset from a range.

Parameters

__first	An input iterator.
__last	An input iterator.

Create a multiset consisting of copies of the elements from [first,last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 187 of file stl_multiset.h.

4.727.2.4 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _InputIterator > std::multiset< _Key, _Compare, _Alloc >::multiset (_InputIterator *__first,* _InputIterator *__last,* const _Compare & *__comp,* const allocator_type & *__a =* allocator_type()) [inline]

Builds a multiset from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__comp	A comparison functor.
__a	An allocator object.

Create a multiset consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 203 of file stl_multiset.h.

4.727.2.5 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (const multiset< _Key, _Compare, _Alloc > &) [default]

Multiset copy constructor.

Whether the allocator is copied depends on the allocator traits.

4.727.2.6 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (multiset< _Key, _Compare, _Alloc > &&) [default]

Multiset move constructor.

The newly-created multiset contains the exact contents of the moved instance. The moved instance is a valid, but unspecified multiset.

4.727.2.7 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (initializer_list< value_type > __l, const _Compare & __comp = _Compare(), const allocator_type & __a = allocator_type()) [inline]

Builds a multiset from an initializer_list.

Parameters

__l	An initializer_list.
__comp	A comparison functor.
__a	An allocator object.

Create a multiset consisting of copies of the elements from the list. This is linear in N if the list is already sorted, and NlogN otherwise (where N is *__l.size()*).

Definition at line 239 of file stl_multiset.h.

4.727.2.8 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (const allocator_type & *__a*) [inline], [explicit]

Allocator-extended default constructor.

Definition at line 247 of file stl_multiset.h.

4.727.2.9 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (const multiset< _Key, _Compare, _Alloc > & *__m,* const allocator_type & *__a*) [inline]

Allocator-extended copy constructor.

Definition at line 251 of file stl_multiset.h.

4.727.2.10 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (multiset< _Key, _Compare, _Alloc > && *__m,* const allocator_type & *__a*) [inline], [noexcept]

Allocator-extended move constructor.

Definition at line 255 of file stl_multiset.h.

4.727.2.11 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::multiset (initializer_list< value_type > *__l,* const allocator_type & *__a*) [inline]

Allocator-extended initialier-list constructor.

Definition at line 261 of file stl_multiset.h.

4.727.2.12 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _InputIterator > std::multiset< _Key, _Compare, _Alloc >::multiset (_InputIterator *__first,* _InputIterator *__last,* const allocator_type & *__a*) [inline]

Allocator-extended range constructor.

Definition at line 267 of file stl_multiset.h.

4.727.2.13 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::multiset< _Key, _Compare, _Alloc >::~multiset ( ) [default]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.727.3 Member Function Documentation

4.727.3.1 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the multiset. Iteration is done in ascending order according to the keys.

Definition at line 340 of file stl_multiset.h.

4.727.3.2 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the multiset. Iteration is done in ascending order according to the keys.

Definition at line 377 of file stl_multiset.h.

4.727.3.3 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the multiset. Iteration is done in ascending order according to the keys.

Definition at line 386 of file stl_multiset.h.

4.727.3.4 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> void std::multiset< _Key, _Compare, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in a multiset. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 718 of file stl_multiset.h.

4.727.3.5 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> size_type std::multiset< _Key, _Compare, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements with given key.

Parameters

__x	Key of elements to be located.

Returns

Number of elements with specified key.

Definition at line 730 of file stl_multiset.h.

4.727.3.6 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::count (const _Kt & __x) const -> decltype(_M_t._M_count_tr(__x)) [inline]

Finds the number of elements with given key.

Parameters

__x	Key of elements to be located.

Returns

Number of elements with specified key.

Definition at line 736 of file stl_multiset.h.

4.727.3.7 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> reverse_iterator std::multiset< _Key, _Compare, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the multiset. Iteration is done in descending order according to the keys.

Definition at line 395 of file stl_multiset.h.

4.727.3.8 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> reverse_iterator std::multiset< _Key, _Compare, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the multiset. Iteration is done in descending order according to the keys.

Definition at line 404 of file stl_multiset.h.

4.727.3.9 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename... _Args> iterator std::multiset< _Key, _Compare, _Alloc >::emplace (_Args &&... *__args*) [inline]

Builds and inserts an element into the multiset.

Parameters

__args	Arguments used to generate the element instance to be inserted.

Returns

An iterator that points to the inserted element.

This function inserts an element into the multiset. Contrary to a std::set the multiset does not rely on unique keys and thus multiple copies of the same element can be inserted.

Insertion requires logarithmic time.

Definition at line 457 of file stl_multiset.h.

4.727.3.10 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename... _Args> iterator std::multiset< _Key, _Compare, _Alloc >::emplace_hint (const_iterator *__pos,* _Args &&... *__args*) [inline]

Builds and inserts an element into the multiset.

Parameters

__pos	An iterator that serves as a hint as to where the element should be inserted.
__args	Arguments used to generate the element instance to be inserted.

Returns

An iterator that points to the inserted element.

This function inserts an element into the multiset. Contrary to a std::set the multiset does not rely on unique keys and thus multiple copies of the same element can be inserted.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 483 of file stl_multiset.h.

4.727.3.11 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> bool std::multiset< _Key, _Compare, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the set is empty.

Definition at line 410 of file stl_multiset.h.

4.727.3.12 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the multiset. Iteration is done in ascending order according to the keys.

Definition at line 349 of file stl_multiset.h.

4.727.3.13 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::pair<iterator, iterator> std::multiset< _Key, _Compare, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 879 of file stl_multiset.h.

4.727.3.14 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> std::pair<const_iterator, const_iterator> std::multiset< _Key, _Compare, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 883 of file stl_multiset.h.

4.727.3.15 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::equal_range (const _Kt & *__x*) -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 889 of file stl_multiset.h.

4.727.3.16 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::equal_range (const _Kt & *__x*) const -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 895 of file stl_multiset.h.

4.727.3.17 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> _GLIBCXX_ABI_TAG_CXX11 iterator std::multiset< _Key, _Compare, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from a multiset.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a multiset. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 639 of file stl_multiset.h.

4.727.3.18 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> size_type std::multiset< _Key, _Compare, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all elements located by the given key from a multiset. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 669 of file stl_multiset.h.

4.727.3.19 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> _GLIBCXX_ABI_TAG_CXX11 iterator std::multiset< _Key, _Compare, _Alloc >::erase (const_iterator *__first*, const_iterator *__last*) [inline]

Erases a [first,last) range of elements from a multiset.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *last*.

This function erases a sequence of elements from a multiset. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 691 of file stl_multiset.h.

4.727.3.20 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::find (const key_type & __x) [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 775 of file stl_multiset.h.

4.727.3.21 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> const_iterator std::multiset< _Key, _Compare, _Alloc >::find (const key_type & __x) const [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 779 of file stl_multiset.h.

4.727.3.22 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::find (const _Kt & __x) -> decltype(iterator [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 785 of file stl_multiset.h.

4.727.3.23 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::find (const _Kt & __x) const -> decltype(const_iterator [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 791 of file stl_multiset.h.

4.727.3.24 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> allocator_type std::multiset< _Key, _Compare, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the memory allocation object.

Definition at line 331 of file stl_multiset.h.

4.727.3.25 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::insert (const value_type & __x) [inline]

Inserts an element into the multiset.

Parameters

__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

This function inserts an element into the multiset. Contrary to a std::set the multiset does not rely on unique keys and thus multiple copies of the same element can be inserted.

Insertion requires logarithmic time.

Definition at line 502 of file stl_multiset.h.

Referenced by std::multiset< _Key, _Compare, _Alloc >::insert().

4.727.3.26 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::insert (const_iterator *__position,* const value_type & *__x*) [inline]

Inserts an element into the multiset.

Parameters

__position	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

This function inserts an element into the multiset. Contrary to a std::set the multiset does not rely on unique keys and thus multiple copies of the same element can be inserted.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 532 of file stl_multiset.h.

4.727.3.27 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _InputIterator > void std::multiset< _Key, _Compare, _Alloc >::insert (_InputIterator *__first*, _InputIterator *__last*) [inline]

A template function that tries to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 551 of file stl_multiset.h.

4.727.3.28 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> void std::multiset< _Key, _Compare, _Alloc >::insert (initializer_list< value_type > *__l*) [inline]

Attempts to insert a list of elements into the multiset.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 563 of file stl_multiset.h.

References std::multiset< _Key, _Compare, _Alloc >::insert().

4.727.3.29 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> key_compare std::multiset< _Key, _Compare, _Alloc >::key_comp ( ) const [inline]

Returns the comparison object.

Definition at line 323 of file stl_multiset.h.

4.727.3.30 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::lower_bound (const key_type & *__x*) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 810 of file stl_multiset.h.

4.727.3.31 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> const_iterator std::multiset< _Key, _Compare, _Alloc >::lower_bound (const key_type & __x) const [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 814 of file stl_multiset.h.

4.727.3.32 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::lower_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 820 of file stl_multiset.h.

4.727.3.33 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::lower_bound (const _Kt & __x) const -> decltype(iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 826 of file stl_multiset.h.

4.727.3.34 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> size_type std::multiset< _Key, _Compare, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the set.

Definition at line 420 of file stl_multiset.h.

4.727.3.35 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> multiset& std::multiset< _Key, _Compare, _Alloc >::operator= (const multiset< _Key, _Compare, _Alloc > &) [default]

Multiset assignment operator.

Whether the allocator is copied depends on the allocator traits.

4.727.3.36 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> multiset& std::multiset< _Key, _Compare, _Alloc >::operator= (multiset< _Key, _Compare, _Alloc > &&) [default]

Move assignment operator.

4.727.3.37 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> multiset& std::multiset< _Key, _Compare, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Multiset list assignment operator.

Parameters

__l	An initializer_list.

This function fills a multiset with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the multiset and that the resulting multiset's size is the same as the number of elements assigned.

Definition at line 312 of file stl_multiset.h.

4.727.3.38 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> reverse_iterator std::multiset< _Key, _Compare, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the multiset. Iteration is done in descending order according to the keys.

Definition at line 358 of file stl_multiset.h.

4.727.3.39 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> reverse_iterator std::multiset< _Key, _Compare, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the multiset. Iteration is done in descending order according to the keys.

Definition at line 367 of file stl_multiset.h.

4.727.3.40 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> size_type std::multiset< _Key, _Compare, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the set.

Definition at line 415 of file stl_multiset.h.

4.727.3.41 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> void std::multiset< _Key, _Compare, _Alloc >::swap (multiset< _Key, _Compare, _Alloc > & __x) [inline], [noexcept]

Swaps data with another multiset.

Parameters

__x	A multiset of the same element and allocator types.

This exchanges the elements between two multisets in constant time. (It is only swapping a pointer, an integer, and an instance of the `Compare` type (which itself is often stateless and empty), so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(s1,s2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 437 of file stl_multiset.h.

4.727.3.42 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> iterator std::multiset< _Key, _Compare, _Alloc >::upper_bound (const key_type & __x) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 840 of file stl_multiset.h.

4.727.3.43 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> const_iterator std::multiset< _Key, _Compare, _Alloc >::upper_bound (const key_type & __x) const [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 844 of file stl_multiset.h.

4.727.3.44 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::upper_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 850 of file stl_multiset.h.

4.727.3.45 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> template<typename _Kt > auto std::multiset< _Key, _Compare, _Alloc >::upper_bound (const _Kt & __x) const -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 856 of file stl_multiset.h.

4.727.3.46 template<typename _Key, typename _Compare = std::less<_Key>, typename _Alloc = std::allocator<_Key>> value_compare std::multiset< _Key, _Compare, _Alloc >::value_comp ( ) const [inline]

Returns the comparison object.

Definition at line 327 of file stl_multiset.h.

The documentation for this class was generated from the following file:

- stl_multiset.h

4.728 std::__debug::multiset< _Key, _Compare, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::multiset< _Key, _Compare, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**

- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, multiset > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, multiset > **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Compare **value_compare**
- typedef _Key **value_type**

Public Member Functions

- **multiset** (const multiset &)=default
- **multiset** (multiset &&)=default
- **multiset** (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- **multiset** (const allocator_type &__a)
- **multiset** (const multiset &__m, const allocator_type &__a)
- **multiset** (multiset &&__m, const allocator_type &__a) noexcept(noexcept(_Base(std::move(__m._M_base()), _a)))
- **multiset** (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator > **multiset** (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- **multiset** (const _Compare &__comp, const _Allocator &__a=_Allocator())
- template<typename _InputIterator > **multiset** (_InputIterator __first, _InputIterator __last, const _Compare &__comp=_Compare(), const _Allocator &__a=_Allocator())
- **multiset** (const _Base &__x)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept

- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args>
  iterator **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __pos, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- std::pair< iterator, iterator > **equal_range** (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< iterator, iterator > **equal_range** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< const_iterator,
  const_iterator > **equal_range** (const _Kt &__x) const
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __position)
- size_type **erase** (const key_type &__x)
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__x)
- const_iterator **find** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **find** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **find** (const _Kt &__x) const
- iterator **insert** (const value_type &__x)
- iterator **insert** (value_type &&__x)
- iterator **insert** (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- void **insert** (initializer_list< value_type > __l)
- iterator **lower_bound** (const key_type &__x)
- const_iterator **lower_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **lower_bound** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **lower_bound** (const _Kt &__x) const
- multiset & **operator=** (const multiset &)=default
- multiset & **operator=** (multiset &&)=default
- multiset & **operator=** (initializer_list< value_type > __l)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **swap** (multiset &__x) noexcept(/*conditional */)
- iterator **upper_bound** (const key_type &__x)
- const_iterator **upper_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **upper_bound** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **upper_bound** (const _Kt &__x) const

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.728.1 Detailed Description

template<typename _Key, typename _Compare = std::less<_Key>, typename _Allocator = std::allocator<_Key>>class std::__debug::multiset< _Key, _Compare, _Allocator >

Class std::multiset with safety/checking/debug instrumentation.

Definition at line 44 of file multiset.h.

4.728.2 Member Function Documentation

4.728.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.728.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.728.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.728.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.728.2.5 void __gnu_debug::_Safe_sequence< multiset< _Key, _Compare, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.728.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.728.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.728.2.8 void __gnu_debug::_Safe_sequence< multiset< _Key, _Compare, _Allocator > >::_M_transfer_from_if (_Safe_sequence< multiset< _Key, _Compare, _Allocator > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.728.3 Member Data Documentation

4.728.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.728.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.728.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- multiset.h

4.729 __gnu_parallel::multiway_mergesort_exact_tag Struct Reference

Inheritance diagram for __gnu_parallel::multiway_mergesort_exact_tag:

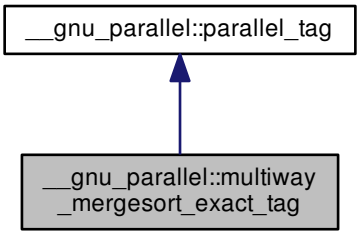

Public Member Functions

- **multiway_mergesort_exact_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.729.1 Detailed Description

Forces parallel sorting using multiway mergesort with exact splitting at compile time.

Definition at line 137 of file tags.h.

4.729.2 Member Function Documentation

4.729.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.729.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.730 __gnu_parallel::multiway_mergesort_sampling_tag Struct Reference

Inheritance diagram for __gnu_parallel::multiway_mergesort_sampling_tag:

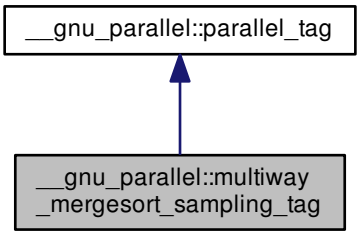

Public Member Functions

- **multiway_mergesort_sampling_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.730.1 Detailed Description

Forces parallel sorting using multiway mergesort with splitting by sampling at compile time.

Definition at line 146 of file tags.h.

4.730.2 Member Function Documentation

4.730.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline],[inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.730.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.731 __gnu_parallel::multiway_mergesort_tag Struct Reference

Inheritance diagram for __gnu_parallel::multiway_mergesort_tag:

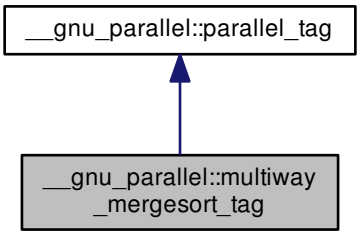

Public Member Functions

- **multiway_mergesort_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.731.1 Detailed Description

Forces parallel sorting using multiway mergesort at compile time.

Definition at line 128 of file tags.h.

4.731.2 Member Function Documentation

4.731.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.731.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.732 std::mutex Class Reference

Inherits std::__mutex_base.

Public Types

- typedef __native_type * **native_handle_type**

Public Member Functions

- **mutex** (const mutex &)=delete
- void **lock** ()
- native_handle_type **native_handle** () noexcept
- mutex & **operator=** (const mutex &)=delete
- bool **try_lock** () noexcept
- void **unlock** ()

Private Types

- typedef __gthread_mutex_t **__native_type**

Private Attributes

- __native_type **_M_mutex**

4.732.1 Detailed Description

The standard mutex type.

Definition at line 83 of file std_mutex.h.

The documentation for this class was generated from the following file:

- std_mutex.h

4.733 std::negate< _Tp > Struct Template Reference

Inheritance diagram for std::negate< _Tp >:



Public Types

- typedef _Tp argument_type
- typedef _Tp result_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x) const

4.733.1 Detailed Description

template<typename _Tp = void>struct std::negate< _Tp >

One of the math functors.

Definition at line 162 of file stl_function.h.

4.733.2 Member Typedef Documentation

4.733.2.1 typedef _Tp std::unary_function< _Tp , _Tp >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.733.2.2 typedef _Tp std::unary_function< _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.734 std::negate< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp >
  constexpr auto **operator()** (_Tp &&__t) const noexcept(noexcept(-std::forward< _Tp >(__t))) -> decltype(-std::forward< _Tp >(__t))

4.734.1 Detailed Description

template<>struct std::negate< void >

One of the math functors.

Definition at line 305 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.735 std::negative_binomial_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- **negative_binomial_distribution** (_IntType __k, double __p=0.5)
- **negative_binomial_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _IntType k () const
- result_type max () const
- result_type min () const

- template<typename _UniformRandomNumberGenerator >
  negative_binomial_distribution
  < _IntType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  negative_binomial_distribution
  < _IntType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- double p () const
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::negative_binomial_-
  distribution< _IntType1 > &__x)
- bool operator== (const negative_binomial_distribution &__d1, const negative_binomial_distribution &__d2)
- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::negative_binomial_distribution< _-
  IntType1 > &__x)

4.735.1 Detailed Description

template<typename _IntType = int>class std::negative_binomial_distribution< _IntType >

A negative_binomial_distribution random number distribution.

The formula for the negative binomial probability mass function is $p(i) = \binom{n}{i} p^i (1-p)^{t-i}$ where t and p are the parameters of the distribution.

Definition at line 4179 of file random.h.

4.735.2 Member Typedef Documentation

4.735.2.1 template<typename _IntType = int> typedef _IntType std::negative_binomial_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 4182 of file random.h.

4.735.3 Member Function Documentation

4.735.3.1 template<typename _IntType = int> _IntType std::negative_binomial_distribution< _IntType >::k ( ) const [inline]

Return the k parameter of the distribution.

Definition at line 4246 of file random.h.

4.735.3.2 template<typename _IntType = int> result_type std::negative_binomial_distribution< _IntType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 4282 of file random.h.

References std::numeric_limits< _Tp >::max().

4.735.3.3 template<typename _IntType = int> result_type std::negative_binomial_distribution< _IntType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 4275 of file random.h.

4.735.3.4 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::negative_binomial_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*)

Generating functions.

4.735.3.5 template<typename _IntType = int> double std::negative_binomial_distribution< _IntType >::p ( ) const [inline]

Return the p parameter of the distribution.

Definition at line 4253 of file random.h.

4.735.3.6 template<typename _IntType = int> param_type std::negative_binomial_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 4260 of file random.h.

4.735.3.7 template<typename _IntType = int> void std::negative_binomial_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 4268 of file random.h.

4.735.3.8 template<typename _IntType = int> void std::negative_binomial_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 4239 of file random.h.

References std::gamma_distribution< _RealType >::reset().

4.735.4 Friends And Related Function Documentation

4.735.4.1 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::negative_binomial_distribution< _IntType1 > & *__x*) [friend]

Inserts a negative_binomial_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A negative_binomial_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.735.4.2 template<typename _IntType = int> bool operator== (const negative_binomial_distribution< _IntType > & *__d1*, const negative_binomial_distribution< _IntType > & *__d2*) [friend]

Return true if two negative binomial distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 4331 of file random.h.

4.735.4.3 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::negative_binomial_distribution< _IntType1 > & *__x*) [friend]

Extracts a negative_binomial_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A negative_binomial_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.736 std::nested_exception Class Reference

Public Member Functions

- **nested_exception** (const nested_exception &) noexcept=default
- exception_ptr **nested_ptr** () const noexcept
- nested_exception & **operator=** (const nested_exception &) noexcept=default
- void **rethrow_nested** () const

4.736.1 Detailed Description

Exception class with exception_ptr data member.

Definition at line 52 of file nested_exception.h.

The documentation for this class was generated from the following file:

- nested_exception.h

4.737 __gnu_cxx::limit_condition::never_adjustor Struct Reference

Inherits __gnu_cxx::limit_condition::adjustor_base.

4.737.1 Detailed Description

Never enter the condition.

Definition at line 434 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.738 __gnu_cxx::random_condition::never_adjustor Struct Reference

Inherits __gnu_cxx::random_condition::adjustor_base.

4.738.1 Detailed Description

Never enter the condition.

Definition at line 515 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.739 __gnu_cxx::new_allocator< _Tp > Class Template Reference

Inheritance diagram for __gnu_cxx::new_allocator< _Tp >:

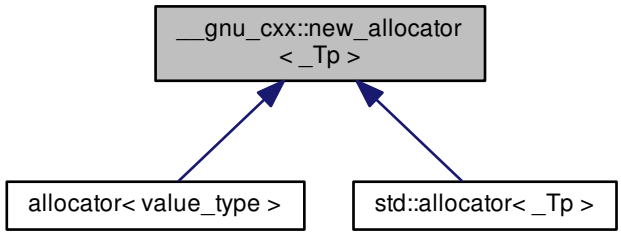

Public Types

- typedef const _Tp * **const_pointer**
- typedef const _Tp & **const_reference**

- typedef std::ptrdiff_t **difference_type**
- typedef _Tp * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef _Tp & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **new_allocator** (const new_allocator &) noexcept
- template<typename _Tp1 >
  constexpr **new_allocator** (const new_allocator< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- _Tp * **allocate** (size_type __n, const void *=static_cast< const void * >(0))
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args) noexcept(std::is_nothrow_constructible< _Up, _Args...>::value)
- void **deallocate** (_Tp *__p, size_type __t)
- template<typename _Up >
  void **destroy** (_Up *__p) noexcept(std::is_nothrow_destructible< _Up >::value)
- size_type **max_size** () const noexcept

Friends

- template<typename _Up >
  constexpr bool **operator!=** (const new_allocator &, const new_allocator< _Up > &) noexcept
- template<typename _Up >
  constexpr bool **operator==** (const new_allocator &, const new_allocator< _Up > &) noexcept

4.739.1 Detailed Description

template<typename _Tp>class __gnu_cxx::new_allocator< _Tp >

An allocator that uses global new, as per [20.4].

This is precisely the allocator defined in the C++ Standard.

- all allocation calls operator new
- all deallocation calls operator delete

Template Parameters

_Tp	Type of allocated object.

Definition at line 55 of file new_allocator.h.

The documentation for this class was generated from the following file:

- new_allocator.h

4.740 __gnu_pbds::detail::no_throw_copies< Key, Mapped > Struct Template Reference

Public Types

- typedef integral_constant< int, __simple > **indicator**

Static Public Attributes

- static const bool **__simple**

4.740.1 Detailed Description

template<typename Key, typename Mapped>struct __gnu_pbds::detail::no_throw_copies< Key, Mapped >

Primary template.

Definition at line 61 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.741 __gnu_pbds::detail::no_throw_copies< Key, null_type > Struct Template Reference

Public Types

- typedef integral_constant< int, is_simple< Key >::value > **indicator**

4.741.1 Detailed Description

template<typename Key>struct __gnu_pbds::detail::no_throw_copies< Key, null_type >

Specialization.

Definition at line 70 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.742 std::normal_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- normal_distribution (result_type __mean, result_type __stddev=result_type(1))
- **normal_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- _RealType mean () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  normal_distribution< _RealType >
  ::result_type operator() (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()
- _RealType stddev () const

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::normal_distribution< _RealType1 > &__x)
- template<typename _RealType1 >
  bool operator== (const std::normal_distribution< _RealType1 > &__d1, const std::normal_distribution< _RealType1 > &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::normal_distribution< _RealType1 > &__x)

4.742.1 Detailed Description

template<typename _RealType = double>class std::normal_distribution< _RealType >

A normal continuous distribution for random numbers.

The formula for the normal probability density function is

$$p(x|\mu,\sigma) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{x-\mu^2}{2\sigma^2}}$$

Definition at line 1961 of file random.h.

4.742.2 Member Typedef Documentation

4.742.2.1 template<typename _RealType = double> typedef _RealType std::normal_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 1964 of file random.h.

4.742.3 Constructor & Destructor Documentation

4.742.3.1 template<typename _RealType = double> std::normal_distribution< _RealType >::normal_distribution (result_type *__mean,* result_type *__stddev* = result_type (1)) [inline], [explicit]

Constructs a normal distribution with parameters $mean$ and standard deviation.

Definition at line 2014 of file random.h.

4.742.4 Member Function Documentation

4.742.4.1 template<typename _RealType = double> result_type std::normal_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 2071 of file random.h.

4.742.4.2 template<typename _RealType = double> _RealType std::normal_distribution< _RealType >::mean ( ) const [inline]

Returns the mean of the distribution.

Definition at line 2035 of file random.h.

4.742.4.3 template<typename _RealType = double> result_type std::normal_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 2064 of file random.h.

4.742.4.4 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > normal_distribution<_RealType>::result_type std::normal_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng,* const param_type & *__param*)

Polar method due to Marsaglia.

Devroye, L. Non-Uniform Random Variates Generation. Springer-Verlag, New York, 1986, Ch. V, Sect. 4.4.

Definition at line 1770 of file bits/random.tcc.

References std::log(), and std::sqrt().

4.742.4.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::normal_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 2079 of file random.h.

Referenced by std::normal_distribution< result_type >::operator()().

4.742.4.6 template<typename _RealType = double> param_type std::normal_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 2049 of file random.h.

4.742.4.7 template<typename _RealType = double> void std::normal_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 2057 of file random.h.

4.742.4.8 template<typename _RealType = double> void std::normal_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 2028 of file random.h.

Referenced by std::lognormal_distribution< _RealType >::reset(), std::gamma_distribution< result_type >::reset(), std::student_t_distribution< _RealType >::reset(), std::binomial_distribution< _IntType >::reset(), and std::poisson_distribution< _IntType >::reset().

4.742.4.9 template<typename _RealType = double> _RealType std::normal_distribution< _RealType >::stddev ( ) const [inline]

Returns the standard deviation of the distribution.

Definition at line 2042 of file random.h.

4.742.5 Friends And Related Function Documentation

4.742.5.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::normal_distribution< _RealType1 > & *__x*) [friend]

Inserts a normal_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A normal_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.742.5.2 template<typename _RealType = double> template<typename _RealType1 > bool operator== (const std::normal_distribution< _RealType1 > & *__d1,* const std::normal_distribution< _RealType1 > & *__d2*) [friend]

Return true if two normal distributions have the same parameters and the sequences that would be generated are equal.

4.742.5.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::normal_distribution< _RealType1 > & *__x*) [friend]

Extracts a normal_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A normal_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.743 std::not_equal_to< _Tp > Struct Template Reference

Inheritance diagram for std::not_equal_to< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr bool **operator()** (const _Tp &__x, const _Tp &__y) const

4.743.1 Detailed Description

template<typename _Tp = void>struct std::not_equal_to< _Tp >

One of the comparison functors.

Definition at line 334 of file stl_function.h.

4.743.2 Member Typedef Documentation

4.743.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.743.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.743.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.744 std::not_equal_to< void > Struct Template Reference

Public Types

- typedef __is_transparent **is_transparent**

Public Member Functions

- template<typename _Tp , typename _Up >
  constexpr auto **operator()** (_Tp &&__t, _Up &&__u) const noexcept(noexcept(std::forward< _Tp >(__t)!=std::forward< _Up >(__u))) -> decltype(std::forward< _Tp >(__t)!=std::forward< _Up >(__u))

4.744.1 Detailed Description

template<>struct std::not_equal_to< void >

One of the comparison functors.

Definition at line 502 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.745 __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 > Struct Template Reference

Inheritance diagram for __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 >:



4.745.1 Detailed Description

template<typename _Tp1, typename _Tp2, typename _Tp3, typename _Tp4>struct __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 >

A null node updator, indicating that no node updates are required.

Definition at line 214 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.746 __gnu_pbds::null_type Struct Reference

Inheritance diagram for __gnu_pbds::null_type:



4.746.1 Detailed Description

Represents no type, or absence of type, for template tricks.

In a mapped-policy, indicates that an associative container is a set.

In a list-update policy, indicates that each link does not need metadata.

In a hash policy, indicates that the combining hash function is actually a ranged hash function.

In a probe policy, indicates that the combining probe function is actually a ranged probe function.

Definition at line 210 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.747 std::experimental::fundamentals_v1::nullopt_t Struct Reference

Public Types

- enum **_Construct** { **_Token** }

Public Member Functions

- constexpr **nullopt_t** (_Construct)

4.747.1 Detailed Description

Tag type to disengage optional objects.

Definition at line 81 of file experimental/optional.

The documentation for this struct was generated from the following file:

- experimental/optional

4.748 std::num_get< _CharT, _InIter > Class Template Reference

Inheritance diagram for std::num_get< _CharT, _InIter >:



Public Types

- typedef _CharT char_type
- typedef _InIter iter_type

Public Member Functions

- num_get (size_t __refs=0)
- template<typename _ValueT >
  _GLIBCXX_DEFAULT_ABI_TAG _InIter **_M_extract_int** (_InIter __beg, _InIter __end, ios_base &__io, ios_base::iostate &__err, _ValueT &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, bool &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, void *&__v) const

- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, long &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned short &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned int &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned long &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, long long &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned long long &__v) const

- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, float &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, double &__v) const
- iter_type get (iter_type __in, iter_type __end, ios_base &__io, ios_base::iostate &__err, long double &__v) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~num_get ()
- _GLIBCXX_DEFAULT_ABI_TAG iter_type **_M_extract_float** (iter_type, iter_type, ios_base &, ios_base::iostate &, string &) const
- template<typename _ValueT >
  _GLIBCXX_DEFAULT_ABI_TAG iter_type **_M_extract_int** (iter_type, iter_type, ios_base &, ios_base::iostate &, _ValueT &) const
- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, int >::__type **_M_find** (const _CharT2 *, size_t __len, _CharT2 __c) const
- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  <!__is_char< _CharT2 >
  ::__value, int >::__type **_M_find** (const _CharT2 *__zero, size_t __len, _CharT2 __c) const

- virtual iter_type do_get (iter_type, iter_type, ios_base &, ios_base::iostate &, bool &) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, long &__v) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned short &__v) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned int &__v) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned long &__v) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, long long &__v) const
- virtual iter_type do_get (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, unsigned long long &__v) const
- virtual iter_type do_get (iter_type, iter_type, ios_base &, ios_base::iostate &, float &) const
- virtual iter_type do_get (iter_type, iter_type, ios_base &, ios_base::iostate &, double &) const
- virtual iter_type do_get (iter_type, iter_type, ios_base &, ios_base::iostate &, long double &) const
- virtual iter_type do_get (iter_type, iter_type, ios_base &, ios_base::iostate &, void *&) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.748.1 Detailed Description

template<typename _CharT, typename _InIter>class std::num_get< _CharT, _InIter >

Primary class template num_get.

This facet encapsulates the code to parse and return a number from a string. It is used by the istream numeric extraction operators.

The num_get template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the num_get facet.

Definition at line 1952 of file locale_facets.h.

4.748.2 Member Typedef Documentation

4.748.2.1 template<typename _CharT , typename _InIter > typedef _CharT std::num_get< _CharT, _InIter >::char_type

Public typedefs.

Definition at line 1958 of file locale_facets.h.

4.748.2.2 template<typename _CharT , typename _InIter > typedef _InIter std::num_get< _CharT, _InIter >::iter_type

Public typedefs.

Definition at line 1959 of file locale_facets.h.

4.748.3 Constructor & Destructor Documentation

4.748.3.1 template<typename _CharT , typename _InIter > std::num_get< _CharT, _InIter >::num_get (size_t __*refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 1973 of file locale_facets.h.

4.748.3.2 template<typename _CharT , typename _InIter > virtual std::num_get< _CharT, _InIter >::~num_get ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 2145 of file locale_facets.h.

4.748.4 Member Function Documentation

4.748.4.1 template<typename _CharT , typename _InIter > _InIter std::num_get< _CharT, _InIter >::do_get (iter_type __*beg*, iter_type __*end*, ios_base & __*io*, ios_base::iostate & __*err*, bool & __*v*) const [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 595 of file locale_facets.tcc.

References std::ios_base::_M_getloc(), std::ios_base::boolalpha, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::flags(), and std::ios_base::goodbit.

Referenced by std::num_get< _CharT, _InIter >::get().

4.748.4.2 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* long & *__v*) const [inline], [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2215 of file locale_facets.h.

4.748.4.3 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* unsigned short & *__v*) const [inline], [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2220 of file locale_facets.h.

4.748.4.4 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* unsigned int & *__v*) const [inline], [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2225 of file locale_facets.h.

4.748.4.5 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* unsigned long & *__v*) const [inline], [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2230 of file locale_facets.h.

4.748.4.6 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* long long & *__v*) const [inline],[protected],[virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2236 of file locale_facets.h.

4.748.4.7 template<typename _CharT , typename _InIter > virtual iter_type std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* unsigned long long & *__v*) const [inline],[protected],[virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2241 of file locale_facets.h.

4.748.4.8 template<typename _CharT , typename _InIter > _InIter std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* float & *__v*) const [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 691 of file locale_facets.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::ios_base::eofbit, and std::basic_string< _CharT, _Traits, _Alloc >::reserve().

4.748.4.9 template<typename _CharT , typename _InIter > _InIter std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* double & *__v*) const [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 706 of file locale_facets.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::ios_base::eofbit, and std::basic_string< _CharT, _Traits, _Alloc >::reserve().

4.748.4.10 template<typename _CharT , typename _InIter > _InIter std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* long double & *__v*) const [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 738 of file locale_facets.tcc.

References std::basic_string< _CharT, _Traits, _Alloc >::c_str(), std::ios_base::eofbit, and std::basic_string< _CharT, _Traits, _Alloc >::reserve().

4.748.4.11 template<typename _CharT , typename _InIter > _InIter std::num_get< _CharT, _InIter >::do_get (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* void *& *__v*) const [protected], [virtual]

Numeric parsing.

Parses the input stream into the variable *v*. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__beg	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 753 of file locale_facets.tcc.

References std::ios_base::basefield, std::ios_base::flags(), and std::ios_base::hex.

4.748.4.12 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, bool & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the bool *v*. It does so by calling num_get::do_get().

If ios_base::boolalpha is set, attempts to read ctype<CharT>::truename() or ctype<CharT>::falsename(). Sets *v* to true or false if successful. Sets err to ios_base::failbit if reading the string fails. Sets err to ios_base::eofbit if the stream is emptied.

If ios_base::boolalpha is not set, proceeds as with reading a long, except if the value is 1, sets *v* to true, if the value is 0, sets *v* to false, and otherwise set err to ios_base::failbit.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 1999 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

Referenced by std::basic_istream< _CharT, _Traits >::operator>>().

4.748.4.13 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, long & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2036 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.14 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, unsigned short & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2041 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.15 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, unsigned int & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2046 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.16 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* unsigned long & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2051 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.17 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type __in, iter_type __end, ios_base & __io, ios_base::iostate & __err, long long & __v) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2057 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.18 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type __in, iter_type __end, ios_base & __io, ios_base::iostate & __err, unsigned long long & __v) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

Parsing is affected by the flag settings in *io*.

The basic parse is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, parses like the scanf o specifier. Else if equal to ios_base::hex, parses like X specifier. Else if basefield equal to 0, parses like the i specifier. Otherwise, parses like d for signed and u for unsigned types. The matching type length modifier is also used.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2062 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.19 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, float & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

The input characters are parsed like the scanf g specifier. The matching type length modifier is also used.

The decimal point character used is numpunct::decimal_point(). Digit grouping is interpreted according to numpunct-::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2096 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.20 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, double & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

The input characters are parsed like the scanf g specifier. The matching type length modifier is also used.

The decimal point character used is numpunct::decimal_point(). Digit grouping is interpreted according to numpunct-::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2101 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.21 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, long double & *__v*) const [inline]

Numeric parsing.

Parses the input stream into the integral variable *v*. It does so by calling num_get::do_get().

The input characters are parsed like the scanf g specifier. The matching type length modifier is also used.

The decimal point character used is numpunct::decimal_point(). Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2106 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.4.22 template<typename _CharT , typename _InIter > iter_type std::num_get< _CharT, _InIter >::get (iter_type *__in*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, void *& *__v*) const [inline]

Numeric parsing.

Parses the input stream into the pointer variable *v*. It does so by calling num_get::do_get().

The input characters are parsed like the scanf p specifier.

Digit grouping is interpreted according to numpunct::grouping() and numpunct::thousands_sep(). If the pattern of digit groups isn't consistent, sets err to ios_base::failbit.

Note that the digit grouping effect for pointers is a bit ambiguous in the standard and shouldn't be relied on. See DR 344.

If parsing the string yields a valid value for *v*, *v* is set. Otherwise, sets err to ios_base::failbit and leaves *v* unaltered. Sets err to ios_base::eofbit if the stream is emptied.

Parameters

__in	Start of input stream.
__end	End of input stream.
__io	Source of locale and flags.
__err	Error flags to set.
__v	Value to format and insert.

Returns

Iterator after reading.

Definition at line 2139 of file locale_facets.h.

References std::num_get< _CharT, _InIter >::do_get().

4.748.5 Member Data Documentation

4.748.5.1 template<typename _CharT , typename _InIter > locale::id std::num_get< _CharT, _InIter >::id [static]

Numpunct facet id.

Definition at line 1963 of file locale_facets.h.

The documentation for this class was generated from the following files:

- locale_facets.h
- locale_facets.tcc

4.749 std::num_put< _CharT, _OutIter > Class Template Reference

Inheritance diagram for std::num_put< _CharT, _OutIter >:



Public Types

- typedef _CharT char_type

- typedef _OutIter iter_type

Public Member Functions

- num_put (size_t __refs=0)
- template<typename _ValueT >
  _OutIter **_M_insert_float** (_OutIter __s, ios_base &__io, _CharT __fill, char __mod, _ValueT __v) const
- template<typename _ValueT >
  _OutIter **_M_insert_int** (_OutIter __s, ios_base &__io, _CharT __fill, _ValueT __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, bool __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, const void *__v) const

- iter_type put (iter_type __s, ios_base &__io, char_type __fill, long __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, unsigned long __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, long long __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, unsigned long long __v) const

- iter_type put (iter_type __s, ios_base &__io, char_type __fill, double __v) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, long double __v) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~num_put ()
- void **_M_group_float** (const char *__grouping, size_t __grouping_size, char_type __sep, const char_type *__p, char_type *__new, char_type *__cs, int &__len) const
- void **_M_group_int** (const char *__grouping, size_t __grouping_size, char_type __sep, ios_base &__io, char_type *__new, char_type *__cs, int &__len) const
- template<typename _ValueT >
  iter_type **_M_insert_float** (iter_type, ios_base &__io, char_type __fill, char __mod, _ValueT __v) const
- template<typename _ValueT >
  iter_type **_M_insert_int** (iter_type, ios_base &__io, char_type __fill, _ValueT __v) const
- void **_M_pad** (char_type __fill, streamsize __w, ios_base &__io, char_type *__new, const char_type *__cs, int &__len) const

- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, bool __v) const
- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, long __v) const
- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, unsigned long __v) const
- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, long long __v) const
- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, unsigned long long __v) const
- virtual iter_type do_put (iter_type, ios_base &, char_type, double) const
- virtual iter_type do_put (iter_type, ios_base &, char_type, long double) const
- virtual iter_type do_put (iter_type, ios_base &, char_type, const void *) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.749.1 Detailed Description

template<typename _CharT, typename _OutIter>class std::num_put< _CharT, _OutIter >

Primary class template num_put.

This facet encapsulates the code to convert a number to a string. It is used by the ostream numeric insertion operators.

The num_put template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the num_put facet.

Definition at line 2293 of file locale_facets.h.

4.749.2 Member Typedef Documentation

4.749.2.1 template<typename _CharT , typename _OutIter > typedef _CharT std::num_put< _CharT, _OutIter >::char_type

Public typedefs.

Definition at line 2299 of file locale_facets.h.

4.749.2.2 template<typename _CharT , typename _OutIter > typedef _OutIter std::num_put< _CharT, _OutIter >::iter_type

Public typedefs.

Definition at line 2300 of file locale_facets.h.

4.749.3 Constructor & Destructor Documentation

4.749.3.1 template<typename _CharT , typename _OutIter > std::num_put< _CharT, _OutIter >::num_put (size_t *__refs* = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 2314 of file locale_facets.h.

4.749.3.2 template<typename _CharT , typename _OutIter > virtual std::num_put< _CharT, _OutIter >::~num_put ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 2493 of file locale_facets.h.

4.749.4 Member Function Documentation

4.749.4.1 template<typename _CharT , typename _OutIter > _OutIter std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, bool __v) const [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 1106 of file locale_facets.tcc.

References std::ios_base::_M_getloc(), std::ios_base::adjustfield, std::ios_base::boolalpha, std::ios_base::flags(), std::ios_base::left, and std::ios_base::width().

Referenced by std::num_put< _CharT, _OutIter >::put().

4.749.4.2 template<typename _CharT , typename _OutIter > virtual iter_type std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, long __v) const [inline], [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2513 of file locale_facets.h.

4.749.4.3 template<typename _CharT , typename _OutIter > virtual iter_type std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, unsigned long __v) const [inline], [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2517 of file locale_facets.h.

4.749.4.4 template<typename _CharT , typename _OutIter > virtual iter_type std::num_put< _CharT, _OutIter >::do_put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* long long *__v*) const [inline], [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2523 of file locale_facets.h.

4.749.4.5 template<typename _CharT , typename _OutIter > virtual iter_type std::num_put< _CharT, _OutIter >::do_put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* unsigned long long *__v*) const [inline], [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2528 of file locale_facets.h.

4.749.4.6 template<typename _CharT , typename _OutIter > _OutIter std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, double __v) const [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 1158 of file locale_facets.tcc.

4.749.4.7 template<typename _CharT , typename _OutIter > _OutIter std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, long double __v) const [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 1172 of file locale_facets.tcc.

4.749.4.8 template<typename _CharT , typename _OutIter > _OutIter std::num_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, const void * __v) const [protected], [virtual]

Numeric formatting.

These functions do the work of formatting numeric values and inserting them into a stream. This function is a hook for derived classes to change the value returned.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.

__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 1179 of file locale_facets.tcc.

References std::ios_base::flags(), std::ios_base::hex, and std::ios_base::uppercase.

4.749.4.9 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* bool *__v*) const [inline]

Numeric formatting.

Formats the boolean *v* and inserts it into a stream. It does so by calling num_put::do_put().

If ios_base::boolalpha is set, writes ctype<CharT>::truename() or ctype<CharT>::falsename(). Otherwise formats *v* as an int.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2332 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.10 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* long *__v*) const [inline]

Numeric formatting.

Formats the integral value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, formats like the printf o specifier. Else if equal to ios_base::hex, formats like x or X with ios_base::uppercase unset or set respectively. Otherwise, formats like d, ld, lld for signed and u, lu, llu for unsigned values. Note that if both oct and hex are set, neither will take effect.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showbase is set, '0' precedes octal values (except 0) and '0[xX]' precedes hex values.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2374 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.11 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s*, ios_base & *__io*, char_type *__fill*, unsigned long *__v*) const [inline]

Numeric formatting.

Formats the integral value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, formats like the printf o specifier. Else if equal to ios_base::hex, formats like x or X with ios_base::uppercase unset or set respectively. Otherwise, formats like d, ld, lld for signed and u, lu, llu for unsigned values. Note that if both oct and hex are set, neither will take effect.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showbase is set, '0' precedes octal values (except 0) and '0[xX]' precedes hex values.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2378 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.12 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s*, ios_base & *__io*, char_type *__fill*, long long *__v*) const [inline]

Numeric formatting.

Formats the integral value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, formats like the printf o specifier. Else if equal to ios_base::hex, formats like x or X with ios_base::uppercase unset or set respectively. Otherwise, formats like d, ld, lld for signed and u, lu, llu for unsigned values. Note that if both oct and hex are set, neither will take effect.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showbase is set, '0' precedes octal values (except 0) and '0[xX]' precedes hex values.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base-::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2384 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.13 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* unsigned long long *__v*) const [inline]

Numeric formatting.

Formats the integral value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::basefield. If equal to ios_base::oct, formats like the printf o specifier. Else if equal to ios_base::hex, formats like x or X with ios_base::uppercase unset or set respectively. Otherwise, formats like d, ld, lld for signed and u, lu, llu for unsigned values. Note that if both oct and hex are set, neither will take effect.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showbase is set, '0' precedes octal values (except 0) and '0[xX]' precedes hex values.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base-::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2388 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.14 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* double *__v*) const [inline]

Numeric formatting.

Formats the floating point value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::floatfield. If equal to ios_base::fixed, formats like the printf f specifier. Else if equal to ios_base::scientific, formats like e or E with ios_base::uppercase unset or set respectively. Otherwise, formats like g or G depending on uppercase. Note that if both fixed and scientific are set, the effect will also be like g or G.

The output precision is given by io.precision(). This precision is capped at numeric_limits::digits10 + 2 (different for double and long double). The default precision is 6.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showpoint is set, a decimal point will always be output.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2437 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.15 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* long double *__v*) const [inline]

Numeric formatting.

Formats the floating point value *v* and inserts it into a stream. It does so by calling num_put::do_put().

Formatting is affected by the flag settings in *io*.

The basic format is affected by the value of io.flags() & ios_base::floatfield. If equal to ios_base::fixed, formats like the printf f specifier. Else if equal to ios_base::scientific, formats like e or E with ios_base::uppercase unset or set respectively. Otherwise, formats like g or G depending on uppercase. Note that if both fixed and scientific are set, the effect will also be like g or G.

The output precision is given by io.precision(). This precision is capped at numeric_limits::digits10 + 2 (different for double and long double). The default precision is 6.

If ios_base::showpos is set, '+' is output before positive values. If ios_base::showpoint is set, a decimal point will always be output.

The decimal point character used is numpunct::decimal_point(). Thousands separators are inserted according to numpunct::grouping() and numpunct::thousands_sep().

If io.width() is non-zero, enough *fill* characters are inserted to make the result at least that wide. If (io.flags() & ios_base-::adjustfield) == ios_base::left, result is padded at the end. If ios_base::internal, then padding occurs immediately after either a '+' or '-' or after '0x' or '0X'. Otherwise, padding occurs at the beginning.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2441 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.4.16 template<typename _CharT , typename _OutIter > iter_type std::num_put< _CharT, _OutIter >::put (iter_type *__s,* ios_base & *__io,* char_type *__fill,* const void * *__v*) const [inline]

Numeric formatting.

Formats the pointer value *v* and inserts it into a stream. It does so by calling num_put::do_put().

This function formats *v* as an unsigned long with ios_base::hex and ios_base::showbase set.

Parameters

__s	Stream to write to.
__io	Source of locale and flags.
__fill	Char_type to use for filling.
__v	Value to format and insert.

Returns

Iterator after writing.

Definition at line 2462 of file locale_facets.h.

References std::num_put< _CharT, _OutIter >::do_put().

4.749.5 Member Data Documentation

4.749.5.1 template<typename _CharT , typename _OutIter > locale::id std::num_put< _CharT, _OutIter >::id [static]

Numpunct facet id.

Definition at line 2304 of file locale_facets.h.

The documentation for this class was generated from the following files:

- locale_facets.h
- locale_facets.tcc

4.750 std::numeric_limits< _Tp > Struct Template Reference

Inheritance diagram for std::numeric_limits< _Tp >:

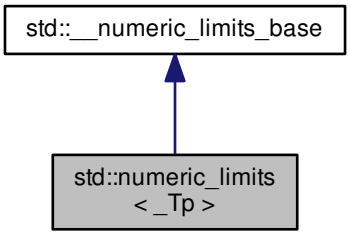

Static Public Member Functions

- static constexpr _Tp denorm_min () noexcept
- static constexpr _Tp epsilon () noexcept
- static constexpr _Tp infinity () noexcept
- static constexpr _Tp lowest () noexcept
- static constexpr _Tp max () noexcept
- static constexpr _Tp min () noexcept
- static constexpr _Tp quiet_NaN () noexcept
- static constexpr _Tp round_error () noexcept
- static constexpr _Tp signaling_NaN () noexcept

Static Public Attributes

- static constexpr int digits
- static constexpr int digits10
- static constexpr float_denorm_style has_denorm
- static constexpr bool has_denorm_loss
- static constexpr bool has_infinity
- static constexpr bool has_quiet_NaN
- static constexpr bool has_signaling_NaN

- static constexpr bool is_bounded
- static constexpr bool is_exact
- static constexpr bool is_iec559
- static constexpr bool is_integer
- static constexpr bool is_modulo
- static constexpr bool is_signed
- static constexpr bool is_specialized
- static constexpr int max_digits10
- static constexpr int max_exponent
- static constexpr int max_exponent10
- static constexpr int min_exponent
- static constexpr int min_exponent10
- static constexpr int radix
- static constexpr float_round_style round_style
- static constexpr bool tinyness_before
- static constexpr bool traps

4.750.1 Detailed Description

template<typename _Tp>struct std::numeric_limits< _Tp >

Properties of fundamental types.

This class allows a program to obtain information about the representation of a fundamental type on a given platform. For non-fundamental types, the functions will return 0 and the data members will all be `false`.

Definition at line 312 of file limits.

4.750.2 Member Function Documentation

4.750.2.1 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::denorm_min ( ) [inline], [static], [noexcept]

The minimum positive denormalized value. For types where `has_denorm` is false, this is the minimum positive normalized value.

Definition at line 357 of file limits.

4.750.2.2 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::epsilon ( ) [inline], [static], [noexcept]

The *machine epsilon:* the difference between 1 and the least value greater than 1 that is representable.

Definition at line 333 of file limits.

Referenced by std::generate_canonical(), std::poisson_distribution< _IntType >::operator()(), and std::binomial_distribution< _IntType >::operator()().

4.750.2.3 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::infinity ( ) [inline], [static], [noexcept]

The representation of positive infinity, if `has_infinity`.

Definition at line 341 of file limits.

4.750.2.4 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::lowest ( ) [inline], [static], [noexcept]

A finite value x such that there is no other finite value y where y < x.

Definition at line 327 of file limits.

Referenced by std::normal_distribution< result_type >::min(), std::cauchy_distribution< _RealType >::min(), std::student_t_distribution< _RealType >::min(), and std::extreme_value_distribution< _RealType >::min().

4.750.2.5 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::max ( ) [inline], [static], [noexcept]

The maximum finite value.

Definition at line 321 of file limits.

Referenced by std::normal_distribution< result_type >::max(), std::lognormal_distribution< _RealType >::max(), std::gamma_distribution< result_type >::max(), std::chi_squared_distribution< _RealType >::max(), std::cauchy_distribution< _RealType >::max(), std::fisher_f_distribution< _RealType >::max(), std::student_t_distribution< _RealType >::max(), std::bernoulli_distribution::max(), std::geometric_distribution< _IntType >::max(), std::negative_binomial_distribution< _IntType >::max(), std::poisson_distribution< _IntType >::max(), std::exponential_distribution< _RealType >::max(), std::weibull_distribution< _RealType >::max(), std::extreme_value_distribution< _RealType >::max(), std::tr2::dynamic_bitset< _WordT, _Alloc >::max_size(), std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::operator()(), std::poisson_distribution< _IntType >::operator()(), and std::binomial_distribution< _IntType >::operator()().

4.750.2.6 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::min ( ) [inline], [static], [noexcept]

The minimum finite value, or for floating types with denormalization, the minimum positive normalized value.

Definition at line 317 of file limits.

Referenced by std::bernoulli_distribution::min(), and std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >::operator()().

4.750.2.7 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::quiet_NaN ( ) [inline], [static], [noexcept]

The representation of a quiet Not a Number, if `has_quiet_NaN`.

Definition at line 346 of file limits.

4.750.2.8 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::round_error ( ) [inline], [static], [noexcept]

The maximum rounding error measurement (see LIA-1).

Definition at line 337 of file limits.

4.750.2.9 template<typename _Tp > static constexpr _Tp std::numeric_limits< _Tp >::signaling_NaN ( ) [inline], [static], [noexcept]

The representation of a signaling Not a Number, if `has_signaling_NaN`.

Definition at line 351 of file limits.

4.750.3 Member Data Documentation

4.750.3.1 constexpr int std::__numeric_limits_base::digits [static], [inherited]

The number of `radix` digits that be represented without change: for integer types, the number of non-sign bits in the mantissa; for floating types, the number of `radix` digits in the mantissa.

Definition at line 211 of file limits.

4.750.3.2 constexpr int std::__numeric_limits_base::digits10 [static], [inherited]

The number of base 10 digits that can be represented without change.

Definition at line 214 of file limits.

4.750.3.3 constexpr float_denorm_style std::__numeric_limits_base::has_denorm [static], [inherited]

See std::float_denorm_style for more information.

Definition at line 266 of file limits.

4.750.3.4 constexpr bool std::__numeric_limits_base::has_denorm_loss [static], [inherited]

True if loss of accuracy is detected as a denormalization loss, rather than as an inexact result.

Definition at line 270 of file limits.

4.750.3.5 constexpr bool std::__numeric_limits_base::has_infinity [static], [inherited]

True if the type has a representation for positive infinity.

Definition at line 255 of file limits.

4.750.3.6 constexpr bool std::__numeric_limits_base::has_quiet_NaN [static], [inherited]

True if the type has a representation for a quiet (non-signaling) Not a Number.

Definition at line 259 of file limits.

4.750.3.7 constexpr bool std::__numeric_limits_base::has_signaling_NaN [static], [inherited]

True if the type has a representation for a signaling Not a Number.

Definition at line 263 of file limits.

4.750.3.8 constexpr bool std::__numeric_limits_base::is_bounded [static], [inherited]

True if the set of values representable by the type is finite. All built-in types are bounded, this member would be false for arbitrary precision types.

Definition at line 279 of file limits.

4.750.3.9 constexpr bool std::__numeric_limits_base::is_exact [static], [inherited]

True if the type uses an exact representation. All integer types are exact, but not all exact types are integer. For example, rational and fixed-exponent representations are exact but not integer.

Definition at line 231 of file limits.

4.750.3.10 constexpr bool std::__numeric_limits_base::is_iec559 [static], [inherited]

True if-and-only-if the type adheres to the IEC 559 standard, also known as IEEE 754. (Only makes sense for floating point types.)

Definition at line 274 of file limits.

4.750.3.11 constexpr bool std::__numeric_limits_base::is_integer [static], [inherited]

True if the type is integer.

Definition at line 226 of file limits.

4.750.3.12 constexpr bool std::__numeric_limits_base::is_modulo [static], [inherited]

True if the type is *modulo*. A type is modulo if, for any operation involving +, -, or $*$ on values of that type whose result would fall outside the range [min(),max()], the value returned differs from the true value by an integer multiple of max() - min() + 1. On most machines, this is false for floating types, true for unsigned integers, and true for signed integers. See PR22200 about signed integers.

Definition at line 288 of file limits.

4.750.3.13 constexpr bool std::__numeric_limits_base::is_signed [static], [inherited]

True if the type is signed.

Definition at line 223 of file limits.

4.750.3.14 constexpr bool std::__numeric_limits_base::is_specialized [static], [inherited]

This will be true for all fundamental types (which have specializations), and false for everything else.

Definition at line 206 of file limits.

4.750.3.15 constexpr int std::__numeric_limits_base::max_digits10 [static], [inherited]

The number of base 10 digits required to ensure that values which differ are always differentiated.

Definition at line 219 of file limits.

4.750.3.16 constexpr int std::__numeric_limits_base::max_exponent [static], [inherited]

The maximum positive integer such that `radix` raised to the power of (one less than that integer) is a representable finite floating point number.

Definition at line 248 of file limits.

4.750.3.17 constexpr int std::__numeric_limits_base::max_exponent10 [static], [inherited]

The maximum positive integer such that 10 raised to that power is in the range of representable finite floating point numbers.

Definition at line 252 of file limits.

4.750.3.18 constexpr int std::__numeric_limits_base::min_exponent [static], [inherited]

The minimum negative integer such that `radix` raised to the power of (one less than that integer) is a normalized floating point number.

Definition at line 239 of file limits.

4.750.3.19 constexpr int std::__numeric_limits_base::min_exponent10 [static], [inherited]

The minimum negative integer such that 10 raised to that power is in the range of normalized floating point numbers.

Definition at line 243 of file limits.

4.750.3.20 constexpr int std::__numeric_limits_base::radix [static], [inherited]

For integer types, specifies the base of the representation. For floating types, specifies the base of the exponent representation.

Definition at line 235 of file limits.

4.750.3.21 constexpr float_round_style std::__numeric_limits_base::round_style [static], [inherited]

See std::float_round_style for more information. This is only meaningful for floating types; integer types will all be round_toward_zero.

Definition at line 299 of file limits.

4.750.3.22 constexpr bool std::__numeric_limits_base::tinyness_before [static], [inherited]

True if tininess is detected before rounding. (see IEC 559)

Definition at line 294 of file limits.

4.750.3.23 constexpr bool std::__numeric_limits_base::traps [static], [inherited]

True if trapping is implemented for this type.

Definition at line 291 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.751 std::numeric_limits< bool > Struct Template Reference

Static Public Member Functions

- static constexpr bool **denorm_min** () noexcept
- static constexpr bool **epsilon** () noexcept
- static constexpr bool **infinity** () noexcept
- static constexpr bool **lowest** () noexcept
- static constexpr bool **max** () noexcept
- static constexpr bool **min** () noexcept
- static constexpr bool **quiet_NaN** () noexcept
- static constexpr bool **round_error** () noexcept
- static constexpr bool **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**

- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.751.1 Detailed Description

template<>struct std::numeric_limits< bool >

numeric_limits<bool> specialization.

Definition at line 384 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.752 std::numeric_limits< char > Struct Template Reference

Static Public Member Functions

- static constexpr char **denorm_min** () noexcept
- static constexpr char **epsilon** () noexcept
- static constexpr char **infinity** () noexcept
- static constexpr char **lowest** () noexcept
- static constexpr char **max** () noexcept
- static constexpr char **min** () noexcept
- static constexpr char **quiet_NaN** () noexcept
- static constexpr char **round_error** () noexcept
- static constexpr char **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**

- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.752.1 Detailed Description

template<>struct std::numeric_limits< char >

numeric_limits<char> specialization.

Definition at line 453 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.753 std::numeric_limits< char16_t > Struct Template Reference

Static Public Member Functions

- static constexpr char16_t **denorm_min** () noexcept
- static constexpr char16_t **epsilon** () noexcept
- static constexpr char16_t **infinity** () noexcept
- static constexpr char16_t **lowest** () noexcept
- static constexpr char16_t **max** () noexcept
- static constexpr char16_t **min** () noexcept
- static constexpr char16_t **quiet_NaN** () noexcept
- static constexpr char16_t **round_error** () noexcept
- static constexpr char16_t **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**

- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.753.1 Detailed Description

template<>struct std::numeric_limits< char16_t >

numeric_limits<char16_t> specialization.

Definition at line 797 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.754 std::numeric_limits< char32_t > Struct Template Reference

Static Public Member Functions

- static constexpr char32_t **denorm_min** () noexcept
- static constexpr char32_t **epsilon** () noexcept
- static constexpr char32_t **infinity** () noexcept
- static constexpr char32_t **lowest** () noexcept
- static constexpr char32_t **max** () noexcept
- static constexpr char32_t **min** () noexcept
- static constexpr char32_t **quiet_NaN** () noexcept
- static constexpr char32_t **round_error** () noexcept
- static constexpr char32_t **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**

- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.754.1 Detailed Description

template<>struct std::numeric_limits< char32_t >

numeric_limits<char32_t> specialization.

Definition at line 858 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.755 std::numeric_limits< double > Struct Template Reference

Static Public Member Functions

- static constexpr double **denorm_min** () noexcept
- static constexpr double **epsilon** () noexcept
- static constexpr double **infinity** () noexcept
- static constexpr double **lowest** () noexcept
- static constexpr double **max** () noexcept
- static constexpr double **min** () noexcept
- static constexpr double **quiet_NaN** () noexcept
- static constexpr double **round_error** () noexcept
- static constexpr double **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**

- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.755.1 Detailed Description

template<>struct std::numeric_limits< double >

numeric_limits<double> specialization.

Definition at line 1735 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.756 std::numeric_limits< float > Struct Template Reference

Static Public Member Functions

- static constexpr float **denorm_min** () noexcept
- static constexpr float **epsilon** () noexcept
- static constexpr float **infinity** () noexcept
- static constexpr float **lowest** () noexcept
- static constexpr float **max** () noexcept
- static constexpr float **min** () noexcept
- static constexpr float **quiet_NaN** () noexcept
- static constexpr float **round_error** () noexcept
- static constexpr float **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.756.1 Detailed Description

template<>struct std::numeric_limits< float >

numeric_limits<float> specialization.

Definition at line 1660 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.757 std::numeric_limits< int > Struct Template Reference

Static Public Member Functions

- static constexpr int **denorm_min** () noexcept
- static constexpr int **epsilon** () noexcept
- static constexpr int **infinity** () noexcept
- static constexpr int **lowest** () noexcept
- static constexpr int **max** () noexcept
- static constexpr int **min** () noexcept
- static constexpr int **quiet_NaN** () noexcept
- static constexpr int **round_error** () noexcept
- static constexpr int **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.757.1 Detailed Description

template<>struct std::numeric_limits< int >

numeric_limits<int> specialization.

Definition at line 1060 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.758 std::numeric_limits< long > Struct Template Reference

Static Public Member Functions

- static constexpr long **denorm_min** () noexcept
- static constexpr long **epsilon** () noexcept
- static constexpr long **infinity** () noexcept
- static constexpr long **lowest** () noexcept
- static constexpr long **max** () noexcept
- static constexpr long **min** () noexcept
- static constexpr long **quiet_NaN** () noexcept
- static constexpr long **round_error** () noexcept
- static constexpr long **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.758.1 Detailed Description

template<><>struct std::numeric_limits< long >

numeric_limits<long> specialization.

Definition at line 1199 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.759 std::numeric_limits< long double > Struct Template Reference

Static Public Member Functions

- static constexpr long double **denorm_min** () noexcept
- static constexpr long double **epsilon** () noexcept
- static constexpr long double **infinity** () noexcept
- static constexpr long double **lowest** () noexcept
- static constexpr long double **max** () noexcept
- static constexpr long double **min** () noexcept
- static constexpr long double **quiet_NaN** () noexcept
- static constexpr long double **round_error** () noexcept
- static constexpr long double **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.759.1 Detailed Description

template<>struct std::numeric_limits< long double >

numeric_limits<long double> specialization.

Definition at line 1810 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.760 std::numeric_limits< long long > Struct Template Reference

Static Public Member Functions

- static constexpr long long **denorm_min** () noexcept
- static constexpr long long **epsilon** () noexcept
- static constexpr long long **infinity** () noexcept
- static constexpr long long **lowest** () noexcept
- static constexpr long long **max** () noexcept
- static constexpr long long **min** () noexcept
- static constexpr long long **quiet_NaN** () noexcept
- static constexpr long long **round_error** () noexcept
- static constexpr long long **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.760.1 Detailed Description

template<>struct std::numeric_limits< long long >

numeric_limits<long long> specialization.

Definition at line 1339 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.761 std::numeric_limits< short > Struct Template Reference

Static Public Member Functions

- static constexpr short **denorm_min** () noexcept
- static constexpr short **epsilon** () noexcept
- static constexpr short **infinity** () noexcept
- static constexpr short **lowest** () noexcept
- static constexpr short **max** () noexcept
- static constexpr short **min** () noexcept
- static constexpr short **quiet_NaN** () noexcept
- static constexpr short **round_error** () noexcept
- static constexpr short **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.761.1 Detailed Description

template<>struct std::numeric_limits< short >

numeric_limits<short> specialization.

Definition at line 920 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.762 std::numeric_limits< signed char > Struct Template Reference

Static Public Member Functions

- static constexpr signed char **denorm_min** () noexcept
- static constexpr signed char **epsilon** () noexcept
- static constexpr signed char **infinity** () noexcept
- static constexpr signed char **lowest** () noexcept
- static constexpr signed char **max** () noexcept
- static constexpr signed char **min** () noexcept
- static constexpr signed char **quiet_NaN** () noexcept
- static constexpr signed char **round_error** () noexcept
- static constexpr signed char **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.762.1 Detailed Description

template<>struct std::numeric_limits< signed char >

numeric_limits<signed char> specialization.

Definition at line 520 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.763 std::numeric_limits< unsigned char > Struct Template Reference

Static Public Member Functions

- static constexpr unsigned char **denorm_min** () noexcept
- static constexpr unsigned char **epsilon** () noexcept
- static constexpr unsigned char **infinity** () noexcept
- static constexpr unsigned char **lowest** () noexcept
- static constexpr unsigned char **max** () noexcept
- static constexpr unsigned char **min** () noexcept
- static constexpr unsigned char **quiet_NaN** () noexcept
- static constexpr unsigned char **round_error** () noexcept
- static constexpr unsigned char **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.763.1 Detailed Description

template<>struct std::numeric_limits< unsigned char >

numeric_limits<unsigned char> specialization.

Definition at line 590 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.764 std::numeric_limits< unsigned int > Struct Template Reference

Static Public Member Functions

- static constexpr unsigned int **denorm_min** () noexcept
- static constexpr unsigned int **epsilon** () noexcept
- static constexpr unsigned int **infinity** () noexcept
- static constexpr unsigned int **lowest** () noexcept
- static constexpr unsigned int **max** () noexcept
- static constexpr unsigned int **min** () noexcept
- static constexpr unsigned int **quiet_NaN** () noexcept
- static constexpr unsigned int **round_error** () noexcept
- static constexpr unsigned int **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.764.1 Detailed Description

template<>struct std::numeric_limits< unsigned int >

numeric_limits<unsigned int> specialization.

Definition at line 1127 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.765 std::numeric_limits< unsigned long > Struct Template Reference

Static Public Member Functions

- static constexpr unsigned long **denorm_min** () noexcept
- static constexpr unsigned long **epsilon** () noexcept
- static constexpr unsigned long **infinity** () noexcept
- static constexpr unsigned long **lowest** () noexcept
- static constexpr unsigned long **max** () noexcept
- static constexpr unsigned long **min** () noexcept
- static constexpr unsigned long **quiet_NaN** () noexcept
- static constexpr unsigned long **round_error** () noexcept
- static constexpr unsigned long **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.765.1 Detailed Description

template<>struct std::numeric_limits< unsigned long >

numeric_limits<unsigned long> specialization.

Definition at line 1266 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.766 std::numeric_limits< unsigned long long > Struct Template Reference

Static Public Member Functions

- static constexpr unsigned long long **denorm_min** () noexcept
- static constexpr unsigned long long **epsilon** () noexcept
- static constexpr unsigned long long **infinity** () noexcept
- static constexpr unsigned long long **lowest** () noexcept
- static constexpr unsigned long long **max** () noexcept
- static constexpr unsigned long long **min** () noexcept
- static constexpr unsigned long long **quiet_NaN** () noexcept
- static constexpr unsigned long long **round_error** () noexcept
- static constexpr unsigned long long **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.766.1 Detailed Description

template<>struct std::numeric_limits< unsigned long long >

numeric_limits<unsigned long long> specialization.

Definition at line 1409 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.767 std::numeric_limits< unsigned short > Struct Template Reference

Static Public Member Functions

- static constexpr unsigned short **denorm_min** () noexcept
- static constexpr unsigned short **epsilon** () noexcept
- static constexpr unsigned short **infinity** () noexcept
- static constexpr unsigned short **lowest** () noexcept
- static constexpr unsigned short **max** () noexcept
- static constexpr unsigned short **min** () noexcept
- static constexpr unsigned short **quiet_NaN** () noexcept
- static constexpr unsigned short **round_error** () noexcept
- static constexpr unsigned short **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.767.1 Detailed Description

template<>struct std::numeric_limits< unsigned short >

numeric_limits<unsigned short> specialization.

Definition at line 987 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.768 std::numeric_limits< wchar_t > Struct Template Reference

Static Public Member Functions

- static constexpr wchar_t **denorm_min** () noexcept
- static constexpr wchar_t **epsilon** () noexcept
- static constexpr wchar_t **infinity** () noexcept
- static constexpr wchar_t **lowest** () noexcept
- static constexpr wchar_t **max** () noexcept
- static constexpr wchar_t **min** () noexcept
- static constexpr wchar_t **quiet_NaN** () noexcept
- static constexpr wchar_t **round_error** () noexcept
- static constexpr wchar_t **signaling_NaN** () noexcept

Static Public Attributes

- static constexpr int **digits**
- static constexpr int **digits10**
- static constexpr float_denorm_style **has_denorm**
- static constexpr bool **has_denorm_loss**
- static constexpr bool **has_infinity**
- static constexpr bool **has_quiet_NaN**
- static constexpr bool **has_signaling_NaN**
- static constexpr bool **is_bounded**
- static constexpr bool **is_exact**
- static constexpr bool **is_iec559**
- static constexpr bool **is_integer**
- static constexpr bool **is_modulo**
- static constexpr bool **is_signed**
- static constexpr bool **is_specialized**
- static constexpr int **max_digits10**
- static constexpr int **max_exponent**
- static constexpr int **max_exponent10**
- static constexpr int **min_exponent**
- static constexpr int **min_exponent10**
- static constexpr int **radix**
- static constexpr float_round_style **round_style**
- static constexpr bool **tinyness_before**
- static constexpr bool **traps**

4.768.1 Detailed Description

template<><>struct std::numeric_limits< wchar_t >

numeric_limits<wchar_t> specialization.

Definition at line 663 of file limits.

The documentation for this struct was generated from the following file:

- limits

4.769 std::numpunct< _CharT > Class Template Reference

Inheritance diagram for std::numpunct< _CharT >:

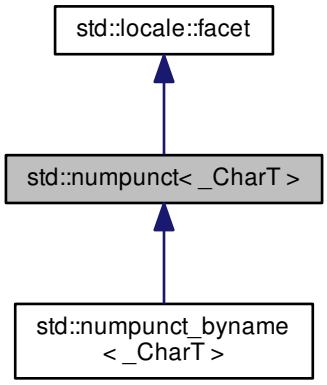

Public Types

- typedef __numpunct_cache< _CharT > **__cache_type**

- typedef _CharT char_type
- typedef basic_string< _CharT > string_type

Public Member Functions

- numpunct (size_t __refs=0)
- numpunct (__cache_type *__cache, size_t __refs=0)
- numpunct (__c_locale __cloc, size_t __refs=0)
- char_type decimal_point () const
- string_type falsename () const
- string grouping () const
- char_type thousands_sep () const
- string_type truename () const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~numpunct ()
- void **_M_initialize_numpunct** (__c_locale __cloc=0)

- template<>
  void **_M_initialize_numpunct** (__c_locale __cloc)
- template<>
  void **_M_initialize_numpunct** (__c_locale __cloc)
- virtual char_type do_decimal_point () const
- virtual string_type do_falsename () const
- virtual string do_grouping () const
- virtual char_type do_thousands_sep () const
- virtual string_type do_truename () const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __cache_type * **_M_data**

4.769.1 Detailed Description

template<typename _CharT>class std::numpunct< _CharT >

Primary class template numpunct.

This facet stores several pieces of information related to printing and scanning numbers, such as the decimal point character. It takes a template parameter specifying the char type. The numpunct facet is used by streams for many I/O operations involving numbers.

The numpunct template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from a numpunct facet.

Definition at line 1670 of file locale_facets.h.

4.769.2 Member Typedef Documentation

4.769.2.1 template<typename _CharT > typedef _CharT std::numpunct< _CharT >::char_type

Public typedefs.

Definition at line 1676 of file locale_facets.h.

4.769.2.2 template<typename _CharT > typedef basic_string<_CharT> std::numpunct< _CharT >::string_type

Public typedefs.

Definition at line 1677 of file locale_facets.h.

4.769.3 Constructor & Destructor Documentation

4.769.3.1 template<typename _CharT > std::numpunct< _CharT >::numpunct (size_t __refs = 0) [inline], [explicit]

Numpunct constructor.

Parameters

__refs	Refcount to pass to the base class.

Definition at line 1694 of file locale_facets.h.

4.769.3.2 template<typename _CharT > std::numpunct< _CharT >::numpunct (__cache_type * __cache, size_t __refs = 0) [inline], [explicit]

Internal constructor. Not for general use.

This is a constructor for use by the library itself to set up the predefined locale facets.

Parameters

__cache	__numpunct_cache object.
__refs	Refcount to pass to the base class.

Definition at line 1708 of file locale_facets.h.

4.769.3.3 template<typename _CharT > std::numpunct< _CharT >::numpunct (__c_locale __cloc, size_t __refs = 0) [inline], [explicit]

Internal constructor. Not for general use.

This is a constructor for use by the library itself to set up new locales.

Parameters

__cloc	The C locale.
__refs	Refcount to pass to the base class.

Definition at line 1722 of file locale_facets.h.

4.769.3.4 template<typename _CharT > virtual std::numpunct< _CharT >::~numpunct ( ) [protected], [virtual]

Destructor.

4.769.4 Member Function Documentation

4.769.4.1 template<typename _CharT > char_type std::numpunct< _CharT >::decimal_point ( ) const [inline]

Return decimal point character.

This function returns a char_type to use as a decimal point. It does so by returning returning numpunct<char_type>::do_decimal_point().

Returns

char_type representing a decimal point.

Definition at line 1736 of file locale_facets.h.

References std::numpunct< _CharT >::do_decimal_point().

4.769.4.2 template<typename _CharT > virtual char_type std::numpunct< _CharT >::do_decimal_point ( ) const [inline], [protected], [virtual]

Return decimal point character.

Returns a char_type to use as a decimal point. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a decimal point.

Definition at line 1823 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::decimal_point().

4.769.4.3 template<typename _CharT > virtual string_type std::numpunct< _CharT >::do_falsename ( ) const [inline], [protected], [virtual]

Return string representation of bool false.

Returns a string_type containing the text representation for false bool variables. This function is a hook for derived classes to change the value returned.

Returns

string_type representing printed form of false.

Definition at line 1874 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::falsename().

4.769.4.4 template<typename _CharT > virtual string std::numpunct< _CharT >::do_grouping ( ) const [inline], [protected], [virtual]

Return grouping specification.

Returns a string representing groupings for the integer part of a number. This function is a hook for derived classes to change the value returned.

See Also

grouping() for details.

Returns

String representing grouping specification.

Definition at line 1848 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::grouping().

4.769.4.5 template<typename _CharT > virtual char_type std::numpunct< _CharT >::do_thousands_sep ( ) const [inline], [protected], [virtual]

Return thousands separator character.

Returns a char_type to use as a thousands separator. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a thousands separator.

Definition at line 1835 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::thousands_sep().

4.769.4.6 template<typename _CharT > virtual string_type std::numpunct< _CharT >::do_truename ( ) const [inline],[protected],[virtual]

Return string representation of bool true.

Returns a string_type containing the text representation for true bool variables. This function is a hook for derived classes to change the value returned.

Returns

string_type representing printed form of true.

Definition at line 1861 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::truename().

4.769.4.7 template<typename _CharT > string_type std::numpunct< _CharT >::falsename ( ) const [inline]

Return string representation of bool false.

This function returns a string_type containing the text representation for false bool variables. It does so by calling numpunct<char_type>::do_falsename().

Returns

string_type representing printed form of false.

Definition at line 1806 of file locale_facets.h.

References std::numpunct< _CharT >::do_falsename().

4.769.4.8 template<typename _CharT > string std::numpunct< _CharT >::grouping ( ) const [inline]

Return grouping specification.

This function returns a string representing groupings for the integer part of a number. Groupings indicate where thousands separators should be inserted in the integer part of a number.

Each char in the return string is interpret as an integer rather than a character. These numbers represent the number of digits in a group. The first char in the string represents the number of digits in the least significant group. If a char is negative, it indicates an unlimited number of digits for the group. If more chars from the string are required to group a number, the last char is used repeatedly.

For example, if the grouping() returns "\003\002" and is applied to the number 123456789, this corresponds to 12,34,56,789. Note that if the string was "32", this would put more than 50 digits into the least significant group if the character set is ASCII.

The string is returned by calling numpunct<char_type>::do_grouping().

Returns

string representing grouping specification.

Definition at line 1780 of file locale_facets.h.

References std::numpunct< _CharT >::do_grouping().

4.769.4.9 template<typename _CharT > char_type std::numpunct< _CharT >::thousands_sep ( ) const [inline]

Return thousands separator character.

This function returns a char_type to use as a thousands separator. It does so by returning returning numpunct<char_type>::do_thousands_sep().

Returns

char_type representing a thousands separator.

Definition at line 1749 of file locale_facets.h.

References std::numpunct< _CharT >::do_thousands_sep().

4.769.4.10 template<typename _CharT > string_type std::numpunct< _CharT >::truename ( ) const [inline]

Return string representation of bool true.

This function returns a string_type containing the text representation for true bool variables. It does so by calling numpunct<char_type>::do_truename().

Returns

string_type representing printed form of true.

Definition at line 1793 of file locale_facets.h.

References std::numpunct< _CharT >::do_truename().

4.769.5 Member Data Documentation

4.769.5.1 template<typename _CharT > locale::id std::numpunct< _CharT >::id [static]

Numpunct facet id.

Definition at line 1686 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.770 std::numpunct_byname< _CharT > Class Template Reference

Inheritance diagram for std::numpunct_byname< _CharT >:

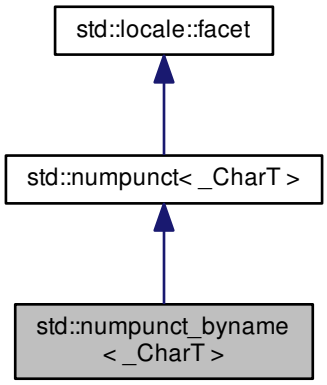

Public Types

- typedef __numpunct_cache< _CharT > **__cache_type**
- typedef _CharT **char_type**
- typedef basic_string< _CharT > **string_type**

Public Member Functions

- **numpunct_byname** (const char *__s, size_t __refs=0)
- **numpunct_byname** (const string &__s, size_t __refs=0)
- char_type decimal_point () const
- string_type falsename () const
- string grouping () const
- char_type thousands_sep () const
- string_type truename () const

Static Public Attributes

- static locale::id id

Protected Member Functions

- void **_M_initialize_numpunct** (__c_locale __cloc=0)
- template<>
  void **_M_initialize_numpunct** (__c_locale __cloc)

- template<>
  void **_M_initialize_numpunct** (__c_locale __cloc)
- virtual char_type do_decimal_point () const
- virtual string_type do_falsename () const
- virtual string do_grouping () const
- virtual char_type do_thousands_sep () const
- virtual string_type do_truename () const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

Protected Attributes

- __cache_type * **_M_data**

4.770.1 Detailed Description

template<typename _CharT>class std::numpunct_byname< _CharT >

class numpunct_byname [22.2.3.2].

Definition at line 1903 of file locale_facets.h.

4.770.2 Member Function Documentation

4.770.2.1 template<typename _CharT > char_type std::numpunct< _CharT >::decimal_point ( ) const [inline], [inherited]

Return decimal point character.

This function returns a char_type to use as a decimal point. It does so by returning returning numpunct<char_type>-::do_decimal_point().

Returns

char_type representing a decimal point.

Definition at line 1736 of file locale_facets.h.

References std::numpunct< _CharT >::do_decimal_point().

4.770.2.2 template<typename _CharT > virtual char_type std::numpunct< _CharT >::do_decimal_point ( ) const [inline], [protected], [virtual], [inherited]

Return decimal point character.

Returns a char_type to use as a decimal point. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a decimal point.

Definition at line 1823 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::decimal_point().

4.770.2.3 template<typename _CharT > virtual string_type std::numpunct< _CharT >::do_falsename ( ) const [inline], [protected], [virtual], [inherited]

Return string representation of bool false.

Returns a string_type containing the text representation for false bool variables. This function is a hook for derived classes to change the value returned.

Returns

string_type representing printed form of false.

Definition at line 1874 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::falsename().

4.770.2.4 template<typename _CharT > virtual string std::numpunct< _CharT >::do_grouping ( ) const [inline], [protected], [virtual], [inherited]

Return grouping specification.

Returns a string representing groupings for the integer part of a number. This function is a hook for derived classes to change the value returned.

See Also

grouping() for details.

Returns

String representing grouping specification.

Definition at line 1848 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::grouping().

4.770.2.5 template<typename _CharT > virtual char_type std::numpunct< _CharT >::do_thousands_sep ( ) const [inline], [protected], [virtual], [inherited]

Return thousands separator character.

Returns a char_type to use as a thousands separator. This function is a hook for derived classes to change the value returned.

Returns

char_type representing a thousands separator.

Definition at line 1835 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::thousands_sep().

4.770.2.6 template<typename _CharT > virtual string_type std::numpunct< _CharT >::do_truename ( ) const [inline], [protected], [virtual], [inherited]

Return string representation of bool true.

Returns a string_type containing the text representation for true bool variables. This function is a hook for derived classes to change the value returned.

Returns

string_type representing printed form of true.

Definition at line 1861 of file locale_facets.h.

Referenced by std::numpunct< _CharT >::truename().

4.770.2.7 template<typename _CharT > string_type std::numpunct< _CharT >::falsename ( ) const [inline], [inherited]

Return string representation of bool false.

This function returns a string_type containing the text representation for false bool variables. It does so by calling numpunct<char_type>::do_falsename().

Returns

string_type representing printed form of false.

Definition at line 1806 of file locale_facets.h.

References std::numpunct< _CharT >::do_falsename().

4.770.2.8 template<typename _CharT > string std::numpunct< _CharT >::grouping ( ) const [inline], [inherited]

Return grouping specification.

This function returns a string representing groupings for the integer part of a number. Groupings indicate where thousands separators should be inserted in the integer part of a number.

Each char in the return string is interpret as an integer rather than a character. These numbers represent the number of digits in a group. The first char in the string represents the number of digits in the least significant group. If a char is negative, it indicates an unlimited number of digits for the group. If more chars from the string are required to group a number, the last char is used repeatedly.

For example, if the grouping() returns "\003\002" and is applied to the number 123456789, this corresponds to 12,34,56,789. Note that if the string was "32", this would put more than 50 digits into the least significant group if the character set is ASCII.

The string is returned by calling numpunct<char_type>::do_grouping().

Returns

string representing grouping specification.

Definition at line 1780 of file locale_facets.h.

References std::numpunct< _CharT >::do_grouping().

4.770.2.9 template<typename _CharT > char_type std::numpunct< _CharT >::thousands_sep ( ) const [inline], [inherited]

Return thousands separator character.

This function returns a char_type to use as a thousands separator. It does so by returning returning numpunct<char_type>::do_thousands_sep().

Returns

char_type representing a thousands separator.

Definition at line 1749 of file locale_facets.h.

References std::numpunct< _CharT >::do_thousands_sep().

4.770.2.10 template<typename _CharT > string_type std::numpunct< _CharT >::truename ( ) const [inline], [inherited]

Return string representation of bool true.

This function returns a string_type containing the text representation for true bool variables. It does so by calling numpunct<char_type>::do_truename().

Returns

string_type representing printed form of true.

Definition at line 1793 of file locale_facets.h.

References std::numpunct< _CharT >::do_truename().

4.770.3 Member Data Documentation

4.770.3.1 template<typename _CharT > locale::id std::numpunct< _CharT >::id [static], [inherited]

Numpunct facet id.

Definition at line 1686 of file locale_facets.h.

The documentation for this class was generated from the following file:

- locale_facets.h

4.771 __gnu_parallel::omp_loop_static_tag Struct Reference

Inheritance diagram for __gnu_parallel::omp_loop_static_tag:

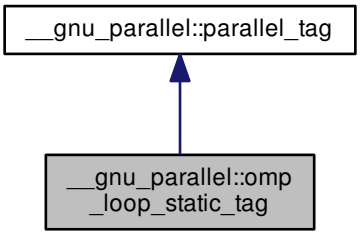

Public Member Functions

- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.771.1 Detailed Description

Recommends parallel execution using OpenMP static load-balancing at compile time.

Definition at line 100 of file tags.h.

4.771.2 Member Function Documentation

4.771.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.771.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.772 __gnu_parallel::omp_loop_tag Struct Reference

Inheritance diagram for __gnu_parallel::omp_loop_tag:

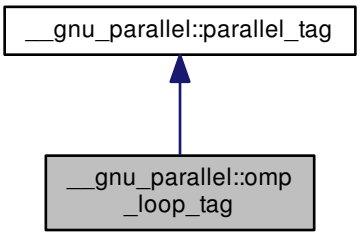

Public Member Functions

- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.772.1 Detailed Description

Recommends parallel execution using OpenMP dynamic load-balancing at compile time.

Definition at line 96 of file tags.h.

4.772.2 Member Function Documentation

4.772.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.772.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.773 std::once_flag Struct Reference

Public Member Functions

- constexpr once_flag () noexcept=default
- once_flag (const once_flag &)=delete
- once_flag & operator= (const once_flag &)=delete

Friends

- template<typename _Callable , typename... _Args>
  void call_once (once_flag &__once, _Callable &&__f, _Args &&...__args)

4.773.1 Detailed Description

Flag type used by std::call_once.

Definition at line 672 of file mutex.

4.773.2 Constructor & Destructor Documentation

4.773.2.1 constexpr std::once_flag::once_flag ( ) [default], [noexcept]

Constructor.

4.773.2.2 std::once_flag::once_flag (const once_flag &) [delete]

Deleted copy constructor.

4.773.3 Member Function Documentation

4.773.3.1 once_flag& std::once_flag::operator= (const once_flag &) [delete]

Deleted assignment operator.

4.773.4 Friends And Related Function Documentation

4.773.4.1 template<typename _Callable , typename... _Args> void call_once (once_flag & *__once*, _Callable && *__f*, _Args &&... *__args*) [friend]

Invoke a callable and synchronize with other calls using the same flag.

Definition at line 712 of file mutex.

The documentation for this struct was generated from the following file:

- mutex

4.774 std::experimental::fundamentals_v1::optional< _Tp > Class Template Reference

Inheritance diagram for std::experimental::fundamentals_v1::optional< _Tp >:

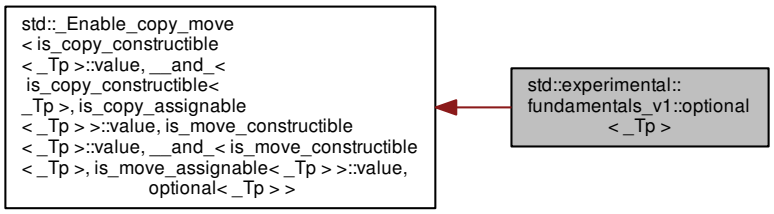

Public Types

- using **value_type** = _Tp

Public Member Functions

- template<typename _Up = _Tp, enable_if_t< __and_< __not_< is_same< optional< _Tp >, decay_t< _Up >>>, is_constructible< _Tp, _Up && >, is_convertible< _Up &&, _Tp > >::value, bool > = true>
  constexpr **optional** (_Up &&__t)
- template<typename _Up = _Tp, enable_if_t< __and_< __not_< is_same< optional< _Tp >, decay_t< _Up >>>, is_constructible< _Tp, _Up && >, __not_< is_convertible< _Up &&, _Tp >> >::value, bool > = false>
  constexpr **optional** (_Up &&__t)
- template<typename _Up , enable_if_t< __and_< __not_< is_same< _Tp, _Up >>, is_constructible< _Tp, const _Up & >, is_convertible< const _Up &, _Tp >, __not_< __converts_from_optional< _Tp, _Up >> >::value, bool > = true>
  constexpr **optional** (const optional< _Up > &__t)
- template<typename _Up , enable_if_t< __and_< __not_< is_same< _Tp, _Up >>, is_constructible< _Tp, const _Up & >, __not_< is_convertible< const _Up &, _Tp >>, __not_< __converts_from_optional< _Tp, _Up >> >::value, bool > = false>
  constexpr **optional** (const optional< _Up > &__t)
- template<typename _Up , enable_if_t< __and_< __not_< is_same< _Tp, _Up >>, is_constructible< _Tp, _Up && >, is_convertible< _Up &&, _Tp >, __not_< __converts_from_optional< _Tp, _Up >> >::value, bool > = true>
  constexpr **optional** (optional< _Up > &&__t)
- template<typename _Up , enable_if_t< __and_< __not_< is_same< _Tp, _Up >>, is_constructible< _Tp, _Up && >, __not_< is_convertible< _Up &&, _Tp >>, __not_< __converts_from_optional< _Tp, _Up >> >::value, bool > = false>
  constexpr **optional** (optional< _Up > &&__t)
- template<typename... _Args>
  enable_if_t< is_constructible
  < _Tp, _Args &&...>::value > **emplace** (_Args &&...__args)

- template<typename _Up , typename... _Args>
  enable_if_t< is_constructible
  < _Tp, initializer_list< _Up >
  &, _Args &&...>::value > **emplace** (initializer_list< _Up > __il, _Args &&...__args)
- constexpr **operator bool** () const noexcept
- constexpr const _Tp & **operator*** () const &
- constexpr _Tp & **operator*** ()&
- constexpr _Tp && **operator*** ()&&
- constexpr const _Tp && **operator*** () const &&
- constexpr const _Tp * **operator->** () const
- _Tp * **operator->** ()
- optional & **operator=** (nullopt_t) noexcept
- template<typename _Up = _Tp>
  enable_if_t< __and_< __not_
  < is_same< optional< _Tp >
  , decay_t< _Up >
  > >, is_constructible< _Tp,
  _Up >, __not_< __and_
  < is_scalar< _Tp >, is_same
  < _Tp, decay_t< _Up >
  > > >, is_assignable< _Tp
  &, _Up > >::value, optional & > **operator=** (_Up &&__u)
- template<typename _Up >
  enable_if_t< __and_< __not_
  < is_same< _Tp, _Up >
  >, is_constructible< _Tp,
  const _Up & >, is_assignable
  < _Tp &, _Up >, __not_
  < __converts_from_optional
  < _Tp, _Up > >, __not_
  < __assigns_from_optional< _Tp,
  _Up > > >::value, optional & > **operator=** (const optional< _Up > &__u)
- template<typename _Up >
  enable_if_t< __and_< __not_
  < is_same< _Tp, _Up >
  >, is_constructible< _Tp, _Up >
  , is_assignable< _Tp &, _Up >
  , __not_
  < __converts_from_optional
  < _Tp, _Up > >, __not_
  < __assigns_from_optional< _Tp,
  _Up > > >::value, optional & > **operator=** (optional< _Up > &&__u)
- void **swap** (optional &__other) noexcept(is_nothrow_move_constructible< _Tp >()&&__is_nothrow_swappable<
  _Tp >::value)
- constexpr const _Tp & **value** () const &
- constexpr _Tp & **value** ()&
- constexpr _Tp && **value** ()&&
- constexpr const _Tp && **value** () const &&
- template<typename _Up >
  constexpr _Tp **value_or** (_Up &&__u) const &
- template<typename _Up >
  _Tp **value_or** (_Up &&__u)&&

4.774.1 Detailed Description

template<typename _Tp>class std::experimental::fundamentals_v1::optional< _Tp >

Class template for optional values.

Definition at line 70 of file experimental/optional.

The documentation for this class was generated from the following file:

- experimental/optional

4.775 std::ostream_iterator< _Tp, _CharT, _Traits > Class Template Reference

Inheritance diagram for std::ostream_iterator< _Tp, _CharT, _Traits >:



Public Types

- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

- typedef _CharT char_type
- typedef _Traits traits_type
- typedef basic_ostream< _CharT, _Traits > ostream_type

Public Member Functions

- ostream_iterator (ostream_type &__s)
- ostream_iterator (ostream_type &__s, const _CharT *__c)
- ostream_iterator (const ostream_iterator &__obj)

- ostream_iterator & **operator*** ()
- ostream_iterator & **operator++** ()
- ostream_iterator & **operator++** (int)
- ostream_iterator & **operator=** (const ostream_iterator &)=default
- ostream_iterator & operator= (const _Tp &__value)

4.775.1 Detailed Description

template<typename _Tp, typename _CharT = char, typename _Traits = char_traits<_CharT>>class std::ostream_iterator< _Tp, _CharT, _Traits >

Provides output iterator semantics for streams.

This class provides an iterator to write to an ostream. The type Tp is the only type written by this iterator and there must be an operator<<(Tp) defined.

Template Parameters

_Tp	The type to write to the ostream.
_CharT	The ostream char_type.
_Traits	The ostream char_traits.

Definition at line 176 of file stream_iterator.h.

4.775.2 Member Typedef Documentation

4.775.2.1 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> typedef _CharT std::ostream_iterator< _Tp, _CharT, _Traits >::char_type

Public typedef.

Definition at line 185 of file stream_iterator.h.

4.775.2.2 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.775.2.3 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.775.2.4 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> typedef basic_ostream<_CharT, _Traits> std::ostream_iterator< _Tp, _CharT, _Traits >::ostream_type

Public typedef.

Definition at line 187 of file stream_iterator.h.

4.775.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.775.2.6 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.775.2.7 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> typedef _Traits std::ostream_iterator< _Tp, _CharT, _Traits >::traits_type

Public typedef.

Definition at line 186 of file stream_iterator.h.

4.775.2.8 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.775.3 Constructor & Destructor Documentation

4.775.3.1 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> std::ostream_iterator< _Tp, _CharT, _Traits >::ostream_iterator (ostream_type & __s) [inline]

Construct from an ostream.

Definition at line 201 of file stream_iterator.h.

4.775.3.2 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> std::ostream_iterator< _Tp, _CharT, _Traits >::ostream_iterator (ostream_type & __s, const _CharT * __c) [inline]

Construct from an ostream.

The delimiter string *c* is written to the stream after every Tp written to the stream. The delimiter is not copied, and thus must not be destroyed while this iterator is in use.

Parameters

__s	Underlying ostream to write to.
__c	CharT delimiter string to insert.

Definition at line 214 of file stream_iterator.h.

4.775.3.3 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> std::ostream_iterator< _Tp, _CharT, _Traits >::ostream_iterator (const ostream_iterator< _Tp, _CharT, _Traits > & __obj) [inline]

Copy constructor.

Definition at line 218 of file stream_iterator.h.

4.775.4 Member Function Documentation

4.775.4.1 template<typename _Tp , typename _CharT = char, typename _Traits = char_traits<_CharT>> ostream_iterator& std::ostream_iterator< _Tp, _CharT, _Traits >::operator= (const _Tp & __value) [inline]

Writes *value* to underlying ostream using operator<<. If constructed with delimiter string, writes delimiter to ostream.

Definition at line 228 of file stream_iterator.h.

The documentation for this class was generated from the following file:

- stream_iterator.h

4.776 std::experimental::fundamentals_v2::ostream_joiner< _DelimT, _CharT, _Traits > Class Template Reference

Public Types

- typedef _CharT **char_type**
- typedef void **difference_type**
- typedef output_iterator_tag **iterator_category**
- typedef basic_ostream< _CharT, _Traits > **ostream_type**
- typedef void **pointer**
- typedef void **reference**
- typedef _Traits **traits_type**
- typedef void **value_type**

Public Member Functions

- **ostream_joiner** (ostream_type &__os, const _DelimT &__delimiter) noexcept(is_nothrow_copy_constructible_v< _DelimT >)
- **ostream_joiner** (ostream_type &__os, _DelimT &&__delimiter) noexcept(is_nothrow_move_constructible_v< _DelimT >)
- ostream_joiner & **operator*** () noexcept
- ostream_joiner & **operator++** () noexcept
- ostream_joiner & **operator++** (int) noexcept
- template<typename _Tp >
  ostream_joiner & **operator=** (const _Tp &__value)

4.776.1 Detailed Description

template<typename _DelimT, typename _CharT = char, typename _Traits = char_traits<_CharT>>class std::experimental::fundamentals_v2::ostream_joiner< _DelimT, _CharT, _Traits >

Output iterator that inserts a delimiter between elements.

Definition at line 58 of file experimental/iterator.

The documentation for this class was generated from the following file:

- experimental/iterator

4.777 std::ostreambuf_iterator< _CharT, _Traits > Class Template Reference

Inheritance diagram for std::ostreambuf_iterator< _CharT, _Traits >:



Public Types

- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

- typedef _CharT char_type
- typedef _Traits traits_type
- typedef basic_streambuf < _CharT, _Traits > streambuf_type
- typedef basic_ostream< _CharT, _Traits > ostream_type

Public Member Functions

- ostreambuf_iterator (ostream_type &__s) noexcept
- ostreambuf_iterator (streambuf_type *__s) noexcept
- ostreambuf_iterator & **_M_put** (const _CharT *__ws, streamsize __len)
- bool failed () const noexcept
- ostreambuf_iterator & operator* ()
- ostreambuf_iterator & operator++ (int)
- ostreambuf_iterator & operator++ ()
- ostreambuf_iterator & operator= (_CharT __c)

Friends

- template<typename _CharT2 >
  __gnu_cxx::__enable_if
  < __is_char< _CharT2 >
  ::__value, ostreambuf_iterator
  < _CharT2 > >::__type **copy** (istreambuf_iterator< _CharT2 >, istreambuf_iterator< _CharT2 >, ostreambuf-
  _iterator< _CharT2 >)

4.777.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::ostreambuf_iterator< _CharT, _Traits >

Provides output iterator semantics for streambufs.

Definition at line 128 of file iosfwd.

4.777.2 Member Typedef Documentation

4.777.2.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef _CharT std::ostreambuf_iterator< _CharT, _Traits >::char_type

Public typedefs.

Definition at line 249 of file streambuf_iterator.h.

4.777.2.2 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.777.2.3 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.777.2.4 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef basic_ostream<_CharT, _Traits> std::ostreambuf_iterator< _CharT, _Traits >::ostream_type

Public typedefs.

Definition at line 252 of file streambuf_iterator.h.

4.777.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.777.2.6 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.777.2.7 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef basic_streambuf<_CharT, _Traits> std::ostreambuf_iterator< _CharT, _Traits >::streambuf_type

Public typedefs.

Definition at line 251 of file streambuf_iterator.h.

4.777.2.8 template<typename _CharT , typename _Traits = char_traits<_CharT>> typedef _Traits std::ostreambuf_iterator< _CharT, _Traits >::traits_type

Public typedefs.

Definition at line 250 of file streambuf_iterator.h.

4.777.2.9 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.777.3 Constructor & Destructor Documentation

4.777.3.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> std::ostreambuf_iterator< _CharT, _Traits >::ostreambuf_iterator (ostream_type & __s) [inline], [noexcept]

Construct output iterator from ostream.

Definition at line 274 of file streambuf_iterator.h.

4.777.3.2 template<typename _CharT , typename _Traits = char_traits<_CharT>> std::ostreambuf_iterator< _CharT, _Traits >::ostreambuf_iterator (streambuf_type * __s) [inline], [noexcept]

Construct output iterator from streambuf.

Definition at line 278 of file streambuf_iterator.h.

4.777.4 Member Function Documentation

4.777.4.1 template<typename _CharT , typename _Traits = char_traits<_CharT>> bool std::ostreambuf_iterator< _CharT, _Traits >::failed ( ) const [inline], [noexcept]

Return true if previous operator=() failed.

Definition at line 308 of file streambuf_iterator.h.

4.777.4.2 template<typename _CharT , typename _Traits = char_traits<_CharT>> ostreambuf_iterator& std::ostreambuf_iterator< _CharT, _Traits >::operator* ( ) [inline]

Return *this.

Definition at line 293 of file streambuf_iterator.h.

4.777.4.3 template<typename _CharT , typename _Traits = char_traits<_CharT>> ostreambuf_iterator& std::ostreambuf_iterator< _CharT, _Traits >::operator++ (int) [inline]

Return *this.

Definition at line 298 of file streambuf_iterator.h.

4.777.4.4 template<typename _CharT , typename _Traits = char_traits<_CharT>> ostreambuf_iterator& std::ostreambuf_iterator< _CharT, _Traits >::operator++ ( ) [inline]

Return *this.

Definition at line 303 of file streambuf_iterator.h.

4.777.4.5 template<typename _CharT , typename _Traits = char_traits<_CharT>> ostreambuf_iterator& std::ostreambuf_iterator< _CharT, _Traits >::operator= (_CharT __c) [inline]

Write character to streambuf. Calls streambuf.sputc().

Definition at line 283 of file streambuf_iterator.h.

References std::basic_streambuf< _CharT, _Traits >::sputc().

The documentation for this class was generated from the following files:

- iosfwd
- streambuf_iterator.h

4.778 std::out_of_range Class Reference

Inheritance diagram for std::out_of_range:

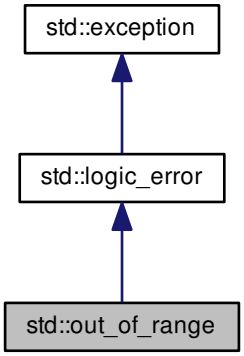

Public Member Functions

- **out_of_range** (const string &__arg) _GLIBCXX_TXN_SAFE
- **out_of_range** (const char *) _GLIBCXX_TXN_SAFE
- **out_of_range** (const out_of_range &)=default
- **out_of_range** (out_of_range &&)=default
- out_of_range & **operator=** (const out_of_range &)=default
- out_of_range & **operator=** (out_of_range &&)=default
- virtual const char * what () const noexcept

4.778.1 Detailed Description

This represents an argument whose value is not within the expected range (e.g., boundary checks in basic_string).

Definition at line 200 of file stdexcept.

4.778.2 Member Function Documentation

4.778.2.1 virtual const char* std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this class was generated from the following file:

- stdexcept

4.779 std::output_iterator_tag Struct Reference

4.779.1 Detailed Description

Marking output iterators.

Definition at line 96 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.780 __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >:

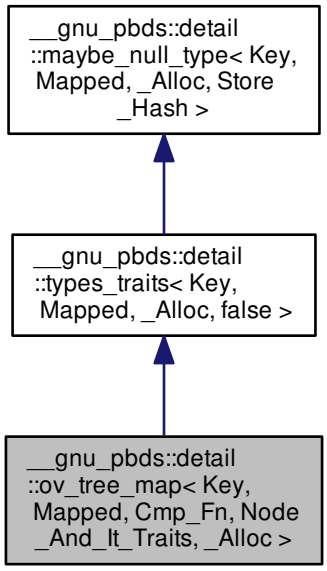

Classes

- class cond_dtor

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef point_const_iterator **const_iterator**
- typedef traits_base::const_pointer **const_pointer**
- typedef traits_base::const_reference **const_reference**
- typedef ov_tree_tag **container_category**
- typedef _Alloc::difference_type **difference_type**
- typedef point_iterator **iterator**
- typedef traits_base::key_const_pointer **key_const_pointer**
- typedef traits_base::key_const_reference **key_const_reference**

- typedef traits_base::key_pointer **key_pointer**
- typedef traits_base::key_reference **key_reference**
- typedef traits_base::key_type **key_type**
- typedef traits_base::mapped_const_pointer **mapped_const_pointer**
- typedef traits_base::mapped_const_reference **mapped_const_reference**
- typedef traits_base::mapped_pointer **mapped_pointer**
- typedef traits_base::mapped_reference **mapped_reference**
- typedef traits_base::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef traits_type::node_const_iterator **node_const_iterator**
- typedef traits_type::node_iterator **node_iterator**
- typedef traits_type::node_update **node_update**
- typedef const_pointer **point_const_iterator**
- typedef pointer **point_iterator**
- typedef traits_base::pointer **pointer**
- typedef traits_base::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef traits_base::value_type **value_type**

Public Member Functions

- **ov_tree_map** (const Cmp_Fn &)
- **ov_tree_map** (const Cmp_Fn &, const node_update &)
- **ov_tree_map** (const ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- template<typename It > void **copy_from_range** (It, It)
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- iterator **erase** (iterator it)
- template<typename Pred > ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference r_key)
- point_const_iterator **find** (key_const_reference r_key) const

- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- std::pair< point_iterator, bool > **insert** (const_reference r_value)
- void **join** (ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **lower_bound** (key_const_reference r_key)
- point_const_iterator **lower_bound** (key_const_reference r_key) const
- size_type **max_size** () const
- node_const_iterator node_begin () const
- node_iterator node_begin ()
- node_const_iterator node_end () const
- node_iterator node_end ()
- mapped_reference **operator[]** (key_const_reference r_key)
- size_type **size** () const
- void **split** (key_const_reference, ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **swap** (ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **upper_bound** (key_const_reference r_key)
- point_const_iterator **upper_bound** (key_const_reference r_key) const

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

4.780.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, typename Node_And_It_Traits, typename _Alloc>class __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Ordered-vector tree associative-container.

Definition at line 106 of file ov_tree_map_.hpp.

4.780.2 Member Function Documentation

4.780.2.1 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) const [inline]

Returns a const node_iterator corresponding to the node at the root of the tree.

Definition at line 47 of file ov_tree_map_.hpp.

4.780.2.2 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) [inline]

Returns a node_iterator corresponding to the node at the root of the tree.

Definition at line 59 of file ov_tree_map_.hpp.

4.780.2.3 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) const [inline]

Returns a const node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 53 of file ov_tree_map_.hpp.

4.780.2.4 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) [inline]

Returns a node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 65 of file ov_tree_map_.hpp.

The documentation for this class was generated from the following file:

- ov_tree_map_.hpp

4.781 __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc >:

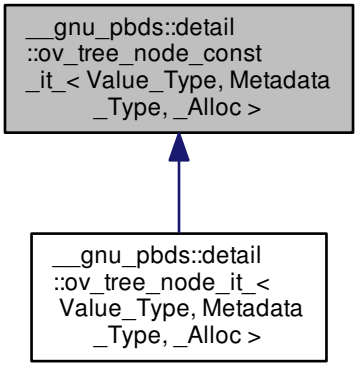

Public Types

- typedef rebind_traits< _Alloc, typename remove_const < Value_Type >::type > ::const_pointer **const_reference**
- typedef trivial_iterator_difference_type **difference_type**

- typedef trivial_iterator_tag **iterator_category**
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference **metadata_const_reference**
- typedef Metadata_Type **metadata_type**
- typedef rebind_traits< _Alloc, typename remove_const < Value_Type >::type > ::const_pointer **reference**
- typedef rebind_traits< _Alloc, Value_Type >::const_pointer **value_type**

Public Member Functions

- **ov_tree_node_const_it_** (const_pointer p_nd=0, const_pointer p_begin_nd=0, const_pointer p_end_nd=0, const_metadata_pointer p_metadata=0)
- this_type get_l_child () const
- metadata_const_reference **get_metadata** () const
- this_type get_r_child () const
- bool **operator!=** (const this_type &other) const
- const_reference **operator*** () const
- bool **operator==** (const this_type &other) const

Public Attributes

- pointer **m_p_begin_value**
- pointer **m_p_end_value**
- const_metadata_pointer **m_p_metadata**
- pointer **m_p_value**

Protected Types

- typedef rebind_traits< _Alloc, Metadata_Type >::const_pointer **const_metadata_pointer**
- typedef rebind_traits< _Alloc, Value_Type >::const_pointer **const_pointer**
- typedef rebind_traits< _Alloc, Value_Type >::pointer **pointer**
- typedef ov_tree_node_const_it_ < Value_Type, Metadata_Type, _Alloc > **this_type**

Static Protected Member Functions

- template<typename Ptr > static Ptr **mid_pointer** (Ptr p_begin, Ptr p_end)

4.781.1 Detailed Description

template<typename Value_Type, typename Metadata_Type, typename _Alloc>class __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc >

Const node reference.

Definition at line 57 of file ov_tree_map_/node_iterators.hpp.

4.781.2 Member Function Documentation

4.781.2.1 template<typename Value_Type , typename Metadata_Type , typename _Alloc > this_type __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc >::get_l_child ( ) const [inline]

Returns the node iterator associated with the left node.

Definition at line 135 of file ov_tree_map_/node_iterators.hpp.

4.781.2.2 template<typename Value_Type , typename Metadata_Type , typename _Alloc > this_type __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc >::get_r_child ( ) const [inline]

Returns the node iterator associated with the right node.

Definition at line 151 of file ov_tree_map_/node_iterators.hpp.

The documentation for this class was generated from the following file:

- ov_tree_map_/node_iterators.hpp

4.782 __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >:

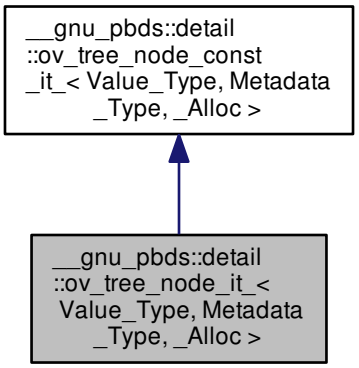

Public Types

- typedef rebind_traits< _Alloc, typename remove_const < Value_Type >::type > ::pointer **const_reference**
- typedef trivial_iterator_difference_type **difference_type**
- typedef trivial_iterator_tag **iterator_category**
- typedef rebind_traits< _Alloc, metadata_type > ::const_reference **metadata_const_reference**
- typedef Metadata_Type **metadata_type**
- typedef rebind_traits< _Alloc, typename remove_const < Value_Type >::type > ::pointer **reference**
- typedef rebind_traits< _Alloc, Value_Type >::pointer **value_type**

Public Member Functions

- **ov_tree_node_it_** (const_pointer p_nd=0, const_pointer p_begin_nd=0, const_pointer p_end_nd=0, const_metadata_pointer p_metadata=0)
- ov_tree_node_it_ get_l_child () const
- metadata_const_reference **get_metadata** () const
- ov_tree_node_it_ get_r_child () const
- bool **operator!=** (const this_type &other) const
- reference operator* () const
- bool **operator==** (const this_type &other) const

Public Attributes

- pointer **m_p_begin_value**
- pointer **m_p_end_value**
- const_metadata_pointer **m_p_metadata**
- pointer **m_p_value**

Static Protected Member Functions

- template<typename Ptr > static Ptr **mid_pointer** (Ptr p_begin, Ptr p_end)

4.782.1 Detailed Description

template<typename Value_Type, typename Metadata_Type, typename _Alloc>class __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >

Node reference.

Definition at line 197 of file ov_tree_map_/node_iterators.hpp.

4.782.2 Member Function Documentation

4.782.2.1 template<typename Value_Type , typename Metadata_Type , typename _Alloc > ov_tree_node_it_ __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >::get_l_child ( ) const [inline]

Returns the node reference associated with the left node.

Definition at line 239 of file ov_tree_map_/node_iterators.hpp.

4.782.2.2 template<typename Value_Type , typename Metadata_Type , typename _Alloc > ov_tree_node_it_ __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >::get_r_child ( ) const [inline]

Returns the node reference associated with the right node.

Definition at line 255 of file ov_tree_map_/node_iterators.hpp.

4.782.2.3 template<typename Value_Type , typename Metadata_Type , typename _Alloc > reference __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >::operator* ( ) const [inline]

Access.

Definition at line 234 of file ov_tree_map_/node_iterators.hpp.

The documentation for this class was generated from the following file:

- ov_tree_map_/node_iterators.hpp

4.783 __gnu_pbds::ov_tree_tag Struct Reference

Inheritance diagram for __gnu_pbds::ov_tree_tag:

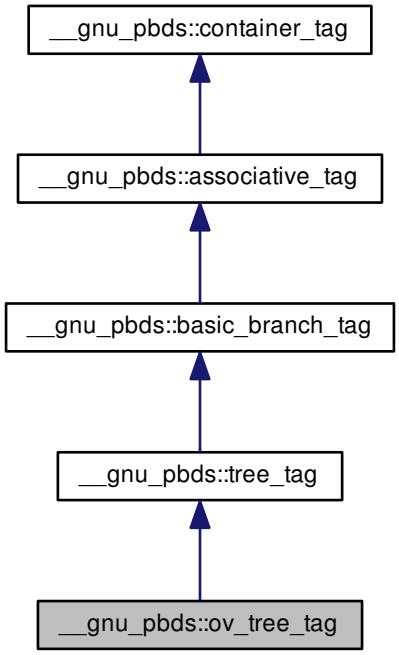

4.783.1 Detailed Description

Ordered-vector tree.

Definition at line 159 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.784 std::overflow_error Class Reference

Inheritance diagram for std::overflow_error:

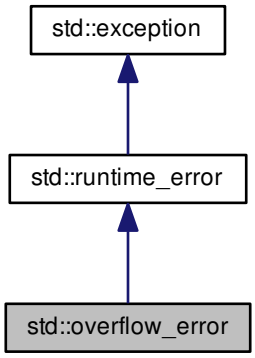

Public Member Functions

- **overflow_error** (const string &__arg) _GLIBCXX_TXN_SAFE
- **overflow_error** (const char *) _GLIBCXX_TXN_SAFE
- **overflow_error** (const overflow_error &)=default
- **overflow_error** (overflow_error &&)=default
- overflow_error & **operator=** (const overflow_error &)=default
- overflow_error & **operator=** (overflow_error &&)=default
- virtual const char * what () const noexcept

4.784.1 Detailed Description

Thrown to indicate arithmetic overflow.

Definition at line 273 of file stdexcept.

4.784.2 Member Function Documentation

4.784.2.1 virtual const char* std::runtime_error::what ( ) const [virtual],[noexcept],[inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- stdexcept

4.785 std::owner_less< _Tp > Struct Template Reference

4.785.1 Detailed Description

template<typename _Tp = void>struct std::owner_less< _Tp >

Primary template owner_less.

Definition at line 768 of file bits/shared_ptr.h.

The documentation for this struct was generated from the following file:

- bits/shared_ptr.h

4.786 std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > > Struct Template Reference

Inherits std::_Sp_owner_less< _Tp, _Tp1 >.

Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- bool **operator()** (const _Tp &__lhs, const _Tp &__rhs) const noexcept
- bool **operator()** (const _Tp &__lhs, const _Tp1 &__rhs) const noexcept
- bool **operator()** (const _Tp1 &__lhs, const _Tp &__rhs) const noexcept

4.786.1 Detailed Description

template<typename _Tp>struct std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >

Partial specialization of owner_less for shared_ptr.

Definition at line 503 of file experimental/bits/shared_ptr.h.

4.786.2 Member Typedef Documentation

4.786.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.786.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.786.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- experimental/bits/shared_ptr.h

4.787 std::owner_less< shared_ptr< _Tp > > Struct Template Reference

Inherits std::_Sp_owner_less< _Tp, _Tp1 >.

Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- bool **operator()** (const _Tp &__lhs, const _Tp &__rhs) const noexcept
- bool **operator()** (const _Tp &__lhs, const _Tp1 &__rhs) const noexcept
- bool **operator()** (const _Tp1 &__lhs, const _Tp &__rhs) const noexcept

4.787.1 Detailed Description

template<typename _Tp>struct std::owner_less< shared_ptr< _Tp > >

Partial specialization of owner_less for shared_ptr.

Definition at line 777 of file bits/shared_ptr.h.

4.787.2 Member Typedef Documentation

4.787.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

first_argument_type is the type of the first argument

Definition at line 121 of file stl_function.h.

4.787.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

result_type is the return type

Definition at line 127 of file stl_function.h.

4.787.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

second_argument_type is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- bits/shared_ptr.h

4.788 std::owner_less< void > Struct Template Reference

Inherits std::_Sp_owner_less< _Tp, _Tp1 >.

Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- bool **operator()** (const _Tp &__lhs, const _Tp &__rhs) const noexcept
- bool **operator()** (const _Tp &__lhs, const _Tp1 &__rhs) const noexcept
- bool **operator()** (const _Tp1 &__lhs, const _Tp &__rhs) const noexcept

4.788.1 Detailed Description

template<><>struct std::owner_less< void >

Void specialization of owner_less compares either shared_ptr or weak_ptr.

Definition at line 772 of file bits/shared_ptr.h.

4.788.2 Member Typedef Documentation

4.788.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.788.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.788.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- bits/shared_ptr.h

4.789 std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > > Struct Template Reference

Inherits std::_Sp_owner_less< _Tp, _Tp1 >.

Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- bool **operator()** (const _Tp &__lhs, const _Tp &__rhs) const noexcept
- bool **operator()** (const _Tp &__lhs, const _Tp1 &__rhs) const noexcept
- bool **operator()** (const _Tp1 &__lhs, const _Tp &__rhs) const noexcept

4.789.1 Detailed Description

template<typename _Tp>struct std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >

Partial specialization of owner_less for weak_ptr.

Definition at line 509 of file experimental/bits/shared_ptr.h.

4.789.2 Member Typedef Documentation

4.789.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.789.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.789.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- experimental/bits/shared_ptr.h

4.790 std::owner_less< weak_ptr< _Tp > > Struct Template Reference

Inherits std::_Sp_owner_less< _Tp, _Tp1 >.

Public Types

- typedef _Tp first_argument_type
- typedef bool result_type
- typedef _Tp second_argument_type

Public Member Functions

- bool **operator()** (const _Tp &__lhs, const _Tp &__rhs) const noexcept
- bool **operator()** (const _Tp &__lhs, const _Tp1 &__rhs) const noexcept
- bool **operator()** (const _Tp1 &__lhs, const _Tp &__rhs) const noexcept

4.790.1 Detailed Description

template<typename _Tp>struct std::owner_less< weak_ptr< _Tp > >

Partial specialization of owner_less for weak_ptr.

Definition at line 783 of file bits/shared_ptr.h.

4.790.2 Member Typedef Documentation

4.790.2.1 typedef _Tp std::binary_function< _Tp , _Tp , bool >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.790.2.2 typedef bool std::binary_function< _Tp , _Tp , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.790.2.3 typedef _Tp std::binary_function< _Tp , _Tp , bool >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- bits/shared_ptr.h

4.791 std::packaged_task< _Res(_ArgTypes...)> Class Template Reference

Public Member Functions

- template<typename _Fn , typename = __not_same<_Fn>>
  packaged_task (_Fn &&__fn)
- template<typename _Fn , typename _Alloc , typename = __not_same<_Fn>>
  packaged_task (allocator_arg_t, const _Alloc &__a, _Fn &&__fn)
- template<typename _Allocator >
  packaged_task (allocator_arg_t, const _Allocator &__a) noexcept
- template<typename _Allocator >
  packaged_task (allocator_arg_t, const _Allocator &, const packaged_task &)=delete
- template<typename _Allocator >
  packaged_task (allocator_arg_t, const _Allocator &, packaged_task &&__other) noexcept
- **packaged_task** (const packaged_task &)=delete
- **packaged_task** (packaged_task &&__other) noexcept

- future< _Res > **get_future** ()
- void **make_ready_at_thread_exit** (_ArgTypes...__args)
- void **operator()** (_ArgTypes...__args)
- packaged_task & **operator=** (const packaged_task &)=delete
- packaged_task & **operator=** (packaged_task &&__other) noexcept
- void **reset** ()
- void **swap** (packaged_task &__other) noexcept
- bool **valid** () const noexcept

4.791.1 Detailed Description

template<typename _Res, typename... _ArgTypes>class std::packaged_task< _Res(_ArgTypes...)>

packaged_task

Definition at line 1473 of file future.

The documentation for this class was generated from the following file:

- future

4.792 std::pair< _T1, _T2 > Struct Template Reference

Inherits __pair_base< _T1, _T2 >.

Public Types

- typedef _T1 first_type
- typedef _T2 second_type

Public Member Functions

- template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< __and_< __is_implicitly_default_constructible< _U1 >, __is_implicitly_default_constructible< _U2 >>::value, bool >::type = true>
  constexpr pair ()
- template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< _PCCP::template_ConstructiblePair< _U1, _U2 >()&&_PCCP::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = true>
  constexpr pair (const _T1 &__a, const _T2 &__b)
- template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< _PCCP::template_ConstructiblePair< _U1, _U2 >()&&!_PCCP::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = false>
  constexpr pair (const _T1 &__a, const _T2 &__b)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCFP< _U1, _U2 >::template_ConstructiblePair< _U1, _U2 >()&&_PCCFP< _U1, _U2 >::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = true>
  constexpr **pair** (const pair< _U1, _U2 > &__p)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCFP< _U1, _U2 >::template_ConstructiblePair< _U1, _U2 >()&&!_PCCFP< _U1, _U2 >::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = false>
  constexpr **pair** (const pair< _U1, _U2 > &__p)
- constexpr pair (const pair &)=default
- constexpr pair (pair &&)=default
- template<typename _U1 , typename enable_if< _PCCP::template_MoveCopyPair< true, _U1, _T2 >(), bool >::type = true>
  constexpr **pair** (_U1 &&__x, const _T2 &__y)

- template<typename _U1 , typename enable_if< _PCCP::template_MoveCopyPair< false, _U1, _T2 >(), bool >::type = false>
  constexpr **pair** (_U1 &&__x, const _T2 &__y)
- template<typename _U2 , typename enable_if< _PCCP::template_CopyMovePair< true, _T1, _U2 >(), bool >::type = true>
  constexpr **pair** (const _T1 &__x, _U2 &&__y)
- template<typename _U2 , typename enable_if< _PCCP::template_CopyMovePair< false, _T1, _U2 >(), bool >::type = false>
  pair (const _T1 &__x, _U2 &&__y)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCP::template_MoveConstructiblePair< _U1, _U2 >()&&_PCCP::template_ImplicitlyMoveConvertiblePair< _U1, _U2 >(), bool >::type = true>
  constexpr **pair** (_U1 &&__x, _U2 &&__y)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCP::template_MoveConstructiblePair< _U1, _U2 >()&&!_PCCP::template_ImplicitlyMoveConvertiblePair< _U1, _U2 >(), bool >::type = false>
  constexpr **pair** (_U1 &&__x, _U2 &&__y)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCFP< _U1, _U2 >::template_MoveConstructiblePair< _U1, _U2 >()&&_PCCFP< _U1, _U2 >::template_ImplicitlyMoveConvertiblePair< _U1, _U2 >(), bool >::type = true>
  constexpr **pair** (pair< _U1, _U2 > &&__p)
- template<typename _U1 , typename _U2 , typename enable_if< _PCCFP< _U1, _U2 >::template_MoveConstructiblePair< _U1, _U2 >()&&!_PCCFP< _U1, _U2 >::template_ImplicitlyMoveConvertiblePair< _U1, _U2 >(), bool >::type = false>
  constexpr **pair** (pair< _U1, _U2 > &&__p)
- template<typename... _Args1, typename... _Args2>
  constexpr pair (piecewise_construct_t, tuple< _Args1...>, tuple< _Args2...>)
- constexpr pair & **operator=** (typename conditional< __and_< is_copy_assignable< _T1 >, is_copy_assignable< _T2 >>::value, const pair &, const __nonesuch & >::type __p)
- constexpr pair & **operator=** (typename conditional< __and_< is_move_assignable< _T1 >, is_move_assignable< _T2 >>::value, pair &&, __nonesuch && >::type __p) noexcept(__and_< is_nothrow_move_assignable< _T1 >, is_nothrow_move_assignable< _T2 >>::value)
- template<typename _U1 , typename _U2 >
  constexpr enable_if< __and_
  < is_assignable< _T1 &, const
  _U1 & >, is_assignable< _T2
  &, const _U2 & > >::value,
  pair & >::type **operator=** (const pair< _U1, _U2 > &__p)
- template<typename _U1 , typename _U2 >
  constexpr enable_if< __and_
  < is_assignable< _T1 &, _U1 && >
  , is_assignable< _T2 &, _U2 && >
  >::value, pair & >::type **operator=** (pair< _U1, _U2 > &&__p)
- constexpr void swap (pair &__p) noexcept(__and_< __is_nothrow_swappable< _T1 >, __is_nothrow_swappable< _T2 >>::value)

Public Attributes

- _T1 first
- _T2 second

Related Functions

(Note that these are not member functions.)

- template<typename _T1 , typename _T2 >
  constexpr pair< typename
  __decay_and_strip< _T1 >
  ::__type, typename
  __decay_and_strip< _T2 >

::__type > make_pair (_T1 &&__x, _T2 &&__y)

- template<typename _T1 , typename _T2 >
  constexpr bool operator== (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator< (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator!= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator> (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator<= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr bool operator>= (const pair< _T1, _T2 > &__x, const pair< _T1, _T2 > &__y)
- template<typename _T1 , typename _T2 >
  constexpr enable_if< __and_
  < __is_swappable< _T1 >
  , __is_swappable< _T2 >
  >::value >::type swap (pair< _T1, _T2 > &__x, pair< _T1, _T2 > &__y) noexcept(noexcept(__x.swap(__y)))

4.792.1 Detailed Description

template<typename _T1, typename _T2>struct std::pair< _T1, _T2 >

Struct holding two objects of arbitrary type.

Template Parameters

_T1	Type of first object.
_T2	Type of second object.

https://gcc.gnu.org/onlinedocs/libstdc++/manual/utilities.html

Definition at line 211 of file stl_pair.h.

4.792.2 Member Typedef Documentation

4.792.2.1 template<typename _T1, typename _T2> typedef _T1 std::pair< _T1, _T2 >::first_type

The type of the `first` member.

Definition at line 214 of file stl_pair.h.

4.792.2.2 template<typename _T1, typename _T2> typedef _T2 std::pair< _T1, _T2 >::second_type

The type of the `second` member.

Definition at line 215 of file stl_pair.h.

4.792.3 Constructor & Destructor Documentation

4.792.3.1 template<typename _T1, typename _T2> template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< __and_< __is_implicitly_default_constructible< _U1 >, __is_implicitly_default_constructible< _U2 >>::value, bool >::type = true> constexpr std::pair< _T1, _T2 >::pair ( ) [inline]

The default constructor creates `first` and `second` using their respective default constructors.

Definition at line 232 of file stl_pair.h.

4.792.3.2 template<typename _T1, typename _T2> template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< _PCCP::template_ConstructiblePair< _U1, _U2 >()&&_PCCP::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = true> constexpr std::pair< _T1, _T2 >::pair (const _T1 & __a, const _T2 & __b) [inline]

Construct from two const lvalues, allowing implicit conversions.

Definition at line 266 of file stl_pair.h.

4.792.3.3 template<typename _T1, typename _T2> template<typename _U1 = _T1, typename _U2 = _T2, typename enable_if< _PCCP::template_ConstructiblePair< _U1, _U2 >()&&!_PCCP::template_ImplicitlyConvertiblePair< _U1, _U2 >(), bool >::type = false> constexpr std::pair< _T1, _T2 >::pair (const _T1 & __a, const _T2 & __b) [inline], [explicit]

Construct from two const lvalues, disallowing implicit conversions.

Definition at line 276 of file stl_pair.h.

4.792.3.4 template<typename _T1, typename _T2> constexpr std::pair< _T1, _T2 >::pair (const pair< _T1, _T2 > &) [default]

Copy constructor.

4.792.3.5 template<typename _T1, typename _T2> constexpr std::pair< _T1, _T2 >::pair (pair< _T1, _T2 > &&) [default]

Move constructor.

4.792.4 Member Function Documentation

4.792.4.1 template<typename _T1, typename _T2> constexpr void std::pair< _T1, _T2 >::swap (pair< _T1, _T2 > & __p) [inline], [noexcept]

Swap the first members and then the second members.

Definition at line 439 of file stl_pair.h.

Referenced by std::pair< _BiIter, _BiIter >::swap(), and std::pair< _T1, _T2 >::swap().

4.792.5 Member Data Documentation

4.792.5.1 template<typename _T1, typename _T2> _T1 std::pair< _T1, _T2 >::first

The first member.

Definition at line 217 of file stl_pair.h.

Referenced by std::__sample(), std::_Temporary_buffer< _ForwardIterator, _Tp >::_Temporary_buffer(), std::set< _Key, _Compare, _Alloc >::insert(), std::pair< _T1, _T2 >::operator<(), std::pair< _T1, _T2 >::operator==(), std::shuffle(), and std::pair< _BiIter, _BiIter >::swap().

4.792.5.2 template<typename _T1, typename _T2> _T2 std::pair< _T1, _T2 >::second

The second member.

Definition at line 218 of file stl_pair.h.

Referenced by std::__sample(), std::_Temporary_buffer< _ForwardIterator, _Tp >::_Temporary_buffer(), std::set< _Key, _Compare, _Alloc >::insert(), std::pair< _T1, _T2 >::operator<(), std::pair< _T1, _T2 >::operator==(), std::shuffle(), and std::pair< _BiIter, _BiIter >::swap().

The documentation for this struct was generated from the following files:

- stl_pair.h
- tuple

4.793 __gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef base_type::const_iterator **const_iterator**
- typedef __rebind_a::const_pointer **const_pointer**
- typedef __rebind_a::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef left_child_next_sibling_heap_node_ < Value_Type, null_type, _Alloc > **node**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef __rebind_a::pointer **pointer**
- typedef __rebind_a::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- **pairing_heap** (const Cmp_Fn &)
- **pairing_heap** (const pairing_heap &)
- iterator **begin** ()

- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- void **erase** (point_iterator)
- template<typename Pred >
  size_type **erase_if** (Pred)
- template<typename Pred >
  pairing_heap< Value_Type,
  Cmp_Fn, _Alloc >::size_type **erase_if** (Pred pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **join** (pairing_heap &)
- size_type **max_size** () const
- void **modify** (point_iterator, const_reference)
- void **pop** ()
- point_iterator **push** (const_reference)
- size_type **size** () const
- template<typename Pred >
  void **split** (Pred, pairing_heap &)
- void **swap** (pairing_heap &)
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, null_type, _Alloc > &)
- const_reference **top** () const

Protected Types

- typedef
  alloc_traits::allocator_type **node_allocator**
- typedef alloc_traits::const_pointer **node_const_pointer**
- typedef null_type **node_metadata**
- typedef std::pair
  < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- template<typename It >
  void **copy_from_range** (It, It)
- node_pointer **get_new_node_for_insert** (const_reference)
- node_pointer **prune** (Pred)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static void **make_child_of** (node_pointer, node_pointer)
- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_root**
- size_type **m_size**

4.793.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc >

Pairing heap.

Definition at line 77 of file pairing_heap_.hpp.

The documentation for this class was generated from the following file:

- pairing_heap_.hpp

4.794 __gnu_pbds::pairing_heap_tag Struct Reference

Inheritance diagram for __gnu_pbds::pairing_heap_tag:

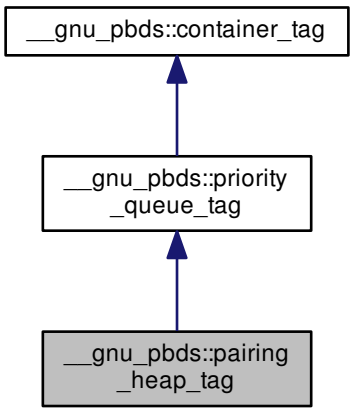

4.794.1 Detailed Description

Pairing-heap.

Definition at line 174 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.795 __gnu_parallel::parallel_tag Struct Reference

Inheritance diagram for __gnu_parallel::parallel_tag:

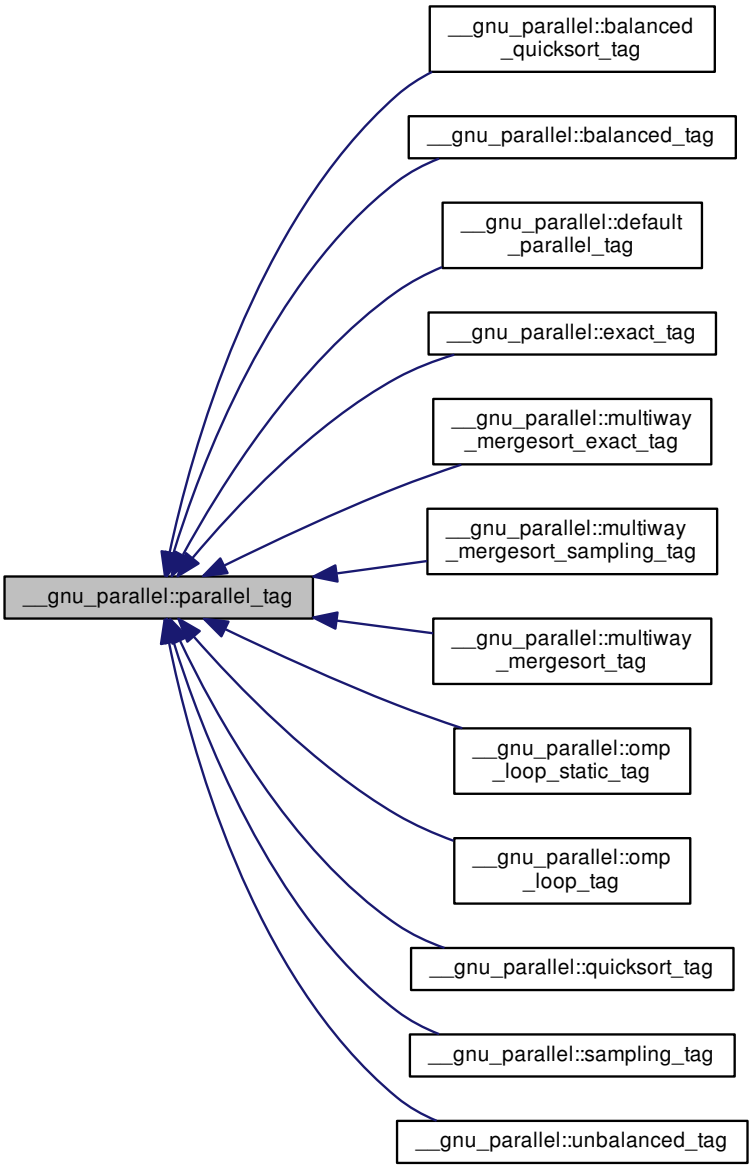

Public Member Functions

- parallel_tag ()
- parallel_tag (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()

- void set_num_threads (_ThreadIndex __num_threads)

4.795.1 Detailed Description

Recommends parallel execution at compile time, optionally using a user-specified number of threads.

Definition at line 46 of file tags.h.

4.795.2 Constructor & Destructor Documentation

4.795.2.1 __gnu_parallel::parallel_tag::parallel_tag ( ) [inline]

Default constructor. Use default number of threads.

Definition at line 53 of file tags.h.

4.795.2.2 __gnu_parallel::parallel_tag::parallel_tag (_ThreadIndex *__num_threads*) [inline]

Default constructor. Recommend number of threads to use.

Parameters

__num_threads	Desired number of threads.

Definition at line 58 of file tags.h.

4.795.3 Member Function Documentation

4.795.3.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.795.3.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.796 std::exponential_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef exponential_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __lambda)
- _RealType **lambda** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.796.1 Detailed Description

template<typename _RealType = double>struct std::exponential_distribution< _RealType >::param_type

Parameter type.

Definition at line 4646 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.797 std::lognormal_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef lognormal_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __m, _RealType __s=_RealType(1))
- _RealType **m** () const
- _RealType **s** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.797.1 Detailed Description

template<typename _RealType = double>struct std::lognormal_distribution< _RealType >::param_type

Parameter type.

Definition at line 2192 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.798 std::negative_binomial_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef negative_binomial_distribution < _IntType > **distribution_type**

Public Member Functions

- **param_type** (_IntType __k, double __p=0.5)
- _IntType **k** () const
- double **p** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.798.1 Detailed Description

template<typename _IntType = int>struct std::negative_binomial_distribution< _IntType >::param_type

Parameter type.

Definition at line 4189 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.799 std::poisson_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef poisson_distribution < _IntType > **distribution_type**

Public Member Functions

- **param_type** (double __mean)
- double **mean** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)
- class **poisson_distribution**< **_IntType** >

4.799.1 Detailed Description

template<typename _IntType = int>struct std::poisson_distribution< _IntType >::param_type

Parameter type.

Definition at line 4420 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.800 std::weibull_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef weibull_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __a, _RealType __b=_RealType(1.0))
- _RealType **a** () const
- _RealType **b** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.800.1 Detailed Description

template<typename _RealType = double>struct std::weibull_distribution< _RealType >::param_type

Parameter type.

Definition at line 4861 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.801 std::extreme_value_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef extreme_value_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __a, _RealType __b=_RealType(1.0))
- _RealType **a** () const
- _RealType **b** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.801.1 Detailed Description

template<typename _RealType = double>struct std::extreme_value_distribution< _RealType >::param_type

Parameter type.

Definition at line 5071 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.802 std::discrete_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef discrete_distribution < _IntType > **distribution_type**

Public Member Functions

- template<typename _InputIterator > **param_type** (_InputIterator __wbegin, _InputIterator __wend)
- **param_type** (initializer_list< double > __wil)
- template<typename _Func > **param_type** (size_t __nw, double __xmin, double __xmax, _Func __fw)
- **param_type** (const param_type &)=default
- param_type & **operator=** (const param_type &)=default
- std::vector< double > **probabilities** () const

Friends

- class **discrete_distribution**< **_IntType** >
- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.802.1 Detailed Description

template<typename _IntType = int>struct std::discrete_distribution< _IntType >::param_type

Parameter type.

Definition at line 5278 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.803 std::piecewise_constant_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef
  piecewise_constant_distribution
  < _RealType > **distribution_type**

Public Member Functions

- template<typename _InputIteratorB , typename _InputIteratorW >
  param_type (_InputIteratorB __bfirst, _InputIteratorB __bend, _InputIteratorW __wbegin)
- template<typename _Func >
  param_type (initializer_list< _RealType > __bi, _Func __fw)
- template<typename _Func >
  param_type (size_t __nw, _RealType __xmin, _RealType __xmax, _Func __fw)
- **param_type** (const param_type &)=default
- std::vector< double > **densities** () const
- std::vector< _RealType > **intervals** () const
- param_type & **operator=** (const param_type &)=default

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)
- class **piecewise_constant_distribution**< **_RealType** >

4.803.1 Detailed Description

template<typename _RealType = double>struct std::piecewise_constant_distribution< _RealType >::param_type

Parameter type.

Definition at line 5513 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.804 std::bernoulli_distribution::param_type Struct Reference

Public Types

- typedef bernoulli_distribution **distribution_type**

Public Member Functions

- **param_type** (double __p)
- double **p** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.804.1 Detailed Description

Parameter type.

Definition at line 3519 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.805 std::fisher_f_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef fisher_f_distribution
  < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __m, _RealType __n=_RealType(1))
- _RealType **m** () const
- _RealType **n** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.805.1 Detailed Description

template<typename _RealType = double>struct std::fisher_f_distribution< _RealType >::param_type

Parameter type.

Definition at line 3063 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.806 std::geometric_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef geometric_distribution < _IntType > **distribution_type**

Public Member Functions

- **param_type** (double __p)
- double **p** () const

Friends

- class **geometric_distribution**< **_IntType** >
- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.806.1 Detailed Description

template<typename _IntType = int>struct std::geometric_distribution< _IntType >::param_type

Parameter type.

Definition at line 3979 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.807 std::cauchy_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef cauchy_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __a, _RealType __b=_RealType(1))
- _RealType **a** () const
- _RealType **b** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.807.1 Detailed Description

template<typename _RealType = double>struct std::cauchy_distribution< _RealType >::param_type

Parameter type.

Definition at line 2855 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.808 std::binomial_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef binomial_distribution < _IntType > **distribution_type**

Public Member Functions

- **param_type** (_IntType __t, double __p=0.5)
- double **p** () const
- _IntType **t** () const

Friends

- class **binomial_distribution< _IntType >**
- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.808.1 Detailed Description

template<typename _IntType = int>struct std::binomial_distribution< _IntType >::param_type

Parameter type.

Definition at line 3739 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.809 std::student_t_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef student_t_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __n)
- _RealType **n** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.809.1 Detailed Description

template<typename _RealType = double>struct std::student_t_distribution< _RealType >::param_type

Parameter type.

Definition at line 3295 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.810 std::uniform_int_distribution< _IntType >::param_type Struct Reference

Public Types

- typedef uniform_int_distribution < _IntType > **distribution_type**

Public Member Functions

- **param_type** (_IntType __a, _IntType __b=numeric_limits< _IntType >::max())
- result_type **a** () const
- result_type **b** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.810.1 Detailed Description

template<typename _IntType = int>struct std::uniform_int_distribution< _IntType >::param_type

Parameter type.

Definition at line 83 of file uniform_int_dist.h.

The documentation for this struct was generated from the following file:

- uniform_int_dist.h

4.811 std::gamma_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef gamma_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __alpha_val, _RealType __beta_val=_RealType(1))
- _RealType **alpha** () const
- _RealType **beta** () const

Friends

- class **gamma_distribution< _RealType >**
- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.811.1 Detailed Description

template<typename _RealType = double>struct std::gamma_distribution< _RealType >::param_type

Parameter type.

Definition at line 2403 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.812 std::uniform_real_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef uniform_real_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __a, _RealType __b=_RealType(1))
- result_type **a** () const
- result_type **b** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.812.1 Detailed Description

template<typename _RealType = double>struct std::uniform_real_distribution< _RealType >::param_type

Parameter type.

Definition at line 1741 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.813 std::normal_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef normal_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __mean, _RealType __stddev=_RealType(1))
- _RealType **mean** () const
- _RealType **stddev** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.813.1 Detailed Description

template<typename _RealType = double>struct std::normal_distribution< _RealType >::param_type

Parameter type.

Definition at line 1971 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.814 std::piecewise_linear_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef
  piecewise_linear_distribution
  < _RealType > **distribution_type**

Public Member Functions

- template<typename _InputIteratorB , typename _InputIteratorW >
  param_type (_InputIteratorB __bfirst, _InputIteratorB __bend, _InputIteratorW __wbegin)
- template<typename _Func >
  param_type (initializer_list< _RealType > __bl, _Func __fw)
- template<typename _Func >
  param_type (size_t __nw, _RealType __xmin, _RealType __xmax, _Func __fw)
- **param_type** (const param_type &)=default
- std::vector< double > **densities** () const
- std::vector< _RealType > **intervals** () const
- param_type & **operator=** (const param_type &)=default

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)
- class **piecewise_linear_distribution**< **_RealType** >

4.814.1 Detailed Description

template<typename _RealType = double>struct std::piecewise_linear_distribution< _RealType >::param_type

Parameter type.

Definition at line 5784 of file random.h.

The documentation for this struct was generated from the following files:

- random.h
- bits/random.tcc

4.815 std::chi_squared_distribution< _RealType >::param_type Struct Reference

Public Types

- typedef chi_squared_distribution < _RealType > **distribution_type**

Public Member Functions

- **param_type** (_RealType __n)
- _RealType **n** () const

Friends

- bool **operator!=** (const param_type &__p1, const param_type &__p2)
- bool **operator==** (const param_type &__p1, const param_type &__p2)

4.815.1 Detailed Description

template<typename _RealType = double>struct std::chi_squared_distribution< _RealType >::param_type

Parameter type.

Definition at line 2631 of file random.h.

The documentation for this struct was generated from the following file:

- random.h

4.816 __gnu_pbds::detail::pat_trie_base Struct Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_base:



Classes

- class _CIter
- struct _Head
- struct _Inode
- class _Iter
- struct _Leaf
- struct _Metadata
- struct _Metadata< null_type, _Alloc >
- struct _Node_base
- class _Node_citer
- class _Node_iter

Public Types

- enum node_type { **i_node**, **leaf_node**, **head_node** }

4.816.1 Detailed Description

Base type for PATRICIA trees.

Definition at line 51 of file pat_trie_base.hpp.

4.816.2 Member Enumeration Documentation

4.816.2.1 enum __gnu_pbds::detail::pat_trie_base::node_type

Three types of nodes.

i_node is used by _Inode, leaf_node by _Leaf, and head_node by _Head.

Definition at line 58 of file pat_trie_base.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_base.hpp

4.817 __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >:

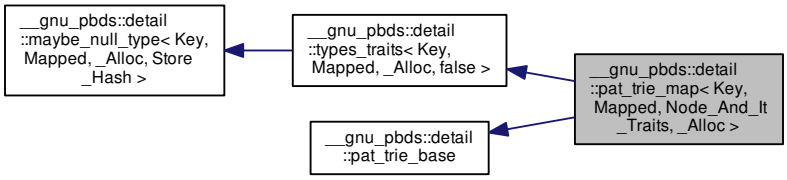

Public Types

- typedef traits_type::access_traits **access_traits**
- typedef _Alloc **allocator_type**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef point_const_iterator **const_iterator**
- typedef traits_base::const_pointer **const_pointer**
- typedef traits_base::const_reference **const_reference**
- typedef traits_type::const_reverse_iterator **const_reverse_iterator**
- typedef pat_trie_tag **container_category**
- typedef _Alloc::difference_type **difference_type**
- typedef point_iterator **iterator**
- typedef traits_base::key_const_pointer **key_const_pointer**
- typedef traits_base::key_const_reference **key_const_reference**
- typedef traits_base::key_pointer **key_pointer**
- typedef traits_base::key_reference **key_reference**
- typedef traits_base::key_type **key_type**
- typedef traits_base::mapped_const_pointer **mapped_const_pointer**
- typedef traits_base::mapped_const_reference **mapped_const_reference**
- typedef traits_base::mapped_pointer **mapped_pointer**

- typedef traits_base::mapped_reference **mapped_reference**
- typedef traits_base::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef traits_type::node_const_iterator **node_const_iterator**
- typedef traits_type::node_iterator **node_iterator**
- enum node_type { **i_node**, **leaf_node**, **head_node** }
- typedef traits_type::node_update **node_update**
- typedef traits_type::const_iterator **point_const_iterator**
- typedef traits_type::iterator **point_iterator**
- typedef traits_base::pointer **pointer**
- typedef traits_base::reference **reference**
- typedef traits_type::reverse_iterator **reverse_iterator**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef traits_base::value_type **value_type**

Public Member Functions

- **pat_trie_map** (const access_traits &)
- **pat_trie_map** (const pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- const_iterator **erase** (const_iterator)
- iterator **erase** (iterator)
- const_reverse_iterator **erase** (const_reverse_iterator)
- reverse_iterator **erase** (reverse_iterator)
- template<typename Pred > pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > ::size_type **erase_if** (Pred pred)
- template<typename Pred > size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference)
- point_const_iterator **find** (key_const_reference) const
- access_traits & **get_access_traits** ()
- const access_traits & **get_access_traits** () const
- node_update & **get_node_update** ()
- const node_update & **get_node_update** () const
- std::pair< point_iterator, bool > **insert** (const_reference)

- void **join** (pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > &)
- point_iterator **lower_bound** (key_const_reference)
- point_const_iterator **lower_bound** (key_const_reference) const
- size_type **max_size** () const
- node_const_iterator node_begin () const
- node_iterator node_begin ()
- node_const_iterator node_end () const
- node_iterator node_end ()
- mapped_reference **operator[]** (key_const_reference r_key)
- reverse_iterator **rbegin** ()
- const_reverse_iterator **rbegin** () const
- reverse_iterator **rend** ()
- const_reverse_iterator **rend** () const
- size_type **size** () const
- void **split** (key_const_reference, pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > &)
- void **swap** (pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > &)
- point_iterator **upper_bound** (key_const_reference)
- point_const_iterator **upper_bound** (key_const_reference) const

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Protected Member Functions

- template<typename It >
  void **copy_from_range** (It, It)
- node_pointer **recursive_copy_node** (node_const_pointer)
- void **value_swap** (pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc > &)

4.817.1 Detailed Description

template<typename Key, typename Mapped, typename Node_And_It_Traits, typename _Alloc>class __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >

PATRICIA trie.

This implementation loosely borrows ideas from: 1) Fast Mergeable Integer Maps, Okasaki, Gill 1998 2) Ptset: Sets of integers implemented as Patricia trees, Jean-Christophe Filliatr, 2000.

Definition at line 101 of file pat_trie_.hpp.

4.817.2 Member Enumeration Documentation

4.817.2.1 enum __gnu_pbds::detail::pat_trie_base::node_type [inherited]

Three types of nodes.

i_node is used by _Inode, leaf_node by _Leaf, and head_node by _Head.

Definition at line 58 of file pat_trie_base.hpp.

4.817.3 Member Function Documentation

4.817.3.1 template<typename Key , typename Mapped , typename Node_And_It_Traits , typename _Alloc > pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_begin ( ) const [inline]

Returns a const node_iterator corresponding to the node at the root of the tree.

Definition at line 103 of file pat_trie_.hpp.

4.817.3.2 template<typename Key , typename Mapped , typename Node_And_It_Traits , typename _Alloc > pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_begin ( ) [inline]

Returns a node_iterator corresponding to the node at the root of the tree.

Definition at line 109 of file pat_trie_.hpp.

4.817.3.3 template<typename Key , typename Mapped , typename Node_And_It_Traits , typename _Alloc > pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_end ( ) const [inline]

Returns a const node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 115 of file pat_trie_.hpp.

4.817.3.4 template<typename Key , typename Mapped , typename Node_And_It_Traits , typename _Alloc > pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >::node_end ( ) [inline]

Returns a node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 121 of file pat_trie_.hpp.

The documentation for this class was generated from the following file:

- pat_trie_.hpp

4.818 __gnu_pbds::pat_trie_tag Struct Reference

Inheritance diagram for __gnu_pbds::pat_trie_tag:

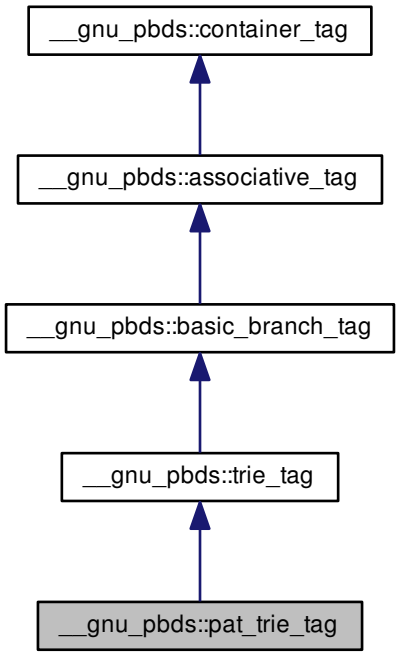

4.818.1 Detailed Description

PATRICIA trie.

Definition at line 165 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.819 std::piecewise_constant_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- template<typename _InputIteratorB , typename _InputIteratorW >
  piecewise_constant_distribution (_InputIteratorB __bfirst, _InputIteratorB __bend, _InputIteratorW __wbegin)
- template<typename _Func >
  piecewise_constant_distribution (initializer_list< _RealType > __bl, _Func __fw)
- template<typename _Func >
  piecewise_constant_distribution (size_t __nw, _RealType __xmin, _RealType __xmax, _Func __fw)
- **piecewise_constant_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- std::vector< double > densities () const
- std::vector< _RealType > intervals () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  piecewise_constant_distribution
  < _RealType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::piecewise_constant_distribution< _RealType1 > &__x)
- bool operator== (const piecewise_constant_distribution &__d1, const piecewise_constant_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::piecewise_constant_distribution< _RealType1 > &__x)

4.819.1 Detailed Description

template<typename _RealType = double>class std::piecewise_constant_distribution< _RealType >

A piecewise_constant_distribution random number distribution.

The formula for the piecewise constant probability mass function is

Definition at line 5503 of file random.h.

4.819.2 Member Typedef Documentation

4.819.2.1 template<typename _RealType = double> typedef _RealType std::piecewise_constant_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 5506 of file random.h.

4.819.3 Member Function Documentation

4.819.3.1 template<typename _RealType = double> std::vector<double> std::piecewise_constant_distribution< _RealType >::densities ( ) const [inline]

Returns a vector of the probability densities.

Definition at line 5628 of file random.h.

References std::vector< _Tp, _Alloc >::empty().

4.819.3.2 template<typename _RealType = double> std::vector<_RealType> std::piecewise_constant_distribution< _RealType >::intervals ( ) const [inline]

Returns a vector of the intervals.

Definition at line 5612 of file random.h.

References std::vector< _Tp, _Alloc >::empty().

4.819.3.3 template<typename _RealType = double> result_type std::piecewise_constant_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 5663 of file random.h.

References std::vector< _Tp, _Alloc >::back(), and std::vector< _Tp, _Alloc >::empty().

4.819.3.4 template<typename _RealType = double> result_type std::piecewise_constant_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 5653 of file random.h.

References std::vector< _Tp, _Alloc >::empty(), and std::vector< _Tp, _Alloc >::front().

4.819.3.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::piecewise_constant_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 5674 of file random.h.

4.819.3.6 template<typename _RealType = double> param_type std::piecewise_constant_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 5638 of file random.h.

4.819.3.7 template<typename _RealType = double> void std::piecewise_constant_distribution< _RealType >::param (const param_type & __param) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 5646 of file random.h.

4.819.3.8 template<typename _RealType = double> void std::piecewise_constant_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 5605 of file random.h.

4.819.4 Friends And Related Function Documentation

4.819.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::piecewise_constant_distribution< _RealType1 > & __x) [friend]

Inserts a piecewise_constant_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A piecewise_constant_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.819.4.2 template<typename _RealType = double> bool operator== (const piecewise_constant_distribution< _RealType > & __d1, const piecewise_constant_distribution< _RealType > & __d2) [friend]

Return true if two piecewise constant distributions have the same parameters.

Definition at line 5709 of file random.h.

4.819.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & __is, std::piecewise_constant_distribution< _RealType1 > & __x) [friend]

Extracts a piecewise_constant_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A piecewise_constant_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.820 std::piecewise_construct_t Struct Reference

4.820.1 Detailed Description

Tag type for piecewise construction of std::pair objects.

Definition at line 80 of file stl_pair.h.

The documentation for this struct was generated from the following file:

- stl_pair.h

4.821 std::piecewise_linear_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- template<typename _InputIteratorB , typename _InputIteratorW >
  piecewise_linear_distribution (_InputIteratorB __bfirst, _InputIteratorB __bend, _InputIteratorW __wbegin)
- template<typename _Func >
  piecewise_linear_distribution (initializer_list< _RealType > __bl, _Func __fw)
- template<typename _Func >
  piecewise_linear_distribution (size_t __nw, _RealType __xmin, _RealType __xmax, _Func __fw)
- **piecewise_linear_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- std::vector< double > densities () const
- std::vector< _RealType > intervals () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  piecewise_linear_distribution
  < _RealType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__param)

- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::piecewise_linear_-distribution< _RealType1 > &__x)
- bool operator== (const piecewise_linear_distribution &__d1, const piecewise_linear_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::piecewise_linear_distribution< _-RealType1 > &__x)

4.821.1 Detailed Description

template<typename _RealType = double>class std::piecewise_linear_distribution< _RealType >

A piecewise_linear_distribution random number distribution.

The formula for the piecewise linear probability mass function is

Definition at line 5774 of file random.h.

4.821.2 Member Typedef Documentation

4.821.2.1 template<typename _RealType = double> typedef _RealType std::piecewise_linear_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 5777 of file random.h.

4.821.3 Member Function Documentation

4.821.3.1 template<typename _RealType = double> std::vector<double> std::piecewise_linear_distribution< _RealType >::densities ( ) const [inline]

Return a vector of the probability densities of the distribution.

Definition at line 5901 of file random.h.

References std::vector< _Tp, _Alloc >::empty().

4.821.3.2 template<typename _RealType = double> std::vector<_RealType> std::piecewise_linear_distribution< _RealType >::intervals ( ) const [inline]

Return the intervals of the distribution.

Definition at line 5884 of file random.h.

References std::vector< _Tp, _Alloc >::empty().

4.821.3.3 template<typename _RealType = double> result_type std::piecewise_linear_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 5936 of file random.h.

References std::vector< _Tp, _Alloc >::back(), and std::vector< _Tp, _Alloc >::empty().

4.821.3.4 template<typename _RealType = double> result_type std::piecewise_linear_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 5926 of file random.h.

References std::vector< _Tp, _Alloc >::empty(), and std::vector< _Tp, _Alloc >::front().

4.821.3.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::piecewise_linear_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 5947 of file random.h.

4.821.3.6 template<typename _RealType = double> param_type std::piecewise_linear_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 5911 of file random.h.

4.821.3.7 template<typename _RealType = double> void std::piecewise_linear_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 5919 of file random.h.

4.821.3.8 template<typename _RealType = double> void std::piecewise_linear_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 5877 of file random.h.

4.821.4 Friends And Related Function Documentation

4.821.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::piecewise_linear_distribution< _RealType1 > & *__x*) [friend]

Inserts a piecewise_linear_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A piecewise_linear_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.821.4.2 template<typename _RealType = double> bool operator== (const piecewise_linear_distribution< _RealType > & *__d1*, const piecewise_linear_distribution< _RealType > & *__d2*) [friend]

Return true if two piecewise linear distributions have the same parameters.

Definition at line 5982 of file random.h.

4.821.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::piecewise_linear_distribution< _RealType1 > & *__x*) [friend]

Extracts a piecewise_linear_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A piecewise_linear_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.822 std::plus< _Tp > Struct Template Reference

Inheritance diagram for std::plus< _Tp >:



Public Types

- typedef _Tp first_argument_type
- typedef _Tp result_type
- typedef _Tp second_argument_type

Public Member Functions

- constexpr _Tp **operator()** (const _Tp &__x, const _Tp &__y) const

4.822.1 Detailed Description

template<typename _Tp = void>struct std::plus< _Tp >

One of the math functors.

Definition at line 147 of file stl_function.h.

4.822.2 Member Typedef Documentation

4.822.2.1 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.822.2.2 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.822.2.3 typedef _Tp std::binary_function< _Tp , _Tp , _Tp >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.823 __gnu_pbds::point_invalidation_guarantee Struct Reference

Inheritance diagram for __gnu_pbds::point_invalidation_guarantee:

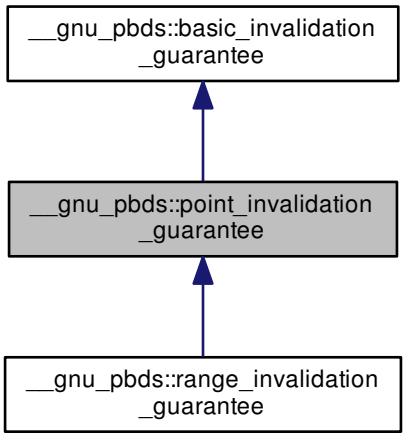

4.823.1 Detailed Description

Signifies an invalidation guarantee that includes all those of its base, and additionally, that any point-type iterator, pointer, or reference to a container object's mapped value type is valid as long as its corresponding entry has not be erased, regardless of modifications to the container object.

Definition at line 103 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.824 std::pointer_to_binary_function< _Arg1, _Arg2, _Result > Class Template Reference

Inheritance diagram for std::pointer_to_binary_function< _Arg1, _Arg2, _Result >:



Public Types

- typedef _Arg1 first_argument_type
- typedef _Result result_type
- typedef _Arg2 second_argument_type

Public Member Functions

- **pointer_to_binary_function** (_Result(*__x)(_Arg1, _Arg2))
- _Result **operator()** (_Arg1 __x, _Arg2 __y) const

Protected Attributes

- _Result(* **_M_ptr**)(_Arg1, _Arg2)

4.824.1 Detailed Description

template<typename _Arg1, typename _Arg2, typename _Result>class std::pointer_to_binary_function< _Arg1, _Arg2, _Result >

One of the adaptors for function pointers.

Definition at line 1105 of file stl_function.h.

4.824.2 Member Typedef Documentation

4.824.2.1 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Arg1 std::binary_function< _Arg1, _Arg2, _Result >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.824.2.2 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Result std::binary_function< _Arg1, _Arg2, _Result >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.824.2.3 template<typename _Arg1, typename _Arg2, typename _Result> typedef _Arg2 std::binary_function< _Arg1, _Arg2, _Result >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.825 std::pointer_to_unary_function< _Arg, _Result > Class Template Reference

Inheritance diagram for std::pointer_to_unary_function< _Arg, _Result >:



Public Types

- typedef _Arg argument_type
- typedef _Result result_type

Public Member Functions

- **pointer_to_unary_function** (_Result(*__x)(_Arg))
- _Result **operator()** (_Arg __x) const

Protected Attributes

- _Result(* **_M_ptr**)(_Arg)

4.825.1 Detailed Description

template<typename _Arg, typename _Result>class std::pointer_to_unary_function< _Arg, _Result >

One of the adaptors for function pointers.

Definition at line 1080 of file stl_function.h.

4.825.2 Member Typedef Documentation

4.825.2.1 template<typename _Arg, typename _Result> typedef _Arg std::unary_function< _Arg, _Result >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.825.2.2 template<typename _Arg, typename _Result> typedef _Result std::unary_function< _Arg, _Result >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.826 std::pointer_traits< _Ptr > Struct Template Reference

Public Types

- using difference_type = __detected_or_t< ptrdiff_t, __difference_type, _Ptr >
- using element_type = __detected_or_t< __get_first_arg_t< _Ptr >, __element_type, _Ptr >
- using pointer = _Ptr
- template<typename _Up >
  using rebind = typename __rebind< _Ptr, _Up >::type

Static Public Member Functions

- static _Ptr **pointer_to** (__make_not_void< element_type > &__e)

4.826.1 Detailed Description

template<typename _Ptr>struct std::pointer_traits< _Ptr >

Uniform interface to all pointer-like types.

Definition at line 83 of file ptr_traits.h.

4.826.2 Member Typedef Documentation

4.826.2.1 template<typename _Ptr> using std::pointer_traits< _Ptr >::difference_type = __detected_or_t<ptrdiff_t, __difference_type, _Ptr>

The type used to represent the difference between two pointers.

Definition at line 109 of file ptr_traits.h.

4.826.2.2 template<typename _Ptr> using std::pointer_traits< _Ptr >::element_type = __detected_or_t<__get_first_arg_t<_Ptr>, __element_type, _Ptr>

The type pointed to.

Definition at line 105 of file ptr_traits.h.

4.826.2.3 template<typename _Ptr> using std::pointer_traits< _Ptr >::pointer = _Ptr

The pointer type.

Definition at line 101 of file ptr_traits.h.

4.826.2.4 template<typename _Ptr> template<typename _Up > using std::pointer_traits< _Ptr >::rebind = typename __rebind<_Ptr, _Up>::type

A pointer to a different type.

Definition at line 113 of file ptr_traits.h.

The documentation for this struct was generated from the following file:

- ptr_traits.h

4.827 std::pointer_traits< _Tp * > Struct Template Reference

Public Types

- typedef ptrdiff_t difference_type
- typedef _Tp element_type
- typedef _Tp * pointer
- template<typename _Up >
  using **rebind** = _Up *

Static Public Member Functions

- static constexpr pointer pointer_to (__make_not_void< element_type > &__r) noexcept

4.827.1 Detailed Description

template<typename _Tp>struct std::pointer_traits< _Tp * >

Partial specialization for built-in pointers.

Definition at line 128 of file ptr_traits.h.

4.827.2 Member Typedef Documentation

4.827.2.1 template<typename _Tp> typedef ptrdiff_t std::pointer_traits< _Tp * >::difference_type

Type used to represent the difference between two pointers.

Definition at line 135 of file ptr_traits.h.

4.827.2.2 template<typename _Tp> typedef _Tp std::pointer_traits< _Tp * >::element_type

The type pointed to.

Definition at line 133 of file ptr_traits.h.

4.827.2.3 template<typename _Tp> typedef _Tp* std::pointer_traits< _Tp * >::pointer

The pointer type.

Definition at line 131 of file ptr_traits.h.

4.827.3 Member Function Documentation

4.827.3.1 template<typename _Tp> static constexpr pointer std::pointer_traits< _Tp * >::pointer_to (__make_not_void< element_type > & __r) [inline], [static], [noexcept]

Obtain a pointer to an object.

Parameters

__r	A reference to an object of type `element_type`

Returns

`addressof(__r)`

Definition at line 146 of file ptr_traits.h.

References std::addressof().

The documentation for this struct was generated from the following file:

- ptr_traits.h

4.828 std::poisson_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- **poisson_distribution** (double __mean)
- **poisson_distribution** (const param_type &__p)

- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- double mean () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  poisson_distribution< _IntType >
  ::result_type operator() (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::poisson_distribution< _IntType1 > &__x)
- bool operator== (const poisson_distribution &__d1, const poisson_distribution &__d2)
- template<typename _IntType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::poisson_distribution< _IntType1 > &__x)

4.828.1 Detailed Description

template<typename _IntType = int>class std::poisson_distribution< _IntType >

A discrete Poisson random number distribution.

The formula for the Poisson probability density function is $p(i|\mu) = \frac{\mu^i}{i!}e^{-\mu}$ where μ is the parameter of the distribution.

Definition at line 4410 of file random.h.

4.828.2 Member Typedef Documentation

4.828.2.1 template<typename _IntType = int> typedef _IntType std::poisson_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 4413 of file random.h.

4.828.3 Member Function Documentation

4.828.3.1 template<typename _IntType = int> result_type std::poisson_distribution< _IntType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 4514 of file random.h.

References std::numeric_limits< _Tp >::max().

4.828.3.2 template<typename _IntType = int> double std::poisson_distribution< _IntType >::mean ( ) const [inline]

Returns the distribution parameter mean.

Definition at line 4485 of file random.h.

4.828.3.3 template<typename _IntType = int> result_type std::poisson_distribution< _IntType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 4507 of file random.h.

4.828.3.4 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > poisson_distribution<_IntType>::result_type std::poisson_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng,* const param_type & *__param*)

A rejection algorithm when mean >= 12 and a simple method based upon the multiplication of uniform random variates otherwise. NB: The former is available only if _GLIBCXX_USE_C99_MATH_TR1 is defined.

Reference: Devroye, L. Non-Uniform Random Variates Generation. Springer-Verlag, New York, 1986, Ch. X, Sects. 3.3 & 3.4 (+ Errata!).

Definition at line 1269 of file bits/random.tcc.

References std::abs(), std::numeric_limits< _Tp >::epsilon(), std::log(), and std::numeric_limits< _Tp >::max().

4.828.3.5 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::poisson_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 4522 of file random.h.

4.828.3.6 template<typename _IntType = int> param_type std::poisson_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 4492 of file random.h.

4.828.3.7 template<typename _IntType = int> void std::poisson_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 4500 of file random.h.

4.828.3.8 template<typename _IntType = int> void std::poisson_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 4478 of file random.h.

References std::normal_distribution< _RealType >::reset().

4.828.4 Friends And Related Function Documentation

4.828.4.1 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os*, const std::poisson_distribution< _IntType1 > & *__x*) [friend]

Inserts a poisson_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A poisson_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.828.4.2 template<typename _IntType = int> bool operator== (const poisson_distribution< _IntType > & *__d1*, const poisson_distribution< _IntType > & *__d2*) [friend]

Return true if two Poisson distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 4558 of file random.h.

4.828.4.3 template<typename _IntType = int> template<typename _IntType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::poisson_distribution< _IntType1 > & *__x*) [friend]

Extracts a poisson_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A poisson_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.829 __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc > Class Template Reference

Inherits type< _Tv, Cmp_Fn, _Alloc, Tag >.

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef base_type::const_iterator **const_iterator**
- typedef __rebind_va::const_pointer **const_pointer**
- typedef __rebind_va::const_reference **const_reference**
- typedef Tag **container_category**
- typedef allocator_type::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef __rebind_va::pointer **pointer**
- typedef __rebind_va::reference **reference**
- typedef allocator_type::size_type **size_type**
- typedef _Tv **value_type**

Public Member Functions

- priority_queue (const cmp_fn &r_cmp_fn)
- template<typename It >
  priority_queue (It first_it, It last_it)
- template<typename It >
  priority_queue (It first_it, It last_it, const cmp_fn &r_cmp_fn)
- **priority_queue** (const priority_queue &other)
- priority_queue & **operator=** (const priority_queue &other)
- void **swap** (priority_queue &other)

4.829.1 Detailed Description

template<typename _Tv, typename Cmp_Fn = std::less<_Tv>, typename Tag = pairing_heap_tag, typename _Alloc = std::allocator<char>>class __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >

A priority queue composed of one specific heap policy.

Template Parameters

_Tv	Value type.
Cmp_Fn	Comparison functor.
Tag	Instantiating data structure type, see container_tag.

_Alloc	Allocator type.

Base is dispatched at compile time via Tag, from the following choices: binary_heap_tag, binomial_heap_tag, pairing_heap_tag, rc_binomial_heap_tag, thin_heap_tag

Base choices are: detail::binary_heap, detail::binomial_heap, detail::pairing_heap, detail::rc_binomial_heap, detail::thin_heap.

Definition at line 83 of file priority_queue.hpp.

The documentation for this class was generated from the following file:

- priority_queue.hpp

4.830 std::priority_queue< _Tp, _Sequence, _Compare > Class Template Reference

Public Types

- typedef _Sequence::const_reference **const_reference**
- typedef _Sequence **container_type**
- typedef _Sequence::reference **reference**
- typedef _Sequence::size_type **size_type**
- typedef _Compare **value_compare**
- typedef _Sequence::value_type **value_type**

Public Member Functions

- template<typename _Seq = _Sequence, typename _Requires = typename enable_if<__and_<is_default_constructible<_Compare>, is_default_constructible<_Seq>>::value>::type>
  priority_queue ()
- **priority_queue** (const _Compare &__x, const _Sequence &__s)
- **priority_queue** (const _Compare &__x, _Sequence &&__s=_Sequence())
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (const _Compare &__x, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (const _Compare &__x, const _Sequence &__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (const _Compare &__x, _Sequence &&__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (const priority_queue &__q, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  priority_queue (priority_queue &&__q, const _Alloc &__a)
- template<typename _InputIterator >
  priority_queue (_InputIterator __first, _InputIterator __last, const _Compare &__x, const _Sequence &__s)
- template<typename _InputIterator >
  priority_queue (_InputIterator __first, _InputIterator __last, const _Compare &__x=_Compare(), _Sequence &&__s=_Sequence())
- template<typename... _Args>
  void **emplace** (_Args &&...__args)
- bool empty () const
- void pop ()

- void push (const value_type &__x)
- void **push** (value_type &&__x)
- size_type size () const
- void **swap** (priority_queue &__pq) noexcept(__and_< //c++1z or gnu++11__is_nothrow_swappable< _Sequence >, __is_nothrow_swappable< _Compare > >::value)
- const_reference top () const

Protected Attributes

- _Sequence **c**
- _Compare **comp**

4.830.1 Detailed Description

template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>>class std::priority_queue< _Tp, _Sequence, _Compare >

A standard container automatically sorting its contents.

Template Parameters

_Tp	Type of element.
_Sequence	Type of underlying sequence, defaults to vector<_Tp>.
_Compare	Comparison function object type, defaults to less<_Sequence::value_type>.

This is not a true container, but an *adaptor*. It holds another container, and provides a wrapper interface to that container. The wrapper is what enforces priority-based sorting and queue behavior. Very few of the standard container/sequence interface requirements are met (e.g., iterators).

The second template parameter defines the type of the underlying sequence/container. It defaults to std::vector, but it can be any type that supports `front()`, `push_back`, `pop_back`, and random-access iterators, such as std::deque or an appropriate user-defined type.

The third template parameter supplies the means of making priority comparisons. It defaults to `less<value_type>` but can be anything defining a strict weak ordering.

Members not found in *normal* containers are `container_type`, which is a typedef for the second Sequence parameter, and `push`, `pop`, and `top`, which are standard queue operations.

Note

No equality/comparison operators are provided for priority_queue.
Sorting of the elements takes place as they are added to, and removed from, the priority_queue using the priority_queue's member functions. If you access the elements by other means, and change their data such that the sorting order would be different, the priority_queue will not re-sort the elements for you. (How could it know to do so?)

Definition at line 456 of file stl_queue.h.

4.830.2 Constructor & Destructor Documentation

4.830.2.1 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> template<typename _Seq = _Sequence, typename _Requires = typename enable_if<__and_<is_default_constructible<_Compare>, is_default_constructible<_Seq>>::value>::type> std::priority_queue< _Tp, _Sequence, _Compare >::priority_queue ( ) [inline]

Default constructor creates no elements.

Definition at line 514 of file stl_queue.h.

4.830.2.2 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> template<typename _InputIterator > std::priority_queue< _Tp, _Sequence, _Compare >::priority_queue (_InputIterator *__first,* _InputIterator *__last,* const _Compare & *__x,* const _Sequence & *__s*) [inline]

Builds a queue from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__x	A comparison functor describing a strict weak ordering.
__s	An initial sequence with which to start.

Begins by copying *__s*, inserting a copy of the elements from [first,last) into the copy of *__s*, then ordering the copy according to *__x*.

For more information on function objects, see the documentation on functor base classes.

Definition at line 586 of file stl_queue.h.

References std::make_heap().

4.830.3 Member Function Documentation

4.830.3.1 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> bool std::priority_queue< _Tp, _Sequence, _Compare >::empty ( ) const [inline]

Returns true if the queue is empty.

Definition at line 612 of file stl_queue.h.

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

4.830.3.2 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> void std::priority_queue< _Tp, _Sequence, _Compare >::pop ( ) [inline]

Removes first element.

This is a typical queue operation. It shrinks the queue by one. The time complexity of the operation depends on the underlying sequence.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop() is called.

Definition at line 675 of file stl_queue.h.

References std::pop_heap().

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

4.830.3.3 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> void std::priority_queue< _Tp, _Sequence, _Compare >::push (const value_type & __x) [inline]

Add data to the queue.

Parameters

__x	Data to be added.

This is a typical queue operation. The time complexity of the operation depends on the underlying sequence.

Definition at line 640 of file stl_queue.h.

References std::push_heap().

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

4.830.3.4 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> size_type std::priority_queue< _Tp, _Sequence, _Compare >::size ( ) const [inline]

Returns the number of elements in the queue.

Definition at line 617 of file stl_queue.h.

4.830.3.5 template<typename _Tp, typename _Sequence = vector<_Tp>, typename _Compare = less<typename _Sequence::value_type>> const_reference std::priority_queue< _Tp, _Sequence, _Compare >::top ( ) const [inline]

Returns a read-only (constant) reference to the data at the first element of the queue.

Definition at line 625 of file stl_queue.h.

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

The documentation for this class was generated from the following file:

- stl_queue.h

4.831 __gnu_pbds::priority_queue_tag Struct Reference

Inheritance diagram for __gnu_pbds::priority_queue_tag:

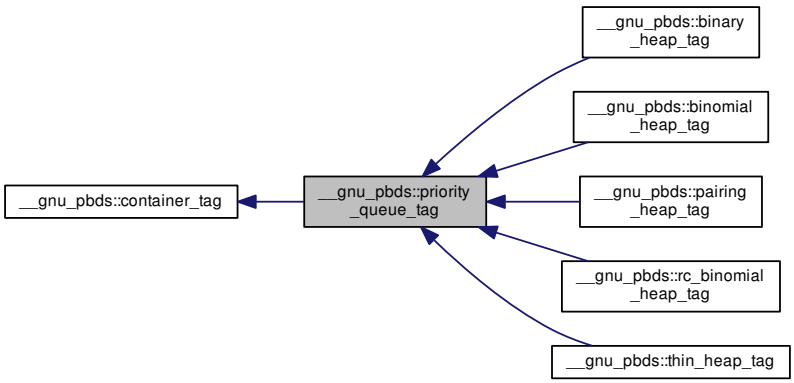

4.831.1 Detailed Description

Basic priority-queue.

Definition at line 171 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.832 __gnu_pbds::detail::probe_fn_base< _Alloc > Class Template Reference

4.832.1 Detailed Description

template<typename _Alloc>class __gnu_pbds::detail::probe_fn_base< _Alloc >

Probe functor base.

Definition at line 52 of file probe_fn_base.hpp.

The documentation for this class was generated from the following file:

- probe_fn_base.hpp

4.833 __gnu_cxx::project1st< _Arg1, _Arg2 > Struct Template Reference

Inherits __gnu_cxx::_Project1st< _Arg1, _Arg2 >.

Public Types

- typedef _Arg1 first_argument_type
- typedef _Arg1 result_type
- typedef _Arg2 second_argument_type

Public Member Functions

- _Arg1 **operator()** (const _Arg1 &__x, const _Arg2 &) const

4.833.1 Detailed Description

template<class _Arg1, class _Arg2>struct __gnu_cxx::project1st< _Arg1, _Arg2 >

An SGI extension .

Definition at line 229 of file ext/functional.

4.833.2 Member Typedef Documentation

4.833.2.1 typedef _Arg1 std::binary_function< _Arg1, _Arg2, _Arg1 >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.833.2.2 typedef _Arg1 std::binary_function< _Arg1, _Arg2, _Arg1 >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.833.2.3 typedef _Arg2 std::binary_function< _Arg1, _Arg2, _Arg1 >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- ext/functional

4.834 __gnu_cxx::project2nd< _Arg1, _Arg2 > Struct Template Reference

Inherits __gnu_cxx::_Project2nd< _Arg1, _Arg2 >.

Public Types

- typedef _Arg1 first_argument_type
- typedef _Arg2 result_type
- typedef _Arg2 second_argument_type

Public Member Functions

- _Arg2 **operator()** (const _Arg1 &, const _Arg2 &__y) const

4.834.1 Detailed Description

template<class _Arg1, class _Arg2>struct __gnu_cxx::project2nd< _Arg1, _Arg2 >

An SGI extension .

Definition at line 233 of file ext/functional.

4.834.2 Member Typedef Documentation

4.834.2.1 typedef _Arg1 std::binary_function< _Arg1, _Arg2, _Arg2 >::first_argument_type [inherited]

`first_argument_type` is the type of the first argument

Definition at line 121 of file stl_function.h.

4.834.2.2 typedef _Arg2 std::binary_function< _Arg1, _Arg2, _Arg2 >::result_type [inherited]

`result_type` is the return type

Definition at line 127 of file stl_function.h.

4.834.2.3 typedef _Arg2 std::binary_function< _Arg1, _Arg2, _Arg2 >::second_argument_type [inherited]

`second_argument_type` is the type of the second argument

Definition at line 124 of file stl_function.h.

The documentation for this struct was generated from the following file:

- ext/functional

4.835 std::promise< _Res > Class Template Reference

Public Member Functions

- **promise** (promise &&__rhs) noexcept
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &__a)
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &, promise &&__rhs)
- **promise** (const promise &)=delete
- future< _Res > **get_future** ()
- promise & **operator=** (promise &&__rhs) noexcept
- promise & **operator=** (const promise &)=delete
- void **set_exception** (exception_ptr __p)
- void **set_exception_at_thread_exit** (exception_ptr __p)
- void **set_value** (const _Res &__r)
- void **set_value** (_Res &&__r)
- void **set_value_at_thread_exit** (const _Res &__r)
- void **set_value_at_thread_exit** (_Res &&__r)
- void **swap** (promise &__rhs) noexcept

Friends

- template<typename , typename >
  class **_State::_Setter**

4.835.1 Detailed Description

template<typename _Res>class std::promise< _Res >

Primary template for promise.

Definition at line 134 of file future.

The documentation for this class was generated from the following file:

- future

4.836 std::promise< _Res & > Class Template Reference

Public Member Functions

- **promise** (promise &&__rhs) noexcept
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &__a)
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &, promise &&__rhs)
- **promise** (const promise &)=delete
- future< _Res & > **get_future** ()
- promise & **operator=** (promise &&__rhs) noexcept
- promise & **operator=** (const promise &)=delete
- void **set_exception** (exception_ptr __p)
- void **set_exception_at_thread_exit** (exception_ptr __p)
- void **set_value** (_Res &__r)
- void **set_value_at_thread_exit** (_Res &__r)
- void **swap** (promise &__rhs) noexcept

Friends

- template<typename , typename >
  class **_State::_Setter**

4.836.1 Detailed Description

template<typename _Res>class std::promise< _Res & >

Partial specialization for promise<R&>

Definition at line 1157 of file future.

The documentation for this class was generated from the following file:

- future

4.837 std::promise< void > Class Template Reference

Public Member Functions

- **promise** (promise &&__rhs) noexcept
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &__a)
- template<typename _Allocator >
  promise (allocator_arg_t, const _Allocator &, promise &&__rhs)
- **promise** (const promise &)=delete
- future< void > **get_future** ()
- promise & **operator=** (promise &&__rhs) noexcept
- promise & **operator=** (const promise &)=delete
- void **set_exception** (exception_ptr __p)
- void **set_exception_at_thread_exit** (exception_ptr __p)

- void **set_value** ()
- void **set_value_at_thread_exit** ()
- void **swap** (promise &__rhs) noexcept

Friends

- template<typename , typename >
  class **_State::_Setter**

4.837.1 Detailed Description

template<><class std::promise< void >

Explicit specialization for promise<void>

Definition at line 1247 of file future.

The documentation for this class was generated from the following file:

- future

4.838 std::experimental::fundamentals_v2::propagate_const< _Tp > Class Template Reference

Public Types

- typedef remove_reference_t
  < decltype(*std::declval< _Tp & >))> **element_type**

Public Member Functions

- **propagate_const** (const propagate_const &__p)=delete
- constexpr **propagate_const** (propagate_const &&__p)=default
- template<typename _Up , typename enable_if< __and_< is_constructible< _Tp, _Up && >, is_convertible< _Up &&, _Tp >>::value, bool >::type = true>
  constexpr **propagate_const** (propagate_const< _Up > &&__pu)
- template<typename _Up , typename enable_if< __and_< is_constructible< _Tp, _Up && >, __not_< is_convertible< _Up &&, _Tp >>>::value, bool >::type = false>
  constexpr **propagate_const** (propagate_const< _Up > &&__pu)
- template<typename _Up , typename enable_if< __and_< is_constructible< _Tp, _Up && >, is_convertible< _Up &&, _Tp >, __not_< __is_propagate_const< typename decay< _Up >::type >> >::value, bool >::type = true>
  constexpr **propagate_const** (_Up &&__u)
- template<typename _Up , typename enable_if< __and_< is_constructible< _Tp, _Up && >, __not_< is_convertible< _Up &&, _Tp >>, __not_< __is_propagate_const< typename decay< _Up >::type >> >::value, bool >::type = false>
  constexpr **propagate_const** (_Up &&__u)
- constexpr const element_type * **get** () const
- constexpr element_type * **get** ()
- constexpr **operator bool** () const
- template<typename _Up = _Tp, typename enable_if< __or_< is_pointer< _Up >, is_convertible< _Up, const element_type * > >::value, bool >::type = true>
  constexpr **operator const element_type** * () const

- template<typename _Up = _Tp, typename enable_if< __or_< is_pointer< _Up >, is_convertible< _Up, const element_type * > >::value, bool >::type = true>
  constexpr **operator element_type** * ()
- constexpr const element_type & **operator*** () const
- constexpr element_type & **operator*** ()
- constexpr const element_type * **operator->** () const
- constexpr element_type * **operator->** ()
- propagate_const & **operator=** (const propagate_const &__p)=delete
- constexpr propagate_const & **operator=** (propagate_const &&__p)=default
- template<typename _Up , typename = typename enable_if<is_convertible<_Up&&, _Tp>::value>::type>
  constexpr propagate_const & **operator=** (propagate_const< _Up > &&__pu)
- template<typename _Up , typename = typename enable_if<__and_<is_convertible<_Up&&, _Tp>, __not_<__is_propagate_const< typename decay<_Up>::type>> >::value>::type>
  constexpr propagate_const & **operator=** (_Up &&__u)
- constexpr void **swap** (propagate_const &__pt) noexcept(__is_nothrow_swappable< _Tp >::value)

Friends

- template<typename _Up >
  constexpr const _Up & **get_underlying** (const propagate_const< _Up > &__pt) noexcept
- template<typename _Up >
  constexpr _Up & **get_underlying** (propagate_const< _Up > &__pt) noexcept

4.838.1 Detailed Description

template<typename _Tp>class std::experimental::fundamentals_v2::propagate_const< _Tp >

Const-propagating wrapper.

Definition at line 64 of file propagate_const.

The documentation for this class was generated from the following file:

- propagate_const

4.839 __gnu_pbds::quadratic_probe_fn< Size_Type > Class Template Reference

Public Types

- typedef Size_Type **size_type**

Public Member Functions

- void **swap** (quadratic_probe_fn< Size_Type > &other)

Protected Member Functions

- size_type operator() (size_type i) const

4.839.1 Detailed Description

template<typename Size_Type = std::size_t>class __gnu_pbds::quadratic_probe_fn< Size_Type >

A probe sequence policy using square increments.

Definition at line 85 of file hash_policy.hpp.

4.839.2 Member Function Documentation

4.839.2.1 template<typename Size_Type > quadratic_probe_fn< Size_Type >::size_type __gnu_pbds::quadratic_probe_fn< Size_Type >::operator() (size_type *i*) const [inline], [protected]

Returns the i-th offset from the hash value.

Definition at line 53 of file hash_policy.hpp.

The documentation for this class was generated from the following file:

- hash_policy.hpp

4.840 std::queue< _Tp, _Sequence > Class Template Reference

Public Types

- typedef _Sequence::const_reference **const_reference**
- typedef _Sequence **container_type**
- typedef _Sequence::reference **reference**
- typedef _Sequence::size_type **size_type**
- typedef _Sequence::value_type **value_type**

Public Member Functions

- template<typename _Seq = _Sequence, typename _Requires = typename enable_if<is_default_constructible<_Seq>::value>::type> queue ()
- **queue** (const _Sequence &__c)
- **queue** (_Sequence &&__c)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>> **queue** (const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>> **queue** (const _Sequence &__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>> **queue** (_Sequence &&__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>> **queue** (const queue &__q, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>> **queue** (queue &&__q, const _Alloc &__a)
- reference back ()
- const_reference back () const
- template<typename... _Args> void **emplace** (_Args &&...__args)

- bool empty () const
- reference front ()
- const_reference front () const
- void pop ()
- void push (const value_type &__x)
- void **push** (value_type &&__x)
- size_type size () const
- void **swap** (queue &__q) noexcept(__is_nothrow_swappable< _Sequence >::value)

Protected Attributes

- _Sequence c

Friends

- template<typename _Tp1 , typename _Seq1 >
  bool **operator**< (const queue< _Tp1, _Seq1 > &, const queue< _Tp1, _Seq1 > &)
- template<typename _Tp1 , typename _Seq1 >
  bool **operator==** (const queue< _Tp1, _Seq1 > &, const queue< _Tp1, _Seq1 > &)

4.840.1 Detailed Description

template<typename _Tp, typename _Sequence = deque<_Tp>>class std::queue< _Tp, _Sequence >

A standard container giving FIFO behavior.

Template Parameters

_Tp	Type of element.
_Sequence	Type of underlying sequence, defaults to deque<_Tp>.

Meets many of the requirements of a `container`, but does not define anything to do with iterators. Very few of the other standard container interfaces are defined.

This is not a true container, but an *adaptor*. It holds another container, and provides a wrapper interface to that container. The wrapper is what enforces strict first-in-first-out queue behavior.

The second template parameter defines the type of the underlying sequence/container. It defaults to std::deque, but it can be any type that supports `front`, `back`, `push_back`, and `pop_front`, such as std::list or an appropriate user-defined type.

Members not found in *normal* containers are `container_type`, which is a typedef for the second Sequence parameter, and `push` and `pop`, which are standard queue/FIFO operations.

Definition at line 96 of file stl_queue.h.

4.840.2 Constructor & Destructor Documentation

4.840.2.1 template<typename _Tp, typename _Sequence = deque<_Tp>> template<typename _Seq = _Sequence, typename _Requires = typename enable_if<is_default_constructible<_Seq>::value>::type> std::queue< _Tp, _Sequence >::queue ( ) [inline]

Default constructor creates no elements.

Definition at line 166 of file stl_queue.h.

4.840.3 Member Function Documentation

4.840.3.1 template<typename _Tp, typename _Sequence = deque<_Tp>> reference std::queue< _Tp, _Sequence >::back ( ) [inline]

Returns a read/write reference to the data at the last element of the queue.

Definition at line 238 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.2 template<typename _Tp, typename _Sequence = deque<_Tp>> const_reference std::queue< _Tp, _Sequence >::back ( ) const [inline]

Returns a read-only (constant) reference to the data at the last element of the queue.

Definition at line 249 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.3 template<typename _Tp, typename _Sequence = deque<_Tp>> bool std::queue< _Tp, _Sequence >::empty ( ) const [inline]

Returns true if the queue is empty.

Definition at line 203 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.4 template<typename _Tp, typename _Sequence = deque<_Tp>> reference std::queue< _Tp, _Sequence >::front ( ) [inline]

Returns a read/write reference to the data at the first element of the queue.

Definition at line 216 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.5 template<typename _Tp, typename _Sequence = deque<_Tp>> const_reference std::queue< _Tp, _Sequence >::front ( ) const [inline]

Returns a read-only (constant) reference to the data at the first element of the queue.

Definition at line 227 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.6 template<typename _Tp, typename _Sequence = deque<_Tp>> void std::queue< _Tp, _Sequence >::pop ( ) [inline]

Removes first element.

This is a typical queue operation. It shrinks the queue by one. The time complexity of the operation depends on the underlying sequence.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop() is called.

Definition at line 298 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.7 template<typename _Tp, typename _Sequence = deque<_Tp>> void std::queue< _Tp, _Sequence >::push (const value_type & __x) [inline]

Add data to the end of the queue.

Parameters

__x	Data to be added.

This is a typical queue operation. The function creates an element at the end of the queue and assigns the given data to it. The time complexity of the operation depends on the underlying sequence.

Definition at line 265 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.3.8 template<typename _Tp, typename _Sequence = deque<_Tp>> size_type std::queue< _Tp, _Sequence >::size ( ) const [inline]

Returns the number of elements in the queue.

Definition at line 208 of file stl_queue.h.

References std::queue< _Tp, _Sequence >::c.

4.840.4 Member Data Documentation

4.840.4.1 template<typename _Tp, typename _Sequence = deque<_Tp>> _Sequence std::queue< _Tp, _Sequence >::c [protected]

`c` is the underlying container.

Definition at line 153 of file stl_queue.h.

Referenced by std::queue< _Tp, _Sequence >::back(), std::queue< _Tp, _Sequence >::empty(), std::queue< _Tp, _Sequence >::front(), std::operator<(), std::operator==(), std::queue< _Tp, _Sequence >::pop(), std::queue< _Tp, _Sequence >::push(), and std::queue< _Tp, _Sequence >::size().

The documentation for this class was generated from the following file:

- stl_queue.h

4.841 __gnu_parallel::quicksort_tag Struct Reference

Inheritance diagram for __gnu_parallel::quicksort_tag:

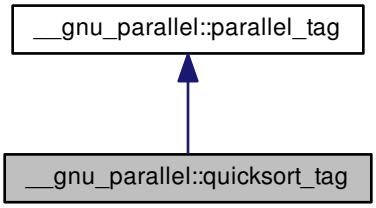

Public Member Functions

- **quicksort_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.841.1 Detailed Description

Forces parallel sorting using unbalanced quicksort at compile time.

Definition at line 155 of file tags.h.

4.841.2 Member Function Documentation

4.841.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.841.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.842 std::random_access_iterator_tag Struct Reference

Inheritance diagram for std::random_access_iterator_tag:

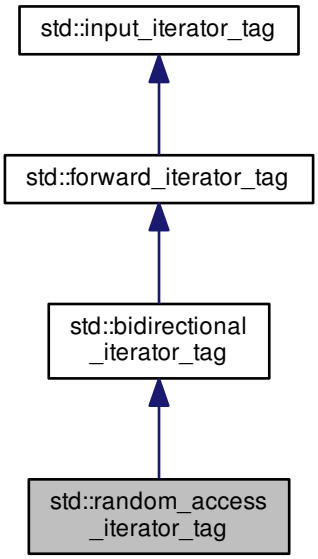

4.842.1 Detailed Description

Random-access iterators support a superset of bidirectional iterator operations.

Definition at line 107 of file stl_iterator_base_types.h.

The documentation for this struct was generated from the following file:

- stl_iterator_base_types.h

4.843 __gnu_cxx::random_condition Struct Reference

Inheritance diagram for __gnu_cxx::random_condition:



Classes

- struct always_adjustor
- struct group_adjustor
- struct never_adjustor

Public Member Functions

- void **seed** (unsigned long __s)

Static Public Member Functions

- static void **set_probability** (double __p)
- static void **throw_conditionally** ()

4.843.1 Detailed Description

Base class for random probability control and throw.

Definition at line 488 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.844 std::random_device Class Reference

Public Types

- typedef unsigned int result_type

Public Member Functions

- **random_device** (const std::string &__token)
- **random_device** (const random_device &)=delete
- double **entropy** () const noexcept
- result_type **operator()** ()
- void **operator=** (const random_device &)=delete

Static Public Member Functions

- static constexpr result_type **max** ()
- static constexpr result_type **min** ()

4.844.1 Detailed Description

A standard interface to a platform-specific non-deterministic random number generator (if any are available).

Definition at line 1599 of file random.h.

4.844.2 Member Typedef Documentation

4.844.2.1 typedef unsigned int std::random_device::result_type

The type of the generated random value.

Definition at line 1603 of file random.h.

The documentation for this class was generated from the following file:

- random.h

4.845 std::range_error Class Reference

Inheritance diagram for std::range_error:

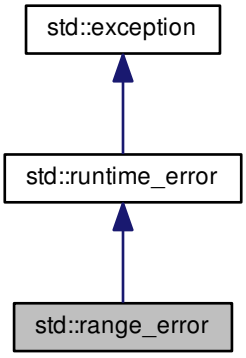

Public Member Functions

- **range_error** (const string &__arg) _GLIBCXX_TXN_SAFE
- **range_error** (const char *) _GLIBCXX_TXN_SAFE
- **range_error** (const range_error &)=default
- **range_error** (range_error &&)=default
- range_error & **operator=** (const range_error &)=default
- range_error & **operator=** (range_error &&)=default
- virtual const char * what () const noexcept

4.845.1 Detailed Description

Thrown to indicate range errors in internal computations.

Definition at line 258 of file stdexcept.

4.845.2 Member Function Documentation

4.845.2.1 virtual const char* std::runtime_error::what ( ) const [virtual],[noexcept],[inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- stdexcept

4.846 __gnu_pbds::range_invalidation_guarantee Struct Reference

Inheritance diagram for __gnu_pbds::range_invalidation_guarantee:

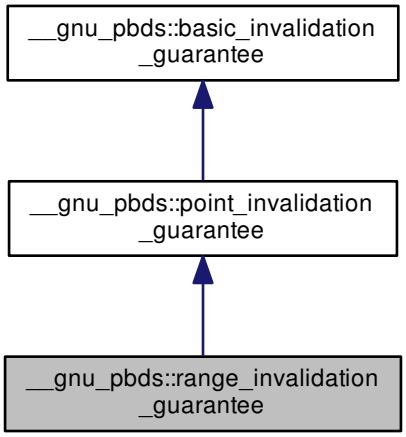

4.846.1 Detailed Description

Signifies an invalidation guarantee that includes all those of its base, and additionally, that any range-type iterator (including the returns of begin() and end()) is in the correct relative positions to other range-type iterators as long as its corresponding entry has not be erased, regardless of modifications to the container object.

Definition at line 114 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.847 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, Store_Hash > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, Store_Hash >:

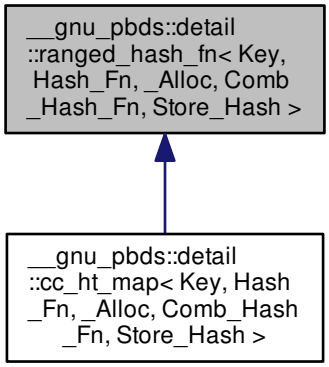

4.847.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Hash_Fn, bool Store_Hash>class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, Store_Hash >

Primary template.

Definition at line 56 of file ranged_hash_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_hash_fn.hpp

4.848 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, false > Class Template Reference

Inherits Hash_Fn, and Comb_Hash_Fn.

Protected Types

- typedef Comb_Hash_Fn **comb_hash_fn_base**
- typedef Hash_Fn **hash_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_hash_fn** (size_type)
- **ranged_hash_fn** (size_type, const Hash_Fn &)
- **ranged_hash_fn** (size_type, const Hash_Fn &, const Comb_Hash_Fn &)
- void **notify_resized** (size_type)
- size_type **operator()** (key_const_reference) const
- void **swap** (ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, false > &)

4.848.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Hash_Fn>class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, false >

Specialization 1 The client supplies a hash function and a ranged hash function, and requests that hash values not be stored.

Definition at line 72 of file ranged_hash_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_hash_fn.hpp

4.849 __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, true > Class Template Reference

Inherits Hash_Fn, and Comb_Hash_Fn.

Protected Types

- typedef Comb_Hash_Fn **comb_hash_fn_base**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef Hash_Fn **hash_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_hash_fn** (size_type)
- **ranged_hash_fn** (size_type, const Hash_Fn &)
- **ranged_hash_fn** (size_type, const Hash_Fn &, const Comb_Hash_Fn &)
- void **notify_resized** (size_type)
- comp_hash **operator()** (key_const_reference) const
- comp_hash **operator()** (key_const_reference, size_type) const
- void **swap** (ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, true > &)

4.849.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Hash_Fn>class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, true >

Specialization 2 The client supplies a hash function and a ranged hash function, and requests that hash values be stored.

Definition at line 154 of file ranged_hash_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_hash_fn.hpp

4.850 __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, false > Class Template Reference

Inherits Comb_Hash_Fn.

Protected Types

- typedef Comb_Hash_Fn **comb_hash_fn_base**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_hash_fn** (size_type)
- **ranged_hash_fn** (size_type, const Comb_Hash_Fn &)
- **ranged_hash_fn** (size_type, const null_type &, const Comb_Hash_Fn &)
- void **swap** (ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, false > &)

4.850.1 Detailed Description

template<typename Key, typename _Alloc, typename Comb_Hash_Fn>class __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, false >

Specialization 3 The client does not supply a hash function (by specifying null_type as the Hash_Fn parameter), and requests that hash values not be stored.

Definition at line 256 of file ranged_hash_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_hash_fn.hpp

4.851 __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, true > Class Template Reference

Inherits Comb_Hash_Fn.

Protected Types

- typedef Comb_Hash_Fn **comb_hash_fn_base**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_hash_fn** (size_type)
- **ranged_hash_fn** (size_type, const Comb_Hash_Fn &)
- **ranged_hash_fn** (size_type, const null_type &, const Comb_Hash_Fn &)
- void **swap** (ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, true > &)

4.851.1 Detailed Description

template<typename Key, typename _Alloc, typename Comb_Hash_Fn>class __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, true >

Specialization 4 The client does not supply a hash function (by specifying null_type as the Hash_Fn parameter), and requests that hash values be stored.

Definition at line 313 of file ranged_hash_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_hash_fn.hpp

4.852 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, Store_Hash > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, Store_Hash >:



4.852.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Probe_Fn, typename Probe_Fn, bool Store_Hash>class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, Store_Hash >

Primary template.

Definition at line 55 of file ranged_probe_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_probe_fn.hpp

4.853 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, false > Class Template Reference

Inherits Hash_Fn, Comb_Probe_Fn, and Probe_Fn.

Protected Types

- typedef Comb_Probe_Fn **comb_probe_fn_base**
- typedef Hash_Fn **hash_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef Probe_Fn **probe_fn_base**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_probe_fn** (size_type)
- **ranged_probe_fn** (size_type, const Hash_Fn &)
- **ranged_probe_fn** (size_type, const Hash_Fn &, const Comb_Probe_Fn &)
- **ranged_probe_fn** (size_type, const Hash_Fn &, const Comb_Probe_Fn &, const Probe_Fn &)
- void **notify_resized** (size_type)
- size_type **operator()** (key_const_reference) const
- size_type **operator()** (key_const_reference, size_type, size_type) const
- void **swap** (ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, false > &)

4.853.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Probe_Fn, typename Probe_Fn>class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, false >

Specialization 1 The client supplies a probe function and a ranged probe function, and requests that hash values not be stored.

Definition at line 71 of file ranged_probe_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_probe_fn.hpp

4.854 __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, true > Class Template Reference

Inherits Hash_Fn, Comb_Probe_Fn, and Probe_Fn.

Protected Types

- typedef Comb_Probe_Fn **comb_probe_fn_base**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef Hash_Fn **hash_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef Probe_Fn **probe_fn_base**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_probe_fn** (size_type)
- **ranged_probe_fn** (size_type, const Hash_Fn &)
- **ranged_probe_fn** (size_type, const Hash_Fn &, const Comb_Probe_Fn &)
- **ranged_probe_fn** (size_type, const Hash_Fn &, const Comb_Probe_Fn &, const Probe_Fn &)
- void **notify_resized** (size_type)
- comp_hash **operator()** (key_const_reference) const
- size_type **operator()** (key_const_reference, size_type, size_type) const
- size_type **operator()** (key_const_reference, size_type) const
- void **swap** (ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, true > &)

4.854.1 Detailed Description

template<typename Key, typename Hash_Fn, typename _Alloc, typename Comb_Probe_Fn, typename Probe_Fn>class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, true >

Specialization 2- The client supplies a probe function and a ranged probe function, and requests that hash values not be stored.

Definition at line 176 of file ranged_probe_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_probe_fn.hpp

4.855 __gnu_pbds::detail::ranged_probe_fn< Key, null_type, _Alloc, Comb_Probe_Fn, null_type, false > Class Template Reference

Inherits Comb_Probe_Fn.

Protected Types

- typedef Comb_Probe_Fn **comb_probe_fn_base**
- typedef rebind_traits< _Alloc, Key >::const_reference **key_const_reference**
- typedef _Alloc::size_type **size_type**

Protected Member Functions

- **ranged_probe_fn** (size_type size)
- **ranged_probe_fn** (size_type, const Comb_Probe_Fn &r_comb_probe_fn)
- **ranged_probe_fn** (size_type, const null_type &, const Comb_Probe_Fn &r_comb_probe_fn, const null_type &)
- void **swap** (ranged_probe_fn &other)

4.855.1 Detailed Description

template<typename Key, typename _Alloc, typename Comb_Probe_Fn>class __gnu_pbds::detail::ranged_probe_fn< Key, null_type, _Alloc, Comb_Probe_Fn, null_type, false >

Specialization 3 and 4 The client does not supply a hash function or probe function, and requests that hash values not be stored.

Definition at line 296 of file ranged_probe_fn.hpp.

The documentation for this class was generated from the following file:

- ranged_probe_fn.hpp

4.856 std::rank< typename > Struct Template Reference

Inheritance diagram for std::rank< typename >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.856.1 Detailed Description

template<typename>struct std::rank< typename >

rank

Definition at line 1359 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.857 std::ratio< _Num, _Den > Struct Template Reference

Public Types

- typedef ratio< num, den > **type**

Static Public Attributes

- static constexpr intmax_t **den**
- static constexpr intmax_t **num**

4.857.1 Detailed Description

template<intmax_t _Num, intmax_t _Den = 1>struct std::ratio< _Num, _Den >

Provides compile-time rational arithmetic.

This class template represents any finite rational number with a numerator and denominator representable by compile-time constants of type intmax_t. The ratio is simplified when instantiated.

For example:

```
std::ratio<7,-21>::num == -1;
std::ratio<7,-21>::den == 3;
```

Definition at line 266 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.858 std::ratio_equal< _R1, _R2 > Struct Template Reference

Inheritance diagram for std::ratio_equal< _R1, _R2 >:

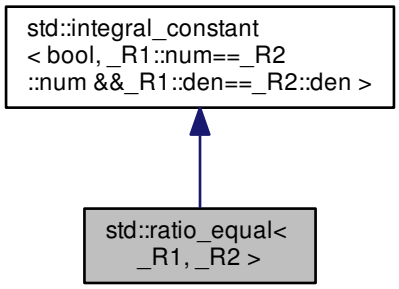

Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.858.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_equal< _R1, _R2 >

ratio_equal

Definition at line 351 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.859 std::ratio_greater< _R1, _R2 > Struct Template Reference

Inheritance diagram for std::ratio_greater< _R1, _R2 >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.859.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_greater< _R1, _R2 >

ratio_greater

Definition at line 409 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.860 std::ratio_greater_equal< _R1, _R2 > Struct Template Reference

Inheritance diagram for std::ratio_greater_equal< _R1, _R2 >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.860.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_greater_equal< _R1, _R2 >

ratio_greater_equal

Definition at line 415 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.861 std::ratio_less< _R1, _R2 > Struct Template Reference

Inherits type< _R1, _R2 >.

4.861.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_less< _R1, _R2 >

ratio_less

Definition at line 397 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.862 std::ratio_less_equal< _R1, _R2 > Struct Template Reference

Inheritance diagram for std::ratio_less_equal< _R1, _R2 >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.862.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_less_equal< _R1, _R2 >

ratio_less_equal

Definition at line 403 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.863 std::ratio_not_equal< _R1, _R2 > Struct Template Reference

Inheritance diagram for std::ratio_not_equal< _R1, _R2 >:



Public Types

- typedef integral_constant < bool, __v > **type**
- typedef bool **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr bool **value**

4.863.1 Detailed Description

template<typename _R1, typename _R2>struct std::ratio_not_equal< _R1, _R2 >

ratio_not_equal

Definition at line 357 of file ratio.

The documentation for this struct was generated from the following file:

- ratio

4.864 std::raw_storage_iterator< _OutputIterator, _Tp > Class Template Reference

Inheritance diagram for std::raw_storage_iterator< _OutputIterator, _Tp >:



Public Types

- typedef void difference_type
- typedef output_iterator_tag iterator_category
- typedef void pointer
- typedef void reference
- typedef void value_type

Public Member Functions

- **raw_storage_iterator** (_OutputIterator __x)
- _OutputIterator **base** () const
- raw_storage_iterator & **operator*** ()
- raw_storage_iterator & **operator++** ()
- raw_storage_iterator **operator++** (int)
- raw_storage_iterator & **operator=** (const _Tp &__element)
- raw_storage_iterator & **operator=** (_Tp &&__element)

Protected Attributes

- _OutputIterator **_M_iter**

4.864.1 Detailed Description

template<class _OutputIterator, class _Tp>class std::raw_storage_iterator< _OutputIterator, _Tp >

This iterator class lets algorithms store their results into uninitialized memory.

Definition at line 68 of file stl_raw_storage_iter.h.

4.864.2 Member Typedef Documentation

4.864.2.1 typedef void std::iterator< output_iterator_tag , void , void , void , void >::difference_type [inherited]

Distance between iterators is represented as this type.

Definition at line 134 of file stl_iterator_base_types.h.

4.864.2.2 typedef output_iterator_tag std::iterator< output_iterator_tag , void , void , void , void >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.864.2.3 typedef void std::iterator< output_iterator_tag , void , void , void , void >::pointer [inherited]

This type represents a pointer-to-value_type.

Definition at line 136 of file stl_iterator_base_types.h.

4.864.2.4 typedef void std::iterator< output_iterator_tag , void , void , void , void >::reference [inherited]

This type represents a reference-to-value_type.

Definition at line 138 of file stl_iterator_base_types.h.

4.864.2.5 typedef void std::iterator< output_iterator_tag , void , void , void , void >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

The documentation for this class was generated from the following file:

- stl_raw_storage_iter.h

4.865 __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc > Struct Template Reference

Inherits std::_Rb_tree< _Key, _Val, _KeyOfValue, _Compare, _Alloc >.

Public Types

- template<typename _Iter >
  using **__same_value_type** = is_same< value_type, typename iterator_traits< _Iter >::value_type >
- typedef std::_Rb_tree< _Key,
  _Value, _KeyOfValue, _Compare,
  _Alloc > **_Base**
- typedef _Base::allocator_type **allocator_type**
- typedef
  _Rb_tree_const_iterator
  < value_type > **const_iterator**
- typedef const value_type * **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::reverse_iterator
  < const_iterator > **const_reverse_iterator**
- typedef ptrdiff_t **difference_type**
- typedef _Rb_tree_iterator
  < value_type > **iterator**
- typedef _Key **key_type**
- typedef value_type * **pointer**
- typedef value_type & **reference**
- typedef std::reverse_iterator
  < iterator > **reverse_iterator**
- typedef size_t **size_type**
- typedef _Val **value_type**

Public Member Functions

- **rb_tree** (const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- bool **__rb_verify** () const
- template<typename _Iterator >
  void **_M_assign_equal** (_Iterator, _Iterator)
- template<typename _Iterator >
  void **_M_assign_unique** (_Iterator, _Iterator)
- template<typename _NodeGen >
  _Rb_tree< _Key, _Val, _KoV,
  _Compare, _Alloc >::_Link_type **_M_copy** (_Const_Link_type __x, _Base_ptr __p, _NodeGen &__node_gen)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  size_type **_M_count_tr** (const _Kt &__k) const
- template<typename... _Args>
  iterator **_M_emplace_equal** (_Args &&...__args)
- template<typename... _Args>
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_emplace_equal** (_Args &&...__args)
- template<typename... _Args>
  iterator **_M_emplace_hint_equal** (const_iterator __pos, _Args &&...__args)
- template<typename... _Args>
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_emplace_hint_equal** (const_iterator __pos, _Args &&...__args)

- template<typename... _Args>
  iterator **_M_emplace_hint_unique** (const_iterator __pos, _Args &&...__args)
- template<typename... _Args>
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_emplace_hint_unique** (const_iterator __pos, _Args &&...__args)
- template<typename... _Args>
  pair< iterator, bool > **_M_emplace_unique** (_Args &&...__args)
- template<typename... _Args>
  pair< typename _Rb_tree< _Key,
  _Val, _KeyOfValue, _Compare,
  _Alloc >::iterator, bool > **_M_emplace_unique** (_Args &&...__args)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  pair< iterator, iterator > **_M_equal_range_tr** (const _Kt &__k)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  pair< const_iterator,
  const_iterator > **_M_equal_range_tr** (const _Kt &__k) const
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  iterator **_M_find_tr** (const _Kt &__k)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  const_iterator **_M_find_tr** (const _Kt &__k) const
- pair< _Base_ptr, _Base_ptr > **_M_get_insert_equal_pos** (const key_type &__k)
- pair< _Base_ptr, _Base_ptr > **_M_get_insert_hint_equal_pos** (const_iterator __pos, const key_type &__k)
- pair< _Base_ptr, _Base_ptr > **_M_get_insert_hint_unique_pos** (const_iterator __pos, const key_type &__k)
- pair< _Base_ptr, _Base_ptr > **_M_get_insert_unique_pos** (const key_type &__k)
- _Node_allocator & **_M_get_Node_allocator** () noexcept
- const _Node_allocator & **_M_get_Node_allocator** () const noexcept
- template<typename _Arg , typename _NodeGen >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_** (_Base_ptr __x, _Base_ptr __p, _Arg &&__v, _NodeGen &__node_gen)
- template<typename _Arg >
  iterator **_M_insert_equal** (_Arg &&__x)
- template<typename _Arg >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_equal** (_Arg &&__v)
- template<typename _Arg , typename _NodeGen >
  iterator **_M_insert_equal_** (const_iterator __pos, _Arg &&__x, _NodeGen &)
- template<typename _Arg >
  iterator **_M_insert_equal_** (const_iterator __pos, _Arg &&__x)
- template<typename _Arg , typename _NodeGen >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_equal_** (const_iterator __position, _Arg &&__v, _NodeGen &__node_gen)
- template<typename _Arg >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_equal_lower** (_Arg &&__v)
- template<typename _Arg >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_lower** (_Base_ptr __p, _Arg &&__v)

- template<typename _InputIterator >
  __enable_if_t
  < __same_value_type
  < _InputIterator >::value > **_M_insert_range_equal** (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  __enable_if_t
  <!__same_value_type
  < _InputIterator >::value > **_M_insert_range_equal** (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  __enable_if_t
  < __same_value_type
  < _InputIterator >::value > **_M_insert_range_unique** (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  __enable_if_t
  <!__same_value_type
  < _InputIterator >::value > **_M_insert_range_unique** (_InputIterator __first, _InputIterator __last)
- template<typename _Arg >
  pair< iterator, bool > **_M_insert_unique** (_Arg &&__x)
- template<typename _Arg >
  pair< typename _Rb_tree< _Key,
  _Val, _KeyOfValue, _Compare,
  _Alloc >::iterator, bool > **_M_insert_unique** (_Arg &&__v)
- template<typename _Arg , typename _NodeGen >
  iterator **_M_insert_unique_** (const_iterator __pos, _Arg &&__x, _NodeGen &)
- template<typename _Arg >
  iterator **_M_insert_unique_** (const_iterator __pos, _Arg &&__x)
- template<typename _Arg , typename _NodeGen >
  _Rb_tree< _Key, _Val,
  _KeyOfValue, _Compare, _Alloc >
  ::iterator **_M_insert_unique_** (const_iterator __position, _Arg &&__v, _NodeGen &__node_gen)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  iterator **_M_lower_bound_tr** (const _Kt &__k)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  const_iterator **_M_lower_bound_tr** (const _Kt &__k) const
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  iterator **_M_upper_bound_tr** (const _Kt &__k)
- template<typename _Kt , typename _Req = __has_is_transparent_t<_Compare, _Kt>>
  const_iterator **_M_upper_bound_tr** (const _Kt &__k) const
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- void **clear** () noexcept
- size_type **count** (const key_type &__k) const
- bool **empty** () const noexcept
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- pair< iterator, iterator > **equal_range** (const key_type &__k)
- pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__k) const
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __position)
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (iterator __position)
- size_type **erase** (const key_type &__x)
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __first, const_iterator __last)

- iterator **find** (const key_type &__k)
- const_iterator **find** (const key_type &__k) const
- allocator_type **get_allocator** () const noexcept
- _Compare **key_comp** () const
- iterator **lower_bound** (const key_type &__k)
- const_iterator **lower_bound** (const key_type &__k) const
- size_type **max_size** () const noexcept
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- size_type **size** () const noexcept
- void **swap** (_Rb_tree &__t) noexcept(/∗conditional ∗/)
- iterator **upper_bound** (const key_type &__k)
- const_iterator **upper_bound** (const key_type &__k) const

Protected Types

- typedef _Rb_tree_node_base ∗ **_Base_ptr**
- typedef const _Rb_tree_node_base ∗ **_Const_Base_ptr**
- typedef const _Rb_tree_node
  < _Val > ∗ **_Const_Link_type**
- typedef _Rb_tree_node< _Val > ∗ **_Link_type**

Protected Member Functions

- _Link_type **_M_begin** () noexcept
- _Const_Link_type **_M_begin** () const noexcept
- template<typename _NodeGen >
  _Link_type **_M_clone_node** (_Const_Link_type __x, _NodeGen &__node_gen)
- template<typename... _Args>
  void **_M_construct_node** (_Link_type __node, _Args &&...__args)
- template<typename... _Args>
  _Link_type **_M_create_node** (_Args &&...__args)
- void **_M_destroy_node** (_Link_type __p) noexcept
- void **_M_drop_node** (_Link_type __p) noexcept
- _Base_ptr **_M_end** () noexcept
- _Const_Base_ptr **_M_end** () const noexcept
- _Link_type **_M_get_node** ()
- _Base_ptr & **_M_leftmost** () noexcept
- _Const_Base_ptr **_M_leftmost** () const noexcept
- void **_M_put_node** (_Link_type __p) noexcept
- _Base_ptr & **_M_rightmost** () noexcept
- _Const_Base_ptr **_M_rightmost** () const noexcept
- _Base_ptr & **_M_root** () noexcept
- _Const_Base_ptr **_M_root** () const noexcept

Static Protected Member Functions

- static const _Key & **_S_key** (_Const_Link_type __x)
- static const _Key & **_S_key** (_Const_Base_ptr __x)
- static _Link_type **_S_left** (_Base_ptr __x) noexcept
- static _Const_Link_type **_S_left** (_Const_Base_ptr __x) noexcept
- static _Base_ptr **_S_maximum** (_Base_ptr __x) noexcept
- static _Const_Base_ptr **_S_maximum** (_Const_Base_ptr __x) noexcept
- static _Base_ptr **_S_minimum** (_Base_ptr __x) noexcept
- static _Const_Base_ptr **_S_minimum** (_Const_Base_ptr __x) noexcept
- static _Link_type **_S_right** (_Base_ptr __x) noexcept
- static _Const_Link_type **_S_right** (_Const_Base_ptr __x) noexcept

Protected Attributes

- _Rb_tree_impl< _Compare > **_M_impl**

4.865.1 Detailed Description

template<class _Key, class _Value, class _KeyOfValue, class _Compare, class _Alloc = std::allocator<_Value>>struct __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 77 of file rb_tree.

The documentation for this struct was generated from the following file:

- rb_tree

4.866 __gnu_pbds::detail::rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference

Inherits __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >.

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef base_type::const_iterator **const_iterator**
- typedef base_type::const_pointer **const_pointer**
- typedef base_type::const_reference **const_reference**
- typedef base_type::const_reverse_iterator **const_reverse_iterator**
- typedef rb_tree_tag **container_category**

- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::key_const_pointer **key_const_pointer**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_pointer **key_pointer**
- typedef base_type::key_reference **key_reference**
- typedef base_type::key_type **key_type**
- typedef base_type::mapped_const_pointer **mapped_const_pointer**
- typedef base_type::mapped_const_reference **mapped_const_reference**
- typedef base_type::mapped_pointer **mapped_pointer**
- typedef base_type::mapped_reference **mapped_reference**
- typedef base_type::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef traits_type::node_const_iterator **node_const_iterator**
- typedef traits_type::node_iterator **node_iterator**
- typedef base_type::node_update **node_update**
- typedef base_type::const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef base_type::pointer **pointer**
- typedef base_type::reference **reference**
- typedef base_type::reverse_iterator **reverse_iterator**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef base_type::value_type **value_type**

Public Member Functions

- **rb_tree_map** (const Cmp_Fn &)
- **rb_tree_map** (const Cmp_Fn &, const node_update &)
- **rb_tree_map** (const rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- template<typename It > void **copy_from_range** (It, It)
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- iterator **erase** (iterator)
- reverse_iterator **erase** (reverse_iterator)

- template<typename Pred >
  rb_tree_map< Key, Mapped,
  Cmp_Fn, Node_And_It_Traits,
  _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred >
  size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference)
- point_const_iterator **find** (key_const_reference) const
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- std::pair< point_iterator, bool > **insert** (const_reference)
- void **join** (rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **lower_bound** (key_const_reference)
- point_const_iterator **lower_bound** (key_const_reference) const
- size_type **max_size** () const
- node_const_iterator **node_begin** () const
- node_iterator **node_begin** ()
- node_const_iterator **node_end** () const
- node_iterator **node_end** ()
- mapped_reference **operator[]** (key_const_reference r_key)
- reverse_iterator **rbegin** ()
- const_reverse_iterator **rbegin** () const
- reverse_iterator **rend** ()
- const_reverse_iterator **rend** () const
- size_type **size** () const
- void **split** (key_const_reference, rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **swap** (rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **swap** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **upper_bound** (key_const_reference)
- point_const_iterator **upper_bound** (key_const_reference) const

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Protected Types

- typedef
  node_alloc_traits::value_type **node**
- typedef
  node_alloc_traits::allocator_type **node_allocator**
- typedef
  traits_type::null_node_update_pointer **null_node_update_pointer**
- typedef types_traits< Key,
  Mapped, _Alloc, false > **traits_base**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **apply_update** (node_pointer, null_node_update_pointer)
- template<typename Node_Update_ >
  void **apply_update** (node_pointer, Node_Update_ *)
- std::pair< node_pointer, bool > **erase** (node_pointer)
- node_pointer **get_new_node_for_leaf_insert** (const_reference, false_type)
- node_pointer **get_new_node_for_leaf_insert** (const_reference, true_type)
- void **initialize_min_max** ()
- iterator **insert_imp_empty** (const_reference)
- std::pair< point_iterator, bool > **insert_leaf** (const_reference)
- iterator **insert_leaf_new** (const_reference, node_pointer, bool)
- void **join_finish** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- bool **join_prep** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- size_type **recursive_count** (node_pointer) const
- void **rotate_left** (node_pointer)
- void **rotate_parent** (node_pointer)
- void **rotate_right** (node_pointer)
- void **split_finish** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- bool **split_prep** (key_const_reference, bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **update_min_max_for_erased_node** (node_pointer)
- void **update_to_top** (node_pointer, null_node_update_pointer)
- template<typename Node_Update_ >
  void **update_to_top** (node_pointer, Node_Update_ *)
- void **value_swap** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)

Static Protected Member Functions

- static void **clear_imp** (node_pointer)

Protected Attributes

- node_pointer **m_p_head**
- size_type **m_size**

Static Protected Attributes

- static node_allocator **s_node_allocator**

4.866.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, typename Node_And_It_Traits, typename _Alloc>class __gnu_pbds::detail::rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Red-Black tree.

This implementation uses an idea from the SGI STL (using a *header* node which is needed for efficient iteration).

Definition at line 84 of file rb_tree_.hpp.

4.866.2 Member Function Documentation

4.866.2.1 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) const [inline], [inherited]

Returns a const node_iterator corresponding to the node at the root of the tree.

Definition at line 111 of file bin_search_tree_.hpp.

4.866.2.2 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) [inline], [inherited]

Returns a node_iterator corresponding to the node at the root of the tree.

Definition at line 119 of file bin_search_tree_.hpp.

4.866.2.3 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) const [inline], [inherited]

Returns a const node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 127 of file bin_search_tree_.hpp.

4.866.2.4 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) [inline], [inherited]

Returns a node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 135 of file bin_search_tree_.hpp.

The documentation for this class was generated from the following file:

- rb_tree_.hpp

4.867 __gnu_pbds::detail::rb_tree_node_< Value_Type, Metadata, _Alloc > Struct Template Reference

Public Types

- typedef rebind_traits< _Alloc, metadata_type > ::const_reference **metadata_const_reference**
- typedef rebind_traits< _Alloc, metadata_type >::reference **metadata_reference**
- typedef Metadata **metadata_type**
- typedef rebind_traits< _Alloc, rb_tree_node_ >::pointer **node_pointer**
- typedef Value_Type **value_type**

Public Member Functions

- metadata_const_reference **get_metadata** () const
- metadata_reference **get_metadata** ()
- bool **special** () const

Public Attributes

- metadata_type **m_metadata**
- node_pointer **m_p_left**
- node_pointer **m_p_parent**
- node_pointer **m_p_right**
- bool **m_red**
- value_type **m_value**

4.867.1 Detailed Description

template<typename Value_Type, class Metadata, typename _Alloc>struct __gnu_pbds::detail::rb_tree_node_< Value_Type, Metadata, _Alloc >

Node for Red-Black trees.

Definition at line 52 of file rb_tree_map_/node.hpp.

The documentation for this struct was generated from the following file:

- rb_tree_map_/node.hpp

4.868 __gnu_pbds::rb_tree_tag Struct Reference

Inheritance diagram for __gnu_pbds::rb_tree_tag:

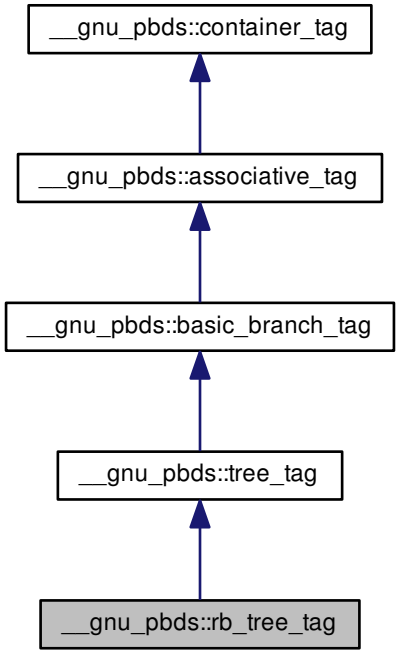

4.868.1 Detailed Description

Red-black tree.

Definition at line 153 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.869 __gnu_pbds::detail::rc< _Node, _Alloc > Class Template Reference

Public Types

- typedef entry_const_pointer **const_iterator**
- typedef node_pointer **entry**

Public Member Functions

- **rc** (const rc &)

- const const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- const const_iterator **end** () const
- void **pop** ()
- void **push** (entry)
- size_type **size** () const
- void **swap** (rc &)
- node_pointer **top** () const

4.869.1 Detailed Description

template<typename _Node, typename _Alloc>class __gnu_pbds::detail::rc< _Node, _Alloc >

Redundant binary counter.

Definition at line 50 of file rc.hpp.

The documentation for this class was generated from the following file:

- rc.hpp

4.870 __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc >:



Public Types

- typedef base_type::allocator_type **allocator_type**
- typedef base_type::cmp_fn **cmp_fn**
- typedef base_type::const_iterator **const_iterator**
- typedef base_type::const_pointer **const_pointer**
- typedef base_type::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef base_type::pointer **pointer**
- typedef base_type::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- **rc_binomial_heap** (const Cmp_Fn &)
- **rc_binomial_heap** (const rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- void **erase** (point_iterator)
- template<typename Pred >
  rc_binomial_heap< Value_Type,
  Cmp_Fn, _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred >
  size_type **erase_if** (Pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **join** (rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > &)
- void **join** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- size_type **max_size** () const
- void **modify** (point_iterator, const_reference)
- void **modify** (point_iterator, const_reference)
- void **pop** ()
- point_iterator **push** (const_reference)
- point_iterator **push** (const_reference)
- size_type **size** () const
- template<typename Pred >
  void **split** (Pred, rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > &)
- template<typename Pred >
  void **split** (Pred, binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap** (rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, _Alloc::size_type, _Alloc > &)
- const_reference **top** () const

Protected Types

- typedef base_type::node **node**
- typedef
  alloc_traits::allocator_type **node_allocator**
- typedef _Alloc::size_type **node_metadata**
- typedef std::pair
  < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- template<typename It >
  void **copy_from_range** (It, It)

- void **find_max** ()
- node_pointer **get_new_node_for_insert** (const_reference)
- node_pointer **prune** (Pred)
- void **swap** (binomial_heap_base< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static void **make_child_of** (node_pointer, node_pointer)
- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_max**
- node_pointer **m_p_root**
- size_type **m_size**

4.870.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc >

Redundant-counter binomial heap.

Definition at line 66 of file rc_binomial_heap_.hpp.

The documentation for this class was generated from the following file:

- rc_binomial_heap_.hpp

4.871 __gnu_pbds::rc_binomial_heap_tag Struct Reference

Inheritance diagram for __gnu_pbds::rc_binomial_heap_tag:

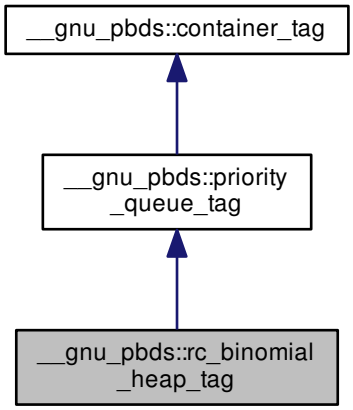

4.871.1 Detailed Description

Redundant-counter binomial-heap.

Definition at line 180 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.872 __gnu_pbds::detail::rebind_traits< _Alloc, T > Struct Template Reference

Inherits template rebind_traits< T >.

Public Types

- using **const_reference** = const T &
- using **reference** = T &

4.872.1 Detailed Description

template<typename _Alloc, typename T>struct __gnu_pbds::detail::rebind_traits< _Alloc, T >

Consistent API for accessing allocator-related types.

Definition at line 137 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.873 __gnu_cxx::recursive_init_error Class Reference

Inheritance diagram for __gnu_cxx::recursive_init_error:



Public Member Functions

- virtual const char * what () const noexcept

4.873.1 Detailed Description

Exception thrown by __cxa_guard_acquire.

C++ 2011 6.7 [stmt.dcl]/4: If control re-enters the declaration recursively while the variable is being initialized, the behavior is undefined.

Since we already have a library function to handle locking, we might as well check for this situation and throw an exception. We use the second byte of the guard variable to remember that we're in the middle of an initialization.

Definition at line 696 of file cxxabi.h.

The documentation for this class was generated from the following file:

- cxxabi.h

4.874 std::recursive_mutex Class Reference

Inherits std::__recursive_mutex_base.

Public Types

- typedef __native_type * **native_handle_type**

Public Member Functions

- **recursive_mutex** (const recursive_mutex &)=delete
- void **lock** ()
- native_handle_type **native_handle** () noexcept
- recursive_mutex & **operator=** (const recursive_mutex &)=delete
- bool **try_lock** () noexcept
- void **unlock** ()

Private Types

- typedef __gthread_recursive_mutex_t **__native_type**

Private Attributes

- __native_type **_M_mutex**

4.874.1 Detailed Description

The standard recursive mutex type.

Definition at line 92 of file mutex.

The documentation for this class was generated from the following file:

- mutex

4.875 std::recursive_timed_mutex Class Reference

Public Member Functions

- **recursive_timed_mutex** (const recursive_timed_mutex &)=delete
- void **lock** ()
- recursive_timed_mutex & **operator=** (const recursive_timed_mutex &)=delete
- bool **try_lock** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_for** (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  bool **try_lock_until** (const chrono::time_point< _Clock, _Duration > &__atime)
- void **unlock** ()

4.875.1 Detailed Description

recursive_timed_mutex

Definition at line 408 of file mutex.

The documentation for this class was generated from the following file:

- mutex

4.876 std::bitset< _Nb >::reference Class Reference

Public Member Functions

- **reference** (bitset &__b, size_t __pos) noexcept
- **reference** (const reference &)=default
- reference & **flip** () noexcept
- **operator bool** () const noexcept
- reference & **operator=** (bool __x) noexcept
- reference & **operator=** (const reference &__j) noexcept
- bool **operator~** () const noexcept

Friends

- class **bitset**

4.876.1 Detailed Description

template<size_t _Nb>class std::bitset< _Nb >::reference

This encapsulates the concept of a single bit. An instance of this class is a proxy for an actual bit; this way the individual bit operations are done as faster word-size bitwise instructions.

Most users will never need to use this class directly; conversions to and from bool are automatic and should be transparent. Overloaded operators help to preserve the illusion.

(On a typical system, this *bit reference* is 64 times the size of an actual bit. Ha.)

Definition at line 802 of file bitset.

The documentation for this class was generated from the following file:

- bitset

4.877 std::tr2::dynamic_bitset< _WordT, _Alloc >::reference Class Reference

Public Member Functions

- **reference** (dynamic_bitset &__b, size_type __pos) noexcept
- reference & **flip** () noexcept
- **operator bool** () const noexcept
- reference & **operator=** (bool __x) noexcept
- reference & **operator=** (const reference &__j) noexcept
- bool **operator~** () const noexcept

Friends

- class **dynamic_bitset**

4.877.1 Detailed Description

template<typename _WordT = unsigned long long, typename _Alloc = std::allocator<_WordT>>class std::tr2::dynamic_bitset< _WordT, _Alloc >::reference

This encapsulates the concept of a single bit. An instance of this class is a proxy for an actual bit; this way the individual bit operations are done as faster word-size bitwise instructions.

Most users will never need to use this class directly; conversions to and from bool are automatic and should be transparent. Overloaded operators help to preserve the illusion.

(On a typical system, this "bit %reference" is 64 times the size of an actual bit. Ha.)

Definition at line 513 of file dynamic_bitset.

The documentation for this class was generated from the following file:

- dynamic_bitset

4.878 std::reference_wrapper< _Tp > Class Template Reference

Inherits _Reference_wrapper_base_memfun< remove_cv< _Tp >::type >.

Public Types

- typedef _Tp **type**

Public Member Functions

- template<typename _Up , typename = __not_same<_Up>, typename = decltype(reference_wrapper::_S_fun(std::declval<_Up>()))>
  constexpr **reference_wrapper** (_Up &&__uref) noexcept(noexcept(reference_wrapper::_S_fun(std::declval< _Up >())))
- **reference_wrapper** (const reference_wrapper &)=default
- constexpr _Tp & **get** () const noexcept
- constexpr **operator _Tp &** () const noexcept
- template<typename... _Args>
  constexpr result_of< _Tp &(_Args &&...)>::type **operator()** (_Args &&...__args) const
- reference_wrapper & **operator=** (const reference_wrapper &)=default

Related Functions

(Note that these are not member functions.)

- template<typename _Tp >
  constexpr reference_wrapper< _Tp > ref (_Tp &__t) noexcept
- template<typename _Tp >
  constexpr reference_wrapper < const _Tp > cref (const _Tp &__t) noexcept
- template<typename _Tp >
  constexpr reference_wrapper< _Tp > ref (reference_wrapper< _Tp > __t) noexcept
- template<typename _Tp >
  constexpr reference_wrapper < const _Tp > cref (reference_wrapper< _Tp > __t) noexcept

4.878.1 Detailed Description

template<typename _Tp>class std::reference_wrapper< _Tp >

Primary class template for reference_wrapper.

Definition at line 2160 of file type_traits.

4.878.2 Friends And Related Function Documentation

4.878.2.1 template<typename _Tp > constexpr reference_wrapper< const _Tp > cref (const _Tp & __t) [related]

Denotes a const reference should be taken to a variable.

Definition at line 371 of file refwrap.h.

4.878.2.2 template<typename _Tp > constexpr reference_wrapper< const _Tp > cref (reference_wrapper< _Tp > __t) [related]

std::cref overload to prevent wrapping a reference_wrapper

Definition at line 391 of file refwrap.h.

4.878.2.3 template<typename _Tp > constexpr reference_wrapper< _Tp > ref (_Tp & __t) [related]

Denotes a reference should be taken to a variable.

Definition at line 364 of file refwrap.h.

4.878.2.4 template<typename _Tp > constexpr reference_wrapper< _Tp > ref (reference_wrapper< _Tp > __t) [related]

std::ref overload to prevent wrapping a reference_wrapper

Definition at line 384 of file refwrap.h.

The documentation for this class was generated from the following files:

- type_traits
- refwrap.h

4.879 std::regex_error Class Reference

Inheritance diagram for std::regex_error:

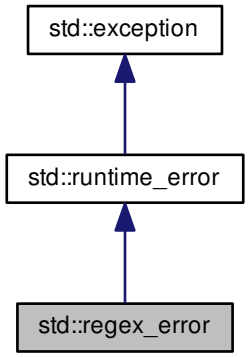

Public Member Functions

- regex_error (regex_constants::error_type __ecode)
- regex_constants::error_type code () const
- virtual const char * what () const noexcept

Friends

- void **__throw_regex_error** (regex_constants::error_type, const char *)

4.879.1 Detailed Description

A regular expression exception class.

The regular expression library throws objects of this class on error.

Definition at line 132 of file regex_error.h.

4.879.2 Constructor & Destructor Documentation

4.879.2.1 std::regex_error::regex_error (**regex_constants::error_type** *__ecode*) [explicit]

Constructs a regex_error object.

Parameters

__ecode	the regex error code.

4.879.3 Member Function Documentation

4.879.3.1 regex_constants::error_type std::regex_error::code ( ) const [inline]

Gets the regex error code.

Returns

the regex error code.

Definition at line 153 of file regex_error.h.

4.879.3.2 virtual const char* std::runtime_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- regex_error.h

4.880 std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > Class Template Reference

Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef const value_type * **pointer**
- typedef const value_type & **reference**
- typedef basic_regex< _Ch_type, _Rx_traits > **regex_type**
- typedef match_results< _Bi_iter > **value_type**

Public Member Functions

- regex_iterator ()=default
- regex_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type &__re, regex_constants::match_flag_type __m=regex_constants::match_default)
- **regex_iterator** (_Bi_iter, _Bi_iter, const regex_type &&, regex_constants::match_flag_type=regex_constants::match_default)=delete
- regex_iterator (const regex_iterator &)=default
- bool operator!= (const regex_iterator &__rhs) const noexcept
- const value_type & operator* () const noexcept
- regex_iterator & operator++ ()
- regex_iterator operator++ (int)
- const value_type * operator-> () const noexcept
- regex_iterator & operator= (const regex_iterator &)=default
- bool operator== (const regex_iterator &) const noexcept

4.880.1 Detailed Description

template<typename _Bi_iter, typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>>class std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >

An iterator adaptor that will provide repeated calls of regex_search over a range until no more matches remain.

Definition at line 2625 of file regex.h.

4.880.2 Constructor & Destructor Documentation

4.880.2.1 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator ( ) [default]

Provides a singular iterator, useful for indicating one-past-the-end of a range.

Referenced by std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator().

4.880.2.2 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator (_Bi_iter *__a*, _Bi_iter *__b*, const regex_type & *__re*, regex_constants::match_flag_type *__m* = regex_constants::match_default) [inline]

Constructs a regex_iterator...

Parameters

__a	[IN] The start of a text range to search.
__b	[IN] One-past-the-end of the text range to search.
__re	[IN] The regular expression to match.
__m	[IN] Policy flags for match rules.

Definition at line 2648 of file regex.h.

References std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator(), and std::regex_search().

4.880.2.3 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_iterator (const regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > &) [default]

Copy constructs a regex_iterator.

4.880.3 Member Function Documentation

4.880.3.1 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> bool std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator!= (const regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > & *__rhs*) const [inline], [noexcept]

Tests the inequivalence of two regex iterators.

Definition at line 2682 of file regex.h.

4.880.3.2 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> const value_type& std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator* ( ) const [inline],[noexcept]

Dereferences a regex_iterator.

Definition at line 2689 of file regex.h.

4.880.3.3 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_iterator& std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator++ ( )

Increments a regex_iterator.

4.880.3.4 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_iterator std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator++ (int) [inline]

Postincrements a regex_iterator.

Definition at line 2709 of file regex.h.

4.880.3.5 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> const value_type* std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator-> ( ) const [inline],[noexcept]

Selects a regex_iterator member.

Definition at line 2696 of file regex.h.

4.880.3.6 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_iterator& std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator= (const regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > &) [default]

Copy assigns one regex_iterator to another.

4.880.3.7 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> bool std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator== (const regex_iterator< _Bi_iter, _Ch_type, _Rx_traits > &) const [noexcept]

Tests the equivalence of two regex iterators.

The documentation for this class was generated from the following file:

- regex.h

4.881 std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > Class Template Reference

Public Types

- typedef std::ptrdiff_t **difference_type**
- typedef std::forward_iterator_tag **iterator_category**
- typedef const value_type * **pointer**
- typedef const value_type & **reference**
- typedef basic_regex< _Ch_type, _Rx_traits > **regex_type**
- typedef sub_match< _Bi_iter > **value_type**

Public Member Functions

- regex_token_iterator ()
- regex_token_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type &__re, int __submatch=0, regex_constants::match_flag_type __m=regex_constants::match_default)
- regex_token_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type &__re, const std::vector< int > &__submatches, regex_constants::match_flag_type __m=regex_constants::match_default)
- regex_token_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type &__re, initializer_list< int > __submatches, regex_constants::match_flag_type __m=regex_constants::match_default)
- template<std::size_t _Nm>
  regex_token_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type &__re, const int(&__submatches)[_Nm], regex_constants::match_flag_type __m=regex_constants::match_default)
- **regex_token_iterator** (_Bi_iter, _Bi_iter, const regex_type &&, int=0, regex_constants::match_flag_type=regex_constants::match_default)=delete
- **regex_token_iterator** (_Bi_iter, _Bi_iter, const regex_type &&, const std::vector< int > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- **regex_token_iterator** (_Bi_iter, _Bi_iter, const regex_type &&, initializer_list< int >, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<std::size_t _Nm>
  regex_token_iterator (_Bi_iter, _Bi_iter, const regex_type &&, const int(&)[_Nm], regex_constants::match_flag_type=regex_constants::match_default)=delete
- regex_token_iterator (const regex_token_iterator &__rhs)
- bool operator!= (const regex_token_iterator &__rhs) const
- const value_type & operator* () const
- regex_token_iterator & operator++ ()
- regex_token_iterator operator++ (int)
- const value_type * operator-> () const
- regex_token_iterator & operator= (const regex_token_iterator &__rhs)
- bool operator== (const regex_token_iterator &__rhs) const

4.881.1 Detailed Description

template<typename _Bi_iter, typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>>class std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >

Iterates over submatches in a range (or *splits* a text string).

The purpose of this iterator is to enumerate all, or all specified, matches of a regular expression within a text range. The dereferenced value of an iterator of this class is a std::sub_match object.

Definition at line 2742 of file regex.h.

4.881.2 Constructor & Destructor Documentation

4.881.2.1 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator ( ) [inline]

Default constructs a regex_token_iterator.

A default-constructed regex_token_iterator is a singular iterator that will compare equal to the one-past-the-end value for any iterator of the same type.

Definition at line 2760 of file regex.h.

4.881.2.2 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator (_Bi_iter __a, _Bi_iter __b, const regex_type & __re, int __submatch = 0, regex_constants::match_flag_type __m = regex_constants::match_default) [inline]

Constructs a regex_token_iterator...

Parameters

__a	[IN] The start of the text to search.
__b	[IN] One-past-the-end of the text to search.
__re	[IN] The regular expression to search for.
__submatch	[IN] Which submatch to return. There are some special values for this parameter: • -1 each enumerated subexpression does NOT match the regular expression (aka field splitting) • 0 the entire string matching the subexpression is returned for each match within the text. • >0 enumerates only the indicated subexpression from a match within the text.
__m	[IN] Policy flags for match rules.

Definition at line 2782 of file regex.h.

4.881.2.3 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator (_Bi_iter *__a*, _Bi_iter *__b*, const regex_type & *__re*, const std::vector< int > & *__submatches*, regex_constants::match_flag_type *__m* = regex_constants::match_default) [inline]

Constructs a regex_token_iterator...

Parameters

__a	[IN] The start of the text to search.
__b	[IN] One-past-the-end of the text to search.
__re	[IN] The regular expression to search for.
__submatches	[IN] A list of subexpressions to return for each regular expression match within the text.
__m	[IN] Policy flags for match rules.

Definition at line 2798 of file regex.h.

4.881.2.4 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator (_Bi_iter *__a*, _Bi_iter *__b*, const regex_type & *__re*, initializer_list< int > *__submatches*, regex_constants::match_flag_type *__m* = regex_constants::match_default) [inline]

Constructs a regex_token_iterator...

Parameters

__a	[IN] The start of the text to search.
__b	[IN] One-past-the-end of the text to search.
__re	[IN] The regular expression to search for.
__submatches	[IN] A list of subexpressions to return for each regular expression match within the text.
__m	[IN] Policy flags for match rules.

Definition at line 2815 of file regex.h.

4.881.2.5 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> template<std::size_t _Nm> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator (_Bi_iter *__a*, _Bi_iter *__b*, const regex_type & *__re*, const int(&) *__submatches[_Nm]*, regex_constants::match_flag_type *__m* = regex_constants::match_default) [inline]

Constructs a regex_token_iterator...

Parameters

__a	[IN] The start of the text to search.
__b	[IN] One-past-the-end of the text to search.
__re	[IN] The regular expression to search for.
__submatches	[IN] A list of subexpressions to return for each regular expression match within the text.
__m	[IN] Policy flags for match rules.

Definition at line 2833 of file regex.h.

4.881.2.6 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::regex_token_iterator (const regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > & *__rhs*) [inline]

Copy constructs a regex_token_iterator.

Parameters

__rhs	[IN] A regex_token_iterator to copy.

Definition at line 2865 of file regex.h.

4.881.3 Member Function Documentation

4.881.3.1 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> bool std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator!= (const regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > & *__rhs*) const [inline]

Compares a regex_token_iterator to another for inequality.

Definition at line 2887 of file regex.h.

4.881.3.2 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> const value_type& std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator* ( ) const [inline]

Dereferences a regex_token_iterator.

Definition at line 2894 of file regex.h.

4.881.3.3 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_token_iterator& std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator++ ( )

Increments a regex_token_iterator.

4.881.3.4 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_token_iterator std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator++ (int) [inline]

Postincrements a regex_token_iterator.

Definition at line 2914 of file regex.h.

4.881.3.5 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> const value_type* std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator-> ( ) const [inline]

Selects a regex_token_iterator member.

Definition at line 2901 of file regex.h.

4.881.3.6 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> regex_token_iterator& std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator= (const regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > & *__rhs*)

Assigns a regex_token_iterator to another.

Parameters

__rhs	[IN] A regex_token_iterator to copy.

4.881.3.7 template<typename _Bi_iter , typename _Ch_type = typename iterator_traits<_Bi_iter>::value_type, typename _Rx_traits = regex_traits<_Ch_type>> bool std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >::operator== (const regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits > & *__rhs*) const

Compares a regex_token_iterator to another for equality.

The documentation for this class was generated from the following file:

- regex.h

4.882 std::regex_traits< _Ch_type > Class Template Reference

Public Types

- typedef _RegexMask **char_class_type**
- typedef _Ch_type **char_type**
- typedef std::locale **locale_type**
- typedef std::basic_string < char_type > **string_type**

Public Member Functions

- regex_traits ()
- locale_type getloc () const
- locale_type imbue (locale_type __loc)
- bool isctype (_Ch_type __c, char_class_type __f) const
- template<typename _Fwd_iter > char_class_type lookup_classname (_Fwd_iter __first, _Fwd_iter __last, bool __icase=false) const
- template<typename _Fwd_iter > string_type lookup_collatename (_Fwd_iter __first, _Fwd_iter __last) const
- template<typename _Fwd_iter > string_type transform (_Fwd_iter __first, _Fwd_iter __last) const
- template<typename _Fwd_iter > string_type transform_primary (_Fwd_iter __first, _Fwd_iter __last) const
- char_type translate (char_type __c) const
- char_type translate_nocase (char_type __c) const
- int value (_Ch_type __ch, int __radix) const

Static Public Member Functions

- static std::size_t length (const char_type *__p)

Protected Attributes

- locale_type **_M_locale**

4.882.1 Detailed Description

template<typename _Ch_type>class std::regex_traits< _Ch_type >

Describes aspects of a regular expression.

A regular expression traits class that satisfies the requirements of section [28.7].

The class regex is parameterized around a set of related types and functions used to complete the definition of its semantics. This class satisfies the requirements of such a traits class.

Definition at line 80 of file regex.h.

4.882.2 Constructor & Destructor Documentation

4.882.2.1 template<typename _Ch_type> std::regex_traits< _Ch_type >::regex_traits ( ) [inline]

Constructs a default traits object.

Definition at line 159 of file regex.h.

4.882.3 Member Function Documentation

4.882.3.1 template<typename _Ch_type> locale_type std::regex_traits< _Ch_type >::getloc ( ) const [inline]

Gets a copy of the current locale in use by the regex_traits object.

Definition at line 372 of file regex.h.

4.882.3.2 template<typename _Ch_type> locale_type std::regex_traits< _Ch_type >::imbue (locale_type *__loc*) [inline]

Imbues the regex_traits object with a copy of a new locale.

Parameters

__loc	A locale.

Returns

a copy of the previous locale in use by the regex_traits object.

Note

Calling imbue with a different locale than the one currently in use invalidates all cached data held by *this.

Definition at line 361 of file regex.h.

4.882.3.3 template<typename _Ch_type> bool std::regex_traits< _Ch_type >::isctype (_Ch_type __c, char_class_type __f) const

Determines if c is a member of an identified class.

Parameters

__c	a character.
__f	a class type (as returned from lookup_classname).

Returns

true if the character __c is a member of the classification represented by __f, false otherwise.

Exceptions

std::bad_cast	if the current locale does not have a ctype facet.

4.882.3.4 template<typename _Ch_type> static std::size_t std::regex_traits< _Ch_type >::length (const char_type * __p) [inline], [static]

Gives the length of a C-style string starting at __p.

Parameters

__p	a pointer to the start of a character sequence.

Returns

the number of characters between *__p and the first default-initialized value of type char_type. In other words, uses the C-string algorithm for determining the length of a sequence of characters.

Definition at line 172 of file regex.h.

4.882.3.5 template<typename _Ch_type> template<typename _Fwd_iter > char_class_type std::regex_traits< _Ch_type >::lookup_classname (_Fwd_iter *__first*, _Fwd_iter *__last*, bool *__icase* = false) const

Maps one or more characters to a named character classification.

Parameters

__first	beginning of the character sequence.
__last	one-past-the-end of the character sequence.
__icase	ignores the case of the classification name.

Returns

an unspecified value that represents the character classification named by the character sequence designated by the iterator range [__first, __last). If icase is true, the returned mask identifies the classification regardless of the case of the characters to be matched (for example, [[:lower:]] is the same as [[:alpha:]]), otherwise a case-dependent classification is returned. The value returned shall be independent of the case of the characters in the character sequence. If the name is not recognized then returns a value that compares equal to 0.

At least the following names (or their wide-character equivalent) are supported.

- d
- w
- s
- alnum

- alpha
- blank
- cntrl
- digit
- graph
- lower
- print
- punct
- space
- upper
- xdigit

4.882.3.6 template<typename _Ch_type> template<typename _Fwd_iter > string_type std::regex_traits< _Ch_type >::lookup_collatename (_Fwd_iter __first, _Fwd_iter __last) const

Gets a collation element by name.

Parameters

__first	beginning of the collation element name.
__last	one-past-the-end of the collation element name.

Returns

a sequence of one or more characters that represents the collating element consisting of the character sequence designated by the iterator range [__first, __last). Returns an empty string if the character sequence is not a valid collating element.

4.882.3.7 template<typename _Ch_type> template<typename _Fwd_iter > string_type std::regex_traits< _Ch_type >::transform (_Fwd_iter __first, _Fwd_iter __last) const [inline]

Gets a sort key for a character sequence.

Parameters

__first	beginning of the character sequence.
__last	one-past-the-end of the character sequence.

Returns a sort key for the character sequence designated by the iterator range [F1, F2) such that if the character sequence [G1, G2) sorts before the character sequence [H1, H2) then v.transform(G1, G2) < v.transform(H1, H2).

What this really does is provide a more efficient way to compare a string to multiple other strings in locales with fancy collation rules and equivalence classes.

Returns

a locale-specific sort key equivalent to the input range.

Exceptions

std::bad_cast	if the current locale does not have a collate facet.

Definition at line 225 of file regex.h.

Referenced by std::regex_traits< _CharType >::transform_primary().

4.882.3.8 template<typename _Ch_type> template<typename _Fwd_iter > string_type std::regex_traits< _Ch_type >::transform_primary (_Fwd_iter *__first*, _Fwd_iter *__last*) const [inline]

Gets a sort key for a character sequence, independent of case.

Parameters

__first	beginning of the character sequence.
__last	one-past-the-end of the character sequence.

Effects: if typeid(use_facet<collate<_Ch_type> >) == typeid(collate_byname<_Ch_type>) and the form of the sort key returned by collate_byname<_Ch_type>::transform(__first, __last) is known and can be converted into a primary sort key then returns that key, otherwise returns an empty string.

Todo Implement this function correctly.

Definition at line 249 of file regex.h.

4.882.3.9 template<typename _Ch_type> char_type std::regex_traits< _Ch_type >::translate (char_type *__c*) const [inline]

Performs the identity translation.

Parameters

__c	A character to the locale-specific character set.

Returns

__c.

Definition at line 183 of file regex.h.

4.882.3.10 template<typename _Ch_type> char_type std::regex_traits< _Ch_type >::translate_nocase (char_type *__c*) const [inline]

Translates a character into a case-insensitive equivalent.

Parameters

__c	A character to the locale-specific character set.

Returns

the locale-specific lower-case equivalent of __c.

Exceptions

std::bad_cast	if the imbued locale does not support the ctype facet.

Definition at line 196 of file regex.h.

4.882.3.11 template<typename _Ch_type> int std::regex_traits< _Ch_type >::value (_Ch_type *__ch*, int *__radix*) const

Converts a digit to an int.

Parameters

__ch	a character representing a digit.
__radix	the radix if the numeric conversion (limited to 8, 10, or 16).

Returns

the value represented by the digit __ch in base radix if the character __ch is a valid digit in base radix; otherwise returns -1.

The documentation for this class was generated from the following file:

- regex.h

4.883 std::remove_all_extents< typename > Struct Template Reference

Public Types

- typedef _Tp **type**

4.883.1 Detailed Description

template<typename>struct std::remove_all_extents< typename >

remove_all_extents

Definition at line 785 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.884 std::remove_const< _Tp > Struct Template Reference

Public Types

- typedef _Tp **type**

4.884.1 Detailed Description

template<typename _Tp>struct std::remove_const< _Tp >

remove_const

Definition at line 1509 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.885 std::remove_cv< typename > Struct Template Reference

Public Types

- using **type** = _Tp

4.885.1 Detailed Description

template<typename>struct std::remove_cv< typename >

remove_cv

Definition at line 227 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.886 std::remove_extent< _Tp > Struct Template Reference

Public Types

- typedef _Tp **type**

4.886.1 Detailed Description

template<typename _Tp>struct std::remove_extent< _Tp >

remove_extent

Definition at line 1972 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.887 std::remove_pointer< _Tp > Struct Template Reference

Inherits std::__remove_pointer_helper< _Tp, typename >.

Public Types

- typedef _Tp **type**

4.887.1 Detailed Description

template<typename _Tp>struct std::remove_pointer< _Tp >

remove_pointer

Definition at line 2018 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.888 std::remove_reference< _Tp > Struct Template Reference

Public Types

- typedef _Tp **type**

4.888.1 Detailed Description

template<typename _Tp>struct std::remove_reference< _Tp >

remove_reference

Definition at line 1593 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.889 std::remove_volatile< _Tp > Struct Template Reference

Public Types

- typedef _Tp **type**

4.889.1 Detailed Description

template<typename _Tp>struct std::remove_volatile< _Tp >

remove_volatile

Definition at line 1518 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.890 __gnu_pbds::resize_error Struct Reference

Inheritance diagram for __gnu_pbds::resize_error:

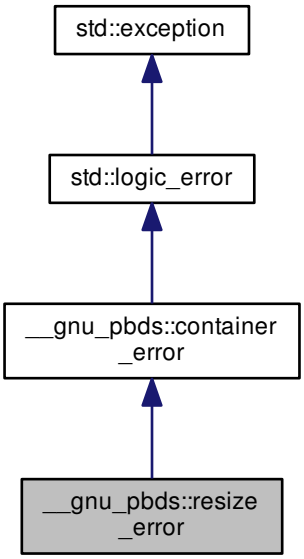

Public Member Functions

- virtual const char ∗ what () const noexcept

4.890.1 Detailed Description

A container cannot be resized.

Definition at line 73 of file exception.hpp.

4.890.2 Member Function Documentation

4.890.2.1 virtual const char∗ std::logic_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

Reimplemented in std::future_error.

The documentation for this struct was generated from the following file:

- exception.hpp

4.891 __gnu_pbds::detail::resize_policy< _Tp > Class Template Reference

Public Types

- typedef _Tp **size_type**

Public Member Functions

- **resize_policy** (const resize_policy &other)
- size_type **get_new_size_for_arbitrary** (size_type) const
- size_type **get_new_size_for_grow** () const
- size_type **get_new_size_for_shrink** () const
- bool **grow_needed** (size_type) const
- void **notify_arbitrary** (size_type)
- void **notify_grow_resize** ()
- void **notify_shrink_resize** ()
- bool **resize_needed_for_grow** (size_type) const
- bool **resize_needed_for_shrink** (size_type) const
- bool **shrink_needed** (size_type) const
- void **swap** (resize_policy< _Tp > &)

Static Public Attributes

- static const _Tp **min_size**

4.891.1 Detailed Description

template<typename _Tp>class __gnu_pbds::detail::resize_policy< _Tp >

Resize policy for binary heap.

Definition at line 52 of file resize_policy.hpp.

The documentation for this class was generated from the following file:

- resize_policy.hpp

4.892 std::result_of< _Signature > Class Template Reference

4.892.1 Detailed Description

template<typename _Signature>class std::result_of< _Signature >

result_of

Definition at line 2344 of file type_traits.

The documentation for this class was generated from the following file:

- type_traits

4.893 std::reverse_iterator< _Iterator > Class Template Reference

Inheritance diagram for std::reverse_iterator< _Iterator >:

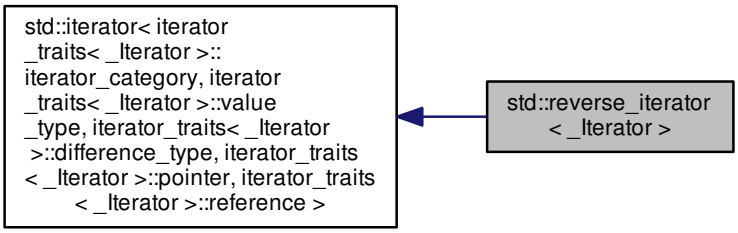

Public Types

- typedef __traits_type::difference_type **difference_type**
- typedef iterator_traits < _Iterator > ::iterator_category iterator_category
- typedef _Iterator **iterator_type**
- typedef __traits_type::pointer **pointer**
- typedef __traits_type::reference **reference**
- typedef iterator_traits < _Iterator >::value_type value_type

Public Member Functions

- constexpr reverse_iterator ()
- constexpr reverse_iterator (iterator_type __x)
- constexpr reverse_iterator (const reverse_iterator &__x)
- template<typename _Iter > constexpr reverse_iterator (const reverse_iterator< _Iter > &__x)
- constexpr iterator_type base () const
- constexpr reference operator* () const
- constexpr reverse_iterator operator+ (difference_type __n) const
- constexpr reverse_iterator & operator++ ()
- constexpr reverse_iterator operator++ (int)
- constexpr reverse_iterator & operator+= (difference_type __n)
- constexpr reverse_iterator operator- (difference_type __n) const
- constexpr reverse_iterator & operator-- ()
- constexpr reverse_iterator operator-- (int)
- constexpr reverse_iterator & operator-= (difference_type __n)
- constexpr pointer operator-> () const
- reverse_iterator & **operator=** (const reverse_iterator &)=default
- constexpr reference operator[] (difference_type __n) const

Protected Types

- typedef iterator_traits < _Iterator > **__traits_type**

Protected Attributes

- _Iterator **current**

4.893.1 Detailed Description

template<typename _Iterator>class std::reverse_iterator< _Iterator >

Bidirectional and random access iterators have corresponding reverse iterator adaptors that iterate through the data structure in the opposite direction. They have the same signatures as the corresponding iterators. The fundamental relation between a reverse iterator and its corresponding iterator `i` is established by the identity:

```
&*(reverse_iterator(i)) == &*(i - 1)
```

This mapping is dictated by the fact that while there is always a pointer past the end of an array, there might not be a valid pointer before the beginning of an array. [24.4.1]/1,2

Reverse iterators can be tricky and surprising at first. Their semantics make sense, however, and the trickiness is a side effect of the requirement that the iterators must be safe.

Definition at line 125 of file bits/stl_iterator.h.

4.893.2 Member Typedef Documentation

4.893.2.1 typedef iterator_traits< _Iterator >::iterator_category std::iterator< iterator_traits< _Iterator >::iterator_category , iterator_traits< _Iterator >::value_type , iterator_traits< _Iterator >::difference_type , iterator_traits< _Iterator >::pointer , iterator_traits< _Iterator >::reference >::iterator_category [inherited]

One of the tag types.

Definition at line 130 of file stl_iterator_base_types.h.

4.893.2.2 typedef iterator_traits< _Iterator >::value_type std::iterator< iterator_traits< _Iterator >::iterator_category , iterator_traits< _Iterator >::value_type , iterator_traits< _Iterator >::difference_type , iterator_traits< _Iterator >::pointer , iterator_traits< _Iterator >::reference >::value_type [inherited]

The type "pointed to" by the iterator.

Definition at line 132 of file stl_iterator_base_types.h.

4.893.3 Constructor & Destructor Documentation

4.893.3.1 template<typename _Iterator> constexpr std::reverse_iterator< _Iterator >::reverse_iterator ( ) [inline]

The default constructor value-initializes member `current`. If it is a pointer, that means it is zero-initialized.

Definition at line 161 of file bits/stl_iterator.h.

Referenced by std::reverse_iterator< _Iterator >::operator+(), and std::reverse_iterator< _Iterator >::operator-().

4.893.3.2 template<typename _Iterator> constexpr std::reverse_iterator< _Iterator >::reverse_iterator (iterator_type __x) [inline],[explicit]

This iterator will move in the opposite direction that x does.

Definition at line 167 of file bits/stl_iterator.h.

4.893.3.3 template<typename _Iterator> constexpr std::reverse_iterator< _Iterator >::reverse_iterator (const reverse_iterator< _Iterator > & __x) [inline]

The copy constructor is normal.

Definition at line 173 of file bits/stl_iterator.h.

4.893.3.4 template<typename _Iterator> template<typename _Iter > constexpr std::reverse_iterator< _Iterator >::reverse_iterator (const reverse_iterator< _Iter > & __x) [inline]

A reverse_iterator across other types can be copied if the underlying iterator can be converted to the type of current.

Definition at line 186 of file bits/stl_iterator.h.

4.893.4 Member Function Documentation

4.893.4.1 template<typename _Iterator> constexpr iterator_type std::reverse_iterator< _Iterator >::base ( ) const [inline]

Returns

current, the iterator used for underlying work.

Definition at line 193 of file bits/stl_iterator.h.

Referenced by std::operator==().

4.893.4.2 template<typename _Iterator> constexpr reference std::reverse_iterator< _Iterator >::operator* ( ) const [inline]

Returns

A reference to the value at -current

This requires that -current is dereferenceable.

Warning

This implementation requires that for an iterator of the underlying iterator type, x, a reference obtained by *x remains valid after x has been modified or destroyed. This is a bug: http://gcc.gnu.org/PR51823

Definition at line 207 of file bits/stl_iterator.h.

4.893.4.3 template<typename _Iterator> constexpr reverse_iterator std::reverse_iterator< _Iterator >::operator+ (difference_type __n) const [inline]

Returns

A reverse_iterator that refers to `current - __n`

The underlying iterator must be a Random Access Iterator.

Definition at line 288 of file bits/stl_iterator.h.

References std::reverse_iterator< _Iterator >::reverse_iterator().

4.893.4.4 template<typename _Iterator> constexpr reverse_iterator& std::reverse_iterator< _Iterator >::operator++ ( ) [inline]

Returns

`*this`

Decrements the underlying iterator.

Definition at line 238 of file bits/stl_iterator.h.

4.893.4.5 template<typename _Iterator> constexpr reverse_iterator std::reverse_iterator< _Iterator >::operator++ (int) [inline]

Returns

The original value of `*this`

Decrements the underlying iterator.

Definition at line 250 of file bits/stl_iterator.h.

4.893.4.6 template<typename _Iterator> constexpr reverse_iterator& std::reverse_iterator< _Iterator >::operator+= (difference_type __n) [inline]

Returns

*this

Moves the underlying iterator backwards *__n* steps. The underlying iterator must be a Random Access Iterator.

Definition at line 298 of file bits/stl_iterator.h.

4.893.4.7 template<typename _Iterator> constexpr reverse_iterator std::reverse_iterator< _Iterator >::operator- (difference_type __n) const [inline]

Returns

A reverse_iterator that refers to `current - __n`

The underlying iterator must be a Random Access Iterator.

Definition at line 310 of file bits/stl_iterator.h.

References std::reverse_iterator< _Iterator >::reverse_iterator().

4.893.4.8 template<typename _Iterator> constexpr reverse_iterator& std::reverse_iterator< _Iterator >::operator-- ( ) [inline]

Returns

`*this`

Increments the underlying iterator.

Definition at line 263 of file bits/stl_iterator.h.

4.893.4.9 template<typename _Iterator> constexpr reverse_iterator std::reverse_iterator< _Iterator >::operator-- (int) [inline]

Returns

A reverse_iterator with the previous value of `*this`

Increments the underlying iterator.

Definition at line 275 of file bits/stl_iterator.h.

4.893.4.10 template<typename _Iterator> constexpr reverse_iterator& std::reverse_iterator< _Iterator >::operator-= (difference_type __n) [inline]

Returns

*this

Moves the underlying iterator forwards *__n* steps. The underlying iterator must be a Random Access Iterator.

Definition at line 320 of file bits/stl_iterator.h.

4.893.4.11 template<typename _Iterator> constexpr pointer std::reverse_iterator< _Iterator >::operator-> ( ) const [inline]

Returns

A pointer to the value at `-current`

This requires that `-current` is dereferenceable.

Definition at line 219 of file bits/stl_iterator.h.

4.893.4.12 template<typename _Iterator> constexpr reference std::reverse_iterator< _Iterator >::operator[] (difference_type __n) const [inline]

Returns

The value at `current` - *__n* - 1

The underlying iterator must be a Random Access Iterator.

Definition at line 332 of file bits/stl_iterator.h.

The documentation for this class was generated from the following file:

- bits/stl_iterator.h

4.894 __gnu_cxx::rope< _CharT, _Alloc > Class Template Reference

Inherits __gnu_cxx::_Rope_base< _CharT, _Alloc >.

Public Types

- typedef _Rope_RopeConcatenation < _CharT, _Alloc > **__C**
- typedef _Rope_RopeFunction < _CharT, _Alloc > **__F**
- typedef _Rope_RopeLeaf< _CharT, _Alloc > **__L**
- typedef _Rope_RopeSubstring < _CharT, _Alloc > **__S**
- typedef __alloc_traits< _Alloc > ::template rebind< __C > ::other **_CAlloc**
- typedef __alloc_traits< _Alloc > ::template rebind< _CharT > ::other **_DataAlloc**
- typedef __alloc_traits< _Alloc > ::template rebind< __F > ::other **_FAlloc**
- typedef __alloc_traits< _Alloc > ::template rebind< __L > ::other **_LAlloc**
- typedef __alloc_traits< _Alloc > ::template rebind< __S > ::other **_SAlloc**
- typedef _Rope_const_iterator < _CharT, _Alloc > **const_iterator**
- typedef const _CharT * **const_pointer**
- typedef _CharT **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef std::ptrdiff_t **difference_type**
- typedef _Rope_iterator< _CharT, _Alloc > **iterator**
- typedef _Rope_char_ptr_proxy < _CharT, _Alloc > **pointer**
- typedef _Rope_char_ref_proxy < _CharT, _Alloc > **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef std::size_t **size_type**
- typedef _CharT **value_type**

Public Member Functions

- **rope** (const _CharT *__s, const allocator_type &__a=allocator_type())
- **rope** (const _CharT *__s, size_type __len, const allocator_type &__a=allocator_type())
- **rope** (const _CharT *__s, const _CharT *__e, const allocator_type &__a=allocator_type())
- **rope** (const const_iterator &__s, const const_iterator &__e, const allocator_type &__a=allocator_type())
- **rope** (const iterator &__s, const iterator &__e, const allocator_type &__a=allocator_type())
- **rope** (_CharT __c, const allocator_type &__a=allocator_type())

- **rope** (size_type __n, _CharT __c, const allocator_type &__a=allocator_type())
- **rope** (const allocator_type &__a=allocator_type())
- **rope** (char_producer< _CharT > *__fn, size_type __len, bool __delete_fn, const allocator_type &__a=allocator_type())
- **rope** (const rope &__x, const allocator_type &__a=allocator_type())
- allocator_type & **_M_get_allocator** ()
- const allocator_type & **_M_get_allocator** () const
- rope & **append** (const _CharT *__iter, size_type __n)
- rope & **append** (const _CharT *__c_string)
- rope & **append** (const _CharT *__s, const _CharT *__e)
- rope & **append** (const_iterator __s, const_iterator __e)
- rope & **append** (_CharT __c)
- rope & **append** ()
- rope & **append** (const rope &__y)
- rope & **append** (size_type __n, _CharT __c)
- void **apply_to_pieces** (size_type __begin, size_type __end, _Rope_char_consumer< _CharT > &__c) const
- _CharT **at** (size_type __pos) const
- _CharT **back** () const
- void **balance** ()
- const_iterator **begin** () const
- const_iterator **begin** ()
- const _CharT * **c_str** () const
- void **clear** ()
- int **compare** (const rope &__y) const
- const_iterator **const_begin** () const
- const_iterator **const_end** () const
- const_reverse_iterator **const_rbegin** () const
- const_reverse_iterator **const_rend** () const
- void **copy** (_CharT *__buffer) const
- size_type **copy** (size_type __pos, size_type __n, _CharT *__buffer) const
- void **delete_c_str** ()
- void **dump** ()
- bool **empty** () const
- const_iterator **end** () const
- const_iterator **end** ()
- void **erase** (size_type __p, size_type __n)
- void **erase** (size_type __p)
- iterator **erase** (const iterator &__p, const iterator &__q)
- iterator **erase** (const iterator &__p)
- size_type **find** (_CharT __c, size_type __pos=0) const
- size_type **find** (const _CharT *__s, size_type __pos=0) const
- _CharT **front** () const
- allocator_type **get_allocator** () const
- void **insert** (size_type __p, const rope &__r)
- void **insert** (size_type __p, size_type __n, _CharT __c)
- void **insert** (size_type __p, const _CharT *__i, size_type __n)
- void **insert** (size_type __p, const _CharT *__c_string)
- void **insert** (size_type __p, _CharT __c)
- void **insert** (size_type __p)
- void **insert** (size_type __p, const _CharT *__i, const _CharT *__j)
- void **insert** (size_type __p, const const_iterator &__i, const const_iterator &__j)

- void **insert** (size_type __p, const iterator &__i, const iterator &__j)
- iterator **insert** (const iterator &__p, const rope &__r)
- iterator **insert** (const iterator &__p, size_type __n, _CharT __c)
- iterator **insert** (const iterator &__p, _CharT __c)
- iterator **insert** (const iterator &__p)
- iterator **insert** (const iterator &__p, const _CharT *c_string)
- iterator **insert** (const iterator &__p, const _CharT *__i, size_type __n)
- iterator **insert** (const iterator &__p, const _CharT *__i, const _CharT *__j)
- iterator **insert** (const iterator &__p, const const_iterator &__i, const const_iterator &__j)
- iterator **insert** (const iterator &__p, const iterator &__i, const iterator &__j)
- size_type **length** () const
- size_type **max_size** () const
- iterator **mutable_begin** ()
- iterator **mutable_end** ()
- reverse_iterator **mutable_rbegin** ()
- reference **mutable_reference_at** (size_type __pos)
- reverse_iterator **mutable_rend** ()
- rope & **operator=** (const rope &__x)
- _CharT **operator[]** (size_type __pos) const
- void **pop_back** ()
- void **pop_front** ()
- void **push_back** (_CharT __x)
- void **push_front** (_CharT __x)
- const_reverse_iterator **rbegin** () const
- const_reverse_iterator **rbegin** ()
- const_reverse_iterator **rend** () const
- const_reverse_iterator **rend** ()
- void **replace** (size_type __p, size_type __n, const rope &__r)
- void **replace** (size_type __p, size_type __n, const _CharT *__i, size_type __i_len)
- void **replace** (size_type __p, size_type __n, _CharT __c)
- void **replace** (size_type __p, size_type __n, const _CharT *__c_string)
- void **replace** (size_type __p, size_type __n, const _CharT *__i, const _CharT *__j)
- void **replace** (size_type __p, size_type __n, const const_iterator &__i, const const_iterator &__j)
- void **replace** (size_type __p, size_type __n, const iterator &__i, const iterator &__j)
- void **replace** (size_type __p, _CharT __c)
- void **replace** (size_type __p, const rope &__r)
- void **replace** (size_type __p, const _CharT *__i, size_type __i_len)
- void **replace** (size_type __p, const _CharT *__c_string)
- void **replace** (size_type __p, const _CharT *__i, const _CharT *__j)
- void **replace** (size_type __p, const const_iterator &__i, const const_iterator &__j)
- void **replace** (size_type __p, const iterator &__i, const iterator &__j)
- void **replace** (const iterator &__p, const iterator &__q, const rope &__r)
- void **replace** (const iterator &__p, const iterator &__q, _CharT __c)
- void **replace** (const iterator &__p, const iterator &__q, const _CharT *__c_string)
- void **replace** (const iterator &__p, const iterator &__q, const _CharT *__i, size_type __n)
- void **replace** (const iterator &__p, const iterator &__q, const _CharT *__i, const _CharT *__j)
- void **replace** (const iterator &__p, const iterator &__q, const const_iterator &__i, const const_iterator &__j)
- void **replace** (const iterator &__p, const iterator &__q, const iterator &__i, const iterator &__j)
- void **replace** (const iterator &__p, const rope &__r)
- void **replace** (const iterator &__p, _CharT __c)
- void **replace** (const iterator &__p, const _CharT *__c_string)

- void **replace** (const iterator &__p, const _CharT *__i, size_type __n)
- void **replace** (const iterator &__p, const _CharT *__i, const _CharT *__j)
- void **replace** (const iterator &__p, const_iterator __i, const_iterator __j)
- void **replace** (const iterator &__p, iterator __i, iterator __j)
- const _CharT * **replace_with_c_str** ()
- size_type **size** () const
- rope **substr** (size_type __start, size_type __len=1) const
- rope **substr** (iterator __start, iterator __end) const
- rope **substr** (iterator __start) const
- rope **substr** (const_iterator __start, const_iterator __end) const
- rope< _CharT, _Alloc > **substr** (const_iterator __start)
- void **swap** (rope &__b)

Static Public Member Functions

- static __C * **_C_allocate** (std::size_t __n)
- static void **_C_deallocate** (__C *__p, std::size_t __n)
- static _CharT * **_Data_allocate** (std::size_t __n)
- static void **_Data_deallocate** (_CharT *__p, std::size_t __n)
- static __F * **_F_allocate** (std::size_t __n)
- static void **_F_deallocate** (__F *__p, std::size_t __n)
- static __L * **_L_allocate** (std::size_t __n)
- static void **_L_deallocate** (__L *__p, std::size_t __n)
- static __S * **_S_allocate** (std::size_t __n)
- static void **_S_deallocate** (__S *__p, std::size_t __n)

Public Attributes

- _RopeRep * **_M_tree_ptr**

Static Public Attributes

- static const size_type **npos**

Protected Types

- enum { **_S_copy_max** }
- typedef _Rope_base< _CharT, _Alloc > **_Base**
- typedef _CharT * **_Cstrptr**
- typedef _Rope_RopeConcatenation < _CharT, _Alloc > **_RopeConcatenation**
- typedef _Rope_RopeFunction < _CharT, _Alloc > **_RopeFunction**
- typedef _Rope_RopeLeaf< _CharT, _Alloc > **_RopeLeaf**
- typedef _Rope_RopeRep< _CharT, _Alloc > **_RopeRep**

- typedef _Rope_RopeSubstring < _CharT, _Alloc > **_RopeSubstring**
- typedef _Rope_self_destruct_ptr < _CharT, _Alloc > **_Self_destruct_ptr**
- typedef _Base::allocator_type **allocator_type**

Static Protected Member Functions

- static size_type **_S_allocated_capacity** (size_type __n)
- static bool **_S_apply_to_pieces** (_Rope_char_consumer< _CharT > &__c, const _RopeRep *__r, size_type __begin, size_type __end)
- static _RopeRep * **_S_concat** (_RopeRep *__left, _RopeRep *__right)
- static _RopeRep * **_S_concat_char_iter** (_RopeRep *__r, const _CharT *__iter, size_type __slen)
- static _RopeRep * **_S_destr_concat_char_iter** (_RopeRep *__r, const _CharT *__iter, size_type __slen)
- static _RopeLeaf * **_S_destr_leaf_concat_char_iter** (_RopeLeaf *__r, const _CharT *__iter, size_type __slen)
- static _CharT **_S_fetch** (_RopeRep *__r, size_type __pos)
- static _CharT * **_S_fetch_ptr** (_RopeRep *__r, size_type __pos)
- static bool **_S_is0** (_CharT __c)
- static _RopeLeaf * **_S_leaf_concat_char_iter** (_RopeLeaf *__r, const _CharT *__iter, size_type __slen)
- static _RopeConcatenation * **_S_new_RopeConcatenation** (_RopeRep *__left, _RopeRep *__right, allocator_type &__a)
- static _RopeFunction * **_S_new_RopeFunction** (char_producer< _CharT > *__f, size_type __size, bool __d, allocator_type &__a)
- static _RopeLeaf * **_S_new_RopeLeaf** (_CharT *__s, size_type __size, allocator_type &__a)
- static _RopeSubstring * **_S_new_RopeSubstring** (_Rope_RopeRep< _CharT, _Alloc > *__b, size_type __s, size_type __l, allocator_type &__a)
- static void **_S_ref** (_RopeRep *__t)
- static _RopeLeaf * **_S_RopeLeaf_from_unowned_char_ptr** (const _CharT *__s, size_type __size, allocator_type &__a)
- static size_type **_S_rounded_up_size** (size_type __n)
- static _RopeRep * **_S_substring** (_RopeRep *__base, size_type __start, size_type __endp1)
- static _RopeRep * **_S_tree_concat** (_RopeRep *__left, _RopeRep *__right)
- static void **_S_unref** (_RopeRep *__t)
- static _RopeRep * **replace** (_RopeRep *__old, size_type __pos1, size_type __pos2, _RopeRep *__r)

Static Protected Attributes

- static _CharT **_S_empty_c_str** [1]

Friends

- class **_Rope_char_ptr_proxy< _CharT, _Alloc >**
- class **_Rope_char_ref_proxy< _CharT, _Alloc >**
- class **_Rope_const_iterator< _CharT, _Alloc >**
- class **_Rope_iterator< _CharT, _Alloc >**
- class **_Rope_iterator_base< _CharT, _Alloc >**
- struct **_Rope_RopeRep< _CharT, _Alloc >**
- struct **_Rope_RopeSubstring< _CharT, _Alloc >**

- template<class _CharT2 , class _Alloc2 >
  rope< _CharT2, _Alloc2 > **operator+** (const rope< _CharT2, _Alloc2 > &__left, const rope< _CharT2, _Alloc2 > &__right)
- template<class _CharT2 , class _Alloc2 >
  rope< _CharT2, _Alloc2 > **operator+** (const rope< _CharT2, _Alloc2 > &__left, const _CharT2 *__right)
- template<class _CharT2 , class _Alloc2 >
  rope< _CharT2, _Alloc2 > **operator+** (const rope< _CharT2, _Alloc2 > &__left, _CharT2 __right)

4.894.1 Detailed Description

template<class _CharT, class _Alloc = std::allocator<_CharT>>class __gnu_cxx::rope< _CharT, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 323 of file rope.

The documentation for this class was generated from the following files:

- rope
- ropeimpl.h

4.895 std::runtime_error Class Reference

Inheritance diagram for std::runtime_error:

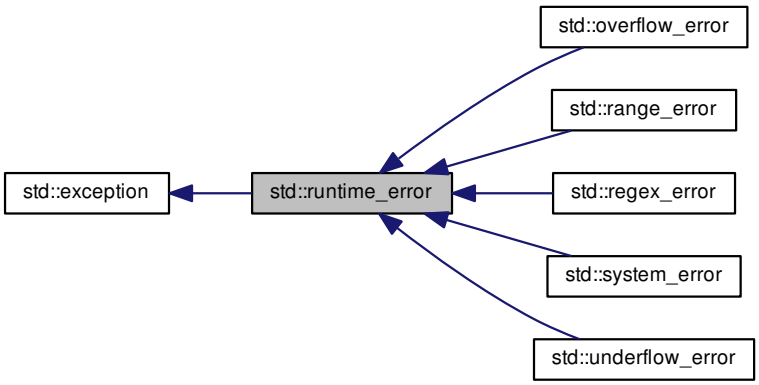

Public Member Functions

- runtime_error (const string &__arg) _GLIBCXX_TXN_SAFE
- **runtime_error** (const char *) _GLIBCXX_TXN_SAFE

- **runtime_error** (runtime_error &&) noexcept
- **runtime_error** (const runtime_error &)=default
- runtime_error & **operator=** (runtime_error &&) noexcept
- runtime_error & **operator=** (const runtime_error &)=default
- virtual const char * what () const noexcept

4.895.1 Detailed Description

One of two subclasses of exception.

Runtime errors represent problems outside the scope of a program; they cannot be easily predicted and can generally only be caught as the program executes.

Definition at line 219 of file stdexcept.

4.895.2 Constructor & Destructor Documentation

4.895.2.1 std::runtime_error::runtime_error (const string & *__arg*) [explicit]

Takes a character string describing the error.

4.895.3 Member Function Documentation

4.895.3.1 virtual const char* std::runtime_error::what ( ) const [virtual], [noexcept]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- stdexcept

4.896 __gnu_pbds::sample_probe_fn Class Reference

Public Types

- typedef std::size_t **size_type**

Public Member Functions

- sample_probe_fn ()
- sample_probe_fn (const sample_probe_fn &)
- void swap (sample_probe_fn &)

Protected Member Functions

- size_type operator() (key_const_reference r_key, size_type i) const

4.896.1 Detailed Description

A sample probe policy.

Definition at line 47 of file sample_probe_fn.hpp.

4.896.2 Constructor & Destructor Documentation

4.896.2.1 __gnu_pbds::sample_probe_fn::sample_probe_fn ( )

Default constructor.

4.896.2.2 __gnu_pbds::sample_probe_fn::sample_probe_fn (const sample_probe_fn &)

Copy constructor.

4.896.3 Member Function Documentation

4.896.3.1 size_type __gnu_pbds::sample_probe_fn::operator() (key_const_reference *r_key*, size_type *i*) const [inline], [protected]

Returns the i-th offset from the hash value of some key r_key.

4.896.3.2 void __gnu_pbds::sample_probe_fn::swap (sample_probe_fn &) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_probe_fn.hpp

4.897 __gnu_pbds::sample_range_hashing Class Reference

Public Types

- typedef std::size_t size_type

Public Member Functions

- sample_range_hashing ()
- sample_range_hashing (const sample_range_hashing &other)
- void swap (sample_range_hashing &other)

Protected Member Functions

- void notify_resized (size_type)
- size_type operator() (size_type) const

4.897.1 Detailed Description

A sample range-hashing functor.

Definition at line 47 of file sample_range_hashing.hpp.

4.897.2 Member Typedef Documentation

4.897.2.1 typedef std::size_t __gnu_pbds::sample_range_hashing::size_type

Size type.

Definition at line 51 of file sample_range_hashing.hpp.

4.897.3 Constructor & Destructor Documentation

4.897.3.1 __gnu_pbds::sample_range_hashing::sample_range_hashing ( )

Default constructor.

4.897.3.2 __gnu_pbds::sample_range_hashing::sample_range_hashing (const sample_range_hashing & *other*)

Copy constructor.

4.897.4 Member Function Documentation

4.897.4.1 void __gnu_pbds::sample_range_hashing::notify_resized (size_type) [protected]

Notifies the policy object that the container's size has changed to argument's size.

4.897.4.2 size_type __gnu_pbds::sample_range_hashing::operator() (size_type) const [inline], [protected]

Transforms the __hash value hash into a ranged-hash value.

4.897.4.3 void __gnu_pbds::sample_range_hashing::swap (sample_range_hashing & *other*) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_range_hashing.hpp

4.898 __gnu_pbds::sample_ranged_hash_fn Class Reference

Public Types

- typedef std::size_t **size_type**

Public Member Functions

- sample_ranged_hash_fn ()
- sample_ranged_hash_fn (const sample_ranged_hash_fn &)
- void swap (sample_ranged_hash_fn &)

Protected Member Functions

- void notify_resized (size_type)
- size_type operator() (key_const_reference) const

4.898.1 Detailed Description

A sample ranged-hash functor.

Definition at line 47 of file sample_ranged_hash_fn.hpp.

4.898.2 Constructor & Destructor Documentation

4.898.2.1 __gnu_pbds::sample_ranged_hash_fn::sample_ranged_hash_fn ( )

Default constructor.

4.898.2.2 __gnu_pbds::sample_ranged_hash_fn::sample_ranged_hash_fn (const sample_ranged_hash_fn &)

Copy constructor.

4.898.3 Member Function Documentation

4.898.3.1 void __gnu_pbds::sample_ranged_hash_fn::notify_resized (size_type) [protected]

Notifies the policy object that the container's __size has changed to size.

4.898.3.2 size_type __gnu_pbds::sample_ranged_hash_fn::operator() (key_const_reference) const [inline], [protected]

Transforms key_const_reference into a position within the table.

4.898.3.3 void __gnu_pbds::sample_ranged_hash_fn::swap (sample_ranged_hash_fn &) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_ranged_hash_fn.hpp

4.899 __gnu_pbds::sample_ranged_probe_fn Class Reference

Public Types

- typedef std::size_t **size_type**

Public Member Functions

- **sample_ranged_probe_fn** (const sample_ranged_probe_fn &)
- void **swap** (sample_ranged_probe_fn &)

Protected Member Functions

- void **notify_resized** (size_type)
- size_type **operator()** (key_const_reference, std::size_t, size_type) const

4.899.1 Detailed Description

A sample ranged-probe functor.

Definition at line 47 of file sample_ranged_probe_fn.hpp.

The documentation for this class was generated from the following file:

- sample_ranged_probe_fn.hpp

4.900 __gnu_pbds::sample_resize_policy Class Reference

Public Types

- typedef std::size_t size_type

Public Member Functions

- sample_resize_policy ()
- sample_range_hashing (const sample_resize_policy &other)
- void swap (sample_resize_policy &other)

Protected Member Functions

- size_type get_new_size (size_type size, size_type num_used_e) const
- bool is_resize_needed () const
- void notify_cleared ()
- void notify_erase_search_collision ()
- void notify_erase_search_end ()
- void notify_erase_search_start ()
- void notify_erased (size_type num_e)
- void notify_find_search_collision ()
- void notify_find_search_end ()
- void notify_find_search_start ()
- void notify_insert_search_collision ()
- void notify_insert_search_end ()
- void notify_insert_search_start ()
- void notify_inserted (size_type num_e)
- void notify_resized (size_type new_size)

4.900.1 Detailed Description

A sample resize policy.

Definition at line 47 of file sample_resize_policy.hpp.

4.900.2 Member Typedef Documentation

4.900.2.1 typedef std::size_t __gnu_pbds::sample_resize_policy::size_type

Size type.

Definition at line 51 of file sample_resize_policy.hpp.

4.900.3 Constructor & Destructor Documentation

4.900.3.1 __gnu_pbds::sample_resize_policy::sample_resize_policy ( )

Default constructor.

4.900.4 Member Function Documentation

4.900.4.1 size_type __gnu_pbds::sample_resize_policy::get_new_size (size_type *size,* size_type *num_used_e*) const [protected]

Queries what the new size should be.

4.900.4.2 bool __gnu_pbds::sample_resize_policy::is_resize_needed ( ) const [inline], [protected]

Queries whether a resize is needed.

4.900.4.3 void __gnu_pbds::sample_resize_policy::notify_cleared ( ) [protected]

Notifies the table was cleared.

4.900.4.4 void __gnu_pbds::sample_resize_policy::notify_erase_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.900.4.5 void __gnu_pbds::sample_resize_policy::notify_erase_search_end ( ) [inline], [protected]

Notifies a search ended.

4.900.4.6 void __gnu_pbds::sample_resize_policy::notify_erase_search_start ( ) [inline], [protected]

Notifies a search started.

4.900.4.7 void __gnu_pbds::sample_resize_policy::notify_erased (size_type *num_e*) [inline], [protected]

Notifies an element was erased.

4.900.4.8 void __gnu_pbds::sample_resize_policy::notify_find_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.900.4.9 void __gnu_pbds::sample_resize_policy::notify_find_search_end ( ) [inline], [protected]

Notifies a search ended.

4.900.4.10 void __gnu_pbds::sample_resize_policy::notify_find_search_start ( ) [inline], [protected]

Notifies a search started.

4.900.4.11 void __gnu_pbds::sample_resize_policy::notify_insert_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.900.4.12 void __gnu_pbds::sample_resize_policy::notify_insert_search_end ( ) [inline], [protected]

Notifies a search ended.

4.900.4.13 void __gnu_pbds::sample_resize_policy::notify_insert_search_start ( ) [inline], [protected]

Notifies a search started.

4.900.4.14 void __gnu_pbds::sample_resize_policy::notify_inserted (size_type *num_e*) [inline], [protected]

Notifies an element was inserted.

4.900.4.15 void __gnu_pbds::sample_resize_policy::notify_resized (size_type *new_size*) [protected]

Notifies the table was resized to new_size.

4.900.4.16 __gnu_pbds::sample_resize_policy::sample_range_hashing (const sample_resize_policy & *other*)

Copy constructor.

4.900.4.17 void __gnu_pbds::sample_resize_policy::swap (sample_resize_policy & *other*) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_resize_policy.hpp

4.901 __gnu_pbds::sample_resize_trigger Class Reference

Public Types

- typedef std::size_t size_type

Public Member Functions

- sample_resize_trigger ()
- sample_range_hashing (const sample_resize_trigger &)
- void swap (sample_resize_trigger &)

Protected Member Functions

- bool is_grow_needed (size_type size, size_type num_entries) const
- bool is_resize_needed () const
- void notify_cleared ()
- void notify_erase_search_collision ()
- void notify_erase_search_end ()
- void notify_erase_search_start ()
- void notify_erased (size_type num_entries)
- void notify_externally_resized (size_type new_size)
- void notify_find_search_collision ()
- void notify_find_search_end ()
- void notify_find_search_start ()
- void notify_insert_search_collision ()
- void notify_insert_search_end ()
- void notify_insert_search_start ()
- void notify_inserted (size_type num_entries)
- void notify_resized (size_type new_size)

4.901.1 Detailed Description

A sample resize trigger policy.

Definition at line 47 of file sample_resize_trigger.hpp.

4.901.2 Member Typedef Documentation

4.901.2.1 typedef std::size_t __gnu_pbds::sample_resize_trigger::size_type

Size type.

Definition at line 51 of file sample_resize_trigger.hpp.

4.901.3 Constructor & Destructor Documentation

4.901.3.1 __gnu_pbds::sample_resize_trigger::sample_resize_trigger ( )

Default constructor.

4.901.4 Member Function Documentation

4.901.4.1 bool __gnu_pbds::sample_resize_trigger::is_grow_needed (size_type *size,* size_type *num_entries*) const [inline], [protected]

Queries whether a grow is needed.

4.901.4.2 bool __gnu_pbds::sample_resize_trigger::is_resize_needed ( ) const [inline], [protected]

Queries whether a resize is needed.

4.901.4.3 void __gnu_pbds::sample_resize_trigger::notify_cleared ( ) [protected]

Notifies the table was cleared.

4.901.4.4 void __gnu_pbds::sample_resize_trigger::notify_erase_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.901.4.5 void __gnu_pbds::sample_resize_trigger::notify_erase_search_end ( ) [inline], [protected]

Notifies a search ended.

4.901.4.6 void __gnu_pbds::sample_resize_trigger::notify_erase_search_start ( ) [inline], [protected]

Notifies a search started.

4.901.4.7 void __gnu_pbds::sample_resize_trigger::notify_erased (size_type *num_entries*) [inline], [protected]

Notifies an element was erased.

4.901.4.8 void __gnu_pbds::sample_resize_trigger::notify_externally_resized (size_type *new_size*) [protected]

Notifies the table was resized externally.

4.901.4.9 void __gnu_pbds::sample_resize_trigger::notify_find_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.901.4.10 void __gnu_pbds::sample_resize_trigger::notify_find_search_end ( ) [inline], [protected]

Notifies a search ended.

4.901.4.11 void __gnu_pbds::sample_resize_trigger::notify_find_search_start ( ) [inline], [protected]

Notifies a search started.

4.901.4.12 void __gnu_pbds::sample_resize_trigger::notify_insert_search_collision ( ) [inline], [protected]

Notifies a search encountered a collision.

4.901.4.13 void __gnu_pbds::sample_resize_trigger::notify_insert_search_end ( ) [inline], [protected]

Notifies a search ended.

4.901.4.14 void __gnu_pbds::sample_resize_trigger::notify_insert_search_start ( ) [inline], [protected]

Notifies a search started.

4.901.4.15 void __gnu_pbds::sample_resize_trigger::notify_inserted (size_type *num_entries*) [inline], [protected]

Notifies an element was inserted. the total number of entries in the table is num_entries.

4.901.4.16 void __gnu_pbds::sample_resize_trigger::notify_resized (size_type *new_size*) [protected]

Notifies the table was resized as a result of this object's signifying that a resize is needed.

4.901.4.17 __gnu_pbds::sample_resize_trigger::sample_range_hashing (const sample_resize_trigger &)

Copy constructor.

4.901.4.18 void __gnu_pbds::sample_resize_trigger::swap (sample_resize_trigger &) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_resize_trigger.hpp

4.902 __gnu_pbds::sample_size_policy Class Reference

Public Types

- typedef std::size_t size_type

Public Member Functions

- sample_size_policy ()
- sample_range_hashing (const sample_size_policy &)
- void swap (sample_size_policy &other)

Protected Member Functions

- size_type get_nearest_larger_size (size_type size) const
- size_type get_nearest_smaller_size (size_type size) const

4.902.1 Detailed Description

A sample size policy.

Definition at line 47 of file sample_size_policy.hpp.

4.902.2 Member Typedef Documentation

4.902.2.1 typedef std::size_t __gnu_pbds::sample_size_policy::size_type

Size type.

Definition at line 51 of file sample_size_policy.hpp.

4.902.3 Constructor & Destructor Documentation

4.902.3.1 __gnu_pbds::sample_size_policy::sample_size_policy ( )

Default constructor.

4.902.4 Member Function Documentation

4.902.4.1 size_type __gnu_pbds::sample_size_policy::get_nearest_larger_size (size_type *size*) const [inline], [protected]

Given a __size size, returns a __size that is larger.

4.902.4.2 size_type __gnu_pbds::sample_size_policy::get_nearest_smaller_size (size_type *size*) const [inline], [protected]

Given a __size size, returns a __size that is smaller.

4.902.4.3 __gnu_pbds::sample_size_policy::sample_range_hashing (const sample_size_policy &)

Copy constructor.

4.902.4.4 void __gnu_pbds::sample_size_policy::swap (sample_size_policy & *other*) [inline]

Swaps content.

The documentation for this class was generated from the following file:

- sample_size_policy.hpp

4.903 __gnu_pbds::sample_tree_node_update< Const_Node_Iter, Node_Iter, Cmp_Fn, _Alloc > Class Template Reference

4.903.1 Detailed Description

template<typename Const_Node_Iter, typename Node_Iter, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::sample_tree_node_update< Const_Node_Iter, Node_Iter, Cmp_Fn, _Alloc >

A sample node updator.

Definition at line 49 of file sample_tree_node_update.hpp.

The documentation for this class was generated from the following file:

- sample_tree_node_update.hpp

4.904 __gnu_pbds::sample_trie_access_traits Struct Reference

Public Types

- enum { **max_size** }
- typedef std::string::const_iterator **const_iterator**
- typedef char e_type
- typedef rebind_traits< _Alloc, key_type >::const_reference **key_const_reference**
- typedef std::string **key_type**
- typedef std::size_t **size_type**

Static Public Member Functions

- static const_iterator begin (key_const_reference)
- static size_type e_pos (e_type)
- static const_iterator end (key_const_reference)

4.904.1 Detailed Description

A sample trie element access traits.

Definition at line 47 of file sample_trie_access_traits.hpp.

4.904.2 Member Typedef Documentation

4.904.2.1 typedef char __gnu_pbds::sample_trie_access_traits::e_type

Element type.

Definition at line 57 of file sample_trie_access_traits.hpp.

4.904.3 Member Function Documentation

4.904.3.1 static const_iterator __gnu_pbds::sample_trie_access_traits::begin (key_const_reference) [inline], [static]

Returns a const_iterator to the first element of r_key.

4.904.3.2 static size_type __gnu_pbds::sample_trie_access_traits::e_pos (e_type) [inline], [static]

Maps an element to a position.

4.904.3.3 static const_iterator __gnu_pbds::sample_trie_access_traits::end (key_const_reference) [inline], [static]

Returns a const_iterator to the after-last element of r_key.

The documentation for this struct was generated from the following file:

- sample_trie_access_traits.hpp

4.905 __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference

Public Types

- typedef std::size_t **metadata_type**

Protected Member Functions

- sample_trie_node_update ()
- void operator() (node_iterator, node_const_iterator) const

4.905.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc>class __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >

A sample node updator.

Definition at line 49 of file sample_trie_node_update.hpp.

4.905.2 Constructor & Destructor Documentation

4.905.2.1 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::sample_trie_node_update ( ) [protected]

Default constructor.

4.905.3 Member Function Documentation

4.905.3.1 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > void __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::operator() (node_iterator , node_const_iterator) const [inline], [protected]

Updates the rank of a node through a node_iterator node_it; end_nd_it is the end node iterator.

The documentation for this class was generated from the following file:

- sample_trie_node_update.hpp

4.906 __gnu_pbds::sample_update_policy Struct Reference

Public Member Functions

- sample_update_policy ()
- sample_update_policy (const sample_update_policy &)
- void swap (sample_update_policy &other)

Protected Types

- typedef some_metadata_type metadata_type

Protected Member Functions

- metadata_type operator() () const
- bool operator() (metadata_reference) const

4.906.1 Detailed Description

A sample list-update policy.

Definition at line 47 of file sample_update_policy.hpp.

4.906.2 Member Typedef Documentation

4.906.2.1 typedef some_metadata_type __gnu_pbds::sample_update_policy::metadata_type [protected]

Metadata on which this functor operates.

Definition at line 61 of file sample_update_policy.hpp.

4.906.3 Constructor & Destructor Documentation

4.906.3.1 __gnu_pbds::sample_update_policy::sample_update_policy ( )

Default constructor.

4.906.3.2 __gnu_pbds::sample_update_policy::sample_update_policy (const sample_update_policy &)

Copy constructor.

4.906.4 Member Function Documentation

4.906.4.1 metadata_type __gnu_pbds::sample_update_policy::operator() ( ) const [protected]

Creates a metadata object.

4.906.4.2 bool __gnu_pbds::sample_update_policy::operator() (metadata_reference) const [protected]

Decides whether a metadata object should be moved to the front of the list. A list-update based containers object will call this method to decide whether to move a node to the front of the list. The method shoule return true if the node should be moved to the front of the list.

4.906.4.3 void __gnu_pbds::sample_update_policy::swap (sample_update_policy & *other*) [inline]

Swaps content.

The documentation for this struct was generated from the following file:

- sample_update_policy.hpp

4.907 __gnu_parallel::sampling_tag Struct Reference

Inheritance diagram for __gnu_parallel::sampling_tag:

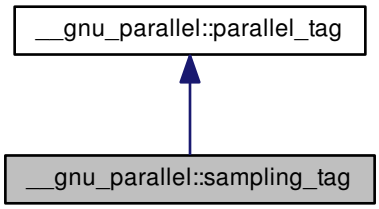

Public Member Functions

- **sampling_tag** (_ThreadIndex __num_threads)
- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.907.1 Detailed Description

Forces parallel merging with exact splitting, at compile time.

Definition at line 118 of file tags.h.

4.907.2 Member Function Documentation

4.907.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline], [inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.907.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.908 std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs > Class Template Reference

Inherits _OuterAlloc.

Public Types

- typedef __traits::const_pointer **const_pointer**
- typedef __traits::const_void_pointer **const_void_pointer**
- typedef __traits::difference_type **difference_type**
- typedef __inner_type::__type **inner_allocator_type**
- typedef __and_< typename __traits::is_always_equal, typename allocator_traits < _InnerAllocs > ::is_always_equal...>::type **is_always_equal**
- typedef _OuterAlloc **outer_allocator_type**
- typedef __traits::pointer **pointer**
- typedef __or_< typename __traits::propagate_on_container_copy_assignment, typename allocator_traits < _InnerAllocs > ::propagate_on_container_copy_assignment...> ::type **propagate_on_container_copy_assignment**
- typedef __or_< typename __traits::propagate_on_container_move_assignment, typename allocator_traits < _InnerAllocs > ::propagate_on_container_move_assignment...> ::type **propagate_on_container_move_assignment**
- typedef __or_< typename __traits::propagate_on_container_swap, typename allocator_traits < _InnerAllocs > ::propagate_on_container_swap...> ::type **propagate_on_container_swap**
- typedef __traits::size_type **size_type**
- typedef __traits::value_type **value_type**
- typedef __traits::void_pointer **void_pointer**

Public Member Functions

- template<typename _Outer2 , typename = _Constructible<_Outer2>>
  scoped_allocator_adaptor (_Outer2 &&__outer, const _InnerAllocs &...__inner)
- **scoped_allocator_adaptor** (const scoped_allocator_adaptor &__other)
- **scoped_allocator_adaptor** (scoped_allocator_adaptor &&__other)
- template<typename _Outer2 , typename = _Constructible<const _Outer2&>>
  scoped_allocator_adaptor (const scoped_allocator_adaptor< _Outer2, _InnerAllocs...> &__other)
- template<typename _Outer2 , typename = _Constructible<_Outer2>>
  scoped_allocator_adaptor (scoped_allocator_adaptor< _Outer2, _InnerAllocs...> &&__other)
- pointer **allocate** (size_type __n)
- pointer **allocate** (size_type __n, const_void_pointer __hint)
- template<typename _Tp , typename... _Args>
  __not_pair< _Tp >::type **construct** (_Tp *__p, _Args &&...__args)
- template<typename _T1 , typename _T2 , typename... _Args1, typename... _Args2>
  void **construct** (pair< _T1, _T2 > *__p, piecewise_construct_t, tuple< _Args1...> __x, tuple< _Args2...> __y)
- template<typename _T1 , typename _T2 >
  void **construct** (pair< _T1, _T2 > *__p)
- template<typename _T1 , typename _T2 , typename _Up , typename _Vp >
  void **construct** (pair< _T1, _T2 > *__p, _Up &&__u, _Vp &&__v)
- template<typename _T1 , typename _T2 , typename _Up , typename _Vp >
  void **construct** (pair< _T1, _T2 > *__p, const pair< _Up, _Vp > &__x)
- template<typename _T1 , typename _T2 , typename _Up , typename _Vp >
  void **construct** (pair< _T1, _T2 > *__p, pair< _Up, _Vp > &&__x)
- void **deallocate** (pointer __p, size_type __n)
- template<typename _Tp >
  void **destroy** (_Tp *__p)
- inner_allocator_type & **inner_allocator** () noexcept
- const inner_allocator_type & **inner_allocator** () const noexcept
- size_type **max_size** () const
- scoped_allocator_adaptor & **operator=** (const scoped_allocator_adaptor &)=default
- scoped_allocator_adaptor & **operator=** (scoped_allocator_adaptor &&)=default
- outer_allocator_type & **outer_allocator** () noexcept
- const outer_allocator_type & **outer_allocator** () const noexcept
- scoped_allocator_adaptor **select_on_container_copy_construction** () const

Friends

- template<typename _Outer , typename... _Inner>
  class **scoped_allocator_adaptor**
- template<typename... >
  class **__inner_type_impl**
- template<typename _OutA1 , typename _OutA2 , typename... _InA>
  bool **operator==** (const scoped_allocator_adaptor< _OutA1, _InA...> &__a, const scoped_allocator_adaptor< _OutA2, _InA...> &__b) noexcept

Related Functions

(Note that these are not member functions.)

- template<typename _OutA1 , typename _OutA2 , typename... _InA>
  bool operator!= (const scoped_allocator_adaptor< _OutA1, _InA...> &__a, const scoped_allocator_adaptor< _OutA2, _InA...> &__b) noexcept
- template<typename _OutA1 , typename _OutA2 , typename... _InA>
  bool operator== (const scoped_allocator_adaptor< _OutA1, _InA...> &__a, const scoped_allocator_adaptor< _OutA2, _InA...> &__b) noexcept

4.908.1 Detailed Description

template<typename _OuterAlloc, typename... _InnerAllocs>class std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs >

An adaptor to recursively pass an allocator to the objects it constructs.

Definition at line 175 of file scoped_allocator.

The documentation for this class was generated from the following file:

- scoped_allocator

4.909 std::seed_seq Class Reference

Public Types

- typedef uint_least32_t result_type

Public Member Functions

- seed_seq () noexcept
- template<typename _IntType >
  seed_seq (std::initializer_list< _IntType > __il)
- template<typename _InputIterator >
  seed_seq (_InputIterator __begin, _InputIterator __end)
- **seed_seq** (const seed_seq &)=delete
- template<typename _RandomAccessIterator >
  void **generate** (_RandomAccessIterator __begin, _RandomAccessIterator __end)
- seed_seq & **operator=** (const seed_seq &)=delete
- template<typename _OutputIterator >
  void **param** (_OutputIterator __dest) const
- size_t **size** () const noexcept

4.909.1 Detailed Description

The seed_seq class generates sequences of seeds for random number generators.

Definition at line 6054 of file random.h.

4.909.2 Member Typedef Documentation

4.909.2.1 typedef uint_least32_t std::seed_seq::result_type

The type of the seed vales.

Definition at line 6058 of file random.h.

4.909.3 Constructor & Destructor Documentation

4.909.3.1 std::seed_seq::seed_seq ( ) [inline], [noexcept]

Default constructor.

Definition at line 6061 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.910 __gnu_cxx::select1st< _Pair > Struct Template Reference

Inherits std::_Select1st< _Pair >.

Public Types

- typedef _Pair argument_type
- typedef _Pair::first_type result_type

Public Member Functions

- _Pair::first_type & **operator()** (_Pair &__x) const
- const _Pair::first_type & **operator()** (const _Pair &__x) const
- template<typename _Pair2 >
  _Pair2::first_type & **operator()** (_Pair2 &__x) const
- template<typename _Pair2 >
  const _Pair2::first_type & **operator()** (const _Pair2 &__x) const

4.910.1 Detailed Description

template<class _Pair>struct __gnu_cxx::select1st< _Pair >

An SGI extension .

Definition at line 192 of file ext/functional.

4.910.2 Member Typedef Documentation

4.910.2.1 typedef _Pair std::unary_function< _Pair , _Pair::first_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.910.2.2 typedef _Pair::first_type std::unary_function< _Pair , _Pair::first_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- ext/functional

4.911 __gnu_cxx::select2nd< _Pair > Struct Template Reference

Inherits std::_Select2nd< _Pair >.

Public Types

- typedef _Pair argument_type
- typedef _Pair::second_type result_type

Public Member Functions

- _Pair::second_type & **operator()** (_Pair &__x) const
- const _Pair::second_type & **operator()** (const _Pair &__x) const

4.911.1 Detailed Description

template<class _Pair>struct __gnu_cxx::select2nd< _Pair >

An SGI extension .

Definition at line 197 of file ext/functional.

4.911.2 Member Typedef Documentation

4.911.2.1 typedef _Pair std::unary_function< _Pair , _Pair::second_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.911.2.2 typedef _Pair::second_type std::unary_function< _Pair , _Pair::second_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- ext/functional

4.912 __gnu_pbds::detail::select_value_type< Key, Mapped > Struct Template Reference

Public Types

- typedef std::pair< const Key,
  Mapped > **type**

4.912.1 Detailed Description

template<typename Key, typename Mapped>struct __gnu_pbds::detail::select_value_type< Key, Mapped >

Choose value_type to be a key/value pair or just a key.

Definition at line 107 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.913 __gnu_pbds::detail::select_value_type< Key, null_type > Struct Template Reference

Public Types

- typedef Key **type**

4.913.1 Detailed Description

template<typename Key>struct __gnu_pbds::detail::select_value_type< Key, null_type >

Specialization for sets where the key is the value_type.

Definition at line 114 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.914 std::basic_istream< _CharT, _Traits >::sentry Class Reference

Public Types

- typedef __istream_type::__ctype_type **__ctype_type**
- typedef _Traits::int_type **__int_type**
- typedef basic_istream< _CharT, _Traits > **__istream_type**
- typedef basic_streambuf < _CharT, _Traits > **__streambuf_type**
- typedef _Traits traits_type

Public Member Functions

- sentry (basic_istream< _CharT, _Traits > &__is, bool __noskipws=false)
- operator bool () const

4.914.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_istream< _CharT, _Traits >::sentry

Performs setup work for input streams.

Objects of this class are created before all of the standard extractors are run. It is responsible for *exception-safe prefix and suffix operations,* although only prefix actions are currently required by the standard.

Definition at line 686 of file istream.

4.914.2 Member Typedef Documentation

4.914.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> typedef _Traits std::basic_istream< _CharT, _Traits >::sentry::traits_type

Easy access to dependent types.

Definition at line 693 of file istream.

4.914.3 Constructor & Destructor Documentation

4.914.3.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_istream< _CharT, _Traits >::sentry::sentry (basic_istream< _CharT, _Traits > & *__is,* bool *__noskipws* = `false`) `[explicit]`

The constructor performs all the work.

Parameters

__is	The input stream to guard.
__noskipws	Whether to consume whitespace or not.

If the stream state is good (*__is.good()* is true), then the following actions are performed, otherwise the sentry state is false (*not okay*) and failbit is set in the stream state.

The sentry's preparatory actions are:

1. if the stream is tied to an output stream, `is.tie()->flush()` is called to synchronize the output sequence
2. if *__noskipws* is false, and `ios_base::skipws` is set in `is.flags()`, the sentry extracts and discards whitespace characters from the stream. The currently imbued locale is used to determine whether each character is whitespace.

If the stream state is still good, then the sentry state becomes true (*okay*).

Definition at line 47 of file istream.tcc.

References std::ios_base::badbit, std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::flags(), std::basic_ios< _CharT, _Traits >::good(), std::ios_base::goodbit, std::__ctype_abstract_base< _CharT >::is(), std::basic_ios< _CharT, _Traits >::rdbuf(), std::basic_ios< _CharT, _Traits >::setstate(), std::basic_streambuf< _CharT, _Traits >::sgetc(), std::ios_base::skipws, std::basic_streambuf< _CharT, _Traits >::snextc(), and std::basic_ios< _CharT, _Traits >::tie().

4.914.4 Member Function Documentation

4.914.4.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_istream< _CharT, _Traits >::sentry::operator bool ( ) const `[inline]`, `[explicit]`

Quick status checking.

Returns

The sentry state.

For ease of use, sentries may be converted to booleans. The return value is that of the sentry state (true == okay).

Definition at line 734 of file istream.

The documentation for this class was generated from the following files:

- istream
- istream.tcc

4.915 std::basic_ostream< _CharT, _Traits >::sentry Class Reference

Public Member Functions

- sentry (basic_ostream< _CharT, _Traits > &__os)
- ~sentry ()
- operator bool () const

4.915.1 Detailed Description

template<typename _CharT, typename _Traits = char_traits<_CharT>>class std::basic_ostream< _CharT, _Traits >::sentry

Performs setup work for output streams.

Objects of this class are created before all of the standard inserters are run. It is responsible for *exception-safe prefix and suffix operations*.

Definition at line 432 of file ostream.

4.915.2 Constructor & Destructor Documentation

4.915.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ostream< _CharT, _Traits >::sentry::sentry (basic_ostream< _CharT, _Traits > & *__os*) [explicit]

The constructor performs preparatory work.

Parameters

__os	The output stream to guard.

If the stream state is good (*__os.good()* is true), then if the stream is tied to another output stream, `is.tie()->flush()` is called to synchronize the output sequences.

If the stream state is still good, then the sentry state becomes true (*okay*).

Definition at line 47 of file ostream.tcc.

References std::ios_base::failbit, std::basic_ios< _CharT, _Traits >::good(), std::basic_ios< _CharT, _Traits >::setstate(), and std::basic_ios< _CharT, _Traits >::tie().

4.915.2.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ostream< _CharT, _Traits >::sentry::~sentry ( ) [inline]

Possibly flushes the stream.

If `ios_base::unitbuf` is set in `os.flags()`, and `std::uncaught_exception()` is true, the sentry destructor calls `flush()` on the output stream.

Definition at line 462 of file ostream.

References std::ios_base::badbit, std::uncaught_exception(), and std::ios_base::unitbuf.

4.915.3 Member Function Documentation

4.915.3.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> std::basic_ostream< _CharT, _Traits >::sentry::operator bool ( ) const [inline], [explicit]

Quick status checking.

Returns

The sentry state.

For ease of use, sentries may be converted to booleans. The return value is that of the sentry state (true == okay).

Definition at line 484 of file ostream.

The documentation for this class was generated from the following files:

- ostream
- ostream.tcc

4.916 __gnu_pbds::sequence_tag Struct Reference

Inheritance diagram for __gnu_pbds::sequence_tag:

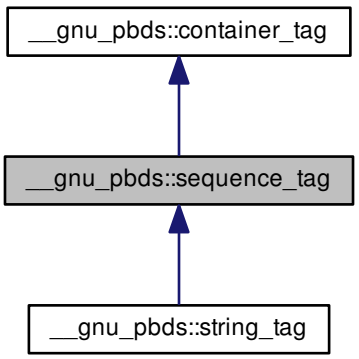

4.916.1 Detailed Description

Basic sequence.

Definition at line 129 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.917 __gnu_parallel::sequential_tag Struct Reference

4.917.1 Detailed Description

Forces sequential execution at compile time.

Definition at line 42 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.918 std::__debug::set< _Key, _Compare, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::set< _Key, _Compare, _Allocator >:



Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, set > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, set > **iterator**
- typedef _Compare **key_compare**
- typedef _Key **key_type**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Compare **value_compare**
- typedef _Key **value_type**

Public Member Functions

- **set** (const set &)=default
- **set** (set &&)=default
- **set** (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- **set** (const allocator_type &__a)
- **set** (const set &__x, const allocator_type &__a)
- **set** (set &&__x, const allocator_type &__a) noexcept(noexcept(_Base(std::move(__x._M_base()), __a)))
- **set** (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator >
  set (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- **set** (const _Compare &__comp, const _Allocator &__a=_Allocator())
- template<typename _InputIterator >
  set (_InputIterator __first, _InputIterator __last, const _Compare &__comp=_Compare(), const _Allocator &__a=_Allocator())
- **set** (const _Base &__x)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args>
  std::pair< iterator, bool > **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __pos, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- std::pair< iterator, iterator > **equal_range** (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< iterator, iterator > **equal_range** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  std::pair< const_iterator,
  const_iterator > **equal_range** (const _Kt &__x) const
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __position)
- size_type **erase** (const key_type &__x)
- _GLIBCXX_ABI_TAG_CXX11 iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__x)
- const_iterator **find** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **find** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **find** (const _Kt &__x) const

- std::pair< iterator, bool > **insert** (const value_type &__x)
- std::pair< iterator, bool > **insert** (value_type &&__x)
- iterator **insert** (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- void **insert** (initializer_list< value_type > __l)
- iterator **lower_bound** (const key_type &__x)
- const_iterator **lower_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **lower_bound** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **lower_bound** (const _Kt &__x) const
- set & **operator=** (const set &)=default
- set & **operator=** (set &&)=default
- set & **operator=** (initializer_list< value_type > __l)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept
- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **swap** (set &__x) noexcept(/*conditional */)
- iterator **upper_bound** (const key_type &__x)
- const_iterator **upper_bound** (const key_type &__x) const
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  iterator **upper_bound** (const _Kt &__x)
- template<typename _Kt , typename _Req = typename __has_is_transparent<_Compare, _Kt>::type>
  const_iterator **upper_bound** (const _Kt &__x) const

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.918.1 Detailed Description

template<typename _Key, typename _Compare = std::less<_Key>, typename _Allocator = std::allocator<_Key>>class std::__debug::set< _Key, _Compare, _Allocator >

Class std::set with safety/checking/debug instrumentation.

Definition at line 44 of file set.h.

4.918.2 Member Function Documentation

4.918.2.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.918.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.918.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.918.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.918.2.5 void __gnu_debug::_Safe_sequence< set< _Key, _Compare, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.918.2.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.918.2.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.918.2.8 void __gnu_debug::_Safe_sequence< set< _Key, _Compare, _Allocator > >::_M_transfer_from_if (_Safe_sequence< set< _Key, _Compare, _Allocator > > & *__from*, _Predicate *__pred*) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.918.3 Member Data Documentation

4.918.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.918.3.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.918.3.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- set.h

4.919 std::set< _Key, _Compare, _Alloc > Class Template Reference

Public Types

- typedef _Key key_type
- typedef _Key value_type
- typedef _Compare key_compare
- typedef _Compare value_compare
- typedef _Alloc allocator_type

- typedef _Alloc_traits::pointer pointer
- typedef _Alloc_traits::const_pointer const_pointer
- typedef _Alloc_traits::reference reference
- typedef _Alloc_traits::const_reference const_reference
- typedef _Rep_type::const_iterator iterator
- typedef _Rep_type::const_iterator const_iterator
- typedef _Rep_type::const_reverse_iterator reverse_iterator

- typedef _Rep_type::const_reverse_iterator const_reverse_iterator
- typedef _Rep_type::size_type size_type
- typedef _Rep_type::difference_type difference_type

Public Member Functions

- set ()=default
- set (const _Compare &__comp, const allocator_type &__a=allocator_type())
- template<typename _InputIterator >
  set (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  set (_InputIterator __first, _InputIterator __last, const _Compare &__comp, const allocator_type &__a=allocator_type())
- set (const set &)=default
- set (set &&)=default
- set (initializer_list< value_type > __l, const _Compare &__comp=_Compare(), const allocator_type &__a=allocator_type())
- set (const allocator_type &__a)
- set (const set &__x, const allocator_type &__a)
- set (set &&__x, const allocator_type &__a) noexcept(is_nothrow_copy_constructible< _Compare >::value &&_Alloc_traits::_S_always_equal())
- set (initializer_list< value_type > __l, const allocator_type &__a)
- template<typename _InputIterator >
  set (_InputIterator __first, _InputIterator __last, const allocator_type &__a)
- ~set ()=default
- iterator begin () const noexcept
- iterator cbegin () const noexcept
- iterator cend () const noexcept
- void clear () noexcept
- reverse_iterator crbegin () const noexcept
- reverse_iterator crend () const noexcept
- template<typename... _Args>
  std::pair< iterator, bool > emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () const noexcept
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (const_iterator __position)
- size_type erase (const key_type &__x)
- _GLIBCXX_ABI_TAG_CXX11 iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- std::pair< iterator, bool > insert (const value_type &__x)
- std::pair< iterator, bool > **insert** (value_type &&__x)
- iterator insert (const_iterator __position, const value_type &__x)
- iterator **insert** (const_iterator __position, value_type &&__x)
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_compare key_comp () const
- size_type max_size () const noexcept

- set & operator= (const set &)=default
- set & operator= (set &&)=default
- set & operator= (initializer_list< value_type > __l)
- reverse_iterator rbegin () const noexcept
- reverse_iterator rend () const noexcept
- size_type size () const noexcept
- void swap (set &__x) noexcept(/*conditional */)
- value_compare value_comp () const

- size_type count (const key_type &__x) const
- template<typename _Kt >
  auto count (const _Kt &__x) const -> decltype(_M_t._M_count_tr(__x))

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const
- template<typename _Kt >
  auto find (const _Kt &__x) -> decltype(iterator
- template<typename _Kt >
  auto find (const _Kt &__x) const -> decltype(const_iterator

- iterator lower_bound (const key_type &__x)
- const_iterator lower_bound (const key_type &__x) const
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x)))
- template<typename _Kt >
  auto lower_bound (const _Kt &__x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x)))

- iterator upper_bound (const key_type &__x)
- const_iterator upper_bound (const key_type &__x) const
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))
- template<typename _Kt >
  auto upper_bound (const _Kt &__x) const -> decltype(iterator(_M_t._M_upper_bound_tr(__x)))

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const
- template<typename _Kt >
  auto equal_range (const _Kt &__x) -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))
- template<typename _Kt >
  auto equal_range (const _Kt &__x) const -> decltype(pair< iterator, iterator >(_M_t._M_equal_range_tr(__x)))

Friends

- template<typename _K1 , typename _C1 , typename _A1 >
  bool **operator**< (const set< _K1, _C1, _A1 > &, const set< _K1, _C1, _A1 > &)
- template<typename _K1 , typename _C1 , typename _A1 >
  bool **operator==** (const set< _K1, _C1, _A1 > &, const set< _K1, _C1, _A1 > &)

4.919.1 Detailed Description

template<typename _Key, typename _Compare, typename _Alloc>class std::set< _Key, _Compare, _Alloc >

A standard container made up of unique keys, which can be retrieved in logarithmic time.

Template Parameters

_Key	Type of key objects.
_Compare	Comparison function object type, defaults to less<_Key>.
_Alloc	Allocator type, defaults to allocator<_Key>.

Meets the requirements of a container, a reversible container, and an associative container (using unique keys).

Sets support bidirectional iterators.

The private tree data is declared exactly the same way for set and multiset; the distinction is made entirely in how the tree functions are called (*_unique versus *_equal, same as the standard).

Definition at line 70 of file stl_multiset.h.

4.919.2 Member Typedef Documentation

4.919.2.1 template<typename _Key , typename _Compare , typename _Alloc > typedef _Alloc std::set< _Key, _Compare, _Alloc >::allocator_type

Public typedefs.

Definition at line 124 of file stl_set.h.

4.919.2.2 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::const_iterator std::set< _Key, _Compare, _Alloc >::const_iterator

Iterator-related typedefs.

Definition at line 148 of file stl_set.h.

4.919.2.3 template<typename _Key , typename _Compare , typename _Alloc > typedef _Alloc_traits::const_pointer std::set< _Key, _Compare, _Alloc >::const_pointer

Iterator-related typedefs.

Definition at line 141 of file stl_set.h.

4.919.2.4 template<typename _Key , typename _Compare , typename _Alloc > typedef _Alloc_traits::const_reference std::set< _Key, _Compare, _Alloc >::const_reference

Iterator-related typedefs.

Definition at line 143 of file stl_set.h.

4.919.2.5 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::const_reverse_iterator std::set< _Key, _Compare, _Alloc >::const_reverse_iterator

Iterator-related typedefs.

Definition at line 150 of file stl_set.h.

4.919.2.6 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::difference_type std::set< _Key, _Compare, _Alloc >::difference_type

Iterator-related typedefs.

Definition at line 152 of file stl_set.h.

4.919.2.7 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::const_iterator std::set< _Key, _Compare, _Alloc >::iterator

Iterator-related typedefs.

Definition at line 147 of file stl_set.h.

4.919.2.8 template<typename _Key , typename _Compare , typename _Alloc > typedef _Compare std::set< _Key, _Compare, _Alloc >::key_compare

Public typedefs.

Definition at line 122 of file stl_set.h.

4.919.2.9 template<typename _Key , typename _Compare , typename _Alloc > typedef _Key std::set< _Key, _Compare, _Alloc >::key_type

Public typedefs.

Definition at line 109 of file stl_set.h.

4.919.2.10 template<typename _Key , typename _Compare , typename _Alloc > typedef _Alloc_traits::pointer std::set< _Key, _Compare, _Alloc >::pointer

Iterator-related typedefs.

Definition at line 140 of file stl_set.h.

4.919.2.11 template<typename _Key , typename _Compare , typename _Alloc > typedef _Alloc_traits::reference std::set< _Key, _Compare, _Alloc >::reference

Iterator-related typedefs.

Definition at line 142 of file stl_set.h.

4.919.2.12 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::const_reverse_iterator std::set< _Key, _Compare, _Alloc >::reverse_iterator

Iterator-related typedefs.

Definition at line 149 of file stl_set.h.

4.919.2.13 template<typename _Key , typename _Compare , typename _Alloc > typedef _Rep_type::size_type std::set< _Key, _Compare, _Alloc >::size_type

Iterator-related typedefs.

Definition at line 151 of file stl_set.h.

4.919.2.14 template<typename _Key , typename _Compare , typename _Alloc > typedef _Compare std::set< _Key, _Compare, _Alloc >::value_compare

Public typedefs.

Definition at line 123 of file stl_set.h.

4.919.2.15 template<typename _Key , typename _Compare , typename _Alloc > typedef _Key std::set< _Key, _Compare, _Alloc >::value_type

Public typedefs.

Definition at line 121 of file stl_set.h.

4.919.3 Constructor & Destructor Documentation

4.919.3.1 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set ( ) [default]

Default constructor creates no elements.

4.919.3.2 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (const _Compare & *__comp,* const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Creates a set with no elements.

Parameters

__comp	Comparator to use.
__a	An allocator object.

Definition at line 176 of file stl_set.h.

4.919.3.3 template<typename _Key , typename _Compare , typename _Alloc > template<typename _InputIterator > std::set< _Key, _Compare, _Alloc >::set (_InputIterator *__first,* _InputIterator *__last*) [inline]

Builds a set from a range.

Parameters

__first	An input iterator.
__last	An input iterator.

Create a set consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 191 of file stl_set.h.

4.919.3.4 template<typename _Key , typename _Compare , typename _Alloc > template<typename _InputIterator > std::set< _Key, _Compare, _Alloc >::set (_InputIterator *__first,* _InputIterator *__last,* const _Compare & *__comp,* const allocator_type & *__a* = allocator_type()) [inline]

Builds a set from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__comp	A comparison functor.
__a	An allocator object.

Create a set consisting of copies of the elements from [__first,__last). This is linear in N if the range is already sorted, and NlogN otherwise (where N is distance(__first,__last)).

Definition at line 208 of file stl_set.h.

4.919.3.5 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (const set< _Key, _Compare, _Alloc > &) [default]

Set copy constructor.

Whether the allocator is copied depends on the allocator traits.

4.919.3.6 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (set< _Key, _Compare, _Alloc > &&) [default]

Set move constructor

The newly-created set contains the exact contents of the moved instance. The moved instance is a valid, but unspecified, set.

4.919.3.7 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (initializer_list< value_type > __l, const _Compare & __comp = _Compare(), const allocator_type & __a = allocator_type()) [inline]

Builds a set from an initializer_list.

Parameters

__l	An initializer_list.
__comp	A comparison functor.
__a	An allocator object.

Create a set consisting of copies of the elements in the list. This is linear in N if the list is already sorted, and NlogN otherwise (where N is *__l.size()*).

Definition at line 243 of file stl_set.h.

4.919.3.8 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (const allocator_type & __a) [inline], [explicit]

Allocator-extended default constructor.

Definition at line 251 of file stl_set.h.

4.919.3.9 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (const set< _Key, _Compare, _Alloc > & __x, const allocator_type & __a) [inline]

Allocator-extended copy constructor.

Definition at line 255 of file stl_set.h.

4.919.3.10 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (set< _Key, _Compare, _Alloc > && __x, const allocator_type & __a) [inline], [noexcept]

Allocator-extended move constructor.

Definition at line 259 of file stl_set.h.

4.919.3.11 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::set (initializer_list< value_type > __l, const allocator_type & __a) [inline]

Allocator-extended initialier-list constructor.

Definition at line 265 of file stl_set.h.

4.919.3.12 template<typename _Key , typename _Compare , typename _Alloc > template<typename _InputIterator > std::set< _Key, _Compare, _Alloc >::set (_InputIterator __first, _InputIterator __last, const allocator_type & __a) [inline]

Allocator-extended range constructor.

Definition at line 271 of file stl_set.h.

4.919.3.13 template<typename _Key , typename _Compare , typename _Alloc > std::set< _Key, _Compare, _Alloc >::~set ( ) [default]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

4.919.4 Member Function Documentation

4.919.4.1 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the set. Iteration is done in ascending order according to the keys.

Definition at line 344 of file stl_set.h.

4.919.4.2 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the set. Iteration is done in ascending order according to the keys.

Definition at line 381 of file stl_set.h.

4.919.4.3 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the set. Iteration is done in ascending order according to the keys.

Definition at line 390 of file stl_set.h.

4.919.4.4 template<typename _Key , typename _Compare , typename _Alloc > void std::set< _Key, _Compare, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in a set. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 733 of file stl_set.h.

4.919.4.5 template<typename _Key , typename _Compare , typename _Alloc > size_type std::set< _Key, _Compare, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements.

Parameters

__x	Element to located.

Returns

Number of elements with specified key.

This function only makes sense for multisets; for set the result will either be 0 (not present) or 1 (present).

Definition at line 748 of file stl_set.h.

4.919.4.6 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::count (const _Kt & __x) const -> decltype(_M_t._M_count_tr(__x)) [inline]

Finds the number of elements.

Parameters

__x	Element to located.

Returns

Number of elements with specified key.

This function only makes sense for multisets; for set the result will either be 0 (not present) or 1 (present).

Definition at line 754 of file stl_set.h.

4.919.4.7 template<typename _Key , typename _Compare , typename _Alloc > reverse_iterator std::set< _Key, _Compare, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the last element in the set. Iteration is done in descending order according to the keys.

Definition at line 399 of file stl_set.h.

4.919.4.8 template<typename _Key , typename _Compare , typename _Alloc > reverse_iterator std::set< _Key, _Compare, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the set. Iteration is done in descending order according to the keys.

Definition at line 408 of file stl_set.h.

4.919.4.9 template<typename _Key , typename _Compare , typename _Alloc > template<typename... _Args> std::pair<iterator, bool> std::set< _Key, _Compare, _Alloc >::emplace (_Args &&... *__args*) [inline]

Attempts to build and insert an element into the set.

Parameters

__args	Arguments used to generate an element.

Returns

A pair, of which the first element is an iterator that points to the possibly inserted element, and the second is a bool that is true if the element was actually inserted.

This function attempts to build and insert an element into the set. A set relies on unique keys and thus an element is only inserted if it is not already present in the set.

Insertion requires logarithmic time.

Definition at line 462 of file stl_set.h.

4.919.4.10 template<typename _Key , typename _Compare , typename _Alloc > template<typename... _Args> iterator std::set< _Key, _Compare, _Alloc >::emplace_hint (const_iterator *__pos,* _Args &&... *__args*) [inline]

Attempts to insert an element into the set.

Parameters

__pos	An iterator that serves as a hint as to where the element should be inserted.
__args	Arguments used to generate the element to be inserted.

Returns

An iterator that points to the element with key equivalent to the one generated from *__args* (may or may not be the element itself).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument emplace() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 488 of file stl_set.h.

4.919.4.11 template<typename _Key , typename _Compare , typename _Alloc > bool std::set< _Key, _Compare, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the set is empty.

Definition at line 414 of file stl_set.h.

4.919.4.12 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the set. Iteration is done in ascending order according to the keys.

Definition at line 353 of file stl_set.h.

4.919.4.13 template<typename _Key , typename _Compare , typename _Alloc > std::pair<iterator, iterator> std::set< _Key, _Compare, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 898 of file stl_set.h.

4.919.4.14 template<typename _Key , typename _Compare , typename _Alloc > std::pair<const_iterator, const_iterator> std::set< _Key, _Compare, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 902 of file stl_set.h.

4.919.4.15 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::equal_range (const _Kt & __x) -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 908 of file stl_set.h.

4.919.4.16 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::equal_range (const _Kt & __x) const -> decltype(pair<iterator, iterator>(_M_t._M_equal_range_tr(__x))) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function is equivalent to

```
std::make_pair(c.lower_bound(val),
               c.upper_bound(val))
```

(but is faster than making the calls separately).

This function probably only makes sense for multisets.

Definition at line 914 of file stl_set.h.

4.919.4.17 template<typename _Key , typename _Compare , typename _Alloc > _GLIBCXX_ABI_TAG_CXX11 iterator std::set< _Key, _Compare, _Alloc >::erase (const_iterator __position) [inline]

Erases an element from a set.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from a set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 654 of file stl_set.h.

4.919.4.18 template<typename _Key , typename _Compare , typename _Alloc > size_type std::set< _Key, _Compare, _Alloc >::erase (const key_type & __x) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from a set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 684 of file stl_set.h.

4.919.4.19 template<typename _Key , typename _Compare , typename _Alloc > _GLIBCXX_ABI_TAG_CXX11 iterator std::set< _Key, _Compare, _Alloc >::erase (const_iterator __first, const_iterator __last) [inline]

Erases a [__first,__last) range of elements from a set.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from a set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 706 of file stl_set.h.

4.919.4.20 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::find (const key_type & __x) [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 794 of file stl_set.h.

4.919.4.21 template<typename _Key , typename _Compare , typename _Alloc > const_iterator std::set< _Key, _Compare, _Alloc >::find (const key_type & __x) const [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 798 of file stl_set.h.

4.919.4.22 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::find (const _Kt & __x) -> decltype(iterator [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 804 of file stl_set.h.

4.919.4.23 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::find (const _Kt & *__x*) const -> decltype(const_iterator [inline]

Tries to locate an element in a set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 810 of file stl_set.h.

4.919.4.24 template<typename _Key , typename _Compare , typename _Alloc > allocator_type std::set< _Key, _Compare, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the allocator object with which the set was constructed.

Definition at line 335 of file stl_set.h.

4.919.4.25 template<typename _Key , typename _Compare , typename _Alloc > std::pair<iterator, bool> std::set< _Key, _Compare, _Alloc >::insert (const value_type & *__x*) [inline]

Attempts to insert an element into the set.

Parameters

__x	Element to be inserted.

Returns

A pair, of which the first element is an iterator that points to the possibly inserted element, and the second is a bool that is true if the element was actually inserted.

This function attempts to insert an element into the set. A set relies on unique keys and thus an element is only inserted if it is not already present in the set.

Insertion requires logarithmic time.

Definition at line 509 of file stl_set.h.

References std::pair< _T1, _T2 >::first, and std::pair< _T1, _T2 >::second.

Referenced by std::set< _Key, _Compare, _Alloc >::insert().

4.919.4.26 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::insert (const_iterator __position, const value_type & __x) [inline]

Attempts to insert an element into the set.

Parameters

__position	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the element with key of *__x* (may or may not be the element passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires logarithmic time (if the hint is not taken).

Definition at line 546 of file stl_set.h.

4.919.4.27 template<typename _Key , typename _Compare , typename _Alloc > template<typename _InputIterator > void std::set< _Key, _Compare, _Alloc >::insert (_InputIterator *__first*, _InputIterator *__last*) [inline]

A template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 566 of file stl_set.h.

4.919.4.28 template<typename _Key , typename _Compare , typename _Alloc > void std::set< _Key, _Compare, _Alloc >::insert (initializer_list< value_type > *__l*) [inline]

Attempts to insert a list of elements into the set.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 578 of file stl_set.h.

References std::set< _Key, _Compare, _Alloc >::insert().

4.919.4.29 template<typename _Key , typename _Compare , typename _Alloc > key_compare std::set< _Key, _Compare, _Alloc >::key_comp ( ) const [inline]

Returns the comparison object with which the set was constructed.

Definition at line 327 of file stl_set.h.

4.919.4.30 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::lower_bound (const key_type & *__x*) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 829 of file stl_set.h.

4.919.4.31 template<typename _Key , typename _Compare , typename _Alloc > const_iterator std::set< _Key, _Compare, _Alloc >::lower_bound (const key_type & __x) const [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 833 of file stl_set.h.

4.919.4.32 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::lower_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 839 of file stl_set.h.

4.919.4.33 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::lower_bound (const _Kt & __x) const -> decltype(const_iterator(_M_t._M_lower_bound_tr(__x))) [inline]

Finds the beginning of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to first element equal to or greater than key, or end().

This function returns the first element of a subsequence of elements that matches the given key. If unsuccessful it returns an iterator pointing to the first element that has a greater value than given key or end() if no such element exists.

Definition at line 845 of file stl_set.h.

4.919.4.34 template<typename _Key , typename _Compare , typename _Alloc > size_type std::set< _Key, _Compare, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the set.

Definition at line 424 of file stl_set.h.

4.919.4.35 template<typename _Key , typename _Compare , typename _Alloc > set& std::set< _Key, _Compare, _Alloc >::operator= (const set< _Key, _Compare, _Alloc > &) [default]

Set assignment operator.

Whether the allocator is copied depends on the allocator traits.

4.919.4.36 template<typename _Key , typename _Compare , typename _Alloc > set& std::set< _Key, _Compare, _Alloc >::operator= (set< _Key, _Compare, _Alloc > &&) [default]

Move assignment operator.

4.919.4.37 template<typename _Key , typename _Compare , typename _Alloc > set& std::set< _Key, _Compare, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Set list assignment operator.

Parameters

__l	An initializer_list.

This function fills a set with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the set and that the resulting set's size is the same as the number of elements assigned.

Definition at line 316 of file stl_set.h.

4.919.4.38 template<typename _Key , typename _Compare , typename _Alloc > reverse_iterator std::set< _Key, _Compare, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the last element in the set. Iteration is done in descending order according to the keys.

Definition at line 362 of file stl_set.h.

4.919.4.39 template<typename _Key , typename _Compare , typename _Alloc > reverse_iterator std::set< _Key, _Compare, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last pair in the set. Iteration is done in descending order according to the keys.

Definition at line 371 of file stl_set.h.

4.919.4.40 template<typename _Key , typename _Compare , typename _Alloc > size_type std::set< _Key, _Compare, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the set.

Definition at line 419 of file stl_set.h.

4.919.4.41 template<typename _Key , typename _Compare , typename _Alloc > void std::set< _Key, _Compare, _Alloc >::swap (set< _Key, _Compare, _Alloc > & __x) [inline], [noexcept]

Swaps data with another set.

Parameters

__x	A set of the same element and allocator types.

This exchanges the elements between two sets in constant time. (It is only swapping a pointer, an integer, and an instance of the `Compare` type (which itself is often stateless and empty), so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(s1,s2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 441 of file stl_set.h.

4.919.4.42 template<typename _Key , typename _Compare , typename _Alloc > iterator std::set< _Key, _Compare, _Alloc >::upper_bound (const key_type & __x) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 859 of file stl_set.h.

4.919.4.43 template<typename _Key , typename _Compare , typename _Alloc > const_iterator std::set< _Key, _Compare, _Alloc >::upper_bound (const key_type & __x) const [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 863 of file stl_set.h.

4.919.4.44 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::upper_bound (const _Kt & __x) -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 869 of file stl_set.h.

4.919.4.45 template<typename _Key , typename _Compare , typename _Alloc > template<typename _Kt > auto std::set< _Key, _Compare, _Alloc >::upper_bound (const _Kt & *__x*) const -> decltype(iterator(_M_t._M_upper_bound_tr(__x))) [inline]

Finds the end of a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Iterator pointing to the first element greater than key, or end().

Definition at line 875 of file stl_set.h.

4.919.4.46 template<typename _Key , typename _Compare , typename _Alloc > value_compare std::set< _Key, _Compare, _Alloc >::value_comp ( ) const [inline]

Returns the comparison object with which the set was constructed.

Definition at line 331 of file stl_set.h.

The documentation for this class was generated from the following files:

- stl_multiset.h
- stl_set.h

4.920 std::shared_future< _Res > Class Template Reference

Inheritance diagram for std::shared_future< _Res >:

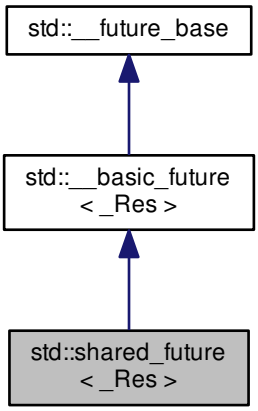

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- shared_future (const shared_future &__sf) noexcept
- shared_future (future< _Res > &&__uf) noexcept
- shared_future (shared_future &&__sf) noexcept
- const _Res & get () const
- shared_future & **operator=** (const shared_future &__sf) noexcept
- shared_future & **operator=** (shared_future &&__sf) noexcept
- bool **valid** () const noexcept
- void **wait** () const
- template<typename _Rep , typename _Period >
  future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- template<typename _Clock , typename _Duration >
  future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)

- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < _Res > & **__result_type**
- typedef shared_ptr< _State_base > **__state_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

4.920.1 Detailed Description

template<typename _Res>class std::shared_future< _Res >

Primary template for shared_future.

Definition at line 128 of file future.

4.920.2 Member Typedef Documentation

4.920.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.920.3 Constructor & Destructor Documentation

4.920.3.1 template<typename _Res > std::shared_future< _Res >::shared_future (const shared_future< _Res > & *__sf*) [inline], [noexcept]

Copy constructor.

Definition at line 902 of file future.

4.920.3.2 template<typename _Res > std::shared_future< _Res >::shared_future (future< _Res > && *__uf*) [inline], [noexcept]

Construct from a future rvalue.

Definition at line 905 of file future.

4.920.3.3 template<typename _Res > std::shared_future< _Res >::shared_future (shared_future< _Res > && *__sf*) [inline], [noexcept]

Construct from a shared_future rvalue.

Definition at line 910 of file future.

4.920.4 Member Function Documentation

4.920.4.1 template<typename _Res> __result_type std::__basic_future< _Res >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

Referenced by std::future< _Res >::get(), std::future< _Res & >::get(), std::future< void >::get(), std::shared_future< _Res >::get(), and std::shared_future< _Res & >::get().

4.920.4.2 template<typename _Res > const _Res& std::shared_future< _Res >::get ( ) const [inline]

Retrieving the value.

Definition at line 928 of file future.

References std::__basic_future< _Res >::_M_get_result().

The documentation for this class was generated from the following file:

- future

4.921 std::shared_future< _Res & > Class Template Reference

Inheritance diagram for std::shared_future< _Res & >:

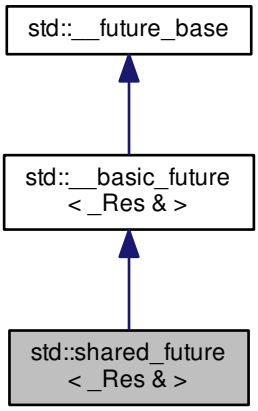

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- shared_future (const shared_future &__sf)
- shared_future (future< _Res & > &&__uf) noexcept
- shared_future (shared_future &&__sf) noexcept
- _Res & get () const
- shared_future & **operator=** (const shared_future &__sf)
- shared_future & **operator=** (shared_future &&__sf) noexcept
- bool **valid** () const noexcept
- void **wait** () const
- future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)

- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < _Res & > & **__result_type**
- typedef shared_ptr< _State_base > **__state_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

4.921.1 Detailed Description

template<typename _Res>class std::shared_future< _Res & >

Partial specialization for shared_future<R&>

Definition at line 933 of file future.

4.921.2 Member Typedef Documentation

4.921.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.921.3 Constructor & Destructor Documentation

4.921.3.1 template<typename _Res > std::shared_future< _Res & >::shared_future (const shared_future< _Res & > & *__sf*) [inline]

Copy constructor.

Definition at line 941 of file future.

4.921.3.2 template<typename _Res > std::shared_future< _Res & >::shared_future (future< _Res & > && *__uf*) [inline], [noexcept]

Construct from a future rvalue.

Definition at line 944 of file future.

4.921.3.3 template<typename _Res > std::shared_future< _Res & >::shared_future (shared_future< _Res & > && __sf) [inline], [noexcept]

Construct from a shared_future rvalue.

Definition at line 949 of file future.

4.921.4 Member Function Documentation

4.921.4.1 __result_type std::__basic_future< _Res & >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

References std::rethrow_exception().

4.921.4.2 template<typename _Res > _Res& std::shared_future< _Res & >::get ( ) const [inline]

Retrieving the value.

Definition at line 967 of file future.

References std::__basic_future< _Res >::_M_get_result().

The documentation for this class was generated from the following file:

- future

4.922 std::shared_future< void > Class Template Reference

Inheritance diagram for std::shared_future< void >:

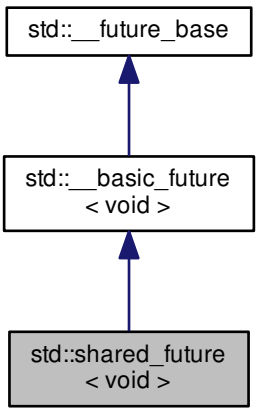

Public Types

- template<typename _Res >
  using _Ptr = unique_ptr< _Res, _Result_base::_Deleter >
- using **_State_base** = _State_baseV2

Public Member Functions

- shared_future (const shared_future &__sf)
- shared_future (future< void > &&__uf) noexcept
- shared_future (shared_future &&__sf) noexcept
- void **get** () const
- shared_future & **operator=** (const shared_future &__sf)
- shared_future & **operator=** (shared_future &&__sf) noexcept
- bool **valid** () const noexcept
- void **wait** () const
- future_status **wait_for** (const chrono::duration< _Rep, _Period > &__rel) const
- future_status **wait_until** (const chrono::time_point< _Clock, _Duration > &__abs) const

Static Public Member Functions

- template<typename _Res , typename _Allocator >
  static _Ptr< _Result_alloc
  < _Res, _Allocator > > **_S_allocate_result** (const _Allocator &__a)
- template<typename _Res , typename _Tp >
  static _Ptr< _Result< _Res > > **_S_allocate_result** (const std::allocator< _Tp > &__a)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_async_state** (_BoundFn &&__fn)
- template<typename _BoundFn >
  static std::shared_ptr
  < _State_base > **_S_make_deferred_state** (_BoundFn &&__fn)
- template<typename _Res_ptr , typename _BoundFn >
  static _Task_setter< _Res_ptr,
  _BoundFn > **_S_task_setter** (_Res_ptr &__ptr, _BoundFn &__call)

Protected Types

- typedef __future_base::_Result
  < void > & **__result_type**
- typedef shared_ptr< _State_base > **__state_type**

Protected Member Functions

- __result_type _M_get_result () const
- void **_M_swap** (__basic_future &__that) noexcept

4.922.1 Detailed Description

template<>class std::shared_future< void >

Explicit specialization for shared_future<void>

Definition at line 972 of file future.

4.922.2 Member Typedef Documentation

4.922.2.1 template<typename _Res > using std::__future_base::_Ptr = unique_ptr<_Res, _Result_base::_Deleter> [inherited]

A unique_ptr for result objects.

Definition at line 223 of file future.

4.922.3 Constructor & Destructor Documentation

4.922.3.1 std::shared_future< void >::shared_future (const shared_future< void > & *__sf*) [inline]

Copy constructor.

Definition at line 980 of file future.

4.922.3.2 std::shared_future< void >::shared_future (future< void > && *__uf*) [inline], [noexcept]

Construct from a future rvalue.

Definition at line 983 of file future.

4.922.3.3 std::shared_future< void >::shared_future (shared_future< void > && *__sf*) [inline], [noexcept]

Construct from a shared_future rvalue.

Definition at line 988 of file future.

4.922.4 Member Function Documentation

4.922.4.1 __result_type std::__basic_future< void >::_M_get_result ( ) const [inline], [protected], [inherited]

Wait for the state to be ready and rethrow any stored exception.

Definition at line 717 of file future.

The documentation for this class was generated from the following file:

- future

4.923 std::shared_lock< _Mutex > Class Template Reference

Public Types

- typedef _Mutex **mutex_type**

Public Member Functions

- **shared_lock** (mutex_type &__m)
- **shared_lock** (mutex_type &__m, defer_lock_t) noexcept
- **shared_lock** (mutex_type &__m, try_to_lock_t)
- **shared_lock** (mutex_type &__m, adopt_lock_t)
- template<typename _Clock , typename _Duration >
  shared_lock (mutex_type &__m, const chrono::time_point< _Clock, _Duration > &__abs_time)
- template<typename _Rep , typename _Period >
  shared_lock (mutex_type &__m, const chrono::duration< _Rep, _Period > &__rel_time)
- **shared_lock** (shared_lock const &)=delete
- **shared_lock** (shared_lock &&__sl) noexcept
- void **lock** ()
- mutex_type * **mutex** () const noexcept
- **operator bool** () const noexcept
- shared_lock & **operator=** (shared_lock const &)=delete
- shared_lock & **operator=** (shared_lock &&__sl) noexcept
- bool **owns_lock** () const noexcept
- mutex_type * **release** () noexcept
- void **swap** (shared_lock &__u) noexcept
- bool **try_lock** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_for** (const chrono::duration< _Rep, _Period > &__rel_time)
- template<typename _Clock , typename _Duration >
  bool **try_lock_until** (const chrono::time_point< _Clock, _Duration > &__abs_time)
- void **unlock** ()

4.923.1 Detailed Description

template<typename _Mutex>class std::shared_lock< _Mutex >

shared_lock

Definition at line 710 of file shared_mutex.

The documentation for this class was generated from the following file:

- shared_mutex

4.924 std::shared_ptr< _Tp > Class Template Reference

Inherits std::__shared_ptr< _Tp, _Lp >.

Public Types

- using element_type = typename __shared_ptr< _Tp >::element_type

Public Member Functions

- constexpr shared_ptr () noexcept
- shared_ptr (const shared_ptr &) noexcept=default
- template<typename _Yp , typename = _Constructible<_Yp*>>
  shared_ptr (_Yp *__p)
- template<typename _Yp , typename _Deleter , typename = _Constructible<_Yp*, _Deleter>>
  shared_ptr (_Yp *__p, _Deleter __d)
- template<typename _Deleter >
  shared_ptr (nullptr_t __p, _Deleter __d)
- template<typename _Yp , typename _Deleter , typename _Alloc , typename = _Constructible<_Yp*, _Deleter, _Alloc>>
  shared_ptr (_Yp *__p, _Deleter __d, _Alloc __a)
- template<typename _Deleter , typename _Alloc >
  shared_ptr (nullptr_t __p, _Deleter __d, _Alloc __a)
- template<typename _Yp >
  shared_ptr (const shared_ptr< _Yp > &__r, element_type *__p) noexcept
- template<typename _Yp , typename = _Constructible<const shared_ptr<_Yp>&>>
  shared_ptr (const shared_ptr< _Yp > &__r) noexcept
- shared_ptr (shared_ptr &&__r) noexcept
- template<typename _Yp , typename = _Constructible<shared_ptr<_Yp>>>
  shared_ptr (shared_ptr< _Yp > &&__r) noexcept
- template<typename _Tp1 , typename >
  shared_ptr (std::auto_ptr< _Tp1 > &&__r)
- template<typename _Yp , typename = _Constructible<const weak_ptr<_Yp>&>>
  shared_ptr (const weak_ptr< _Yp > &__r)
- template<typename _Yp , typename _Del , typename = _Constructible<unique_ptr<_Yp, _Del>>>
  shared_ptr (unique_ptr< _Yp, _Del > &&__r)
- constexpr shared_ptr (nullptr_t) noexcept
- element_type * **get** () const noexcept
- **operator bool** () const
- element_type & **operator*** () const noexcept
- element_type * **operator->** () const noexcept
- shared_ptr & **operator=** (const shared_ptr &) noexcept=default
- template<typename _Yp >
  _Assignable< const shared_ptr
  < _Yp > & > **operator=** (const shared_ptr< _Yp > &__r) noexcept
- shared_ptr & **operator=** (shared_ptr &&__r) noexcept
- template<class _Yp >
  _Assignable< shared_ptr< _Yp > > **operator=** (shared_ptr< _Yp > &&__r) noexcept
- template<typename _Yp , typename _Del >
  _Assignable< unique_ptr< _Yp,
  _Del > > **operator=** (unique_ptr< _Yp, _Del > &&__r)
- void **reset** () noexcept
- template<typename _Yp >
  _SafeConv< _Yp > **reset** (_Yp *__p)
- template<typename _Yp , typename _Deleter >
  _SafeConv< _Yp > **reset** (_Yp *__p, _Deleter __d)
- template<typename _Yp , typename _Deleter , typename _Alloc >
  _SafeConv< _Yp > **reset** (_Yp *__p, _Deleter __d, _Alloc __a)
- void **swap** (__shared_ptr< _Tp, _Lp > &__other) noexcept
- bool **unique** () const noexcept
- long **use_count** () const noexcept

- template<typename _Tp1 >
  bool **owner_before** (__shared_ptr< _Tp1, _Lp > const &__rhs) const noexcept
- template<typename _Tp1 >
  bool **owner_before** (__weak_ptr< _Tp1, _Lp > const &__rhs) const noexcept

Friends

- template<typename _Yp , typename _Alloc , typename... _Args>
  shared_ptr< _Yp > **allocate_shared** (const _Alloc &__a, _Args &&...__args)
- class **weak_ptr**< **_Tp** >

Related Functions

(Note that these are not member functions.)

- template<typename _Del , typename _Tp >
  _Del * get_deleter (const shared_ptr< _Tp > &__p) noexcept
- template<typename _Ch , typename _Tr , typename _Tp , _Lock_policy _Lp>
  std::basic_ostream< _Ch, _Tr > & operator<< (std::basic_ostream< _Ch, _Tr > &__os, const __shared_ptr< _Tp, _Lp > &__p)

- template<typename _Tp , typename _Up >
  bool operator== (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator== (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator== (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator!= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator!= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator!= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator< (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator< (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator< (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator<= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator<= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator<= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Up >
  bool operator> (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator> (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator> (nullptr_t, const shared_ptr< _Tp > &__a) noexcept

- template<typename _Tp , typename _Up >
  bool operator>= (const shared_ptr< _Tp > &__a, const shared_ptr< _Up > &__b) noexcept
- template<typename _Tp >
  bool operator>= (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool operator>= (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp >
  void swap (shared_ptr< _Tp > &__a, shared_ptr< _Tp > &__b) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > static_pointer_cast (const shared_ptr< _Up > &__r) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > const_pointer_cast (const shared_ptr< _Up > &__r) noexcept
- template<typename _Tp , typename _Up >
  shared_ptr< _Tp > dynamic_pointer_cast (const shared_ptr< _Up > &__r) noexcept

- template<typename _Tp , typename _Alloc , typename... _Args>
  shared_ptr< _Tp > allocate_shared (const _Alloc &__a, _Args &&...__args)
- template<typename _Tp , typename... _Args>
  shared_ptr< _Tp > make_shared (_Args &&...__args)

- template<typename _Tp , _Lock_policy _Lp>
  bool atomic_is_lock_free (const __shared_ptr< _Tp, _Lp > *__p)

- template<typename _Tp >
  shared_ptr< _Tp > atomic_load_explicit (const shared_ptr< _Tp > *__p, memory_order)

- template<typename _Tp >
  void atomic_store_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order)

- template<typename _Tp >
  shared_ptr< _Tp > atomic_exchange_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order)

- template<typename _Tp >
  bool atomic_compare_exchange_strong_explicit (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w, memory_order, memory_order)

4.924.1 Detailed Description

template<typename _Tp>class std::shared_ptr< _Tp >

A smart pointer with reference-counted copy semantics.

A `shared_ptr` object is either empty or *owns* a pointer passed to the constructor. Copies of a `shared_ptr` share ownership of the same pointer. When the last `shared_ptr` that owns the pointer is destroyed or reset, the owned pointer is freed (either by `delete` or by invoking a custom deleter that was passed to the constructor).

A `shared_ptr` also stores another pointer, which is usually (but not always) the same pointer as it owns. The stored pointer can be retrieved by calling the `get()` member function.

The equality and relational operators for `shared_ptr` only compare the stored pointer returned by `get()`, not the owned pointer. To test whether two `shared_ptr` objects share ownership of the same pointer see `std::shared_ptr::owner_before` and `std::owner_less`.

Definition at line 121 of file bits/shared_ptr.h.

4.924.2 Member Typedef Documentation

4.924.2.1 template<typename _Tp> using std::shared_ptr< _Tp >::element_type = typename __shared_ptr<_Tp>::element_type

The type pointed to by the stored pointer, remove_extent_t<_Tp>

Definition at line 136 of file bits/shared_ptr.h.

4.924.3 Constructor & Destructor Documentation

4.924.3.1 template<typename _Tp> constexpr std::shared_ptr< _Tp >::shared_ptr ( ) [inline], [noexcept]

Construct an empty shared_ptr.

Postcondition

use_count()==0 && get()==0

Definition at line 147 of file bits/shared_ptr.h.

4.924.3.2 template<typename _Tp> std::shared_ptr< _Tp >::shared_ptr (const shared_ptr< _Tp > &) [default], [noexcept]

Copy constructor.

4.924.3.3 template<typename _Tp> template<typename _Yp , typename = _Constructible<_Yp*>> std::shared_ptr< _Tp >::shared_ptr (_Yp * __p) [inline], [explicit]

Construct a shared_ptr that owns the pointer *__p*.

Parameters

__p	A pointer that is convertible to element_type*.

Postcondition

use_count() == 1 && get() == __p

Exceptions

std::bad_alloc,in	which case `delete` *__p* is called.

Definition at line 159 of file bits/shared_ptr.h.

4.924.3.4 template<typename _Tp> template<typename _Yp , typename _Deleter , typename = _Constructible<_Yp*, _Deleter>> std::shared_ptr< _Tp >::shared_ptr (_Yp * __p, _Deleter __d) [inline]

Construct a shared_ptr that owns the pointer *__p* and the deleter *__d*.

Parameters

__p	A pointer.

__d	A deleter.

Postcondition

use_count() == 1 && get() == __p

Exceptions

std::bad_alloc,in	which case *__d(__p)* is called.

Requirements: _Deleter's copy constructor and destructor must not throw

__shared_ptr will release __p by calling __d(__p)

Definition at line 176 of file bits/shared_ptr.h.

4.924.3.5 template<typename _Tp> template<typename _Deleter > std::shared_ptr< _Tp >::shared_ptr (nullptr_t *__p*, _Deleter *__d*) [inline]

Construct a shared_ptr that owns a null pointer and the deleter *__d*.

Parameters

__p	A null pointer constant.
__d	A deleter.

Postcondition

use_count() == 1 && get() == __p

Exceptions

std::bad_alloc,in	which case *__d(__p)* is called.

Requirements: _Deleter's copy constructor and destructor must not throw

The last owner will call __d(__p)

Definition at line 193 of file bits/shared_ptr.h.

4.924.3.6 template<typename _Tp> template<typename _Yp , typename _Deleter , typename _Alloc , typename = _Constructible<_Yp*, _Deleter, _Alloc>> std::shared_ptr< _Tp >::shared_ptr (_Yp * *__p*, _Deleter *__d*, _Alloc *__a*) [inline]

Construct a shared_ptr that owns the pointer *__p* and the deleter *__d*.

Parameters

__p	A pointer.
__d	A deleter.
__a	An allocator.

Postcondition

use_count() == 1 && get() == __p

Exceptions

std::bad_alloc,in	which case *__d(__p)* is called.

Requirements: _Deleter's copy constructor and destructor must not throw _Alloc's copy constructor and destructor must not throw.

__shared_ptr will release __p by calling __d(__p)

Definition at line 213 of file bits/shared_ptr.h.

4.924.3.7 template<typename _Tp> template<typename _Deleter , typename _Alloc > std::shared_ptr< _Tp >::shared_ptr (nullptr_t *__p,* _Deleter *__d,* _Alloc *__a*) [inline]

Construct a shared_ptr that owns a null pointer and the deleter *__d*.

Parameters

__p	A null pointer constant.
__d	A deleter.
__a	An allocator.

Postcondition

use_count() == 1 && get() == __p

Exceptions

std::bad_alloc,in	which case *__d(__p)* is called.

Requirements: _Deleter's copy constructor and destructor must not throw _Alloc's copy constructor and destructor must not throw.

The last owner will call __d(__p)

Definition at line 232 of file bits/shared_ptr.h.

4.924.3.8 template<typename _Tp> template<typename _Yp > std::shared_ptr< _Tp >::shared_ptr (const shared_ptr< _Yp > & *__r,* element_type * *__p*) [inline], [noexcept]

Constructs a `shared_ptr` instance that stores `__p` and shares ownership with `__r`.

Parameters

__r	A `shared_ptr`.
__p	A pointer that will remain valid while `*__r` is valid.

Postcondition

```
get() == __p && use_count() == __r.use_count()
```

This can be used to construct a `shared_ptr` to a sub-object of an object managed by an existing `shared_ptr`. The complete object will remain valid while any `shared_ptr` owns it, even if they don't store a pointer to the complete object.

```
shared_ptr<pair<int,int>> pii(new pair<int,int>());
shared_ptr<int> pi(pii, &pii->first);
assert(pii.use_count() == 2);
```

Definition at line 256 of file bits/shared_ptr.h.

4.924.3.9 template<typename _Tp> template<typename _Yp , typename = _Constructible<const shared_ptr<_Yp>&>> std::shared_ptr< _Tp >::shared_ptr (const shared_ptr< _Yp > & __r) [inline], [noexcept]

If *__r* is empty, constructs an empty shared_ptr; otherwise construct a shared_ptr that shares ownership with *__r*.

Parameters

__r	A shared_ptr.

Postcondition

get() == __r.get() && use_count() == __r.use_count()

Definition at line 295 of file bits/shared_ptr.h.

4.924.3.10 template<typename _Tp> std::shared_ptr< _Tp >::shared_ptr (shared_ptr< _Tp > && *__r*) [inline], [noexcept]

Move-constructs a shared_ptr instance from *__r*.

Parameters

__r	A shared_ptr rvalue.

Postcondition

∗this contains the old value of *__r*, *__r* is empty.

Definition at line 303 of file bits/shared_ptr.h.

4.924.3.11 template<typename _Tp> template<typename _Yp , typename = _Constructible<shared_ptr<_Yp>>> std::shared_ptr< _Tp >::shared_ptr (shared_ptr< _Yp > && *__r*) [inline], [noexcept]

Move-constructs a shared_ptr instance from *__r*.

Parameters

__r	A shared_ptr rvalue.

Postcondition

∗this contains the old value of *__r*, *__r* is empty.

Definition at line 312 of file bits/shared_ptr.h.

4.924.3.12 template<typename _Tp> template<typename _Yp , typename = _Constructible<const weak_ptr<_Yp>&>> std::shared_ptr< _Tp >::shared_ptr (const weak_ptr< _Yp > & *__r*) [inline], [explicit]

Constructs a shared_ptr that shares ownership with *__r* and stores a copy of the pointer stored in *__r*.

Parameters

__r	A weak_ptr.

Postcondition

use_count() == __r.use_count()

Exceptions

bad_weak_ptr	when __r.expired(), in which case the constructor has no effect.

Definition at line 324 of file bits/shared_ptr.h.

4.924.3.13 template<typename _Tp> constexpr std::shared_ptr< _Tp >::shared_ptr (nullptr_t) [inline], [noexcept]

Construct an empty shared_ptr.

Postcondition

use_count() == 0 && get() == nullptr

Definition at line 356 of file bits/shared_ptr.h.

4.924.4 Member Function Documentation

4.924.4.1 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> element_type* std::__shared_ptr< _Tp, _Lp >::get (void) const [inline], [noexcept], [inherited]

Return the stored pointer.

Definition at line 1324 of file shared_ptr_base.h.

4.924.4.2 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> std::__shared_ptr< _Tp, _Lp >::operator bool ( ) const [inline], [explicit], [inherited]

Return true if the stored pointer is not null.

Definition at line 1328 of file shared_ptr_base.h.

4.924.4.3 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> template<typename _Tp1 > bool std::__shared_ptr< _Tp, _Lp >::owner_before (__shared_ptr< _Tp1, _Lp > const & *__rhs*) const [inline], [noexcept], [inherited]

Define an ordering based on ownership.

This function defines a strict weak ordering between two shared_ptr or weak_ptr objects, such that one object is less than the other unless they share ownership of the same pointer, or are both empty.

Definition at line 1358 of file shared_ptr_base.h.

4.924.4.4 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> template<typename _Tp1 > bool std::__shared_ptr< _Tp, _Lp >::owner_before (__weak_ptr< _Tp1, _Lp > const & *__rhs*) const [inline], [noexcept], [inherited]

Define an ordering based on ownership.

This function defines a strict weak ordering between two shared_ptr or weak_ptr objects, such that one object is less than the other unless they share ownership of the same pointer, or are both empty.

Definition at line 1363 of file shared_ptr_base.h.

4.924.4.5 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> void std::__shared_ptr< _Tp, _Lp >::swap (__shared_ptr< _Tp, _Lp > & *__other*) [inline], [noexcept], [inherited]

Exchange both the owned pointer and the stored pointer.

Definition at line 1343 of file shared_ptr_base.h.

4.924.4.6 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> bool std::__shared_ptr< _Tp, _Lp >::unique ( ) const [inline], [noexcept], [inherited]

Return true if use_count() == 1.

Definition at line 1333 of file shared_ptr_base.h.

4.924.4.7 template<typename _Tp, _Lock_policy _Lp = __default_lock_policy> long std::__shared_ptr< _Tp, _Lp >::use_count ( ) const [inline], [noexcept], [inherited]

If *this owns a pointer, return the number of owners, otherwise zero.

Definition at line 1338 of file shared_ptr_base.h.

The documentation for this class was generated from the following files:

- bits/shared_ptr.h
- shared_ptr_atomic.h
- auto_ptr.h

4.925 std::shared_timed_mutex Class Reference

Inherits __shared_timed_mutex_base.

Public Member Functions

- **shared_timed_mutex** (const shared_timed_mutex &)=delete
- void **lock** ()
- void **lock_shared** ()
- shared_timed_mutex & **operator=** (const shared_timed_mutex &)=delete
- bool **try_lock** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_for** (const chrono::duration< _Rep, _Period > &__rtime)
- bool **try_lock_shared** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_shared_for** (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  bool **try_lock_shared_until** (const chrono::time_point< _Clock, _Duration > &__abs_time)
- template<typename _Clock , typename _Duration >
  bool **try_lock_until** (const chrono::time_point< _Clock, _Duration > &__abs_time)
- void **unlock** ()
- void **unlock_shared** ()

4.925.1 Detailed Description

The standard shared timed mutex type.

Definition at line 447 of file shared_mutex.

The documentation for this class was generated from the following file:

- shared_mutex

4.926 std::shuffle_order_engine< _RandomNumberEngine, __k > Class Template Reference

Public Types

- template<typename _Sseq >
  using **_If_seed_seq** = typename enable_if< __detail::__is_seed_seq< _Sseq, shuffle_order_engine, result_type >::value >::type
- typedef
  _RandomNumberEngine::result_type result_type

Public Member Functions

- shuffle_order_engine ()
- shuffle_order_engine (const _RandomNumberEngine &__rng)
- shuffle_order_engine (_RandomNumberEngine &&__rng)
- shuffle_order_engine (result_type __s)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  shuffle_order_engine (_Sseq &__q)
- const _RandomNumberEngine & base () const noexcept
- void discard (unsigned long long __z)
- result_type operator() ()
- void seed ()
- void seed (result_type __s)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > seed (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Static Public Attributes

- static constexpr size_t **table_size**

Friends

- template<typename _RandomNumberEngine1 , size_t __k1, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::shuffle_order_engine< _-RandomNumberEngine1, __k1 > &__x)
- bool operator== (const shuffle_order_engine &__lhs, const shuffle_order_engine &__rhs)
- template<typename _RandomNumberEngine1 , size_t __k1, typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::shuffle_order_engine< _Random-NumberEngine1, __k1 > &__x)

4.926.1 Detailed Description

template<typename _RandomNumberEngine, size_t __k>class std::shuffle_order_engine< _RandomNumberEngine, __k >

Produces random numbers by combining random numbers from some base engine to produce random numbers with a specifies number of bits __k.

Definition at line 1315 of file random.h.

4.926.2 Member Typedef Documentation

4.926.2.1 template<typename _RandomNumberEngine, size_t __k> typedef _RandomNumberEngine::result_type std::shuffle_order_engine< _RandomNumberEngine, __k >::result_type

The type of the generated random value.

Definition at line 1318 of file random.h.

4.926.3 Constructor & Destructor Documentation

4.926.3.1 template<typename _RandomNumberEngine, size_t __k> std::shuffle_order_engine< _RandomNumberEngine, __k >::shuffle_order_engine ( ) [inline]

Constructs a default shuffle_order_engine engine.

The underlying engine is default constructed as well.

Definition at line 1335 of file random.h.

4.926.3.2 template<typename _RandomNumberEngine, size_t __k> std::shuffle_order_engine< _RandomNumberEngine, __k >::shuffle_order_engine (const _RandomNumberEngine & *__rng*) [inline], [explicit]

Copy constructs a shuffle_order_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 1346 of file random.h.

4.926.3.3 template<typename _RandomNumberEngine, size_t __k> std::shuffle_order_engine< _RandomNumberEngine, __k >::shuffle_order_engine (_RandomNumberEngine && *__rng*) [inline], [explicit]

Move constructs a shuffle_order_engine engine.

Copies an existing base class random number generator.

Parameters

__rng	An existing (base class) engine object.

Definition at line 1357 of file random.h.

4.926.3.4 template<typename _RandomNumberEngine, size_t __k> std::shuffle_order_engine< _RandomNumberEngine, __k >::shuffle_order_engine (result_type *__s*) [inline], [explicit]

Seed constructs a shuffle_order_engine engine.

Constructs the underlying generator engine seeded with __s.

Parameters

__s	A seed value for the base class engine.

Definition at line 1368 of file random.h.

4.926.3.5 template<typename _RandomNumberEngine, size_t __k> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::shuffle_order_engine< _RandomNumberEngine, __k >::shuffle_order_engine (_Sseq & *__q*) [inline], [explicit]

Generator construct a shuffle_order_engine engine.

Parameters

__q	A seed sequence.

Definition at line 1379 of file random.h.

4.926.4 Member Function Documentation

4.926.4.1 template<typename _RandomNumberEngine, size_t __k> const _RandomNumberEngine& std::shuffle_order_engine< _RandomNumberEngine, __k >::base ( ) const [inline], [noexcept]

Gets a const reference to the underlying generator engine object.

Definition at line 1422 of file random.h.

4.926.4.2 template<typename _RandomNumberEngine, size_t __k> void std::shuffle_order_engine< _RandomNumberEngine, __k >::discard (unsigned long long *__z*) [inline]

Discard a sequence of random numbers.

Definition at line 1443 of file random.h.

4.926.4.3 template<typename _RandomNumberEngine, size_t __k> static constexpr result_type std::shuffle_order_engine< _RandomNumberEngine, __k >::max ( ) [inline], [static]

Gets the maximum value in the generated random number range.

Definition at line 1436 of file random.h.

References std::max().

4.926.4.4 template<typename _RandomNumberEngine, size_t __k> static constexpr result_type std::shuffle_order_engine< _RandomNumberEngine, __k >::min ( ) [inline], [static]

Gets the minimum value in the generated random number range.

Definition at line 1429 of file random.h.

References std::min().

4.926.4.5 template<typename _RandomNumberEngine , size_t __k> shuffle_order_engine< _RandomNumberEngine, __k >::result_type std::shuffle_order_engine< _RandomNumberEngine, __k >::operator() ( )

Gets the next value in the generated random number sequence.

Definition at line 810 of file bits/random.tcc.

4.926.4.6 template<typename _RandomNumberEngine, size_t __k> void std::shuffle_order_engine< _RandomNumberEngine, __k >::seed ( ) [inline]

Reseeds the shuffle_order_engine object with the default seed for the underlying base class generator engine.

Definition at line 1388 of file random.h.

4.926.4.7 template<typename _RandomNumberEngine, size_t __k> void std::shuffle_order_engine< _RandomNumberEngine, __k >::seed (result_type __s) [inline]

Reseeds the shuffle_order_engine object with the default seed for the underlying base class generator engine.

Definition at line 1399 of file random.h.

4.926.4.8 template<typename _RandomNumberEngine, size_t __k> template<typename _Sseq > _If_seed_seq<_Sseq> std::shuffle_order_engine< _RandomNumberEngine, __k >::seed (_Sseq & __q) [inline]

Reseeds the shuffle_order_engine object with the given seed sequence.

Parameters

__q	A seed generator function.

Definition at line 1412 of file random.h.

4.926.5 Friends And Related Function Documentation

4.926.5.1 template<typename _RandomNumberEngine, size_t __k> template<typename _RandomNumberEngine1 , size_t __k1, typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::shuffle_order_engine< _RandomNumberEngine1, __k1 > & *__x*) [friend]

Inserts the current state of a shuffle_order_engine random number generator engine __x into the output stream __os.

Parameters

__os	An output stream.
__x	A shuffle_order_engine random number generator engine.

Returns

The output stream with the state of __x inserted or in an error state.

4.926.5.2 template<typename _RandomNumberEngine, size_t __k> bool operator== (const shuffle_order_engine< _RandomNumberEngine, __k > & *__lhs,* const shuffle_order_engine< _RandomNumberEngine, __k > & *__rhs*) [friend]

Compares two shuffle_order_engine random number generator objects of the same type for equality.

Parameters

__lhs	A shuffle_order_engine random number generator object.
__rhs	Another shuffle_order_engine random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 1467 of file random.h.

4.926.5.3 template<typename _RandomNumberEngine, size_t __k> template<typename _RandomNumberEngine1 , size_t __k1, typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::shuffle_order_engine< _RandomNumberEngine1, __k1 > & *__x*) [friend]

Extracts the current state of a % subtract_with_carry_engine random number generator engine __x from the input stream __is.

Parameters

__is	An input stream.
__x	A shuffle_order_engine random number generator engine.

Returns

The input stream with the state of __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.927 std::slice Class Reference

Public Member Functions

- slice ()
- slice (size_t __o, size_t __d, size_t __s)
- size_t size () const
- size_t start () const
- size_t stride () const

4.927.1 Detailed Description

Class defining one-dimensional subset of an array.

The slice class represents a one-dimensional subset of an array, specified by three parameters: start offset, size, and stride. The start offset is the index of the first element of the array that is part of the subset. The size is the total number of elements in the subset. Stride is the distance between each successive array element to include in the subset.

For example, with an array of size 10, and a slice with offset 1, size 3 and stride 2, the subset consists of array elements 1, 3, and 5.

Definition at line 59 of file slice_array.h.

The documentation for this class was generated from the following file:

- slice_array.h

4.928 std::slice_array< _Tp > Class Template Reference

Public Types

- typedef _Tp **value_type**

Public Member Functions

- slice_array (const slice_array &)
- void operator%= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator%=** (const _Expr< _Dom, _Tp > &) const
- void operator&= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator&=** (const _Expr< _Dom, _Tp > &) const
- void operator*= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator*=** (const _Expr< _Dom, _Tp > &) const
- void operator+= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator+=** (const _Expr< _Dom, _Tp > &) const
- void operator-= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator-=** (const _Expr< _Dom, _Tp > &) const
- void operator/= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator/=** (const _Expr< _Dom, _Tp > &) const
- void operator<<= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator<<=** (const _Expr< _Dom, _Tp > &) const
- slice_array & operator= (const slice_array &)
- void operator= (const valarray< _Tp > &) const
- void operator= (const _Tp &) const
- template<class _Dom >
  void **operator=** (const _Expr< _Dom, _Tp > &) const
- void operator>>= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator>>=** (const _Expr< _Dom, _Tp > &) const
- void operator^= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator^=** (const _Expr< _Dom, _Tp > &) const
- void operator|= (const valarray< _Tp > &) const
- template<class _Dom >
  void **operator|=** (const _Expr< _Dom, _Tp > &) const

Friends

- class **valarray< _Tp >**

4.928.1 Detailed Description

template<class _Tp>class std::slice_array< _Tp >

Reference to one-dimensional subset of an array.

A slice_array is a reference to the actual elements of an array specified by a slice. The way to get a slice_array is to call operator[](slice) on a valarray. The returned slice_array then permits carrying operations out on the referenced subset of elements in the original valarray. For example, operator+=(valarray) will add values to the subset of elements in the underlying valarray this slice_array refers to.

Parameters

Tp	Element type.

Definition at line 91 of file valarray.

The documentation for this class was generated from the following files:

- valarray
- slice_array.h

4.929 __gnu_cxx::slist< _Tp, _Alloc > Class Template Reference

Inherits __gnu_cxx::_Slist_base< _Tp, _Alloc >.

Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef _Slist_iterator< _Tp, const _Tp &, const _Tp * > **const_iterator**
- typedef const value_type * **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef _Slist_iterator< _Tp, _Tp &, _Tp * > **iterator**
- typedef value_type * **pointer**
- typedef value_type & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **slist** (const allocator_type &__a=allocator_type())
- **slist** (size_type __n, const value_type &__x, const allocator_type &__a=allocator_type())
- **slist** (size_type __n)
- template<class _InputIterator >
  slist (_InputIterator __first, _InputIterator __last, const allocator_type &__a=allocator_type())
- **slist** (const slist &__x)
- template<class _Integer >
  void **_M_assign_dispatch** (_Integer __n, _Integer __val, std::__true_type)
- template<class _InputIterator >
  void **_M_assign_dispatch** (_InputIterator __first, _InputIterator __last, std::__false_type)
- void **_M_fill_assign** (size_type __n, const _Tp &__val)
- void **assign** (size_type __n, const _Tp &__val)
- template<class _InputIterator >
  void **assign** (_InputIterator __first, _InputIterator __last)
- iterator **before_begin** ()
- const_iterator **before_begin** () const
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()

- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- iterator **erase** (iterator __pos)
- iterator **erase** (iterator __first, iterator __last)
- iterator **erase_after** (iterator __pos)
- iterator **erase_after** (iterator __before_first, iterator __last)
- reference **front** ()
- const_reference **front** () const
- allocator_type **get_allocator** () const
- iterator **insert** (iterator __pos, const value_type &__x)
- iterator **insert** (iterator __pos)
- void **insert** (iterator __pos, size_type __n, const value_type &__x)
- template<class _InIterator >
  void **insert** (iterator __pos, _InIterator __first, _InIterator __last)
- iterator **insert_after** (iterator __pos, const value_type &__x)
- iterator **insert_after** (iterator __pos)
- void **insert_after** (iterator __pos, size_type __n, const value_type &__x)
- template<class _InIterator >
  void **insert_after** (iterator __pos, _InIterator __first, _InIterator __last)
- size_type **max_size** () const
- void **merge** (slist &__x)
- template<class _StrictWeakOrdering >
  void **merge** (slist &, _StrictWeakOrdering)
- slist & **operator=** (const slist &__x)
- void **pop_front** ()
- iterator **previous** (const_iterator __pos)
- const_iterator **previous** (const_iterator __pos) const
- void **push_front** (const value_type &__x)
- void **push_front** ()
- void **remove** (const _Tp &__val)
- template<class _Predicate >
  void **remove_if** (_Predicate __pred)
- void **resize** (size_type new_size, const _Tp &__x)
- void **resize** (size_type new_size)
- void **reverse** ()
- size_type **size** () const
- void **sort** ()
- template<class _StrictWeakOrdering >
  void **sort** (_StrictWeakOrdering __comp)
- void **splice** (iterator __pos, slist &__x)
- void **splice** (iterator __pos, slist &__x, iterator __i)
- void **splice** (iterator __pos, slist &__x, iterator __first, iterator __last)
- void **splice_after** (iterator __pos, iterator __before_first, iterator __before_last)
- void **splice_after** (iterator __pos, iterator __prev)
- void **splice_after** (iterator __pos, slist &__x)
- void **swap** (slist &__x)
- void **unique** ()
- template<class _BinaryPredicate >
  void **unique** (_BinaryPredicate __pred)

Private Types

- typedef __alloc_traits< _Alloc > ::template rebind< _Slist_node < _Tp > >::other **_Node_alloc**

Private Member Functions

- _Slist_node_base * **_M_erase_after** (_Slist_node_base *__pos)
- _Slist_node_base * **_M_erase_after** (_Slist_node_base *, _Slist_node_base *)
- _Slist_node< _Tp > * **_M_get_node** ()
- void **_M_put_node** (_Slist_node< _Tp > *__p)

Private Attributes

- _Slist_node_base **_M_head**

4.929.1 Detailed Description

template<class _Tp, class _Alloc = std::allocator<_Tp>>class __gnu_cxx::slist< _Tp, _Alloc >

This is an SGI extension.

Todo Needs documentation! See http://gcc.gnu.org/onlinedocs/libstdc++/manual/documentation_style.html

Definition at line 287 of file slist.

The documentation for this class was generated from the following file:

- slist

4.930 __gnu_pbds::detail::splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > Class Template Reference

Inherits __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >.

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef std::pair< size_type, size_type > **comp_hash**
- typedef base_type::const_iterator **const_iterator**
- typedef base_type::const_pointer **const_pointer**
- typedef base_type::const_reference **const_reference**
- typedef base_type::const_reverse_iterator **const_reverse_iterator**
- typedef splay_tree_tag **container_category**

- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::key_const_pointer **key_const_pointer**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_pointer **key_pointer**
- typedef base_type::key_reference **key_reference**
- typedef base_type::key_type **key_type**
- typedef base_type::mapped_const_pointer **mapped_const_pointer**
- typedef base_type::mapped_const_reference **mapped_const_reference**
- typedef base_type::mapped_pointer **mapped_pointer**
- typedef base_type::mapped_reference **mapped_reference**
- typedef base_type::mapped_type **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef traits_type::node_const_iterator **node_const_iterator**
- typedef traits_type::node_iterator **node_iterator**
- typedef base_type::node_update **node_update**
- typedef base_type::const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef base_type::pointer **pointer**
- typedef base_type::reference **reference**
- typedef base_type::reverse_iterator **reverse_iterator**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef base_type::value_type **value_type**

Public Member Functions

- **splay_tree_map** (const Cmp_Fn &)
- **splay_tree_map** (const Cmp_Fn &, const node_update &)
- **splay_tree_map** (const splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- template<typename It > void **copy_from_range** (It, It)
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const
- bool **erase** (key_const_reference)
- iterator **erase** (iterator it)
- reverse_iterator **erase** (reverse_iterator)

- template<typename Pred >
  splay_tree_map< Key, Mapped,
  Cmp_Fn, Node_And_It_Traits,
  _Alloc >::size_type **erase_if** (Pred pred)
- template<typename Pred >
  size_type **erase_if** (Pred)
- point_iterator **find** (key_const_reference)
- point_const_iterator **find** (key_const_reference) const
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **initialize** ()
- std::pair< point_iterator, bool > **insert** (const_reference r_value)
- void **join** (splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **lower_bound** (key_const_reference)
- point_const_iterator **lower_bound** (key_const_reference) const
- size_type **max_size** () const
- node_const_iterator **node_begin** () const
- node_iterator **node_begin** ()
- node_const_iterator **node_end** () const
- node_iterator **node_end** ()
- mapped_reference **operator[]** (key_const_reference r_key)
- reverse_iterator **rbegin** ()
- const_reverse_iterator **rbegin** () const
- reverse_iterator **rend** ()
- const_reverse_iterator **rend** () const
- size_type **size** () const
- void **split** (key_const_reference, splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **swap** (splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **swap** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- point_iterator **upper_bound** (key_const_reference)
- point_const_iterator **upper_bound** (key_const_reference) const

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

Protected Types

- typedef
  node_alloc_traits::value_type **node**
- typedef
  node_alloc_traits::allocator_type **node_allocator**
- typedef
  traits_type::null_node_update_pointer **null_node_update_pointer**
- typedef types_traits< Key,
  Mapped, _Alloc, false > **traits_base**

Protected Member Functions

- void **actual_erase_node** (node_pointer)
- void **apply_update** (node_pointer, null_node_update_pointer)
- template<typename Node_Update_ >
  void **apply_update** (node_pointer, Node_Update_ *)
- std::pair< node_pointer, bool > **erase** (node_pointer)
- node_pointer **get_new_node_for_leaf_insert** (const_reference, false_type)
- node_pointer **get_new_node_for_leaf_insert** (const_reference, true_type)
- void **initialize_min_max** ()
- iterator **insert_imp_empty** (const_reference)
- std::pair< point_iterator, bool > **insert_leaf** (const_reference)
- iterator **insert_leaf_new** (const_reference, node_pointer, bool)
- void **join_finish** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- bool **join_prep** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- size_type **recursive_count** (node_pointer) const
- void **rotate_left** (node_pointer)
- void **rotate_parent** (node_pointer)
- void **rotate_right** (node_pointer)
- void **split_finish** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- bool **split_prep** (key_const_reference, bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)
- void **update_min_max_for_erased_node** (node_pointer)
- void **update_to_top** (node_pointer, null_node_update_pointer)
- template<typename Node_Update_ >
  void **update_to_top** (node_pointer, Node_Update_ *)
- void **value_swap** (bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc > &)

Static Protected Member Functions

- static void **clear_imp** (node_pointer)

Protected Attributes

- node_pointer **m_p_head**
- size_type **m_size**

Static Protected Attributes

- static node_allocator **s_node_allocator**

4.930.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, typename Node_And_It_Traits, typename _Alloc>class __gnu_pbds::detail::splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Splay tree.

Definition at line 107 of file splay_tree_.hpp.

4.930.2 Member Function Documentation

4.930.2.1 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) const [inline], [inherited]

Returns a const node_iterator corresponding to the node at the root of the tree.

Definition at line 111 of file bin_search_tree_.hpp.

4.930.2.2 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_begin ( ) [inline], [inherited]

Returns a node_iterator corresponding to the node at the root of the tree.

Definition at line 119 of file bin_search_tree_.hpp.

4.930.2.3 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_const_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) const [inline], [inherited]

Returns a const node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 127 of file bin_search_tree_.hpp.

4.930.2.4 template<typename Key , typename Mapped , typename Cmp_Fn , typename Node_And_It_Traits , typename _Alloc > bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_iterator __gnu_pbds::detail::bin_search_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::node_end ( ) [inline], [inherited]

Returns a node_iterator corresponding to a node just after a leaf of the tree.

Definition at line 135 of file bin_search_tree_.hpp.

The documentation for this class was generated from the following file:

- splay_tree_.hpp

4.931 __gnu_pbds::detail::splay_tree_node_< Value_Type, Metadata, _Alloc > Struct Template Reference

Public Types

- typedef rebind_traits< _Alloc, metadata_type > ::const_reference **metadata_const_reference**
- typedef rebind_traits< _Alloc, metadata_type >::reference **metadata_reference**
- typedef Metadata **metadata_type**
- typedef rebind_traits< _Alloc, splay_tree_node_ >::pointer **node_pointer**
- typedef Value_Type **value_type**

Public Member Functions

- metadata_const_reference **get_metadata** () const
- metadata_reference **get_metadata** ()
- bool **special** () const

Public Attributes

- metadata_type **m_metadata**
- node_pointer **m_p_left**
- node_pointer **m_p_parent**
- node_pointer **m_p_right**
- bool **m_special**
- value_type **m_value**

4.931.1 Detailed Description

template<typename Value_Type, class Metadata, typename _Alloc>struct __gnu_pbds::detail::splay_tree_node_< Value_Type, Metadata, _Alloc >

Node for splay tree.

Definition at line 50 of file splay_tree_/node.hpp.

The documentation for this struct was generated from the following file:

- splay_tree_/node.hpp

4.932 __gnu_pbds::splay_tree_tag Struct Reference

Inheritance diagram for __gnu_pbds::splay_tree_tag:

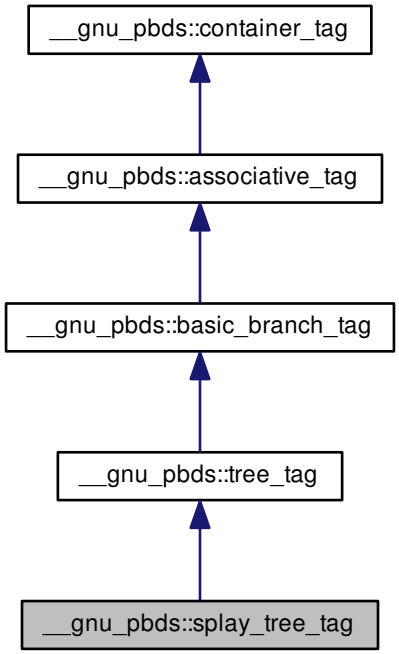

4.932.1 Detailed Description

Splay tree.

Definition at line 156 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.933 std::stack< _Tp, _Sequence > Class Template Reference

Public Types

- typedef _Sequence::const_reference **const_reference**
- typedef _Sequence **container_type**
- typedef _Sequence::reference **reference**
- typedef _Sequence::size_type **size_type**
- typedef _Sequence::value_type **value_type**

Public Member Functions

- template<typename _Seq = _Sequence, typename _Requires = typename enable_if<is_default_constructible<_Seq>::value>::type>
  stack ()
- **stack** (const _Sequence &__c)
- **stack** (_Sequence &&__c)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  stack (const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  stack (const _Sequence &__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  stack (_Sequence &&__c, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  stack (const stack &__q, const _Alloc &__a)
- template<typename _Alloc , typename _Requires = _Uses<_Alloc>>
  stack (stack &&__q, const _Alloc &__a)
- template<typename... _Args>
  void **emplace** (_Args &&...__args)
- bool empty () const
- void pop ()
- void push (const value_type &__x)
- void **push** (value_type &&__x)
- size_type size () const
- void **swap** (stack &__s) noexcept(__is_nothrow_swappable< _Sequence >::value)
- reference top ()
- const_reference top () const

Protected Attributes

- _Sequence **c**

Friends

- template<typename _Tp1 , typename _Seq1 >
  bool **operator**< (const stack< _Tp1, _Seq1 > &, const stack< _Tp1, _Seq1 > &)
- template<typename _Tp1 , typename _Seq1 >
  bool **operator==** (const stack< _Tp1, _Seq1 > &, const stack< _Tp1, _Seq1 > &)

4.933.1 Detailed Description

template<typename _Tp, typename _Sequence = deque<_Tp>>class std::stack< _Tp, _Sequence >

A standard container giving FILO behavior.

Template Parameters

_Tp	Type of element.

_Sequence	Type of underlying sequence, defaults to deque<_Tp>.

Meets many of the requirements of a container, but does not define anything to do with iterators. Very few of the other standard container interfaces are defined.

This is not a true container, but an *adaptor*. It holds another container, and provides a wrapper interface to that container. The wrapper is what enforces strict first-in-last-out stack behavior.

The second template parameter defines the type of the underlying sequence/container. It defaults to std::deque, but it can be any type that supports back, push_back, and pop_back, such as std::list, std::vector, or an appropriate user-defined type.

Members not found in *normal* containers are container_type, which is a typedef for the second Sequence parameter, and push, pop, and top, which are standard stack/FILO operations.

Definition at line 99 of file stl_stack.h.

4.933.2 Constructor & Destructor Documentation

4.933.2.1 template<typename _Tp, typename _Sequence = deque<_Tp>> template<typename _Seq = _Sequence, typename _Requires = typename enable_if<is_default_constructible<_Seq>::value>::type> std::stack< _Tp, _Sequence >::stack ( ) [inline]

Default constructor creates no elements.

Definition at line 162 of file stl_stack.h.

4.933.3 Member Function Documentation

4.933.3.1 template<typename _Tp, typename _Sequence = deque<_Tp>> bool std::stack< _Tp, _Sequence >::empty ( ) const [inline]

Returns true if the stack is empty.

Definition at line 199 of file stl_stack.h.

4.933.3.2 template<typename _Tp, typename _Sequence = deque<_Tp>> void std::stack< _Tp, _Sequence >::pop ( ) [inline]

Removes first element.

This is a typical stack operation. It shrinks the stack by one. The time complexity of the operation depends on the underlying sequence.

Note that no data is returned, and if the first element's data is needed, it should be retrieved before pop() is called.

Definition at line 272 of file stl_stack.h.

4.933.3.3 template<typename _Tp, typename _Sequence = deque<_Tp>> void std::stack< _Tp, _Sequence >::push (const value_type & __x) [inline]

Add data to the top of the stack.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the top of the stack and assigns the given data to it. The time complexity of the operation depends on the underlying sequence.

Definition at line 239 of file stl_stack.h.

4.933.3.4 template<typename _Tp, typename _Sequence = deque<_Tp>> size_type std::stack< _Tp, _Sequence >::size ( ) const [inline]

Returns the number of elements in the stack.

Definition at line 204 of file stl_stack.h.

4.933.3.5 template<typename _Tp, typename _Sequence = deque<_Tp>> reference std::stack< _Tp, _Sequence >::top ( ) [inline]

Returns a read/write reference to the data at the first element of the stack.

Definition at line 212 of file stl_stack.h.

4.933.3.6 template<typename _Tp, typename _Sequence = deque<_Tp>> const_reference std::stack< _Tp, _Sequence >::top ( ) const [inline]

Returns a read-only (constant) reference to the data at the first element of the stack.

Definition at line 223 of file stl_stack.h.

The documentation for this class was generated from the following file:

- stl_stack.h

4.934 __gnu_cxx::stdio_filebuf< _CharT, _Traits > Class Template Reference

Inheritance diagram for __gnu_cxx::stdio_filebuf< _CharT, _Traits >:

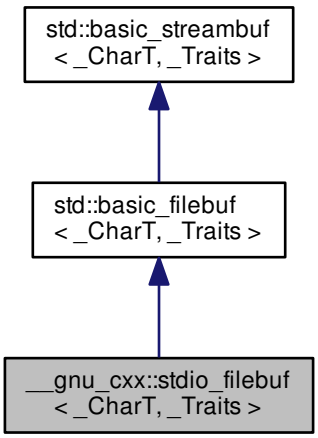

Public Types

- typedef codecvt< char_type, char, __state_type > **__codecvt_type**
- typedef __basic_file< char > **__file_type**
- typedef basic_filebuf < char_type, traits_type > **__filebuf_type**
- typedef traits_type::state_type **__state_type**
- typedef basic_streambuf < char_type, traits_type > **__streambuf_type**
- typedef _CharT **char_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::off_type **off_type**
- typedef traits_type::pos_type **pos_type**
- typedef std::size_t **size_t**
- typedef _Traits **traits_type**

Public Member Functions

- stdio_filebuf ()
- stdio_filebuf (int __fd, std::ios_base::openmode __mode, size_t __size=static_cast< size_t >(BUFSIZ))
- stdio_filebuf (std::__c_file *__f, std::ios_base::openmode __mode, size_t __size=static_cast< size_t >(BUFSIZ))
- **stdio_filebuf** (stdio_filebuf &&)=default
- virtual ~stdio_filebuf ()
- __filebuf_type * close ()
- int fd ()
- std::__c_file * file ()
- locale getloc () const
- streamsize in_avail ()
- bool is_open () const throw ()
- __filebuf_type * open (const char *__s, ios_base::openmode __mode)
- __filebuf_type * open (const std::string &__s, ios_base::openmode __mode)
- stdio_filebuf & **operator=** (stdio_filebuf &&)=default
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- int_type sungetc ()
- void **swap** (stdio_filebuf &__fb)
- void **swap** (basic_filebuf &)

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void **_M_allocate_internal_buffer** ()
- bool **_M_convert_to_external** (char_type *, streamsize)
- void _M_create_pback ()
- void **_M_destroy_internal_buffer** () throw ()
- void _M_destroy_pback () throw ()
- int **_M_get_ext_pos** (__state_type &__state)
- pos_type **_M_seek** (off_type __off, ios_base::seekdir __way, __state_type __state)
- void _M_set_buffer (streamsize __off)
- bool **_M_terminate_output** ()
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- virtual int_type overflow (int_type __c=_Traits::eof())
- virtual int_type pbackfail (int_type __c=_Traits::eof())
- void pbump (int __n)
- virtual pos_type seekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual pos_type seekpos (pos_type __pos, ios_base::openmode __mode=ios_base::in|ios_base::out)
- virtual __streambuf_type * setbuf (char_type *__s, streamsize __n)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- virtual int sync ()
- virtual int_type uflow ()
- virtual int_type underflow ()
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- char_type * _M_buf
- bool **_M_buf_allocated**
- locale _M_buf_locale
- size_t _M_buf_size
- const __codecvt_type * **_M_codecvt**
- char * _M_ext_buf
- streamsize _M_ext_buf_size
- char * **_M_ext_end**

- const char * _M_ext_next
- __file_type **_M_file**
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- __c_lock **_M_lock**
- ios_base::openmode _M_mode
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end
- bool _M_reading
- __state_type **_M_state_beg**
- __state_type **_M_state_cur**
- __state_type **_M_state_last**
- bool **_M_writing**

- char_type _M_pback
- char_type * _M_pback_cur_save
- char_type * _M_pback_end_save
- bool _M_pback_init

4.934.1 Detailed Description

template<typename _CharT, typename _Traits = std::char_traits<_CharT>>class __gnu_cxx::stdio_filebuf< _CharT, _Traits >

Provides a layer of compatibility for C/POSIX.

This GNU extension provides extensions for working with standard C FILE*'s and POSIX file descriptors. It must be instantiated by the user with the type of character used in the file stream, e.g., stdio_filebuf<char>.

Definition at line 50 of file stdio_filebuf.h.

4.934.2 Constructor & Destructor Documentation

4.934.2.1 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> __gnu_cxx::stdio_filebuf< _CharT, _Traits >::stdio_filebuf ( ) [inline]

deferred initialization

Definition at line 65 of file stdio_filebuf.h.

4.934.2.2 template<typename _CharT , typename _Traits > __gnu_cxx::stdio_filebuf< _CharT, _Traits >::stdio_filebuf (int *__fd*, std::ios_base::openmode *__mode*, size_t *__size* = static_cast<size_t>(BUFSIZ))

Parameters

__fd	An open file descriptor.
__mode	Same meaning as in a standard filebuf.
__size	Optimal or preferred size of internal buffer, in chars.

This constructor associates a file stream buffer with an open POSIX file descriptor. The file descriptor will be automatically closed when the stdio_filebuf is closed/destroyed.

Definition at line 137 of file stdio_filebuf.h.

4.934.2.3 template<typename _CharT , typename _Traits > __gnu_cxx::stdio_filebuf< _CharT, _Traits >::stdio_filebuf (std::__c_file * *__f,* std::ios_base::openmode *__mode,* size_t *__size* = static_cast<size_t>(BUFSIZ))

Parameters

__f	An open `FILE*`.
__mode	Same meaning as in a standard filebuf.
__size	Optimal or preferred size of internal buffer, in chars. Defaults to system's `BUFSIZ`.

This constructor associates a file stream buffer with an open C `FILE*`. The `FILE*` will not be automatically closed when the stdio_filebuf is closed/destroyed.

Definition at line 153 of file stdio_filebuf.h.

4.934.2.4 template<typename _CharT , typename _Traits > __gnu_cxx::stdio_filebuf< _CharT, _Traits >::~stdio_filebuf ( ) [virtual]

Closes the external data stream if the file descriptor constructor was used.

Definition at line 132 of file stdio_filebuf.h.

4.934.3 Member Function Documentation

4.934.3.1 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_create_pback ( ) [inline], [protected], [inherited]

Initializes pback buffers, and moves normal buffers to safety. Assumptions: _M_in_cur has already been moved back

Definition at line 199 of file fstream.

4.934.3.2 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_destroy_pback ( ) throw) [inline], [protected], [inherited]

Deactivates pback buffer contents, and restores normal buffer. Assumptions: The pback buffer has only moved forward.

Definition at line 216 of file fstream.

4.934.3.3 template<typename _CharT, typename _Traits> void std::basic_filebuf< _CharT, _Traits >::_M_set_buffer (streamsize *__off*) [inline], [protected], [inherited]

This function sets the pointers of the internal buffer, both get and put areas. Typically:

__off == egptr() - eback() upon underflow/uflow (**read** mode); __off == 0 upon overflow (**write** mode); __off == -1 upon open, setbuf, seekoff/pos (**uncommitted** mode).

NB: epptr() - pbase() == _M_buf_size - 1, since _M_buf_size reflects the actual allocated memory and the last cell is reserved for the overflow char of a full put area.

Definition at line 459 of file fstream.

4.934.3.4 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__filebuf_type * std::basic_filebuf< _CharT, _Traits >::close ( ) [inherited]

Closes the currently associated file.

Returns

`this` on success, NULL on failure

If no file is currently open, this function immediately fails.

If a *put buffer area* exists, `overflow(eof)` is called to flush all the characters. The file is then closed.

If any operations fail, this function also fails.

Definition at line 250 of file fstream.tcc.

Referenced by std::basic_ifstream< _CharT, _Traits >::close(), std::basic_ofstream< _CharT, _Traits >::close(), std::basic_fstream< _CharT, _Traits >::close(), and std::basic_filebuf< char_type, traits_type >::~basic_filebuf().

4.934.3.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.934.3.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.934.3.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.934.3.8 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> int __gnu_cxx::stdio_filebuf< _CharT, _Traits >::fd ( ) [inline]

Returns

The underlying file descriptor.

Once associated with an external data stream, this function can be used to access the underlying POSIX file descriptor. Note that there is no way for the library to track what you do with the descriptor, so be careful.

Definition at line 118 of file stdio_filebuf.h.

4.934.3.9 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> std::__c_file* __gnu_cxx::stdio_filebuf< _CharT, _Traits >::file ( ) [inline]

Returns

The underlying FILE*.

This function can be used to access the underlying "C" file pointer. Note that there is no way for the library to track what you do with the file, so be careful.

Definition at line 128 of file stdio_filebuf.h.

4.934.3.10 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.934.3.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.934.3.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.934.3.13 template<typename _CharT , typename _Traits > void std::basic_filebuf< _CharT, _Traits >::imbue (const locale & *__loc*) [protected], [virtual], [inherited]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 1030 of file fstream.tcc.

References std::ios_base::cur.

4.934.3.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.934.3.15 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::is_open ( ) const throw ( ) [inline], [inherited]

Returns true if the external file is open.

Definition at line 265 of file fstream.

Referenced by std::basic_ifstream< _CharT, _Traits >::is_open(), std::basic_ofstream< _CharT, _Traits >::is_open(), and std::basic_fstream< _CharT, _Traits >::is_open().

4.934.3.16 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__filebuf_type * std::basic_filebuf< _CharT, _Traits >::open (const char * __s, ios_base::openmode __mode) [inherited]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

If a file is already open, this function immediately fails. Otherwise it tries to open the file named *__s* using the flags given in *__mode*.

Table 92, adapted here, gives the relation between openmode combinations and the equivalent `fopen()` flags. (NB: lines app, in|out|app, in|app, binary|app, binary|in|out|app, and binary|in|app per DR 596)

ios_base Flag combination				stdio equivalent
binary	in	out	trunc	app	
		+			w
		+		+	a
				+	a
		+	+		w
	+				r
	+	+			r+
	+	+	+		w+
	+	+		+	a+
	+			+	a+
+		+			wb
+		+		+	ab
+				+	ab
+		+	+		wb
+	+				rb
+	+	+			r+b
+	+	+	+		w+b
+	+	+		+	a+b
+	+			+	a+b

Definition at line 180 of file fstream.tcc.

References std::ios_base::ate, std::ios_base::end, and std::basic_filebuf< _CharT, _Traits >::open().

Referenced by std::basic_filebuf< _CharT, _Traits >::open(), std::basic_filebuf< char_type, traits_type >::open(), std::basic_ifstream< _CharT, _Traits >::open(), std::basic_ofstream< _CharT, _Traits >::open(), and std::basic_fstream< _CharT, _Traits >::open().

4.934.3.17 template<typename _CharT, typename _Traits> __filebuf_type* std::basic_filebuf< _CharT, _Traits >::open (const std::string & *__s*, ios_base::openmode *__mode*) [inline], [inherited]

Opens an external file.

Parameters

__s	The name of the file.
__mode	The open mode flags.

Returns

`this` on success, NULL on failure

Definition at line 331 of file fstream.

4.934.3.18 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::overflow (int_type *__c* = `_Traits::eof()`) [protected], [virtual], [inherited]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually *__c*, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if *__c* is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 542 of file fstream.tcc.

References std::ios_base::app, std::ios_base::cur, and std::ios_base::out.

4.934.3.19 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::pbackfail (int_type *__c* = `_Traits::eof()`) [protected], [virtual], [inherited]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 483 of file fstream.tcc.

References std::ios_base::cur, and std::ios_base::in.

4.934.3.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.934.3.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.934.3.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.934.3.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & __loc) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.934.3.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.934.3.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.934.3.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.934.3.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.934.3.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.934.3.29 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::pos_type std::basic_filebuf< _CharT, _Traits >::seekoff (off_type , ios_base::seekdir , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 833 of file fstream.tcc.

References std::ios_base::cur.

4.934.3.30 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::pos_type std::basic_filebuf< _CharT, _Traits >::seekpos (pos_type , ios_base::openmode = ios_base::in | ios_base::out) [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 893 of file fstream.tcc.

References std::ios_base::beg.

4.934.3.31 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::__streambuf_type * std::basic_filebuf< _CharT, _Traits >::setbuf (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Manipulates the buffer.

Parameters

__s	Pointer to a buffer area.
__n	Size of *__s*.

Returns

`this`

If no file has been opened, and both *__s* and *__n* are zero, then the stream becomes unbuffered. Otherwise, *__s* is used as a buffer; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 804 of file fstream.tcc.

4.934.3.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*) [inline], [protected], [inherited]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.934.3.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.934.3.34 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.934.3.35 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * __s, streamsize __n) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.934.3.36 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::showmanyc ( ) [protected], [virtual], [inherited]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 298 of file fstream.tcc.

References std::ios_base::binary, and std::ios_base::in.

4.934.3.37 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.934.3.38 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type __c) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.934.3.39 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type __c) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.934.3.40 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * __s, streamsize __n) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.934.3.41 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.934.3.42 template<typename _CharT , typename _Traits > int std::basic_filebuf< _CharT, _Traits >::sync ( ) [protected], [virtual], [inherited]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 1013 of file fstream.tcc.

4.934.3.43 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual int_type std::basic_streambuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented in __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >.

Definition at line 707 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc().

4.934.3.44 template<typename _CharT , typename _Traits > basic_filebuf< _CharT, _Traits >::int_type std::basic_filebuf< _CharT, _Traits >::underflow ( ) [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 324 of file fstream.tcc.

References std::ios_base::in, and std::min().

4.934.3.45 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 670 of file fstream.tcc.

References std::ios_base::in.

4.934.3.46 template<typename _CharT , typename _Traits > streamsize std::basic_filebuf< _CharT, _Traits >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes *__s*[0] through *__s*[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 756 of file fstream.tcc.

References std::ios_base::app, std::min(), and std::ios_base::out.

4.934.4 Member Data Documentation

4.934.4.1 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_buf [protected], [inherited]

Pointer to the beginning of internal buffer.

Definition at line 136 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.934.4.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.934.4.3 template<typename _CharT, typename _Traits> size_t std::basic_filebuf< _CharT, _Traits >::_M_buf_size [protected], [inherited]

Actual size of internal buffer. This number is equal to the size of the put area + 1 position, reserved for the overflow char of a full area.

Definition at line 143 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.934.4.4 template<typename _CharT, typename _Traits> char* std::basic_filebuf< _CharT, _Traits >::_M_ext_buf [protected], [inherited]

Buffer for external characters. Used for input when codecvt::always_noconv() == false. When valid, this corresponds to eback().

Definition at line 178 of file fstream.

4.934.4.5 template<typename _CharT, typename _Traits> streamsize std::basic_filebuf< _CharT, _Traits >::_M_ext_buf_size [protected], [inherited]

Size of buffer held by _M_ext_buf.

Definition at line 183 of file fstream.

4.934.4.6 template<typename _CharT, typename _Traits> const char* std::basic_filebuf< _CharT, _Traits >::_M_ext_next [protected], [inherited]

Pointers into the buffer held by _M_ext_buf that delimit a subsequence of bytes that have been read but not yet converted. When valid, _M_ext_next corresponds to egptr().

Definition at line 190 of file fstream.

4.934.4.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.934.4.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.934.4.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.934.4.10 template<typename _CharT, typename _Traits> ios_base::openmode std::basic_filebuf< _CharT, _Traits >::_M_mode [protected], [inherited]

Place to stash in || out || in | out settings for current filebuf.

Definition at line 121 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.934.4.11 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.934.4.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.934.4.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.934.4.14 template<typename _CharT, typename _Traits> char_type std::basic_filebuf< _CharT, _Traits >::_M_pback [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 164 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback().

4.934.4.15 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_pback_cur_save [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 165 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.934.4.16 template<typename _CharT, typename _Traits> char_type* std::basic_filebuf< _CharT, _Traits >::_M_pback_end_save [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 166 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.934.4.17 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::_M_pback_init [protected], [inherited]

Necessary bits for putback buffer management.

Note

pbacks of over one character are not currently supported.

Definition at line 167 of file fstream.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), and std::basic_filebuf< char_type, traits_type >::_M_destroy_pback().

4.934.4.18 template<typename _CharT, typename _Traits> bool std::basic_filebuf< _CharT, _Traits >::_M_reading [protected], [inherited]

_M_reading == false && _M_writing == false for **uncommitted** mode; _M_reading == true for **read** mode; _M_writing == true for **write** mode;

NB: _M_reading == true && _M_writing == true is unused.

Definition at line 155 of file fstream.

The documentation for this class was generated from the following file:

- stdio_filebuf.h

4.935 __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits > Class Template Reference

Inheritance diagram for __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >:



Public Types

- typedef _CharT **char_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::off_type **off_type**
- typedef traits_type::pos_type **pos_type**
- typedef _Traits **traits_type**

Public Member Functions

- **stdio_sync_filebuf** (std::__c_file *__f)
- **stdio_sync_filebuf** (stdio_sync_filebuf &&__fb) noexcept
- std::__c_file * file ()
- locale getloc () const
- streamsize in_avail ()
- stdio_sync_filebuf & **operator=** (stdio_sync_filebuf &&__fb) noexcept
- locale pubimbue (const locale &__loc)
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)
- streamsize sputn (const char_type *__s, streamsize __n)
- int_type sungetc ()
- void **swap** (stdio_sync_filebuf &__fb)

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- virtual int_type overflow (int_type __c=traits_type::eof())
- virtual int_type pbackfail (int_type __c=traits_type::eof())
- void pbump (int __n)
- virtual std::streampos **seekoff** (std::streamoff __off, std::ios_base::seekdir __dir, std::ios_base::openmode=std::ios_base::in|std::ios_base::out)
- virtual pos_type seekoff (off_type, ios_base::seekdir, ios_base::openmode=ios_base::in|ios_base::out)
- virtual std::streampos **seekpos** (std::streampos __pos, std::ios_base::openmode __mode=std::ios_base::in|std::ios_base::out)
- virtual pos_type seekpos (pos_type, ios_base::openmode=ios_base::in|ios_base::out)
- virtual basic_streambuf < char_type, _Traits > * setbuf (char_type *, streamsize)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- virtual int sync ()
- int_type **syncgetc** ()
- template<>
  stdio_sync_filebuf< char >
  ::int_type **syncgetc** ()

- template<>
  stdio_sync_filebuf< wchar_t >
  ::int_type **syncgetc** ()
- int_type **syncputc** (int_type __c)
- template<>
  stdio_sync_filebuf< char >
  ::int_type **syncputc** (int_type __c)
- template<>
  stdio_sync_filebuf< wchar_t >
  ::int_type **syncputc** (int_type __c)
- int_type **syncungetc** (int_type __c)
- template<>
  stdio_sync_filebuf< char >
  ::int_type **syncungetc** (int_type __c)
- template<>
  stdio_sync_filebuf< wchar_t >
  ::int_type **syncungetc** (int_type __c)
- virtual int_type uflow ()
- virtual int_type underflow ()
- virtual std::streamsize **xsgetn** (char_type *__s, std::streamsize __n)
- template<>
  std::streamsize **xsgetn** (char *__s, std::streamsize __n)
- template<>
  std::streamsize **xsgetn** (wchar_t *__s, std::streamsize __n)
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- virtual std::streamsize **xsputn** (const char_type *__s, std::streamsize __n)
- template<>
  std::streamsize **xsputn** (const char *__s, std::streamsize __n)
- template<>
  std::streamsize **xsputn** (const wchar_t *__s, std::streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * gptr () const
- char_type * egptr () const

- char_type * pbase () const
- char_type * pptr () const
- char_type * epptr () const

Protected Attributes

- locale _M_buf_locale
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end

4.935.1 Detailed Description

template<typename _CharT, typename _Traits = std::char_traits<_CharT>>class __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >

Provides a layer of compatibility for C.

This GNU extension provides extensions for working with standard C FILE*'s. It must be instantiated by the user with the type of character used in the file stream, e.g., stdio_filebuf<char>.

Definition at line 57 of file stdio_sync_filebuf.h.

4.935.2 Member Function Documentation

4.935.2.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), and std::basic_streambuf< _Elem, _Tr >::sungetc().

4.935.2.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.935.2.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence

- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.935.2.4 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> std::__c_file* __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::file ( ) [inline]

Returns

The underlying FILE*.

This function can be used to access the underlying C file pointer. Note that there is no way for the library to track what you do with the file, so be careful.

Definition at line 118 of file stdio_sync_filebuf.h.

4.935.2.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.935.2.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.935.2.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence

- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), std::basic_streambuf< _Elem, _Tr >::in_avail(), std::basic_streambuf< _Elem, _Tr >::sbumpc(), std::basic_streambuf< _Elem, _Tr >::sgetc(), std::basic_stringbuf< _CharT, _Traits, _Alloc >::showmanyc(), std::basic_streambuf< _Elem, _Tr >::sputbackc(), std::basic_streambuf< _Elem, _Tr >::sungetc(), and std::basic_streambuf< _Elem, _Tr >::uflow().

4.935.2.8 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual void std::basic_streambuf< _CharT, _Traits >::imbue (const locale & *__loc*) [inline], [protected], [virtual], [inherited]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 583 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.935.2.9 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

4.935.2.10 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> virtual int_type __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::overflow (int_type *__c* = `traits_type::eof()`) [inline], [protected], [virtual]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually __c, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if __c is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 171 of file stdio_sync_filebuf.h.

4.935.2.11 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> virtual int_type __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::pbackfail (int_type __c = traits_type::eof()) [inline], [protected], [virtual]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 146 of file stdio_sync_filebuf.h.

4.935.2.12 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence

- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

Referenced by std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.935.2.13 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc().

4.935.2.14 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::sputc(), and std::basic_stringbuf< _CharT, _Traits, _Alloc >::str().

4.935.2.15 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::pubimbue (const locale & __loc) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

4.935.2.16 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.
__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

4.935.2.17 template<typename _CharT, typename _Traits = char_traits<_CharT>> pos_type std::basic_streambuf< _CharT, _Traits >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

4.935.2.18 template<typename _CharT, typename _Traits = char_traits<_CharT>> basic_streambuf* std::basic_streambuf< _CharT, _Traits >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

4.935.2.19 template<typename _CharT, typename _Traits = char_traits<_CharT>> int std::basic_streambuf< _CharT, _Traits >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync(), and std::basic_istream< _CharT, _Traits >::sync().

4.935.2.20 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.935.2.21 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual pos_type std::basic_streambuf< _CharT, _Traits >::seekoff (off_type , ios_base::seekdir , ios_base::openmode = ios_base::in | ios_base::out) [inline], [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 609 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubseekoff().

4.935.2.22 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual pos_type std::basic_streambuf< _CharT, _Traits >::seekpos (pos_type , ios_base::openmode = ios_base::in | ios_base::out) [inline], [protected], [virtual], [inherited]

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 621 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubseekpos().

4.935.2.23 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual basic_streambuf<char_type,_Traits>* std::basic_streambuf< _CharT, _Traits >::setbuf (char_type *, streamsize) [inline], [protected], [virtual], [inherited]

Manipulates the buffer.

Each derived class provides its own appropriate behavior. See the next-to-last paragraph of https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more on this function.

Note

Base class version does nothing, returns `this`.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 598 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pubsetbuf().

4.935.2.24 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setg (char_type * __gbeg, char_type * __gnext, char_type * __gend) [inline], [protected], [inherited]

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_create_pback(), std::basic_filebuf< char_type, traits_type >::_M_destroy_pback(), and std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.935.2.25 template<typename _CharT, typename _Traits = char_traits<_CharT>> void std::basic_streambuf< _CharT, _Traits >::setp (char_type * *__pbeg*, char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

Referenced by std::basic_filebuf< char_type, traits_type >::_M_set_buffer().

4.935.2.26 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), std::istreambuf_iterator< _CharT, _Traits >::operator++(), std::basic_istream< _CharT, _Traits >::sentry::sentry(), and std::basic_streambuf< _Elem, _Tr >::snextc().

4.935.2.27 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sgetn (char_type * *__s*, streamsize *__n*) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

4.935.2.28 template<typename _CharT, typename _Traits = char_traits<_CharT>> virtual streamsize std::basic_streambuf< _CharT, _Traits >::showmanyc ( ) [inline], [protected], [virtual], [inherited]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, std::basic_filebuf< char_type, traits_type >, and std::basic_stringbuf< _CharT, _Traits, _Alloc >.

Definition at line 656 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::in_avail().

4.935.2.29 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), std::basic_istream< _CharT, _Traits >::getline(), std::basic_istream< _CharT, _Traits >::ignore(), and std::basic_istream< _CharT, _Traits >::sentry::sentry().

4.935.2.30 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputbackc (char_type *__c*) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but *__c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be *__c*.

Definition at line 379 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::putback().

4.935.2.31 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sputc (char_type *__c*) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__c	A character to output.

Returns

__c, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores *__c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::get(), and std::ostreambuf_iterator< _CharT, _Traits >::operator=().

4.935.2.32 template<typename _CharT, typename _Traits = char_traits<_CharT>> streamsize std::basic_streambuf< _CharT, _Traits >::sputn (const char_type * *__s*, streamsize *__n*) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__s	A buffer read area.
__n	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write *__s*[0] through *__s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

4.935.2.33 template<typename _CharT, typename _Traits = char_traits<_CharT>> int_type std::basic_streambuf< _CharT, _Traits >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

Referenced by std::basic_istream< _CharT, _Traits >::unget().

4.935.2.34 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> virtual int __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::sync (void) [inline], [protected], [virtual]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 190 of file stdio_sync_filebuf.h.

4.935.2.35 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> virtual int_type __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::uflow ( ) [inline], [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 138 of file stdio_sync_filebuf.h.

4.935.2.36 template<typename _CharT , typename _Traits = std::char_traits<_CharT>> virtual int_type __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >::underflow ( ) [inline], [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _CharT, _Traits >.

Definition at line 131 of file stdio_sync_filebuf.h.

4.935.2.37 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 46 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sgetn().

4.935.2.38 template<typename _CharT , typename _Traits > streamsize std::basic_streambuf< _CharT, _Traits >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes __*s*[0] through __*s*[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

Reimplemented in std::basic_filebuf< _CharT, _Traits >, std::basic_filebuf< _CharT, encoding_char_traits< _CharT > >, and std::basic_filebuf< char_type, traits_type >.

Definition at line 80 of file streambuf.tcc.

References std::min().

Referenced by std::basic_streambuf< _Elem, _Tr >::sputn().

4.935.3 Member Data Documentation

4.935.3.1 template<typename _CharT, typename _Traits = char_traits<_CharT>> locale std::basic_streambuf< _CharT, _Traits >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

Referenced by std::basic_filebuf< _CharT, _Traits >::basic_filebuf(), std::basic_streambuf< _Elem, _Tr >::getloc(), and std::basic_streambuf< _Elem, _Tr >::pubimbue().

4.935.3.2 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::eback(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.935.3.3 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::gbump(), std::basic_streambuf< _Elem, _Tr >::gptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.935.3.4 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::setg().

4.935.3.5 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbase(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.935.3.6 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::pbump(), std::basic_streambuf< _Elem, _Tr >::pptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.935.3.7 template<typename _CharT, typename _Traits = char_traits<_CharT>> char_type* std::basic_streambuf< _CharT, _Traits >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

Referenced by std::basic_streambuf< _Elem, _Tr >::epptr(), and std::basic_streambuf< _Elem, _Tr >::setp().

The documentation for this class was generated from the following file:

- stdio_sync_filebuf.h

4.936 std::chrono::_V2::steady_clock Struct Reference

Public Types

- typedef chrono::nanoseconds **duration**
- typedef duration::period **period**
- typedef duration::rep **rep**
- typedef chrono::time_point < steady_clock, duration > **time_point**

Static Public Member Functions

- static time_point **now** () noexcept

Static Public Attributes

- static constexpr bool **is_steady**

4.936.1 Detailed Description

Monotonic clock.

Time returned has the property of only increasing at a uniform rate.

Definition at line 1028 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.937 __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash >:

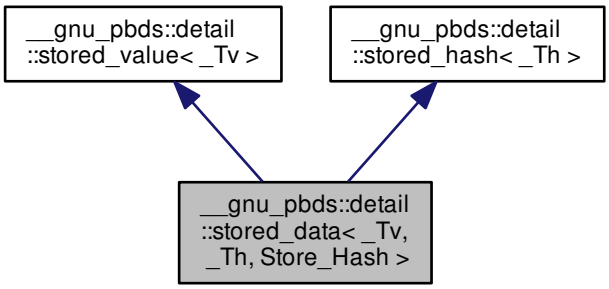

Public Types

- typedef _Th **hash_type**
- typedef _Tv **value_type**

Public Attributes

- hash_type **m_hash**
- value_type **m_value**

4.937.1 Detailed Description

template<typename _Tv, typename _Th, bool Store_Hash>struct __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash >

Primary template for representation of stored data. Two types of data can be stored: value and hash.

Definition at line 95 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.938 __gnu_pbds::detail::stored_data< _Tv, _Th, false > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::stored_data< _Tv, _Th, false >:



Public Types

- typedef _Tv **value_type**

Public Attributes

- value_type **m_value**

4.938.1 Detailed Description

template<typename _Tv, typename _Th>struct __gnu_pbds::detail::stored_data< _Tv, _Th, false >

Specialization for representation of stored data of just value type.

Definition at line 101 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.939 __gnu_pbds::detail::stored_hash< _Th > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::stored_hash< _Th >:



Public Types

- typedef _Th **hash_type**

Public Attributes

- hash_type **m_hash**

4.939.1 Detailed Description

template<typename _Th>struct __gnu_pbds::detail::stored_hash< _Th >

Stored hash.

Definition at line 86 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.940 __gnu_pbds::detail::stored_value< _Tv > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::stored_value< _Tv >:

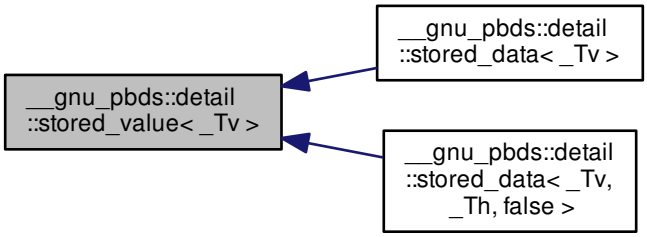

Public Types

- typedef _Tv **value_type**

Public Attributes

- value_type **m_value**

4.940.1 Detailed Description

template<typename _Tv>struct __gnu_pbds::detail::stored_value< _Tv >

Stored value.

Definition at line 78 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.941 __gnu_pbds::string_tag Struct Reference

Inheritance diagram for __gnu_pbds::string_tag:

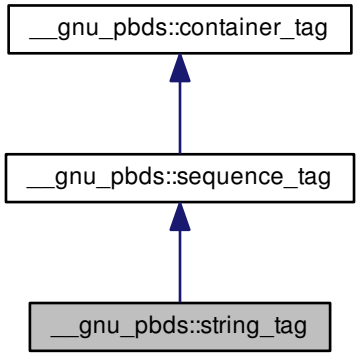

4.941.1 Detailed Description

Basic string container, inclusive of strings, ropes, etc.

Definition at line 132 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.942 std::student_t_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **student_t_distribution** (_RealType __n)
- **student_t_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)

- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type max () const
- result_type min () const
- _RealType **n** () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::student_t_distribution< _RealType1 > &__x)
- bool operator== (const student_t_distribution &__d1, const student_t_distribution &__d2)
- template<typename _RealType1 , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::student_t_distribution< _RealType1 > &__x)

4.942.1 Detailed Description

template<typename _RealType = double>class std::student_t_distribution< _RealType >

A student_t_distribution random number distribution.

The formula for the normal probability mass function is:

$$p(x|n) = \frac{1}{\sqrt{(n\pi)}} \frac{\Gamma((n+1)/2)}{\Gamma(n/2)} (1 + \frac{x^2}{n})^{-(n+1)/2}$$

Definition at line 3285 of file random.h.

4.942.2 Member Typedef Documentation

4.942.2.1 template<typename _RealType = double> typedef _RealType std::student_t_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 3288 of file random.h.

4.942.3 Member Function Documentation

4.942.3.1 template<typename _RealType = double> result_type std::student_t_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 3377 of file random.h.

References std::numeric_limits< _Tp >::max().

4.942.3.2 template<typename _RealType = double> result_type std::student_t_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 3370 of file random.h.

References std::numeric_limits< _Tp >::lowest().

4.942.3.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::student_t_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 3385 of file random.h.

References std::sqrt().

4.942.3.4 template<typename _RealType = double> param_type std::student_t_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 3355 of file random.h.

4.942.3.5 template<typename _RealType = double> void std::student_t_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 3363 of file random.h.

4.942.3.6 template<typename _RealType = double> void std::student_t_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 3338 of file random.h.

References std::normal_distribution< _RealType >::reset(), and std::gamma_distribution< _RealType >::reset().

4.942.4 Friends And Related Function Documentation

4.942.4.1 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & __os, const std::student_t_distribution< _RealType1 > & __x) [friend]

Inserts a student_t_distribution random number distribution __x into the output stream __os.

Parameters

__os	An output stream.
__x	A student_t_distribution random number distribution.

Returns

The output stream with the state of __x inserted or in an error state.

4.942.4.2 template<typename _RealType = double> bool operator== (const std::student_t_distribution< _RealType > & *__d1*, const std::student_t_distribution< _RealType > & *__d2*) [friend]

Return true if two Student t distributions have the same parameters and the sequences that would be generated are equal.

Definition at line 3434 of file random.h.

4.942.4.3 template<typename _RealType = double> template<typename _RealType1 , typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is*, std::student_t_distribution< _RealType1 > & *__x*) [friend]

Extracts a student_t_distribution random number distribution __x from the input stream __is.

Parameters

__is	An input stream.
__x	A student_t_distribution random number generator engine.

Returns

The input stream with __x extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.943 std::sub_match< _Bilter > Class Template Reference

Inheritance diagram for std::sub_match< _Bilter >:



Public Types

- typedef __iter_traits::difference_type **difference_type**
- typedef _BiIter first_type
- typedef _BiIter **iterator**
- typedef _BiIter second_type
- typedef basic_string< value_type > **string_type**
- typedef __iter_traits::value_type **value_type**

Public Member Functions

- int compare (const sub_match &__s) const
- difference_type length () const noexcept
- operator string_type () const
- string_type str () const
- constexpr void swap (pair &__p) noexcept(__and_< __is_nothrow_swappable< _BiIter >, __is_nothrow_swappable< _BiIter >>::value)

- int compare (const string_type &__s) const
- int compare (const value_type *__s) const

Public Attributes

- _BiIter first
- bool **matched**
- _BiIter second

Related Functions

(Note that these are not member functions.)

- template<typename _BiIter >
  bool operator== (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator!= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator< (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator<= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator>= (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _BiIter >
  bool operator> (const sub_match< _BiIter > &__lhs, const sub_match< _BiIter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator== (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator!= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)

- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator< (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator> (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator>= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator<= (const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator== (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator< (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator> (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter , typename _Ch_traits , typename _Ch_alloc >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, const __sub_match_string< _Bi_iter, _Ch_traits, _Ch_alloc > &__rhs)
- template<typename _Bi_iter >
  bool operator== (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator!= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator< (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator> (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator>= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator<= (typename iterator_traits< _Bi_iter >::value_type const *__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator== (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)

- template<typename _Bi_iter >
  bool operator< (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator> (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const *__rhs)
- template<typename _Bi_iter >
  bool operator== (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator!= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator< (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator> (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator>= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator<= (typename iterator_traits< _Bi_iter >::value_type const &__lhs, const sub_match< _Bi_iter > &__rhs)
- template<typename _Bi_iter >
  bool operator== (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator!= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator< (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator> (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator>= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Bi_iter >
  bool operator<= (const sub_match< _Bi_iter > &__lhs, typename iterator_traits< _Bi_iter >::value_type const &__rhs)
- template<typename _Ch_type , typename _Ch_traits , typename _Bi_iter >
  basic_ostream< _Ch_type,
  _Ch_traits > & operator<< (basic_ostream< _Ch_type, _Ch_traits > &__os, const sub_match< _Bi_iter > &__m)

4.943.1 Detailed Description

template<typename _Bilter>class std::sub_match< _Bilter >

A sequence of characters matched by a particular marked sub-expression.

An object of this class is essentially a pair of iterators marking a matched subexpression within a regular expression pattern match. Such objects can be converted to and compared with std::basic_string objects of a similar base character type as the pattern matched by the regular expression.

The iterators that make up the pair are the usual half-open interval referencing the actual original pattern matched.

Definition at line 868 of file regex.h.

4.943.2 Member Typedef Documentation

4.943.2.1 typedef _Bilter std::pair< _Bilter , _Bilter >::first_type [inherited]

The type of the `first` member.

Definition at line 214 of file stl_pair.h.

4.943.2.2 typedef _Bilter std::pair< _Bilter , _Bilter >::second_type [inherited]

The type of the `second` member.

Definition at line 215 of file stl_pair.h.

4.943.3 Member Function Documentation

4.943.3.1 template<typename _Bilter> int std::sub_match< _Bilter >::compare (const sub_match< _Bilter > & __s) const [inline]

Compares this and another matched sequence.

Parameters

__s	Another matched sequence to compare to this one.

Return values

<0	this matched sequence will collate before `__s`.
=0	this matched sequence is equivalent to `__s`.
<0	this matched sequence will collate after `__s`.

Definition at line 923 of file regex.h.

Referenced by std::sub_match< _Bilter >::operator!=(), std::sub_match< _Bilter >::operator<(), std::sub_match< _Bilter >::operator<=(), std::sub_match< _Bilter >::operator==(), std::sub_match< _Bilter >::operator>(), and std::sub_match< _Bilter >::operator>=().

4.943.3.2 template<typename _Bilter> int std::sub_match< _Bilter >::compare (const string_type & __s) const [inline]

Compares this sub_match to a string.

Parameters

__s	A string to compare to this sub_match.

Return values

<0	this matched sequence will collate before __s.
=0	this matched sequence is equivalent to __s.
<0	this matched sequence will collate after __s.

Definition at line 937 of file regex.h.

4.943.3.3 template<typename _Bilter> int std::sub_match< _Bilter >::compare (const value_type * __s) const [inline]

Compares this sub_match to a string.

Parameters

__s	A string to compare to this sub_match.

Return values

<0	this matched sequence will collate before __s.
=0	this matched sequence is equivalent to __s.
<0	this matched sequence will collate after __s.

Definition at line 941 of file regex.h.

4.943.3.4 template<typename _Bilter> difference_type std::sub_match< _Bilter >::length ( ) const [inline], [noexcept]

Gets the length of the matching sequence.

Definition at line 884 of file regex.h.

4.943.3.5 template<typename _Bilter> std::sub_match< _Bilter >::operator string_type ( ) const [inline]

Gets the matching sequence as a string.

Returns

the matching sequence as a string.

This is the implicit conversion operator. It is identical to the str() member function except that it will want to pop up in unexpected places and cause a great deal of confusion and cursing from the unwary.

Definition at line 897 of file regex.h.

4.943.3.6 template<typename _Bilter> string_type std::sub_match< _Bilter >::str ( ) const [inline]

Gets the matching sequence as a string.

Returns

the matching sequence as a string.

Definition at line 906 of file regex.h.

Referenced by std::sub_match< _Bi_iter >::operator string_type(), and std::sub_match< _Bilter >::operator<<().

4.943.3.7 constexpr void std::pair< _Bilter , _Bilter >::swap (pair< _Bilter, _Bilter > & __p) [inline], [noexcept], [inherited]

Swap the first members and then the second members.

Definition at line 439 of file stl_pair.h.

References std::pair< _T1, _T2 >::first, std::pair< _T1, _T2 >::second, and std::pair< _T1, _T2 >::swap().

4.943.4 Member Data Documentation

4.943.4.1 _Bilter std::pair< _Bilter , _Bilter >::first [inherited]

The first member.

Definition at line 217 of file stl_pair.h.

Referenced by std::sub_match< _Bi_iter >::length(), and std::sub_match< _Bi_iter >::str().

4.943.4.2 _Bilter std::pair< _Bilter , _Bilter >::second [inherited]

The second member.

Definition at line 218 of file stl_pair.h.

Referenced by std::sub_match< _Bi_iter >::length(), and std::sub_match< _Bi_iter >::str().

The documentation for this class was generated from the following file:

- regex.h

4.944 std::subtract_with_carry_engine< _UIntType, __w, __s, __r > Class Template Reference

Public Types

- typedef _UIntType result_type

Public Member Functions

- subtract_with_carry_engine (result_type __sd)
- template<typename _Sseq , typename = _If_seed_seq<_Sseq>>
  subtract_with_carry_engine (_Sseq &__q)
- void discard (unsigned long long __z)
- result_type operator() ()
- template<typename _Sseq >
  auto **seed** (_Sseq &__q) -> _If_seed_seq< _Sseq >
- void seed (result_type __sd=default_seed)
- template<typename _Sseq >
  _If_seed_seq< _Sseq > seed (_Sseq &__q)

Static Public Member Functions

- static constexpr result_type max ()
- static constexpr result_type min ()

Static Public Attributes

- static constexpr result_type **default_seed**
- static constexpr size_t **long_lag**
- static constexpr size_t **short_lag**
- static constexpr size_t **word_size**

Friends

- template<typename _UIntType1 , size_t __w1, size_t __s1, size_t __r1, typename _CharT , typename _Traits > std::basic_ostream< _CharT, _Traits > & operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::subtract_with_carry_engine< _UIntType1, __w1, __s1, __r1 > &__x)
- bool operator== (const subtract_with_carry_engine &__lhs, const subtract_with_carry_engine &__rhs)
- template<typename _UIntType1 , size_t __w1, size_t __s1, size_t __r1, typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & operator>> (std::basic_istream< _CharT, _Traits > &__is, std::subtract_with_carry_engine< _UIntType1, __w1, __s1, __r1 > &__x)

4.944.1 Detailed Description

template<typename _UIntType, size_t __w, size_t __s, size_t __r>class std::subtract_with_carry_engine< _UIntType, __w, __s, __r >

The Marsaglia-Zaman generator.

This is a model of a Generalized Fibonacci discrete random number generator, sometimes referred to as the SWC generator.

A discrete random number generator that produces pseudorandom numbers using:

$$x_i \leftarrow (x_{i-s} - x_{i-r} - carry_{i-1}) \bmod m$$

The size of the state is r and the maximum period of the generator is $(m^r - m^s - 1)$.

Definition at line 683 of file random.h.

4.944.2 Member Typedef Documentation

4.944.2.1 template<typename _UIntType, size_t __w, size_t __s, size_t __r> typedef _UIntType std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::result_type

The type of the generated random value.

Definition at line 698 of file random.h.

4.944.3 Constructor & Destructor Documentation

4.944.3.1 template<typename _UIntType, size_t __w, size_t __s, size_t __r> std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::subtract_with_carry_engine (result_type *__sd*) [inline], [explicit]

Constructs an explicitly seeded subtract_with_carry_engine random number generator.

Definition at line 714 of file random.h.

References std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::seed().

4.944.3.2 template<typename _UIntType, size_t __w, size_t __s, size_t __r> template<typename _Sseq , typename = _If_seed_seq<_Sseq>> std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::subtract_with_carry_engine (_Sseq & __q) [inline], [explicit]

Constructs a subtract_with_carry_engine random number engine seeded from the seed sequence __q.

Parameters

__q	the seed sequence.

Definition at line 725 of file random.h.

References std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::seed().

4.944.4 Member Function Documentation

4.944.4.1 template<typename _UIntType, size_t __w, size_t __s, size_t __r> void std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::discard (unsigned long long *__z*) [inline]

Discard a sequence of random numbers.

Definition at line 771 of file random.h.

4.944.4.2 template<typename _UIntType, size_t __w, size_t __s, size_t __r> static constexpr result_type std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::max ( ) [inline], [static]

Gets the inclusive maximum value of the range of random integers returned by this generator.

Definition at line 764 of file random.h.

4.944.4.3 template<typename _UIntType, size_t __w, size_t __s, size_t __r> static constexpr result_type std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::min ( ) [inline], [static]

Gets the inclusive minimum value of the range of random integers returned by this generator.

Definition at line 756 of file random.h.

4.944.4.4 template<typename _UIntType , size_t __w, size_t __s, size_t __r> subtract_with_carry_engine< _UIntType, __w, __s, __r >::result_type std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::operator() ( )

Gets the next random number in the sequence.

Definition at line 594 of file bits/random.tcc.

4.944.4.5 template<typename _UIntType , size_t __w, size_t __s, size_t __r> void std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::seed (result_type *__sd* = default_seed)

Seeds the initial state x_0 of the random number generator.

N1688[4.19] modifies this as follows. If __value == 0, sets value to 19780503. In any case, with a linear congruential generator lcg(i) having parameters $m_{lcg} = 2147483563, a_{lcg} = 40014, c_{lcg} = 0, and lcg(0) = value$, sets $x_{-r} \ldots x_{-1}$ to $lcg(1) \bmod m \ldots lcg(r) \bmod m$ respectively. If $x_{-1} = 0$ set carry to 1, otherwise sets carry to 0.

Definition at line 538 of file bits/random.tcc.

Referenced by std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::subtract_with_carry_engine().

4.944.4.6 template<typename _UIntType, size_t __w, size_t __s, size_t __r> template<typename _Sseq > _If_seed_seq<_Sseq> std::subtract_with_carry_engine< _UIntType, __w, __s, __r >::seed (_Sseq & *__q*)

Seeds the initial state x_0 of the % subtract_with_carry_engine random number generator.

4.944.5 Friends And Related Function Documentation

4.944.5.1 template<typename _UIntType, size_t __w, size_t __s, size_t __r> template<typename _UIntType1 , size_t __w1, size_t __s1, size_t __r1, typename _CharT , typename _Traits > std::basic_ostream<_CharT, _Traits>& operator<< (std::basic_ostream< _CharT, _Traits > & *__os,* const std::subtract_with_carry_engine< _UIntType1, __w1, __s1, __r1 > & *__x*) [friend]

Inserts the current state of a % subtract_with_carry_engine random number generator engine __x into the output stream __os.

Parameters

__os	An output stream.
__x	A % subtract_with_carry_engine random number generator engine.

Returns

The output stream with the state of `__x` inserted or in an error state.

4.944.5.2 template<typename _UIntType, size_t __w, size_t __s, size_t __r> bool operator== (const subtract_with_carry_engine< _UIntType, __w, __s, __r > & *__lhs,* const subtract_with_carry_engine< _UIntType, __w, __s, __r > & *__rhs*) [friend]

Compares two % subtract_with_carry_engine random number generator objects of the same type for equality.

Parameters

__lhs	A % subtract_with_carry_engine random number generator object.
__rhs	Another % subtract_with_carry_engine random number generator object.

Returns

true if the infinite sequences of generated values would be equal, false otherwise.

Definition at line 796 of file random.h.

4.944.5.3 template<typename _UIntType, size_t __w, size_t __s, size_t __r> template<typename _UIntType1 , size_t __w1, size_t __s1, size_t __r1, typename _CharT , typename _Traits > std::basic_istream<_CharT, _Traits>& operator>> (std::basic_istream< _CharT, _Traits > & *__is,* std::subtract_with_carry_engine< _UIntType1, __w1, __s1, __r1 > & *__x*) [friend]

Extracts the current state of a % subtract_with_carry_engine random number generator engine `__x` from the input stream `__is`.

Parameters

__is	An input stream.
__x	A % subtract_with_carry_engine random number generator engine.

Returns

The input stream with the state of `__x` extracted or in an error state.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.945 __gnu_cxx::subtractive_rng Class Reference

Inheritance diagram for __gnu_cxx::subtractive_rng:

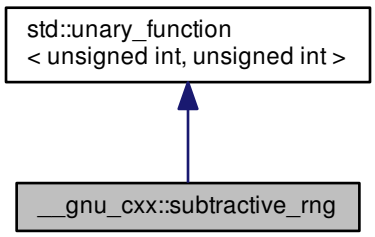

Public Types

- typedef unsigned int argument_type
- typedef unsigned int result_type

Public Member Functions

- subtractive_rng (unsigned int __seed)
- subtractive_rng ()
- void **_M_initialize** (unsigned int __seed)
- unsigned int operator() (unsigned int __limit)

4.945.1 Detailed Description

The `subtractive_rng` class is documented on `SGI's site`. Note that this code assumes that `int` is 32 bits.

Definition at line 344 of file ext/functional.

4.945.2 Member Typedef Documentation

4.945.2.1 typedef unsigned int std::unary_function< unsigned int , unsigned int >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.945.2.2 typedef unsigned int std::unary_function< unsigned int , unsigned int >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

4.945.3 Constructor & Destructor Documentation

4.945.3.1 __gnu_cxx::subtractive_rng::subtractive_rng (unsigned int *__seed*) [inline]

Ctor allowing you to initialize the seed.

Definition at line 386 of file ext/functional.

4.945.3.2 __gnu_cxx::subtractive_rng::subtractive_rng ( ) [inline]

Default ctor; initializes its state with some number you don't see.

Definition at line 390 of file ext/functional.

4.945.4 Member Function Documentation

4.945.4.1 unsigned int __gnu_cxx::subtractive_rng::operator() (unsigned int *__limit*) [inline]

Returns a number less than the argument.

Definition at line 355 of file ext/functional.

The documentation for this class was generated from the following file:

- ext/functional

4.946 __gnu_pbds::detail::synth_access_traits< Type_Traits, Set, _ATraits > Struct Template Reference

Inherits _ATraits.

Public Types

- typedef _ATraits **base_type**
- typedef base_type::const_iterator **const_iterator**
- typedef type_traits::const_reference **const_reference**
- typedef type_traits::key_const_reference **key_const_reference**
- typedef Type_Traits **type_traits**

Public Member Functions

- **synth_access_traits** (const base_type &)
- bool **cmp_keys** (key_const_reference, key_const_reference) const
- bool **cmp_prefixes** (const_iterator, const_iterator, const_iterator, const_iterator, bool compare_after=false) const
- bool **equal_keys** (key_const_reference, key_const_reference) const
- bool **equal_prefixes** (const_iterator, const_iterator, const_iterator, const_iterator, bool compare_after=true) const

Static Public Member Functions

- static key_const_reference **extract_key** (const_reference)

4.946.1 Detailed Description

template<typename Type_Traits, bool Set, typename _ATraits>struct __gnu_pbds::detail::synth_access_traits< Type_Traits, Set, _ATraits >

Synthetic element access traits.

Definition at line 59 of file synth_access_traits.hpp.

The documentation for this struct was generated from the following file:

- synth_access_traits.hpp

4.947 std::chrono::_V2::system_clock Struct Reference

Public Types

- typedef chrono::nanoseconds **duration**
- typedef duration::period **period**
- typedef duration::rep **rep**
- typedef chrono::time_point < system_clock, duration > **time_point**

Static Public Member Functions

- static time_point **from_time_t** (std::time_t __t) noexcept
- static time_point **now** () noexcept
- static std::time_t **to_time_t** (const time_point &__t) noexcept

Static Public Attributes

- static constexpr bool **is_steady**

4.947.1 Detailed Description

System clock.

Time returned represents wall time from the system-wide clock.

Definition at line 988 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.948 std::system_error Class Reference

Inheritance diagram for std::system_error:

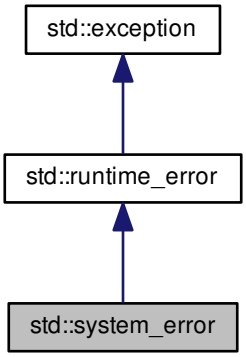

Public Member Functions

- **system_error** (error_code __ec=error_code())
- **system_error** (error_code __ec, const string &__what)
- **system_error** (error_code __ec, const char *__what)
- **system_error** (int __v, const error_category &__ecat, const char *__what)
- **system_error** (int __v, const error_category &__ecat)
- **system_error** (int __v, const error_category &__ecat, const string &__what)
- **system_error** (const system_error &)=default
- const error_code & **code** () const noexcept
- system_error & **operator=** (const system_error &)=default
- virtual const char * what () const noexcept

4.948.1 Detailed Description

An exception type that includes an `error_code` value.

Typically used to report errors from the operating system and other low-level APIs.

Definition at line 428 of file system_error.

4.948.2 Member Function Documentation

4.948.2.1 virtual const char* std::runtime_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- system_error

4.949 __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp > Struct Template Reference

Inheritance diagram for __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >:



Public Types

- typedef pointer **iterator**
- typedef value_type * **pointer**
- typedef ptrdiff_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- temporary_buffer (_ForwardIterator __first, _ForwardIterator __last)
- ~temporary_buffer ()
- iterator begin ()
- iterator end ()
- size_type requested_size () const
- size_type size () const

Protected Attributes

- pointer **_M_buffer**
- size_type **_M_len**
- size_type **_M_original_len**

4.949.1 Detailed Description

template<class _ForwardIterator, class _Tp = typename std::iterator_traits<_ForwardIterator>::value_type>struct __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >

This class provides similar behavior and semantics of the standard functions get_temporary_buffer() and return_temporary_buffer(), but encapsulated in a type vaguely resembling a standard container.

By default, a temporary_buffer<Iter> stores space for objects of whatever type the Iter iterator points to. It is constructed from a typical [first,last) range, and provides the begin(), end(), size() functions, as well as requested_size(). For non-trivial types, copies of *first will be used to initialize the storage.

`malloc` is used to obtain underlying storage.

Like get_temporary_buffer(), not all the requested memory may be available. Ideally, the created buffer will be large enough to hold a copy of [first,last), but if size() is less than requested_size(), then this didn't happen.

Definition at line 184 of file ext/memory.

4.949.2 Constructor & Destructor Documentation

4.949.2.1 template<class _ForwardIterator , class _Tp = typename std::iterator_traits<_ForwardIterator>::value_type> __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >::temporary_buffer (_ForwardIterator *__first*, _ForwardIterator *__last*) [inline]

Requests storage large enough to hold a copy of [first,last).

Definition at line 187 of file ext/memory.

4.949.2.2 template<class _ForwardIterator , class _Tp = typename std::iterator_traits<_ForwardIterator>::value_type> __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >::~temporary_buffer ( ) [inline]

Destroys objects and frees storage.

Definition at line 193 of file ext/memory.

4.949.3 Member Function Documentation

4.949.3.1 template<typename _ForwardIterator , typename _Tp > iterator std::_Temporary_buffer< _ForwardIterator, _Tp >::begin ( ) [inline], [inherited]

As per Table mumble.

Definition at line 165 of file stl_tempbuf.h.

4.949.3.2 template<typename _ForwardIterator , typename _Tp > iterator std::_Temporary_buffer< _ForwardIterator, _Tp >::end ( ) [inline], [inherited]

As per Table mumble.

Definition at line 170 of file stl_tempbuf.h.

4.949.3.3 template<typename _ForwardIterator , typename _Tp > size_type std::_Temporary_buffer< _ForwardIterator, _Tp >::requested_size ( ) const [inline], [inherited]

Returns the size requested by the constructor; may be >size().

Definition at line 160 of file stl_tempbuf.h.

4.949.3.4 template<typename _ForwardIterator , typename _Tp > size_type std::_Temporary_buffer< _ForwardIterator, _Tp >::size ( ) const [inline], [inherited]

As per Table mumble.

Definition at line 155 of file stl_tempbuf.h.

The documentation for this struct was generated from the following file:

- ext/memory

4.950 __gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef base_type::const_iterator **const_iterator**
- typedef __rebind_a::const_pointer **const_pointer**
- typedef __rebind_a::const_reference **const_reference**
- typedef _Alloc::difference_type **difference_type**
- typedef base_type::iterator **iterator**
- typedef base_type::point_const_iterator **point_const_iterator**
- typedef base_type::point_iterator **point_iterator**
- typedef __rebind_a::pointer **pointer**
- typedef __rebind_a::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef Value_Type **value_type**

Public Member Functions

- iterator **begin** ()
- const_iterator **begin** () const
- void **clear** ()
- bool **empty** () const
- iterator **end** ()
- const_iterator **end** () const

- void **erase** (point_iterator)
- template<typename Pred >
  size_type **erase_if** (Pred)
- template<typename Pred >
  thin_heap< Value_Type, Cmp_Fn,
  _Alloc >::size_type **erase_if** (Pred pred)
- Cmp_Fn & **get_cmp_fn** ()
- const Cmp_Fn & **get_cmp_fn** () const
- void **join** (thin_heap< Value_Type, Cmp_Fn, _Alloc > &)
- size_type **max_size** () const
- void **modify** (point_iterator, const_reference)
- void **pop** ()
- point_iterator **push** (const_reference)
- size_type **size** () const
- template<typename Pred >
  void **split** (Pred, thin_heap< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap** (left_child_next_sibling_heap< Value_Type, Cmp_Fn, _Alloc::size_type, _Alloc > &)
- const_reference **top** () const

Protected Types

- typedef base_type::node **node**
- typedef
  alloc_traits::allocator_type **node_allocator**
- typedef
  base_type::node_const_pointer **node_const_pointer**
- typedef _Alloc::size_type **node_metadata**
- typedef base_type::node_pointer **node_pointer**
- typedef std::pair
  < node_pointer, node_pointer > **node_pointer_pair**

Protected Member Functions

- **thin_heap** (const Cmp_Fn &)
- **thin_heap** (const thin_heap< Value_Type, Cmp_Fn, _Alloc > &)
- void **actual_erase_node** (node_pointer)
- void **bubble_to_top** (node_pointer)
- void **clear_imp** (node_pointer)
- template<typename It >
  void **copy_from_range** (It, It)
- node_pointer **get_new_node_for_insert** (const_reference)
- node_pointer **prune** (Pred)
- void **swap** (thin_heap< Value_Type, Cmp_Fn, _Alloc > &)
- void **swap_with_parent** (node_pointer, node_pointer)
- void **to_linked_list** ()
- void **value_swap** (left_child_next_sibling_heap &)

Static Protected Member Functions

- static node_pointer **parent** (node_pointer)

Protected Attributes

- node_pointer **m_p_root**
- size_type **m_size**

4.950.1 Detailed Description

template<typename Value_Type, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc >

Thin heap.

See Tarjan and Kaplan.

Definition at line 77 of file thin_heap_.hpp.

The documentation for this class was generated from the following file:

- thin_heap_.hpp

4.951 __gnu_pbds::thin_heap_tag Struct Reference

Inheritance diagram for __gnu_pbds::thin_heap_tag:

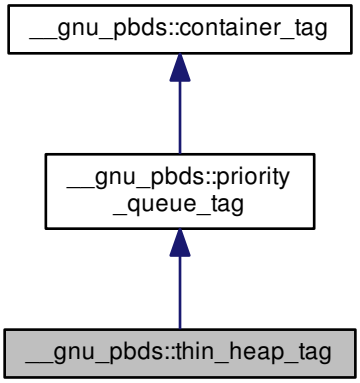

4.951.1 Detailed Description

Thin heap.

Definition at line 186 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.952 std::thread Class Reference

Classes

- class id

Public Types

- using **_State_ptr** = unique_ptr< _State >
- typedef __gthread_t **native_handle_type**

Public Member Functions

- template<typename _Callable , typename... _Args, typename = _Require<__not_same<_Callable>>>
  thread (_Callable &&__f, _Args &&...__args)
- **thread** (const thread &)=delete
- **thread** (thread &&__t) noexcept
- void **detach** ()
- id **get_id** () const noexcept
- void **join** ()
- bool **joinable** () const noexcept
- native_handle_type native_handle ()
- thread & **operator=** (const thread &)=delete
- thread & **operator=** (thread &&__t) noexcept
- void **swap** (thread &__t) noexcept

Static Public Member Functions

- template<typename _Callable , typename... _Args>
  static _Invoker
  < __decayed_tuple< _Callable,
  _Args...> > **__make_invoker** (_Callable &&__callable, _Args &&...__args)
- static unsigned int **hardware_concurrency** () noexcept

4.952.1 Detailed Description

thread

Definition at line 73 of file thread.

4.952.2 Member Function Documentation

4.952.2.1 native_handle_type std::thread::native_handle ( ) [inline]

Precondition

thread is joinable

Definition at line 196 of file thread.

The documentation for this class was generated from the following file:

- thread

4.953 __gnu_cxx::throw_allocator_base< _Tp, _Cond > Class Template Reference

Inheritance diagram for __gnu_cxx::throw_allocator_base< _Tp, _Cond >:

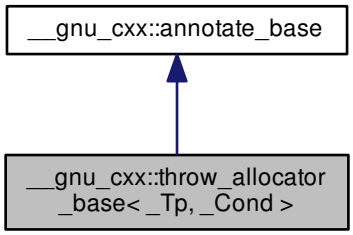

Public Types

- typedef const value_type * **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef value_type * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef value_type & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *hint=0)
- void **check** (size_t label)
- void **check** (size_type __n)
- map_alloc_type::iterator **check_allocated** (void *p, size_t size)
- void **check_allocated** (pointer __p, size_type __n)
- map_construct_type::iterator **check_constructed** (void *p)
- void **check_constructed** (size_t label)
- template<typename _Up , typename... _Args>
  void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- template<typename _Up >
  void **destroy** (_Up *__p)
- void **erase** (void *p, size_t size)
- void **erase_construct** (void *p)
- void **insert** (void *p, size_t size)
- void **insert_construct** (void *p)
- size_type **max_size** () const noexcept

Static Public Member Functions

- static void **check** ()
- static size_t **get_label** ()
- static void **set_label** (size_t l)

4.953.1 Detailed Description

template<typename _Tp, typename _Cond>class __gnu_cxx::throw_allocator_base< _Tp, _Cond >

Allocator class with logging and exception generation control. Intended to be used as an allocator_type in templatized code.

Note: Deallocate not allowed to throw.

Definition at line 795 of file throw_allocator.h.

The documentation for this class was generated from the following file:

- throw_allocator.h

4.954 __gnu_cxx::throw_allocator_limit< _Tp > Struct Template Reference

Inheritance diagram for __gnu_cxx::throw_allocator_limit< _Tp >:

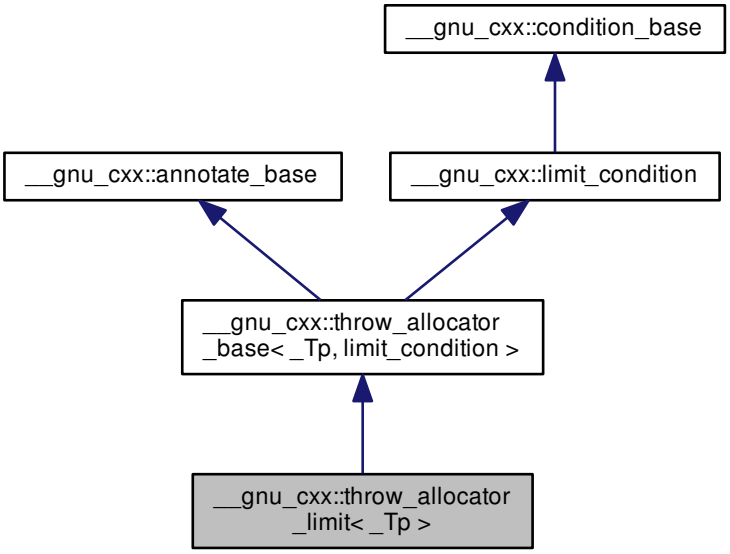

Public Types

- typedef const value_type * **const_pointer**

- typedef const value_type & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef value_type * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef value_type & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **throw_allocator_limit** (const throw_allocator_limit &) noexcept
- template<typename _Tp1 >
  throw_allocator_limit (const throw_allocator_limit< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *hint=0)
- void **check** (size_t label)
- void **check** (size_type __n)
- map_alloc_type::iterator **check_allocated** (void *p, size_t size)
- void **check_allocated** (pointer __p, size_type __n)
- map_construct_type::iterator **check_constructed** (void *p)
- void **check_constructed** (size_t label)
- void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- void **destroy** (_Up *__p)
- void **erase** (void *p, size_t size)
- void **erase_construct** (void *p)
- void **insert** (void *p, size_t size)
- void **insert_construct** (void *p)
- size_type **max_size** () const noexcept

Static Public Member Functions

- static void **check** ()
- static size_t & **count** ()
- static size_t **get_label** ()
- static size_t & **limit** ()
- static void **set_label** (size_t l)
- static void **set_limit** (const size_t __l)
- static void **throw_conditionally** ()

4.954.1 Detailed Description

template<typename _Tp>struct __gnu_cxx::throw_allocator_limit< _Tp >

Allocator throwing via limit condition.

Definition at line 908 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.955 __gnu_cxx::throw_allocator_random< _Tp > Struct Template Reference

Inheritance diagram for __gnu_cxx::throw_allocator_random< _Tp >:

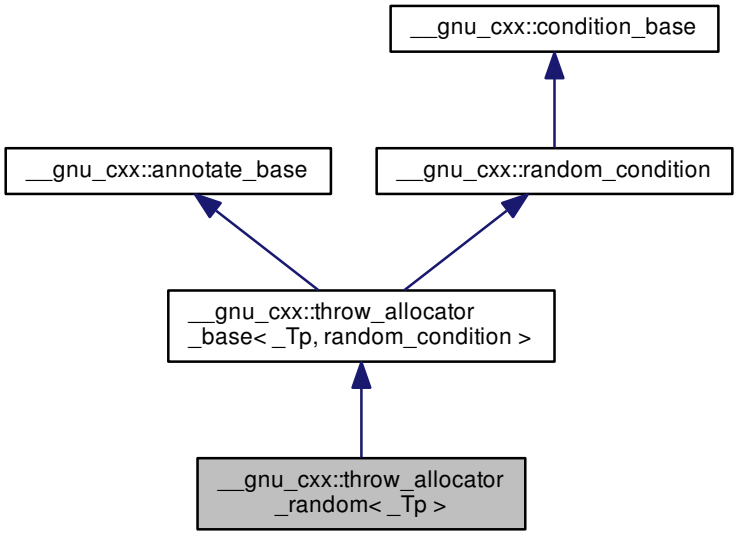

Public Types

- typedef const value_type * **const_pointer**
- typedef const value_type & **const_reference**
- typedef std::ptrdiff_t **difference_type**
- typedef value_type * **pointer**
- typedef std::true_type **propagate_on_container_move_assignment**
- typedef value_type & **reference**
- typedef std::size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **throw_allocator_random** (const throw_allocator_random &) noexcept
- template<typename _Tp1 >
  throw_allocator_random (const throw_allocator_random< _Tp1 > &) noexcept
- pointer **address** (reference __x) const noexcept
- const_pointer **address** (const_reference __x) const noexcept
- pointer **allocate** (size_type __n, const void *hint=0)
- void **check** (size_t label)
- void **check** (size_type __n)
- map_alloc_type::iterator **check_allocated** (void *p, size_t size)
- void **check_allocated** (pointer __p, size_type __n)

- map_construct_type::iterator **check_constructed** (void *p)
- void **check_constructed** (size_t label)
- void **construct** (_Up *__p, _Args &&...__args)
- void **deallocate** (pointer __p, size_type __n)
- void **destroy** (_Up *__p)
- void **erase** (void *p, size_t size)
- void **erase_construct** (void *p)
- void **insert** (void *p, size_t size)
- void **insert_construct** (void *p)
- size_type **max_size** () const noexcept
- void **seed** (unsigned long __s)

Static Public Member Functions

- static void **check** ()
- static size_t **get_label** ()
- static void **set_label** (size_t l)
- static void **set_probability** (double __p)
- static void **throw_conditionally** ()

4.955.1 Detailed Description

template<typename _Tp>struct __gnu_cxx::throw_allocator_random< _Tp >

Allocator throwing via random condition.

Definition at line 930 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.956 __gnu_cxx::throw_value_base< _Cond > Struct Template Reference

Inherits _Cond.

Public Types

- typedef _Cond **condition_type**

Public Member Functions

- **throw_value_base** (const throw_value_base &__v)
- **throw_value_base** (throw_value_base &&)=default
- **throw_value_base** (const std::size_t __i)
- throw_value_base & **operator++** ()
- throw_value_base & **operator=** (const throw_value_base &__v)
- throw_value_base & **operator=** (throw_value_base &&)=default

Public Attributes

- std::size_t **_M_i**

4.956.1 Detailed Description

template<typename _Cond>struct __gnu_cxx::throw_value_base< _Cond >

Class with exception generation control. Intended to be used as a value_type in templatized code.

Note: Destructor not allowed to throw.

Definition at line 607 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.957 __gnu_cxx::throw_value_limit Struct Reference

Inheritance diagram for __gnu_cxx::throw_value_limit:

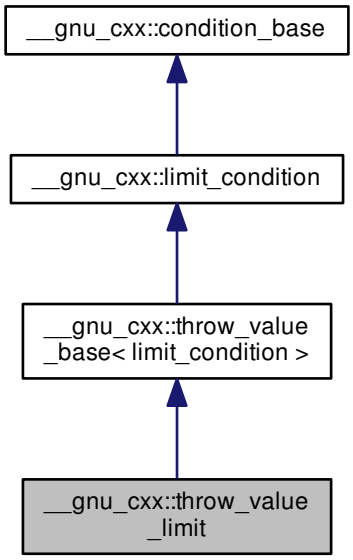

Public Types

- typedef throw_value_base < limit_condition > **base_type**
- typedef limit_condition **condition_type**

Public Member Functions

- **throw_value_limit** (const throw_value_limit &__other)
- **throw_value_limit** (throw_value_limit &&)=default
- **throw_value_limit** (const std::size_t __i)
- throw_value_base & **operator++** ()
- throw_value_limit & **operator=** (const throw_value_limit &__other)
- throw_value_limit & **operator=** (throw_value_limit &&)=default

Static Public Member Functions

- static size_t & **count** ()
- static size_t & **limit** ()
- static void **set_limit** (const size_t __l)
- static void **throw_conditionally** ()

Public Attributes

- std::size_t **_M_i**

4.957.1 Detailed Description

Type throwing via limit condition.

Definition at line 724 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.958 __gnu_cxx::throw_value_random Struct Reference

Inheritance diagram for __gnu_cxx::throw_value_random:

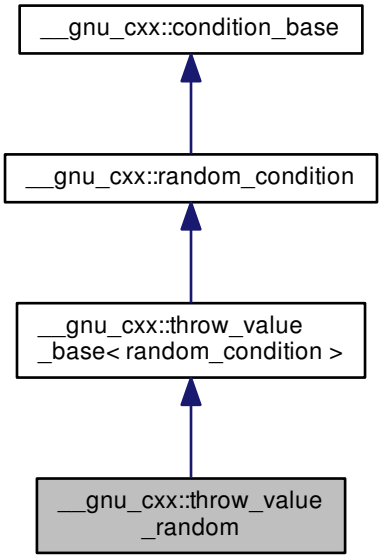

Public Types

- typedef throw_value_base < random_condition > **base_type**
- typedef random_condition **condition_type**

Public Member Functions

- **throw_value_random** (const throw_value_random &__other)
- **throw_value_random** (throw_value_random &&)=default
- **throw_value_random** (const std::size_t __i)
- throw_value_base & **operator++** ()
- throw_value_random & **operator=** (const throw_value_random &__other)
- throw_value_random & **operator=** (throw_value_random &&)=default
- void **seed** (unsigned long __s)

Static Public Member Functions

- static void **set_probability** (double __p)
- static void **throw_conditionally** ()

Public Attributes

- std::size_t **_M_i**

4.958.1 Detailed Description

Type throwing via random condition.

Definition at line 756 of file throw_allocator.h.

The documentation for this struct was generated from the following file:

- throw_allocator.h

4.959 std::time_base Class Reference

Inheritance diagram for std::time_base:

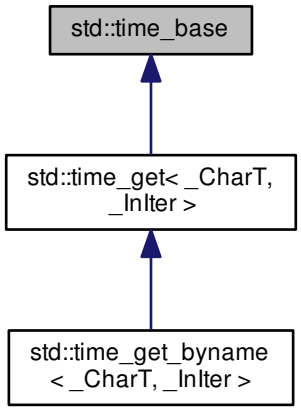

Public Types

- enum **dateorder** {
  no_order, **dmy**, **mdy**, **ymd**,
  ydm }

4.959.1 Detailed Description

Time format ordering data.

This class provides an enum representing different orderings of time: day, month, and year.

Definition at line 52 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.960 std::time_get< _CharT, _InIter > Class Template Reference

Inheritance diagram for std::time_get< _CharT, _InIter >:

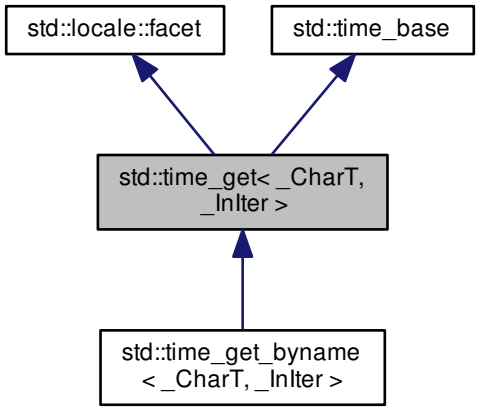

Public Types

- enum **dateorder** { **no_order**, **dmy**, **mdy**, **ymd**, **ydm** }

- typedef _CharT char_type
- typedef _InIter iter_type

Public Member Functions

- time_get (size_t __refs=0)
- dateorder date_order () const
- iter_type get (iter_type __s, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, char __format, char __modifier=0) const
- iter_type get (iter_type __s, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, const char_type *__fmt, const char_type *__fmtend) const
- iter_type get_date (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_monthname (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_time (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_weekday (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_year (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~time_get ()
- iter_type **_M_extract_name** (iter_type __beg, iter_type __end, int &__member, const _CharT **__names, size_t __indexlen, ios_base &__io, ios_base::iostate &__err) const
- iter_type **_M_extract_num** (iter_type __beg, iter_type __end, int &__member, int __min, int __max, size_t __len, ios_base &__io, ios_base::iostate &__err) const
- iter_type **_M_extract_via_format** (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, const _CharT *__format) const
- iter_type **_M_extract_wday_or_month** (iter_type __beg, iter_type __end, int &__member, const _CharT **__names, size_t __indexlen, ios_base &__io, ios_base::iostate &__err) const
- virtual dateorder do_date_order () const
- iter_type do_get (iter_type __s, iter_type __end, ios_base &__f, ios_base::iostate &__err, tm *__tm, char __format, char __modifier) const
- virtual iter_type do_get_date (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_monthname (iter_type __beg, iter_type __end, ios_base &, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_time (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_weekday (iter_type __beg, iter_type __end, ios_base &, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_year (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.960.1 Detailed Description

template<typename _CharT, typename _InIter>class std::time_get< _CharT, _InIter >

Primary class template time_get.

This facet encapsulates the code to parse and return a date or time from a string. It is used by the istream numeric extraction operators.

The time_get template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the time_get facet.

Definition at line 368 of file locale_facets_nonio.h.

4.960.2 Member Typedef Documentation

4.960.2.1 template<typename _CharT , typename _InIter > typedef _CharT std::time_get< _CharT, _InIter >::char_type

Public typedefs.

Definition at line 374 of file locale_facets_nonio.h.

4.960.2.2 template<typename _CharT , typename _InIter > typedef _InIter std::time_get< _CharT, _InIter >::iter_type

Public typedefs.

Definition at line 375 of file locale_facets_nonio.h.

4.960.3 Constructor & Destructor Documentation

4.960.3.1 template<typename _CharT , typename _InIter > std::time_get< _CharT, _InIter >::time_get (size_t __refs = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 389 of file locale_facets_nonio.h.

4.960.3.2 template<typename _CharT , typename _InIter > virtual std::time_get< _CharT, _InIter >::~time_get ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 593 of file locale_facets_nonio.h.

4.960.4 Member Function Documentation

4.960.4.1 template<typename _CharT , typename _InIter > dateorder std::time_get< _CharT, _InIter >::date_order ( ) const [inline]

Return preferred order of month, day, and year.

This function returns an enum from time_base::dateorder giving the preferred ordering if the format *x* given to time_put::put() only uses month, day, and year. If the format *x* for the associated locale uses other fields, this function returns time_base::dateorder::noorder.

NOTE: The library always returns noorder at the moment.

Returns

A member of time_base::dateorder.

Definition at line 406 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_date_order().

4.960.4.2 template<typename _CharT , typename _InIter > _GLIBCXX_END_NAMESPACE_LDBL_OR_CXX11 time_base::dateorder std::time_get< _CharT, _InIter >::do_date_order ( ) const [protected], [virtual]

Return preferred order of month, day, and year.

This function returns an enum from time_base::dateorder giving the preferred ordering if the format *x* given to time_put-::put() only uses month, day, and year. This function is a hook for derived classes to change the value returned.

Returns

A member of time_base::dateorder.

Definition at line 627 of file locale_facets_nonio.tcc.

Referenced by std::time_get< _CharT, _InIter >::date_order().

4.960.4.3 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get (iter_type *__s,* iter_type *__end,* ios_base & *__f,* ios_base::iostate & *__err,* tm * *__tm,* char *__format,* char *__modifier*) const [inline], [protected]

Parse input string according to format.

This function parses the string according to the provided format and optional modifier. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__f	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__format	Format specifier.
__modifier	Format modifier.

Returns

Iterator to first char not parsed.

Definition at line 1241 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::goodbit, and std::__ctype_abstract_base< _CharT >::widen().

Referenced by std::time_get< _CharT, _InIter >::get().

4.960.4.4 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_date (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual]

Parse input date string.

This function parses a date according to the format *X* and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_date() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond date string.

Definition at line 1077 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::ios_base::eofbit.

Referenced by std::time_get< _CharT, _InIter >::get_date().

4.960.4.5 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_monthname (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual]

Parse input month string.

This function parses a month name and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_monthname() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond month name.

Definition at line 1120 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_monthname().

4.960.4.6 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_time (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual]

Parse input time string.

This function parses a time according to the format *x* and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_time() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond time string.

Definition at line 1060 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::ios_base::eofbit.

Referenced by std::time_get< _CharT, _InIter >::get_time().

4.960.4.7 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_weekday (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual]

Parse input weekday string.

This function parses a weekday name and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_weekday() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond weekday name.

Definition at line 1094 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_weekday().

4.960.4.8 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_year (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual]

Parse input year string.

This function reads up to 4 characters to parse a year string and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_year() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond year.

Definition at line 1146 of file locale_facets_nonio.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_year().

4.960.4.9 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get (iter_type *__s*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, tm * *__tm*, char *__format*, char *__modifier* = 0) const [inline]

Parse input string according to format.

This function calls time_get::do_get with the provided parameters.

See Also

do_get() and get().

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__format	Format specifier.
__modifier	Format modifier.

Returns

Iterator to first char not parsed.

Definition at line 559 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get().

4.960.4.10 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::get (iter_type *__s*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, tm * *__tm*, const char_type * *__fmt*, const char_type * *__fmtend*) const [inline]

Parse input string according to format.

This function parses the input string according to a provided format string. It does the inverse of time_put::put. The format string follows the format specified for strftime(3)/strptime(3). The actual parsing is done by time_get::do_get.

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__fmt	Start of the format string.
__fmtend	End of the format string.

Returns

Iterator to first char not parsed.

Definition at line 1169 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::__ctype_abstract_base< _CharT >::is(), std::__ctype_abstract_base< _CharT >::narrow(), std::__ctype_abstract_base< _CharT >::tolower(), and std::__ctype_abstract_base< _CharT >::toupper().

4.960.4.11 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_date (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline]

Parse input date string.

This function parses a date according to the format *x* and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_date().

If there is a valid date string according to format *x*, *tm* will be filled in accordingly and the returned iterator will point to the first character beyond the date string. If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond date string.

Definition at line 455 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_date().

4.960.4.12 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_monthname (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline]

Parse input month string.

This function parses a month name and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_monthname().

Parsing starts by parsing an abbreviated month name. If a valid abbreviation is followed by a character that would lead to the full month name, parsing continues until the full name is found or an error occurs. Otherwise parsing finishes at the end of the abbreviated name.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond month name.

Definition at line 512 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_monthname().

4.960.4.13 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_time (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline]

Parse input time string.

This function parses a time according to the format *X* and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_time().

If there is a valid time string according to format *X*, *tm* will be filled in accordingly and the returned iterator will point to the first character beyond the time string. If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond time string.

Definition at line 430 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_time().

4.960.4.14 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_weekday (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline]

Parse input weekday string.

This function parses a weekday name and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_weekday().

Parsing starts by parsing an abbreviated weekday name. If a valid abbreviation is followed by a character that would lead to the full weekday name, parsing continues until the full name is found or an error occurs. Otherwise parsing finishes at the end of the abbreviated name.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond weekday name.

Definition at line 483 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_weekday().

4.960.4.15 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_year (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline]

Parse input year string.

This function reads up to 4 characters to parse a year string and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_year().

4 consecutive digits are interpreted as a full year. If there are exactly 2 consecutive digits, the library interprets this as the number of years since 1900.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond year.

Definition at line 538 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_year().

4.960.5 Member Data Documentation

4.960.5.1 template<typename _CharT , typename _InIter > locale::id std::time_get< _CharT, _InIter >::id [static]

Numpunct facet id.

Definition at line 379 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h
- locale_facets_nonio.tcc

4.961 std::time_get_byname< _CharT, _InIter > Class Template Reference

Inheritance diagram for std::time_get_byname< _CharT, _InIter >:

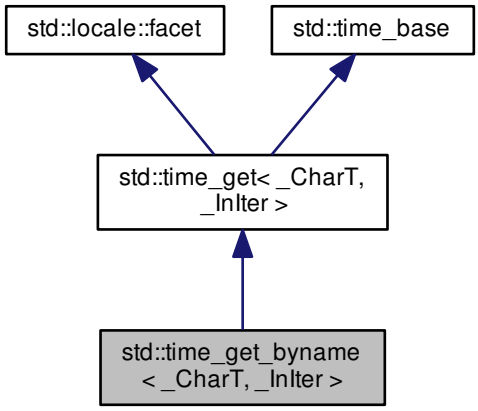

Public Types

- typedef _CharT **char_type**
- enum **dateorder** { **no_order**, **dmy**, **mdy**, **ymd**, **ydm** }
- typedef _InIter **iter_type**

Public Member Functions

- **time_get_byname** (const char *, size_t __refs=0)
- **time_get_byname** (const string &__s, size_t __refs=0)
- dateorder date_order () const
- iter_type get (iter_type __s, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, char __format, char __modifier=0) const
- iter_type get (iter_type __s, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, const char_type *__fmt, const char_type *__fmtend) const
- iter_type get_date (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_monthname (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_time (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_weekday (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- iter_type get_year (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- iter_type **_M_extract_name** (iter_type __beg, iter_type __end, int &__member, const _CharT **__names, size_t __indexlen, ios_base &__io, ios_base::iostate &__err) const
- iter_type **_M_extract_num** (iter_type __beg, iter_type __end, int &__member, int __min, int __max, size_t __len, ios_base &__io, ios_base::iostate &__err) const
- iter_type **_M_extract_via_format** (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm, const _CharT *__format) const
- iter_type **_M_extract_wday_or_month** (iter_type __beg, iter_type __end, int &__member, const _CharT **__names, size_t __indexlen, ios_base &__io, ios_base::iostate &__err) const
- virtual dateorder do_date_order () const
- iter_type do_get (iter_type __s, iter_type __end, ios_base &__f, ios_base::iostate &__err, tm *__tm, char __format, char __modifier) const
- virtual iter_type do_get_date (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_monthname (iter_type __beg, iter_type __end, ios_base &, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_time (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_weekday (iter_type __beg, iter_type __end, ios_base &, ios_base::iostate &__err, tm *__tm) const
- virtual iter_type do_get_year (iter_type __beg, iter_type __end, ios_base &__io, ios_base::iostate &__err, tm *__tm) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.961.1 Detailed Description

template<typename _CharT, typename _InIter>class std::time_get_byname< _CharT, _InIter >

class time_get_byname [22.2.5.2].

Definition at line 760 of file locale_facets_nonio.h.

4.961.2 Member Function Documentation

4.961.2.1 template<typename _CharT , typename _InIter > dateorder std::time_get< _CharT, _InIter >::date_order ( ) const [inline], [inherited]

Return preferred order of month, day, and year.

This function returns an enum from time_base::dateorder giving the preferred ordering if the format *x* given to time_put-::put() only uses month, day, and year. If the format *x* for the associated locale uses other fields, this function returns time_base::dateorder::noorder.

NOTE: The library always returns noorder at the moment.

Returns

A member of time_base::dateorder.

Definition at line 406 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_date_order().

4.961.2.2 template<typename _CharT , typename _InIter > _GLIBCXX_END_NAMESPACE_LDBL_OR_CXX11 time_base::dateorder std::time_get< _CharT, _InIter >::do_date_order ( ) const [protected], [virtual], [inherited]

Return preferred order of month, day, and year.

This function returns an enum from time_base::dateorder giving the preferred ordering if the format *x* given to time_put-::put() only uses month, day, and year. This function is a hook for derived classes to change the value returned.

Returns

A member of time_base::dateorder.

Definition at line 627 of file locale_facets_nonio.tcc.

Referenced by std::time_get< _CharT, _InIter >::date_order().

4.961.2.3 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get (iter_type *__s,* iter_type *__end,* ios_base & *__f,* ios_base::iostate & *__err,* tm * *__tm,* char *__format,* char *__modifier*) const [inline], [protected], [inherited]

Parse input string according to format.

This function parses the string according to the provided format and optional modifier. This function is a hook for derived classes to change the value returned.

See Also

get() for more details.

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__f	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__format	Format specifier.
__modifier	Format modifier.

Returns

Iterator to first char not parsed.

Definition at line 1241 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::goodbit, and std::__ctype_abstract_base< _CharT >::widen().

Referenced by std::time_get< _CharT, _InIter >::get().

4.961.2.4 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_date (iter_type __beg, iter_type __end, ios_base & __io, ios_base::iostate & __err, tm * __tm) const [protected], [virtual], [inherited]

Parse input date string.

This function parses a date according to the format *X* and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_date() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond date string.

Definition at line 1077 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::ios_base::eofbit.

Referenced by std::time_get< _CharT, _InIter >::get_date().

4.961.2.5 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_monthname (iter_type __beg, iter_type __end, ios_base & __io, ios_base::iostate & __err, tm * __tm) const [protected], [virtual], [inherited]

Parse input month string.

This function parses a month name and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_monthname() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.

__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond month name.

Definition at line 1120 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_monthname().

4.961.2.6 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_time (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual], [inherited]

Parse input time string.

This function parses a time according to the format *x* and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_time() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond time string.

Definition at line 1060 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::ios_base::eofbit.

Referenced by std::time_get< _CharT, _InIter >::get_time().

4.961.2.7 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_weekday (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual], [inherited]

Parse input weekday string.

This function parses a weekday name and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_weekday() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond weekday name.

Definition at line 1094 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_weekday().

4.961.2.8 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::do_get_year (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [protected], [virtual], [inherited]

Parse input year string.

This function reads up to 4 characters to parse a year string and puts the results into a user-supplied struct tm. This function is a hook for derived classes to change the value returned.

See Also

get_year() for details.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond year.

Definition at line 1146 of file locale_facets_nonio.tcc.

References std::ios_base::eofbit, std::ios_base::failbit, and std::ios_base::goodbit.

Referenced by std::time_get< _CharT, _InIter >::get_year().

4.961.2.9 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get (iter_type *__s,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm,* char *__format,* char *__modifier* = 0) const [inline], [inherited]

Parse input string according to format.

This function calls time_get::do_get with the provided parameters.

See Also

do_get() and get().

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__format	Format specifier.
__modifier	Format modifier.

Returns

Iterator to first char not parsed.

Definition at line 559 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get().

4.961.2.10 template<typename _CharT , typename _InIter > _InIter std::time_get< _CharT, _InIter >::get (iter_type *__s*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, tm * *__tm*, const char_type * *__fmt*, const char_type * *__fmtend*) const [inline], [inherited]

Parse input string according to format.

This function parses the input string according to a provided format string. It does the inverse of time_put::put. The format string follows the format specified for strftime(3)/strptime(3). The actual parsing is done by time_get::do_get.

Parameters

__s	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.
__fmt	Start of the format string.
__fmtend	End of the format string.

Returns

Iterator to first char not parsed.

Definition at line 1169 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), std::ios_base::eofbit, std::ios_base::failbit, std::ios_base::goodbit, std::__ctype_abstract_base< _CharT >::is(), std::__ctype_abstract_base< _CharT >::narrow(), std::__ctype_abstract_base< _CharT >::tolower(), and std::__ctype_abstract_base< _CharT >::toupper().

4.961.2.11 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_date (iter_type *__beg*, iter_type *__end*, ios_base & *__io*, ios_base::iostate & *__err*, tm * *__tm*) const [inline], [inherited]

Parse input date string.

This function parses a date according to the format *x* and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_date().

If there is a valid date string according to format *x*, *tm* will be filled in accordingly and the returned iterator will point to the first character beyond the date string. If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond date string.

Definition at line 455 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_date().

4.961.2.12 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_monthname (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline],[inherited]

Parse input month string.

This function parses a month name and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_monthname().

Parsing starts by parsing an abbreviated month name. If a valid abbreviation is followed by a character that would lead to the full month name, parsing continues until the full name is found or an error occurs. Otherwise parsing finishes at the end of the abbreviated name.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond month name.

Definition at line 512 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_monthname().

4.961.2.13 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_time (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline], [inherited]

Parse input time string.

This function parses a time according to the format *X* and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_time().

If there is a valid time string according to format *X*, *tm* will be filled in accordingly and the returned iterator will point to the first character beyond the time string. If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond time string.

Definition at line 430 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_time().

4.961.2.14 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_weekday (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline], [inherited]

Parse input weekday string.

This function parses a weekday name and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_weekday().

Parsing starts by parsing an abbreviated weekday name. If a valid abbreviation is followed by a character that would lead to the full weekday name, parsing continues until the full name is found or an error occurs. Otherwise parsing finishes at the end of the abbreviated name.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond weekday name.

Definition at line 483 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_weekday().

4.961.2.15 template<typename _CharT , typename _InIter > iter_type std::time_get< _CharT, _InIter >::get_year (iter_type *__beg,* iter_type *__end,* ios_base & *__io,* ios_base::iostate & *__err,* tm * *__tm*) const [inline], [inherited]

Parse input year string.

This function reads up to 4 characters to parse a year string and puts the results into a user-supplied struct tm. The result is returned by calling time_get::do_get_year().

4 consecutive digits are interpreted as a full year. If there are exactly 2 consecutive digits, the library interprets this as the number of years since 1900.

If an error occurs before the end, err |= ios_base::failbit. If parsing reads all the characters, err |= ios_base::eofbit.

Parameters

__beg	Start of string to parse.
__end	End of string to parse.
__io	Source of the locale.
__err	Error flags to set.
__tm	Pointer to struct tm to fill in.

Returns

Iterator to first char beyond year.

Definition at line 538 of file locale_facets_nonio.h.

References std::time_get< _CharT, _InIter >::do_get_year().

4.961.3 Member Data Documentation

4.961.3.1 template<typename _CharT , typename _InIter > locale::id std::time_get< _CharT, _InIter >::id [static], [inherited]

Numpunct facet id.

Definition at line 379 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.962 std::chrono::time_point< _Clock, _Dur > Struct Template Reference

Public Types

- typedef _Clock **clock**
- typedef _Dur **duration**
- typedef duration::period **period**
- typedef duration::rep **rep**

Public Member Functions

- constexpr **time_point** (const duration &__dur)
- template<typename _Dur2 , typename = _Require<is_convertible<_Dur2, _Dur>>>
  constexpr **time_point** (const time_point< clock, _Dur2 > &__t)
- constexpr time_point & **operator+=** (const duration &__dur)
- constexpr time_point & **operator-=** (const duration &__dur)
- constexpr duration **time_since_epoch** () const

Static Public Member Functions

- static constexpr time_point **max** () noexcept
- static constexpr time_point **min** () noexcept

Related Functions

(Note that these are not member functions.)

- template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 >
  constexpr time_point< _Clock,
  typename common_type< _Dur1,
  duration< _Rep2, _Period2 >
  >::type > operator+ (const time_point< _Clock, _Dur1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)

- template<typename _Rep1 , typename _Period1 , typename _Clock , typename _Dur2 >
  constexpr time_point< _Clock,
  typename common_type< duration
  < _Rep1, _Period1 >, _Dur2 >
  ::type > operator+ (const duration< _Rep1, _Period1 > &__lhs, const time_point< _Clock, _Dur2 > &__rhs)

- template<typename _Clock , typename _Dur1 , typename _Rep2 , typename _Period2 >
  constexpr time_point< _Clock,
  typename common_type< _Dur1,
  duration< _Rep2, _Period2 >
  >::type > operator- (const time_point< _Clock, _Dur1 > &__lhs, const duration< _Rep2, _Period2 > &__rhs)

- template<typename _Clock , typename _Dur1 , typename _Dur2 >
  constexpr common_type< _Dur1,
  _Dur2 >::type operator- (const time_point< _Clock, _Dur1 > &__lhs, const time_point< _Clock, _Dur2 > &__-
  rhs)

4.962.1 Detailed Description

template<typename _Clock, typename _Dur = typename _Clock::duration>struct std::chrono::time_point< _Clock, _Dur >

time_point

Definition at line 74 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.963 std::time_put< _CharT, _OutIter > Class Template Reference

Inheritance diagram for std::time_put< _CharT, _OutIter >:

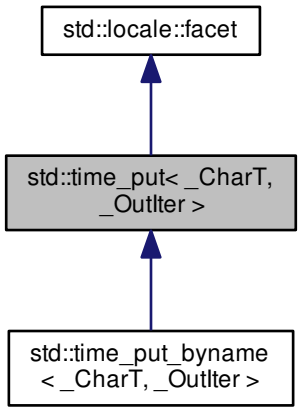

Public Types

- typedef _CharT char_type
- typedef _OutIter iter_type

Public Member Functions

- time_put (size_t __refs=0)
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, const _CharT *__beg, const _CharT *__end) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, char __format, char __mod=0) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual ~time_put ()
- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, char __format, char __mod) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.963.1 Detailed Description

template<typename _CharT, typename _OutIter>class std::time_put< _CharT, _OutIter >

Primary class template time_put.

This facet encapsulates the code to format and output dates and times according to formats used by strftime().

The time_put template uses protected virtual functions to provide the actual results. The public accessors forward the call to the virtual functions. These virtual functions are hooks for developers to implement the behavior they require from the time_put facet.

Definition at line 797 of file locale_facets_nonio.h.

4.963.2 Member Typedef Documentation

4.963.2.1 template<typename _CharT , typename _OutIter > typedef _CharT std::time_put< _CharT, _OutIter >::char_type

Public typedefs.

Definition at line 803 of file locale_facets_nonio.h.

4.963.2.2 template<typename _CharT , typename _OutIter > typedef _OutIter std::time_put< _CharT, _OutIter >::iter_type

Public typedefs.

Definition at line 804 of file locale_facets_nonio.h.

4.963.3 Constructor & Destructor Documentation

4.963.3.1 template<typename _CharT , typename _OutIter > std::time_put< _CharT, _OutIter >::time_put (size_t __refs = 0) [inline], [explicit]

Constructor performs initialization.

This is the constructor provided by the standard.

Parameters

__refs	Passed to the base facet class.

Definition at line 818 of file locale_facets_nonio.h.

4.963.3.2 template<typename _CharT , typename _OutIter > virtual std::time_put< _CharT, _OutIter >::~time_put ( ) [inline], [protected], [virtual]

Destructor.

Definition at line 864 of file locale_facets_nonio.h.

4.963.4 Member Function Documentation

4.963.4.1 template<typename _CharT , typename _OutIter > _OutIter std::time_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, char __format, char __mod) const [protected], [virtual]

Format and output a time or date.

This function formats the data in struct tm according to the provided format char and optional modifier. This function is a hook for derived classes to change the value returned.

See Also

put() for more details.

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__format	Format char.
__mod	Optional modifier char.

Returns

Iterator after writing.

Definition at line 1309 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::__ctype_abstract_base< _CharT >::widen().

Referenced by std::time_put< _CharT, _OutIter >::put().

4.963.4.2 template<typename _CharT , typename _OutIter > _OutIter std::time_put< _CharT, _OutIter >::put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, const _CharT * __beg, const _CharT * __end) const

Format and output a time or date.

This function formats the data in struct tm according to the provided format string. The format string is interpreted as by strftime().

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__beg	Start of format string.
__end	End of format string.

Returns

Iterator after writing.

Definition at line 1274 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::__ctype_abstract_base< _CharT >::narrow().

4.963.4.3 template<typename _CharT , typename _OutIter > iter_type std::time_put< _CharT, _OutIter >::put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, char __format, char __mod = 0) const [inline]

Format and output a time or date.

This function formats the data in struct tm according to the provided format char and optional modifier. The format and modifier are interpreted as by strftime(). It does so by returning time_put::do_put().

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__format	Format char.
__mod	Optional modifier char.

Returns

Iterator after writing.

Definition at line 857 of file locale_facets_nonio.h.

References std::time_put< _CharT, _OutIter >::do_put().

4.963.5 Member Data Documentation

4.963.5.1 template<typename _CharT , typename _OutIter > locale::id std::time_put< _CharT, _OutIter >::id [static]

Numpunct facet id.

Definition at line 808 of file locale_facets_nonio.h.

The documentation for this class was generated from the following files:

- locale_facets_nonio.h
- locale_facets_nonio.tcc

4.964 std::time_put_byname< _CharT, _OutIter > Class Template Reference

Inheritance diagram for std::time_put_byname< _CharT, _OutIter >:

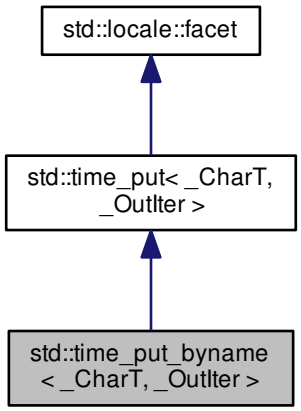

Public Types

- typedef _CharT **char_type**
- typedef _OutIter **iter_type**

Public Member Functions

- **time_put_byname** (const char *, size_t __refs=0)
- **time_put_byname** (const string &__s, size_t __refs=0)
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, const _CharT *__beg, const _CharT *__end) const
- iter_type put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, char __format, char __mod=0) const

Static Public Attributes

- static locale::id id

Protected Member Functions

- virtual iter_type do_put (iter_type __s, ios_base &__io, char_type __fill, const tm *__tm, char __format, char __mod) const

Static Protected Member Functions

- static __c_locale **_S_clone_c_locale** (__c_locale &__cloc) throw ()
- static void **_S_create_c_locale** (__c_locale &__cloc, const char *__s, __c_locale __old=0)
- static void **_S_destroy_c_locale** (__c_locale &__cloc)
- static __c_locale **_S_get_c_locale** ()
- static const char * **_S_get_c_name** () throw ()
- static __c_locale **_S_lc_ctype_c_locale** (__c_locale __cloc, const char *__s)

4.964.1 Detailed Description

template<typename _CharT, typename _OutIter>class std::time_put_byname< _CharT, _OutIter >

class time_put_byname [22.2.5.4].

Definition at line 893 of file locale_facets_nonio.h.

4.964.2 Member Function Documentation

4.964.2.1 template<typename _CharT , typename _OutIter > _OutIter std::time_put< _CharT, _OutIter >::do_put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, char __format, char __mod) const [protected], [virtual], [inherited]

Format and output a time or date.

This function formats the data in struct tm according to the provided format char and optional modifier. This function is a hook for derived classes to change the value returned.

See Also

put() for more details.

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__format	Format char.
__mod	Optional modifier char.

Returns

Iterator after writing.

Definition at line 1309 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::__ctype_abstract_base< _CharT >::widen().

Referenced by std::time_put< _CharT, _OutIter >::put().

4.964.2.2 template<typename _CharT , typename _OutIter > _OutIter std::time_put< _CharT, _OutIter >::put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, const _CharT * __beg, const _CharT * __end) const [inherited]

Format and output a time or date.

This function formats the data in struct tm according to the provided format string. The format string is interpreted as by strftime().

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__beg	Start of format string.
__end	End of format string.

Returns

Iterator after writing.

Definition at line 1274 of file locale_facets_nonio.tcc.

References std::ios_base::_M_getloc(), and std::__ctype_abstract_base< _CharT >::narrow().

4.964.2.3 template<typename _CharT , typename _OutIter > iter_type std::time_put< _CharT, _OutIter >::put (iter_type __s, ios_base & __io, char_type __fill, const tm * __tm, char __format, char __mod = 0) const [inline], [inherited]

Format and output a time or date.

This function formats the data in struct tm according to the provided format char and optional modifier. The format and modifier are interpreted as by strftime(). It does so by returning time_put::do_put().

Parameters

__s	The stream to write to.
__io	Source of locale.
__fill	char_type to use for padding.
__tm	Struct tm with date and time info to format.
__format	Format char.
__mod	Optional modifier char.

Returns

Iterator after writing.

Definition at line 857 of file locale_facets_nonio.h.

References std::time_put< _CharT, _OutIter >::do_put().

4.964.3 Member Data Documentation

4.964.3.1 template<typename _CharT , typename _OutIter > locale::id std::time_put< _CharT, _OutIter >::id [static], [inherited]

Numpunct facet id.

Definition at line 808 of file locale_facets_nonio.h.

The documentation for this class was generated from the following file:

- locale_facets_nonio.h

4.965 std::timed_mutex Class Reference

Public Member Functions

- **timed_mutex** (const timed_mutex &)=delete
- void **lock** ()
- timed_mutex & **operator=** (const timed_mutex &)=delete
- bool **try_lock** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_for** (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  bool **try_lock_until** (const chrono::time_point< _Clock, _Duration > &__atime)
- void **unlock** ()

4.965.1 Detailed Description

timed_mutex

Definition at line 343 of file mutex.

The documentation for this class was generated from the following file:

- mutex

4.966 std::to_chars_result Struct Reference

Public Attributes

- errc **ec**
- char * **ptr**

4.966.1 Detailed Description

Result type of std::to_chars.

Definition at line 55 of file charconv.

The documentation for this struct was generated from the following file:

- charconv

4.967 std::chrono::treat_as_floating_point< _Rep > Struct Template Reference

Inheritance diagram for std::chrono::treat_as_floating_point< _Rep >:



4.967.1 Detailed Description

template<typename _Rep>struct std::chrono::treat_as_floating_point< _Rep >

treat_as_floating_point

Definition at line 238 of file chrono.

The documentation for this struct was generated from the following file:

- chrono

4.968 __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >:

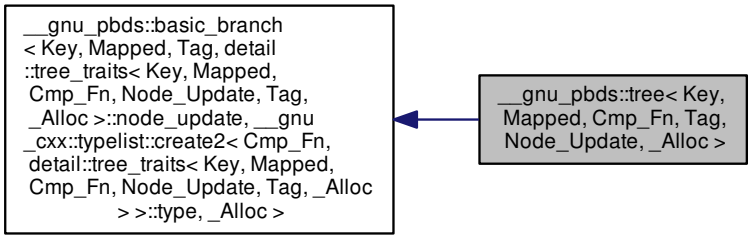

Public Types

- typedef Cmp_Fn cmp_fn
- typedef detail::tree_traits < Key, Mapped, Cmp_Fn, Node_Update, Tag, _Alloc > ::node_update **node_update**

Public Member Functions

- tree (const cmp_fn &c)
- template<typename It > tree (It first, It last)
- template<typename It > tree (It first, It last, const cmp_fn &c)
- **tree** (const tree &other)
- tree & **operator=** (const tree &other)
- void **swap** (tree &other)

4.968.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn = std::less<Key>, typename Tag = rb_tree_tag, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>>class __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >

A tree-based container.

Template Parameters

Key	Key type.
Mapped	Map type.
Cmp_Fn	Comparison functor.
Tag	Instantiating data structure type, see container_tag.
Node_Update	Updates tree internal-nodes, restores invariants when invalidated. XXX See design::tree-based-containersnode invariants.
_Alloc	Allocator type.

Base tag choices are: ov_tree_tag, rb_tree_tag, splay_tree_tag.

Base is basic_branch.

Definition at line 635 of file assoc_container.hpp.

4.968.2 Member Typedef Documentation

4.968.2.1 template<typename Key , typename Mapped , typename Cmp_Fn = std::less<Key>, typename Tag = rb_tree_tag, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> typedef Cmp_Fn __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >::cmp_fn

Comparison functor type.

Definition at line 642 of file assoc_container.hpp.

4.968.3 Constructor & Destructor Documentation

4.968.3.1 template<typename Key , typename Mapped , typename Cmp_Fn = std::less<Key>, typename Tag = rb_tree_tag, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >::tree (const cmp_fn & *c*) [inline]

Constructor taking some policy objects. r_cmp_fn will be copied by the Cmp_Fn object of the container object.

Definition at line 648 of file assoc_container.hpp.

4.968.3.2 template<typename Key , typename Mapped , typename Cmp_Fn = std::less<Key>, typename Tag = rb_tree_tag, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >::tree (It *first*, It *last*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 655 of file assoc_container.hpp.

4.968.3.3 template<typename Key , typename Mapped , typename Cmp_Fn = std::less<Key>, typename Tag = rb_tree_tag, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >::tree (It *first*, It *last*, const cmp_fn & *c*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects The value_types between first_it and last_it will be inserted into the container object. r_cmp_fn will be copied by the cmp_fn object of the container object.

Definition at line 663 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.969 __gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp > Struct Template Reference

4.969.1 Detailed Description

template<typename Node_Update, bool _BTp>struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp >

Tree metadata helper.

Definition at line 58 of file tree_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- tree_policy/node_metadata_selector.hpp

4.970 __gnu_pbds::detail::tree_metadata_helper< Node_Update, false > Struct Template Reference

Public Types

- typedef Node_Update::metadata_type **type**

4.970.1 Detailed Description

template<typename Node_Update>struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, false >

Specialization, false.

Definition at line 62 of file tree_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- tree_policy/node_metadata_selector.hpp

4.971 __gnu_pbds::detail::tree_metadata_helper< Node_Update, true > Struct Template Reference

Public Types

- typedef null_type **type**

4.971.1 Detailed Description

template<typename Node_Update>struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, true >

Specialization, true.

Definition at line 69 of file tree_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- tree_policy/node_metadata_selector.hpp

4.972 __gnu_pbds::detail::tree_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc > Struct Template Reference

Public Types

- typedef tree_metadata_helper
  < __node_u, null_update >
  ::type **type**

4.972.1 Detailed Description

template<typename Key, typename Data, typename Cmp_Fn, template< typename Node_CItr, typename Const_Iterator, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >

Tree node metadata dispatch.

Definition at line 84 of file tree_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- tree_policy/node_metadata_selector.hpp

4.973 __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >:

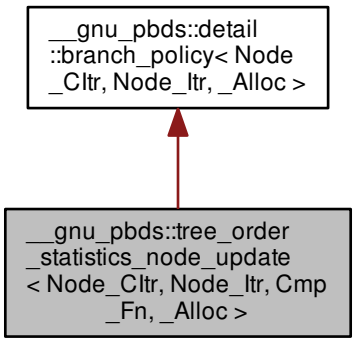

Public Types

- typedef _Alloc **allocator_type**
- typedef Cmp_Fn **cmp_fn**
- typedef node_const_iterator::value_type **const_iterator**
- typedef node_iterator::value_type **iterator**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_type **key_type**
- typedef size_type **metadata_type**
- typedef Node_CItr **node_const_iterator**
- typedef Node_Itr **node_iterator**
- typedef allocator_type::size_type **size_type**

Public Member Functions

- const_iterator find_by_order (size_type) const
- iterator find_by_order (size_type)
- size_type order_of_key (key_const_reference) const

Protected Member Functions

- void operator() (node_iterator, node_const_iterator) const

Private Types

- typedef Node_Itr::value_type **it_type**
- typedef remove_const< key_type > ::type **rckey_type**
- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rckey_type > **rebind_k**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Private Member Functions

- virtual it_type **end** ()=0
- it_type **end_iterator** () const

Static Private Member Functions

- static key_const_reference **extract_key** (const_reference r_val)

4.973.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename Cmp_Fn, typename _Alloc>class __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >

Functor updating ranks of entrees.

Definition at line 64 of file tree_policy.hpp.

4.973.2 Member Function Documentation

4.973.2.1 template<typename Node_CItr , typename Node_Itr , typename Cmp_Fn , typename _Alloc > tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >::const_iterator __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >::find_by_order (size_type *order*) const [inline]

Finds an entry by __order. Returns a const_iterator to the entry with the __order order, or a const_iterator to the container object's end if order is at least the size of the container object.

Definition at line 74 of file tree_policy.hpp.

4.973.2.2 template<typename Node_CItr , typename Node_Itr , typename Cmp_Fn , typename _Alloc > tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >::iterator __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >::find_by_order (size_type *order*) [inline]

Finds an entry by __order. Returns an iterator to the entry with the __order order, or an iterator to the container object's end if order is at least the size of the container object.

Definition at line 47 of file tree_policy.hpp.

4.973.2.3 template<typename Node_Ctr , typename Node_Itr , typename Cmp_Fn , typename _Alloc > void __gnu_pbds::tree_order_statistics_node_update< Node_Ctr, Node_Itr, Cmp_Fn, _Alloc >::operator() (node_iterator *node_it,* node_const_iterator *end_nd_it*) const [inline], [protected]

Updates the rank of a node through a node_iterator node_it; end_nd_it is the end node iterator.

Definition at line 110 of file tree_policy.hpp.

4.973.2.4 template<typename Node_Ctr , typename Node_Itr , typename Cmp_Fn , typename _Alloc > tree_order_statistics_node_update< Node_Ctr, Node_Itr, Cmp_Fn, _Alloc >::size_type __gnu_pbds::tree_order_statistics_node_update< Node_Ctr, Node_Itr, Cmp_Fn, _Alloc >::order_of_key (key_const_reference *r_key*) const [inline]

Returns the order of a key within a sequence. For exapmle, if r_key is the smallest key, this method will return 0; if r_key is a key between the smallest and next key, this method will return 1; if r_key is a key larger than the largest key, this method will return the size of r_c.

Definition at line 80 of file tree_policy.hpp.

The documentation for this class was generated from the following file:

- tree_policy.hpp

4.974 __gnu_pbds::tree_tag Struct Reference

Inheritance diagram for __gnu_pbds::tree_tag:

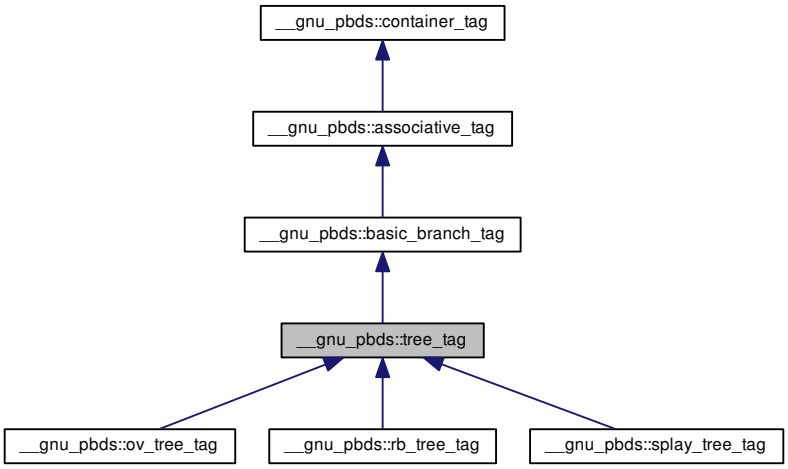

4.974.1 Detailed Description

Basic tree structure.

Definition at line 150 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.975 __gnu_pbds::detail::tree_traits< Key, Data, Cmp_Fn, Node_Update, Tag, _Alloc > Struct Template Reference

4.975.1 Detailed Description

template<typename Key, typename Data, typename Cmp_Fn, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc > class Node_Update, typename Tag, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, Data, Cmp_Fn, Node_Update, Tag, _Alloc >

Tree traits class, primary template.

Definition at line 70 of file branch_policy/traits.hpp.

The documentation for this struct was generated from the following file:

- branch_policy/traits.hpp

4.976 __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc > Struct Template Reference

Public Types

- typedef tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type **metadata_type**
- typedef ov_tree_node_const_it_ < value_type, metadata_type, _Alloc > node_const_iterator
- typedef ov_tree_node_it_ < value_type, metadata_type, _Alloc > **node_iterator**
- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**
- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**

4.976.1 Detailed Description

template<typename Key, typename Mapped, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >

Tree traits.

Definition at line 61 of file ov_tree_map_/traits.hpp.

4.976.2 Member Typedef Documentation

4.976.2.1 template<typename Key , typename Mapped , class Cmp_Fn , template< typename Node_CItr, class Node_Itr, class Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef ov_tree_node_const_it_< value_type, metadata_type, _Alloc> __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 95 of file ov_tree_map_/traits.hpp.

The documentation for this struct was generated from the following file:

- ov_tree_map_/traits.hpp

4.977 __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >:

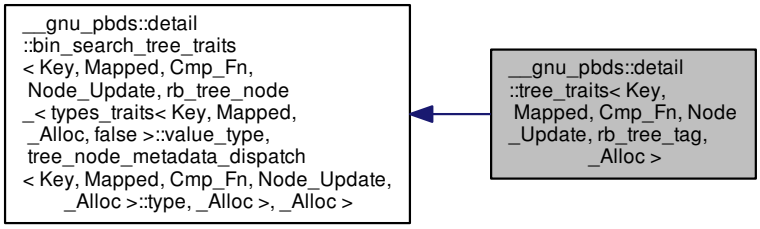

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**
- typedef rb_tree_node_

< types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > **node**

- typedef bin_search_tree_const_node_it_ < rb_tree_node_< types_traits < Key, Mapped, _Alloc, false > ::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > node_const_iterator

- typedef bin_search_tree_node_it_ < rb_tree_node_< types_traits < Key, Mapped, _Alloc, false > ::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > **node_iterator**

- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**

- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**

- typedef bin_search_tree_it_

< typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_iterator**

- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **reverse_iterator**

4.977.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >

Specialization.

Definition at line 61 of file rb_tree_map_/traits.hpp.

4.977.2 Member Typedef Documentation

4.977.2.1 typedef bin_search_tree_const_node_it_< rb_tree_node_< types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_node_< types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , _Alloc >::node_const_iterator [inherited]

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 128 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- rb_tree_map_/traits.hpp

4.978 __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >:

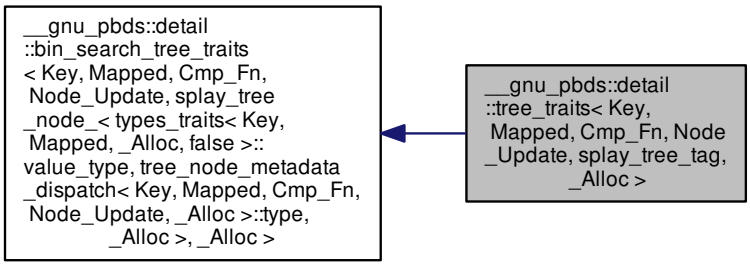

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**
- typedef splay_tree_node_ < types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > **node**
- typedef bin_search_tree_const_node_it_ < splay_tree_node_ < types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator,

point_iterator, _Alloc > node_const_iterator

- typedef bin_search_tree_node_it_ < splay_tree_node_ < types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > **node_iterator**

- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**

- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**

- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_iterator**

- typedef bin_search_tree_it_

< typename
node_alloc_traits::pointer,
typename
type_traits::value_type,
typename type_traits::pointer,
typename
type_traits::const_pointer,
typename
type_traits::reference,
typename
type_traits::const_reference,
false, _Alloc > **reverse_iterator**

4.978.1 Detailed Description

template<typename Key, typename Mapped, typename Cmp_Fn, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >

Specialization.

Definition at line 61 of file splay_tree_/traits.hpp.

4.978.2 Member Typedef Documentation

4.978.2.1 typedef **bin_search_tree_const_node_it_< splay_tree_node_< types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_node_< types_traits< Key, Mapped, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, Mapped, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , _Alloc >::node_const_iterator** [inherited]

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 128 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- splay_tree_/traits.hpp

4.979 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc > Struct Template Reference

Public Types

- typedef
tree_node_metadata_dispatch
< Key, null_type, Cmp_Fn,
Node_Update, _Alloc >::type **metadata_type**
- typedef ov_tree_node_const_it_
< value_type, metadata_type,
_Alloc > node_const_iterator
- typedef node_const_iterator **node_iterator**

- typedef Node_Update < node_const_iterator, node_const_iterator, Cmp_Fn, _Alloc > **node_update**
- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**

4.979.1 Detailed Description

template<typename Key, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >

Specialization.

Definition at line 132 of file ov_tree_map_/traits.hpp.

4.979.2 Member Typedef Documentation

4.979.2.1 template<typename Key , class Cmp_Fn , template< typename Node_CItr, class Node_Itr, class Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef ov_tree_node_const_it_< value_type, metadata_type, _Alloc> __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 166 of file ov_tree_map_/traits.hpp.

The documentation for this struct was generated from the following file:

- ov_tree_map_/traits.hpp

4.980 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >:

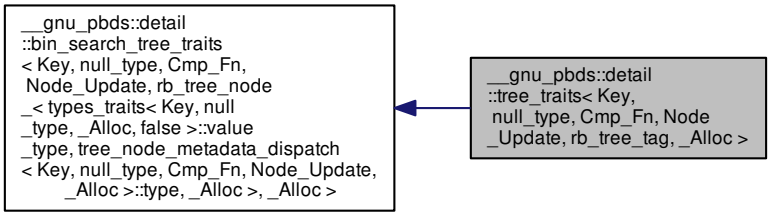

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**
- typedef rb_tree_node_ < types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > **node**
- typedef bin_search_tree_const_node_it_ < rb_tree_node_< types_traits < Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > node_const_iterator
- typedef bin_search_tree_node_it_ < rb_tree_node_< types_traits < Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > **node_iterator**
- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**
- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**
- typedef

bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**

- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_iterator**
- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **reverse_iterator**

4.980.1 Detailed Description

template<typename Key, typename Cmp_Fn, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >

Specialization.

Definition at line 85 of file rb_tree_map_/traits.hpp.

4.980.2 Member Typedef Documentation

4.980.2.1 typedef **bin_search_tree_const_node_it_< rb_tree_node_< types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, null_type , Cmp_Fn, Node_Update, rb_tree_node_< types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , _Alloc >::node_const_iterator** [inherited]

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 128 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- rb_tree_map_/traits.hpp

4.981 __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >:

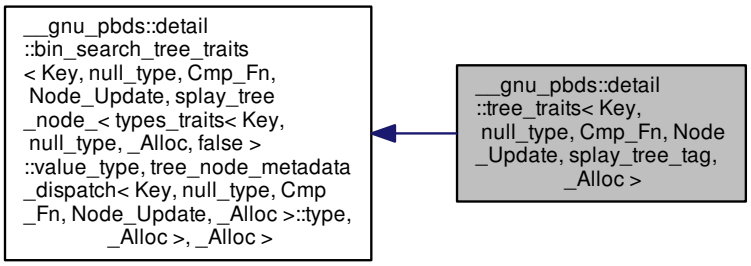

Public Types

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **const_reverse_iterator**

- typedef splay_tree_node_ < types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > **node**

- typedef bin_search_tree_const_node_it_ < splay_tree_node_ < types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > node_const_iterator

- typedef bin_search_tree_node_it_ < splay_tree_node_ < types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch < Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc >, point_const_iterator, point_iterator, _Alloc > **node_iterator**

- typedef Node_Update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > **node_update**

- typedef __gnu_pbds::null_node_update < node_const_iterator, node_iterator, Cmp_Fn, _Alloc > * **null_node_update_pointer**

- typedef bin_search_tree_const_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_const_iterator**

- typedef bin_search_tree_it_

< typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, true, _Alloc > **point_iterator**

- typedef bin_search_tree_it_ < typename node_alloc_traits::pointer, typename type_traits::value_type, typename type_traits::pointer, typename type_traits::const_pointer, typename type_traits::reference, typename type_traits::const_reference, false, _Alloc > **reverse_iterator**

4.981.1 Detailed Description

template<typename Key, class Cmp_Fn, template< typename Node_CItr, class Node_Itr, class Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >

Specialization.

Definition at line 81 of file splay_tree_/traits.hpp.

4.981.2 Member Typedef Documentation

4.981.2.1 typedef bin_search_tree_const_node_it_< splay_tree_node_< types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , point_const_iterator, point_iterator, _Alloc> __gnu_pbds::detail::bin_search_tree_traits< Key, null_type , Cmp_Fn, Node_Update, splay_tree_node_< types_traits< Key, null_type, _Alloc, false >::value_type, tree_node_metadata_dispatch< Key, null_type, Cmp_Fn, Node_Update, _Alloc >::type, _Alloc > , _Alloc >::node_const_iterator [inherited]

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 128 of file bin_search_tree_/traits.hpp.

The documentation for this struct was generated from the following file:

- splay_tree_/traits.hpp

4.982 __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >:

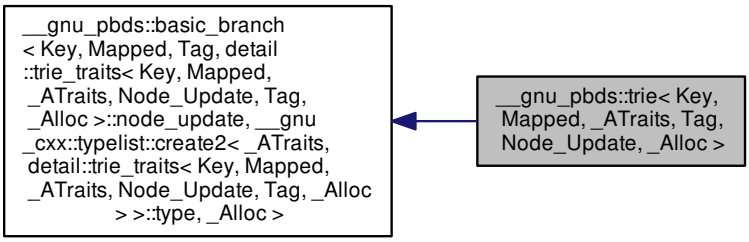

Public Types

- typedef _ATraits access_traits
- typedef detail::trie_traits
  < Key, Mapped, _ATraits,
  Node_Update, Tag, _Alloc >
  ::node_update **node_update**

Public Member Functions

- trie (const access_traits &t)
- template<typename It >
  trie (It first, It last)
- template<typename It >
  trie (It first, It last, const access_traits &t)
- **trie** (const trie &other)
- trie & **operator=** (const trie &other)
- void **swap** (trie &other)

4.982.1 Detailed Description

template<typename Key, typename Mapped, typename _ATraits = typename detail::default_trie_access_traits<Key>::type, typename Tag = pat_trie_tag, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>>class __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >

A trie-based container.

Template Parameters

Key	Key type.
Mapped	Map type.
_ATraits	Element access traits.
Tag	Instantiating data structure type, see container_tag.
Node_Update	Updates trie internal-nodes, restores invariants when invalidated. XXX See design-::tree-based-containersnode invariants.
_Alloc	Allocator type.

Base tag choice is pat_trie_tag.

Base is basic_branch.

Definition at line 731 of file assoc_container.hpp.

4.982.2 Member Typedef Documentation

4.982.2.1 template<typename Key , typename Mapped , typename _ATraits = typename detail::default_trie_access_traits<Key>-::type, typename Tag = pat_trie_tag, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> typedef _ATraits __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >::access_traits

Element access traits type.

Definition at line 738 of file assoc_container.hpp.

4.982.3 Constructor & Destructor Documentation

4.982.3.1 template<typename Key , typename Mapped , typename _ATraits = typename detail::default_trie_access_traits<Key>-::type, typename Tag = pat_trie_tag, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >::trie (const access_traits & *t*) [inline]

Constructor taking some policy objects. r_access_traits will be copied by the _ATraits object of the container object.

Definition at line 744 of file assoc_container.hpp.

4.982.3.2 template<typename Key , typename Mapped , typename _ATraits = typename detail::default_trie_access_traits<Key>-::type, typename Tag = pat_trie_tag, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >::trie (It *first,* It *last*) [inline]

Constructor taking __iterators to a range of value_types. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 751 of file assoc_container.hpp.

4.982.3.3 template<typename Key , typename Mapped , typename _ATraits = typename detail::default_trie_access_traits<Key>-::type, typename Tag = pat_trie_tag, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc_ > class Node_Update = null_node_update, typename _Alloc = std::allocator<char>> template<typename It > __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >::trie (It *first,* It *last,* const access_traits & *t*) [inline]

Constructor taking __iterators to a range of value_types and some policy objects. The value_types between first_it and last_it will be inserted into the container object.

Definition at line 758 of file assoc_container.hpp.

The documentation for this class was generated from the following file:

- assoc_container.hpp

4.983 __gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp > Struct Template Reference

4.983.1 Detailed Description

template<typename Node_Update, bool _BTp>struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp >

Trie metadata helper.

Definition at line 58 of file trie_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- trie_policy/node_metadata_selector.hpp

4.984 __gnu_pbds::detail::trie_metadata_helper< Node_Update, false > Struct Template Reference

Public Types

- typedef Node_Update::metadata_type **type**

4.984.1 Detailed Description

template<typename Node_Update>struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, false >

Specialization, false.

Definition at line 62 of file trie_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- trie_policy/node_metadata_selector.hpp

4.985 __gnu_pbds::detail::trie_metadata_helper< Node_Update, true > Struct Template Reference

Public Types

- typedef null_type **type**

4.985.1 Detailed Description

template<typename Node_Update>struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, true >

Specialization, true.

Definition at line 69 of file trie_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- trie_policy/node_metadata_selector.hpp

4.986 __gnu_pbds::detail::trie_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc > Struct Template Reference

Public Types

- typedef trie_metadata_helper < __node_u, null_update > ::type **type**

4.986.1 Detailed Description

template<typename Key, typename Data, typename Cmp_Fn, template< typename Node_CItr, typename Const_Iterator, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::trie_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >

Trie node metadata dispatch.

Definition at line 84 of file trie_policy/node_metadata_selector.hpp.

The documentation for this struct was generated from the following file:

- trie_policy/node_metadata_selector.hpp

4.987 __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >:

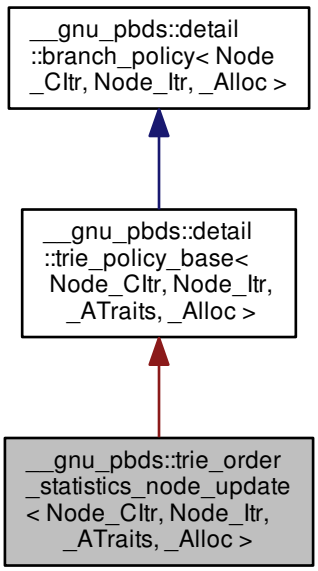

Public Types

- typedef access_traits::const_iterator **a_const_iterator**
- typedef _ATraits **access_traits**
- typedef _Alloc **allocator_type**
- typedef node_const_iterator::value_type **const_iterator**
- typedef node_iterator::value_type **iterator**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_type **key_type**
- typedef size_type **metadata_type**
- typedef Node_CItr **node_const_iterator**
- typedef Node_Itr **node_iterator**
- typedef allocator_type::size_type **size_type**

Public Member Functions

- const_iterator find_by_order (size_type) const
- iterator find_by_order (size_type)
- size_type order_of_key (key_const_reference) const
- size_type order_of_prefix (a_const_iterator, a_const_iterator) const

Protected Member Functions

- void operator() (node_iterator, node_const_iterator) const

Private Types

- typedef Node_Itr::value_type **it_type**
- typedef remove_const< key_type > ::type **rckey_type**
- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rckey_type > **rebind_k**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Private Member Functions

- virtual const_iterator **end** () const =0
- it_type **end_iterator** () const
- virtual const access_traits & **get_access_traits** () const =0

Static Private Member Functions

- static size_type **common_prefix_len** (node_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static key_const_reference **extract_key** (const_reference r_val)
- static iterator **leftmost_it** (node_iterator)
- static bool **less** (e_const_iterator, e_const_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static iterator **rightmost_it** (node_iterator)

4.987.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc>class __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >

Functor updating ranks of entrees.

Definition at line 253 of file trie_policy.hpp.

4.987.2 Member Function Documentation

4.987.2.1 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::const_iterator __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::find_by_order (size_type *order*) const [inline]

Finds an entry by __order. Returns a const_iterator to the entry with the __order order, or a const_iterator to the container object's end if order is at least the size of the container object.

Definition at line 81 of file trie_policy.hpp.

4.987.2.2 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::iterator __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::find_by_order (size_type *order*) [inline]

Finds an entry by __order. Returns an iterator to the entry with the __order order, or an iterator to the container object's end if order is at least the size of the container object.

Definition at line 47 of file trie_policy.hpp.

4.987.2.3 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > void __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::operator() (node_iterator *nd_it,* node_const_iterator) const [inline],[protected]

Updates the rank of a node through a node_iterator node_it; end_nd_it is the end node iterator.

Definition at line 154 of file trie_policy.hpp.

4.987.2.4 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::size_type __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::order_of_key (key_const_reference *r_key*) const [inline]

Returns the order of a key within a sequence. For exapmle, if r_key is the smallest key, this method will return 0; if r_key is a key between the smallest and next key, this method will return 1; if r_key is a key larger than the largest key, this method will return the size of r_c.

Definition at line 87 of file trie_policy.hpp.

4.987.2.5 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::size_type __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::order_of_prefix (a_const_iterator *b*, a_const_iterator *e*) const [inline]

Returns the order of a prefix within a sequence. For exapmle, if [b, e] is the smallest prefix, this method will return 0; if r_key is a key between the smallest and next key, this method will return 1; if r_key is a key larger than the largest key, this method will return the size of r_c.

Definition at line 98 of file trie_policy.hpp.

The documentation for this class was generated from the following file:

- trie_policy.hpp

4.988 __gnu_pbds::detail::trie_policy_base< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::detail::trie_policy_base< Node_CItr, Node_Itr, _ATraits, _Alloc >:

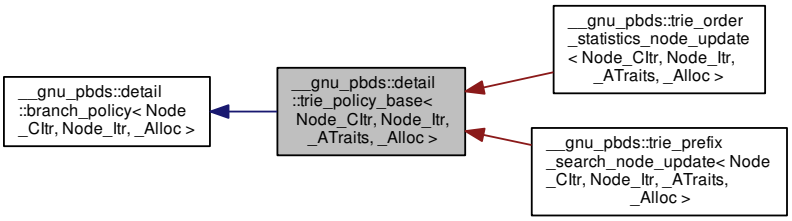

Public Types

- typedef _ATraits **access_traits**
- typedef _Alloc **allocator_type**
- typedef node_const_iterator::value_type **const_iterator**
- typedef node_iterator::value_type **iterator**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_type **key_type**
- typedef null_type **metadata_type**
- typedef Node_CItr **node_const_iterator**
- typedef Node_Itr **node_iterator**
- typedef allocator_type::size_type **size_type**

Protected Types

- typedef rebind_v::const_pointer **const_pointer**
- typedef rebind_v::const_reference **const_reference**
- typedef Node_Itr::value_type **it_type**
- typedef remove_const< key_type > ::type **rckey_type**
- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rckey_type > **rebind_k**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Protected Member Functions

- virtual const_iterator **end** () const =0
- virtual iterator **end** ()=0
- it_type **end_iterator** () const
- virtual const access_traits & **get_access_traits** () const =0
- virtual node_const_iterator **node_begin** () const =0
- virtual node_iterator **node_begin** ()=0
- virtual node_const_iterator **node_end** () const =0
- virtual node_iterator **node_end** ()=0

Static Protected Member Functions

- static size_type **common_prefix_len** (node_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static key_const_reference **extract_key** (const_reference r_val)
- static iterator **leftmost_it** (node_iterator)
- static bool **less** (e_const_iterator, e_const_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static iterator **rightmost_it** (node_iterator)

4.988.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc>class __gnu_pbds::detail::trie_policy_base< Node_CItr, Node_Itr, _ATraits, _Alloc >

Base class for trie policies.

Definition at line 53 of file trie_policy_base.hpp.

The documentation for this class was generated from the following file:

- trie_policy_base.hpp

4.989 __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc > Class Template Reference

Inheritance diagram for __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >:

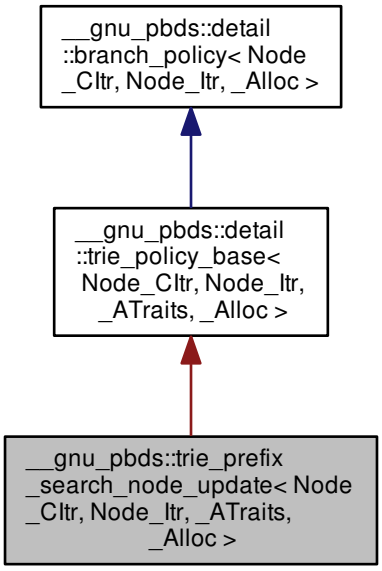

Public Types

- typedef access_traits::const_iterator a_const_iterator
- typedef _ATraits access_traits
- typedef _Alloc allocator_type
- typedef node_const_iterator::value_type **const_iterator**
- typedef node_iterator::value_type **iterator**
- typedef base_type::key_const_reference **key_const_reference**
- typedef base_type::key_type **key_type**
- typedef null_type **metadata_type**
- typedef Node_CItr **node_const_iterator**
- typedef Node_Itr **node_iterator**
- typedef allocator_type::size_type size_type

Public Member Functions

- std::pair< const_iterator, const_iterator > prefix_range (key_const_reference) const

- std::pair< iterator, iterator > prefix_range (key_const_reference)
- std::pair< const_iterator, const_iterator > prefix_range (a_const_iterator, a_const_iterator) const
- std::pair< iterator, iterator > prefix_range (a_const_iterator, a_const_iterator)

Protected Member Functions

- void operator() (node_iterator node_it, node_const_iterator end_nd_it) const

Private Types

- typedef rebind_v::const_pointer **const_pointer**
- typedef rebind_v::const_reference **const_reference**
- typedef Node_Itr::value_type **it_type**
- typedef remove_const< key_type > ::type **rckey_type**
- typedef remove_const < value_type >::type **rcvalue_type**
- typedef rebind_traits< _Alloc, rckey_type > **rebind_k**
- typedef rebind_traits< _Alloc, rcvalue_type > **rebind_v**
- typedef rebind_v::reference **reference**
- typedef std::iterator_traits < it_type >::value_type **value_type**

Private Member Functions

- it_type **end_iterator** () const

Static Private Member Functions

- static size_type **common_prefix_len** (node_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static key_const_reference **extract_key** (const_reference r_val)
- static iterator **leftmost_it** (node_iterator)
- static bool **less** (e_const_iterator, e_const_iterator, e_const_iterator, e_const_iterator, const access_traits &)
- static iterator **rightmost_it** (node_iterator)

4.989.1 Detailed Description

template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc>class __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >

A node updator that allows tries to be searched for the range of values that match a certain prefix.

Definition at line 155 of file trie_policy.hpp.

4.989.2 Member Typedef Documentation

4.989.2.1 template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc> typedef access_traits::const_iterator __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::a_const_iterator

Const element iterator.

Definition at line 168 of file trie_policy.hpp.

4.989.2.2 template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc> typedef _ATraits __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::access_traits

Element access traits.

Definition at line 165 of file trie_policy.hpp.

4.989.2.3 template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc> typedef _Alloc __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::allocator_type

_Alloc type.

Definition at line 171 of file trie_policy.hpp.

4.989.2.4 template<typename Node_CItr, typename Node_Itr, typename _ATraits, typename _Alloc> typedef allocator_type::size_type __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::size_type

Size type.

Definition at line 174 of file trie_policy.hpp.

4.989.3 Member Function Documentation

4.989.3.1 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > void __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::operator() (node_iterator *node_it,* node_const_iterator *end_nd_it*) const [inline], [protected]

Called to update a node's metadata.

Definition at line 141 of file trie_policy.hpp.

4.989.3.2 template<typename Node_CItr , typename Node_Itr , typename _ATraits , typename _Alloc > std::pair< typename trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::const_iterator, typename trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::const_iterator > __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >::prefix_range (key_const_reference *r_key*) const

Finds the const iterator range corresponding to all values whose prefixes match r_key.

Definition at line 49 of file trie_policy.hpp.

4.989.3.3 template<typename Node_Ctr , typename Node_Itr , typename _ATraits , typename _Alloc > std::pair< typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::iterator, typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::iterator > __gnu_pbds::trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::prefix_range (key_const_reference *r_key*)

Finds the iterator range corresponding to all values whose prefixes match r_key.

Definition at line 60 of file trie_policy.hpp.

4.989.3.4 template<typename Node_Ctr , typename Node_Itr , typename _ATraits , typename _Alloc > std::pair< typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::const_iterator, typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::const_iterator > __gnu_pbds::trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::prefix_range (a_const_iterator *b,* a_const_iterator *e*) const

Finds the const iterator range corresponding to all values whose prefixes match [b, e).

Definition at line 71 of file trie_policy.hpp.

4.989.3.5 template<typename Node_Ctr , typename Node_Itr , typename _ATraits , typename _Alloc > std::pair< typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::iterator, typename trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::iterator > __gnu_pbds::trie_prefix_search_node_update< Node_Ctr, Node_Itr, _ATraits, _Alloc >::prefix_range (a_const_iterator *b,* a_const_iterator *e*)

Finds the iterator range corresponding to all values whose prefixes match [b, e).

Definition at line 86 of file trie_policy.hpp.

The documentation for this class was generated from the following file:

- trie_policy.hpp

4.990 __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc > Struct Template Reference

Public Types

- enum { **reverse** }
- enum { **min_e_val**, **max_e_val**, **max_size** }
- typedef detail::__conditional_type < Reverse, typename String::const_reverse_iterator, typename String::const_iterator > ::__type const_iterator
- typedef std::iterator_traits < const_iterator >::value_type e_type
- typedef detail::rebind_traits < _Alloc, key_type > ::const_reference **key_const_reference**
- typedef String **key_type**
- typedef _Alloc::size_type **size_type**

Static Public Member Functions

- static const_iterator begin (key_const_reference)
- static size_type e_pos (e_type e)
- static const_iterator end (key_const_reference)

4.990.1 Detailed Description

template<typename String = std::string, typename String::value_type Min_E_Val = detail::__numeric_traits<typename String::value_type>::__min, typename String::value_type Max_E_Val = detail::__numeric_traits<typename String::value_type>::__max, bool Reverse = false, typename _Alloc = std::allocator<char>>struct __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >

Element access traits for string types.

Template Parameters

String	String type.
Min_E_Val	Minimal element value.
Max_E_Val	Maximum element value.
Reverse	Reverse iteration should be used. Default: false.
_Alloc	Allocator type.

Definition at line 74 of file trie_policy.hpp.

4.990.2 Member Typedef Documentation

4.990.2.1 template<typename String = std::string, typename String::value_type Min_E_Val = detail::__numeric_traits<typename String::value_type>::__min, typename String::value_type Max_E_Val = detail::__numeric_traits<typename String::value_type>::__max, bool Reverse = false, typename _Alloc = std::allocator<char>> typedef detail::__conditional_type<Reverse, typename String::const_reverse_iterator, typename String::const_iterator>::__type __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::const_iterator

Element const iterator type.

Definition at line 90 of file trie_policy.hpp.

4.990.2.2 template<typename String = std::string, typename String::value_type Min_E_Val = detail::__numeric_traits<typename String::value_type>::__min, typename String::value_type Max_E_Val = detail::__numeric_traits<typename String::value_type>::__max, bool Reverse = false, typename _Alloc = std::allocator<char>> typedef std::iterator_traits<const_iterator>::value_type __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::e_type

Element type.

Definition at line 93 of file trie_policy.hpp.

4.990.3 Member Function Documentation

4.990.3.1 template<typename String , typename String::value_type Min_E_Val, typename String::value_type Max_E_Val, bool Reverse, typename _Alloc > trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::const_iterator __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::begin (key_const_reference *r_key*) [inline], [static]

Returns a const_iterator to the first element of key_const_reference agumnet.

Definition at line 59 of file trie_policy.hpp.

4.990.3.2 template<typename String , typename String::value_type Min_E_Val, typename String::value_type Max_E_Val, bool Reverse, typename _Alloc > trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::size_type __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::e_pos (e_type *e*) [inline], [static]

Maps an element to a position.

Definition at line 51 of file trie_policy.hpp.

4.990.3.3 template<typename String , typename String::value_type Min_E_Val, typename String::value_type Max_E_Val, bool Reverse, typename _Alloc > trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::const_iterator __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >::end (key_const_reference *r_key*) [inline], [static]

Returns a const_iterator to the after-last element of key_const_reference argument.

Definition at line 67 of file trie_policy.hpp.

The documentation for this struct was generated from the following file:

- trie_policy.hpp

4.991 __gnu_pbds::trie_tag Struct Reference

Inheritance diagram for __gnu_pbds::trie_tag:

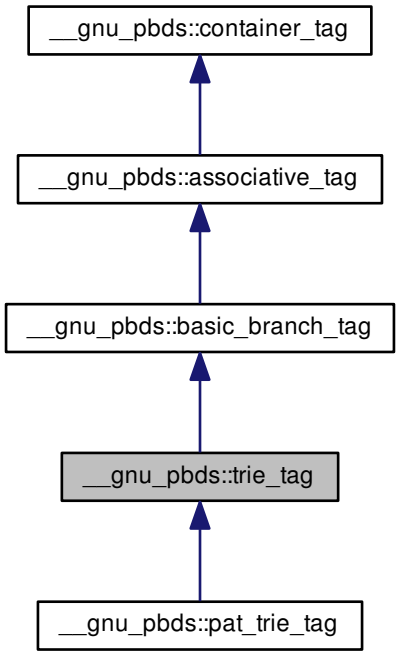

4.991.1 Detailed Description

Basic trie structure.

Definition at line 162 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.992 __gnu_pbds::detail::trie_traits< Key, Data, _ATraits, Node_Update, Tag, _Alloc > Struct Template Reference

4.992.1 Detailed Description

template<typename Key, typename Data, typename _ATraits, template< typename Node_CItr, typename Node_Itr, typename _ATraits_, typename _Alloc > class Node_Update, typename Tag, typename _Alloc>struct __gnu_pbds::detail::trie_traits< Key, Data, _ATraits, Node_Update, Tag, _Alloc >

Trie traits class, primary template.

Definition at line 83 of file branch_policy/traits.hpp.

The documentation for this struct was generated from the following file:

- branch_policy/traits.hpp

4.993 __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc > Struct Template Reference

Public Types

- typedef _ATraits **access_traits**
- typedef base_type::_CIter < node, leaf, head, inode, true > **const_iterator**
- typedef base_type::_CIter < node, leaf, head, inode, false > **const_reverse_iterator**
- typedef base_type::_Head < synth_access_traits, metadata > **head**
- typedef base_type::_Inode < synth_access_traits, metadata > **inode**
- typedef base_type::_Iter< node, leaf, head, inode, true > **iterator**
- typedef base_type::_Leaf < synth_access_traits, metadata > **leaf**
- typedef base_type::_Metadata < metadata_type, _Alloc > **metadata**

- typedef trie_node_metadata_dispatch < Key, Mapped, _ATraits, Node_Update, _Alloc >::type **metadata_type**
- typedef base_type::_Node_base < synth_access_traits, metadata > **node**
- typedef base_type::_Node_citer < node, leaf, head, inode, const_iterator, iterator, _Alloc > node_const_iterator
- typedef base_type::_Node_iter < node, leaf, head, inode, const_iterator, iterator, _Alloc > **node_iterator**
- typedef Node_Update < node_const_iterator, node_iterator, _ATraits, _Alloc > node_update
- typedef null_node_update < node_const_iterator, node_iterator, _ATraits, _Alloc > * **null_node_update_pointer**
- typedef base_type::_Iter< node, leaf, head, inode, false > **reverse_iterator**
- typedef __gnu_pbds::detail::synth_access_traits < type_traits, false, access_traits > synth_access_traits

4.993.1 Detailed Description

template<typename Key, typename Mapped, typename _ATraits, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >

Specialization.

Definition at line 62 of file pat_trie_/traits.hpp.

4.993.2 Member Typedef Documentation

4.993.2.1 template<typename Key , typename Mapped , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef base_type::_Node_citer<node, leaf, head, inode, const_iterator, iterator, _Alloc> __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 88 of file pat_trie_/traits.hpp.

4.993.2.2 template<typename Key , typename Mapped , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef Node_Update<node_const_iterator, node_iterator, _ATraits, _Alloc> __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >::node_update

Type for node update.

Definition at line 93 of file pat_trie_/traits.hpp.

4.993.2.3 template<typename Key , typename Mapped , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef __gnu_pbds::detail::synth_access_traits<type_traits, false, access_traits> __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >::synth_access_traits

Type for synthesized traits.

Definition at line 74 of file pat_trie_/traits.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_/traits.hpp

4.994 __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc > Struct Template Reference

Public Types

- typedef _ATraits **access_traits**
- typedef base_type::_CIter < node, leaf, head, inode, true > **const_iterator**
- typedef base_type::_CIter < node, leaf, head, inode, false > **const_reverse_iterator**
- typedef base_type::_Head < synth_access_traits, metadata > **head**
- typedef base_type::_Inode < synth_access_traits, metadata > **inode**
- typedef const_iterator **iterator**
- typedef base_type::_Leaf < synth_access_traits, metadata > **leaf**
- typedef base_type::_Metadata < metadata_type, _Alloc > **metadata**
- typedef trie_node_metadata_dispatch < Key, null_type, _ATraits, Node_Update, _Alloc >::type **metadata_type**
- typedef base_type::_Node_base < synth_access_traits, metadata > **node**

- typedef base_type::_Node_citer < node, leaf, head, inode, const_iterator, iterator, _Alloc > node_const_iterator
- typedef node_const_iterator **node_iterator**
- typedef Node_Update < node_const_iterator, node_iterator, _ATraits, _Alloc > node_update
- typedef null_node_update < node_const_iterator, node_const_iterator, _ATraits, _Alloc > * **null_node_update_pointer**
- typedef const_reverse_iterator **reverse_iterator**
- typedef __gnu_pbds::detail::synth_access_traits < type_traits, true, access_traits > synth_access_traits

4.994.1 Detailed Description

template<typename Key, typename _ATraits, template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc>struct __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >

Specialization.

Definition at line 109 of file pat_trie_/traits.hpp.

4.994.2 Member Typedef Documentation

4.994.2.1 template<typename Key , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef base_type::_Node_citer<node, leaf, head, inode, const_iterator, iterator, _Alloc> __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >::node_const_iterator

This is an iterator to an iterator: it iterates over nodes, and de-referencing it returns one of the tree's iterators.

Definition at line 135 of file pat_trie_/traits.hpp.

4.994.2.2 template<typename Key , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef Node_Update<node_const_iterator, node_iterator, _ATraits, _Alloc> __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >::node_update

Type for node update.

Definition at line 140 of file pat_trie_/traits.hpp.

4.994.2.3 template<typename Key , typename _ATraits , template< typename Node_CItr, typename Node_Itr, typename Cmp_Fn_, typename _Alloc_ > class Node_Update, typename _Alloc > typedef __gnu_pbds::detail::synth_access_traits<type_traits, true, access_traits> __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >::synth_access_traits

Type for synthesized traits.

Definition at line 121 of file pat_trie_/traits.hpp.

The documentation for this struct was generated from the following file:

- pat_trie_/traits.hpp

4.995 __gnu_pbds::trivial_iterator_tag Struct Reference

4.995.1 Detailed Description

A trivial iterator tag. Signifies that the iterators has none of std::iterators's movement abilities.

Definition at line 75 of file tag_and_trait.hpp.

The documentation for this struct was generated from the following file:

- tag_and_trait.hpp

4.996 std::try_to_lock_t Struct Reference

4.996.1 Detailed Description

Try to acquire ownership of the mutex without blocking.

Definition at line 132 of file std_mutex.h.

The documentation for this struct was generated from the following file:

- std_mutex.h

4.997 std::tuple< _Elements > Class Template Reference

Inheritance diagram for std::tuple< _Elements >:



Public Member Functions

- template<bool _NotEmpty = (sizeof...(_Elements) >= 1), _ImplicitCtor< _NotEmpty, const _Elements &...> = true>
  constexpr **tuple** (const _Elements &...__elements) noexcept(__nothrow_constructible< const _Elements &...>())

- template<bool _NotEmpty = (sizeof...(_Elements) >= 1), _ExplicitCtor< _NotEmpty, const _Elements &...> = false>
  constexpr **tuple** (const _Elements &...__elements) noexcept(__nothrow_constructible< const _Elements &...>())
- template<typename... _UElements, bool _Valid = __valid_args<_UElements...>(), _ImplicitCtor< _Valid, _UElements...> = true>
  constexpr **tuple** (_UElements &&...__elements) noexcept(__nothrow_constructible< _UElements...>())
- template<typename... _UElements, bool _Valid = __valid_args<_UElements...>(), _ExplicitCtor< _Valid, _UElements...> = false>
  constexpr **tuple** (_UElements &&...__elements) noexcept(__nothrow_constructible< _UElements...>())
- constexpr **tuple** (const tuple &)=default
- constexpr **tuple** (tuple &&)=default
- template<typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<const tuple<_UElements...>&>(), _ImplicitCtor< _Valid, const _UElements &...> = true>
  constexpr **tuple** (const tuple< _UElements...> &__in) noexcept(__nothrow_constructible< const _UElements &...>())
- template<typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<const tuple<_UElements...>&>(), _ExplicitCtor< _Valid, const _UElements &...> = false>
  constexpr **tuple** (const tuple< _UElements...> &__in) noexcept(__nothrow_constructible< const _UElements &...>())
- template<typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<tuple<_UElements...>&&>(), _ImplicitCtor< _Valid, _UElements...> = true>
  constexpr **tuple** (tuple< _UElements...> &&__in) noexcept(__nothrow_constructible< _UElements...>())
- template<typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<tuple<_UElements...>&&>(), _ExplicitCtor< _Valid, _UElements...> = false>
  constexpr **tuple** (tuple< _UElements...> &&__in) noexcept(__nothrow_constructible< _UElements...>())
- template<typename _Alloc , _ImplicitDefaultCtor< is_object< _Alloc >::value > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a)
- template<typename _Alloc , bool _NotEmpty = (sizeof...(_Elements) >= 1), _ImplicitCtor< _NotEmpty, const _Elements &...> = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const _Elements &...__elements)
- template<typename _Alloc , bool _NotEmpty = (sizeof...(_Elements) >= 1), _ExplicitCtor< _NotEmpty, const _Elements &...> = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const _Elements &...__elements)
- template<typename _Alloc , typename... _UElements, bool _Valid = __valid_args<_UElements...>(), _ImplicitCtor< _Valid, _UElements...> = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, _UElements &&...__elements)
- template<typename _Alloc , typename... _UElements, bool _Valid = __valid_args<_UElements...>(), _ExplicitCtor< _Valid, _UElements...> = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, _UElements &&...__elements)
- template<typename _Alloc >
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple &__in)
- template<typename _Alloc >
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple &&__in)
- template<typename _Alloc , typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<const tuple<_UElements...>&>(), _ImplicitCtor< _Valid, const _UElements &...> = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple< _UElements...> &__in)
- template<typename _Alloc , typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<const tuple<_UElements...>&>(), _ExplicitCtor< _Valid, const _UElements &...> = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple< _UElements...> &__in)
- template<typename _Alloc , typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<tuple<_UElements...>&&>(), _ImplicitCtor< _Valid, _UElements...> = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple< _UElements...> &&__in)
- template<typename _Alloc , typename... _UElements, bool _Valid = (sizeof...(_Elements) == sizeof...(_UElements)) && !__use_other_ctor<tuple<_UElements...>&&>(), _ExplicitCtor< _Valid, _UElements...> = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple< _UElements...> &&__in)
- constexpr tuple & **operator=** (typename conditional< __assignable< const _Elements &...>(), const tuple &, const __nonesuch & >::type __in) noexcept(__nothrow_assignable< const _Elements &...>())

- constexpr tuple & **operator=** (typename conditional< __assignable< _Elements...>(), tuple &&, __nonesuch && >::type __in) noexcept(__nothrow_assignable< _Elements...>())
- template<typename... _UElements>
  constexpr __enable_if_t
  < __assignable< const
  _UElements &...>), tuple & > **operator=** (const tuple< _UElements...> &__in) noexcept(__nothrow_-assignable< const _UElements &...>())
- template<typename... _UElements>
  constexpr __enable_if_t
  < __assignable< _UElements...>
  ), tuple & > **operator=** (tuple< _UElements...> &&__in) noexcept(__nothrow_assignable< _UElements...>())
- constexpr void **swap** (tuple &__in) noexcept(__and_< __is_nothrow_swappable< _Elements >...>::value)

4.997.1 Detailed Description

template<typename... _Elements>class std::tuple< _Elements >

Primary class template, tuple.

Definition at line 57 of file tuple.

The documentation for this class was generated from the following file:

- tuple

4.998 std::tuple< _T1, _T2 > Class Template Reference

Inheritance diagram for std::tuple< _T1, _T2 >:



Public Member Functions

- template<bool _Dummy = true, _ImplicitCtor< _Dummy, const _T1 &, const _T2 & > = true>
  constexpr **tuple** (const _T1 &__a1, const _T2 &__a2) noexcept(__nothrow_constructible< const _T1 &, const _T2 & >())
- template<bool _Dummy = true, _ExplicitCtor< _Dummy, const _T1 &, const _T2 & > = false>
  constexpr **tuple** (const _T1 &__a1, const _T2 &__a2) noexcept(__nothrow_constructible< const _T1 &, const _T2 & >())

- template<typename _U1 , typename _U2 , _ImplicitCtor<!__is_alloc_arg< _U1 >(), _U1, _U2 > = true>
  constexpr **tuple** (_U1 &&__a1, _U2 &&__a2) noexcept(__nothrow_constructible< _U1, _U2 >())
- template<typename _U1 , typename _U2 , _ExplicitCtor<!__is_alloc_arg< _U1 >(), _U1, _U2 > = false>
  constexpr **tuple** (_U1 &&__a1, _U2 &&__a2) noexcept(__nothrow_constructible< _U1, _U2 >())
- constexpr **tuple** (const tuple &)=default
- constexpr **tuple** (tuple &&)=default
- template<typename _U1 , typename _U2 , _ImplicitCtor< true, const _U1 &, const _U2 & > = true>
  constexpr **tuple** (const tuple< _U1, _U2 > &__in) noexcept(__nothrow_constructible< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 , _ExplicitCtor< true, const _U1 &, const _U2 & > = false>
  constexpr **tuple** (const tuple< _U1, _U2 > &__in) noexcept(__nothrow_constructible< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 , _ImplicitCtor< true, _U1, _U2 > = true>
  constexpr **tuple** (tuple< _U1, _U2 > &&__in) noexcept(__nothrow_constructible< _U1, _U2 >())
- template<typename _U1 , typename _U2 , _ExplicitCtor< true, _U1, _U2 > = false>
  constexpr **tuple** (tuple< _U1, _U2 > &&__in) noexcept(__nothrow_constructible< _U1, _U2 >())
- template<typename _U1 , typename _U2 , _ImplicitCtor< true, const _U1 &, const _U2 & > = true>
  constexpr **tuple** (const pair< _U1, _U2 > &__in) noexcept(__nothrow_constructible< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 , _ExplicitCtor< true, const _U1 &, const _U2 & > = false>
  constexpr **tuple** (const pair< _U1, _U2 > &__in) noexcept(__nothrow_constructible< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 , _ImplicitCtor< true, _U1, _U2 > = true>
  constexpr **tuple** (pair< _U1, _U2 > &&__in) noexcept(__nothrow_constructible< _U1, _U2 >())
- template<typename _U1 , typename _U2 , _ExplicitCtor< true, _U1, _U2 > = false>
  constexpr **tuple** (pair< _U1, _U2 > &&__in) noexcept(__nothrow_constructible< _U1, _U2 >())
- template<typename _Alloc , _ImplicitDefaultCtor< is_object< _Alloc >::value, _T1, _T2 > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a)
- template<typename _Alloc , bool _Dummy = true, _ImplicitCtor< _Dummy, const _T1 &, const _T2 & > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const _T1 &__a1, const _T2 &__a2)
- template<typename _Alloc , bool _Dummy = true, _ExplicitCtor< _Dummy, const _T1 &, const _T2 & > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const _T1 &__a1, const _T2 &__a2)
- template<typename _Alloc , typename _U1 , typename _U2 , _ImplicitCtor< true, _U1, _U2 > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, _U1 &&__a1, _U2 &&__a2)
- template<typename _Alloc , typename _U1 , typename _U2 , _ExplicitCtor< true, _U1, _U2 > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, _U1 &&__a1, _U2 &&__a2)
- template<typename _Alloc >
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple &__in)
- template<typename _Alloc >
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple &&__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ImplicitCtor< true, const _U1 &, const _U2 & > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple< _U1, _U2 > &__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ExplicitCtor< true, const _U1 &, const _U2 & > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const tuple< _U1, _U2 > &__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ImplicitCtor< true, _U1, _U2 > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple< _U1, _U2 > &&__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ExplicitCtor< true, _U1, _U2 > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, tuple< _U1, _U2 > &&__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ImplicitCtor< true, const _U1 &, const _U2 & > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const pair< _U1, _U2 > &__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ExplicitCtor< true, const _U1 &, const _U2 & > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, const pair< _U1, _U2 > &__in)

- template<typename _Alloc , typename _U1 , typename _U2 , _ImplicitCtor< true, _U1, _U2 > = true>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, pair< _U1, _U2 > &&__in)
- template<typename _Alloc , typename _U1 , typename _U2 , _ExplicitCtor< true, _U1, _U2 > = false>
  constexpr **tuple** (allocator_arg_t __tag, const _Alloc &__a, pair< _U1, _U2 > &&__in)
- constexpr tuple & **operator=** (typename conditional< __assignable< const _T1 &, const _T2 & >(), const tuple &, const __nonesuch & >::type __in) noexcept(__nothrow_assignable< const _T1 &, const _T2 & >())
- constexpr tuple & **operator=** (typename conditional< __assignable< _T1, _T2 >(), tuple &&, __nonesuch && >::type __in) noexcept(__nothrow_assignable< _T1, _T2 >())
- template<typename _U1 , typename _U2 >
  constexpr __enable_if_t
  < __assignable< const _U1
  &, const _U2 & >), tuple & > **operator=** (const tuple< _U1, _U2 > &__in) noexcept(__nothrow_assignable< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 >
  constexpr __enable_if_t
  < __assignable< _U1, _U2 >
  ), tuple & > **operator=** (tuple< _U1, _U2 > &&__in) noexcept(__nothrow_assignable< _U1, _U2 >())
- template<typename _U1 , typename _U2 >
  constexpr __enable_if_t
  < __assignable< const _U1
  &, const _U2 & >), tuple & > **operator=** (const pair< _U1, _U2 > &__in) noexcept(__nothrow_assignable< const _U1 &, const _U2 & >())
- template<typename _U1 , typename _U2 >
  constexpr __enable_if_t
  < __assignable< _U1, _U2 >
  ), tuple & > **operator=** (pair< _U1, _U2 > &&__in) noexcept(__nothrow_assignable< _U1, _U2 >())
- constexpr void **swap** (tuple &__in) noexcept(__and_< __is_nothrow_swappable< _T1 >, __is_nothrow_swappable< _T2 >>::value)

4.998.1 Detailed Description

template<typename _T1, typename _T2>class std::tuple< _T1, _T2 >

Partial specialization, 2-element tuple. Includes construction and assignment from a pair.

Definition at line 887 of file tuple.

The documentation for this class was generated from the following file:

- tuple

4.999 std::tuple_element< _Int, _Tp > Struct Template Reference

4.999.1 Detailed Description

template<std::size_t _Int, typename _Tp>struct std::tuple_element< _Int, _Tp >

tuple_element

Gives the type of the ith element of a given tuple type.

Definition at line 428 of file array.

The documentation for this struct was generated from the following file:

- array

4.1000 std::tuple_element< 0, std::pair< _Tp1, _Tp2 > > Struct Template Reference

Public Types

- typedef _Tp1 **type**

4.1000.1 Detailed Description

template<class _Tp1, class _Tp2>struct std::tuple_element< 0, std::pair< _Tp1, _Tp2 > >

Partial specialization for std::pair.

Definition at line 162 of file utility.

The documentation for this struct was generated from the following file:

- utility

4.1001 std::tuple_element< 0, tuple< _Head, _Tail...> > Struct Template Reference

Public Types

- typedef _Head **type**

4.1001.1 Detailed Description

template<typename _Head, typename... _Tail>struct std::tuple_element< 0, tuple< _Head, _Tail...> >

Basis case for tuple_element: The first element is the one we're seeking.

Definition at line 1266 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.1002 std::tuple_element< 1, std::pair< _Tp1, _Tp2 > > Struct Template Reference

Public Types

- typedef _Tp2 **type**

4.1002.1 Detailed Description

template<class _Tp1, class _Tp2>struct std::tuple_element< 1, std::pair< _Tp1, _Tp2 > >

Partial specialization for std::pair.

Definition at line 167 of file utility.

The documentation for this struct was generated from the following file:

- utility

4.1003 std::tuple_element< __i, tuple< _Head, _Tail...> > Struct Template Reference

Inheritance diagram for std::tuple_element< __i, tuple< _Head, _Tail...> >:



4.1003.1 Detailed Description

template<std::size_t __i, typename _Head, typename... _Tail>struct std::tuple_element< __i, tuple< _Head, _Tail...> >

Recursive case for tuple_element: strip off the first element in the tuple and retrieve the (i-1)th element of the remaining tuple.

Definition at line 1259 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.1004 std::tuple_element< __i, tuple<> > Struct Template Reference

4.1004.1 Detailed Description

template<size_t __i>struct std::tuple_element< __i, tuple<> >

Error case for tuple_element: invalid index.

Definition at line 1275 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.1005 std::tuple_element< _Int, std::__debug::array< _Tp, _Nm > > Struct Template Reference

Public Types

- typedef _Tp **type**

4.1005.1 Detailed Description

template<std::size_t _Int, typename _Tp, std::size_t _Nm>struct std::tuple_element< _Int, std::__debug::array< _Tp, _Nm > >

tuple_element

Definition at line 395 of file debug/array.

The documentation for this struct was generated from the following file:

- debug/array

4.1006 std::tuple_element< _Int,::array< _Tp, _Nm > > Struct Template Reference

Public Types

- typedef _Tp **type**

4.1006.1 Detailed Description

template<std::size_t _Int, typename _Tp, std::size_t _Nm>struct std::tuple_element< _Int,::array< _Tp, _Nm > >

Partial specialization for std::array.

Definition at line 432 of file array.

The documentation for this struct was generated from the following file:

- array

4.1007 std::tuple_size< _Tp > Struct Template Reference

Inherited by std::tuple_size< const __enable_if_has_tuple_size< _Tp > >, std::tuple_size< const volatile __enable_-if_has_tuple_size< _Tp > >, and std::tuple_size< volatile __enable_if_has_tuple_size< _Tp > >.

4.1007.1 Detailed Description

template<typename _Tp>struct std::tuple_size< _Tp >

tuple_size

Finds the size of a given tuple type.

Definition at line 419 of file array.

The documentation for this struct was generated from the following file:

- array

4.1008 std::tuple_size< std::__debug::array< _Tp, _Nm > > Struct Template Reference

Inheritance diagram for std::tuple_size< std::__debug::array< _Tp, _Nm > >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.1008.1 Detailed Description

template<typename _Tp, std::size_t _Nm>struct std::tuple_size< std::__debug::array< _Tp, _Nm > >

tuple_size

Definition at line 390 of file debug/array.

The documentation for this struct was generated from the following file:

- debug/array

4.1009 std::tuple_size< std::pair< _Tp1, _Tp2 > > Struct Template Reference

Inheritance diagram for std::tuple_size< std::pair< _Tp1, _Tp2 > >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.1009.1 Detailed Description

template<class _Tp1, class _Tp2>struct std::tuple_size< std::pair< _Tp1, _Tp2 > >

Partial specialization for std::pair.

Definition at line 157 of file utility.

The documentation for this struct was generated from the following file:

- utility

4.1010 std::tuple_size< tuple< _Elements...> > Struct Template Reference

Inheritance diagram for std::tuple_size< tuple< _Elements...> >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.1010.1 Detailed Description

template<typename... _Elements>struct std::tuple_size< tuple< _Elements...> >

class tuple_size

Definition at line 1246 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.1011 std::tuple_size<::array< _Tp, _Nm > > Struct Template Reference

Inheritance diagram for std::tuple_size<::array< _Tp, _Nm > >:



Public Types

- typedef integral_constant < std::size_t, __v > **type**
- typedef std::size_t **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr std::size_t **value**

4.1011.1 Detailed Description

template<typename _Tp, std::size_t _Nm>struct std::tuple_size<::array< _Tp, _Nm > >

Partial specialization for std::array.

Definition at line 423 of file array.

The documentation for this struct was generated from the following file:

- array

4.1012 __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >::type Struct Reference

Inherits Cmp_Fn.

Public Member Functions

- **type** (const Cmp_Fn &other)
- bool **operator()** (entry lhs, entry rhs) const

4.1012.1 Detailed Description

template<typename _VTp, typename Cmp_Fn, typename _Alloc>struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >::type

Compare plus entry.

Definition at line 71 of file entry_cmp.hpp.

The documentation for this struct was generated from the following file:

- entry_cmp.hpp

4.1013 std::type_index Struct Reference

Public Member Functions

- **type_index** (const type_info &__rhs) noexcept
- size_t **hash_code** () const noexcept
- const char * **name** () const noexcept
- bool **operator!=** (const type_index &__rhs) const noexcept
- bool **operator<** (const type_index &__rhs) const noexcept
- bool **operator<=** (const type_index &__rhs) const noexcept
- bool **operator==** (const type_index &__rhs) const noexcept
- bool **operator>** (const type_index &__rhs) const noexcept
- bool **operator>=** (const type_index &__rhs) const noexcept

4.1013.1 Detailed Description

Class type_index

The class type_index provides a simple wrapper for type_info which can be used as an index type in associative containers (23.6) and in unordered associative containers (23.7).

Definition at line 55 of file typeindex.

The documentation for this struct was generated from the following file:

- typeindex

4.1014 std::type_info Class Reference

Inherited by __cxxabiv1::__array_type_info, __cxxabiv1::__class_type_info, __cxxabiv1::__enum_type_info, __cxxabiv1::__function_type_info, __cxxabiv1::__fundamental_type_info, and __cxxabiv1::__pbase_type_info.

Public Member Functions

- virtual ~type_info ()
- virtual bool **__do_catch** (const type_info *__thr_type, void **__thr_obj, unsigned __outer) const
- virtual bool **__do_upcast** (const __cxxabiv1::__class_type_info *__target, void **__obj_ptr) const
- virtual bool **__is_function_p** () const
- virtual bool **__is_pointer_p** () const
- bool **before** (const type_info &__arg) const noexcept
- size_t **hash_code** () const noexcept
- const char * name () const noexcept
- bool **operator!=** (const type_info &__arg) const noexcept
- bool **operator==** (const type_info &__arg) const noexcept

Protected Member Functions

- **type_info** (const char *__n)

Protected Attributes

- const char * **__name**

4.1014.1 Detailed Description

Part of RTTI.

The `type_info` class describes type information generated by an implementation.

Definition at line 88 of file typeinfo.

4.1014.2 Constructor & Destructor Documentation

4.1014.2.1 virtual std::type_info::~type_info ( ) [virtual]

Destructor first. Being the first non-inline virtual function, this controls in which translation unit the vtable is emitted. The compiler makes use of that information to know where to emit the runtime-mandated type_info structures in the new-abi.

4.1014.3 Member Function Documentation

4.1014.3.1 const char* std::type_info::name ( ) const [inline], [noexcept]

Returns an *implementation-defined* byte string; this is not portable between compilers!

Definition at line 99 of file typeinfo.

The documentation for this class was generated from the following file:

- typeinfo

4.1015 __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash > Struct Template Reference

Inheritance diagram for __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash >:

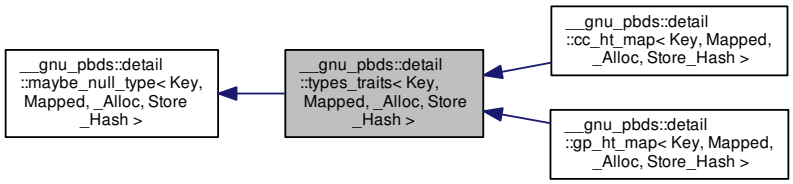

Public Types

- typedef std::pair< size_type, size_type > **comp_hash**
- typedef __rebind_va::const_pointer **const_pointer**
- typedef __rebind_va::const_reference **const_reference**
- typedef __rebind_ka::const_pointer **key_const_pointer**
- typedef __rebind_ka::const_reference **key_const_reference**
- typedef __rebind_ka::pointer **key_pointer**
- typedef __rebind_ka::reference **key_reference**
- typedef Key **key_type**
- typedef __rebind_ma::const_pointer **mapped_const_pointer**
- typedef __rebind_ma::const_reference **mapped_const_reference**
- typedef __rebind_ma::pointer **mapped_pointer**
- typedef __rebind_ma::reference **mapped_reference**
- typedef Mapped **mapped_type**
- typedef __nothrowcopy::indicator **no_throw_indicator**
- typedef __rebind_va::pointer **pointer**
- typedef __rebind_va::reference **reference**
- typedef _Alloc::size_type **size_type**
- typedef integral_constant< int, Store_Hash > **store_extra**
- typedef stored_data < value_type, size_type, Store_Hash > **stored_data_type**
- typedef select_value_type< Key, Mapped >::type **value_type**

Public Attributes

- no_throw_indicator **m_no_throw_copies_indicator**
- store_extra **m_store_extra_indicator**

4.1015.1 Detailed Description

template<typename Key, typename Mapped, typename _Alloc, bool Store_Hash>struct __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash >

Traits for abstract types.

Definition at line 154 of file types_traits.hpp.

The documentation for this struct was generated from the following file:

- types_traits.hpp

4.1016 __gnu_cxx::unary_compose< _Operation1, _Operation2 > Class Template Reference

Inheritance diagram for __gnu_cxx::unary_compose< _Operation1, _Operation2 >:

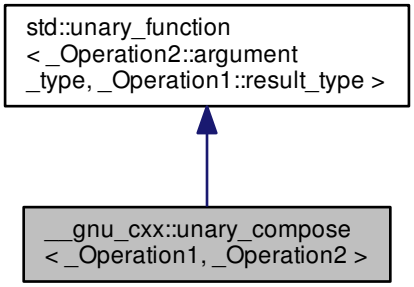

Public Types

- typedef _Operation2::argument_type argument_type
- typedef _Operation1::result_type result_type

Public Member Functions

- **unary_compose** (const _Operation1 &__x, const _Operation2 &__y)
- _Operation1::result_type **operator()** (const typename _Operation2::argument_type &__x) const

Protected Attributes

- _Operation1 **_M_fn1**
- _Operation2 **_M_fn2**

4.1016.1 Detailed Description

template<class _Operation1, class _Operation2>class __gnu_cxx::unary_compose< _Operation1, _Operation2 >

An SGI extension .

Definition at line 117 of file ext/functional.

4.1016.2 Member Typedef Documentation

4.1016.2.1 typedef _Operation2::argument_type std::unary_function< _Operation2::argument_type , _Operation1::result_type >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.1016.2.2 typedef _Operation1::result_type std::unary_function< _Operation2::argument_type , _Operation1::result_type >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- ext/functional

4.1017 std::unary_function< _Arg, _Result > Struct Template Reference

Inheritance diagram for std::unary_function< _Arg, _Result >:



Public Types

- typedef _Arg argument_type
- typedef _Result result_type

4.1017.1 Detailed Description

template<typename _Arg, typename _Result>struct std::unary_function< _Arg, _Result >

This is one of the functor base classes.

Definition at line 105 of file stl_function.h.

4.1017.2 Member Typedef Documentation

4.1017.2.1 template<typename _Arg, typename _Result> typedef _Arg std::unary_function< _Arg, _Result >::argument_type

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.1017.2.2 template<typename _Arg, typename _Result> typedef _Result std::unary_function< _Arg, _Result >::result_type

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this struct was generated from the following file:

- stl_function.h

4.1018 std::unary_negate< _Predicate > Class Template Reference

Inheritance diagram for std::unary_negate< _Predicate >:



Public Types

- typedef _Predicate::argument_type argument_type
- typedef bool result_type

Public Member Functions

- constexpr **unary_negate** (const _Predicate &__x)
- constexpr bool **operator()** (const typename _Predicate::argument_type &__x) const

Protected Attributes

- _Predicate **_M_pred**

4.1018.1 Detailed Description

template<typename _Predicate>class std::unary_negate< _Predicate >

One of the negation functors.

Definition at line 1003 of file stl_function.h.

4.1018.2 Member Typedef Documentation

4.1018.2.1 typedef _Predicate::argument_type std::unary_function< _Predicate::argument_type , bool >::argument_type [inherited]

`argument_type` is the type of the argument

Definition at line 108 of file stl_function.h.

4.1018.2.2 typedef bool std::unary_function< _Predicate::argument_type , bool >::result_type [inherited]

`result_type` is the return type

Definition at line 111 of file stl_function.h.

The documentation for this class was generated from the following file:

- stl_function.h

4.1019 __gnu_parallel::unbalanced_tag Struct Reference

Inheritance diagram for __gnu_parallel::unbalanced_tag:

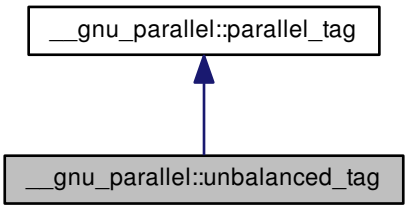

Public Member Functions

- _ThreadIndex __get_num_threads ()
- void set_num_threads (_ThreadIndex __num_threads)

4.1019.1 Detailed Description

Recommends parallel execution using static load-balancing at compile time.

Definition at line 92 of file tags.h.

4.1019.2 Member Function Documentation

4.1019.2.1 _ThreadIndex __gnu_parallel::parallel_tag::__get_num_threads ( ) [inline],[inherited]

Find out desired number of threads.

Returns

Desired number of threads.

Definition at line 63 of file tags.h.

Referenced by __gnu_parallel::__parallel_sort().

4.1019.2.2 void __gnu_parallel::parallel_tag::set_num_threads (_ThreadIndex *__num_threads*) [inline], [inherited]

Set the desired number of threads.

Parameters

__num_threads	Desired number of threads.

Definition at line 73 of file tags.h.

The documentation for this struct was generated from the following file:

- tags.h

4.1020 std::underflow_error Class Reference

Inheritance diagram for std::underflow_error:

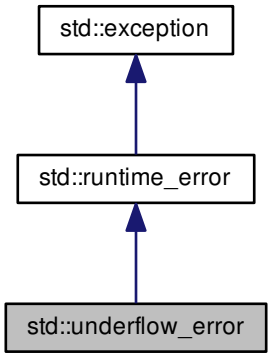

Public Member Functions

- **underflow_error** (const string &__arg) _GLIBCXX_TXN_SAFE
- **underflow_error** (const char *) _GLIBCXX_TXN_SAFE
- **underflow_error** (const underflow_error &)=default
- **underflow_error** (underflow_error &&)=default
- underflow_error & **operator=** (const underflow_error &)=default
- underflow_error & **operator=** (underflow_error &&)=default
- virtual const char * what () const noexcept

4.1020.1 Detailed Description

Thrown to indicate arithmetic underflow.

Definition at line 288 of file stdexcept.

4.1020.2 Member Function Documentation

4.1020.2.1 virtual const char* std::runtime_error::what ( ) const [virtual], [noexcept], [inherited]

Returns a C-style character string describing the general cause of the current error (the same string passed to the ctor).

Reimplemented from std::exception.

The documentation for this class was generated from the following file:

- stdexcept

4.1021 std::underlying_type< _Tp > Struct Template Reference

Inherits std::__underlying_type_impl< _Tp, bool >.

Public Types

- using **type** = __underlying_type(_Tp)

4.1021.1 Detailed Description

template<typename _Tp>struct std::underlying_type< _Tp >

The underlying type of an enum.

Definition at line 2324 of file type_traits.

The documentation for this struct was generated from the following file:

- type_traits

4.1022 std::uniform_int_distribution< _IntType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _IntType result_type

Public Member Functions

- uniform_int_distribution ()
- uniform_int_distribution (_IntType __a, _IntType __b=numeric_limits< _IntType >::max())
- **uniform_int_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type **a** () const
- result_type **b** () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)

- template<typename _UniformRandomNumberGenerator > uniform_int_distribution < _IntType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__param)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const uniform_int_distribution &__d1, const uniform_int_distribution &__d2)

4.1022.1 Detailed Description

template<typename _IntType = int>class std::uniform_int_distribution< _IntType >

Uniform discrete distribution for random numbers. A discrete random distribution on the range $[min, max]$ with equal probability throughout the range.

Definition at line 74 of file uniform_int_dist.h.

4.1022.2 Member Typedef Documentation

4.1022.2.1 template<typename _IntType = int> typedef _IntType std::uniform_int_distribution< _IntType >::result_type

The type of the range of the distribution.

Definition at line 77 of file uniform_int_dist.h.

4.1022.3 Constructor & Destructor Documentation

4.1022.3.1 template<typename _IntType = int> std::uniform_int_distribution< _IntType >::uniform_int_distribution ( ) [inline]

Constructs a uniform distribution object.

Definition at line 122 of file uniform_int_dist.h.

4.1022.3.2 template<typename _IntType = int> std::uniform_int_distribution< _IntType >::uniform_int_distribution (_IntType __a, _IntType __b = numeric_limits<_IntType>::max()) [inline], [explicit]

Constructs a uniform distribution object.

Definition at line 128 of file uniform_int_dist.h.

4.1022.4 Member Function Documentation

4.1022.4.1 template<typename _IntType = int> result_type std::uniform_int_distribution< _IntType >::max ( ) const [inline]

Returns the inclusive upper bound of the distribution range.

Definition at line 180 of file uniform_int_dist.h.

4.1022.4.2 template<typename _IntType = int> result_type std::uniform_int_distribution< _IntType >::min ( ) const [inline]

Returns the inclusive lower bound of the distribution range.

Definition at line 173 of file uniform_int_dist.h.

4.1022.4.3 template<typename _IntType = int> template<typename _UniformRandomNumberGenerator > result_type std::uniform_int_distribution< _IntType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 188 of file uniform_int_dist.h.

4.1022.4.4 template<typename _IntType = int> param_type std::uniform_int_distribution< _IntType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 158 of file uniform_int_dist.h.

Referenced by std::operator>>().

4.1022.4.5 template<typename _IntType = int> void std::uniform_int_distribution< _IntType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 166 of file uniform_int_dist.h.

4.1022.4.6 template<typename _IntType = int> void std::uniform_int_distribution< _IntType >::reset ( ) [inline]

Resets the distribution state.

Does nothing for the uniform integer distribution.

Definition at line 144 of file uniform_int_dist.h.

4.1022.5 Friends And Related Function Documentation

4.1022.5.1 template<typename _IntType = int> bool operator== (const uniform_int_distribution< _IntType > & *__d1*, const uniform_int_distribution< _IntType > & *__d2*) [friend]

Return true if two uniform integer distributions have the same parameters.

Definition at line 223 of file uniform_int_dist.h.

The documentation for this class was generated from the following file:

- uniform_int_dist.h

4.1023 std::uniform_real_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- uniform_real_distribution ()
- uniform_real_distribution (_RealType __a, _RealType __b=_RealType(1))
- **uniform_real_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- result_type **a** () const
- result_type **b** () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const uniform_real_distribution &__d1, const uniform_real_distribution &__d2)

4.1023.1 Detailed Description

template<typename _RealType = double>class std::uniform_real_distribution< _RealType >

Uniform continuous distribution for random numbers.

A continuous random distribution on the range [min, max) with equal probability throughout the range. The URNG should be real-valued and deliver number in the range [0, 1).

Definition at line 1731 of file random.h.

4.1023.2 Member Typedef Documentation

4.1023.2.1 template<typename _RealType = double> typedef _RealType std::uniform_real_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 1734 of file random.h.

4.1023.3 Constructor & Destructor Documentation

4.1023.3.1 template<typename _RealType = double> std::uniform_real_distribution< _RealType >::uniform_real_distribution ( ) [inline]

Constructs a uniform_real_distribution object.

The lower bound is set to 0.0 and the upper bound to 1.0

Definition at line 1781 of file random.h.

4.1023.3.2 template<typename _RealType = double> std::uniform_real_distribution< _RealType >::uniform_real_distribution (_RealType *__a*, _RealType *__b* = _RealType(1)) [inline], [explicit]

Constructs a uniform_real_distribution object.

Parameters

__a	[IN] The lower bound of the distribution.
__b	[IN] The upper bound of the distribution.

Definition at line 1790 of file random.h.

4.1023.4 Member Function Documentation

4.1023.4.1 template<typename _RealType = double> result_type std::uniform_real_distribution< _RealType >::max ( ) const [inline]

Returns the inclusive upper bound of the distribution range.

Definition at line 1841 of file random.h.

4.1023.4.2 template<typename _RealType = double> result_type std::uniform_real_distribution< _RealType >::min ( ) const [inline]

Returns the inclusive lower bound of the distribution range.

Definition at line 1834 of file random.h.

4.1023.4.3 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::uniform_real_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 1849 of file random.h.

4.1023.4.4 template<typename _RealType = double> param_type std::uniform_real_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 1819 of file random.h.

Referenced by std::operator>>().

4.1023.4.5 template<typename _RealType = double> void std::uniform_real_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 1827 of file random.h.

4.1023.4.6 template<typename _RealType = double> void std::uniform_real_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Does nothing for the uniform real distribution.

Definition at line 1805 of file random.h.

4.1023.5 Friends And Related Function Documentation

4.1023.5.1 template<typename _RealType = double> bool operator== (const uniform_real_distribution< _RealType > & *__d1*, const uniform_real_distribution< _RealType > & *__d2*) [friend]

Return true if two uniform real distributions have the same parameters.

Definition at line 1889 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.1024 std::unique_lock< _Mutex > Class Template Reference

Public Types

- typedef _Mutex **mutex_type**

Public Member Functions

- **unique_lock** (mutex_type &__m)
- **unique_lock** (mutex_type &__m, defer_lock_t) noexcept
- **unique_lock** (mutex_type &__m, try_to_lock_t)
- **unique_lock** (mutex_type &__m, adopt_lock_t) noexcept
- template<typename _Clock , typename _Duration >
  unique_lock (mutex_type &__m, const chrono::time_point< _Clock, _Duration > &__atime)

- template<typename _Rep , typename _Period >
  unique_lock (mutex_type &__m, const chrono::duration< _Rep, _Period > &__rtime)
- **unique_lock** (const unique_lock &)=delete
- **unique_lock** (unique_lock &&__u) noexcept
- void **lock** ()
- mutex_type * **mutex** () const noexcept
- **operator bool** () const noexcept
- unique_lock & **operator=** (const unique_lock &)=delete
- unique_lock & **operator=** (unique_lock &&__u) noexcept
- bool **owns_lock** () const noexcept
- mutex_type * **release** () noexcept
- void **swap** (unique_lock &__u) noexcept
- bool **try_lock** ()
- template<typename _Rep , typename _Period >
  bool **try_lock_for** (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  bool **try_lock_until** (const chrono::time_point< _Clock, _Duration > &__atime)
- void **unlock** ()

Related Functions

(Note that these are not member functions.)

- template<typename _Mutex >
  void swap (unique_lock< _Mutex > &__x, unique_lock< _Mutex > &__y) noexcept

4.1024.1 Detailed Description

template<typename _Mutex>class std::unique_lock< _Mutex >

A movable scoped lock type.

A unique_lock controls mutex ownership within a scope. Ownership of the mutex can be delayed until after construction and can be transferred to another unique_lock by move construction or move assignment. If a mutex lock is owned when the destructor runs ownership will be released.

Definition at line 56 of file unique_lock.h.

4.1024.2 Friends And Related Function Documentation

4.1024.2.1 template<typename _Mutex > void swap (unique_lock< _Mutex > & *__x*, unique_lock< _Mutex > & *__y*) [related]

Swap overload for unique_lock objects.

Definition at line 235 of file unique_lock.h.

The documentation for this class was generated from the following file:

- unique_lock.h

4.1025 std::unique_ptr< _Tp, _Dp > Class Template Reference

Public Types

- using **deleter_type** = _Dp
- using **element_type** = _Tp
- using **pointer** = typename __uniq_ptr_impl< _Tp, _Dp >::pointer

Public Member Functions

- template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>>
  constexpr unique_ptr () noexcept
- template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>>
  unique_ptr (pointer __p) noexcept
- template<typename _Del = deleter_type, typename = _Require<is_copy_constructible<_Del>>>
  unique_ptr (pointer __p, const deleter_type &__d) noexcept
- template<typename _Del = deleter_type, typename = _Require<is_move_constructible<_Del>>>
  unique_ptr (pointer __p, __enable_if_t<!is_lvalue_reference< _Del >::value, _Del && > __d) noexcept
- template<typename _Del = deleter_type, typename _DelUnref = typename remove_reference<_Del>::type>
  unique_ptr (pointer, __enable_if_t< is_lvalue_reference< _Del >::value, _DelUnref && >)=delete
- template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>>
  constexpr unique_ptr (nullptr_t) noexcept
- unique_ptr (unique_ptr &&)=default
- template<typename _Up , typename >
  unique_ptr (auto_ptr< _Up > &&__u) noexcept
- template<typename _Up , typename _Ep , typename = _Require< __safe_conversion_up<_Up, _Ep>, typename conditional<is_-reference<_Dp>::value, is_same<_Ep, _Dp>, is_convertible<_Ep, _Dp>>::type>>
  unique_ptr (unique_ptr< _Up, _Ep > &&__u) noexcept
- **unique_ptr** (const unique_ptr &)=delete
- ~unique_ptr () noexcept
- pointer get () const noexcept
- deleter_type & get_deleter () noexcept
- const deleter_type & get_deleter () const noexcept
- operator bool () const noexcept
- add_lvalue_reference
  < element_type >::type operator* () const
- pointer operator-> () const noexcept
- unique_ptr & operator= (unique_ptr &&)=default
- template<typename _Up , typename _Ep >
  enable_if< __and_
  < __safe_conversion_up< _Up,
  _Ep >, is_assignable
  < deleter_type &, _Ep && >
  >::value, unique_ptr & >
  ::type operator= (unique_ptr< _Up, _Ep > &&__u) noexcept
- unique_ptr & operator= (nullptr_t) noexcept
- unique_ptr & **operator=** (const unique_ptr &)=delete
- pointer release () noexcept
- void reset (pointer __p=pointer()) noexcept
- void swap (unique_ptr &__u) noexcept

Related Functions

(Note that these are not member functions.)

- template<typename _Tp , typename _Dp >
  enable_if< __is_swappable< _Dp >
  ::value >::type swap (unique_ptr< _Tp, _Dp > &__x, unique_ptr< _Tp, _Dp > &__y) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator== (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator== (const unique_ptr< _Tp, _Dp > &__x, nullptr_t) noexcept
- template<typename _Tp , typename _Dp >
  bool operator== (nullptr_t, const unique_ptr< _Tp, _Dp > &__x) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator!= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator!= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t) noexcept
- template<typename _Tp , typename _Dp >
  bool operator!= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x) noexcept
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator< (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator< (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator< (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator<= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator<= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator<= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator> (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator> (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator> (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)
- template<typename _Tp , typename _Dp , typename _Up , typename _Ep >
  bool operator>= (const unique_ptr< _Tp, _Dp > &__x, const unique_ptr< _Up, _Ep > &__y)
- template<typename _Tp , typename _Dp >
  bool operator>= (const unique_ptr< _Tp, _Dp > &__x, nullptr_t)
- template<typename _Tp , typename _Dp >
  bool operator>= (nullptr_t, const unique_ptr< _Tp, _Dp > &__x)

- template<typename _Tp , typename... _Args>
  _MakeUniq< _Tp >::__single_object make_unique (_Args &&...__args)
- template<typename _Tp >
  _MakeUniq< _Tp >::__array make_unique (size_t __num)
- template<typename _Tp , typename... _Args>
  _MakeUniq< _Tp >::__invalid_type make_unique (_Args &&...)=delete

4.1025.1 Detailed Description

template<typename _Tp, typename _Dp = default_delete<_Tp>>class std::unique_ptr< _Tp, _Dp >

20.7.1.2 unique_ptr for single objects.

Definition at line 242 of file unique_ptr.h.

4.1025.2 Constructor & Destructor Documentation

4.1025.2.1 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>> constexpr std::unique_ptr< _Tp, _Dp >::unique_ptr ( ) [inline], [noexcept]

Default constructor, creates a unique_ptr that owns nothing.

Definition at line 269 of file unique_ptr.h.

4.1025.2.2 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>> std::unique_ptr< _Tp, _Dp >::unique_ptr (pointer __p) [inline], [explicit], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an object of element_type

The deleter will be value-initialized.

Definition at line 281 of file unique_ptr.h.

4.1025.2.3 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Del = deleter_type, typename = _Require<is_copy_constructible<_Del>>> std::unique_ptr< _Tp, _Dp >::unique_ptr (pointer __p, const deleter_type & __d) [inline], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an object of element_type
__d	A reference to a deleter.

The deleter will be initialized with __d

Definition at line 294 of file unique_ptr.h.

4.1025.2.4 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Del = deleter_type, typename = _Require<is_move_constructible<_Del>>> std::unique_ptr< _Tp, _Dp >::unique_ptr (pointer __p, __enable_if_t<!is_lvalue_reference< _Del >::value, _Del && > __d) [inline], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an object of element_type

__d	An rvalue reference to a (non-reference) deleter.

The deleter will be initialized with `std::move(__d)`

Definition at line 306 of file unique_ptr.h.

4.1025.2.5 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>> constexpr std::unique_ptr< _Tp, _Dp >::unique_ptr (nullptr_t) [inline], [noexcept]

Creates a unique_ptr that owns nothing.

Definition at line 320 of file unique_ptr.h.

4.1025.2.6 template<typename _Tp, typename _Dp = default_delete<_Tp>> std::unique_ptr< _Tp, _Dp >::unique_ptr (unique_ptr< _Tp, _Dp > &&) [default]

Move constructor.

4.1025.2.7 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Up , typename _Ep , typename = _Require< __safe_conversion_up<_Up, _Ep>, typename conditional<is_reference<_Dp>::value, is_same<_Ep, _Dp>, is_convertible<_Ep, _Dp>>::type>> std::unique_ptr< _Tp, _Dp >::unique_ptr (unique_ptr< _Up, _Ep > && *__u*) [inline], [noexcept]

Converting constructor from another type.

Requires that the pointer owned by `__u` is convertible to the type of pointer owned by this object, `__u` does not own an array, and `__u` has a compatible deleter type.

Definition at line 340 of file unique_ptr.h.

4.1025.2.8 template<typename _Tp, typename _Dp = default_delete<_Tp>> std::unique_ptr< _Tp, _Dp >::~unique_ptr ( ) [inline], [noexcept]

Destructor, invokes the deleter if the stored pointer is not null.

Definition at line 355 of file unique_ptr.h.

4.1025.3 Member Function Documentation

4.1025.3.1 template<typename _Tp, typename _Dp = default_delete<_Tp>> pointer std::unique_ptr< _Tp, _Dp >::get (void) const [inline], [noexcept]

Return the stored pointer.

Definition at line 421 of file unique_ptr.h.

Referenced by std::unique_ptr< _Tp, _Dp >::operator!=(), std::unique_ptr< _Tp, _Dp >::operator==(), and std::unique_ptr< _Tp, _Dp >::operator>().

4.1025.3.2 template<typename _Tp, typename _Dp = default_delete<_Tp>> deleter_type& std::unique_ptr< _Tp, _Dp >::get_deleter ( ) [inline], [noexcept]

Return a reference to the stored deleter.

Definition at line 426 of file unique_ptr.h.

Referenced by std::unique_ptr< _Result< _Res > >::operator=(), std::unique_ptr< _Tp[], _Dp >::operator=(), std::unique_ptr< _Result< _Res > >::~unique_ptr(), and std::unique_ptr< _Tp[], _Dp >::~unique_ptr().

4.1025.3.3 template<typename _Tp, typename _Dp = default_delete<_Tp>> const deleter_type& std::unique_ptr< _Tp, _Dp >::get_deleter ( ) const [inline], [noexcept]

Return a reference to the stored deleter.

Definition at line 431 of file unique_ptr.h.

4.1025.3.4 template<typename _Tp, typename _Dp = default_delete<_Tp>> std::unique_ptr< _Tp, _Dp >::operator bool ( ) const [inline], [explicit], [noexcept]

Return `true` if the stored pointer is not null.

Definition at line 435 of file unique_ptr.h.

4.1025.3.5 template<typename _Tp, typename _Dp = default_delete<_Tp>> add_lvalue_reference<element_type>::type std::unique_ptr< _Tp, _Dp >::operator* ( ) const [inline]

Dereference the stored pointer.

Definition at line 405 of file unique_ptr.h.

4.1025.3.6 template<typename _Tp, typename _Dp = default_delete<_Tp>> pointer std::unique_ptr< _Tp, _Dp >::operator-> ( ) const [inline], [noexcept]

Return the stored pointer.

Definition at line 413 of file unique_ptr.h.

4.1025.3.7 template<typename _Tp, typename _Dp = default_delete<_Tp>> unique_ptr& std::unique_ptr< _Tp, _Dp >::operator= (unique_ptr< _Tp, _Dp > &&) [default]

Move assignment operator.

Invokes the deleter if this object owns a pointer.

4.1025.3.8 template<typename _Tp, typename _Dp = default_delete<_Tp>> template<typename _Up , typename _Ep > enable_if< __and_< __safe_conversion_up<_Up, _Ep>, is_assignable<deleter_type&, _Ep&&> >::value, unique_ptr&>::type std::unique_ptr< _Tp, _Dp >::operator= (unique_ptr< _Up, _Ep > && __u) [inline], [noexcept]

Assignment from another type.

Parameters

__u	The object to transfer ownership from, which owns a convertible pointer to a non-array object.

Invokes the deleter if this object owns a pointer.

Definition at line 386 of file unique_ptr.h.

4.1025.3.9 template<typename _Tp, typename _Dp = default_delete<_Tp>> unique_ptr& std::unique_ptr< _Tp, _Dp >::operator= (nullptr_t) [inline], [noexcept]

Reset the unique_ptr to empty, invoking the deleter if necessary.

Definition at line 395 of file unique_ptr.h.

4.1025.3.10 template<typename _Tp, typename _Dp = default_delete<_Tp>> pointer std::unique_ptr< _Tp, _Dp >::release ( ) [inline], [noexcept]

Release ownership of any stored pointer.

Definition at line 442 of file unique_ptr.h.

4.1025.3.11 template<typename _Tp, typename _Dp = default_delete<_Tp>> void std::unique_ptr< _Tp, _Dp >::reset (pointer __p = pointer()) [inline], [noexcept]

Replace the stored pointer.

Parameters

__p	The new pointer to store.

The deleter will be invoked if a pointer is already owned.

Definition at line 452 of file unique_ptr.h.

Referenced by std::unique_ptr< _Result< _Res > >::operator=(), and std::unique_ptr< _Tp[], _Dp >::operator=().

4.1025.3.12 template<typename _Tp, typename _Dp = default_delete<_Tp>> void std::unique_ptr< _Tp, _Dp >::swap (unique_ptr< _Tp, _Dp > & __u) [inline], [noexcept]

Exchange the pointer and deleter with another object.

Definition at line 461 of file unique_ptr.h.

The documentation for this class was generated from the following files:

- unique_ptr.h
- auto_ptr.h

4.1026 std::unique_ptr< _Tp[], _Dp > Class Template Reference

Public Types

- template<typename _Up >
  using **__safe_conversion_raw** = __and_< __or_< __or_< is_same< _Up, pointer >, is_same< _Up, nullptr_t >>, __and_< is_pointer< _Up >, is_same< pointer, element_type * >, is_convertible< typename remove_pointer< _Up >::type(*)[], element_type(*)[]> > > >
- template<typename _Up , typename _Ep , typename _UPtr = unique_ptr<_Up, _Ep>, typename _UP_pointer = typename _UPtr::pointer, typename _UP_element_type = typename _UPtr::element_type>
  using **__safe_conversion_up** = __and_< is_array< _Up >, is_same< pointer, element_type * >, is_same< _UP_pointer, _UP_element_type * >, is_convertible< _UP_element_type(*)[], element_type(*)[]> >
- using **deleter_type** = _Dp
- using **element_type** = _Tp
- using **pointer** = typename __uniq_ptr_impl< _Tp, _Dp >::pointer

Public Member Functions

- template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>>
  constexpr unique_ptr () noexcept
- template<typename _Up , typename _Vp = _Dp, typename = _DeleterConstraint<_Vp>, typename = typename enable_if< __safe_conversion_raw<_Up>::value, bool>::type>
  unique_ptr (_Up __p) noexcept
- template<typename _Up , typename _Del = deleter_type, typename = _Require<__safe_conversion_raw<_Up>, is_copy_constructible<_Del>>>
  unique_ptr (_Up __p, const deleter_type &__d) noexcept

- template<typename _Up , typename _Del = deleter_type, typename = _Require<__safe_conversion_raw<_Up>, is_move_constructible<_Del>>>
  unique_ptr (_Up __p, __enable_if_t<!is_lvalue_reference< _Del >::value, _Del && > __d) noexcept
- template<typename _Up , typename _Del = deleter_type, typename _DelUnref = typename remove_reference<_Del>::type, typename = _Require<__safe_conversion_raw<_Up>>>
  unique_ptr (_Up, __enable_if_t< is_lvalue_reference< _Del >::value, _DelUnref && >)=delete
- unique_ptr (unique_ptr &&)=default
- template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>>
  constexpr unique_ptr (nullptr_t) noexcept
- template<typename _Up , typename _Ep , typename = _Require< __safe_conversion_up<_Up, _Ep>, typename conditional<is_reference<_Dp>::value, is_same<_Ep, _Dp>, is_convertible<_Ep, _Dp>>::type>>
  unique_ptr (unique_ptr< _Up, _Ep > &&__u) noexcept
- **unique_ptr** (const unique_ptr &)=delete
- ~unique_ptr ()
- pointer get () const noexcept
- deleter_type & get_deleter () noexcept
- const deleter_type & get_deleter () const noexcept
- operator bool () const noexcept
- unique_ptr & operator= (unique_ptr &&)=default
- template<typename _Up , typename _Ep >
  enable_if< __and_
  < __safe_conversion_up< _Up,
  _Ep >, is_assignable
  < deleter_type &, _Ep && >
  >::value, unique_ptr & >
  ::type operator= (unique_ptr< _Up, _Ep > &&__u) noexcept
- unique_ptr & operator= (nullptr_t) noexcept
- unique_ptr & **operator=** (const unique_ptr &)=delete
- std::add_lvalue_reference
  < element_type >::type operator[] (size_t __i) const
- pointer release () noexcept
- template<typename _Up , typename = _Require< __or_<is_same<_Up, pointer>, __and_<is_same<pointer, element_type*>, is_pointer<_Up>, is_convertible< typename remove_pointer<_Up>::type(*)[], element_type(*)[] > > > >>
  void reset (_Up __p) noexcept
- void **reset** (nullptr_t=nullptr) noexcept
- void swap (unique_ptr &__u) noexcept

4.1026.1 Detailed Description

template<typename _Tp, typename _Dp>class std::unique_ptr< _Tp[], _Dp >

20.7.1.3 unique_ptr for array objects with a runtime length

Definition at line 477 of file unique_ptr.h.

4.1026.2 Constructor & Destructor Documentation

4.1026.2.1 template<typename _Tp , typename _Dp > template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>> constexpr std::unique_ptr< _Tp[], _Dp >::unique_ptr ( ) [inline], [noexcept]

Default constructor, creates a unique_ptr that owns nothing.

Definition at line 530 of file unique_ptr.h.

4.1026.2.2 template<typename _Tp , typename _Dp > template<typename _Up , typename _Vp = _Dp, typename = _DeleterConstraint<_Vp>, typename = typename enable_if< __safe_conversion_raw<_Up>::value, bool>::type> std::unique_ptr< _Tp[], _Dp >::unique_ptr (_Up __p) [inline], [explicit], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an array of a type safely convertible to an array of `element_type`

The deleter will be value-initialized.

Definition at line 547 of file unique_ptr.h.

4.1026.2.3 template<typename _Tp , typename _Dp > template<typename _Up , typename _Del = deleter_type, typename = _Require<__safe_conversion_raw<_Up>, is_copy_constructible<_Del>>> std::unique_ptr< _Tp[], _Dp >::unique_ptr (_Up __p, const deleter_type & __d) [inline], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an array of a type safely convertible to an array of `element_type`
__d	A reference to a deleter.

The deleter will be initialized with `__d`

Definition at line 562 of file unique_ptr.h.

4.1026.2.4 template<typename _Tp , typename _Dp > template<typename _Up , typename _Del = deleter_type, typename = _Require<__safe_conversion_raw<_Up>, is_move_constructible<_Del>>> std::unique_ptr< _Tp[], _Dp >::unique_ptr (_Up __p, __enable_if_t<!is_lvalue_reference< _Del >::value, _Del && > __d) [inline], [noexcept]

Takes ownership of a pointer.

Parameters

__p	A pointer to an array of a type safely convertible to an array of `element_type`
__d	A reference to a deleter.

The deleter will be initialized with `std::move(__d)`

Definition at line 576 of file unique_ptr.h.

4.1026.2.5 template<typename _Tp , typename _Dp > std::unique_ptr< _Tp[], _Dp >::unique_ptr (unique_ptr< _Tp[], _Dp > &&) [default]

Move constructor.

4.1026.2.6 template<typename _Tp , typename _Dp > template<typename _Del = _Dp, typename = _DeleterConstraint<_Del>> constexpr std::unique_ptr< _Tp[], _Dp >::unique_ptr (nullptr_t) [inline], [noexcept]

Creates a unique_ptr that owns nothing.

Definition at line 594 of file unique_ptr.h.

4.1026.2.7 template<typename _Tp , typename _Dp > std::unique_ptr< _Tp[], _Dp >::~unique_ptr ( ) [inline]

Destructor, invokes the deleter if the stored pointer is not null.

Definition at line 608 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get_deleter().

4.1026.3 Member Function Documentation

4.1026.3.1 template<typename _Tp , typename _Dp > pointer std::unique_ptr< _Tp[], _Dp >::get (void) const [inline], [noexcept]

Return the stored pointer.

Definition at line 665 of file unique_ptr.h.

4.1026.3.2 template<typename _Tp , typename _Dp > deleter_type& std::unique_ptr< _Tp[], _Dp >::get_deleter ( ) [inline], [noexcept]

Return a reference to the stored deleter.

Definition at line 670 of file unique_ptr.h.

4.1026.3.3 template<typename _Tp , typename _Dp > const deleter_type& std::unique_ptr< _Tp[], _Dp >::get_deleter ( ) const [inline], [noexcept]

Return a reference to the stored deleter.

Definition at line 675 of file unique_ptr.h.

4.1026.3.4 template<typename _Tp , typename _Dp > std::unique_ptr< _Tp[], _Dp >::operator bool ( ) const [inline], [explicit], [noexcept]

Return `true` if the stored pointer is not null.

Definition at line 679 of file unique_ptr.h.

4.1026.3.5 template<typename _Tp , typename _Dp > unique_ptr& std::unique_ptr< _Tp[], _Dp >::operator= (unique_ptr< _Tp[], _Dp > &&) [default]

Move assignment operator.

Invokes the deleter if this object owns a pointer.

4.1026.3.6 template<typename _Tp , typename _Dp > template<typename _Up , typename _Ep > enable_if<__and_<__safe_conversion_up<_Up, _Ep>, is_assignable<deleter_type&, _Ep&&> >::value, unique_ptr&>::type std::unique_ptr< _Tp[], _Dp >::operator= (unique_ptr< _Up, _Ep > && __u) [inline], [noexcept]

Assignment from another type.

Parameters

__u	The object to transfer ownership from, which owns a convertible pointer to an array object.

Invokes the deleter if this object owns a pointer.

Definition at line 638 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::get_deleter(), and std::unique_ptr< _Tp, _Dp >::reset().

4.1026.3.7 template<typename _Tp , typename _Dp > unique_ptr& std::unique_ptr< _Tp[], _Dp >::operator= (nullptr_t) [inline], [noexcept]

Reset the unique_ptr to empty, invoking the deleter if necessary.

Definition at line 647 of file unique_ptr.h.

References std::unique_ptr< _Tp, _Dp >::reset().

4.1026.3.8 template<typename _Tp , typename _Dp > std::add_lvalue_reference<element_type>::type std::unique_ptr< _Tp[], _Dp >::operator[] (size_t __i) const [inline]

Access an element of owned array.

Definition at line 657 of file unique_ptr.h.

4.1026.3.9 template<typename _Tp , typename _Dp > pointer std::unique_ptr< _Tp[], _Dp >::release ( ) [inline], [noexcept]

Release ownership of any stored pointer.

Definition at line 686 of file unique_ptr.h.

4.1026.3.10 template<typename _Tp , typename _Dp > template<typename _Up , typename = _Require< __or_<is_same<_Up, pointer>, __and_<is_same<pointer, element_type*>, is_pointer<_Up>, is_convertible< typename remove_pointer<_Up>::type(*)[], element_type(*)[] > > > >> void std::unique_ptr< _Tp[], _Dp >::reset (_Up __p) [inline], [noexcept]

Replace the stored pointer.

Parameters

__p	The new pointer to store.

The deleter will be invoked if a pointer is already owned.

Definition at line 708 of file unique_ptr.h.

References std::move().

4.1026.3.11 template<typename _Tp , typename _Dp > void std::unique_ptr< _Tp[], _Dp >::swap (unique_ptr< _Tp[], _Dp > & __u) [inline], [noexcept]

Exchange the pointer and deleter with another object.

Definition at line 716 of file unique_ptr.h.

The documentation for this class was generated from the following file:

- unique_ptr.h

4.1027 std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > Class Template Reference

Public Types

- typedef _Hashtable::key_type key_type
- typedef _Hashtable::value_type value_type
- typedef _Hashtable::mapped_type mapped_type
- typedef _Hashtable::hasher hasher
- typedef _Hashtable::key_equal key_equal
- typedef _Hashtable::allocator_type allocator_type

- typedef _Hashtable::pointer pointer
- typedef _Hashtable::const_pointer const_pointer
- typedef _Hashtable::reference reference
- typedef _Hashtable::const_reference const_reference
- typedef _Hashtable::iterator iterator

- typedef _Hashtable::const_iterator const_iterator
- typedef _Hashtable::local_iterator local_iterator
- typedef _Hashtable::const_local_iterator const_local_iterator
- typedef _Hashtable::size_type size_type
- typedef _Hashtable::difference_type difference_type

Public Member Functions

- unordered_map ()=default
- unordered_map (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator > unordered_map (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- unordered_map (const unordered_map &)=default
- unordered_map (unordered_map &&)=default
- unordered_map (const allocator_type &__a)
- **unordered_map** (const unordered_map &__umap, const allocator_type &__a)
- **unordered_map** (unordered_map &&__umap, const allocator_type &__a)
- unordered_map (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_map** (size_type __n, const allocator_type &__a)
- **unordered_map** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator > **unordered_map** (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator > **unordered_map** (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_map** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_map** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- iterator begin () noexcept
- local_iterator begin (size_type __n)
- size_type **bucket** (const key_type &__key) const
- size_type bucket_count () const noexcept
- size_type **bucket_size** (size_type __n) const
- void clear () noexcept
- size_type count (const key_type &__x) const
- template<typename... _Args> std::pair< iterator, bool > emplace (_Args &&...__args)
- template<typename... _Args> iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- local_iterator end (size_type __n)
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- hasher hash_function () const

- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_equal key_eq () const
- float load_factor () const noexcept
- size_type max_bucket_count () const noexcept
- float max_load_factor () const noexcept
- void max_load_factor (float __z)
- size_type max_size () const noexcept
- unordered_map & operator= (const unordered_map &)=default
- unordered_map & operator= (unordered_map &&)=default
- unordered_map & operator= (initializer_list< value_type > __l)
- void rehash (size_type __n)
- void reserve (size_type __n)
- size_type size () const noexcept
- void swap (unordered_map &__x) noexcept(noexcept(_M_h.swap(__x._M_h)))

- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept

- const_iterator end () const noexcept
- const_iterator cend () const noexcept

- std::pair< iterator, bool > insert (const value_type &__x)
- std::pair< iterator, bool > insert (value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair && >::value, pair
  < iterator, bool > > insert (_Pair &&__x)

- iterator insert (const_iterator __hint, const value_type &__x)
- iterator insert (const_iterator __hint, value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair && >::value, iterator > insert (const_iterator __hint, _Pair &&__x)

- iterator erase (const_iterator __position)
- iterator erase (iterator __position)

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const

- mapped_type & operator[] (const key_type &__k)
- mapped_type & operator[] (key_type &&__k)

- mapped_type & at (const key_type &__k)
- const mapped_type & at (const key_type &__k) const

- const_local_iterator begin (size_type __n) const
- const_local_iterator cbegin (size_type __n) const

- const_local_iterator end (size_type __n) const
- const_local_iterator cend (size_type __n) const

Friends

- template<typename _Key1 , typename _Tp1 , typename _Hash1 , typename _Pred1 , typename _Alloc1 >
  bool **operator==** (const unordered_map< _Key1, _Tp1, _Hash1, _Pred1, _Alloc1 > &, const unordered_map< _Key1, _Tp1, _Hash1, _Pred1, _Alloc1 > &)

4.1027.1 Detailed Description

template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>>class std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >

A standard container composed of unique keys (containing at most one of each key value) that associates values of another type with the keys.

Template Parameters

_Key	Type of key objects.
_Tp	Type of mapped objects.
_Hash	Hashing function object type, defaults to hash<_Value>.
_Pred	Predicate function object type, defaults to equal_to<_Value>.
_Alloc	Allocator type, defaults to std::allocator<std::pair<const _Key, _Tp>>.

Meets the requirements of a container, and unordered associative container

The resulting value type of the container is std::pair<const _Key, _Tp>.

Base is _Hashtable, dispatched at compile time via template alias __umap_hashtable.

Definition at line 102 of file unordered_map.h.

4.1027.2 Member Typedef Documentation

4.1027.2.1 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::allocator_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::allocator_type

Public typedefs.

Definition at line 116 of file unordered_map.h.

4.1027.2.2 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::const_iterator

Iterator-related typedefs.

Definition at line 126 of file unordered_map.h.

4.1027.2.3 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::const_local_iterator **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::const_local_iterator**

Iterator-related typedefs.

Definition at line 128 of file unordered_map.h.

4.1027.2.4 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::const_pointer **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::const_pointer**

Iterator-related typedefs.

Definition at line 122 of file unordered_map.h.

4.1027.2.5 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::const_reference **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::const_reference**

Iterator-related typedefs.

Definition at line 124 of file unordered_map.h.

4.1027.2.6 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::difference_type **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::difference_type**

Iterator-related typedefs.

Definition at line 130 of file unordered_map.h.

4.1027.2.7 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::hasher **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::hasher**

Public typedefs.

Definition at line 114 of file unordered_map.h.

4.1027.2.8 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::iterator **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::iterator**

Iterator-related typedefs.

Definition at line 125 of file unordered_map.h.

4.1027.2.9 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::key_equal **std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::key_equal**

Public typedefs.

Definition at line 115 of file unordered_map.h.

4.1027.2.10 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::key_type **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**key_type**

Public typedefs.

Definition at line 111 of file unordered_map.h.

4.1027.2.11 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::local_iterator **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**local_iterator**

Iterator-related typedefs.

Definition at line 127 of file unordered_map.h.

4.1027.2.12 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::mapped_type **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**mapped_type**

Public typedefs.

Definition at line 113 of file unordered_map.h.

4.1027.2.13 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::pointer **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**pointer**

Iterator-related typedefs.

Definition at line 121 of file unordered_map.h.

4.1027.2.14 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::reference **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**reference**

Iterator-related typedefs.

Definition at line 123 of file unordered_map.h.

4.1027.2.15 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::size_type **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**size_type**

Iterator-related typedefs.

Definition at line 129 of file unordered_map.h.

4.1027.2.16 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> typedef _Hashtable::value_type **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::**value_type**

Public typedefs.

Definition at line 112 of file unordered_map.h.

4.1027.3 Constructor & Destructor Documentation

4.1027.3.1 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map ( ) [default]

Default constructor.

4.1027.3.2 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (size_type *__n*, const hasher & *__hf* = hasher(), const key_equal & *__eql* = key_equal(), const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Default constructor creates no elements.

Parameters

__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Definition at line 151 of file unordered_map.h.

4.1027.3.3 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename _InputIterator > std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (_InputIterator *__first*, _InputIterator *__last*, size_type *__n* = 0, const hasher & *__hf* = hasher(), const key_equal & *__eql* = key_equal(), const allocator_type & *__a* = allocator_type()) [inline]

Builds an unordered_map from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_map consisting of copies of the elements from [__first,__last). This is linear in N (where N is distance(__first,__last)).

Definition at line 172 of file unordered_map.h.

4.1027.3.4 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &) [default]

Copy constructor.

4.1027.3.5 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &&) [default]

Move constructor.

4.1027.3.6 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (const allocator_type & __a) [inline], [explicit]

Creates an unordered_map with no elements.

Parameters

__a	An allocator object.

Definition at line 191 of file unordered_map.h.

4.1027.3.7 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_map (initializer_list< value_type > *__l*, size_type *__n* = 0, const hasher & *__hf* = hasher (), const key_equal & *__eql* = key_equal (), const allocator_type & *__a* = allocator_type ()) [inline]

Builds an unordered_map from an initializer_list.

Parameters

__l	An initializer_list.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_map consisting of copies of the elements in the list. This is linear in N (where N is *__l.size()*).

Definition at line 226 of file unordered_map.h.

4.1027.4 Member Function Documentation

4.1027.4.1 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> mapped_type& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::at (const key_type & *__k*) [inline]

Access to unordered_map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data whose key is equal to *__k*, if such a data is present in the unordered_map.

Exceptions

std::out_of_range	If no such data is present.

Definition at line 1000 of file unordered_map.h.

4.1027.4.2 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const mapped_type& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::at (const key_type & *__k*) const [inline]

Access to unordered_map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data whose key is equal to *__k*, if such a data is present in the unordered_map.

Exceptions

std::out_of_range	If no such data is present.

Definition at line 1004 of file unordered_map.h.

4.1027.4.3 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the unordered_map.

Definition at line 324 of file unordered_map.h.

4.1027.4.4 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_map.

Definition at line 333 of file unordered_map.h.

4.1027.4.5 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::begin (size_type __n) [inline]

Returns a read/write iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read/write local iterator.

Definition at line 1045 of file unordered_map.h.

4.1027.4.6 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::begin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1056 of file unordered_map.h.

4.1027.4.7 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::bucket_count ( ) const [inline], [noexcept]

Returns the number of buckets of the unordered_map.

Definition at line 1012 of file unordered_map.h.

4.1027.4.8 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_map.

Definition at line 337 of file unordered_map.h.

4.1027.4.9 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::cbegin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1060 of file unordered_map.h.

4.1027.4.10 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_map.

Definition at line 359 of file unordered_map.h.

4.1027.4.11 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::cend (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1086 of file unordered_map.h.

4.1027.4.12 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in an unordered_map. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 841 of file unordered_map.h.

4.1027.4.13 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::count (const key_type & *__x*) const [inline]

Finds the number of elements.

Parameters

__x	Key to count.

Returns

Number of elements with specified key.

This function only makes sense for unordered_multimap; for unordered_map the result will either be 0 (not present) or 1 (present).

Definition at line 937 of file unordered_map.h.

4.1027.4.14 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename... _Args> std::pair<iterator, bool> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::emplace (_Args &&... *__args*) [inline]

Attempts to build and insert a std::pair into the unordered_map.

Parameters

__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to build and insert a (key, value) pair into the unordered_map. An unordered_map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the unordered_map.

Insertion requires amortized constant time.

Definition at line 387 of file unordered_map.h.

4.1027.4.15 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename... _Args> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::emplace_hint (const_iterator __pos, _Args &&... __args) [inline]

Attempts to build and insert a std::pair into the unordered_map.

Parameters

__pos	An iterator that serves as a hint as to where the pair should be inserted.
__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the element with key of the std::pair built from *__args* (may or may not be that std::pair).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument emplace() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 418 of file unordered_map.h.

4.1027.4.16 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> bool std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the unordered_map is empty.

Definition at line 304 of file unordered_map.h.

4.1027.4.17 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the unordered_map.

Definition at line 346 of file unordered_map.h.

4.1027.4.18 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_map.

Definition at line 355 of file unordered_map.h.

4.1027.4.19 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::end (size_type __n) [inline]

Returns a read/write iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read/write local iterator.

Definition at line 1071 of file unordered_map.h.

4.1027.4.20 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_local_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::end (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1082 of file unordered_map.h.

4.1027.4.21 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::pair<iterator, iterator> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function probably only makes sense for unordered_multimap.

Definition at line 961 of file unordered_map.h.

4.1027.4.22 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::pair<const_iterator, const_iterator> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function probably only makes sense for unordered_multimap.

Definition at line 965 of file unordered_map.h.

4.1027.4.23 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from an unordered_map.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 791 of file unordered_map.h.

4.1027.4.24 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from an unordered_map.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_map. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 796 of file unordered_map.h.

4.1027.4.25 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from an unordered_map. For an unordered_map the result of this function can only be 0 (not present) or 1 (present). Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 813 of file unordered_map.h.

4.1027.4.26 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Erases a [__first,__last) range of elements from an unordered_map.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from an unordered_map. Note that this function only erases the elements, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 831 of file unordered_map.h.

4.1027.4.27 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) [inline]

Tries to locate an element in an unordered_map.

Parameters

__x	Key to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 919 of file unordered_map.h.

4.1027.4.28 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> const_iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) const [inline]

Tries to locate an element in an unordered_map.

Parameters

__x	Key to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 923 of file unordered_map.h.

4.1027.4.29 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> allocator_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the allocator object used by the unordered_map.

Definition at line 297 of file unordered_map.h.

4.1027.4.30 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> hasher std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::hash_function ( ) const [inline]

Returns the hash functor object with which the unordered_map was constructed.

Definition at line 895 of file unordered_map.h.

4.1027.4.31 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::pair<iterator, bool> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const value_type & __x) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the unordered_map. An unordered_map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the unordered_map.

Insertion requires amortized constant time.

Definition at line 579 of file unordered_map.h.

4.1027.4.32 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> std::pair<iterator, bool> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (value_type && __x) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the unordered_map. An unordered_map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the unordered_map.

Insertion requires amortized constant time.

Definition at line 585 of file unordered_map.h.

4.1027.4.33 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair&&>::value, pair<iterator, bool> > std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (_Pair && __x) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

A pair, of which the first element is an iterator that points to the possibly inserted pair, and the second is a bool that is true if the pair was actually inserted.

This function attempts to insert a (key, value) pair into the unordered_map. An unordered_map relies on unique keys and thus a pair is only inserted if its first element (the key) is not already present in the unordered_map.

Insertion requires amortized constant time.

Definition at line 591 of file unordered_map.h.

4.1027.4.34 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint,* const value_type & *__x*) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 618 of file unordered_map.h.

4.1027.4.35 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> iterator std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator __hint, value_type && __x) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 624 of file unordered_map.h.

4.1027.4.36 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair&&>::value, iterator> std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator __hint, _Pair && __x) [inline]

Attempts to insert a std::pair into the unordered_map.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 629 of file unordered_map.h.

4.1027.4.37 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> template<typename _InputIterator > void **std::unordered_map**< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (_InputIterator *__first,* _InputIterator *__last*) [inline]

A template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 644 of file unordered_map.h.

4.1027.4.38 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (initializer_list< value_type > __l) [inline]

Attempts to insert a list of elements into the unordered_map.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 655 of file unordered_map.h.

4.1027.4.39 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> key_equal std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::key_eq ( ) const [inline]

Returns the key comparison object with which the unordered_map was constructed.

Definition at line 901 of file unordered_map.h.

4.1027.4.40 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> float std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::load_factor ( ) const [inline], [noexcept]

Returns the average number of elements per bucket.

Definition at line 1094 of file unordered_map.h.

4.1027.4.41 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::max_bucket_count ( ) const [inline], [noexcept]

Returns the maximum number of buckets of the unordered_map.

Definition at line 1017 of file unordered_map.h.

4.1027.4.42 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> float std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::max_load_factor ( ) const [inline], [noexcept]

Returns a positive number that the unordered_map tries to keep the load factor less than or equal to.

Definition at line 1100 of file unordered_map.h.

4.1027.4.43 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::max_load_factor (float __z) [inline]

Change the unordered_map maximum load factor.

Parameters

__z	The new maximum load factor.

Definition at line 1108 of file unordered_map.h.

4.1027.4.44 **template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::max_size ( ) const** [inline], [noexcept]

Returns the maximum size of the unordered_map.

Definition at line 314 of file unordered_map.h.

4.1027.4.45 **template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> unordered_map& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &)** [default]

Copy assignment operator.

4.1027.4.46 **template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> unordered_map& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &&)** [default]

Move assignment operator.

4.1027.4.47 **template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> unordered_map& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (initializer_list< value_type > *__l*)** [inline]

Unordered_map list assignment operator.

Parameters

__l	An initializer_list.

This function fills an unordered_map with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the unordered_map and that the resulting unordered_map's size is the same as the number of elements assigned.

Definition at line 289 of file unordered_map.h.

4.1027.4.48 **template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> mapped_type& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::operator[] (const key_type & *__k*)** [inline]

Subscript ([]) access to unordered_map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data of the (key,data) pair.

Allows for easy lookup with the subscript ([])operator. Returns data associated with the key specified in subscript. If the key does not exist, a pair with that key is created using default values, which is then returned.

Lookup requires constant time.

Definition at line 983 of file unordered_map.h.

4.1027.4.49 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> mapped_type& std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::operator[] (key_type && __k) [inline]

Subscript ([]) access to unordered_map data.

Parameters

__k	The key for which data should be retrieved.

Returns

A reference to the data of the (key,data) pair.

Allows for easy lookup with the subscript ([])operator. Returns data associated with the key specified in subscript. If the key does not exist, a pair with that key is created using default values, which is then returned.

Lookup requires constant time.

Definition at line 987 of file unordered_map.h.

4.1027.4.50 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::rehash (size_type __n) [inline]

May rehash the unordered_map.

Parameters

__n	The new number of buckets.

Rehash will occur only if the new number of buckets respect the unordered_map maximum load factor.

Definition at line 1119 of file unordered_map.h.

4.1027.4.51 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::reserve (size_type __n) [inline]

Prepare the unordered_map for a specified number of elements.

Parameters

__n	Number of elements required.

Same as rehash(ceil(n / max_load_factor())).

Definition at line 1130 of file unordered_map.h.

4.1027.4.52 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> size_type std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the unordered_map.

Definition at line 309 of file unordered_map.h.

4.1027.4.53 template<typename _Key, typename _Tp, typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>, typename _Alloc = allocator<std::pair<const _Key, _Tp>>> void std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >::swap (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > & __x) [inline], [noexcept]

Swaps data with another unordered_map.

Parameters

__x	An unordered_map of the same element and allocator types.

This exchanges the elements between two unordered_map in constant time. Note that the global std::swap() function is specialized such that std::swap(m1,m2) will feed to this function.

Definition at line 855 of file unordered_map.h.

The documentation for this class was generated from the following file:

- unordered_map.h

4.1028 std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator >:



Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, unordered_map > **const_iterator**
- typedef __gnu_debug::_Safe_local_iterator < _Base_const_local_iterator, unordered_map > **const_local_iterator**
- typedef _Base::hasher **hasher**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, unordered_map > **iterator**
- typedef _Base::key_equal **key_equal**
- typedef _Base::key_type **key_type**
- typedef __gnu_debug::_Safe_local_iterator < _Base_local_iterator, unordered_map > **local_iterator**
- typedef _Base::size_type **size_type**
- typedef _Base::value_type **value_type**

Public Member Functions

- **unordered_map** (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())

- template<typename _InputIterator >
  unordered_map (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_map** (const unordered_map &)=default
- **unordered_map** (const _Base &__x)
- **unordered_map** (unordered_map &&)=default
- **unordered_map** (const allocator_type &__a)
- **unordered_map** (const unordered_map &__umap, const allocator_type &__a)
- **unordered_map** (unordered_map &&__umap, const allocator_type &__a)
- **unordered_map** (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_map** (size_type __n, const allocator_type &__a)
- **unordered_map** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_map (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_map (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_map** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_map** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void **_M_swap** (_Safe_container &__x) noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- local_iterator **begin** (size_type __b)
- const_local_iterator **begin** (size_type __b) const
- size_type **bucket_size** (size_type __b) const
- const_iterator **cbegin** () const noexcept
- const_local_iterator **cbegin** (size_type __b) const
- const_iterator **cend** () const noexcept
- const_local_iterator **cend** (size_type __b) const
- void **clear** () noexcept
- template<typename... _Args>
  std::pair< iterator, bool > **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __hint, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- local_iterator **end** (size_type __b)
- const_local_iterator **end** (size_type __b) const
- std::pair< iterator, iterator > **equal_range** (const key_type &__key)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- iterator **erase** (const_iterator __it)
- iterator **erase** (iterator __it)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const

- std::pair< iterator, bool > **insert** (const value_type &__obj)
- std::pair< iterator, bool > **insert** (value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  std::pair< iterator, bool > **insert** (_Pair &&__obj)
- iterator **insert** (const_iterator __hint, const value_type &__obj)
- iterator **insert** (const_iterator __hint, value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type>
  iterator **insert** (const_iterator __hint, _Pair &&__obj)
- void **insert** (std::initializer_list< value_type > __l)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- float **max_load_factor** () const noexcept
- void **max_load_factor** (float __f)
- unordered_map & **operator=** (const unordered_map &)=default
- unordered_map & **operator=** (unordered_map &&)=default
- unordered_map & **operator=** (initializer_list< value_type > __l)
- void **swap** (unordered_map &__x) noexcept(noexcept(declval< _Base & >().swap(__x)))

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_invalidate_if (_Predicate __pred)
- void _M_invalidate_local_if (_Predicate __pred)
- void **_M_invalidate_locals** ()
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**
- template<typename _ItT , typename _SeqT >
  class **::__gnu_debug::_Safe_local_iterator**

4.1028.1 Detailed Description

template<typename _Key, typename _Tp, typename _Hash, typename _Pred, typename _Allocator>class std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator >

Class std::unordered_map with safety/checking/debug instrumentation.

Definition at line 41 of file debug/unordered_map.

4.1028.2 Member Function Documentation

4.1028.2.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

4.1028.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.1028.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1028.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.1028.2.5 void __gnu_debug::_Safe_unordered_container< unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > >::_M_invalidate_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1028.2.6 void __gnu_debug::_Safe_unordered_container< unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > >::_M_invalidate_local_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all local iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal local iterators nested in the safe ones.

4.1028.2.7 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.1028.2.8 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & __x) [protected], [noexcept], [inherited]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1028.2.9 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1028.3 Member Data Documentation

4.1028.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1028.3.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators [inherited]

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.1028.3.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1028.3.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators [inherited]

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.1028.3.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/unordered_map

4.1029 std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > Class Template Reference

Public Types

- typedef _Hashtable::key_type key_type

- typedef _Hashtable::value_type value_type
- typedef _Hashtable::mapped_type mapped_type
- typedef _Hashtable::hasher hasher
- typedef _Hashtable::key_equal key_equal
- typedef _Hashtable::allocator_type allocator_type

- typedef _Hashtable::pointer pointer
- typedef _Hashtable::const_pointer const_pointer
- typedef _Hashtable::reference reference
- typedef _Hashtable::const_reference const_reference
- typedef _Hashtable::iterator iterator
- typedef _Hashtable::const_iterator const_iterator
- typedef _Hashtable::local_iterator local_iterator
- typedef _Hashtable::const_local_iterator const_local_iterator
- typedef _Hashtable::size_type size_type
- typedef _Hashtable::difference_type difference_type

Public Member Functions

- unordered_multimap ()=default
- unordered_multimap (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator > unordered_multimap (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- unordered_multimap (const unordered_multimap &)=default
- unordered_multimap (unordered_multimap &&)=default
- unordered_multimap (const allocator_type &__a)
- **unordered_multimap** (const unordered_multimap &__ummap, const allocator_type &__a)
- **unordered_multimap** (unordered_multimap &&__ummap, const allocator_type &__a)
- unordered_multimap (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_multimap** (size_type __n, const allocator_type &__a)
- **unordered_multimap** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator > **unordered_multimap** (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator > **unordered_multimap** (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_multimap** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_multimap** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- iterator begin () noexcept
- local_iterator begin (size_type __n)
- size_type **bucket** (const key_type &__key) const
- size_type bucket_count () const noexcept
- size_type **bucket_size** (size_type __n) const
- void clear () noexcept
- size_type count (const key_type &__x) const

- template<typename... _Args>
  iterator emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- local_iterator end (size_type __n)
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- hasher hash_function () const
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_equal key_eq () const
- float load_factor () const noexcept
- size_type max_bucket_count () const noexcept
- float max_load_factor () const noexcept
- void max_load_factor (float __z)
- size_type max_size () const noexcept
- unordered_multimap & operator= (const unordered_multimap &)=default
- unordered_multimap & operator= (unordered_multimap &&)=default
- unordered_multimap & operator= (initializer_list< value_type > __l)
- void rehash (size_type __n)
- void reserve (size_type __n)
- size_type size () const noexcept
- void swap (unordered_multimap &__x) noexcept(noexcept(_M_h.swap(__x._M_h)))

- const_iterator begin () const noexcept
- const_iterator cbegin () const noexcept

- const_iterator end () const noexcept
- const_iterator cend () const noexcept

- iterator insert (const value_type &__x)
- iterator insert (value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair && >::value, iterator > insert (_Pair &&__x)

- iterator insert (const_iterator __hint, const value_type &__x)
- iterator insert (const_iterator __hint, value_type &&__x)
- template<typename _Pair >
  __enable_if_t
  < is_constructible< value_type,
  _Pair && >::value, iterator > insert (const_iterator __hint, _Pair &&__x)

- iterator erase (const_iterator __position)
- iterator erase (iterator __position)

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator, const_iterator > equal_range (const key_type &__x) const

- const_local_iterator begin (size_type __n) const
- const_local_iterator cbegin (size_type __n) const

- const_local_iterator end (size_type __n) const
- const_local_iterator cend (size_type __n) const

Friends

- template<typename _Key1 , typename _Tp1 , typename _Hash1 , typename _Pred1 , typename _Alloc1 > bool **operator==** (const unordered_multimap< _Key1, _Tp1, _Hash1, _Pred1, _Alloc1 > &, const unordered_multimap< _Key1, _Tp1, _Hash1, _Pred1, _Alloc1 > &)

4.1029.1 Detailed Description

template<class _Key, class _Tp, class _Hash, class _Pred, class _Alloc>class std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >

A standard container composed of equivalent keys (possibly containing multiple of each key value) that associates values of another type with the keys.

Template Parameters

_Key	Type of key objects.
_Tp	Type of mapped objects.
_Hash	Hashing function object type, defaults to hash<_Value>.
_Pred	Predicate function object type, defaults to equal_to<_Value>.
_Alloc	Allocator type, defaults to std::allocator<std::pair<const _Key, _Tp>>.

Meets the requirements of a container, and unordered associative container

The resulting value type of the container is std::pair<const _Key, _Tp>.

Base is _Hashtable, dispatched at compile time via template alias __ummap_hashtable.

Definition at line 73 of file unordered_map.h.

4.1029.2 Member Typedef Documentation

4.1029.2.1 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::allocator_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::allocator_type

Public typedefs.

Definition at line 1263 of file unordered_map.h.

4.1029.2.2 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::const_iterator

Iterator-related typedefs.

Definition at line 1273 of file unordered_map.h.

4.1029.2.3 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::const_local_iterator

Iterator-related typedefs.

Definition at line 1275 of file unordered_map.h.

4.1029.2.4 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_pointer std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::const_pointer

Iterator-related typedefs.

Definition at line 1269 of file unordered_map.h.

4.1029.2.5 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_reference std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::const_reference

Iterator-related typedefs.

Definition at line 1271 of file unordered_map.h.

4.1029.2.6 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::difference_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::difference_type

Iterator-related typedefs.

Definition at line 1277 of file unordered_map.h.

4.1029.2.7 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::hasher std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::hasher

Public typedefs.

Definition at line 1261 of file unordered_map.h.

4.1029.2.8 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::iterator

Iterator-related typedefs.

Definition at line 1272 of file unordered_map.h.

4.1029.2.9 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::key_equal std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::key_equal

Public typedefs.

Definition at line 1262 of file unordered_map.h.

4.1029.2.10 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::key_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::key_type

Public typedefs.

Definition at line 1258 of file unordered_map.h.

4.1029.2.11 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::local_iterator

Iterator-related typedefs.

Definition at line 1274 of file unordered_map.h.

4.1029.2.12 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::mapped_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::mapped_type

Public typedefs.

Definition at line 1260 of file unordered_map.h.

4.1029.2.13 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::pointer std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::pointer

Iterator-related typedefs.

Definition at line 1268 of file unordered_map.h.

4.1029.2.14 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::reference std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::reference

Iterator-related typedefs.

Definition at line 1270 of file unordered_map.h.

4.1029.2.15 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::size_type

Iterator-related typedefs.

Definition at line 1276 of file unordered_map.h.

4.1029.2.16 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::value_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::value_type

Public typedefs.

Definition at line 1259 of file unordered_map.h.

4.1029.3 Constructor & Destructor Documentation

4.1029.3.1 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap ( ) [default]

Default constructor.

4.1029.3.2 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (size_type *__n,* const hasher & *__hf* = hasher (), const key_equal & *__eql* = key_equal (), const allocator_type & *__a* = allocator_type ()) [inline], [explicit]

Default constructor creates no elements.

Parameters

__n	Mnimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Definition at line 1297 of file unordered_map.h.

4.1029.3.3 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename _InputIterator > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (_InputIterator *__first,* _InputIterator *__last,* size_type *__n =* 0, const hasher & *__hf =* hasher (), const key_equal & *__eql =* key_equal (), const allocator_type & *__a =* allocator_type ()) [inline]

Builds an unordered_multimap from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_multimap consisting of copies of the elements from [__first,__last). This is linear in N (where N is distance(__first,__last)).

Definition at line 1318 of file unordered_map.h.

4.1029.3.4 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &) [default]

Copy constructor.

4.1029.3.5 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &&) [default]

Move constructor.

4.1029.3.6 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (const allocator_type & *__a*) [inline], [explicit]

Creates an unordered_multimap with no elements.

Parameters

__a	An allocator object.

Definition at line 1337 of file unordered_map.h.

4.1029.3.7 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::unordered_multimap (initializer_list< value_type > *__l,* size_type *__n =* 0, const hasher & *__hf =* hasher (), const key_equal & *__eql =* key_equal (), const allocator_type & *__a =* allocator_type ()) [inline]

Builds an unordered_multimap from an initializer_list.

Parameters

__l	An initializer_list.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_multimap consisting of copies of the elements in the list. This is linear in N (where N is *__l.size()*).

Definition at line 1372 of file unordered_map.h.

4.1029.4 Member Function Documentation

4.1029.4.1 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the unordered_multimap.

Definition at line 1470 of file unordered_map.h.

4.1029.4.2 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_multimap.

Definition at line 1479 of file unordered_map.h.

4.1029.4.3 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::begin (size_type __n) [inline]

Returns a read/write iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read/write local iterator.

Definition at line 1895 of file unordered_map.h.

4.1029.4.4 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::begin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1906 of file unordered_map.h.

4.1029.4.5 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::bucket_count ( ) const [inline], [noexcept]

Returns the number of buckets of the unordered_multimap.

Definition at line 1862 of file unordered_map.h.

4.1029.4.6 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_multimap.

Definition at line 1483 of file unordered_map.h.

4.1029.4.7 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::cbegin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1910 of file unordered_map.h.

4.1029.4.8 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_multimap.

Definition at line 1505 of file unordered_map.h.

4.1029.4.9 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::cend (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1936 of file unordered_map.h.

4.1029.4.10 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in an unordered_multimap. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1734 of file unordered_map.h.

4.1029.4.11 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements.

Parameters

__x	Key to count.

Returns

Number of elements with specified key.

Definition at line 1828 of file unordered_map.h.

4.1029.4.12 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename... _Args> iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::emplace (_Args &&... *__args*) [inline]

Attempts to build and insert a std::pair into the unordered_multimap.

Parameters

__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the inserted pair.

This function attempts to build and insert a (key, value) pair into the unordered_multimap.

Insertion requires amortized constant time.

Definition at line 1528 of file unordered_map.h.

4.1029.4.13 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename... _Args> iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::emplace_hint (const_iterator *__pos,* _Args &&... *__args*) [inline]

Attempts to build and insert a std::pair into the unordered_multimap.

Parameters

__pos	An iterator that serves as a hint as to where the pair should be inserted.
__args	Arguments used to generate a new pair instance (see std::piecewise_contruct for passing arguments to each part of the pair constructor).

Returns

An iterator that points to the element with key of the std::pair built from *__args*.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 1555 of file unordered_map.h.

4.1029.4.14 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > bool std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the unordered_multimap is empty.

Definition at line 1450 of file unordered_map.h.

4.1029.4.15 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the unordered_multimap.

Definition at line 1492 of file unordered_map.h.

4.1029.4.16 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_multimap.

Definition at line 1501 of file unordered_map.h.

4.1029.4.17 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::end (size_type __n) [inline]

Returns a read/write iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read/write local iterator.

Definition at line 1921 of file unordered_map.h.

4.1029.4.18 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::end (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1932 of file unordered_map.h.

4.1029.4.19 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::pair<iterator, iterator> std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::equal_range (const key_type & __x) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

Definition at line 1850 of file unordered_map.h.

4.1029.4.20 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > std::pair<const_iterator, const_iterator> std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::equal_range (const key_type & __x) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

Definition at line 1854 of file unordered_map.h.

4.1029.4.21 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from an unordered_multimap.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1684 of file unordered_map.h.

4.1029.4.22 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from an unordered_multimap.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1689 of file unordered_map.h.

4.1029.4.23 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of elements to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from an unordered_multimap. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1705 of file unordered_map.h.

4.1029.4.24 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Erases a [__first,__last) range of elements from an unordered_multimap.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from an unordered_multimap. Note that this function only erases the elements, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1724 of file unordered_map.h.

4.1029.4.25 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) [inline]

Tries to locate an element in an unordered_multimap.

Parameters

__x	Key to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1814 of file unordered_map.h.

4.1029.4.26 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) const [inline]

Tries to locate an element in an unordered_multimap.

Parameters

__x	Key to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1818 of file unordered_map.h.

4.1029.4.27 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > allocator_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the allocator object used by the unordered_multimap.

Definition at line 1443 of file unordered_map.h.

4.1029.4.28 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > hasher std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::hash_function ( ) const [inline]

Returns the hash functor object with which the unordered_multimap was constructed.

Definition at line 1790 of file unordered_map.h.

4.1029.4.29 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const value_type & *__x*) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted pair.

Insertion requires amortized constant time.

Definition at line 1569 of file unordered_map.h.

4.1029.4.30 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (value_type && *__x*) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted pair.

Insertion requires amortized constant time.

Definition at line 1573 of file unordered_map.h.

References std::move().

4.1029.4.31 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair&&>::value, iterator> std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (_Pair && __x) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the inserted pair.

Insertion requires amortized constant time.

Definition at line 1578 of file unordered_map.h.

4.1029.4.32 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, const value_type & *__x*) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 1603 of file unordered_map.h.

4.1029.4.33 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, value_type && *__x*) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 1609 of file unordered_map.h.

References std::move().

4.1029.4.34 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename _Pair > __enable_if_t<is_constructible<value_type, _Pair&&>::value, iterator> std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, _Pair && *__x*) [inline]

Inserts a std::pair into the unordered_multimap.

Parameters

__hint	An iterator that serves as a hint as to where the pair should be inserted.
__x	Pair to be inserted (see std::make_pair for easy creation of pairs).

Returns

An iterator that points to the element with key of *__x* (may or may not be the pair passed in).

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

See https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints for more on *hinting*.

Insertion requires amortized constant time.

Definition at line 1614 of file unordered_map.h.

4.1029.4.35 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > template<typename _InputIterator > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (_InputIterator *__first*, _InputIterator *__last*) [inline]

A template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 1629 of file unordered_map.h.

4.1029.4.36 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::insert (initializer_list< value_type > *__l*) [inline]

Attempts to insert a list of elements into the unordered_multimap.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 1641 of file unordered_map.h.

4.1029.4.37 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > key_equal std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::key_eq ( ) const [inline]

Returns the key comparison object with which the unordered_multimap was constructed.

Definition at line 1796 of file unordered_map.h.

4.1029.4.38 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > float std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::load_factor ( ) const [inline], [noexcept]

Returns the average number of elements per bucket.

Definition at line 1944 of file unordered_map.h.

4.1029.4.39 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::max_bucket_count ( ) const [inline], [noexcept]

Returns the maximum number of buckets of the unordered_multimap.

Definition at line 1867 of file unordered_map.h.

4.1029.4.40 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > float std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::max_load_factor ( ) const [inline], [noexcept]

Returns a positive number that the unordered_multimap tries to keep the load factor less than or equal to.

Definition at line 1950 of file unordered_map.h.

4.1029.4.41 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::max_load_factor (float __z) [inline]

Change the unordered_multimap maximum load factor.

Parameters

__z	The new maximum load factor.

Definition at line 1958 of file unordered_map.h.

4.1029.4.42 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the unordered_multimap.

Definition at line 1460 of file unordered_map.h.

4.1029.4.43 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > unordered_multimap& std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &) [default]

Copy assignment operator.

4.1029.4.44 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > unordered_multimap& std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &&) [default]

Move assignment operator.

4.1029.4.45 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > unordered_multimap& std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Unordered_multimap list assignment operator.

Parameters

__l	An initializer_list.

This function fills an unordered_multimap with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the unordered_multimap and that the resulting unordered_multimap's size is the same as the number of elements assigned.

Definition at line 1435 of file unordered_map.h.

4.1029.4.46 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::rehash (size_type *__n*) [inline]

May rehash the unordered_multimap.

Parameters

__n	The new number of buckets.

Rehash will occur only if the new number of buckets respect the unordered_multimap maximum load factor.

Definition at line 1969 of file unordered_map.h.

4.1029.4.47 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::reserve (size_type *__n*) [inline]

Prepare the unordered_multimap for a specified number of elements.

Parameters

__n	Number of elements required.

Same as rehash(ceil(n / max_load_factor())).

Definition at line 1980 of file unordered_map.h.

4.1029.4.48 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the unordered_multimap.

Definition at line 1455 of file unordered_map.h.

4.1029.4.49 template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc > void std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >::swap (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > & *__x*) [inline], [noexcept]

Swaps data with another unordered_multimap.

Parameters

__x	An unordered_multimap of the same element and allocator types.

This exchanges the elements between two unordered_multimap in constant time. Note that the global std::swap() function is specialized such that std::swap(m1,m2) will feed to this function.

Definition at line 1748 of file unordered_map.h.

The documentation for this class was generated from the following file:

- unordered_map.h

4.1030 std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator >:



Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, unordered_multimap > **const_iterator**
- typedef __gnu_debug::_Safe_local_iterator < _Base_const_local_iterator, unordered_multimap > **const_local_iterator**
- typedef _Base::hasher **hasher**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, unordered_multimap > **iterator**
- typedef _Base::key_equal **key_equal**
- typedef _Base::key_type **key_type**
- typedef __gnu_debug::_Safe_local_iterator < _Base_local_iterator, unordered_multimap > **local_iterator**
- typedef _Base::size_type **size_type**
- typedef _Base::value_type **value_type**

Public Member Functions

- **unordered_multimap** (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())

- template<typename _InputIterator >
  unordered_multimap (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_multimap** (const unordered_multimap &)=default
- **unordered_multimap** (const _Base &__x)
- **unordered_multimap** (unordered_multimap &&)=default
- **unordered_multimap** (const allocator_type &__a)
- **unordered_multimap** (const unordered_multimap &__umap, const allocator_type &__a)
- **unordered_multimap** (unordered_multimap &&__umap, const allocator_type &__a)
- **unordered_multimap** (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_multimap** (size_type __n, const allocator_type &__a)
- **unordered_multimap** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_multimap (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_multimap (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_multimap** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_multimap** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void **_M_swap** (_Safe_container &__x) noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- local_iterator **begin** (size_type __b)
- const_local_iterator **begin** (size_type __b) const
- size_type **bucket_size** (size_type __b) const
- const_iterator **cbegin** () const noexcept
- const_local_iterator **cbegin** (size_type __b) const
- const_iterator **cend** () const noexcept
- const_local_iterator **cend** (size_type __b) const
- void **clear** () noexcept
- template<typename... _Args>
  iterator **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __hint, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- local_iterator **end** (size_type __b)
- const_local_iterator **end** (size_type __b) const
- std::pair< iterator, iterator > **equal_range** (const key_type &__key)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- iterator **erase** (const_iterator __it)
- iterator **erase** (iterator __it)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const

- iterator **insert** (const value_type &__obj)
- iterator **insert** (value_type &&__x)
- iterator **insert** (const_iterator __hint, const value_type &__obj)
- iterator **insert** (const_iterator __hint, value_type &&__x)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type> iterator **insert** (_Pair &&__obj)
- template<typename _Pair , typename = typename std::enable_if<std::is_constructible<value_type, _Pair&&>::value>::type> iterator **insert** (const_iterator __hint, _Pair &&__obj)
- void **insert** (std::initializer_list< value_type > __l)
- template<typename _InputIterator > void **insert** (_InputIterator __first, _InputIterator __last)
- float **max_load_factor** () const noexcept
- void **max_load_factor** (float __f)
- unordered_multimap & **operator=** (const unordered_multimap &)=default
- unordered_multimap & **operator=** (unordered_multimap &&)=default
- unordered_multimap & **operator=** (initializer_list< value_type > __l)
- void **swap** (unordered_multimap &__x) noexcept(noexcept(declval< _Base & >().swap(__x)))

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_invalidate_if (_Predicate __pred)
- void _M_invalidate_local_if (_Predicate __pred)
- void **_M_invalidate_locals** ()
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT > class **::__gnu_debug::_Safe_iterator**
- template<typename _ItT , typename _SeqT > class **::__gnu_debug::_Safe_local_iterator**

4.1030.1 Detailed Description

template<typename _Key, typename _Tp, typename _Hash, typename _Pred, typename _Allocator>class std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator >

Class std::unordered_multimap with safety/checking/debug instrumentation.

Definition at line 44 of file debug/unordered_map.

4.1030.2 Member Function Documentation

4.1030.2.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

4.1030.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.1030.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1030.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.1030.2.5 void __gnu_debug::_Safe_unordered_container< unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > >::_M_invalidate_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1030.2.6 void __gnu_debug::_Safe_unordered_container< unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > >::_M_invalidate_local_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all local iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal local iterators nested in the safe ones.

4.1030.2.7 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.1030.2.8 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & __x) [protected], [noexcept], [inherited]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1030.2.9 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1030.3 Member Data Documentation

4.1030.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1030.3.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators [inherited]

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.1030.3.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1030.3.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators [inherited]

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.1030.3.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/unordered_map

4.1031 std::unordered_multiset< _Value, _Hash, _Pred, _Alloc > Class Template Reference

Public Types

- typedef _Hashtable::key_type key_type

- typedef _Hashtable::value_type value_type
- typedef _Hashtable::hasher hasher
- typedef _Hashtable::key_equal key_equal
- typedef _Hashtable::allocator_type allocator_type

- typedef _Hashtable::pointer pointer
- typedef _Hashtable::const_pointer const_pointer
- typedef _Hashtable::reference reference
- typedef _Hashtable::const_reference const_reference
- typedef _Hashtable::iterator iterator
- typedef _Hashtable::const_iterator const_iterator
- typedef _Hashtable::local_iterator local_iterator
- typedef _Hashtable::const_local_iterator const_local_iterator
- typedef _Hashtable::size_type size_type
- typedef _Hashtable::difference_type difference_type

Public Member Functions

- unordered_multiset ()=default
- unordered_multiset (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator >
  unordered_multiset (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- unordered_multiset (const unordered_multiset &)=default
- unordered_multiset (unordered_multiset &&)=default
- unordered_multiset (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- unordered_multiset (const allocator_type &__a)
- **unordered_multiset** (const unordered_multiset &__umset, const allocator_type &__a)
- **unordered_multiset** (unordered_multiset &&__umset, const allocator_type &__a)
- **unordered_multiset** (size_type __n, const allocator_type &__a)
- **unordered_multiset** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_multiset (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_multiset (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_multiset** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_multiset** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- size_type **bucket** (const key_type &__key) const
- size_type bucket_count () const noexcept
- size_type **bucket_size** (size_type __n) const
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- size_type count (const key_type &__x) const
- template<typename... _Args>
  iterator emplace (_Args &&...__args)

- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- hasher hash_function () const
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_equal key_eq () const
- float load_factor () const noexcept
- size_type max_bucket_count () const noexcept
- float max_load_factor () const noexcept
- void max_load_factor (float __z)
- size_type max_size () const noexcept
- unordered_multiset & operator= (const unordered_multiset &)=default
- unordered_multiset & operator= (unordered_multiset &&)=default
- unordered_multiset & operator= (initializer_list< value_type > __l)
- void rehash (size_type __n)
- void reserve (size_type __n)
- size_type size () const noexcept
- void swap (unordered_multiset &__x) noexcept(noexcept(_M_h.swap(__x._M_h)))

- iterator begin () noexcept
- const_iterator begin () const noexcept

- iterator end () noexcept
- const_iterator end () const noexcept

- iterator insert (const value_type &__x)
- iterator insert (value_type &&__x)

- iterator insert (const_iterator __hint, const value_type &__x)
- iterator insert (const_iterator __hint, value_type &&__x)

- iterator erase (const_iterator __position)
- iterator erase (iterator __position)

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const

- local_iterator begin (size_type __n)
- const_local_iterator begin (size_type __n) const
- const_local_iterator cbegin (size_type __n) const

- local_iterator end (size_type __n)
- const_local_iterator end (size_type __n) const
- const_local_iterator cend (size_type __n) const

Friends

- template<typename _Value1 , typename _Hash1 , typename _Pred1 , typename _Alloc1 >
  bool **operator==** (const unordered_multiset< _Value1, _Hash1, _Pred1, _Alloc1 > &, const unordered_multiset< _Value1, _Hash1, _Pred1, _Alloc1 > &)

4.1031.1 Detailed Description

template<class _Value, class _Hash, class _Pred, class _Alloc>class std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >

A standard container composed of equivalent keys (possibly containing multiple of each key value) in which the elements' keys are the elements themselves.

Template Parameters

_Value	Type of key objects.
_Hash	Hashing function object type, defaults to hash<_Value>.
_Pred	Predicate function object type, defaults to equal_to<_Value>.
_Alloc	Allocator type, defaults to allocator<_Key>.

Meets the requirements of a container, and unordered associative container

Base is _Hashtable, dispatched at compile time via template alias __umset_hashtable.

Definition at line 70 of file unordered_set.h.

4.1031.2 Member Typedef Documentation

4.1031.2.1 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::allocator_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::allocator_type

Public typedefs.

Definition at line 925 of file unordered_set.h.

4.1031.2.2 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::const_iterator

Iterator-related typedefs.

Definition at line 935 of file unordered_set.h.

4.1031.2.3 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::const_local_iterator

Iterator-related typedefs.

Definition at line 937 of file unordered_set.h.

4.1031.2.4 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_pointer std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::const_pointer

Iterator-related typedefs.

Definition at line 931 of file unordered_set.h.

4.1031.2.5 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::const_reference std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::const_reference

Iterator-related typedefs.

Definition at line 933 of file unordered_set.h.

4.1031.2.6 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::difference_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::difference_type

Iterator-related typedefs.

Definition at line 939 of file unordered_set.h.

4.1031.2.7 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::hasher std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::hasher

Public typedefs.

Definition at line 923 of file unordered_set.h.

4.1031.2.8 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::iterator

Iterator-related typedefs.

Definition at line 934 of file unordered_set.h.

4.1031.2.9 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::key_equal std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::key_equal

Public typedefs.

Definition at line 924 of file unordered_set.h.

4.1031.2.10 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::key_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::key_type

Public typedefs.

Definition at line 921 of file unordered_set.h.

4.1031.2.11 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::local_iterator

Iterator-related typedefs.

Definition at line 936 of file unordered_set.h.

4.1031.2.12 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::pointer std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::pointer

Iterator-related typedefs.

Definition at line 930 of file unordered_set.h.

4.1031.2.13 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::reference std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::reference

Iterator-related typedefs.

Definition at line 932 of file unordered_set.h.

4.1031.2.14 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::size_type

Iterator-related typedefs.

Definition at line 938 of file unordered_set.h.

4.1031.2.15 template<class _Value , class _Hash , class _Pred , class _Alloc > typedef _Hashtable::value_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::value_type

Public typedefs.

Definition at line 922 of file unordered_set.h.

4.1031.3 Constructor & Destructor Documentation

4.1031.3.1 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset ( ) [default]

Default constructor.

4.1031.3.2 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (size_type *__n,* const hasher & *__hf* = hasher (), const key_equal & *__eql* = key_equal (), const allocator_type & *__a* = allocator_type ()) [inline], [explicit]

Default constructor creates no elements.

Parameters

__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Definition at line 959 of file unordered_set.h.

4.1031.3.3 template<class _Value , class _Hash , class _Pred , class _Alloc > template<typename _InputIterator > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (_InputIterator *__first,* _InputIterator *__last,* size_type *__n* = 0, const hasher & *__hf* = hasher (), const key_equal & *__eql* = key_equal (), const allocator_type & *__a* = allocator_type ()) [inline]

Builds an unordered_multiset from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_multiset consisting of copies of the elements from [__first,__last). This is linear in N (where N is distance(__first,__last)).

Definition at line 980 of file unordered_set.h.

4.1031.3.4 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &) [default]

Copy constructor.

4.1031.3.5 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &&) [default]

Move constructor.

4.1031.3.6 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (initializer_list< value_type > __l, size_type __n = 0, const hasher & __hf = hasher (), const key_equal & __eql = key_equal (), const allocator_type & __a = allocator_type ()) [inline]

Builds an unordered_multiset from an initializer_list.

Parameters

__l	An initializer_list.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_multiset consisting of copies of the elements in the list. This is linear in N (where N is *__l.size()*).

Definition at line 1005 of file unordered_set.h.

4.1031.3.7 template<class _Value , class _Hash , class _Pred , class _Alloc > std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::unordered_multiset (const allocator_type & __a) [inline], [explicit]

Creates an unordered_multiset with no elements.

Parameters

__a	An allocator object.

Definition at line 1026 of file unordered_set.h.

4.1031.4 Member Function Documentation

4.1031.4.1 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_multiset.

Definition at line 1133 of file unordered_set.h.

4.1031.4.2 template<class _Value , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_multiset.

Definition at line 1137 of file unordered_set.h.

4.1031.4.3 template<class _Value , class _Hash , class _Pred , class _Alloc > local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::begin (size_type __n) [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1530 of file unordered_set.h.

4.1031.4.4 template<class _Value , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::begin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1534 of file unordered_set.h.

4.1031.4.5 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::bucket_count ( ) const [inline], [noexcept]

Returns the number of buckets of the unordered_multiset.

Definition at line 1496 of file unordered_set.h.

4.1031.4.6 template<class _Value , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_multiset.

Definition at line 1160 of file unordered_set.h.

4.1031.4.7 template<class _Value , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::cbegin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1538 of file unordered_set.h.

4.1031.4.8 template<class _Value , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_multiset.

Definition at line 1168 of file unordered_set.h.

4.1031.4.9 template<class _Value , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::cend (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1558 of file unordered_set.h.

4.1031.4.10 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in an unordered_multiset.

Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1369 of file unordered_set.h.

4.1031.4.11 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::count (const key_type & *__x*) const [inline]

Finds the number of elements.

Parameters

__x	Element to located.

Returns

Number of elements with specified key.

Definition at line 1462 of file unordered_set.h.

4.1031.4.12 template<class _Value , class _Hash , class _Pred , class _Alloc > template<typename... _Args> iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::emplace (_Args &&... *__args*) [inline]

Builds and insert an element into the unordered_multiset.

Parameters

__args	Arguments used to generate an element.

Returns

An iterator that points to the inserted element.

Insertion requires amortized constant time.

Definition at line 1182 of file unordered_set.h.

4.1031.4.13 template<class _Value , class _Hash , class _Pred , class _Alloc > template<typename... _Args> iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::emplace_hint (const_iterator *__pos,* _Args &&... *__args*) [inline]

Inserts an element into the unordered_multiset.

Parameters

__pos	An iterator that serves as a hint as to where the element should be inserted.
__args	Arguments used to generate the element to be inserted.

Returns

An iterator that points to the inserted element.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant time.

Definition at line 1204 of file unordered_set.h.

4.1031.4.14 template<class _Value , class _Hash , class _Pred , class _Alloc > bool std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the unordered_multiset is empty.

Definition at line 1112 of file unordered_set.h.

4.1031.4.15 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::end ( ) [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_multiset.

Definition at line 1147 of file unordered_set.h.

4.1031.4.16 template<class _Value , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_multiset.

Definition at line 1151 of file unordered_set.h.

4.1031.4.17 template<class _Value , class _Hash , class _Pred , class _Alloc > local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::end (size_type __n) [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1550 of file unordered_set.h.

4.1031.4.18 template<class _Value , class _Hash , class _Pred , class _Alloc > const_local_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::end (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 1554 of file unordered_set.h.

4.1031.4.19 template<class _Value , class _Hash , class _Pred , class _Alloc > std::pair<iterator, iterator> std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::equal_range (const key_type & *__x*) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

Definition at line 1484 of file unordered_set.h.

4.1031.4.20 template<class _Value , class _Hash , class _Pred , class _Alloc > std::pair<const_iterator, const_iterator> std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::equal_range (const key_type & *__x*) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

Definition at line 1488 of file unordered_set.h.

4.1031.4.21 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from an unordered_multiset.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_multiset.

Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1315 of file unordered_set.h.

4.1031.4.22 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from an unordered_multiset.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_multiset.

Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1320 of file unordered_set.h.

4.1031.4.23 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from an unordered_multiset.

Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1338 of file unordered_set.h.

4.1031.4.24 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Erases a [__first,__last) range of elements from an unordered_multiset.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from an unordered_multiset.

Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1358 of file unordered_set.h.

4.1031.4.25 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) [inline]

Tries to locate an element in an unordered_multiset.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1448 of file unordered_set.h.

4.1031.4.26 template<class _Value , class _Hash , class _Pred , class _Alloc > const_iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::find (const key_type & *__x*) const [inline]

Tries to locate an element in an unordered_multiset.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 1452 of file unordered_set.h.

4.1031.4.27 template<class _Value , class _Hash , class _Pred , class _Alloc > allocator_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the allocator object used by the unordered_multiset.

Definition at line 1105 of file unordered_set.h.

4.1031.4.28 template<class _Value , class _Hash , class _Pred , class _Alloc > hasher std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::hash_function ( ) const [inline]

Returns the hash functor object with which the unordered_multiset was constructed.

Definition at line 1424 of file unordered_set.h.

4.1031.4.29 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (const value_type & *__x*) [inline]

Inserts an element into the unordered_multiset.

Parameters

__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

Insertion requires amortized constant time.

Definition at line 1216 of file unordered_set.h.

4.1031.4.30 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (value_type && __x) [inline]

Inserts an element into the unordered_multiset.

Parameters

__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

Insertion requires amortized constant time.

Definition at line 1220 of file unordered_set.h.

References std::move().

4.1031.4.31 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, const value_type & *__x*) [inline]

Inserts an element into the unordered_multiset.

Parameters

__hint	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant.

Definition at line 1242 of file unordered_set.h.

4.1031.4.32 template<class _Value , class _Hash , class _Pred , class _Alloc > iterator std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, value_type && *__x*) [inline]

Inserts an element into the unordered_multiset.

Parameters

__hint	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the inserted element.

Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant.

Definition at line 1246 of file unordered_set.h.

References std::move().

4.1031.4.33 template<class _Value , class _Hash , class _Pred , class _Alloc > template<typename _InputIterator > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (_InputIterator *__first,* _InputIterator *__last*) [inline]

A template function that inserts a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 1260 of file unordered_set.h.

4.1031.4.34 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::insert (initializer_list< value_type > __l) [inline]

Inserts a list of elements into the unordered_multiset.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 1271 of file unordered_set.h.

4.1031.4.35 template<class _Value , class _Hash , class _Pred , class _Alloc > key_equal std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::key_eq ( ) const [inline]

Returns the key comparison object with which the unordered_multiset was constructed.

Definition at line 1430 of file unordered_set.h.

4.1031.4.36 template<class _Value , class _Hash , class _Pred , class _Alloc > float std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::load_factor ( ) const [inline], [noexcept]

Returns the average number of elements per bucket.

Definition at line 1566 of file unordered_set.h.

4.1031.4.37 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::max_bucket_count ( ) const [inline], [noexcept]

Returns the maximum number of buckets of the unordered_multiset.

Definition at line 1501 of file unordered_set.h.

4.1031.4.38 template<class _Value , class _Hash , class _Pred , class _Alloc > float std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::max_load_factor ( ) const [inline], [noexcept]

Returns a positive number that the unordered_multiset tries to keep the load factor less than or equal to.

Definition at line 1572 of file unordered_set.h.

4.1031.4.39 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::max_load_factor (float __z) [inline]

Change the unordered_multiset maximum load factor.

Parameters

__z	The new maximum load factor.

Definition at line 1580 of file unordered_set.h.

4.1031.4.40 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the maximum size of the unordered_multiset.

Definition at line 1122 of file unordered_set.h.

4.1031.4.41 template<class _Value , class _Hash , class _Pred , class _Alloc > unordered_multiset& std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::operator= (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &) [default]

Copy assignment operator.

4.1031.4.42 template<class _Value , class _Hash , class _Pred , class _Alloc > unordered_multiset& std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::operator= (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &&) [default]

Move assignment operator.

4.1031.4.43 template<class _Value , class _Hash , class _Pred , class _Alloc > unordered_multiset& std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Unordered_multiset list assignment operator.

Parameters

__l	An initializer_list.

This function fills an unordered_multiset with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the unordered_multiset and that the resulting unordered_multiset's size is the same as the number of elements assigned.

Definition at line 1097 of file unordered_set.h.

4.1031.4.44 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::rehash (size_type *__n*) [inline]

May rehash the unordered_multiset.

Parameters

__n	The new number of buckets.

Rehash will occur only if the new number of buckets respect the unordered_multiset maximum load factor.

Definition at line 1591 of file unordered_set.h.

4.1031.4.45 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::reserve (size_type *__n*) [inline]

Prepare the unordered_multiset for a specified number of elements.

Parameters

__n	Number of elements required.

Same as rehash(ceil(n / max_load_factor())).

Definition at line 1602 of file unordered_set.h.

4.1031.4.46 template<class _Value , class _Hash , class _Pred , class _Alloc > size_type std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the unordered_multiset.

Definition at line 1117 of file unordered_set.h.

4.1031.4.47 template<class _Value , class _Hash , class _Pred , class _Alloc > void std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >::swap (unordered_multiset< _Value, _Hash, _Pred, _Alloc > & __x) [inline], [noexcept]

Swaps data with another unordered_multiset.

Parameters

__x	An unordered_multiset of the same element and allocator types.

This exchanges the elements between two sets in constant time. Note that the global std::swap() function is specialized such that std::swap(s1,s2) will feed to this function.

Definition at line 1382 of file unordered_set.h.

The documentation for this class was generated from the following file:

- unordered_set.h

4.1032 std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator >:



Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, unordered_multiset > **const_iterator**
- typedef __gnu_debug::_Safe_local_iterator < _Base_const_local_iterator, unordered_multiset > **const_local_iterator**
- typedef _Base::hasher **hasher**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, unordered_multiset > **iterator**
- typedef _Base::key_equal **key_equal**
- typedef _Base::key_type **key_type**

- typedef __gnu_debug::_Safe_local_iterator < _Base_local_iterator, unordered_multiset > **local_iterator**
- typedef _Base::size_type **size_type**
- typedef _Base::value_type **value_type**

Public Member Functions

- **unordered_multiset** (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator > **unordered_multiset** (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_multiset** (const unordered_multiset &)=default
- **unordered_multiset** (const _Base &__x)
- **unordered_multiset** (unordered_multiset &&)=default
- **unordered_multiset** (const allocator_type &__a)
- **unordered_multiset** (const unordered_multiset &__uset, const allocator_type &__a)
- **unordered_multiset** (unordered_multiset &&__uset, const allocator_type &__a)
- **unordered_multiset** (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_multiset** (size_type __n, const allocator_type &__a)
- **unordered_multiset** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator > **unordered_multiset** (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator > **unordered_multiset** (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_multiset** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_multiset** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void **_M_swap** (_Safe_container &__x) noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- local_iterator **begin** (size_type __b)
- const_local_iterator **begin** (size_type __b) const
- size_type **bucket_size** (size_type __b) const
- const_iterator **cbegin** () const noexcept
- const_local_iterator **cbegin** (size_type __b) const
- const_iterator **cend** () const noexcept
- const_local_iterator **cend** (size_type __b) const
- void **clear** () noexcept
- template<typename... _Args> iterator **emplace** (_Args &&...__args)
- template<typename... _Args> iterator **emplace_hint** (const_iterator __hint, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept

- local_iterator **end** (size_type __b)
- const_local_iterator **end** (size_type __b) const
- std::pair< iterator, iterator > **equal_range** (const key_type &__key)
- std::pair< const_iterator, const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- iterator **erase** (const_iterator __it)
- iterator **erase** (iterator __it)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const
- iterator **insert** (const value_type &__obj)
- iterator **insert** (const_iterator __hint, const value_type &__obj)
- iterator **insert** (value_type &&__obj)
- iterator **insert** (const_iterator __hint, value_type &&__obj)
- void **insert** (std::initializer_list< value_type > __l)
- template<typename _InputIterator > void **insert** (_InputIterator __first, _InputIterator __last)
- float **max_load_factor** () const noexcept
- void **max_load_factor** (float __f)
- unordered_multiset & **operator=** (const unordered_multiset &)=default
- unordered_multiset & **operator=** (unordered_multiset &&)=default
- unordered_multiset & **operator=** (initializer_list< value_type > __l)
- void **swap** (unordered_multiset &__x) noexcept(noexcept(declval< _Base & >().swap(__x)))

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_invalidate_if (_Predicate __pred)
- void _M_invalidate_local_if (_Predicate __pred)
- void **_M_invalidate_locals** ()
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**
- template<typename _ItT , typename _SeqT >
  class **::__gnu_debug::_Safe_local_iterator**

4.1032.1 Detailed Description

template<typename _Key, typename _Hash, typename _Pred, typename _Allocator>class std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator >

Class std::unordered_multiset with safety/checking/debug instrumentation.

Definition at line 42 of file debug/unordered_set.

4.1032.2 Member Function Documentation

4.1032.2.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

4.1032.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.1032.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1032.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.1032.2.5 void __gnu_debug::_Safe_unordered_container< unordered_multiset< _Value, _Hash, _Pred, _Alloc > >::_M_invalidate_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1032.2.6 void __gnu_debug::_Safe_unordered_container< unordered_multiset< _Value, _Hash, _Pred, _Alloc > >::_M_invalidate_local_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all local iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal local iterators nested in the safe ones.

4.1032.2.7 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.1032.2.8 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & __x) [protected], [noexcept], [inherited]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1032.2.9 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1032.3 Member Data Documentation

4.1032.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1032.3.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators [inherited]

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.1032.3.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1032.3.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators [inherited]

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.1032.3.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/unordered_set

4.1033 std::unordered_set< _Value, _Hash, _Pred, _Alloc > Class Template Reference

Public Types

- typedef _Hashtable::key_type key_type
- typedef _Hashtable::value_type value_type
- typedef _Hashtable::hasher hasher
- typedef _Hashtable::key_equal key_equal
- typedef _Hashtable::allocator_type allocator_type

- typedef _Hashtable::pointer pointer
- typedef _Hashtable::const_pointer const_pointer
- typedef _Hashtable::reference reference
- typedef _Hashtable::const_reference const_reference
- typedef _Hashtable::iterator iterator
- typedef _Hashtable::const_iterator const_iterator
- typedef _Hashtable::local_iterator local_iterator
- typedef _Hashtable::const_local_iterator const_local_iterator
- typedef _Hashtable::size_type size_type
- typedef _Hashtable::difference_type difference_type

Public Member Functions

- unordered_set ()=default
- unordered_set (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator >
  unordered_set (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- unordered_set (const unordered_set &)=default
- unordered_set (unordered_set &&)=default
- unordered_set (const allocator_type &__a)
- **unordered_set** (const unordered_set &__uset, const allocator_type &__a)
- **unordered_set** (unordered_set &&__uset, const allocator_type &__a)
- unordered_set (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_set** (size_type __n, const allocator_type &__a)
- **unordered_set** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_set (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator >
  unordered_set (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_set** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_set** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- size_type **bucket** (const key_type &__key) const
- size_type bucket_count () const noexcept
- size_type **bucket_size** (size_type __n) const
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept

- void clear () noexcept
- size_type count (const key_type &__x) const
- template<typename... _Args>
  std::pair< iterator, bool > emplace (_Args &&...__args)
- template<typename... _Args>
  iterator emplace_hint (const_iterator __pos, _Args &&...__args)
- bool empty () const noexcept
- size_type erase (const key_type &__x)
- iterator erase (const_iterator __first, const_iterator __last)
- allocator_type get_allocator () const noexcept
- hasher hash_function () const
- template<typename _InputIterator >
  void insert (_InputIterator __first, _InputIterator __last)
- void insert (initializer_list< value_type > __l)
- key_equal key_eq () const
- float load_factor () const noexcept
- size_type max_bucket_count () const noexcept
- float max_load_factor () const noexcept
- void max_load_factor (float __z)
- size_type max_size () const noexcept
- unordered_set & operator= (const unordered_set &)=default
- unordered_set & operator= (unordered_set &&)=default
- unordered_set & operator= (initializer_list< value_type > __l)
- void rehash (size_type __n)
- void reserve (size_type __n)
- size_type size () const noexcept
- void swap (unordered_set &__x) noexcept(noexcept(_M_h.swap(__x._M_h)))

- iterator begin () noexcept
- const_iterator begin () const noexcept

- iterator end () noexcept
- const_iterator end () const noexcept

- std::pair< iterator, bool > insert (const value_type &__x)
- std::pair< iterator, bool > insert (value_type &&__x)

- iterator insert (const_iterator __hint, const value_type &__x)
- iterator insert (const_iterator __hint, value_type &&__x)

- iterator erase (const_iterator __position)
- iterator erase (iterator __position)

- iterator find (const key_type &__x)
- const_iterator find (const key_type &__x) const

- std::pair< iterator, iterator > equal_range (const key_type &__x)
- std::pair< const_iterator,
  const_iterator > equal_range (const key_type &__x) const

- local_iterator begin (size_type __n)
- const_local_iterator begin (size_type __n) const
- const_local_iterator cbegin (size_type __n) const

- local_iterator end (size_type __n)
- const_local_iterator end (size_type __n) const
- const_local_iterator cend (size_type __n) const

Friends

- template<typename _Value1 , typename _Hash1 , typename _Pred1 , typename _Alloc1 >
  bool **operator==** (const unordered_set< _Value1, _Hash1, _Pred1, _Alloc1 > &, const unordered_set< _Value1, _Hash1, _Pred1, _Alloc1 > &)

4.1033.1 Detailed Description

template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>>class std::unordered_set< _Value, _Hash, _Pred, _Alloc >

A standard container composed of unique keys (containing at most one of each key value) in which the elements' keys are the elements themselves.

Template Parameters

_Value	Type of key objects.
_Hash	Hashing function object type, defaults to hash<_Value>.
_Pred	Predicate function object type, defaults to equal_to<_Value>.
_Alloc	Allocator type, defaults to allocator<_Key>.

Meets the requirements of a container, and unordered associative container

Base is _Hashtable, dispatched at compile time via template alias __uset_hashtable.

Definition at line 97 of file unordered_set.h.

4.1033.2 Member Typedef Documentation

4.1033.2.1 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::allocator_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::allocator_type

Public typedefs.

Definition at line 110 of file unordered_set.h.

4.1033.2.2 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::const_iterator

Iterator-related typedefs.

Definition at line 120 of file unordered_set.h.

4.1033.2.3 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::const_local_iterator **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::const_local_iterator**

Iterator-related typedefs.

Definition at line 122 of file unordered_set.h.

4.1033.2.4 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::const_pointer **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::const_pointer**

Iterator-related typedefs.

Definition at line 116 of file unordered_set.h.

4.1033.2.5 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::const_reference **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::const_reference**

Iterator-related typedefs.

Definition at line 118 of file unordered_set.h.

4.1033.2.6 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::difference_type **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::difference_type**

Iterator-related typedefs.

Definition at line 124 of file unordered_set.h.

4.1033.2.7 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::hasher **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::hasher**

Public typedefs.

Definition at line 108 of file unordered_set.h.

4.1033.2.8 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::iterator **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::iterator**

Iterator-related typedefs.

Definition at line 119 of file unordered_set.h.

4.1033.2.9 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::key_equal **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::key_equal**

Public typedefs.

Definition at line 109 of file unordered_set.h.

4.1033.2.10 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::key_type **std::unordered_set**< _Value, _Hash, _Pred, _Alloc >**::key_type**

Public typedefs.

Definition at line 106 of file unordered_set.h.

4.1033.2.11 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::local_iterator

Iterator-related typedefs.

Definition at line 121 of file unordered_set.h.

4.1033.2.12 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::pointer std::unordered_set< _Value, _Hash, _Pred, _Alloc >::pointer

Iterator-related typedefs.

Definition at line 115 of file unordered_set.h.

4.1033.2.13 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::reference std::unordered_set< _Value, _Hash, _Pred, _Alloc >::reference

Iterator-related typedefs.

Definition at line 117 of file unordered_set.h.

4.1033.2.14 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::size_type

Iterator-related typedefs.

Definition at line 123 of file unordered_set.h.

4.1033.2.15 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> typedef _Hashtable::value_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::value_type

Public typedefs.

Definition at line 107 of file unordered_set.h.

4.1033.3 Constructor & Destructor Documentation

4.1033.3.1 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set ( ) [default]

Default constructor.

4.1033.3.2 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (size_type *__n*, const hasher & *__hf* = hasher(), const key_equal & *__eql* = key_equal(), const allocator_type & *__a* = allocator_type()) [inline], [explicit]

Default constructor creates no elements.

Parameters

__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Definition at line 145 of file unordered_set.h.

4.1033.3.3 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> template<typename _InputIterator > std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (_InputIterator *__first*, _InputIterator *__last*, size_type *__n* = 0, const hasher & *__hf* = hasher(), const key_equal & *__eql* = key_equal(), const allocator_type & *__a* = allocator_type()) [inline]

Builds an unordered_set from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_set consisting of copies of the elements from [__first,__last). This is linear in N (where N is distance(__first,__last)).

Definition at line 166 of file unordered_set.h.

4.1033.3.4 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (const unordered_set< _Value, _Hash, _Pred, _Alloc > &) [default]

Copy constructor.

4.1033.3.5 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (unordered_set< _Value, _Hash, _Pred, _Alloc > &&) [default]

Move constructor.

4.1033.3.6 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (const allocator_type & *__a*) [inline], [explicit]

Creates an unordered_set with no elements.

Parameters

__a	An allocator object.

Definition at line 185 of file unordered_set.h.

4.1033.3.7 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::unordered_set (initializer_list< value_type > __l, size_type __n = 0, const hasher & __hf = hasher (), const key_equal & __eql = key_equal (), const allocator_type & __a = allocator_type ()) [inline]

Builds an unordered_set from an initializer_list.

Parameters

__l	An initializer_list.
__n	Minimal initial number of buckets.
__hf	A hash functor.
__eql	A key equality functor.
__a	An allocator object.

Create an unordered_set consisting of copies of the elements in the list. This is linear in N (where N is *__l.size()*).

Definition at line 220 of file unordered_set.h.

4.1033.4 Member Function Documentation

4.1033.4.1 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_set.

Definition at line 319 of file unordered_set.h.

4.1033.4.2 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_set.

Definition at line 323 of file unordered_set.h.

4.1033.4.3 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::begin (size_type *__n*) [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 737 of file unordered_set.h.

4.1033.4.4 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::begin (size_type *__n*) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 741 of file unordered_set.h.

4.1033.4.5 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::bucket_count ( ) const [inline], [noexcept]

Returns the number of buckets of the unordered_set.

Definition at line 703 of file unordered_set.h.

4.1033.4.6 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the unordered_set.

Definition at line 346 of file unordered_set.h.

4.1033.4.7 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::cbegin (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to the first bucket element.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 745 of file unordered_set.h.

4.1033.4.8 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_set.

Definition at line 354 of file unordered_set.h.

4.1033.4.9 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::cend (size_type __n) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 765 of file unordered_set.h.

4.1033.4.10 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::clear ( ) [inline], [noexcept]

Erases all elements in an unordered_set. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 572 of file unordered_set.h.

4.1033.4.11 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::count (const key_type & __x) const [inline]

Finds the number of elements.

Parameters

__x	Element to located.

Returns

Number of elements with specified key.

This function only makes sense for unordered_multisets; for unordered_set the result will either be 0 (not present) or 1 (present).

Definition at line 667 of file unordered_set.h.

4.1033.4.12 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> template<typename... _Args> std::pair<iterator, bool> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::emplace (_Args &&... __args) [inline]

Attempts to build and insert an element into the unordered_set.

Parameters

__args	Arguments used to generate an element.

Returns

A pair, of which the first element is an iterator that points to the possibly inserted element, and the second is a bool that is true if the element was actually inserted.

This function attempts to build and insert an element into the unordered_set. An unordered_set relies on unique keys and thus an element is only inserted if it is not already present in the unordered_set.

Insertion requires amortized constant time.

Definition at line 376 of file unordered_set.h.

4.1033.4.13 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> template<typename... _Args> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::emplace_hint (const_iterator *__pos,* _Args &&... *__args*) [inline]

Attempts to insert an element into the unordered_set.

Parameters

__pos	An iterator that serves as a hint as to where the element should be inserted.
__args	Arguments used to generate the element to be inserted.

Returns

An iterator that points to the element with key equivalent to the one generated from *__args* (may or may not be the element itself).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument emplace() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant time.

Definition at line 402 of file unordered_set.h.

4.1033.4.14 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> bool std::unordered_set< _Value, _Hash, _Pred, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the unordered_set is empty.

Definition at line 298 of file unordered_set.h.

4.1033.4.15 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::end ( ) [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_set.

Definition at line 333 of file unordered_set.h.

4.1033.4.16 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the unordered_set.

Definition at line 337 of file unordered_set.h.

4.1033.4.17 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::end (size_type *__n*) [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 757 of file unordered_set.h.

4.1033.4.18 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_local_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::end (size_type *__n*) const [inline]

Returns a read-only (constant) iterator pointing to one past the last bucket elements.

Parameters

__n	The bucket index.

Returns

A read-only local iterator.

Definition at line 761 of file unordered_set.h.

4.1033.4.19 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::pair<iterator, iterator> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::equal_range (const key_type & *__x*) [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function probably only makes sense for multisets.

Definition at line 691 of file unordered_set.h.

4.1033.4.20 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::pair<const_iterator, const_iterator> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::equal_range (const key_type & *__x*) const [inline]

Finds a subsequence matching given key.

Parameters

__x	Key to be located.

Returns

Pair of iterators that possibly points to the subsequence matching given key.

This function probably only makes sense for multisets.

Definition at line 695 of file unordered_set.h.

4.1033.4.21 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::erase (const_iterator *__position*) [inline]

Erases an element from an unordered_set.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 522 of file unordered_set.h.

4.1033.4.22 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::erase (iterator *__position*) [inline]

Erases an element from an unordered_set.

Parameters

__position	An iterator pointing to the element to be erased.

Returns

An iterator pointing to the element immediately following *__position* prior to the element being erased. If no such element exists, end() is returned.

This function erases an element, pointed to by the given iterator, from an unordered_set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 527 of file unordered_set.h.

4.1033.4.23 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::erase (const key_type & *__x*) [inline]

Erases elements according to the provided key.

Parameters

__x	Key of element to be erased.

Returns

The number of elements erased.

This function erases all the elements located by the given key from an unordered_set. For an unordered_set the result of this function can only be 0 (not present) or 1 (present). Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 544 of file unordered_set.h.

4.1033.4.24 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Erases a [__first,__last) range of elements from an unordered_set.

Parameters

__first	Iterator pointing to the start of the range to be erased.
__last	Iterator pointing to the end of the range to be erased.

Returns

The iterator *__last*.

This function erases a sequence of elements from an unordered_set. Note that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 562 of file unordered_set.h.

4.1033.4.25 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::find (const key_type & __x) [inline]

Tries to locate an element in an unordered_set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 649 of file unordered_set.h.

4.1033.4.26 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> const_iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::find (const key_type & __x) const [inline]

Tries to locate an element in an unordered_set.

Parameters

__x	Element to be located.

Returns

Iterator pointing to sought-after element, or end() if not found.

This function takes a key and tries to locate the element with which the key matches. If successful the function returns an iterator pointing to the sought after element. If unsuccessful it returns the past-the-end (`end()`) iterator.

Definition at line 653 of file unordered_set.h.

4.1033.4.27 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> allocator_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::get_allocator ( ) const [inline], [noexcept]

Returns the allocator object used by the unordered_set.

Definition at line 291 of file unordered_set.h.

4.1033.4.28 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> hasher std::unordered_set< _Value, _Hash, _Pred, _Alloc >::hash_function ( ) const [inline]

Returns the hash functor object with which the unordered_set was constructed.

Definition at line 625 of file unordered_set.h.

4.1033.4.29 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::pair<iterator, bool> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (const value_type & __x) [inline]

Attempts to insert an element into the unordered_set.

Parameters

__x	Element to be inserted.

Returns

A pair, of which the first element is an iterator that points to the possibly inserted element, and the second is a bool that is true if the element was actually inserted.

This function attempts to insert an element into the unordered_set. An unordered_set relies on unique keys and thus an element is only inserted if it is not already present in the unordered_set.

Insertion requires amortized constant time.

Definition at line 420 of file unordered_set.h.

4.1033.4.30 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> std::pair<iterator, bool> std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (value_type && __x) [inline]

Attempts to insert an element into the unordered_set.

Parameters

__x	Element to be inserted.

Returns

A pair, of which the first element is an iterator that points to the possibly inserted element, and the second is a bool that is true if the element was actually inserted.

This function attempts to insert an element into the unordered_set. An unordered_set relies on unique keys and thus an element is only inserted if it is not already present in the unordered_set.

Insertion requires amortized constant time.

Definition at line 424 of file unordered_set.h.

References std::move().

4.1033.4.31 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint,* const value_type & __x) [inline]

Attempts to insert an element into the unordered_set.

Parameters

__hint	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the element with key of *__x* (may or may not be the element passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant.

Definition at line 449 of file unordered_set.h.

4.1033.4.32 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> iterator std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (const_iterator *__hint*, value_type && *__x*) [inline]

Attempts to insert an element into the unordered_set.

Parameters

__hint	An iterator that serves as a hint as to where the element should be inserted.
__x	Element to be inserted.

Returns

An iterator that points to the element with key of *__x* (may or may not be the element passed in).

This function is not concerned about whether the insertion took place, and thus does not return a boolean like the single-argument insert() does. Note that the first parameter is only a hint and can potentially improve the performance of the insertion process. A bad hint would cause no gains in efficiency.

For more on *hinting*, see: https://gcc.gnu.org/onlinedocs/libstdc++/manual/associative.html#containers.associative.insert_hints

Insertion requires amortized constant.

Definition at line 453 of file unordered_set.h.

References std::move().

4.1033.4.33 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> template<typename _InputIterator > void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (_InputIterator *__first*, _InputIterator *__last*) [inline]

A template function that attempts to insert a range of elements.

Parameters

__first	Iterator pointing to the start of the range to be inserted.
__last	Iterator pointing to the end of the range.

Complexity similar to that of the range constructor.

Definition at line 468 of file unordered_set.h.

4.1033.4.34 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::insert (initializer_list< value_type > __l) [inline]

Attempts to insert a list of elements into the unordered_set.

Parameters

__l	A std::initializer_list<value_type> of elements to be inserted.

Complexity similar to that of the range constructor.

Definition at line 479 of file unordered_set.h.

4.1033.4.35 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> key_equal std::unordered_set< _Value, _Hash, _Pred, _Alloc >::key_eq ( ) const [inline]

Returns the key comparison object with which the unordered_set was constructed.

Definition at line 631 of file unordered_set.h.

4.1033.4.36 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> float std::unordered_set< _Value, _Hash, _Pred, _Alloc >::load_factor ( ) const [inline], [noexcept]

Returns the average number of elements per bucket.

Definition at line 773 of file unordered_set.h.

4.1033.4.37 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::max_bucket_count ( ) const [inline], [noexcept]

Returns the maximum number of buckets of the unordered_set.

Definition at line 708 of file unordered_set.h.

4.1033.4.38 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> float std::unordered_set< _Value, _Hash, _Pred, _Alloc >::max_load_factor ( ) const [inline], [noexcept]

Returns a positive number that the unordered_set tries to keep the load factor less than or equal to.

Definition at line 779 of file unordered_set.h.

4.1033.4.39 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::max_load_factor (float __z) [inline]

Change the unordered_set maximum load factor.

Parameters

__z	The new maximum load factor.

Definition at line 787 of file unordered_set.h.

4.1033.4.40 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::max_size ( ) const** [inline], [noexcept]

Returns the maximum size of the unordered_set.

Definition at line 308 of file unordered_set.h.

4.1033.4.41 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> unordered_set& std::unordered_set< _Value, _Hash, _Pred, _Alloc >::operator= (const unordered_set< _Value, _Hash, _Pred, _Alloc > &)** [default]

Copy assignment operator.

4.1033.4.42 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> unordered_set& std::unordered_set< _Value, _Hash, _Pred, _Alloc >::operator= (unordered_set< _Value, _Hash, _Pred, _Alloc > &&)** [default]

Move assignment operator.

4.1033.4.43 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> unordered_set& std::unordered_set< _Value, _Hash, _Pred, _Alloc >::operator= (initializer_list< value_type > *__l*)** [inline]

Unordered_set list assignment operator.

Parameters

__l	An initializer_list.

This function fills an unordered_set with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the unordered_set and that the resulting unordered_set's size is the same as the number of elements assigned.

Definition at line 283 of file unordered_set.h.

4.1033.4.44 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::rehash (size_type *__n*)** [inline]

May rehash the unordered_set.

Parameters

__n	The new number of buckets.

Rehash will occur only if the new number of buckets respect the unordered_set maximum load factor.

Definition at line 798 of file unordered_set.h.

4.1033.4.45 **template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::reserve (size_type *__n*)** [inline]

Prepare the unordered_set for a specified number of elements.

Parameters

__n	Number of elements required.

Same as rehash(ceil(n / max_load_factor())).

Definition at line 809 of file unordered_set.h.

4.1033.4.46 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> size_type std::unordered_set< _Value, _Hash, _Pred, _Alloc >::size ( ) const [inline], [noexcept]

Returns the size of the unordered_set.

Definition at line 303 of file unordered_set.h.

4.1033.4.47 template<typename _Value, typename _Hash = hash<_Value>, typename _Pred = equal_to<_Value>, typename _Alloc = allocator<_Value>> void std::unordered_set< _Value, _Hash, _Pred, _Alloc >::swap (unordered_set< _Value, _Hash, _Pred, _Alloc > & *__x*) [inline], [noexcept]

Swaps data with another unordered_set.

Parameters

__x	An unordered_set of the same element and allocator types.

This exchanges the elements between two sets in constant time. Note that the global std::swap() function is specialized such that std::swap(s1,s2) will feed to this function.

Definition at line 585 of file unordered_set.h.

The documentation for this class was generated from the following file:

- unordered_set.h

4.1034 std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator >:



Public Types

- typedef _Base::allocator_type **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, unordered_set > **const_iterator**
- typedef __gnu_debug::_Safe_local_iterator < _Base_const_local_iterator, unordered_set > **const_local_iterator**
- typedef _Base::hasher **hasher**

- typedef __gnu_debug::_Safe_iterator < _Base_iterator, unordered_set > **iterator**
- typedef _Base::key_equal **key_equal**
- typedef _Base::key_type **key_type**
- typedef __gnu_debug::_Safe_local_iterator < _Base_local_iterator, unordered_set > **local_iterator**
- typedef _Base::size_type **size_type**
- typedef _Base::value_type **value_type**

Public Member Functions

- **unordered_set** (size_type __n, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- template<typename _InputIterator > **unordered_set** (_InputIterator __first, _InputIterator __last, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_set** (const unordered_set &)=default
- **unordered_set** (const _Base &__x)
- **unordered_set** (unordered_set &&)=default
- **unordered_set** (const allocator_type &__a)
- **unordered_set** (const unordered_set &__uset, const allocator_type &__a)
- **unordered_set** (unordered_set &&__uset, const allocator_type &__a)
- **unordered_set** (initializer_list< value_type > __l, size_type __n=0, const hasher &__hf=hasher(), const key_equal &__eql=key_equal(), const allocator_type &__a=allocator_type())
- **unordered_set** (size_type __n, const allocator_type &__a)
- **unordered_set** (size_type __n, const hasher &__hf, const allocator_type &__a)
- template<typename _InputIterator > **unordered_set** (_InputIterator __first, _InputIterator __last, size_type __n, const allocator_type &__a)
- template<typename _InputIterator > **unordered_set** (_InputIterator __first, _InputIterator __last, size_type __n, const hasher &__hf, const allocator_type &__a)
- **unordered_set** (initializer_list< value_type > __l, size_type __n, const allocator_type &__a)
- **unordered_set** (initializer_list< value_type > __l, size_type __n, const hasher &__hf, const allocator_type &__a)
- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void **_M_swap** (_Safe_container &__x) noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- local_iterator **begin** (size_type __b)
- const_local_iterator **begin** (size_type __b) const
- size_type **bucket_size** (size_type __b) const
- const_iterator **cbegin** () const noexcept
- const_local_iterator **cbegin** (size_type __b) const
- const_iterator **cend** () const noexcept
- const_local_iterator **cend** (size_type __b) const
- void **clear** () noexcept

- template<typename... _Args>
  std::pair< iterator, bool > **emplace** (_Args &&...__args)
- template<typename... _Args>
  iterator **emplace_hint** (const_iterator __hint, _Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- local_iterator **end** (size_type __b)
- const_local_iterator **end** (size_type __b) const
- std::pair< iterator, iterator > **equal_range** (const key_type &__key)
- std::pair< const_iterator,
  const_iterator > **equal_range** (const key_type &__key) const
- size_type **erase** (const key_type &__key)
- iterator **erase** (const_iterator __it)
- iterator **erase** (iterator __it)
- iterator **erase** (const_iterator __first, const_iterator __last)
- iterator **find** (const key_type &__key)
- const_iterator **find** (const key_type &__key) const
- std::pair< iterator, bool > **insert** (const value_type &__obj)
- iterator **insert** (const_iterator __hint, const value_type &__obj)
- std::pair< iterator, bool > **insert** (value_type &&__obj)
- iterator **insert** (const_iterator __hint, value_type &&__obj)
- void **insert** (std::initializer_list< value_type > __l)
- template<typename _InputIterator >
  void **insert** (_InputIterator __first, _InputIterator __last)
- float **max_load_factor** () const noexcept
- void **max_load_factor** (float __f)
- unordered_set & **operator=** (const unordered_set &)=default
- unordered_set & **operator=** (unordered_set &&)=default
- unordered_set & **operator=** (initializer_list< value_type > __l)
- void **swap** (unordered_set &__x) noexcept(noexcept(declval< _Base & >().swap(__x)))

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_const_local_iterators
- _Safe_iterator_base * _M_iterators
- _Safe_iterator_base * _M_local_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void **_M_invalidate_all** ()
- void _M_invalidate_all () const
- void _M_invalidate_if (_Predicate __pred)
- void _M_invalidate_local_if (_Predicate __pred)
- void **_M_invalidate_locals** ()
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_unordered_container_base &__x) noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**
- template<typename _ItT , typename _SeqT >
  class **::__gnu_debug::_Safe_local_iterator**

4.1034.1 Detailed Description

template<typename _Key, typename _Hash, typename _Pred, typename _Allocator>class std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator >

Class std::unordered_set with safety/checking/debug instrumentation.

Definition at line 40 of file debug/unordered_set.

4.1034.2 Member Function Documentation

4.1034.2.1 void __gnu_debug::_Safe_unordered_container_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

4.1034.2.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.1034.2.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1034.2.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.1034.2.5 void __gnu_debug::_Safe_unordered_container< unordered_set< _Value, _Hash, _Pred, _Alloc > >::_M_invalidate_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1034.2.6 void __gnu_debug::_Safe_unordered_container< unordered_set< _Value, _Hash, _Pred, _Alloc > >::_M_invalidate_local_if (_Predicate *__pred*) [protected], [inherited]

Invalidates all local iterators `x` that reference this container, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal local iterators nested in the safe ones.

4.1034.2.7 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.1034.2.8 void __gnu_debug::_Safe_unordered_container_base::_M_swap (_Safe_unordered_container_base & __x) [protected], [noexcept], [inherited]

Swap this container with the given container. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1034.2.9 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1034.3 Member Data Documentation

4.1034.3.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1034.3.2 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_const_local_iterators [inherited]

The list of constant local iterators that reference this container.

Definition at line 130 of file safe_unordered_base.h.

4.1034.3.3 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1034.3.4 _Safe_iterator_base* __gnu_debug::_Safe_unordered_container_base::_M_local_iterators [inherited]

The list of mutable local iterators that reference this container.

Definition at line 127 of file safe_unordered_base.h.

4.1034.3.5 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/unordered_set

4.1035 std::uses_allocator< typename, typename > Struct Template Reference

Inherits type< _Tp, _Alloc >.

4.1035.1 Detailed Description

template<typename, typename>struct std::uses_allocator< typename, typename >

Declare uses_allocator so it can be specialized in <queue> etc.

[allocator.uses.trait]

Definition at line 74 of file memoryfwd.h.

The documentation for this struct was generated from the following file:

- memoryfwd.h

4.1036 std::uses_allocator< tuple< _Types...>, _Alloc > Struct Template Reference

Inheritance diagram for std::uses_allocator< tuple< _Types...>, _Alloc >:



Public Types

- typedef integral_constant< _Tp, __v > **type**
- typedef _Tp **value_type**

Public Member Functions

- constexpr **operator value_type** () const noexcept
- constexpr value_type **operator()** () const noexcept

Static Public Attributes

- static constexpr _Tp **value**

4.1036.1 Detailed Description

template<typename... _Types, typename _Alloc>struct std::uses_allocator< tuple< _Types...>, _Alloc >

Partial specialization for tuples.

Definition at line 1658 of file tuple.

The documentation for this struct was generated from the following file:

- tuple

4.1037 std::valarray< _Tp > Class Template Reference

Public Types

- typedef _Tp **value_type**

Public Member Functions

- valarray ()
- valarray (size_t)
- valarray (const _Tp &, size_t)
- valarray (const _Tp *__restrict__, size_t)
- valarray (const valarray &)
- valarray (valarray &&) noexcept
- valarray (const slice_array< _Tp > &)
- valarray (const gslice_array< _Tp > &)
- valarray (const mask_array< _Tp > &)
- valarray (const indirect_array< _Tp > &)
- valarray (initializer_list< _Tp >)
- template<class _Dom >
  valarray (const _Expr< _Dom, _Tp > &__e)
- template<typename _Tp>
  valarray (const _Tp *__restrict__ __p, size_t __n)
- _Expr< _ValFunClos< _ValArray,
  _Tp >, _Tp > apply (_Tp func(_Tp)) const
- _Expr< _RefFunClos< _ValArray,
  _Tp >, _Tp > apply (_Tp func(const _Tp &)) const
- valarray< _Tp > cshift (int __n) const
- _Tp max () const
- _Tp min () const
- _UnaryOp< __logical_not >::_Rt operator! () const
- valarray< _Tp > & operator%= (const _Tp &)
- valarray< _Tp > & operator%= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator%=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator&= (const _Tp &)
- valarray< _Tp > & operator&= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator&=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator*= (const _Tp &)

- valarray< _Tp > & operator*= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator*=** (const _Expr< _Dom, _Tp > &)
- _UnaryOp< __unary_plus >::_Rt operator+ () const
- valarray< _Tp > & operator+= (const _Tp &)
- valarray< _Tp > & operator+= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator+=** (const _Expr< _Dom, _Tp > &)
- _UnaryOp< __negate >::_Rt operator- () const
- valarray< _Tp > & operator-= (const _Tp &)
- valarray< _Tp > & operator-= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator-=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator/= (const _Tp &)
- valarray< _Tp > & operator/= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator/=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator<<= (const _Tp &)
- valarray< _Tp > & operator<<= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator**<<**=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator= (const valarray< _Tp > &__v)
- valarray< _Tp > & operator= (valarray< _Tp > &&__v) noexcept
- valarray< _Tp > & operator= (const _Tp &__t)
- valarray< _Tp > & operator= (const slice_array< _Tp > &__sa)
- valarray< _Tp > & operator= (const gslice_array< _Tp > &__ga)
- valarray< _Tp > & operator= (const mask_array< _Tp > &__ma)
- valarray< _Tp > & operator= (const indirect_array< _Tp > &__ia)
- valarray & operator= (initializer_list< _Tp > __l)
- template<class _Dom >
  valarray< _Tp > & **operator=** (const _Expr< _Dom, _Tp > &)
- valarray< _Tp > & operator>>= (const _Tp &)
- valarray< _Tp > & operator>>= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator**>>**=** (const _Expr< _Dom, _Tp > &)
- _Tp & operator[] (size_t __i)
- const _Tp & **operator[]** (size_t) const
- _Expr< _SClos< _ValArray, _Tp >
  , _Tp > operator[] (slice __s) const
- slice_array< _Tp > operator[] (slice __s)
- _Expr< _GClos< _ValArray, _Tp >
  , _Tp > operator[] (const gslice &__s) const
- gslice_array< _Tp > operator[] (const gslice &__s)
- valarray< _Tp > operator[] (const valarray< bool > &__m) const
- mask_array< _Tp > operator[] (const valarray< bool > &__m)
- _Expr< _IClos< _ValArray, _Tp >
  , _Tp > operator[] (const valarray< size_t > &__i) const
- indirect_array< _Tp > operator[] (const valarray< size_t > &__i)
- valarray< _Tp > & operator^= (const _Tp &)
- valarray< _Tp > & operator^= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator^=** (const _Expr< _Dom, _Tp > &)

- valarray< _Tp > & operator|= (const _Tp &)
- valarray< _Tp > & operator|= (const valarray< _Tp > &)
- template<class _Dom >
  valarray< _Tp > & **operator|=** (const _Expr< _Dom, _Tp > &)
- _UnaryOp< __bitwise_not >::_Rt operator~ () const
- void resize (size_t __size, _Tp __c=_Tp())
- valarray< _Tp > shift (int __n) const
- size_t size () const
- _Tp sum () const
- void swap (valarray< _Tp > &__v) noexcept

Friends

- class **_Array< _Tp >**

4.1037.1 Detailed Description

template<class _Tp>class std::valarray< _Tp >

Smart array designed to support numeric processing.

A valarray is an array that provides constraints intended to allow for effective optimization of numeric array processing by reducing the aliasing that can result from pointer representations. It represents a one-dimensional array from which different multidimensional subsets can be accessed and modified.

Template Parameters

_Tp	Type of object in the array.

Definition at line 89 of file valarray.

4.1037.2 Constructor & Destructor Documentation

4.1037.2.1 template<class _Tp> std::valarray< _Tp >::valarray (const _Tp * __restrict__, size_t)

Construct an array initialized to the first *n* elements of *t*.

The documentation for this class was generated from the following file:

- valarray

4.1038 std::vector< _Tp, _Alloc > Class Template Reference

Inheritance diagram for std::vector< _Tp, _Alloc >:



Public Types

- typedef _Alloc **allocator_type**
- typedef
  __gnu_cxx::__normal_iterator
  < const_pointer, vector > **const_iterator**
- typedef
  _Alloc_traits::const_pointer **const_pointer**
- typedef
  _Alloc_traits::const_reference **const_reference**
- typedef std::reverse_iterator
  < const_iterator > **const_reverse_iterator**
- typedef ptrdiff_t **difference_type**
- typedef
  __gnu_cxx::__normal_iterator
  < pointer, vector > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Alloc_traits::reference **reference**
- typedef std::reverse_iterator
  < iterator > **reverse_iterator**
- typedef size_t **size_type**
- typedef _Tp **value_type**

Public Member Functions

- vector ()=default
- vector (const allocator_type &__a) noexcept
- vector (size_type __n, const allocator_type &__a=allocator_type())
- vector (size_type __n, const value_type &__value, const allocator_type &__a=allocator_type())
- vector (const vector &__x)
- vector (vector &&) noexcept=default

- vector (const vector &__x, const allocator_type &__a)
- vector (vector &&__rv, const allocator_type &__m) noexcept(noexcept(vector(std::declval< vector && >(), std::declval< const allocator_type & >(), std::declval< typename _Alloc_traits::is_always_equal >())))
- vector (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  vector (_InputIterator __first, _InputIterator __last, const allocator_type &__a=allocator_type())
- ~vector () noexcept
- template<typename... _Args>
  auto **_M_emplace_aux** (const_iterator __position, _Args &&...__args) -> iterator
- void assign (size_type __n, const value_type &__val)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void assign (_InputIterator __first, _InputIterator __last)
- void assign (initializer_list< value_type > __l)
- reference at (size_type __n)
- const_reference at (size_type __n) const
- reference back () noexcept
- const_reference back () const noexcept
- iterator begin () noexcept
- const_iterator begin () const noexcept
- size_type capacity () const noexcept
- const_iterator cbegin () const noexcept
- const_iterator cend () const noexcept
- void clear () noexcept
- const_reverse_iterator crbegin () const noexcept
- const_reverse_iterator crend () const noexcept
- _Tp * data () noexcept
- const _Tp * **data** () const noexcept
- template<typename... _Args>
  iterator emplace (const_iterator __position, _Args &&...__args)
- template<typename... _Args>
  void **emplace_back** (_Args &&...__args)
- bool empty () const noexcept
- iterator end () noexcept
- const_iterator end () const noexcept
- iterator erase (const_iterator __position)
- iterator erase (const_iterator __first, const_iterator __last)
- reference front () noexcept
- const_reference front () const noexcept
- iterator insert (const_iterator __position, const value_type &__x)
- iterator insert (const_iterator __position, value_type &&__x)
- iterator insert (const_iterator __position, initializer_list< value_type > __l)
- iterator insert (const_iterator __position, size_type __n, const value_type &__x)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator insert (const_iterator __position, _InputIterator __first, _InputIterator __last)
- size_type max_size () const noexcept
- vector & operator= (const vector &__x)
- vector & operator= (vector &&__x) noexcept(_Alloc_traits::_S_nothrow_move())
- vector & operator= (initializer_list< value_type > __l)
- reference operator[] (size_type __n) noexcept
- const_reference operator[] (size_type __n) const noexcept
- void pop_back () noexcept

- void push_back (const value_type &__x)
- void **push_back** (value_type &&__x)
- reverse_iterator rbegin () noexcept
- const_reverse_iterator rbegin () const noexcept
- reverse_iterator rend () noexcept
- const_reverse_iterator rend () const noexcept
- void reserve (size_type __n)
- void resize (size_type __new_size)
- void resize (size_type __new_size, const value_type &__x)
- void shrink_to_fit ()
- size_type size () const noexcept
- void swap (vector &__x) noexcept

Protected Member Functions

- pointer **_M_allocate** (size_t __n)
- template<typename _ForwardIterator >
  pointer _M_allocate_and_copy (size_type __n, _ForwardIterator __first, _ForwardIterator __last)
- template<typename _InputIterator >
  void **_M_assign_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_assign_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename _Integer >
  void **_M_assign_dispatch** (_Integer __n, _Integer __val, __true_type)
- template<typename _InputIterator >
  void **_M_assign_dispatch** (_InputIterator __first, _InputIterator __last, __false_type)
- size_type **_M_check_len** (size_type __n, const char *__s) const
- void **_M_create_storage** (size_t __n)
- void **_M_deallocate** (pointer __p, size_t __n)
- void **_M_default_append** (size_type __n)
- void **_M_default_initialize** (size_type __n)
- template<typename... _Args>
  iterator **_M_emplace_aux** (const_iterator __position, _Args &&...__args)
- iterator **_M_emplace_aux** (const_iterator __position, value_type &&__v)
- iterator **_M_erase** (iterator __position)
- iterator **_M_erase** (iterator __first, iterator __last)
- void **_M_erase_at_end** (pointer __pos) noexcept
- void **_M_fill_assign** (size_type __n, const value_type &__val)
- void **_M_fill_initialize** (size_type __n, const value_type &__value)
- void **_M_fill_insert** (iterator __pos, size_type __n, const value_type &__x)
- _Tp_alloc_type & **_M_get_Tp_allocator** () noexcept
- const _Tp_alloc_type & **_M_get_Tp_allocator** () const noexcept
- template<typename _Arg >
  void **_M_insert_aux** (iterator __position, _Arg &&__arg)
- template<typename _Integer >
  void **_M_insert_dispatch** (iterator __pos, _Integer __n, _Integer __val, __true_type)
- template<typename _InputIterator >
  void **_M_insert_dispatch** (iterator __pos, _InputIterator __first, _InputIterator __last, __false_type)
- iterator **_M_insert_rval** (const_iterator __position, value_type &&__v)
- void _M_range_check (size_type __n) const

- template<typename _InputIterator >
  void **_M_range_initialize** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_range_initialize** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename _InputIterator >
  void **_M_range_insert** (iterator __pos, _InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_range_insert** (iterator __pos, _ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename... _Args>
  void **_M_realloc_insert** (iterator __position, _Args &&...__args)
- bool **_M_shrink_to_fit** ()
- allocator_type **get_allocator** () const noexcept

Static Protected Member Functions

- static size_type **_S_check_init_len** (size_type __n, const allocator_type &__a)
- static size_type **_S_max_size** (const _Tp_alloc_type &__a) noexcept

Protected Attributes

- _Vector_impl **_M_impl**

4.1038.1 Detailed Description

template<typename _Tp, typename _Alloc = std::allocator<_Tp>>class std::vector< _Tp, _Alloc >

A standard container which offers fixed time access to individual elements in any order.

Template Parameters

_Tp	Type of element.
_Alloc	Allocator type, defaults to allocator<_Tp>.

Meets the requirements of a `container`, a `reversible container`, and a `sequence`, including the `optional sequence requirements` with the exception of `push_front` and `pop_front`.

In some terminology a vector can be described as a dynamic C-style array, it offers fast and efficient access to individual elements in any order and saves the user from worrying about memory and size allocation. Subscripting ([]) access is also provided as with C-style arrays.

Definition at line 389 of file stl_vector.h.

4.1038.2 Constructor & Destructor Documentation

4.1038.2.1 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector ( ) [default]

Creates a vector with no elements.

4.1038.2.2 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (const allocator_type & *__a*) [inline], [explicit], [noexcept]

Creates a vector with no elements.

Parameters

__a	An allocator object.

Definition at line 497 of file stl_vector.h.

4.1038.2.3 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (size_type __n, const allocator_type & __a = allocator_type()) [inline], [explicit]

Creates a vector with default constructed elements.

Parameters

__n	The number of elements to initially create.
__a	An allocator.

This constructor fills the vector with *__n* default constructed elements.

Definition at line 510 of file stl_vector.h.

4.1038.2.4 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (size_type __n, const value_type & __value, const allocator_type & __a = allocator_type()) [inline]

Creates a vector with copies of an exemplar element.

Parameters

__n	The number of elements to initially create.
__value	An element to copy.
__a	An allocator.

This constructor fills the vector with *__n* copies of *__value*.

Definition at line 522 of file stl_vector.h.

4.1038.2.5 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (const vector< _Tp, _Alloc > & __x) [inline]

Vector copy constructor.

Parameters

__x	A vector of identical element and allocator types.

All the elements of *__x* are copied, but any unused capacity in *__x* will not be copied (i.e. capacity() == size() in the new vector).

The newly-created vector uses a copy of the allocator object used by *__x* (unless the allocator traits dictate a different object).

Definition at line 553 of file stl_vector.h.

4.1038.2.6 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (vector< _Tp, _Alloc > &&) [default], [noexcept]

Vector move constructor.

The newly-created vector contains the exact contents of the moved instance. The contents of the moved instance are a valid, but unspecified vector.

4.1038.2.7 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (const vector< _Tp, _Alloc > & __x, const allocator_type & __a) [inline]

Copy constructor with alternative allocator.

Definition at line 575 of file stl_vector.h.

4.1038.2.8 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (vector< _Tp, _Alloc > && *__rv,* const allocator_type & *__m*) [inline],[noexcept]

Move constructor with alternative allocator.

Definition at line 607 of file stl_vector.h.

4.1038.2.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::vector (initializer_list< value_type > *__l,* const allocator_type & *__a =* allocator_type()) [inline]

Builds a vector from an initializer list.

Parameters

__l	An initializer_list.
__a	An allocator.

Create a vector consisting of copies of the elements in the initializer_list *__l*.

This will call the element type's copy constructor N times (where N is *__l.size()*) and do no memory reallocation.

Definition at line 625 of file stl_vector.h.

4.1038.2.10 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> std::vector< _Tp, _Alloc >::vector (_InputIterator *__first,* _InputIterator *__last,* const allocator_type & *__a =* allocator_type()) [inline]

Builds a vector from a range.

Parameters

__first	An input iterator.
__last	An input iterator.
__a	An allocator.

Create a vector consisting of copies of the elements from [first,last).

If the iterators are forward, bidirectional, or random-access, then this will call the elements' copy constructor N times (where N is distance(first,last)) and do no memory reallocation. But if only input iterators are used, then this will do at most 2N calls to the copy constructor, and logN memory reallocations.

Definition at line 653 of file stl_vector.h.

4.1038.2.11 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> std::vector< _Tp, _Alloc >::~vector ( ) [inline],[noexcept]

The dtor only erases the elements, and note that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 678 of file stl_vector.h.

4.1038.3 Member Function Documentation

4.1038.3.1 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _ForwardIterator > pointer std::vector< _Tp, _Alloc >::_M_allocate_and_copy (size_type *__n,* _ForwardIterator *__first,* _ForwardIterator *__last*) [inline],[protected]

Memory expansion handler. Uses the member allocation function to obtain *n* bytes of memory, and then copies [first,last) into it.

Definition at line 1508 of file stl_vector.h.

4.1038.3.2 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::_M_range_check (size_type __n) const [inline],[protected]

Safety check used only from at().

Definition at line 1070 of file stl_vector.h.

Referenced by std::vector< block_type, allocator_type >::at().

4.1038.3.3 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::assign (size_type __n, const value_type & __val) [inline]

Assigns a given value to a vector.

Parameters

__n	Number of elements to be assigned.
__val	Value to be assigned.

This function fills a vector with *__n* copies of the given value. Note that the assignment completely changes the vector and that the resulting vector's size is the same as the number of elements assigned.

Definition at line 749 of file stl_vector.h.

4.1038.3.4 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> void std::vector< _Tp, _Alloc >::assign (_InputIterator __first, _InputIterator __last) [inline]

Assigns a range to a vector.

Parameters

__first	An input iterator.
__last	An input iterator.

This function fills a vector with copies of the elements in the range [__first,__last).

Note that the assignment completely changes the vector and that the resulting vector's size is the same as the number of elements assigned.

Definition at line 768 of file stl_vector.h.

4.1038.3.5 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::assign (initializer_list< value_type > __l) [inline]

Assigns an initializer list to a vector.

Parameters

__l	An initializer_list.

This function fills a vector with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the vector and that the resulting vector's size is the same as the number of elements assigned.

Definition at line 794 of file stl_vector.h.

4.1038.3.6 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::vector< _Tp, _Alloc >::at (size_type __n) [inline]

Provides access to the data contained in the vector.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read/write reference to data.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the vector. The function throws out_of_range if the check fails.

Definition at line 1092 of file stl_vector.h.

4.1038.3.7 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::vector< _Tp, _Alloc >::at (size_type __n) const [inline]

Provides access to the data contained in the vector.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read-only (constant) reference to data.

Exceptions

std::out_of_range	If *__n* is an invalid index.

This function provides for safer data access. The parameter is first checked that it is in the range of the vector. The function throws out_of_range if the check fails.

Definition at line 1110 of file stl_vector.h.

4.1038.3.8 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::vector< _Tp, _Alloc >::back ( ) [inline], [noexcept]

Returns a read/write reference to the data at the last element of the vector.

Definition at line 1143 of file stl_vector.h.

Referenced by std::piecewise_constant_distribution< _RealType >::max(), and std::piecewise_linear_distribution< _RealType >::max().

4.1038.3.9 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::vector< _Tp, _Alloc >::back ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the last element of the vector.

Definition at line 1154 of file stl_vector.h.

4.1038.3.10 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::begin ( ) [inline], [noexcept]

Returns a read/write iterator that points to the first element in the vector. Iteration is done in ordinary element order.

Definition at line 811 of file stl_vector.h.

Referenced by std::vector< block_type, allocator_type >::crend(), std::vector< block_type, allocator_type >::empty(), std::vector< block_type, allocator_type >::erase(), std::vector< block_type, allocator_type >::front(), std::vector< block_type, allocator_type >::insert(), __gnu_parallel::multiseq_partition(), __gnu_parallel::multiseq_selection(), __gnu_parallel::multiway_merge_exact_splitting(), std::vector< _Tp, _Alloc >::operator=(), std::operator==(), std::vector< block_type, allocator_type >::rend(), and std::vector< block_type, allocator_type >::vector().

4.1038.3.11 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::vector< _Tp, _Alloc >::begin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the vector. Iteration is done in ordinary element order.

Definition at line 820 of file stl_vector.h.

4.1038.3.12 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::vector< _Tp, _Alloc >::capacity ( ) const [inline], [noexcept]

Returns the total number of elements that the vector can hold before needing to allocate more memory.

Definition at line 998 of file stl_vector.h.

4.1038.3.13 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::vector< _Tp, _Alloc >::cbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points to the first element in the vector. Iteration is done in ordinary element order.

Definition at line 884 of file stl_vector.h.

Referenced by std::vector< block_type, allocator_type >::erase(), and std::vector< block_type, allocator_type >::insert().

4.1038.3.14 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::vector< _Tp, _Alloc >::cend ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the vector. Iteration is done in ordinary element order.

Definition at line 893 of file stl_vector.h.

4.1038.3.15 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::clear ( ) [inline], [noexcept]

Erases all the elements. Note that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1498 of file stl_vector.h.

4.1038.3.16 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::vector< _Tp, _Alloc >::crbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the vector. Iteration is done in reverse element order.

Definition at line 902 of file stl_vector.h.

4.1038.3.17 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::vector< _Tp, _Alloc >::crend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the vector. Iteration is done in reverse element order.

Definition at line 911 of file stl_vector.h.

4.1038.3.18 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> _Tp* std::vector< _Tp, _Alloc >::data ( ) [inline], [noexcept]

Returns a pointer such that [data(), data() + size()) is a valid range. For a non-empty vector, data() == &front().

Definition at line 1168 of file stl_vector.h.

Referenced by std::regex_traits< _CharType >::transform_primary().

4.1038.3.19 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename... _Args> iterator std::vector< _Tp, _Alloc >::emplace (const_iterator *__position,* _Args &&... *__args*) [inline]

Inserts an object in vector before specified iterator.

Parameters

__position	A const_iterator into the vector.
__args	Arguments.

Returns

An iterator that points to the inserted data.

This function will insert an object of type T constructed with T(std::forward<Args>(args)...) before the specified location. Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 1248 of file stl_vector.h.

4.1038.3.20 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> bool std::vector< _Tp, _Alloc >::empty ( ) const [inline], [noexcept]

Returns true if the vector is empty. (Thus begin() would equal end().)

Definition at line 1007 of file stl_vector.h.

Referenced by std::piecewise_constant_distribution< _RealType >::densities(), std::piecewise_linear_distribution< _RealType >::densities(), std::piecewise_constant_distribution< _RealType >::intervals(), std::piecewise_linear_distribution< _RealType >::intervals(), std::discrete_distribution< _IntType >::max(), std::piecewise_constant_distribution< _RealType >::max(), std::piecewise_linear_distribution< _RealType >::max(), std::piecewise_constant_distribution< _RealType >::min(), std::piecewise_linear_distribution< _RealType >::min(), and std::discrete_distribution< _IntType >::probabilities().

4.1038.3.21 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::end ( ) [inline], [noexcept]

Returns a read/write iterator that points one past the last element in the vector. Iteration is done in ordinary element order.

Definition at line 829 of file stl_vector.h.

Referenced by std::vector< block_type, allocator_type >::back(), std::vector< block_type, allocator_type >::crbegin(), std::vector< block_type, allocator_type >::empty(), __gnu_parallel::multiseq_partition(), __gnu_parallel-

::multiseq_selection(), __gnu_parallel::multiway_merge_exact_splitting(), std::vector< _Tp, _Alloc >::operator=(), std::operator==(), std::vector< block_type, allocator_type >::push_back(), std::vector< block_type, allocator_type >::rbegin(), std::vector< block_type, allocator_type >::resize(), and std::vector< block_type, allocator_type >::vector().

4.1038.3.22 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_iterator std::vector< _Tp, _Alloc >::end ( ) const [inline], [noexcept]

Returns a read-only (constant) iterator that points one past the last element in the vector. Iteration is done in ordinary element order.

Definition at line 838 of file stl_vector.h.

4.1038.3.23 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::erase (const_iterator *__position*) [inline]

Remove element at given position.

Parameters

__position	Iterator pointing to element to be erased.

Returns

An iterator pointing to the next element (or end()).

This function will erase the element at the given position and thus shorten the vector by one.

Note This operation could be expensive and if it is frequently used the user should consider using std::list. The user is also cautioned that this function only erases the element, and that if the element is itself a pointer, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1430 of file stl_vector.h.

4.1038.3.24 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::erase (const_iterator *__first,* const_iterator *__last*) [inline]

Remove a range of elements.

Parameters

__first	Iterator pointing to the first element to be erased.
__last	Iterator pointing to one past the last element to be erased.

Returns

An iterator pointing to the element pointed to by *__last* prior to erasing (or end()).

This function will erase the elements in the range [__first,__last) and shorten the vector accordingly.

Note This operation could be expensive and if it is frequently used the user should consider using std::list. The user is also cautioned that this function only erases the elements, and that if the elements themselves are pointers, the pointed-to memory is not touched in any way. Managing the pointer is the user's responsibility.

Definition at line 1457 of file stl_vector.h.

4.1038.3.25 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::vector< _Tp, _Alloc >::front ( ) [inline], [noexcept]

Returns a read/write reference to the data at the first element of the vector.

Definition at line 1121 of file stl_vector.h.

Referenced by std::piecewise_constant_distribution< _RealType >::min(), and std::piecewise_linear_distribution< _RealType >::min().

4.1038.3.26 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::vector< _Tp, _Alloc >::front ( ) const [inline], [noexcept]

Returns a read-only (constant) reference to the data at the first element of the vector.

Definition at line 1132 of file stl_vector.h.

4.1038.3.27 template<typename _Tp , typename _Alloc > vector< _Tp, _Alloc >::iterator vector::insert (const_iterator *__position,* const value_type & *__x*)

Inserts given value into vector before specified iterator.

Parameters

__position	A const_iterator into the vector.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given value before the specified location. Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 132 of file vector.tcc.

References std::begin(), std::cbegin(), std::end(), and std::move().

4.1038.3.28 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::insert (const_iterator *__position,* value_type && *__x*) [inline]

Inserts given rvalue into vector before specified iterator.

Parameters

__position	A const_iterator into the vector.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a copy of the given rvalue before the specified location. Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 1293 of file stl_vector.h.

4.1038.3.29 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::insert (const_iterator *__position,* initializer_list< value_type > *__l*) [inline]

Inserts an initializer_list into the vector.

Parameters

__position	An iterator into the vector.
__l	An initializer_list.

This function will insert copies of the data in the initializer_list *l* into the vector before the location specified by *position*.

Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 1310 of file stl_vector.h.

4.1038.3.30 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> iterator std::vector< _Tp, _Alloc >::insert (const_iterator *__position,* size_type *__n,* const value_type & *__x*) [inline]

Inserts a number of copies of given data into the vector.

Parameters

__position	A const_iterator into the vector.
__n	Number of elements to be inserted.
__x	Data to be inserted.

Returns

An iterator that points to the inserted data.

This function will insert a specified number of copies of the given data before the location specified by *position*.

Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 1335 of file stl_vector.h.

4.1038.3.31 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>> iterator std::vector< _Tp, _Alloc >::insert (const_iterator *__position,* _InputIterator *__first,* _InputIterator *__last*) [inline]

Inserts a range into the vector.

Parameters

__position	A const_iterator into the vector.
__first	An input iterator.
__last	An input iterator.

Returns

An iterator that points to the inserted data.

This function will insert copies of the data in the range [__first,__last) into the vector before the location specified by *pos*.

Note that this kind of operation could be expensive for a vector and if it is frequently used the user should consider using std::list.

Definition at line 1379 of file stl_vector.h.

4.1038.3.32 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::vector< _Tp, _Alloc >::max_size ( ) const [inline], [noexcept]

Returns the size() of the largest possible vector.

Definition at line 923 of file stl_vector.h.

4.1038.3.33 template<typename _Tp , typename _Alloc > vector< _Tp, _Alloc > & vector::operator= (const vector< _Tp, _Alloc > & __x)

Vector assignment operator.

Parameters

__x	A vector of identical element and allocator types.

All the elements of *__x* are copied, but any unused capacity in *__x* will not be copied.

Whether the allocator is copied depends on the allocator traits.

Definition at line 199 of file vector.tcc.

References std::_Destroy(), std::vector< _Tp, _Alloc >::begin(), std::begin(), std::vector< _Tp, _Alloc >::end(), std::end(), and std::vector< _Tp, _Alloc >::size().

4.1038.3.34 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> vector& std::vector< _Tp, _Alloc >::operator= (vector< _Tp, _Alloc > && __x) [inline], [noexcept]

Vector move assignment operator.

Parameters

__x	A vector of identical element and allocator types.

The contents of *__x* are moved into this vector (without copying, if the allocators permit it). Afterwards *__x* is a valid, but unspecified vector.

Whether the allocator is moved depends on the allocator traits.

Definition at line 709 of file stl_vector.h.

4.1038.3.35 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> vector& std::vector< _Tp, _Alloc >::operator= (initializer_list< value_type > __l) [inline]

Vector list assignment operator.

Parameters

__l	An initializer_list.

This function fills a vector with copies of the elements in the initializer list *__l*.

Note that the assignment completely changes the vector and that the resulting vector's size is the same as the number of elements assigned.

Definition at line 730 of file stl_vector.h.

4.1038.3.36 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reference std::vector< _Tp, _Alloc >::operator[] (size_type __n) [inline], [noexcept]

Subscript access to the data contained in the vector.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read/write reference to data.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 1043 of file stl_vector.h.

4.1038.3.37 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reference std::vector< _Tp, _Alloc >::operator[] (size_type __n) const [inline], [noexcept]

Subscript access to the data contained in the vector.

Parameters

__n	The index of the element for which data should be accessed.

Returns

Read-only (constant) reference to data.

This operator allows for easy, array-style, data access. Note that data access with this operator is unchecked and out_of_range lookups are not defined. (For checked lookups see at().)

Definition at line 1061 of file stl_vector.h.

4.1038.3.38 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::pop_back ( ) [inline], [noexcept]

Removes last element.

This is a typical stack operation. It shrinks the vector by one.

Note that no data is returned, and if the last element's data is needed, it should be retrieved before pop_back() is called.

Definition at line 1225 of file stl_vector.h.

4.1038.3.39 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::push_back (const value_type & __x) [inline]

Add data to the end of the vector.

Parameters

__x	Data to be added.

This is a typical stack operation. The function creates an element at the end of the vector and assigns the given data to it. Due to the nature of a vector this operation can be done in constant time if the vector has preallocated space available.

Definition at line 1187 of file stl_vector.h.

Referenced by __gnu_parallel::multiseq_partition(), and __gnu_parallel::multiseq_selection().

4.1038.3.40 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::vector< _Tp, _Alloc >::rbegin ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to the last element in the vector. Iteration is done in reverse element order.

Definition at line 847 of file stl_vector.h.

4.1038.3.41 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::vector< _Tp, _Alloc >::rbegin ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to the last element in the vector. Iteration is done in reverse element order.

Definition at line 856 of file stl_vector.h.

4.1038.3.42 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> reverse_iterator std::vector< _Tp, _Alloc >::rend ( ) [inline], [noexcept]

Returns a read/write reverse iterator that points to one before the first element in the vector. Iteration is done in reverse element order.

Definition at line 865 of file stl_vector.h.

4.1038.3.43 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> const_reverse_iterator std::vector< _Tp, _Alloc >::rend ( ) const [inline], [noexcept]

Returns a read-only (constant) reverse iterator that points to one before the first element in the vector. Iteration is done in reverse element order.

Definition at line 874 of file stl_vector.h.

4.1038.3.44 template<typename _Tp , typename _Alloc > void vector::reserve (size_type __n)

Attempt to preallocate enough memory for specified number of elements.

Parameters

__n	Number of elements required.

Exceptions

std::length_error	If *n* exceeds `max_size()`.

This function attempts to reserve enough memory for the vector to hold the specified number of elements. If the number requested is more than max_size(), length_error is thrown.

The advantage of this function is that if optimal code is a necessity and the user can determine the number of elements that will be required, the user can reserve the memory in advance, and thus prevent a possible reallocation of memory and copying of vector data.

Definition at line 67 of file vector.tcc.

References std::_Destroy().

4.1038.3.45 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::resize (size_type __new_size) [inline]

Resizes the vector to the specified number of elements.

Parameters

__new_size	Number of elements the vector should contain.

This function will resize the vector to the specified number of elements. If the number is smaller than the vector's current size the vector is truncated, otherwise default constructed elements are appended.

Definition at line 937 of file stl_vector.h.

Referenced by __gnu_parallel::__shrink_and_double(), and __gnu_parallel::multiway_merge_exact_splitting().

4.1038.3.46 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::resize (size_type __new_size, const value_type & __x) [inline]

Resizes the vector to the specified number of elements.

Parameters

__new_size	Number of elements the vector should contain.
__x	Data with which new elements should be populated.

This function will resize the vector to the specified number of elements. If the number is smaller than the vector's current size the vector is truncated, otherwise the vector is extended and new elements are populated with given data.

Definition at line 957 of file stl_vector.h.

4.1038.3.47 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::shrink_to_fit ( ) [inline]

A non-binding request to reduce capacity() to size().

Definition at line 989 of file stl_vector.h.

4.1038.3.48 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> size_type std::vector< _Tp, _Alloc >::size ( ) const [inline], [noexcept]

Returns the number of elements in the vector.

Definition at line 918 of file stl_vector.h.

Referenced by __gnu_parallel::__shrink(), __gnu_parallel::__shrink_and_double(), std::vector< block_type, allocator_type >::_M_range_check(), __gnu_parallel::list_partition(), std::discrete_distribution< _IntType >::max(), std::vector< _Tp, _Alloc >::operator=(), std::operator==(), std::vector< block_type, allocator_type >::resize(), and std::regex_traits< _CharType >::transform_primary().

4.1038.3.49 template<typename _Tp, typename _Alloc = std::allocator<_Tp>> void std::vector< _Tp, _Alloc >::swap (vector< _Tp, _Alloc > & *__x*) [inline], [noexcept]

Swaps data with another vector.

Parameters

__x	A vector of the same element and allocator types.

This exchanges the elements between two vectors in constant time. (Three pointers, so it should be quite fast.) Note that the global std::swap() function is specialized such that std::swap(v1,v2) will feed to this function.

Whether the allocators are swapped depends on the allocator traits.

Definition at line 1480 of file stl_vector.h.

The documentation for this class was generated from the following files:

- stl_vector.h
- vector.tcc

4.1039 std::__debug::vector< _Tp, _Allocator > Class Template Reference

Inheritance diagram for std::__debug::vector< _Tp, _Allocator >:

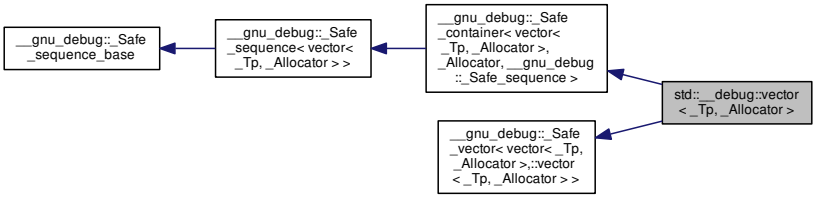

Public Types

- typedef _Allocator **allocator_type**
- typedef __gnu_debug::_Safe_iterator < _Base_const_iterator, vector > **const_iterator**
- typedef _Base::const_pointer **const_pointer**
- typedef _Base::const_reference **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef _Base::difference_type **difference_type**
- typedef __gnu_debug::_Safe_iterator < _Base_iterator, vector > **iterator**
- typedef _Base::pointer **pointer**
- typedef _Base::reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef _Base::size_type **size_type**
- typedef _Tp **value_type**

Public Member Functions

- **vector** (const _Allocator &__a) noexcept
- **vector** (size_type __n, const _Allocator &__a=_Allocator())
- **vector** (size_type __n, const _Tp &__value, const _Allocator &__a=_Allocator())
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>> **vector** (_InputIterator __first, _InputIterator __last, const _Allocator &__a=_Allocator())
- **vector** (const vector &)=default
- **vector** (vector &&)=default
- **vector** (const vector &__x, const allocator_type &__a)
- **vector** (vector &&__x, const allocator_type &__a) noexcept(noexcept(_Base(std::declval< _Base && >()), std::declval< const allocator_type & >()))
- **vector** (initializer_list< value_type > __l, const allocator_type &__a=allocator_type())
- vector (const _Base &__x)

- _Base & **_M_base** () noexcept
- const _Base & **_M_base** () const noexcept
- void _M_invalidate_if (_Predicate __pred)
- void **_M_swap** (_Safe_container &__x) noexcept
- void _M_transfer_from_if (_Safe_sequence &__from, _Predicate __pred)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void **assign** (_InputIterator __first, _InputIterator __last)
- void **assign** (size_type __n, const _Tp &__u)
- void **assign** (initializer_list< value_type > __l)
- reference **back** () noexcept
- const_reference **back** () const noexcept
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- size_type **capacity** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- template<typename... _Args>
  iterator **emplace** (const_iterator __position, _Args &&...__args)
- template<typename... _Args>
  void **emplace_back** (_Args &&...__args)
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- iterator **erase** (const_iterator __position)
- iterator **erase** (const_iterator __first, const_iterator __last)
- reference **front** () noexcept
- const_reference **front** () const noexcept
- iterator **insert** (const_iterator __position, const _Tp &__x)
- template<typename _Up = _Tp>
  __gnu_cxx::__enable_if
  <!std::__are_same< _Up, bool >
  ::__value, iterator >::__type **insert** (const_iterator __position, _Tp &&__x)
- iterator **insert** (const_iterator __position, initializer_list< value_type > __l)
- iterator **insert** (const_iterator __position, size_type __n, const _Tp &__x)
- template<class _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator **insert** (const_iterator __position, _InputIterator __first, _InputIterator __last)
- vector & **operator=** (const vector &)=default
- vector & **operator=** (vector &&)=default
- vector & **operator=** (initializer_list< value_type > __l)
- reference **operator[]** (size_type __n) noexcept
- const_reference **operator[]** (size_type __n) const noexcept
- void **pop_back** () noexcept
- void **push_back** (const _Tp &__x)
- template<typename _Up = _Tp>
  __gnu_cxx::__enable_if
  <!std::__are_same< _Up, bool >
  ::__value, void >::__type **push_back** (_Tp &&__x)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept

- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **reserve** (size_type __n)
- void **resize** (size_type __sz)
- void **resize** (size_type __sz, const _Tp &__c)
- void **shrink_to_fit** ()
- void **swap** (vector &__x) noexcept(/*conditional */)

Public Attributes

- _Safe_iterator_base * _M_const_iterators
- _Safe_iterator_base * _M_iterators
- unsigned int _M_version

Protected Member Functions

- void _M_detach_all ()
- void _M_detach_singular ()
- __gnu_cxx::__mutex & _M_get_mutex () throw ()
- void _M_invalidate_all () const
- bool **_M_requires_reallocation** (size_type __elements) const noexcept
- void _M_revalidate_singular ()
- _Safe_container & **_M_safe** () noexcept
- void _M_swap (_Safe_sequence_base &__x) noexcept
- void **_M_update_guaranteed_capacity** () noexcept

Protected Attributes

- size_type **_M_guaranteed_capacity**

Friends

- template<typename _ItT , typename _SeqT , typename _CatT >
  class **::__gnu_debug::_Safe_iterator**

4.1039.1 Detailed Description

template<typename _Tp, typename _Allocator>class std::__debug::vector< _Tp, _Allocator >

Class std::vector with safety/checking/debug instrumentation.

Definition at line 36 of file debug/vector.

4.1039.2 Constructor & Destructor Documentation

4.1039.2.1 template<typename _Tp, typename _Allocator> std::__debug::vector< _Tp, _Allocator >::vector (const _Base & __x) [inline]

Construction from a normal-mode vector.

Definition at line 224 of file debug/vector.

4.1039.3 Member Function Documentation

4.1039.3.1 void __gnu_debug::_Safe_sequence_base::_M_detach_all ( ) [protected], [inherited]

Detach all iterators, leaving them singular.

Referenced by __gnu_debug::_Safe_sequence_base::~_Safe_sequence_base().

4.1039.3.2 void __gnu_debug::_Safe_sequence_base::_M_detach_singular ( ) [protected], [inherited]

Detach all singular iterators.

Postcondition

for all iterators i attached to this sequence, i->_M_version == _M_version.

4.1039.3.3 __gnu_cxx::__mutex& __gnu_debug::_Safe_sequence_base::_M_get_mutex ( ) throw) [protected], [inherited]

For use in _Safe_sequence.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1039.3.4 void __gnu_debug::_Safe_sequence_base::_M_invalidate_all ( ) const [inline], [protected], [inherited]

Invalidates all iterators.

Definition at line 256 of file safe_base.h.

References __gnu_debug::_Safe_sequence_base::_M_version.

4.1039.3.5 void __gnu_debug::_Safe_sequence< vector< _Tp, _Allocator > >::_M_invalidate_if (_Predicate __pred) [inherited]

Invalidates all iterators `x` that reference this sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1039.3.6 void __gnu_debug::_Safe_sequence_base::_M_revalidate_singular ( ) [protected], [inherited]

Revalidates all attached singular iterators. This method may be used to validate iterators that were invalidated before (but for some reason, such as an exception, need to become valid again).

4.1039.3.7 void __gnu_debug::_Safe_sequence_base::_M_swap (_Safe_sequence_base & __x) [protected], [noexcept], [inherited]

Swap this sequence with the given sequence. This operation also swaps ownership of the iterators, so that when the operation is complete all iterators that originally referenced one container now reference the other container.

4.1039.3.8 void __gnu_debug::_Safe_sequence< vector< _Tp, _Allocator > >::_M_transfer_from_if (_Safe_sequence< vector< _Tp, _Allocator > > & __from, _Predicate __pred) [inherited]

Transfers all iterators `x` that reference `from` sequence, are not singular, and for which `__pred(x)` returns `true`. `__pred` will be invoked with the normal iterators nested in the safe ones.

4.1039.4 Member Data Documentation

4.1039.4.1 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_const_iterators [inherited]

The list of constant iterators that reference this container.

Definition at line 197 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1039.4.2 _Safe_iterator_base* __gnu_debug::_Safe_sequence_base::_M_iterators [inherited]

The list of mutable iterators that reference this container.

Definition at line 194 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence< _Sequence >::_M_transfer_from_if().

4.1039.4.3 unsigned int __gnu_debug::_Safe_sequence_base::_M_version [mutable], [inherited]

The container version number. This number may never be 0.

Definition at line 200 of file safe_base.h.

Referenced by __gnu_debug::_Safe_sequence_base::_M_invalidate_all().

The documentation for this class was generated from the following file:

- debug/vector

4.1040 std::vector< bool, _Alloc > Class Template Reference

Inherits std::_Bvector_base< _Alloc >.

Public Types

- typedef _Alloc **allocator_type**
- typedef _Bit_const_iterator **const_iterator**
- typedef const bool * **const_pointer**
- typedef bool **const_reference**
- typedef std::reverse_iterator < const_iterator > **const_reverse_iterator**
- typedef ptrdiff_t **difference_type**
- typedef _Bit_iterator **iterator**
- typedef _Bit_reference * **pointer**
- typedef _Bit_reference **reference**
- typedef std::reverse_iterator < iterator > **reverse_iterator**
- typedef size_t **size_type**
- typedef bool **value_type**

Public Member Functions

- **vector** (const allocator_type &__a)
- **vector** (size_type __n, const allocator_type &__a=allocator_type())
- **vector** (size_type __n, const bool &__value, const allocator_type &__a=allocator_type())
- **vector** (const vector &__x)

- **vector** (vector &&)=default
- **vector** (vector &&__x, const allocator_type &__a) noexcept(_Bit_alloc_traits::_S_always_equal())
- **vector** (const vector &__x, const allocator_type &__a)
- **vector** (initializer_list< bool > __l, const allocator_type &__a=allocator_type())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  vector (_InputIterator __first, _InputIterator __last, const allocator_type &__a=allocator_type())
- void **assign** (size_type __n, const bool &__x)
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  void **assign** (_InputIterator __first, _InputIterator __last)
- void **assign** (initializer_list< bool > __l)
- reference **at** (size_type __n)
- const_reference **at** (size_type __n) const
- reference **back** ()
- const_reference **back** () const
- iterator **begin** () noexcept
- const_iterator **begin** () const noexcept
- size_type **capacity** () const noexcept
- const_iterator **cbegin** () const noexcept
- const_iterator **cend** () const noexcept
- void **clear** () noexcept
- const_reverse_iterator **crbegin** () const noexcept
- const_reverse_iterator **crend** () const noexcept
- void **data** () noexcept
- template<typename... _Args>
  iterator **emplace** (const_iterator __pos, _Args &&...__args)
- template<typename... _Args>
  void **emplace_back** (_Args &&...__args)
- bool **empty** () const noexcept
- iterator **end** () noexcept
- const_iterator **end** () const noexcept
- iterator **erase** (const_iterator __position)
- iterator **erase** (const_iterator __first, const_iterator __last)
- void **flip** () noexcept
- reference **front** ()
- const_reference **front** () const
- allocator_type **get_allocator** () const
- iterator **insert** (const_iterator __position, const bool &__x=bool())
- template<typename _InputIterator , typename = std::_RequireInputIter<_InputIterator>>
  iterator **insert** (const_iterator __position, _InputIterator __first, _InputIterator __last)
- iterator **insert** (const_iterator __position, size_type __n, const bool &__x)
- iterator **insert** (const_iterator __p, initializer_list< bool > __l)
- size_type **max_size** () const noexcept
- vector & **operator=** (const vector &__x)
- vector & **operator=** (vector &&__x) noexcept(_Bit_alloc_traits::_S_nothrow_move())
- vector & **operator=** (initializer_list< bool > __l)
- reference **operator[]** (size_type __n)
- const_reference **operator[]** (size_type __n) const
- void **pop_back** ()
- void **push_back** (bool __x)
- reverse_iterator **rbegin** () noexcept
- const_reverse_iterator **rbegin** () const noexcept

- reverse_iterator **rend** () noexcept
- const_reverse_iterator **rend** () const noexcept
- void **reserve** (size_type __n)
- void **resize** (size_type __new_size, bool __x=bool())
- void **shrink_to_fit** ()
- size_type **size** () const noexcept
- void **swap** (vector &__x) noexcept

Static Public Member Functions

- static void **swap** (reference __x, reference __y) noexcept

Protected Types

- typedef
  __gnu_cxx::__alloc_traits
  < _Alloc >::template rebind
  < _Bit_type >::other **_Bit_alloc_type**

Protected Member Functions

- _Bit_pointer **_M_allocate** (size_t __n)
- template<typename _InputIterator >
  void **_M_assign_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_assign_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- size_type **_M_check_len** (size_type __n, const char *__s) const
- iterator **_M_copy_aligned** (const_iterator __first, const_iterator __last, iterator __result)
- void **_M_deallocate** ()
- iterator **_M_erase** (iterator __pos)
- iterator **_M_erase** (iterator __first, iterator __last)
- void **_M_erase_at_end** (iterator __pos)
- void **_M_fill_assign** (size_t __n, bool __x)
- void **_M_fill_insert** (iterator __position, size_type __n, bool __x)
- _Bit_alloc_type & **_M_get_Bit_allocator** () noexcept
- const _Bit_alloc_type & **_M_get_Bit_allocator** () const noexcept
- void **_M_initialize** (size_type __n)
- template<typename _Integer >
  void **_M_initialize_dispatch** (_Integer __n, _Integer __x, __true_type)
- template<typename _InputIterator >
  void **_M_initialize_dispatch** (_InputIterator __first, _InputIterator __last, __false_type)
- template<typename _InputIterator >
  void **_M_initialize_range** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_initialize_range** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_initialize_value** (bool __x)
- void **_M_insert_aux** (iterator __position, bool __x)
- template<typename _Integer >
  void **_M_insert_dispatch** (iterator __pos, _Integer __n, _Integer __x, __true_type)

- template<typename _InputIterator >
  void **_M_insert_dispatch** (iterator __pos, _InputIterator __first, _InputIterator __last, __false_type)
- template<typename _InputIterator >
  void **_M_insert_range** (iterator __pos, _InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _ForwardIterator >
  void **_M_insert_range** (iterator __position, _ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- void **_M_move_data** (_Bvector_base &&__x) noexcept
- void **_M_range_check** (size_type __n) const
- void **_M_reallocate** (size_type __n)
- bool **_M_shrink_to_fit** ()

Static Protected Member Functions

- static size_t **_S_nword** (size_t __n)

Protected Attributes

- _Bvector_impl **_M_impl**

Friends

- struct **std::hash**< **vector** >

4.1040.1 Detailed Description

template<typename _Alloc>class std::vector< bool, _Alloc >

A specialization of vector for booleans which offers fixed time access to individual elements in any order.

Template Parameters

_Alloc	Allocator type.

Note that vector<bool> does not actually meet the requirements for being a container. This is because the reference and pointer types are not really references and pointers to bool. See DR96 for details.

See Also

vector for function documentation.

In some terminology a vector can be described as a dynamic C-style array, it offers fast and efficient access to individual elements in any order and saves the user from worrying about memory and size allocation. Subscripting ([]) access is also provided as with C-style arrays.

Definition at line 615 of file stl_bvector.h.

The documentation for this class was generated from the following files:

- stl_bvector.h
- vector.tcc

4.1041 std::wbuffer_convert< _Codecvt, _Elem, _Tr > Class Template Reference

Inheritance diagram for std::wbuffer_convert< _Codecvt, _Elem, _Tr >:



Public Types

- typedef _Codecvt::state_type **state_type**

- typedef _Elem char_type
- typedef _Tr **traits_type**
- typedef traits_type::int_type **int_type**
- typedef traits_type::pos_type **pos_type**
- typedef traits_type::off_type **off_type**

- typedef basic_streambuf < char_type, traits_type > __streambuf_type

Public Member Functions

- wbuffer_convert ()
- wbuffer_convert (streambuf *__bytebuf, _Codecvt *__pcvt=new _Codecvt, state_type __state=state_type())
- **wbuffer_convert** (const wbuffer_convert &)=delete
- locale getloc () const
- streamsize in_avail ()
- wbuffer_convert & **operator=** (const wbuffer_convert &)=delete
- locale pubimbue (const locale &__loc)
- streambuf * **rdbuf** () const noexcept
- streambuf * **rdbuf** (streambuf *__bytebuf) noexcept
- int_type sbumpc ()
- int_type sgetc ()
- streamsize sgetn (char_type *__s, streamsize __n)
- int_type snextc ()
- int_type sputbackc (char_type __c)
- int_type sputc (char_type __c)

- streamsize sputn (const char_type *__s, streamsize __n)
- state_type state () const noexcept
- int_type sungetc ()

- basic_streambuf * pubsetbuf (char_type *__s, streamsize __n)
- pos_type pubseekoff (off_type __off, ios_base::seekdir __way, ios_base::openmode __mode=ios_base::in|ios_base::out)
- pos_type pubseekpos (pos_type __sp, ios_base::openmode __mode=ios_base::in|ios_base::out)
- int pubsync ()

Protected Member Functions

- void **__safe_gbump** (streamsize __n)
- void **__safe_pbump** (streamsize __n)
- void gbump (int __n)
- virtual void imbue (const locale &__loc)
- _Wide_streambuf::int_type overflow (typename _Wide_streambuf::int_type __out)
- virtual int_type pbackfail (int_type __c=traits_type::eof())
- void pbump (int __n)
- virtual pos_type seekoff (off_type, ios_base::seekdir, ios_base::openmode=ios_base::in|ios_base::out)
- virtual pos_type seekpos (pos_type, ios_base::openmode=ios_base::in|ios_base::out)
- virtual basic_streambuf < char_type, _Tr > * setbuf (char_type *, streamsize)
- void setg (char_type *__gbeg, char_type *__gnext, char_type *__gend)
- void setp (char_type *__pbeg, char_type *__pend)
- virtual streamsize showmanyc ()
- void **swap** (basic_streambuf &__sb)
- int sync ()
- virtual int_type uflow ()
- _Wide_streambuf::int_type underflow ()
- virtual streamsize xsgetn (char_type *__s, streamsize __n)
- streamsize **xsputn** (const typename _Wide_streambuf::char_type *__s, streamsize __n)
- virtual streamsize xsputn (const char_type *__s, streamsize __n)

- char_type * eback () const
- char_type * **gptr** () const
- char_type * **egptr** () const

- char_type * pbase () const
- char_type * **pptr** () const
- char_type * **epptr** () const

Protected Attributes

- locale _M_buf_locale
- char_type * _M_in_beg
- char_type * _M_in_cur
- char_type * _M_in_end
- char_type * _M_out_beg
- char_type * _M_out_cur
- char_type * _M_out_end

4.1041.1 Detailed Description

template<typename _Codecvt, typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>>class std::wbuffer_convert< _Codecvt, _Elem, _Tr >

Buffer conversions.

Definition at line 387 of file locale_conv.h.

4.1041.2 Member Typedef Documentation

4.1041.2.1 typedef basic_streambuf<char_type, traits_type> std::basic_streambuf< _Elem , _Tr >::__streambuf_type [inherited]

This is a non-standard type.

Definition at line 140 of file streambuf.

4.1041.2.2 typedef _Elem std::basic_streambuf< _Elem , _Tr >::char_type [inherited]

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 131 of file streambuf.

4.1041.2.3 typedef traits_type::int_type std::basic_streambuf< _Elem , _Tr >::int_type [inherited]

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 133 of file streambuf.

4.1041.2.4 typedef traits_type::off_type std::basic_streambuf< _Elem , _Tr >::off_type [inherited]

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 135 of file streambuf.

4.1041.2.5 typedef traits_type::pos_type std::basic_streambuf< _Elem , _Tr >::pos_type [inherited]

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 134 of file streambuf.

4.1041.2.6 typedef _Tr std::basic_streambuf< _Elem , _Tr >::traits_type [inherited]

These are standard types. They permit a standardized way of referring to names of (or names dependent on) the template parameters, which are specific to the implementation.

Definition at line 132 of file streambuf.

4.1041.3 Constructor & Destructor Documentation

4.1041.3.1 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> std::wbuffer_convert< _Codecvt, _Elem, _Tr >::wbuffer_convert ( ) [inline]

Default constructor.

Definition at line 395 of file locale_conv.h.

4.1041.3.2 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> std::wbuffer_convert< _Codecvt, _Elem, _Tr >::wbuffer_convert (streambuf * *__bytebuf*, _Codecvt * *__pcvt* = new _Codecvt, state_type *__state* = state_type()) [inline], [explicit]

Constructor.

Parameters

__bytebuf	The underlying byte stream buffer.
__pcvt	The facet to use for conversions.
__state	Initial conversion state.

Takes ownership of __pcvt and will delete it in the destructor.

Definition at line 406 of file locale_conv.h.

References std::basic_streambuf< _Elem, _Tr >::setg(), and std::basic_streambuf< _Elem, _Tr >::setp().

4.1041.4 Member Function Documentation

4.1041.4.1 char_type* std::basic_streambuf< _Elem , _Tr >::eback ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 489 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_in_beg.

4.1041.4.2 char_type* std::basic_streambuf< _Elem , _Tr >::egptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 495 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_in_end.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::underflow().

4.1041.4.3 char_type* std::basic_streambuf< _Elem , _Tr >::epptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 542 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_out_end.

4.1041.4.4 void std::basic_streambuf< _Elem , _Tr >::gbump (int __n) [inline], [protected], [inherited]

Moving the read position.

Parameters

__n	The delta by which to move.

This just advances the read position without returning any data.

Definition at line 505 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_in_cur.

4.1041.4.5 locale std::basic_streambuf< _Elem , _Tr >::getloc ( ) const [inline], [inherited]

Locale access.

Returns

The current locale in effect.

If pubimbue(loc) has been called, then the most recent `loc` is returned. Otherwise the global locale in effect at the time of construction is returned.

Definition at line 233 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_buf_locale.

4.1041.4.6 char_type* std::basic_streambuf< _Elem , _Tr >::gptr ( ) const [inline], [protected], [inherited]

Access to the get area.

These functions are only available to other protected functions, including derived classes.

- eback() returns the beginning pointer for the input sequence
- gptr() returns the next pointer for the input sequence
- egptr() returns the end pointer for the input sequence

Definition at line 492 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_in_cur.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::underflow().

4.1041.4.7 virtual void std::basic_streambuf< _Elem , _Tr >::imbue (const locale & *__loc*) [inline], [protected], [virtual], [inherited]

Changes translations.

Parameters

__loc	A new locale.

Translations done during I/O which depend on the current locale are changed by this call. The standard adds, *Between invocations of this function a class derived from streambuf can safely cache results of calls to locale functions and to members of facets so obtained.*

Note

Base class version does nothing.

Definition at line 583 of file streambuf.

4.1041.4.8 streamsize std::basic_streambuf< _Elem , _Tr >::in_avail ( ) [inline], [inherited]

Looking ahead into the stream.

Returns

The number of characters available.

If a read position is available, returns the number of characters available for reading before the buffer must be refilled. Otherwise returns the derived `showmanyc()`.

Definition at line 291 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::egptr(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::showmanyc().

4.1041.4.9 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> _Wide_streambuf::int_type std::wbuffer_convert< _Codecvt, _Elem, _Tr >::overflow (typename _Wide_streambuf::int_type *__c*) [inline], [protected], [virtual]

Consumes data from the buffer; writes to the controlled sequence.

Parameters

__c	An additional character to consume.

Returns

eof() to indicate failure, something else (usually __*c*, or not_eof())

Informally, this function is called when the output buffer is full (or does not exist, as buffering need not actually be done). If a buffer exists, it is *consumed*, with *some effect* on the controlled sequence. (Typically, the buffer is written out to the sequence verbatim.) In either case, the character *c* is also written out, if __*c* is not `eof()`.

For a formal definition of this function, see a good text such as Langer & Kreft, or [27.5.2.4.5]/3-7.

A functioning output streambuf can be created by overriding only this function (no buffer area will be used).

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _Elem, _Tr >.

Definition at line 450 of file locale_conv.h.

References std::basic_streambuf< _Elem, _Tr >::sputc().

4.1041.4.10 virtual int_type std::basic_streambuf< _Elem , _Tr >::pbackfail (int_type __c = traits_type::eof()) [inline], [protected], [virtual], [inherited]

Tries to back up the input sequence.

Parameters

__c	The character to be inserted back into the sequence.

Returns

eof() on failure, *some other value* on success

Postcondition

The constraints of `gptr()`, `eback()`, and `pptr()` are the same as for `underflow()`.

Note

Base class version does nothing, returns eof().

Definition at line 731 of file streambuf.

4.1041.4.11 char_type* std::basic_streambuf< _Elem , _Tr >::pbase ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 536 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_out_beg.

4.1041.4.12 void std::basic_streambuf< _Elem , _Tr >::pbump (int __n) [inline], [protected], [inherited]

Moving the write position.

Parameters

__n	The delta by which to move.

This just advances the write position without returning any data.

Definition at line 552 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_out_cur.

4.1041.4.13 char_type* std::basic_streambuf< _Elem , _Tr >::pptr ( ) const [inline], [protected], [inherited]

Access to the put area.

These functions are only available to other protected functions, including derived classes.

- pbase() returns the beginning pointer for the output sequence
- pptr() returns the next pointer for the output sequence
- epptr() returns the end pointer for the output sequence

Definition at line 539 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_out_cur.

4.1041.4.14 locale std::basic_streambuf< _Elem , _Tr >::pubimbue (const locale & *__loc*) [inline], [inherited]

Entry point for imbue().

Parameters

__loc	The new locale.

Returns

The previous locale.

Calls the derived imbue(__loc).

Definition at line 216 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_buf_locale, std::basic_streambuf< _CharT, _Traits >::getloc(), and std::basic_streambuf< _CharT, _Traits >::imbue().

4.1041.4.15 pos_type std::basic_streambuf< _Elem , _Tr >::pubseekoff (off_type *__off,* ios_base::seekdir *__way,* ios_base::openmode *__mode* = ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__off	Offset.
__way	Value for ios_base::seekdir.

__mode	Value for ios_base::openmode.

Calls virtual seekoff function.

Definition at line 258 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::seekoff().

4.1041.4.16 pos_type std::basic_streambuf< _Elem , _Tr >::pubseekpos (pos_type *__sp,* ios_base::openmode *__mode =* ios_base::in | ios_base::out) [inline], [inherited]

Alters the stream position.

Parameters

__sp	Position
__mode	Value for ios_base::openmode.

Calls virtual seekpos function.

Definition at line 270 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::seekpos().

4.1041.4.17 basic_streambuf* std::basic_streambuf< _Elem , _Tr >::pubsetbuf (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry points for derived buffer functions.

The public versions of `pubfoo` dispatch to the protected derived `foo` member functions, passing the arguments (if any) and returning the result unchanged.

Definition at line 246 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::setbuf().

4.1041.4.18 int std::basic_streambuf< _Elem , _Tr >::pubsync ( ) [inline], [inherited]

Calls virtual sync function.

Definition at line 278 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::sync().

4.1041.4.19 int_type std::basic_streambuf< _Elem , _Tr >::sbumpc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character and increments the read pointer, otherwise calls and returns `uflow()`.

Definition at line 323 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::egptr(), std::basic_streambuf< _CharT, _Traits >::gbump(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::uflow().

4.1041.4.20 virtual **pos_type std::basic_streambuf< _Elem , _Tr >::seekoff (off_type , ios_base::seekdir , ios_base::openmode =** `ios_base::in | ios_base::out` **)** `[inline], [protected], [virtual], [inherited]`

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Definition at line 609 of file streambuf.

4.1041.4.21 virtual **pos_type std::basic_streambuf< _Elem , _Tr >::seekpos (pos_type , ios_base::openmode =** `ios_base::in | ios_base::out` **)** `[inline], [protected], [virtual], [inherited]`

Alters the stream positions.

Each derived class provides its own appropriate behavior.

Note

Base class version does nothing, returns a `pos_type` that represents an invalid stream position.

Definition at line 621 of file streambuf.

4.1041.4.22 virtual **basic_streambuf<char_type,_Tr >* std::basic_streambuf< _Elem , _Tr >::setbuf (char_type * , streamsize)** `[inline], [protected], [virtual], [inherited]`

Manipulates the buffer.

Each derived class provides its own appropriate behavior. See the next-to-last paragraph of https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html#io.streambuf.buffering for more on this function.

Note

Base class version does nothing, returns `this`.

Definition at line 598 of file streambuf.

4.1041.4.23 void **std::basic_streambuf< _Elem , _Tr >::setg (char_type * *__gbeg*, char_type * *__gnext*, char_type * *__gend*)** `[inline], [protected], [inherited]`

Setting the three read area pointers.

Parameters

__gbeg	A pointer.
__gnext	A pointer.
__gend	A pointer.

Postcondition

__gbeg == `eback()`, *__gnext* == `gptr()`, and *__gend* == `egptr()`

Definition at line 516 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_in_beg, std::basic_streambuf< _CharT, _Traits >::_M_in_cur, and std::basic_streambuf< _CharT, _Traits >::_M_in_end.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::wbuffer_convert().

4.1041.4.24 void std::basic_streambuf< _Elem , _Tr >::setp (char_type * *__pbeg,* char_type * *__pend*) [inline], [protected], [inherited]

Setting the three write area pointers.

Parameters

__pbeg	A pointer.
__pend	A pointer.

Postcondition

__pbeg == `pbase()`, *__pbeg* == `pptr()`, and *__pend* == `epptr()`

Definition at line 562 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::_M_out_beg, std::basic_streambuf< _CharT, _Traits >::_M_out_cur, and std::basic_streambuf< _CharT, _Traits >::_M_out_end.

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::wbuffer_convert().

4.1041.4.25 int_type std::basic_streambuf< _Elem , _Tr >::sgetc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

If the input read position is available, returns that character, otherwise calls and returns `underflow()`. Does not move the read position after fetching the character.

Definition at line 345 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::egptr(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::underflow().

4.1041.4.26 streamsize std::basic_streambuf< _Elem , _Tr >::sgetn (char_type * *__s,* streamsize *__n*) [inline], [inherited]

Entry point for xsgetn.

Parameters

__s	A buffer area.
__n	A count.

Returns xsgetn(__s,__n). The effect is to fill *__s*[0] through *__s*[__n-1] with characters from the input sequence, if possible.

Definition at line 364 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::xsgetn().

4.1041.4.27 virtual streamsize std::basic_streambuf< _Elem , _Tr >::showmanyc ( ) [inline], [protected], [virtual], [inherited]

Investigating the data available.

Returns

An estimate of the number of characters available in the input sequence, or -1.

If it returns a positive value, then successive calls to `underflow()` *will not return* `traits::eof()` *until at least that number of characters have been supplied. If* `showmanyc()` *returns -1, then calls to* `underflow()` *or* `uflow()` *will fail.* [27.5.2.4.3]/1

Note

Base class version does nothing, returns zero.
The standard adds that *the intention is not only that the calls [to underflow or uflow] will not return* `eof()` *but that they will return immediately.*
The standard adds that *the morphemes of* `showmanyc` *are* ***es-how-many-see****, not* ***show-manic****.*

Definition at line 656 of file streambuf.

4.1041.4.28 int_type std::basic_streambuf< _Elem , _Tr >::snextc ( ) [inline], [inherited]

Getting the next character.

Returns

The next character, or eof.

Calls `sbumpc()`, and if that function returns `traits::eof()`, so does this function. Otherwise, `sgetc()`.

Definition at line 305 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::sbumpc(), and std::basic_streambuf< _CharT, _Traits >::sgetc().

4.1041.4.29 int_type std::basic_streambuf< _Elem , _Tr >::sputbackc (char_type *__c*) [inline], [inherited]

Pushing characters back into the input stream.

Parameters

__c	The character to push back.

Returns

The previous character, if possible.

Similar to sungetc(), but __*c* is pushed onto the stream instead of *the previous character.* If successful, the next character fetched from the input stream will be __*c*.

Definition at line 379 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::eback(), std::basic_streambuf< _CharT, _Traits >::gbump(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::pbackfail().

4.1041.4.30 int_type std::basic_streambuf< _Elem , _Tr >::sputc (char_type __c) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__*c*	A character to output.

Returns

__*c*, if possible.

One of two public output functions.

If a write position is available for the output sequence (i.e., the buffer is not full), stores __*c* in that position, increments the position, and returns `traits::to_int_type(__c)`. If a write position is not available, returns `overflow(__c)`.

Definition at line 431 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::epptr(), std::basic_streambuf< _CharT, _Traits >::overflow(), std::basic_streambuf< _CharT, _Traits >::pbump(), and std::basic_streambuf< _CharT, _Traits >::pptr().

Referenced by std::wbuffer_convert< _Codecvt, _Elem, _Tr >::overflow().

4.1041.4.31 streamsize std::basic_streambuf< _Elem , _Tr >::sputn (const char_type * __s, streamsize __n) [inline], [inherited]

Entry point for all single-character output functions.

Parameters

__*s*	A buffer read area.
__*n*	A count.

One of two public output functions.

Returns xsputn(__s,__n). The effect is to write __*s*[0] through __*s*[__n-1] to the output sequence, if possible.

Definition at line 457 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::xsputn().

4.1041.4.32 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> state_type std::wbuffer_convert< _Codecvt, _Elem, _Tr >::state ( ) const [inline], [noexcept]

The conversion state following the last conversion.

Definition at line 442 of file locale_conv.h.

4.1041.4.33 int_type std::basic_streambuf< _Elem , _Tr >::sungetc ( ) [inline], [inherited]

Moving backwards in the input stream.

Returns

The previous character, if possible.

If a putback position is available, this function decrements the input pointer and returns that character. Otherwise, calls and returns pbackfail(). The effect is to *unget* the last character *gotten*.

Definition at line 404 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::eback(), std::basic_streambuf< _CharT, _Traits >::gbump(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::pbackfail().

4.1041.4.34 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> int std::wbuffer_convert< _Codecvt, _Elem, _Tr >::sync (void) [inline], [protected], [virtual]

Synchronizes the buffer arrays with the controlled sequences.

Returns

-1 on failure.

Each derived class provides its own appropriate behavior, including the definition of *failure*.

Note

Base class version does nothing, returns zero.

Reimplemented from std::basic_streambuf< _Elem, _Tr >.

Definition at line 446 of file locale_conv.h.

References std::basic_streambuf< _CharT, _Traits >::pubsync().

4.1041.4.35 virtual int_type std::basic_streambuf< _Elem , _Tr >::uflow ( ) [inline], [protected], [virtual], [inherited]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function does the same thing as `underflow()`, and in fact is required to call that function. It also returns the new character, like `underflow()` does. However, this function also moves the read position forward by one.

Definition at line 707 of file streambuf.

References std::basic_streambuf< _CharT, _Traits >::gbump(), std::basic_streambuf< _CharT, _Traits >::gptr(), and std::basic_streambuf< _CharT, _Traits >::underflow().

4.1041.4.36 template<typename _Codecvt , typename _Elem = wchar_t, typename _Tr = char_traits<_Elem>> _Wide_streambuf::int_type std::wbuffer_convert< _Codecvt, _Elem, _Tr >::underflow ( ) [inline], [protected], [virtual]

Fetches more data from the controlled sequence.

Returns

The first character from the *pending sequence*.

Informally, this function is called when the input buffer is exhausted (or does not exist, as buffering need not actually be done). If a buffer exists, it is *refilled*. In either case, the next available character is returned, or `traits::eof()` to indicate a null pending sequence.

For a formal definition of the pending sequence, see a good text such as Langer & Kreft, or [27.5.2.4.3]/7-14.

A functioning input streambuf can be created by overriding only this function (no buffer area will be used). For an example, see https://gcc.gnu.org/onlinedocs/libstdc++/manual/streambufs.html

Note

Base class version does nothing, returns eof().

Reimplemented from std::basic_streambuf< _Elem, _Tr >.

Definition at line 460 of file locale_conv.h.

References std::basic_streambuf< _Elem, _Tr >::egptr(), and std::basic_streambuf< _Elem, _Tr >::gptr().

4.1041.4.37 virtual streamsize std::basic_streambuf< _Elem , _Tr >::xsgetn (char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character extraction.

Parameters

__s	A buffer area.
__n	Maximum number of characters to assign.

Returns

The number of characters assigned.

Fills *__s*[0] through *__s*[__n-1] with characters from the input sequence, as if by `sbumpc()`. Stops when either *__n* characters have been copied, or when `traits::eof()` would be copied.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

4.1041.4.38 virtual streamsize std::basic_streambuf< _Elem , _Tr >::xsputn (const char_type * __s, streamsize __n) [protected], [virtual], [inherited]

Multiple character insertion.

Parameters

__s	A buffer area.
__n	Maximum number of characters to write.

Returns

The number of characters written.

Writes *__s*[0] through *__s*[__n-1] to the output sequence, as if by `sputc()`. Stops when either *n* characters have been copied, or when `sputc()` would return `traits::eof()`.

It is expected that derived classes provide a more efficient implementation by overriding this definition.

4.1041.5 Member Data Documentation

4.1041.5.1 locale std::basic_streambuf< _Elem , _Tr >::_M_buf_locale [protected], [inherited]

Current locale setting.

Definition at line 199 of file streambuf.

4.1041.5.2 char_type* std::basic_streambuf< _Elem , _Tr >::_M_in_beg [protected], [inherited]

Start of get area.

Definition at line 191 of file streambuf.

4.1041.5.3 char_type* std::basic_streambuf< _Elem , _Tr >::_M_in_cur [protected], [inherited]

Current read area.

Definition at line 192 of file streambuf.

4.1041.5.4 char_type* std::basic_streambuf< _Elem , _Tr >::_M_in_end [protected], [inherited]

End of get area.

Definition at line 193 of file streambuf.

4.1041.5.5 char_type* std::basic_streambuf< _Elem , _Tr >::_M_out_beg [protected], [inherited]

Start of put area.

Definition at line 194 of file streambuf.

4.1041.5.6 char_type* std::basic_streambuf< _Elem , _Tr >::_M_out_cur [protected], [inherited]

Current put area.

Definition at line 195 of file streambuf.

4.1041.5.7 char_type* std::basic_streambuf< _Elem , _Tr >::_M_out_end [protected], [inherited]

End of put area.

Definition at line 196 of file streambuf.

The documentation for this class was generated from the following file:

- locale_conv.h

4.1042 std::weak_ptr< _Tp > Class Template Reference

Inherits std::__weak_ptr< _Tp, _Lp >.

Public Types

- using **element_type** = typename remove_extent< _Tp >::type

Public Member Functions

- template<typename _Yp , typename = _Constructible<const shared_ptr<_Yp>&>>
  weak_ptr (const shared_ptr< _Yp > &__r) noexcept
- **weak_ptr** (const weak_ptr &) noexcept=default
- template<typename _Yp , typename = _Constructible<const weak_ptr<_Yp>&>>
  weak_ptr (const weak_ptr< _Yp > &__r) noexcept
- **weak_ptr** (weak_ptr &&) noexcept=default
- template<typename _Yp , typename = _Constructible<weak_ptr<_Yp>>>
  weak_ptr (weak_ptr< _Yp > &&__r) noexcept
- bool **expired** () const noexcept
- shared_ptr< _Tp > **lock** () const noexcept
- weak_ptr & **operator=** (const weak_ptr &__r) noexcept=default
- template<typename _Yp >
  _Assignable< const weak_ptr
  < _Yp > & > **operator=** (const weak_ptr< _Yp > &__r) noexcept
- template<typename _Yp >
  _Assignable< const shared_ptr
  < _Yp > & > **operator=** (const shared_ptr< _Yp > &__r) noexcept
- weak_ptr & **operator=** (weak_ptr &&__r) noexcept=default
- template<typename _Yp >
  _Assignable< weak_ptr< _Yp > > **operator=** (weak_ptr< _Yp > &&__r) noexcept
- template<typename _Tp1 >
  bool **owner_before** (const __shared_ptr< _Tp1, _Lp > &__rhs) const noexcept
- template<typename _Tp1 >
  bool **owner_before** (const __weak_ptr< _Tp1, _Lp > &__rhs) const noexcept
- void **reset** () noexcept
- void **swap** (__weak_ptr &__s) noexcept
- long **use_count** () const noexcept

Related Functions

(Note that these are not member functions.)

- template<typename _Tp >
  void swap (weak_ptr< _Tp > &__a, weak_ptr< _Tp > &__b) noexcept

4.1042.1 Detailed Description

template<typename _Tp>class std::weak_ptr< _Tp >

A non-owning observer for a pointer owned by a shared_ptr.

A weak_ptr provides a safe alternative to a raw pointer when you want a non-owning reference to an object that is managed by a shared_ptr.

Unlike a raw pointer, a weak_ptr can be converted to a new shared_ptr that shares ownership with every other shared-_ptr that already owns the pointer. In other words you can upgrade from a non-owning "weak" reference to an owning shared_ptr, without having access to any of the existing shared_ptr objects.

Also unlike a raw pointer, a weak_ptr does not become "dangling" after the object it points to has been destroyed. Instead, a weak_ptr becomes *expired* and can no longer be converted to a shared_ptr that owns the freed pointer, so you cannot accidentally access the pointed-to object after it has been destroyed.

Definition at line 685 of file bits/shared_ptr.h.

The documentation for this class was generated from the following file:

- bits/shared_ptr.h

4.1043 std::weibull_distribution< _RealType > Class Template Reference

Classes

- struct param_type

Public Types

- typedef _RealType result_type

Public Member Functions

- **weibull_distribution** (_RealType __a, _RealType __b=_RealType(1))
- **weibull_distribution** (const param_type &__p)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng)
- template<typename _ForwardIterator , typename _UniformRandomNumberGenerator >
  void **__generate** (_ForwardIterator __f, _ForwardIterator __t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  void **__generate** (result_type *__f, result_type *__t, _UniformRandomNumberGenerator &__urng, const param_type &__p)
- _RealType a () const
- _RealType b () const
- result_type max () const
- result_type min () const
- template<typename _UniformRandomNumberGenerator >
  weibull_distribution
  < _RealType >::result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- template<typename _UniformRandomNumberGenerator >
  result_type operator() (_UniformRandomNumberGenerator &__urng)
- template<typename _UniformRandomNumberGenerator >
  result_type **operator()** (_UniformRandomNumberGenerator &__urng, const param_type &__p)
- param_type param () const
- void param (const param_type &__param)
- void reset ()

Friends

- bool operator== (const weibull_distribution &__d1, const weibull_distribution &__d2)

4.1043.1 Detailed Description

template<typename _RealType = double>class std::weibull_distribution< _RealType >

A weibull_distribution random number distribution.

The formula for the normal probability density function is:

$$p(x|\alpha,\beta) = \frac{\alpha}{\beta}(\frac{x}{\beta})^{\alpha-1}\exp(-(\frac{x}{\beta})^{\alpha})$$

Definition at line 4851 of file random.h.

4.1043.2 Member Typedef Documentation

4.1043.2.1 template<typename _RealType = double> typedef _RealType std::weibull_distribution< _RealType >::result_type

The type of the range of the distribution.

Definition at line 4854 of file random.h.

4.1043.3 Member Function Documentation

4.1043.3.1 template<typename _RealType = double> _RealType std::weibull_distribution< _RealType >::a ( ) const [inline]

Return the a parameter of the distribution.

Definition at line 4916 of file random.h.

4.1043.3.2 template<typename _RealType = double> _RealType std::weibull_distribution< _RealType >::b ( ) const [inline]

Return the b parameter of the distribution.

Definition at line 4923 of file random.h.

4.1043.3.3 template<typename _RealType = double> result_type std::weibull_distribution< _RealType >::max ( ) const [inline]

Returns the least upper bound value of the distribution.

Definition at line 4952 of file random.h.

References std::numeric_limits< _Tp >::max().

4.1043.3.4 template<typename _RealType = double> result_type std::weibull_distribution< _RealType >::min ( ) const [inline]

Returns the greatest lower bound value of the distribution.

Definition at line 4945 of file random.h.

4.1043.3.5 template<typename _RealType = double> template<typename _UniformRandomNumberGenerator > result_type std::weibull_distribution< _RealType >::operator() (_UniformRandomNumberGenerator & *__urng*) [inline]

Generating functions.

Definition at line 4960 of file random.h.

4.1043.3.6 template<typename _RealType = double> param_type std::weibull_distribution< _RealType >::param ( ) const [inline]

Returns the parameter set of the distribution.

Definition at line 4930 of file random.h.

Referenced by std::operator>>().

4.1043.3.7 template<typename _RealType = double> void std::weibull_distribution< _RealType >::param (const param_type & *__param*) [inline]

Sets the parameter set of the distribution.

Parameters

__param	The new parameter set of the distribution.

Definition at line 4938 of file random.h.

4.1043.3.8 template<typename _RealType = double> void std::weibull_distribution< _RealType >::reset ( ) [inline]

Resets the distribution state.

Definition at line 4909 of file random.h.

4.1043.4 Friends And Related Function Documentation

4.1043.4.1 template<typename _RealType = double> bool operator== (const weibull_distribution< _RealType > & *__d1*, const weibull_distribution< _RealType > & *__d2*) [friend]

Return true if two Weibull distributions have the same parameters.

Definition at line 4995 of file random.h.

The documentation for this class was generated from the following files:

- random.h
- bits/random.tcc

4.1044 std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc > Class Template Reference

Public Types

- typedef basic_string< char, char_traits< char > , _Byte_alloc > **byte_string**
- typedef wide_string::traits_type::int_type **int_type**
- typedef _Codecvt::state_type **state_type**
- typedef basic_string< _Elem, char_traits< _Elem > , _Wide_alloc > **wide_string**

Public Member Functions

- wstring_convert ()
- wstring_convert (_Codecvt *__pcvt)
- wstring_convert (_Codecvt *__pcvt, state_type __state)
- wstring_convert (const byte_string &__byte_err, const wide_string &__wide_err=wide_string())
- **wstring_convert** (const wstring_convert &)=delete
- size_t converted () const noexcept
- wstring_convert & **operator=** (const wstring_convert &)=delete
- state_type state () const

- wide_string from_bytes (char __byte)
- wide_string from_bytes (const char *__ptr)
- wide_string from_bytes (const byte_string &__str)
- wide_string from_bytes (const char *__first, const char *__last)

- byte_string to_bytes (_Elem __wchar)
- byte_string to_bytes (const _Elem *__ptr)
- byte_string to_bytes (const wide_string &__wstr)
- byte_string to_bytes (const _Elem *__first, const _Elem *__last)

4.1044.1 Detailed Description

template<typename _Codecvt, typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>>class std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >

String conversions.

Definition at line 232 of file locale_conv.h.

4.1044.2 Constructor & Destructor Documentation

4.1044.2.1 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::wstring_convert ( ) [inline]

Default constructor.

Definition at line 241 of file locale_conv.h.

4.1044.2.2 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::wstring_convert (_Codecvt * *__pcvt*) [inline], [explicit]

Constructor.

Parameters

__pcvt	The facet to use for conversions.

Takes ownership of __pcvt and will delete it in the destructor.

Definition at line 250 of file locale_conv.h.

4.1044.2.3 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::wstring_convert (_Codecvt * *__pcvt,* state_type *__state*) [inline]

Construct with an initial converstion state.

Parameters

__pcvt	The facet to use for conversions.
__state	Initial conversion state.

Takes ownership of __pcvt and will delete it in the destructor. The object's conversion state will persist between conversions.

Definition at line 264 of file locale_conv.h.

4.1044.2.4 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::wstring_convert (const byte_string & *__byte_err,* const wide_string & *__wide_err* = wide_string ()) [inline],[explicit]

Construct with error strings.

Parameters

__byte_err	A string to return on failed conversions.
__wide_err	A wide string to return on failed conversions.

Definition at line 277 of file locale_conv.h.

4.1044.3 Member Function Documentation

4.1044.3.1 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> size_t std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::converted ( ) const [inline],[noexcept]

The number of elements successfully converted in the last conversion.

Definition at line 367 of file locale_conv.h.

4.1044.3.2 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> wide_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes (char *__byte*) [inline]

Convert from bytes.

Definition at line 296 of file locale_conv.h.

Referenced by std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes().

4.1044.3.3 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> wide_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes (const char * *__ptr*) [inline]

Convert from bytes.

Definition at line 303 of file locale_conv.h.

References std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes().

4.1044.3.4 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> wide_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes (const byte_string & *__str*) [inline]

Convert from bytes.

Definition at line 307 of file locale_conv.h.

References std::basic_string< _CharT, _Traits, _Alloc >::data(), std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes(), and std::basic_string< _CharT, _Traits, _Alloc >::size().

4.1044.3.5 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> wide_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::from_bytes (const char * __first, const char * __last) [inline]

Convert from bytes.

Definition at line 314 of file locale_conv.h.

References std::basic_string< _CharT, _Traits, _Alloc >::get_allocator().

4.1044.3.6 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> state_type std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::state ( ) const [inline]

The final conversion state of the last conversion.

Definition at line 370 of file locale_conv.h.

4.1044.3.7 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> byte_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes (_Elem __wchar) [inline]

Convert to bytes.

Definition at line 330 of file locale_conv.h.

Referenced by std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes().

4.1044.3.8 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> byte_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes (const _Elem * __ptr) [inline]

Convert to bytes.

Definition at line 337 of file locale_conv.h.

References std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes().

4.1044.3.9 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> byte_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes (const wide_string & __wstr) [inline]

Convert to bytes.

Definition at line 343 of file locale_conv.h.

References std::basic_string< _CharT, _Traits, _Alloc >::data(), std::basic_string< _CharT, _Traits, _Alloc >::size(), and std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes().

4.1044.3.10 template<typename _Codecvt , typename _Elem = wchar_t, typename _Wide_alloc = allocator<_Elem>, typename _Byte_alloc = allocator<char>> byte_string std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >::to_bytes (const _Elem * __first, const _Elem * __last) [inline]

Convert to bytes.

Definition at line 350 of file locale_conv.h.

References std::basic_string< _CharT, _Traits, _Alloc >::get_allocator().

The documentation for this class was generated from the following file:

- locale_conv.h

5 File Documentation

5.1 algo.h File Reference

Classes

- struct std::__parallel::_CRandNumber< _MustBeInt >

Namespaces

- std
- std::__parallel

Functions

- template<typename _RAIter >
  _RAIter **std::__parallel::__adjacent_find_switch** (_RAIter __begin, _RAIter __end, random_access_iterator_tag)
- template<typename _FIterator , typename _IteratorTag >
  _FIterator **std::__parallel::__adjacent_find_switch** (_FIterator __begin, _FIterator __end, _IteratorTag)
- template<typename _FIterator , typename _BinaryPredicate , typename _IteratorTag >
  _FIterator **std::__parallel::__adjacent_find_switch** (_FIterator __begin, _FIterator __end, _BinaryPredicate __pred, _IteratorTag)
- template<typename _RAIter , typename _BinaryPredicate >
  _RAIter **std::__parallel::__adjacent_find_switch** (_RAIter __begin, _RAIter __end, _BinaryPredicate __pred, random_access_iterator_tag)
- template<typename _RAIter , typename _Predicate >
  iterator_traits< _RAIter >
  ::difference_type **std::__parallel::__count_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Predicate , typename _IteratorTag >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::__count_if_switch** (_IIter __begin, _IIter __end, _Predicate __pred, _IteratorTag)
- template<typename _RAIter , typename _Tp >
  iterator_traits< _RAIter >
  ::difference_type **std::__parallel::__count_switch** (_RAIter __begin, _RAIter __end, const _Tp &__value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp , typename _IteratorTag >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::__count_switch** (_IIter __begin, _IIter __end, const _Tp &__value, _IteratorTag)
- template<typename _IIter , typename _FIterator , typename _IteratorTag1 , typename _IteratorTag2 >
  _IIter **std::__parallel::__find_first_of_switch** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _IteratorTag1, _IteratorTag2)

- template<typename _RAIter , typename _FIterator , typename _BinaryPredicate , typename _IteratorTag >
  _RAIter **std::__parallel::__find_first_of_switch** (_RAIter __begin1, _RAIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp, random_access_iterator_tag, _IteratorTag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate , typename _IteratorTag1 , typename _IteratorTag2 >
  _IIter **std::__parallel::__find_first_of_switch** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _BinaryPredicate __comp, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _Predicate , typename _IteratorTag >
  _IIter **std::__parallel::__find_if_switch** (_IIter __begin, _IIter __end, _Predicate __pred, _IteratorTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **std::__parallel::__find_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)
- template<typename _IIter , typename _Tp , typename _IteratorTag >
  _IIter **std::__parallel::__find_switch** (_IIter __begin, _IIter __end, const _Tp &__val, _IteratorTag)
- template<typename _RAIter , typename _Tp >
  _RAIter **std::__parallel::__find_switch** (_RAIter __begin, _RAIter __end, const _Tp &__val, random_access_iterator_tag)
- template<typename _IIter , typename _Function , typename _IteratorTag >
  _Function **std::__parallel::__for_each_switch** (_IIter __begin, _IIter __end, _Function __f, _IteratorTag)
- template<typename _RAIter , typename _Function >
  _Function **std::__parallel::__for_each_switch** (_RAIter __begin, _RAIter __end, _Function __f, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _OutputIterator , typename _Size , typename _Generator , typename _IteratorTag >
  _OutputIterator **std::__parallel::__generate_n_switch** (_OutputIterator __begin, _Size __n, _Generator __gen, _IteratorTag)
- template<typename _RAIter , typename _Size , typename _Generator >
  _RAIter **std::__parallel::__generate_n_switch** (_RAIter __begin, _Size __n, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Generator , typename _IteratorTag >
  void **std::__parallel::__generate_switch** (_FIterator __begin, _FIterator __end, _Generator __gen, _IteratorTag)
- template<typename _RAIter , typename _Generator >
  void **std::__parallel::__generate_switch** (_RAIter __begin, _RAIter __end, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Compare , typename _IteratorTag >
  _FIterator **std::__parallel::__max_element_switch** (_FIterator __begin, _FIterator __end, _Compare __comp, _IteratorTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **std::__parallel::__max_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **std::__parallel::__merge_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **std::__parallel::__merge_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator , typename _Compare , typename _IteratorTag >
  _FIterator **std::__parallel::__min_element_switch** (_FIterator __begin, _FIterator __end, _Compare __comp, _IteratorTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **std::__parallel::__min_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)

- template<typename _FIterator , typename _Predicate , typename _IteratorTag >
  _FIterator **std::__parallel::__partition_switch** (_FIterator __begin, _FIterator __end, _Predicate __pred, _IteratorTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **std::__parallel::__partition_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)
- template<typename _FIterator , typename _Predicate , typename _Tp , typename _IteratorTag >
  void **std::__parallel::__replace_if_switch** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, _IteratorTag)
- template<typename _RAIter , typename _Predicate , typename _Tp >
  void **std::__parallel::__replace_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Tp , typename _IteratorTag >
  void **std::__parallel::__replace_switch** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, _IteratorTag)
- template<typename _RAIter , typename _Tp >
  void **std::__parallel::__replace_switch** (_RAIter __begin, _RAIter __end, const _Tp &__old_value, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _RAIter **std::__parallel::__search_n_switch** (_RAIter __begin, _RAIter __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, random_access_iterator_tag)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate , typename _IteratorTag >
  _FIterator **std::__parallel::__search_n_switch** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, _IteratorTag)
- template<typename _RAIter1 , typename _RAIter2 >
  _RAIter1 **std::__parallel::__search_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _IteratorTag1 , typename _IteratorTag2 >
  _FIterator1 **std::__parallel::__search_switch** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _BinaryPredicate >
  _RAIter1 **std::__parallel::__search_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _BinaryPredicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate , typename _IteratorTag1 , typename _IteratorTag2 >
  _FIterator1 **std::__parallel::__search_switch** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **std::__parallel::__set_difference_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
  _OutputIterator **std::__parallel::__set_intersection_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_intersection_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)

- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
_OutputIterator **std::__parallel::__set_symmetric_difference_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
_Output_RAIter **std::__parallel::__set_symmetric_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OutputIterator , typename _IteratorTag1 , typename _IteratorTag2 , typename _IteratorTag3 >
_OutputIterator **std::__parallel::__set_union_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Predicate __pred, _IteratorTag1, _IteratorTag2, _IteratorTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
_Output_RAIter **std::__parallel::__set_union_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _UnaryOperation >
_RAIter2 **std::__parallel::__transform1_switch** (_RAIter1 __begin, _RAIter1 __end, _RAIter2 __result, _UnaryOperation __unary_op, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _UnaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
_RAIter2 **std::__parallel::__transform1_switch** (_RAIter1 __begin, _RAIter1 __end, _RAIter2 __result, _UnaryOperation __unary_op, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _BinaryOperation >
_RAIter3 **std::__parallel::__transform2_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter3 __result, _BinaryOperation __binary_op, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation , typename _Tag1 , typename _Tag2 , typename _Tag3 >
_OutputIterator **std::__parallel::__transform2_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, _Tag1, _Tag2, _Tag3)
- template<typename _IIter , typename _OutputIterator , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
_OutputIterator **std::__parallel::__unique_copy_switch** (_IIter __begin, _IIter __last, _OutputIterator __out, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter , typename _RandomAccessOutputIterator , typename _Predicate >
_RandomAccessOutputIterator **std::__parallel::__unique_copy_switch** (_RAIter __begin, _RAIter __last, _RandomAccessOutputIterator __out, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIterator >
_FIterator **std::__parallel::adjacent_find** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _BinaryPredicate >
_FIterator **std::__parallel::adjacent_find** (_FIterator __begin, _FIterator __end, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
_FIterator **std::__parallel::adjacent_find** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _BinaryPredicate >
_FIterator **std::__parallel::adjacent_find** (_FIterator __begin, _FIterator __end, _BinaryPredicate __pred)
- template<typename _IIter , typename _Tp >
iterator_traits< _IIter >
::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::sequential_tag)

- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::_-Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel-::sequential_tag)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::_-Parallelism __parallelism_tag)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred)
- template<typename _IIter , typename _Tp >
  _IIter **std::__parallel::find** (_IIter __begin, _IIter __end, const _Tp &__val, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _IIter **std::__parallel::find** (_IIter __begin, _IIter __end, const _Tp &__val)
- template<typename _IIter , typename _FIterator >
  _IIter **std::__parallel::find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, __-gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate >
  _IIter **std::__parallel::find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _-BinaryPredicate __comp, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIterator , typename _BinaryPredicate >
  _IIter **std::__parallel::find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2, _-BinaryPredicate __comp)
- template<typename _IIter , typename _FIterator >
  _IIter **std::__parallel::find_first_of** (_IIter __begin1, _IIter __end1, _FIterator __begin2, _FIterator __end2)
- template<typename _IIter , typename _Predicate >
  _IIter **std::__parallel::find_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Predicate >
  _IIter **std::__parallel::find_if** (_IIter __begin, _IIter __end, _Predicate __pred)
- template<typename _IIter , typename _Function >
  _Function **std::__parallel::for_each** (_IIter __begin, _IIter __end, _Function __f, __gnu_parallel::sequential_tag)
- template<typename _Iterator , typename _Function >
  _Function **std::__parallel::for_each** (_Iterator __begin, _Iterator __end, _Function __f, __gnu_parallel::_-Parallelism __parallelism_tag)
- template<typename _Iterator , typename _Function >
  _Function **std::__parallel::for_each** (_Iterator __begin, _Iterator __end, _Function __f)
- template<typename _FIterator , typename _Generator >
  void **std::__parallel::generate** (_FIterator __begin, _FIterator __end, _Generator __gen, __gnu_parallel-::sequential_tag)
- template<typename _FIterator , typename _Generator >
  void **std::__parallel::generate** (_FIterator __begin, _FIterator __end, _Generator __gen, __gnu_parallel::_-Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Generator >
  void **std::__parallel::generate** (_FIterator __begin, _FIterator __end, _Generator __gen)

- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **std::__parallel::generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen, __gnu_parallel::sequential_tag)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **std::__parallel::generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  _OutputIterator **std::__parallel::generate_n** (_OutputIterator __begin, _Size __n, _Generator __gen)
- template<typename _FIterator >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::max_element** (_FIterator __begin, _FIterator __end, _Compare __comp)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **std::__parallel::merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Compare >
  _OutputIterator **std::__parallel::merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result, _Compare __comp)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::merge** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __result)
- template<typename _FIterator >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _FIterator >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end, _Compare __comp, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Compare >
  _FIterator **std::__parallel::min_element** (_FIterator __begin, _FIterator __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, __gnu_parallel::sequential_tag)

- template<typename _RAIter , typename _Compare >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end)
- template<typename _FIterator , typename _Predicate >
  _FIterator **std::__parallel::partition** (_FIterator __begin, _FIterator __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Predicate >
  _FIterator **std::__parallel::partition** (_FIterator __begin, _FIterator __end, _Predicate __pred)
- template<typename _RAIter >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &__rand, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &&__rand)
- template<typename _FIterator , typename _Tp >
  void **std::__parallel::replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Tp >
  void **std::__parallel::replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Tp >
  void **std::__parallel::replace** (_FIterator __begin, _FIterator __end, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIterator , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIterator __begin, _FIterator __end, _Predicate __pred, const _Tp &__new_value)
- template<typename _FIterator1 , typename _FIterator2 >
  _FIterator1 **std::__parallel::search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, __gnu_parallel::sequential_tag)

- template<typename _FIterator1 , typename _FIterator2 >
  _FIterator1 **std::__parallel::search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate >
  _FIterator1 **std::__parallel::search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator1 , typename _FIterator2 , typename _BinaryPredicate >
  _FIterator1 **std::__parallel::search** (_FIterator1 __begin1, _FIterator1 __end1, _FIterator2 __begin2, _FIterator2 __end2, _BinaryPredicate __pred)
- template<typename _FIterator , typename _Integer , typename _Tp >
  _FIterator **std::__parallel::search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _FIterator **std::__parallel::search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _FIterator , typename _Integer , typename _Tp >
  _FIterator **std::__parallel::search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val)
- template<typename _FIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  _FIterator **std::__parallel::search_n** (_FIterator __begin, _FIterator __end, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_intersection** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)

- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_symmetric_difference** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator >
  _OutputIterator **std::__parallel::set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::set_union** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _OutputIterator __out, _Predicate __pred)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare , typename _Parallelism >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::default_parallel_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::parallel_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_sampling_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_exact_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::quicksort_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::balanced_quicksort_tag __parallelism)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare , typename _Parallelism >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end)

- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::default_parallel_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::parallel_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::multiway_mergesort_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::quicksort_tag __parallelism)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::balanced_quicksort_tag __parallelism)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator , typename _UnaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter __begin, _IIter __end, _OutputIterator __result, _UnaryOperation __unary_op)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **std::__parallel::transform** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **std::__parallel::unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **std::__parallel::unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out)
- template<typename _IIter , typename _OutputIterator , typename _Predicate >
  _OutputIterator **std::__parallel::unique_copy** (_IIter __begin1, _IIter __end1, _OutputIterator __out, _Predicate __pred)

5.1.1 Detailed Description

Parallel STL function calls corresponding to the stl_algo.h header. The functions defined here mainly do case switches and call the actual parallelized versions in other files. Inlining policy: Functions that basically only contain one function call, are declared inline. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file algo.h.

5.2 algobase.h File Reference

Namespaces

- std
- std::__parallel

Functions

- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  bool **std::__parallel::__equal_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  bool **std::__parallel::__equal_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  bool **std::__parallel::__lexicographical_compare_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  bool **std::__parallel::__lexicographical_compare_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  pair< _IIter1, _IIter2 > **std::__parallel::__mismatch_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  pair< _RAIter1, _RAIter2 > **std::__parallel::__mismatch_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IteratorTag1 , typename _IteratorTag2 >
  pair< _IIter1, _IIter2 > **std::__parallel::__mismatch_switch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, _IteratorTag1, _IteratorTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  pair< _RAIter1, _RAIter2 > **std::__parallel::__mismatch_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _BinaryPredicate __binary_pred)

- template<typename _IIter1 , typename _IIter2 >
  bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  pair< _InputIterator1, _InputIterator2 > **std::__parallel::mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, __gnu_parallel::sequential_tag)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  pair< _InputIterator1, _InputIterator2 > **std::__parallel::mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  pair< _InputIterator1, _InputIterator2 > **std::__parallel::mismatch** (_InputIterator1 __begin1, _InputIterator1 __end1, _InputIterator2 __begin2, _InputIterator2 __end2, _BinaryPredicate __binary_pred)

5.2.1 Detailed Description

Parallel STL function calls corresponding to the stl_algobase.h header. The functions defined here mainly do case switches and call the actual parallelized versions in other files. Inlining policy: Functions that basically only contain one function call, are declared inline. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file algobase.h.

5.3 algorithm File Reference

Macros

- #define **_GLIBCXX_ALGORITHM**

5.3.1 Detailed Description

This is a Standard C++ Library header.

Definition in file algorithm.

5.4 algorithm File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_ALGORITHM**

Functions

- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  std::pair< _InputIterator, _OutputIterator > **__gnu_cxx::__copy_n** (_InputIterator __first, _Size __count, _OutputIterator __result, std::input_iterator_tag)
- template<typename _RAIterator , typename _Size , typename _OutputIterator >
  std::pair< _RAIterator, _OutputIterator > **__gnu_cxx::__copy_n** (_RAIterator __first, _Size __count, _OutputIterator __result, std::random_access_iterator_tag)
- template<typename _InputIterator1 , typename _InputIterator2 >
  int **__gnu_cxx::__lexicographical_compare_3way** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- int **__gnu_cxx::__lexicographical_compare_3way** (const unsigned char *__first1, const unsigned char *__last1, const unsigned char *__first2, const unsigned char *__last2)
- int **__gnu_cxx::__lexicographical_compare_3way** (const char *__first1, const char *__last1, const char *__first2, const char *__last2)
- template<typename _Tp >
  const _Tp & __gnu_cxx::__median (const _Tp &__a, const _Tp &__b, const _Tp &__c)
- template<typename _Tp , typename _Compare >
  const _Tp & __gnu_cxx::__median (const _Tp &__a, const _Tp &__b, const _Tp &__c, _Compare __comp)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Distance >
  _RandomAccessIterator **__gnu_cxx::__random_sample** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out, const _Distance __n)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator , typename _Distance >
  _RandomAccessIterator **__gnu_cxx::__random_sample** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out, _RandomNumberGenerator &__rand, const _Distance __n)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  std::pair< _InputIterator, _OutputIterator > __gnu_cxx::copy_n (_InputIterator __first, _Size __count, _OutputIterator __result)
- template<typename _InputIterator , typename _Tp , typename _Size >
  void **__gnu_cxx::count** (_InputIterator __first, _InputIterator __last, const _Tp &__value, _Size &__n)
- template<typename _InputIterator , typename _Predicate , typename _Size >
  void **__gnu_cxx::count_if** (_InputIterator __first, _InputIterator __last, _Predicate __pred, _Size &__n)

- template<typename _InputIterator1 , typename _InputIterator2 >
  int __gnu_cxx::lexicographical_compare_3way (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _InputIterator , typename _RandomAccessIterator >
  _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _RandomNumberGenerator >
  _RandomAccessIterator __gnu_cxx::random_sample (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __out_first, _RandomAccessIterator __out_last, _RandomNumberGenerator &__rand)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance >
  _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Distance , typename _RandomNumberGenerator >
  _OutputIterator __gnu_cxx::random_sample_n (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __out, const _Distance __n, _RandomNumberGenerator &__rand)

5.4.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file ext/algorithm.

5.5 algorithm File Reference

Macros

- #define **_PARALLEL_ALGORITHM**

5.5.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file parallel/algorithm.

5.6 algorithm File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_sample**
- #define **_GLIBCXX_EXPERIMENTAL_ALGORITHM**

Functions

- template<typename _PopulationIterator , typename _SampleIterator , typename _Distance , typename _UniformRandomNumberGenerator >

_SampleIterator **std::experimental::fundamentals_v2::sample** (_PopulationIterator __first, _PopulationIterator __last, _SampleIterator __out, _Distance __n, _UniformRandomNumberGenerator &&__g)

- template<typename _PopulationIterator , typename _SampleIterator , typename _Distance >
  _SampleIterator **std::experimental::fundamentals_v2::sample** (_PopulationIterator __first, _PopulationIterator __last, _SampleIterator __out, _Distance __n)
- template<typename _ForwardIterator , typename _Searcher >
  _ForwardIterator **std::experimental::fundamentals_v2::search** (_ForwardIterator __first, _ForwardIterator __last, const _Searcher &__searcher)
- template<typename _RandomAccessIterator >
  void **std::experimental::fundamentals_v2::shuffle** (_RandomAccessIterator __first, _RandomAccessIterator __last)

5.6.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/algorithm.

5.7 algorithmfwd.h File Reference

Namespaces

- std

Functions

- template<typename _FIter >
  constexpr _FIter **std::adjacent_find** (_FIter, _FIter)
- template<typename _FIter , typename _BinaryPredicate >
  constexpr _FIter **std::adjacent_find** (_FIter, _FIter, _BinaryPredicate)
- template<typename _IIter , typename _Predicate >
  constexpr bool **std::all_of** (_IIter, _IIter, _Predicate)
- template<typename _IIter , typename _Predicate >
  constexpr bool **std::any_of** (_IIter, _IIter, _Predicate)
- template<typename _FIter , typename _Tp >
  constexpr bool **std::binary_search** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr bool **std::binary_search** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _IIter , typename _OIter >
  constexpr _OIter **std::copy** (_IIter, _IIter, _OIter)
- template<typename _BIter1 , typename _BIter2 >
  constexpr _BIter2 **std::copy_backward** (_BIter1, _BIter1, _BIter2)
- template<typename _IIter , typename _OIter , typename _Predicate >
  constexpr _OIter **std::copy_if** (_IIter, _IIter, _OIter, _Predicate)
- template<typename _IIter , typename _Size , typename _OIter >
  constexpr _OIter **std::copy_n** (_IIter, _Size, _OIter)
- template<typename _IIter , typename _Tp >
  constexpr iterator_traits
  < _IIter >::difference_type **std::count** (_IIter, _IIter, const _Tp &)
- template<typename _IIter , typename _Predicate >
  constexpr iterator_traits
  < _IIter >::difference_type **std::count_if** (_IIter, _IIter, _Predicate)

- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::equal** (_IIter1, _IIter1, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool std::equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _BinaryPredicate __binary_pred)
- template<typename _FIter , typename _Tp >
  constexpr pair< _FIter, _FIter > **std::equal_range** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr pair< _FIter, _FIter > **std::equal_range** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _FIter , typename _Tp >
  constexpr void **std::fill** (_FIter, _FIter, const _Tp &)
- template<typename _OIter , typename _Size , typename _Tp >
  constexpr _OIter **std::fill_n** (_OIter, _Size, const _Tp &)
- template<typename _IIter , typename _Tp >
  constexpr _IIter **std::find** (_IIter, _IIter, const _Tp &)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **std::find_end** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **std::find_end** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **std::find_first_of** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **std::find_first_of** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _IIter , typename _Predicate >
  constexpr _IIter **std::find_if** (_IIter, _IIter, _Predicate)
- template<typename _IIter , typename _Predicate >
  constexpr _IIter **std::find_if_not** (_IIter, _IIter, _Predicate)
- template<typename _IIter , typename _Funct >
  constexpr _Funct **std::for_each** (_IIter, _IIter, _Funct)
- template<typename _FIter , typename _Generator >
  constexpr void **std::generate** (_FIter, _FIter, _Generator)
- template<typename _OIter , typename _Size , typename _Generator >
  constexpr _OIter **std::generate_n** (_OIter, _Size, _Generator)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::includes** (_IIter1, _IIter1, _IIter2, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _Compare >
  constexpr bool **std::includes** (_IIter1, _IIter1, _IIter2, _IIter2, _Compare)
- template<typename _BIter >
  void **std::inplace_merge** (_BIter, _BIter, _BIter)
- template<typename _BIter , typename _Compare >
  void **std::inplace_merge** (_BIter, _BIter, _BIter, _Compare)
- template<typename _RAIter >
  constexpr bool **std::is_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr bool **std::is_heap** (_RAIter, _RAIter, _Compare)
- template<typename _RAIter >
  constexpr _RAIter **std::is_heap_until** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr _RAIter **std::is_heap_until** (_RAIter, _RAIter, _Compare)
- template<typename _IIter , typename _Predicate >
  constexpr bool **std::is_partitioned** (_IIter, _IIter, _Predicate)
- template<typename _FIter1 , typename _FIter2 >
  constexpr bool **std::is_permutation** (_FIter1, _FIter1, _FIter2)

- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr bool **std::is_permutation** (_FIter1, _FIter1, _FIter2, _BinaryPredicate)
- template<typename _FIter >
  constexpr bool **std::is_sorted** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr bool **std::is_sorted** (_FIter, _FIter, _Compare)
- template<typename _FIter >
  constexpr _FIter **std::is_sorted_until** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **std::is_sorted_until** (_FIter, _FIter, _Compare)
- template<typename _FIter1 , typename _FIter2 >
  constexpr void **std::iter_swap** (_FIter1, _FIter2)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::lexicographical_compare** (_IIter1, _IIter1, _IIter2, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _Compare >
  constexpr bool **std::lexicographical_compare** (_IIter1, _IIter1, _IIter2, _IIter2, _Compare)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **std::lower_bound** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr _FIter **std::lower_bound** (_FIter, _FIter, const _Tp &, _Compare)
- template<typename _RAIter >
  constexpr void **std::make_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::make_heap** (_RAIter, _RAIter, _Compare)
- template<typename _Tp >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **std::max** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **std::max** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr _FIter **std::max_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **std::max_element** (_FIter, _FIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **std::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **std::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _Tp >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **std::min** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **std::min** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr _FIter **std::min_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr _FIter **std::min_element** (_FIter, _FIter, _Compare)

- template<typename _Tp >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr pair< _Tp, _Tp > **std::minmax** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr pair< _Tp, _Tp > **std::minmax** (initializer_list< _Tp >, _Compare)
- template<typename _FIter >
  constexpr pair< _FIter, _FIter > **std::minmax_element** (_FIter, _FIter)
- template<typename _FIter , typename _Compare >
  constexpr pair< _FIter, _FIter > **std::minmax_element** (_FIter, _FIter, _Compare)
- template<typename _IIter1 , typename _IIter2 >
  constexpr pair< _IIter1, _IIter2 > **std::mismatch** (_IIter1, _IIter1, _IIter2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr pair< _IIter1, _IIter2 > **std::mismatch** (_IIter1, _IIter1, _IIter2, _BinaryPredicate)
- template<typename _BIter >
  constexpr bool **std::next_permutation** (_BIter, _BIter)
- template<typename _BIter , typename _Compare >
  constexpr bool **std::next_permutation** (_BIter, _BIter, _Compare)
- template<typename _IIter , typename _Predicate >
  constexpr bool **std::none_of** (_IIter, _IIter, _Predicate)
- template<typename _RAIter >
  constexpr void **std::nth_element** (_RAIter, _RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::nth_element** (_RAIter, _RAIter, _RAIter, _Compare)
- template<typename _RAIter >
  constexpr void **std::partial_sort** (_RAIter, _RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::partial_sort** (_RAIter, _RAIter, _RAIter, _Compare)
- template<typename _IIter , typename _RAIter >
  constexpr _RAIter **std::partial_sort_copy** (_IIter, _IIter, _RAIter, _RAIter)
- template<typename _IIter , typename _RAIter , typename _Compare >
  constexpr _RAIter **std::partial_sort_copy** (_IIter, _IIter, _RAIter, _RAIter, _Compare)
- template<typename _BIter , typename _Predicate >
  constexpr _BIter **std::partition** (_BIter, _BIter, _Predicate)
- template<typename _IIter , typename _OIter1 , typename _OIter2 , typename _Predicate >
  constexpr pair< _OIter1, _OIter2 > **std::partition_copy** (_IIter, _IIter, _OIter1, _OIter2, _Predicate)
- template<typename _FIter , typename _Predicate >
  constexpr _FIter **std::partition_point** (_FIter, _FIter, _Predicate)
- template<typename _RAIter >
  constexpr void **std::pop_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::pop_heap** (_RAIter, _RAIter, _Compare)
- template<typename _BIter >
  constexpr bool **std::prev_permutation** (_BIter, _BIter)
- template<typename _BIter , typename _Compare >
  constexpr bool **std::prev_permutation** (_BIter, _BIter, _Compare)
- template<typename _RAIter >
  constexpr void **std::push_heap** (_RAIter, _RAIter)

- template<typename _RAIter , typename _Compare >
  constexpr void **std::push_heap** (_RAIter, _RAIter, _Compare)
- template<typename _RAIter >
  void **std::random_shuffle** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Generator >
  void **std::random_shuffle** (_RAIter, _RAIter, _Generator &&)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **std::remove** (_FIter, _FIter, const _Tp &)
- template<typename _IIter , typename _OIter , typename _Tp >
  constexpr _OIter **std::remove_copy** (_IIter, _IIter, _OIter, const _Tp &)
- template<typename _IIter , typename _OIter , typename _Predicate >
  constexpr _OIter **std::remove_copy_if** (_IIter, _IIter, _OIter, _Predicate)
- template<typename _FIter , typename _Predicate >
  constexpr _FIter **std::remove_if** (_FIter, _FIter, _Predicate)
- template<typename _FIter , typename _Tp >
  constexpr void **std::replace** (_FIter, _FIter, const _Tp &, const _Tp &)
- template<typename _IIter , typename _OIter , typename _Tp >
  constexpr _OIter **std::replace_copy** (_IIter, _IIter, _OIter, const _Tp &, const _Tp &)
- template<typename _Iter , typename _OIter , typename _Predicate , typename _Tp >
  constexpr _OIter **std::replace_copy_if** (_Iter, _Iter, _OIter, _Predicate, const _Tp &)
- template<typename _FIter , typename _Predicate , typename _Tp >
  constexpr void **std::replace_if** (_FIter, _FIter, _Predicate, const _Tp &)
- template<typename _BIter >
  constexpr void **std::reverse** (_BIter, _BIter)
- template<typename _BIter , typename _OIter >
  constexpr _OIter **std::reverse_copy** (_BIter, _BIter, _OIter)
- template<typename _FIter >
  constexpr _FIter **std::_V2::rotate** (_FIter, _FIter, _FIter)
- template<typename _FIter , typename _OIter >
  constexpr _OIter **std::rotate_copy** (_FIter, _FIter, _FIter, _OIter)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter1 **std::search** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BinaryPredicate >
  constexpr _FIter1 **std::search** (_FIter1, _FIter1, _FIter2, _FIter2, _BinaryPredicate)
- template<typename _FIter , typename _Size , typename _Tp >
  constexpr _FIter **std::search_n** (_FIter, _FIter, _Size, const _Tp &)
- template<typename _FIter , typename _Size , typename _Tp , typename _BinaryPredicate >
  constexpr _FIter **std::search_n** (_FIter, _FIter, _Size, const _Tp &, _BinaryPredicate)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **std::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **std::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **std::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **std::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **std::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **std::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  constexpr _OIter **std::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)

- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  constexpr _OIter **std::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _RAIter , typename _UGenerator >
  void **std::shuffle** (_RAIter, _RAIter, _UGenerator &&)
- template<typename _RAIter >
  constexpr void **std::sort** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::sort** (_RAIter, _RAIter, _Compare)
- template<typename _RAIter >
  constexpr void **std::sort_heap** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  constexpr void **std::sort_heap** (_RAIter, _RAIter, _Compare)
- template<typename _BIter , typename _Predicate >
  _BIter **std::stable_partition** (_BIter, _BIter, _Predicate)
- template<typename _RAIter >
  void **std::stable_sort** (_RAIter, _RAIter)
- template<typename _RAIter , typename _Compare >
  void **std::stable_sort** (_RAIter, _RAIter, _Compare)
- template<typename _FIter1 , typename _FIter2 >
  constexpr _FIter2 **std::swap_ranges** (_FIter1, _FIter1, _FIter2)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  constexpr _OIter **std::transform** (_IIter, _IIter, _OIter, _UnaryOperation)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BinaryOperation >
  constexpr _OIter **std::transform** (_IIter1, _IIter1, _IIter2, _OIter, _BinaryOperation)
- template<typename _FIter >
  constexpr _FIter **std::unique** (_FIter, _FIter)
- template<typename _FIter , typename _BinaryPredicate >
  constexpr _FIter **std::unique** (_FIter, _FIter, _BinaryPredicate)
- template<typename _IIter , typename _OIter >
  constexpr _OIter **std::unique_copy** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _BinaryPredicate >
  constexpr _OIter **std::unique_copy** (_IIter, _IIter, _OIter, _BinaryPredicate)
- template<typename _FIter , typename _Tp >
  constexpr _FIter **std::upper_bound** (_FIter, _FIter, const _Tp &)
- template<typename _FIter , typename _Tp , typename _Compare >
  constexpr _FIter **std::upper_bound** (_FIter, _FIter, const _Tp &, _Compare)

5.7.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <algorithm>.

Definition in file bits/algorithmfwd.h.

5.8 algorithmfwd.h File Reference

Namespaces

- std
- std::__parallel

Functions

- template<typename _FIter , typename _IterTag >
  _FIter **std::__parallel::__adjacent_find_switch** (_FIter, _FIter, _IterTag)
- template<typename _FIter , typename _BiPredicate , typename _IterTag >
  _FIter **std::__parallel::__adjacent_find_switch** (_FIter, _FIter, _BiPredicate, _IterTag)
- template<typename _RAIter , typename _BiPredicate >
  _RAIter **std::__parallel::__adjacent_find_switch** (_RAIter, _RAIter, _BiPredicate, random_access_iterator_tag)
- template<typename _RAIter >
  _RAIter **std::__parallel::__adjacent_find_switch** (_RAIter __begin, _RAIter __end, random_access_iterator_tag)
- template<typename _IIter , typename _Predicate , typename _IterTag >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::__count_if_switch** (_IIter, _IIter, _Predicate, _IterTag)
- template<typename _RAIter , typename _Predicate >
  iterator_traits< _RAIter >
  ::difference_type **std::__parallel::__count_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp , typename _IterTag >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::__count_switch** (_IIter, _IIter, const _Tp &, _IterTag)
- template<typename _RAIter , typename _Tp >
  iterator_traits< _RAIter >
  ::difference_type **std::__parallel::__count_switch** (_RAIter __begin, _RAIter __end, const _Tp &__value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _FIter , typename _IterTag1 , typename _IterTag2 >
  _IIter **std::__parallel::__find_first_of_switch** (_IIter, _IIter, _FIter, _FIter, _IterTag1, _IterTag2)
- template<typename _RAIter , typename _FIter , typename _BiPredicate , typename _IterTag >
  _RAIter **std::__parallel::__find_first_of_switch** (_RAIter, _RAIter, _FIter, _FIter, _BiPredicate, random_access_iterator_tag, _IterTag)
- template<typename _IIter , typename _FIter , typename _BiPredicate , typename _IterTag1 , typename _IterTag2 >
  _IIter **std::__parallel::__find_first_of_switch** (_IIter, _IIter, _FIter, _FIter, _BiPredicate, _IterTag1, _IterTag2)
- template<typename _IIter , typename _Predicate , typename _IterTag >
  _IIter **std::__parallel::__find_if_switch** (_IIter, _IIter, _Predicate, _IterTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **std::__parallel::__find_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)
- template<typename _RAIter , typename _Tp >
  _RAIter **std::__parallel::__find_switch** (_RAIter __begin, _RAIter __end, const _Tp &__val, random_access_iterator_tag)
- template<typename _IIter , typename _Tp , typename _IterTag >
  _IIter **std::__parallel::__find_switch** (_IIter, _IIter, const _Tp &, _IterTag)
- template<typename _RAIter , typename _Function >
  _Function **std::__parallel::__for_each_switch** (_RAIter __begin, _RAIter __end, _Function __f, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Function , typename _IterTag >
  _Function **std::__parallel::__for_each_switch** (_IIter, _IIter, _Function, _IterTag)
- template<typename _OIter , typename _Size , typename _Generator , typename _IterTag >
  _OIter **std::__parallel::__generate_n_switch** (_OIter, _Size, _Generator, _IterTag)
- template<typename _RAIter , typename _Size , typename _Generator >
  _RAIter **std::__parallel::__generate_n_switch** (_RAIter __begin, _Size __n, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)

- template<typename _FIter , typename _Generator , typename _IterTag >
  void **std::__parallel::__generate_switch** (_FIter, _FIter, _Generator, _IterTag)
- template<typename _RAIter , typename _Generator >
  void **std::__parallel::__generate_switch** (_RAIter __begin, _RAIter __end, _Generator __gen, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  bool **std::__parallel::__lexicographical_compare_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _Predicate, _IterTag1, _IterTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  bool **std::__parallel::__lexicographical_compare_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter , typename _Compare , typename _IterTag >
  _FIter **std::__parallel::__max_element_switch** (_FIter, _FIter, _Compare, _IterTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **std::__parallel::__max_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **std::__parallel::__merge_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **std::__parallel::__merge_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter , typename _Compare , typename _IterTag >
  _FIter **std::__parallel::__min_element_switch** (_FIter, _FIter, _Compare, _IterTag)
- template<typename _RAIter , typename _Compare >
  _RAIter **std::__parallel::__min_element_switch** (_RAIter __begin, _RAIter __end, _Compare __comp, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Predicate >
  pair< _RAIter1, _RAIter2 > **std::__parallel::__mismatch_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  pair< _IIter1, _IIter2 > **std::__parallel::__mismatch_switch** (_IIter1, _IIter1, _IIter2, _Predicate, _IterTag1, _IterTag2)
- template<typename _FIter , typename _Predicate , typename _IterTag >
  _FIter **std::__parallel::__partition_switch** (_FIter, _FIter, _Predicate, _IterTag)
- template<typename _RAIter , typename _Predicate >
  _RAIter **std::__parallel::__partition_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, random_access_iterator_tag)
- template<typename _FIter , typename _Predicate , typename _Tp , typename _IterTag >
  void **std::__parallel::__replace_if_switch** (_FIter, _FIter, _Predicate, const _Tp &, _IterTag)
- template<typename _RAIter , typename _Predicate , typename _Tp >
  void **std::__parallel::__replace_if_switch** (_RAIter __begin, _RAIter __end, _Predicate __pred, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _Tp , typename _IterTag >
  void **std::__parallel::__replace_switch** (_FIter, _FIter, const _Tp &, const _Tp &, _IterTag)
- template<typename _RAIter , typename _Tp >
  void **std::__parallel::__replace_switch** (_RAIter __begin, _RAIter __end, const _Tp &__old_value, const _Tp &__new_value, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _RAIter **std::__parallel::__search_n_switch** (_RAIter, _RAIter, _Integer, const _Tp &, _BiPredicate, random_access_iterator_tag)

- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate , typename _IterTag >
  _FIter **std::__parallel::__search_n_switch** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate, _IterTag)
- template<typename _FIter1 , typename _FIter2 , typename _IterTag1 , typename _IterTag2 >
  _FIter1 **std::__parallel::__search_switch** (_FIter1, _FIter1, _FIter2, _FIter2, _IterTag1, _IterTag2)
- template<typename _RAIter1 , typename _RAIter2 , typename _BiPredicate >
  _RAIter1 **std::__parallel::__search_switch** (_RAIter1, _RAIter1, _RAIter2, _RAIter2, _BiPredicate, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate , typename _IterTag1 , typename _IterTag2 >
  _FIter1 **std::__parallel::__search_switch** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate, _IterTag1, _IterTag2)
- template<typename _RAIter1 , typename _RAIter2 >
  _RAIter1 **std::__parallel::__search_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **std::__parallel::__set_difference_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_intersection_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **std::__parallel::__set_intersection_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_symmetric_difference_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **std::__parallel::__set_symmetric_difference_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _RAIter1 , typename _RAIter2 , typename _Output_RAIter , typename _Predicate >
  _Output_RAIter **std::__parallel::__set_union_switch** (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _RAIter2 __end2, _Output_RAIter __result, _Predicate __pred, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate , typename _OIter , typename _IterTag1 , typename _IterTag2 , typename _IterTag3 >
  _OIter **std::__parallel::__set_union_switch** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, _IterTag1, _IterTag2, _IterTag3)
- template<typename _IIter , typename _OIter , typename _UnaryOperation , typename _IterTag1 , typename _IterTag2 >
  _OIter **std::__parallel::__transform1_switch** (_IIter, _IIter, _OIter, _UnaryOperation, _IterTag1, _IterTag2)
- template<typename _RAIIter , typename _RAOIter , typename _UnaryOperation >
  _RAOIter **std::__parallel::__transform1_switch** (_RAIIter, _RAIIter, _RAOIter, _UnaryOperation, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_balanced)
- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _BiOperation >
  _RAIter3 **std::__parallel::__transform2_switch** (_RAIter1, _RAIter1, _RAIter2, _RAIter3, _BiOperation, random_access_iterator_tag, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_balanced)

- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation , typename _Tag1 , typename _Tag2 , typename _Tag3 >
  _OIter **std::__parallel::__transform2_switch** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, _Tag1, _Tag2, _Tag3)
- template<typename _IIter , typename _OIter , typename _Predicate , typename _IterTag1 , typename _IterTag2 >
  _OIter **std::__parallel::__unique_copy_switch** (_IIter, _IIter, _OIter, _Predicate, _IterTag1, _IterTag2)
- template<typename _RAIter , typename _RandomAccess_OIter , typename _Predicate >
  _RandomAccess_OIter **std::__parallel::__unique_copy_switch** (_RAIter, _RAIter, _RandomAccess_OIter, _Predicate, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _FIter >
  _FIter **std::__parallel::adjacent_find** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **std::__parallel::adjacent_find** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _BiPredicate >
  _FIter **std::__parallel::adjacent_find** (_FIter, _FIter, _BiPredicate)
- template<typename _FIter , typename _BiPredicate >
  _FIter **std::__parallel::adjacent_find** (_FIter, _FIter, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count** (_IIter __begin, _IIter __end, const _Tp &__value)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Predicate >
  iterator_traits< _IIter >
  ::difference_type **std::__parallel::count_if** (_IIter __begin, _IIter __end, _Predicate __pred)
- template<typename _IIter1 , typename _IIter2 >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **std::__parallel::equal** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _IIter , typename _Tp >
  _IIter **std::__parallel::find** (_IIter __begin, _IIter __end, const _Tp &__val, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _IIter **std::__parallel::find** (_IIter __begin, _IIter __end, const _Tp &__val)

- template<typename _IIter , typename _FIter >
  _IIter **std::__parallel::find_first_of** (_IIter, _IIter, _FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIter , typename _BiPredicate >
  _IIter **std::__parallel::find_first_of** (_IIter, _IIter, _FIter, _FIter, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _FIter , typename _BiPredicate >
  _IIter **std::__parallel::find_first_of** (_IIter, _IIter, _FIter, _FIter, _BiPredicate)
- template<typename _IIter , typename _FIter >
  _IIter **std::__parallel::find_first_of** (_IIter, _IIter, _FIter, _FIter)
- template<typename _IIter , typename _Predicate >
  _IIter **std::__parallel::find_if** (_IIter __begin, _IIter __end, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Predicate >
  _IIter **std::__parallel::find_if** (_IIter __begin, _IIter __end, _Predicate __pred)
- template<typename _IIter , typename _Function >
  _Function **std::__parallel::for_each** (_IIter __begin, _IIter __end, _Function __f, __gnu_parallel::sequential_tag)
- template<typename _Iterator , typename _Function >
  _Function **std::__parallel::for_each** (_Iterator __begin, _Iterator __end, _Function __f, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Function >
  _Function **std::__parallel::for_each** (_IIter, _IIter, _Function)
- template<typename _FIter , typename _Generator >
  void **std::__parallel::generate** (_FIter, _FIter, _Generator)
- template<typename _FIter , typename _Generator >
  void **std::__parallel::generate** (_FIter, _FIter, _Generator, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Generator >
  void **std::__parallel::generate** (_FIter, _FIter, _Generator, __gnu_parallel::_Parallelism)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **std::__parallel::generate_n** (_OIter, _Size, _Generator)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **std::__parallel::generate_n** (_OIter, _Size, _Generator, __gnu_parallel::sequential_tag)
- template<typename _OIter , typename _Size , typename _Generator >
  _OIter **std::__parallel::generate_n** (_OIter, _Size, _Generator, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 >
  bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  constexpr bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  constexpr bool **std::__parallel::lexicographical_compare** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _IIter2 __end2, _Predicate __pred)
- template<typename _FIter >
  _FIter **std::__parallel::max_element** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **std::__parallel::max_element** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter >
  _FIter **std::__parallel::max_element** (_FIter, _FIter, __gnu_parallel::_Parallelism)
- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::max_element** (_FIter, _FIter, _Compare)
- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::max_element** (_FIter, _FIter, _Compare, __gnu_parallel::sequential_tag)

- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::max_element** (_FIter, _FIter, _Compare, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **std::__parallel::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Compare >
  _OIter **std::__parallel::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Compare)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::merge** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _FIter >
  _FIter **std::__parallel::min_element** (_FIter, _FIter)
- template<typename _FIter >
  _FIter **std::__parallel::min_element** (_FIter, _FIter, __gnu_parallel::sequential_tag)
- template<typename _FIter >
  _FIter **std::__parallel::min_element** (_FIter, _FIter, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::min_element** (_FIter, _FIter, _Compare)
- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::min_element** (_FIter, _FIter, _Compare, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Compare >
  _FIter **std::__parallel::min_element** (_FIter, _FIter, _Compare, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2)
- template<typename _IIter1 , typename _IIter2 , typename _Predicate >
  pair< _IIter1, _IIter2 > **std::__parallel::mismatch** (_IIter1 __begin1, _IIter1 __end1, _IIter2 __begin2, _Predicate __pred)
- template<typename _RAIter >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::nth_element** (_RAIter __begin, _RAIter __nth, _RAIter __end)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp)

- template<typename _RAIter >
  void **std::__parallel::partial_sort** (_RAIter __begin, _RAIter __middle, _RAIter __end)
- template<typename _FIter , typename _Predicate >
  _FIter **std::__parallel::partition** (_FIter, _FIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Predicate >
  _FIter **std::__parallel::partition** (_FIter, _FIter, _Predicate)
- template<typename _RAIter >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &__rand, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void **std::__parallel::random_shuffle** (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &&__rand)
- template<typename _FIter , typename _Tp >
  void **std::__parallel::replace** (_FIter, _FIter, const _Tp &, const _Tp &)
- template<typename _FIter , typename _Tp >
  void **std::__parallel::replace** (_FIter, _FIter, const _Tp &, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Tp >
  void **std::__parallel::replace** (_FIter, _FIter, const _Tp &, const _Tp &, __gnu_parallel::_Parallelism)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIter, _FIter, _Predicate, const _Tp &)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIter, _FIter, _Predicate, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Predicate , typename _Tp >
  void **std::__parallel::replace_if** (_FIter, _FIter, _Predicate, const _Tp &, __gnu_parallel::_Parallelism)
- template<typename _FIter1 , typename _FIter2 >
  _FIter1 **std::__parallel::search** (_FIter1, _FIter1, _FIter2, _FIter2, __gnu_parallel::sequential_tag)
- template<typename _FIter1 , typename _FIter2 >
  _FIter1 **std::__parallel::search** (_FIter1, _FIter1, _FIter2, _FIter2)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate >
  _FIter1 **std::__parallel::search** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _FIter1 , typename _FIter2 , typename _BiPredicate >
  _FIter1 **std::__parallel::search** (_FIter1, _FIter1, _FIter2, _FIter2, _BiPredicate)
- template<typename _FIter , typename _Integer , typename _Tp >
  _FIter **std::__parallel::search_n** (_FIter, _FIter, _Integer, const _Tp &, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _FIter **std::__parallel::search_n** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate, __gnu_parallel::sequential_tag)
- template<typename _FIter , typename _Integer , typename _Tp >
  _FIter **std::__parallel::search_n** (_FIter, _FIter, _Integer, const _Tp &)
- template<typename _FIter , typename _Integer , typename _Tp , typename _BiPredicate >
  _FIter **std::__parallel::search_n** (_FIter, _FIter, _Integer, const _Tp &, _BiPredicate)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)

- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_intersection** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_symmetric_difference** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter >
  _OIter **std::__parallel::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::set_union** (_IIter1, _IIter1, _IIter2, _IIter2, _OIter, _Predicate)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, __gnu_parallel::sequential_tag)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIter >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end)
- template<typename _RAIter , typename _Compare >
  void **std::__parallel::stable_sort** (_RAIter __begin, _RAIter __end, _Compare __comp)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **std::__parallel::transform** (_IIter, _IIter, _OIter, _UnaryOperation)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **std::__parallel::transform** (_IIter, _IIter, _OIter, _UnaryOperation, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _UnaryOperation >
  _OIter **std::__parallel::transform** (_IIter, _IIter, _OIter, _UnaryOperation, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **std::__parallel::transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation)

- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **std::__parallel::transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _OIter , typename _BiOperation >
  _OIter **std::__parallel::transform** (_IIter1, _IIter1, _IIter2, _OIter, _BiOperation, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::unique_copy** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::unique_copy** (_IIter, _IIter, _OIter, _Predicate, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::unique_copy** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _Predicate >
  _OIter **std::__parallel::unique_copy** (_IIter, _IIter, _OIter, _Predicate)

5.8.1 Detailed Description

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file parallel/algorithmfwd.h.

5.9 aligned_buffer.h File Reference

Namespaces

- __gnu_cxx

5.9.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file aligned_buffer.h.

5.10 alloc_traits.h File Reference

Classes

- struct std::allocator_traits< _Alloc >
- struct std::allocator_traits< allocator< _Tp > >

Namespaces

- std

Macros

- #define **__cpp_lib_allocator_traits_is_always_equal**

Typedefs

- template<typename _Alloc , typename _Up >
  using **std::__alloc_rebind** = typename __allocator_traits_base::template __rebind< _Alloc, _Up >::type
- template<typename _Alloc >
  using **std::_RequireAllocator** = typename enable_if< __is_allocator< _Alloc >::value, _Alloc >::type
- template<typename _Alloc >
  using **std::_RequireNotAllocator** = typename enable_if<!__is_allocator< _Alloc >::value, _Alloc >::type

Functions

- template<typename _Alloc >
  constexpr void **std::__alloc_on_copy** (_Alloc &__one, const _Alloc &__two)
- template<typename _Alloc >
  constexpr _Alloc **std::__alloc_on_copy** (const _Alloc &__a)
- template<typename _Alloc >
  constexpr void **std::__alloc_on_move** (_Alloc &__one, _Alloc &__two)
- template<typename _Alloc >
  constexpr void **std::__alloc_on_swap** (_Alloc &__one, _Alloc &__two)
- template<typename _Alloc >
  void **std::__do_alloc_on_copy** (_Alloc &__one, const _Alloc &__two, true_type)
- template<typename _Alloc >
  void **std::__do_alloc_on_copy** (_Alloc &, const _Alloc &, false_type)
- template<typename _Alloc >
  void **std::__do_alloc_on_move** (_Alloc &__one, _Alloc &__two, true_type)
- template<typename _Alloc >
  void **std::__do_alloc_on_move** (_Alloc &, _Alloc &, false_type)
- template<typename _Alloc >
  void **std::__do_alloc_on_swap** (_Alloc &__one, _Alloc &__two, true_type)
- template<typename _Alloc >
  void **std::__do_alloc_on_swap** (_Alloc &, _Alloc &, false_type)
- template<typename _ForwardIterator , typename _Allocator >
  void std::_Destroy (_ForwardIterator __first, _ForwardIterator __last, _Allocator &__alloc)
- template<typename _ForwardIterator , typename _Tp >
  void **std::_Destroy** (_ForwardIterator __first, _ForwardIterator __last, allocator< _Tp > &)

5.10.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file bits/alloc_traits.h.

5.11 alloc_traits.h File Reference

Classes

- struct __gnu_cxx::__alloc_traits< _Alloc, typename >

Namespaces

- __gnu_cxx

5.11.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file ext/alloc_traits.h.

5.12 allocated_ptr.h File Reference

Classes

- struct std::__allocated_ptr< _Alloc >

Namespaces

- std

Functions

- template<typename _Alloc >
  __allocated_ptr< _Alloc > std::__allocate_guarded (_Alloc &__a)

5.12.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file allocated_ptr.h.

5.13 allocator.h File Reference

Classes

- class std::allocator< _Tp >
- class std::allocator< void >

Namespaces

- std

Macros

- #define **__cpp_lib_incomplete_container_elements**

Functions

- template<typename _T1 , typename _T2 >
  constexpr bool **std::operator!=** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept
- template<typename _T1 , typename _T2 >
  constexpr bool **std::operator==** (const allocator< _T1 > &, const allocator< _T2 > &) noexcept

5.13.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file allocator.h.

5.14 any File Reference

Macros

- #define **_GLIBCXX_ANY**

5.14.1 Detailed Description

This is a Standard C++ Library header.

Definition in file any.

5.15 any File Reference

Classes

- class std::experimental::fundamentals_v1::any
- class std::experimental::fundamentals_v1::bad_any_cast

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_any**
- #define **_GLIBCXX_EXPERIMENTAL_ANY**

Functions

- template<typename _ValueType >
  _ValueType std::experimental::fundamentals_v1::any_cast (const any &__any)
- void std::experimental::fundamentals_v1::swap (any &__x, any &__y) noexcept

- template<typename _ValueType >
  _ValueType std::experimental::fundamentals_v1::any_cast (any &__any)
- template<typename _ValueType , typename enable_if<!is_move_constructible< _ValueType >::value||is_lvalue_reference< _ValueType >-::value, bool >::type = true>
  _ValueType std::experimental::fundamentals_v1::any_cast (any &&__any)

- template<typename _ValueType >
  const _ValueType * std::experimental::fundamentals_v1::any_cast (const any *__any) noexcept

- template<typename _ValueType >
  _ValueType * std::experimental::fundamentals_v1::any_cast (any *__any) noexcept

5.15.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/any.

5.16 array File Reference

Classes

- struct std::array< _Tp, _Nm >
- struct std::tuple_element< _Int, _Tp >
- struct std::tuple_element< _Int,::array< _Tp, _Nm > >
- struct std::tuple_size< _Tp >
- struct std::tuple_size<::array< _Tp, _Nm > >

Namespaces

- std

Macros

- #define **_GLIBCXX_ARRAY**

Functions

- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp & **std::get** (array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp && **std::get** (array< _Tp, _Nm > &&__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp & **std::get** (const array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp && **std::get** (const array< _Tp, _Nm > &&__arr) noexcept
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator!=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator**< (const array< _Tp, _Nm > &__a, const array< _Tp, _Nm > &__b)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator<=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator==** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator**> (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::operator>=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)

- template<typename _Tp , std::size_t _Nm>
  constexpr enable_if
  < ::__array_traits< _Tp, _Nm >
  ::_Is_swappable::value >::type **std::swap** (array< _Tp, _Nm > &__one, array< _Tp, _Nm > &__two) noexcept(noexcept(__one.swap(__two)))
- template<typename _Tp , std::size_t _Nm>
  enable_if< !::__array_traits
  < _Tp, _Nm >
  ::_Is_swappable::value >::type **std::swap** (array< _Tp, _Nm > &, array< _Tp, _Nm > &)=delete

5.16.1 Detailed Description

This is a Standard C++ Library header.

Definition in file array.

5.17 array File Reference

Classes

- struct std::tuple_element< _Int, std::__debug::array< _Tp, _Nm > >
- struct std::tuple_size< std::__debug::array< _Tp, _Nm > >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_ARRAY**

Functions

- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp & **std::__debug::get** (array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr _Tp && **std::__debug::get** (array< _Tp, _Nm > &&__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp & **std::__debug::get** (const array< _Tp, _Nm > &__arr) noexcept
- template<std::size_t _Int, typename _Tp , std::size_t _Nm>
  constexpr const _Tp && **std::__debug::get** (const array< _Tp, _Nm > &&__arr) noexcept
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator!=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator**< (const array< _Tp, _Nm > &__a, const array< _Tp, _Nm > &__b)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator<=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__two)

- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator==** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__-two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator>** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__-two)
- template<typename _Tp , std::size_t _Nm>
  constexpr bool **std::__debug::operator>=** (const array< _Tp, _Nm > &__one, const array< _Tp, _Nm > &__-two)
- template<typename _Tp , size_t _Nm>
  enable_if< !::__array_traits
  < _Tp, _Nm >
  ::_Is_swappable::value >::type **std::__debug::swap** (array< _Tp, _Nm > &, array< _Tp, _Nm > &)=delete
- template<typename _Tp , std::size_t _Nm>
  constexpr void **std::__debug::swap** (array< _Tp, _Nm > &__one, array< _Tp, _Nm > &__two) noexcept(noexcept(__one.swap(__two)))

5.17.1 Detailed Description

This is a Standard C++ Library header.

Definition in file debug/array.

5.18 array File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_make_array**
- #define **_GLIBCXX_EXPERIMENTAL_ARRAY**

Functions

- template<typename _Tp , size_t _Nm, size_t... _Idx>
  constexpr array< remove_cv_t
  < _Tp >, _Nm > **std::experimental::fundamentals_v2::__to_array** (_Tp(&__a)[_Nm], index_sequence< _-Idx...>)
- template<typename _Dest = void, typename... _Types>
  constexpr array< typename
  __make_array_elem< _Dest,
  _Types...>::type, sizeof...(_Types)> std::experimental::fundamentals_v2::make_array (_Types &&...__t)
- template<typename _Tp , size_t _Nm>
  constexpr array< remove_cv_t
  < _Tp >, _Nm > std::experimental::fundamentals_v2::to_array (_Tp(&__a)[_Nm]) noexcept(is_nothrow_-constructible< remove_cv_t< _Tp >, _Tp & >::value)

5.18.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/array.

5.19 assertions.h File Reference

Macros

- #define **__glibcxx_requires_non_empty_range**(_First, _Last)
- #define **__glibcxx_requires_nonempty**()
- #define **__glibcxx_requires_subscript**(_N)
- #define **_GLIBCXX_DEBUG_ASSERT**(_Condition)
- #define **_GLIBCXX_DEBUG_ONLY**(_Statement)
- #define **_GLIBCXX_DEBUG_PEDASSERT**(_Condition)

5.19.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file assertions.h.

5.20 assoc_container.hpp File Reference

Classes

- class __gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc >
- class __gnu_pbds::basic_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Resize_Policy, Store_Hash, Tag, Policy_Tl, _Alloc >
- class __gnu_pbds::cc_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Hash_Fn, Resize_Policy, Store_Hash, _Alloc >
- class __gnu_pbds::gp_hash_table< Key, Mapped, Hash_Fn, Eq_Fn, Comb_Probe_Fn, Probe_Fn, Resize_Policy, Store_Hash, _Alloc >
- class __gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc >
- class __gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_Update, _Alloc >
- class __gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_Update, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_BRANCH_BASE**
- #define **PB_DS_CC_HASH_BASE**
- #define **PB_DS_GP_HASH_BASE**
- #define **PB_DS_HASH_BASE**
- #define **PB_DS_LU_BASE**
- #define **PB_DS_TREE_BASE**

- #define **PB_DS_TREE_NODE_AND_IT_TRAITS**
- #define **PB_DS_TRIE_BASE**
- #define **PB_DS_TRIE_NODE_AND_IT_TRAITS**

5.20.1 Detailed Description

Contains associative containers.

Definition in file assoc_container.hpp.

5.21 atomic File Reference

Classes

- struct std::atomic< _Tp >
- struct std::atomic< _Tp >
- struct std::atomic< _Tp * >
- struct std::atomic< bool >
- struct std::atomic< char >
- struct std::atomic< char16_t >
- struct std::atomic< char32_t >
- struct std::atomic< int >
- struct std::atomic< long >
- struct std::atomic< long long >
- struct std::atomic< short >
- struct std::atomic< signed char >
- struct std::atomic< unsigned char >
- struct std::atomic< unsigned int >
- struct std::atomic< unsigned long >
- struct std::atomic< unsigned long long >
- struct std::atomic< unsigned short >
- struct std::atomic< wchar_t >

Namespaces

- std

Macros

- #define **_GLIBCXX20_INIT**(I)
- #define **_GLIBCXX_ATOMIC**

Typedefs

- template<typename _Tp >
  using **std::__atomic_diff_t** = typename atomic< _Tp >::difference_type
- template<typename _Tp >
  using **std::__atomic_val_t** = typename atomic< _Tp >::value_type
- typedef atomic< bool > std::atomic_bool

- typedef atomic< char > std::atomic_char
- typedef atomic< char16_t > std::atomic_char16_t
- typedef atomic< char32_t > std::atomic_char32_t
- typedef atomic< int > std::atomic_int
- typedef atomic< int16_t > std::atomic_int16_t
- typedef atomic< int32_t > std::atomic_int32_t
- typedef atomic< int64_t > std::atomic_int64_t
- typedef atomic< int8_t > std::atomic_int8_t
- typedef atomic< int_fast16_t > std::atomic_int_fast16_t
- typedef atomic< int_fast32_t > std::atomic_int_fast32_t
- typedef atomic< int_fast64_t > std::atomic_int_fast64_t
- typedef atomic< int_fast8_t > std::atomic_int_fast8_t
- typedef atomic< int_least16_t > std::atomic_int_least16_t
- typedef atomic< int_least32_t > std::atomic_int_least32_t
- typedef atomic< int_least64_t > std::atomic_int_least64_t
- typedef atomic< int_least8_t > std::atomic_int_least8_t
- typedef atomic< intmax_t > std::atomic_intmax_t
- typedef atomic< intptr_t > std::atomic_intptr_t
- typedef atomic< long long > std::atomic_llong
- typedef atomic< long > std::atomic_long
- typedef atomic< ptrdiff_t > std::atomic_ptrdiff_t
- typedef atomic< signed char > std::atomic_schar
- typedef atomic< short > std::atomic_short
- typedef atomic< size_t > std::atomic_size_t
- typedef atomic< unsigned char > std::atomic_uchar
- typedef atomic< unsigned int > std::atomic_uint
- typedef atomic< uint16_t > std::atomic_uint16_t
- typedef atomic< uint32_t > std::atomic_uint32_t
- typedef atomic< uint64_t > std::atomic_uint64_t
- typedef atomic< uint8_t > std::atomic_uint8_t
- typedef atomic< uint_fast16_t > std::atomic_uint_fast16_t
- typedef atomic< uint_fast32_t > std::atomic_uint_fast32_t
- typedef atomic< uint_fast64_t > std::atomic_uint_fast64_t
- typedef atomic< uint_fast8_t > std::atomic_uint_fast8_t
- typedef atomic< uint_least16_t > std::atomic_uint_least16_t
- typedef atomic< uint_least32_t > std::atomic_uint_least32_t
- typedef atomic< uint_least64_t > std::atomic_uint_least64_t
- typedef atomic< uint_least8_t > std::atomic_uint_least8_t
- typedef atomic< uintmax_t > std::atomic_uintmax_t
- typedef atomic< uintptr_t > std::atomic_uintptr_t
- typedef atomic< unsigned long long > std::atomic_ullong
- typedef atomic< unsigned long > std::atomic_ulong
- typedef atomic< unsigned short > std::atomic_ushort
- typedef atomic< wchar_t > std::atomic_wchar_t

Functions

- template<typename _ITp >
  bool **std::atomic_compare_exchange_strong** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_strong** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_strong_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_strong_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_weak** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_weak** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_weak_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  bool **std::atomic_compare_exchange_weak_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > *__i1, __atomic_val_t< _ITp > __i2, memory_order __m1, memory_order __m2) noexcept
- template<typename _ITp >
  _ITp **std::atomic_exchange** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_exchange** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_exchange_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_exchange_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_add** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_add** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_add_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_add_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_and_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept

- template<typename _ITp >
  _ITp **std::atomic_fetch_and_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_or_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub_explicit** (atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_sub_explicit** (volatile atomic< _ITp > *__a, __atomic_diff_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor_explicit** (__atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_fetch_xor_explicit** (volatile __atomic_base< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- void **std::atomic_flag_clear** (atomic_flag *__a) noexcept
- void **std::atomic_flag_clear** (volatile atomic_flag *__a) noexcept
- void **std::atomic_flag_clear_explicit** (atomic_flag *__a, memory_order __m) noexcept
- void **std::atomic_flag_clear_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- bool **std::atomic_flag_test_and_set** (atomic_flag *__a) noexcept
- bool **std::atomic_flag_test_and_set** (volatile atomic_flag *__a) noexcept
- bool **std::atomic_flag_test_and_set_explicit** (atomic_flag *__a, memory_order __m) noexcept
- bool **std::atomic_flag_test_and_set_explicit** (volatile atomic_flag *__a, memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_init** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **std::atomic_init** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  bool **std::atomic_is_lock_free** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  bool **std::atomic_is_lock_free** (const volatile atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load** (const atomic< _ITp > *__a) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load** (const volatile atomic< _ITp > *__a) noexcept

- template<typename _ITp >
  _ITp **std::atomic_load_explicit** (const atomic< _ITp > *__a, memory_order __m) noexcept
- template<typename _ITp >
  _ITp **std::atomic_load_explicit** (const volatile atomic< _ITp > *__a, memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_store** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **std::atomic_store** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i) noexcept
- template<typename _ITp >
  void **std::atomic_store_explicit** (atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept
- template<typename _ITp >
  void **std::atomic_store_explicit** (volatile atomic< _ITp > *__a, __atomic_val_t< _ITp > __i, memory_order __m) noexcept

5.21.1 Detailed Description

This is a Standard C++ Library header.

Definition in file atomic.

5.22 atomic_base.h File Reference

Classes

- struct std::__atomic_base< _IntTp >
- struct std::__atomic_base< _IntTp >
- struct std::__atomic_base< _PTp * >
- struct std::__atomic_flag_base
- struct std::atomic< _Tp >
- struct std::atomic_flag

Namespaces

- std

Macros

- #define **_GLIBCXX20_INIT**(I)
- #define **_GLIBCXX_ALWAYS_INLINE**
- #define **ATOMIC_FLAG_INIT**
- #define **ATOMIC_VAR_INIT**(_VI)

Typedefs

- typedef unsigned char **std::__atomic_flag_data_type**
- typedef enum std::memory_order std::memory_order

Enumerations

- enum **__memory_order_modifier** { **__memory_order_mask**, **__memory_order_modifier_mask**, **__memory_order_hle_acquire**, **__memory_order_hle_release** }
- enum std::memory_order { **memory_order_relaxed**, **memory_order_consume**, **memory_order_acquire**, **memory_order_release**, **memory_order_acq_rel**, **memory_order_seq_cst** }

Functions

- constexpr memory_order **std::__cmpexch_failure_order** (memory_order __m) noexcept
- constexpr memory_order **std::__cmpexch_failure_order2** (memory_order __m) noexcept
- void **std::atomic_signal_fence** (memory_order __m) noexcept
- void **std::atomic_thread_fence** (memory_order __m) noexcept
- template<typename _Tp >
  _Tp std::kill_dependency (_Tp __y) noexcept
- constexpr memory_order **std::operator&** (memory_order __m, __memory_order_modifier __mod)
- constexpr memory_order **std::operator|** (memory_order __m, __memory_order_modifier __mod)

5.22.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <atomic>.

Definition in file atomic_base.h.

5.23 atomic_futex.h File Reference

Namespaces

- std

5.23.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file atomic_futex.h.

5.24 atomic_lockfree_defines.h File Reference

Macros

- #define ATOMIC_BOOL_LOCK_FREE
- #define **ATOMIC_CHAR16_T_LOCK_FREE**
- #define **ATOMIC_CHAR32_T_LOCK_FREE**
- #define **ATOMIC_CHAR_LOCK_FREE**
- #define **ATOMIC_INT_LOCK_FREE**
- #define **ATOMIC_LLONG_LOCK_FREE**
- #define **ATOMIC_LONG_LOCK_FREE**
- #define **ATOMIC_POINTER_LOCK_FREE**
- #define **ATOMIC_SHORT_LOCK_FREE**
- #define **ATOMIC_WCHAR_T_LOCK_FREE**

5.24.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <atomic>.

Definition in file atomic_lockfree_defines.h.

5.25 atomic_word.h File Reference

Macros

- #define **_GLIBCXX_READ_MEM_BARRIER**
- #define **_GLIBCXX_WRITE_MEM_BARRIER**

Typedefs

- typedef int **_Atomic_word**

5.25.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file atomic_word.h.

5.26 atomicity.h File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_GLIBCXX_READ_MEM_BARRIER**
- #define **_GLIBCXX_WRITE_MEM_BARRIER**

Functions

- void **__gnu_cxx::__atomic_add** (volatile _Atomic_word *, int) noexcept
- void **__gnu_cxx::__atomic_add_dispatch** (_Atomic_word *__mem, int __val)
- void **__gnu_cxx::__atomic_add_single** (_Atomic_word *__mem, int __val)
- _Atomic_word **__gnu_cxx::__exchange_and_add** (volatile _Atomic_word *, int) noexcept
- _Atomic_word **__gnu_cxx::__exchange_and_add_dispatch** (_Atomic_word *__mem, int __val)
- _Atomic_word **__gnu_cxx::__exchange_and_add_single** (_Atomic_word *__mem, int __val)

5.26.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file atomicity.h.

5.27 auto_ptr.h File Reference

Classes

- class std::auto_ptr< _Tp >
- struct std::auto_ptr_ref< _Tp1 >

Namespaces

- std

5.27.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file auto_ptr.h.

5.28 backward_warning.h File Reference

5.28.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iosfwd>.

Definition in file backward_warning.h.

5.29 balanced_quicksort.h File Reference

Classes

- struct __gnu_parallel::_QSBThreadLocal< _RAIter >

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort_qsb (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__qsb_conquer (_QSBThreadLocal< _RAIter > **__tls, _RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __iam, _ThreadIndex __num_threads, bool __parent_wait)
- template<typename _RAIter , typename _Compare >
  std::iterator_traits< _RAIter >
  ::difference_type __gnu_parallel::__qsb_divide (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)

- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__qsb_local_sort_with_helping (_QSBThreadLocal< _RAIter > **__tls, _Compare &__comp, _ThreadIndex __iam, bool __wait)

5.29.1 Detailed Description

Implementation of a dynamically load-balanced parallel quicksort. It works in-place and needs only logarithmic extra memory. The algorithm is similar to the one proposed in

P. Tsigas and Y. Zhang. A simple, fast parallel implementation of quicksort and its performance evaluation on SUN enterprise 10000. In 11th Euromicro Conference on Parallel, Distributed and Network-Based Processing, page 372, 2003.

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file balanced_quicksort.h.

5.30 base.h File Reference

Classes

- class __gnu_parallel::__binder1st< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >
- class __gnu_parallel::__binder2nd< _Operation, _FirstArgumentType, _SecondArgumentType, _ResultType >
- class __gnu_parallel::__unary_negate< _Predicate, argument_type >
- class __gnu_parallel::_EqualFromLess< _T1, _T2, _Compare >
- struct __gnu_parallel::_EqualTo< _T1, _T2 >
- struct __gnu_parallel::_Less< _T1, _T2 >
- struct __gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result >
- struct __gnu_parallel::_Plus< _Tp1, _Tp2, _Result >
- class __gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >
- class __gnu_parallel::_PseudoSequenceIterator< _Tp, _DifferenceTp >

Namespaces

- __gnu_parallel
- __gnu_sequential
- std
- std::__parallel

Macros

- #define **_GLIBCXX_PARALLEL_ASSERT**(_Condition)

Functions

- void __gnu_parallel::__decode2 (_CASable __x, int &__a, int &__b)
- _CASable __gnu_parallel::__encode2 (int __a, int __b)
- _ThreadIndex **__gnu_parallel::__get_max_threads** ()
- bool **__gnu_parallel::__is_parallel** (const _Parallelism __p)

- template<typename _RAIter , typename _Compare >
  _RAIter __gnu_parallel::__median_of_three_iterators (_RAIter __a, _RAIter __b, _RAIter __c, _Compare __comp)
- template<typename _Size >
  _Size __gnu_parallel::__rd_log2 (_Size __n)
- template<typename _Tp >
  const _Tp & __gnu_parallel::max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp >
  const _Tp & __gnu_parallel::min (const _Tp &__a, const _Tp &__b)

5.30.1 Detailed Description

Sequential helper functions. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file base.h.

5.31 basic_file.h File Reference

Namespaces

- std

5.31.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ios>.

Definition in file basic_file.h.

5.32 basic_ios.h File Reference

Classes

- class std::basic_ios< _CharT, _Traits >

Namespaces

- std

Functions

- template<typename _Facet >
  const _Facet & **std::__check_facet** (const _Facet *__f)

5.32.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ios>.

Definition in file basic_ios.h.

5.33 basic_ios.tcc File Reference

Namespaces

- std

Macros

- #define **_BASIC_IOS_TCC**

5.33.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ios>.

Definition in file basic_ios.tcc.

5.34 basic_iterator.h File Reference

5.34.1 Detailed Description

Includes the original header files concerned with iterators except for stream iterators. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file basic_iterator.h.

5.35 basic_string.h File Reference

Classes

- class std::basic_string< _CharT, _Traits, _Alloc >
- struct std::hash< string >
- struct std::hash< u16string >
- struct std::hash< u32string >
- struct std::hash< wstring >

Namespaces

- std

Macros

- #define **__cpp_lib_string_udls**

Functions

- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str, _CharT __delim)

- template<typename _CharT , typename _Traits , typename _Alloc >
basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &&__is, basic_string< _CharT, _Traits, _Alloc > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &&__is, basic_string< _CharT, _Traits, _Alloc > &__str)
- template<>
basic_istream< char > & **std::getline** (basic_istream< char > &__in, basic_string< char > &__str, char __delim)
- template<>
basic_istream< wchar_t > & **std::getline** (basic_istream< wchar_t > &__in, basic_string< wchar_t > &__str, wchar_t __delim)
- template<typename _CharT , typename _Traits , typename _Alloc >
bool std::operator!= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
bool std::operator!= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
bool std::operator!= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- _GLIBCXX_DEFAULT_ABI_TAG
basic_string< char > **std::literals::string_literals::operator""s** (const char *__str, size_t __len)
- _GLIBCXX_DEFAULT_ABI_TAG
basic_string< wchar_t > **std::literals::string_literals::operator""s** (const wchar_t *__str, size_t __len)
- _GLIBCXX_DEFAULT_ABI_TAG
basic_string< char16_t > **std::literals::string_literals::operator""s** (const char16_t *__str, size_t __len)
- _GLIBCXX_DEFAULT_ABI_TAG
basic_string< char32_t > **std::literals::string_literals::operator""s** (const char32_t *__str, size_t __len)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > std::operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > std::operator+ (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > std::operator+ (_CharT __lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > std::operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > std::operator+ (const basic_string< _CharT, _Traits, _Alloc > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **std::operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
basic_string< _CharT, _Traits,
_Alloc > **std::operator+** (const basic_string< _CharT, _Traits, _Alloc > &__lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > **std::operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > **std::operator+** (const _CharT *__lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > **std::operator+** (_CharT __lhs, basic_string< _CharT, _Traits, _Alloc > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > **std::operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > **std::operator+** (basic_string< _CharT, _Traits, _Alloc > &&__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator< (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator< (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator< (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__os, const basic_string< _CharT, _Traits, _Alloc > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator<= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator<= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator<= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator== (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  bool >::__type **std::operator==** (const basic_string< _CharT > &__lhs, const basic_string< _CharT > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator== (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator== (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator> (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator> (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator> (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator>= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator>= (const basic_string< _CharT, _Traits, _Alloc > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  bool std::operator>= (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str)
- template<>
  basic_istream< char > & **std::operator**>> (basic_istream< char > &__is, basic_string< char > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc >
  void std::swap (basic_string< _CharT, _Traits, _Alloc > &__lhs, basic_string< _CharT, _Traits, _Alloc > &__rhs) noexcept(/*conditional */)
- string **std::to_string** (int __val)
- string **std::to_string** (unsigned __val)
- string **std::to_string** (long __val)
- string **std::to_string** (unsigned long __val)
- string **std::to_string** (long long __val)
- string **std::to_string** (unsigned long long __val)

5.35.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <string>.

Definition in file basic_string.h.

5.36 basic_string.tcc File Reference

Namespaces

- std

Macros

- #define **_BASIC_STRING_TCC**

Functions

- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > std::operator+ (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_string< _CharT, _Traits,
  _Alloc > std::operator+ (_CharT __lhs, const basic_string< _CharT, _Traits, _Alloc > &__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Alloc > &__str)

5.36.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <string>.

Definition in file basic_string.tcc.

5.37 bin_search_tree_.hpp File Reference

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_NODE_CONSISTENT**(_Node)
- #define **PB_DS_BIN_TREE_NAME**
- #define **PB_DS_BIN_TREE_TRAITS_BASE**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_STRUCT_ONLY_ASSERT_VALID**(X)

5.37.1 Detailed Description

Contains an implementation class for binary search tree.

Definition in file bin_search_tree_.hpp.

5.38 binary_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_VALID**(X)
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_DEBUG_VERIFY**(_Cond)
- #define **PB_DS_ENTRY_CMP_DEC**
- #define **PB_DS_RESIZE_POLICY_DEC**

5.38.1 Detailed Description

Contains an implementation class for a binary heap.

Definition in file binary_heap_.hpp.

5.39 binders.h File Reference

Classes

- class std::binder1st< _Operation >
- class std::binder2nd< _Operation >

Namespaces

- std

Functions

- template<typename _Operation , typename _Tp >
  binder1st< _Operation > std::bind1st (const _Operation &__fn, const _Tp &__x)
- template<typename _Operation , typename _Tp >
  binder2nd< _Operation > std::bind2nd (const _Operation &__fn, const _Tp &__x)

5.39.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file binders.h.

5.40 binomial_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.40.1 Detailed Description

Contains an implementation class for a binomial heap.

Definition in file binomial_heap_.hpp.

5.41 binomial_heap_base_.hpp File Reference

Classes

- class __gnu_pbds::detail::binomial_heap_base< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_BASE_NODE_CONSISTENT**(_Node, _Bool)
- #define **PB_DS_ASSERT_VALID_COND**(X, _StrictlyBinomial)
- #define **PB_DS_B_HEAP_BASE**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.41.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_.hpp.

5.42 bit File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_BIT**

5.42.1 Detailed Description

This is a Standard C++ Library header.

Definition in file bit.

5.43 bitmap_allocator.h File Reference

Classes

- class __gnu_cxx::__detail::__mini_vector< _Tp >
- class __gnu_cxx::__detail::_Bitmap_counter< _Tp >
- class __gnu_cxx::__detail::_Ffit_finder< _Tp >
- class __gnu_cxx::bitmap_allocator< _Tp >
- class __gnu_cxx::bitmap_allocator< _Tp >
- class __gnu_cxx::free_list

Namespaces

- __gnu_cxx
- __gnu_cxx::__detail

Macros

- #define _BALLOC_ALIGN_BYTES

Enumerations

- enum { **bits_per_byte**, **bits_per_block** }

Functions

- void __gnu_cxx::__detail::__bit_allocate (std::size_t *__pbmap, std::size_t __pos) throw ()
- void __gnu_cxx::__detail::__bit_free (std::size_t *__pbmap, std::size_t __pos) throw ()
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  _ForwardIterator **__gnu_cxx::__detail::__lower_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _AddrPair >
  std::size_t __gnu_cxx::__detail::__num_bitmaps (_AddrPair __ap)
- template<typename _AddrPair >
  std::size_t __gnu_cxx::__detail::__num_blocks (_AddrPair __ap)
- std::size_t __gnu_cxx::_Bit_scan_forward (std::size_t __num)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator!=** (const bitmap_allocator< _Tp1 > &, const bitmap_allocator< _Tp2 > &) throw ()
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator==** (const bitmap_allocator< _Tp1 > &, const bitmap_allocator< _Tp2 > &) throw ()

5.43.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file bitmap_allocator.h.

5.43.2 Macro Definition Documentation

5.43.2.1 #define _BALLOC_ALIGN_BYTES

The constant in the expression below is the alignment required in bytes.

Definition at line 43 of file bitmap_allocator.h.

5.44 bitset File Reference

Classes

- struct std::_Base_bitset< _Nw >
- struct std::_Base_bitset< 0 >

- struct std::_Base_bitset< 1 >
- class std::bitset< _Nb >
- struct std::hash<::bitset< _Nb > >
- class std::bitset< _Nb >::reference

Namespaces

- std

Macros

- #define **_GLIBCXX_BITSET**
- #define **_GLIBCXX_BITSET_BITS_PER_ULL**
- #define **_GLIBCXX_BITSET_BITS_PER_WORD**
- #define **_GLIBCXX_BITSET_WORDS**(__n)

Functions

- template<size_t _Nb>
  bitset< _Nb > std::operator& (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > std::operator| (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > std::operator^ (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept

- template<class _CharT , class _Traits , size_t _Nb>
  std::basic_istream< _CharT, _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, bitset< _Nb > &__x)
- template<class _CharT , class _Traits , size_t _Nb>
  std::basic_ostream< _CharT, _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const bitset< _Nb > &__x)

5.44.1 Detailed Description

This is a Standard C++ Library header.

Definition in file bitset.

5.45 bitset File Reference

Classes

- class std::__debug::bitset< _Nb >
- struct std::hash< __debug::bitset< _Nb > >

Namespaces

- std
- std::__debug

Functions

- template<size_t _Nb>
  bitset< _Nb > **std::__debug::operator&** (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<typename _CharT , typename _Traits , size_t _Nb>
  std::basic_ostream< _CharT,
  _Traits > & **std::__debug::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const bitset< _Nb > &__x)
- template<typename _CharT , typename _Traits , size_t _Nb>
  std::basic_istream< _CharT,
  _Traits > & **std::__debug::operator>>** (std::basic_istream< _CharT, _Traits > &__is, bitset< _Nb > &__x)
- template<size_t _Nb>
  bitset< _Nb > **std::__debug::operator^** (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept
- template<size_t _Nb>
  bitset< _Nb > **std::__debug::operator|** (const bitset< _Nb > &__x, const bitset< _Nb > &__y) noexcept

5.45.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/bitset.

5.46 bool_set File Reference

Classes

- class std::tr2::bool_set

Namespaces

- std
- std::tr2

Macros

- #define **_GLIBCXX_TR2_BOOL_SET**

Functions

- bool **std::tr2::certainly** (bool_set __b)
- bool **std::tr2::contains** (bool_set __s, bool_set __t)
- bool **std::tr2::equals** (bool_set __s, bool_set __t)
- bool **std::tr2::is_emptyset** (bool_set __b)
- bool **std::tr2::is_indeterminate** (bool_set __b)
- bool **std::tr2::is_singleton** (bool_set __b)
- bool_set **std::tr2::operator!=** (bool __s, bool_set __t)
- bool_set **std::tr2::operator!=** (bool_set __s, bool __t)
- bool_set **std::tr2::operator!=** (bool_set __s, bool_set __t)
- bool_set **std::tr2::operator&** (bool __s, bool_set __t)
- bool_set **std::tr2::operator&** (bool_set __s, bool __t)

- bool_set **std::tr2::operator==** (bool __s, bool_set __t)
- bool_set **std::tr2::operator==** (bool_set __s, bool __t)
- bool_set **std::tr2::operator^** (bool __s, bool_set __t)
- bool_set **std::tr2::operator^** (bool_set __s, bool __t)
- bool_set **std::tr2::operator|** (bool __s, bool_set __t)
- bool_set **std::tr2::operator|** (bool_set __s, bool __t)
- bool **std::tr2::possibly** (bool_set __b)
- bool_set **std::tr2::set_complement** (bool_set __b)
- bool_set **std::tr2::set_intersection** (bool __s, bool_set __t)
- bool_set **std::tr2::set_intersection** (bool_set __s, bool __t)
- bool_set **std::tr2::set_intersection** (bool_set __s, bool_set __t)
- bool_set **std::tr2::set_union** (bool __s, bool_set __t)
- bool_set **std::tr2::set_union** (bool_set __s, bool __t)
- bool_set **std::tr2::set_union** (bool_set __s, bool_set __t)

5.46.1 Detailed Description

This is a TR2 C++ Library header.

Definition in file bool_set.

5.47 bool_set.tcc File Reference

Namespaces

- std
- std::tr2

Macros

- #define **_GLIBCXX_TR2_BOOL_SET_TCC**

5.47.1 Detailed Description

This is a TR2 C++ Library header.

Definition in file bool_set.tcc.

5.48 boost_concept_check.h File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_GLIBCXX_CLASS_REQUIRES**(_type_var, _ns, _concept)
- #define **_GLIBCXX_CLASS_REQUIRES2**(_type_var1, _type_var2, _ns, _concept)
- #define **_GLIBCXX_CLASS_REQUIRES3**(_type_var1, _type_var2, _type_var3, _ns, _concept)
- #define **_GLIBCXX_CLASS_REQUIRES4**(_type_var1, _type_var2, _type_var3, _type_var4, _ns, _concept)
- #define **_GLIBCXX_DEFINE_BINARY_OPERATOR_CONSTRAINT**(_OP, _NAME)
- #define **_GLIBCXX_DEFINE_BINARY_PREDICATE_OP_CONSTRAINT**(_OP, _NAME)
- #define **_IsUnused**

Functions

- template<class _Tp >
  void **__gnu_cxx::__aux_require_boolean_expr** (const _Tp &__t)
- void **__gnu_cxx::__error_type_must_be_a_signed_integer_type** ()
- void **__gnu_cxx::__error_type_must_be_an_integer_type** ()
- void **__gnu_cxx::__error_type_must_be_an_unsigned_integer_type** ()
- template<class _Concept >
  constexpr void **__gnu_cxx::__function_requires** ()

5.48.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file boost_concept_check.h.

5.49 branch_policy.hpp File Reference

Classes

- struct __gnu_pbds::detail::branch_policy< Node_CItr, Node_Itr, _Alloc >
- struct __gnu_pbds::detail::branch_policy< Node_CItr, Node_CItr, _Alloc >

Namespaces

- __gnu_pbds

5.49.1 Detailed Description

Contains a base class for branch policies.

Definition in file branch_policy.hpp.

5.50 c++0x_warning.h File Reference

5.50.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iosfwd>.

Definition in file c++0x_warning.h.

5.51 c++allocator.h File Reference

Namespaces

- std

Typedefs

- template<typename _Tp >
  using std::__allocator_base = __gnu_cxx::new_allocator< _Tp >

5.51.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file c++allocator.h.

5.52 c++config.h File Reference

Namespaces

- __gnu_cxx
- std

Macros

- #define **__GLIBCXX__**
- #define **__glibcxx_assert**(_Condition)
- #define **__N**(msgid)
- #define **_GLIBCXX11_USE_C99_MATH**
- #define **_GLIBCXX11_USE_C99_STDIO**
- #define **_GLIBCXX11_USE_C99_STDLIB**
- #define **_GLIBCXX11_USE_C99_WCHAR**
- #define **_GLIBCXX17_DEPRECATED**
- #define **_GLIBCXX20_DEPRECATED**(MSG)
- #define **_GLIBCXX98_USE_C99_MATH**
- #define **_GLIBCXX98_USE_C99_STDIO**
- #define **_GLIBCXX98_USE_C99_STDLIB**
- #define **_GLIBCXX98_USE_C99_WCHAR**
- #define **_GLIBCXX_ABI_TAG_CXX11**
- #define **_GLIBCXX_BEGIN_EXTERN_C**
- #define **_GLIBCXX_BEGIN_NAMESPACE_ALGO**
- #define **_GLIBCXX_BEGIN_NAMESPACE_CONTAINER**
- #define **_GLIBCXX_BEGIN_NAMESPACE_CXX11**
- #define **_GLIBCXX_BEGIN_NAMESPACE_LDBL**
- #define **_GLIBCXX_BEGIN_NAMESPACE_LDBL_OR_CXX11**
- #define **_GLIBCXX_BEGIN_NAMESPACE_VERSION**
- #define **_GLIBCXX_DARWIN_USE_64_BIT_INODE**
- #define **_GLIBCXX_DEFAULT_ABI_TAG**

- #define **_GLIBCXX_DEPRECATED**
- #define **_GLIBCXX_DEPRECATED_SUGGEST**(ALT)
- #define **_GLIBCXX_END_EXTERN_C**
- #define **_GLIBCXX_END_NAMESPACE_ALGO**
- #define **_GLIBCXX_END_NAMESPACE_CONTAINER**
- #define **_GLIBCXX_END_NAMESPACE_CXX11**
- #define **_GLIBCXX_END_NAMESPACE_LDBL**
- #define **_GLIBCXX_END_NAMESPACE_LDBL_OR_CXX11**
- #define **_GLIBCXX_END_NAMESPACE_VERSION**
- #define **_GLIBCXX_EXTERN_TEMPLATE**
- #define **_GLIBCXX_FAST_MATH**
- #define **_GLIBCXX_FULLY_DYNAMIC_STRING**
- #define **_GLIBCXX_HAVE_ACOSF**
- #define **_GLIBCXX_HAVE_AS_SYMVER_DIRECTIVE**
- #define **_GLIBCXX_HAVE_ASINF**
- #define **_GLIBCXX_HAVE_ATAN2F**
- #define **_GLIBCXX_HAVE_ATANF**
- #define **_GLIBCXX_HAVE_ATTRIBUTE_VISIBILITY**
- #define **_GLIBCXX_HAVE_CEILF**
- #define **_GLIBCXX_HAVE_COMPLEX_H**
- #define **_GLIBCXX_HAVE_COSF**
- #define **_GLIBCXX_HAVE_COSHF**
- #define **_GLIBCXX_HAVE_EBADMSG**
- #define **_GLIBCXX_HAVE_ECANCELED**
- #define **_GLIBCXX_HAVE_ECHILD**
- #define **_GLIBCXX_HAVE_EIDRM**
- #define **_GLIBCXX_HAVE_ENODATA**
- #define **_GLIBCXX_HAVE_ENOLINK**
- #define **_GLIBCXX_HAVE_ENOSPC**
- #define **_GLIBCXX_HAVE_ENOSR**
- #define **_GLIBCXX_HAVE_ENOSTR**
- #define **_GLIBCXX_HAVE_ENOTRECOVERABLE**
- #define **_GLIBCXX_HAVE_ENOTSUP**
- #define **_GLIBCXX_HAVE_EOVERFLOW**
- #define **_GLIBCXX_HAVE_EOWNERDEAD**
- #define **_GLIBCXX_HAVE_EPERM**
- #define **_GLIBCXX_HAVE_EPROTO**
- #define **_GLIBCXX_HAVE_ETIME**
- #define **_GLIBCXX_HAVE_ETIMEDOUT**
- #define **_GLIBCXX_HAVE_ETXTBSY**
- #define **_GLIBCXX_HAVE_EWOULDBLOCK**
- #define **_GLIBCXX_HAVE_EXPF**
- #define **_GLIBCXX_HAVE_FABSF**
- #define **_GLIBCXX_HAVE_FCNTL_H**
- #define **_GLIBCXX_HAVE_FENV_H**
- #define **_GLIBCXX_HAVE_FLOAT_H**
- #define **_GLIBCXX_HAVE_FLOORF**
- #define **_GLIBCXX_HAVE_FMODF**
- #define **_GLIBCXX_HAVE_FREXPF**
- #define **_GLIBCXX_HAVE_GETIPINFO**
- #define **_GLIBCXX_HAVE_GETS**

- #define **_GLIBCXX_HAVE_HYPOT**
- #define **_GLIBCXX_HAVE_ICONV**
- #define **_GLIBCXX_HAVE_IEEEFP_H**
- #define **_GLIBCXX_HAVE_INT64_T**
- #define **_GLIBCXX_HAVE_INT64_T_LONG_LONG**
- #define **_GLIBCXX_HAVE_INTTYPES_H**
- #define **_GLIBCXX_HAVE_ISWBLANK**
- #define **_GLIBCXX_HAVE_LC_MESSAGES**
- #define **_GLIBCXX_HAVE_LDEXPF**
- #define **_GLIBCXX_HAVE_LIMIT_AS**
- #define **_GLIBCXX_HAVE_LIMIT_DATA**
- #define **_GLIBCXX_HAVE_LIMIT_FSIZE**
- #define **_GLIBCXX_HAVE_LIMIT_RSS**
- #define **_GLIBCXX_HAVE_LIMIT_VMEM**
- #define **_GLIBCXX_HAVE_LINK**
- #define **_GLIBCXX_HAVE_LOCALE_H**
- #define **_GLIBCXX_HAVE_LOG10F**
- #define **_GLIBCXX_HAVE_LOGF**
- #define **_GLIBCXX_HAVE_MACHINE_ENDIAN_H**
- #define **_GLIBCXX_HAVE_MACHINE_PARAM_H**
- #define **_GLIBCXX_HAVE_MBSTATE_T**
- #define **_GLIBCXX_HAVE_MEMALIGN**
- #define **_GLIBCXX_HAVE_MEMORY_H**
- #define **_GLIBCXX_HAVE_MODFF**
- #define **_GLIBCXX_HAVE_POWF**
- #define **_GLIBCXX_HAVE_READLINK**
- #define **_GLIBCXX_HAVE_S_ISREG**
- #define **_GLIBCXX_HAVE_SINF**
- #define **_GLIBCXX_HAVE_SINHF**
- #define **_GLIBCXX_HAVE_SLEEP**
- #define **_GLIBCXX_HAVE_SQRTF**
- #define **_GLIBCXX_HAVE_STDALIGN_H**
- #define **_GLIBCXX_HAVE_STDBOOL_H**
- #define **_GLIBCXX_HAVE_STDINT_H**
- #define **_GLIBCXX_HAVE_STDLIB_H**
- #define **_GLIBCXX_HAVE_STRERROR_R**
- #define **_GLIBCXX_HAVE_STRING_H**
- #define **_GLIBCXX_HAVE_STRINGS_H**
- #define **_GLIBCXX_HAVE_STRTOF**
- #define **_GLIBCXX_HAVE_SYMLINK**
- #define **_GLIBCXX_HAVE_SYS_PARAM_H**
- #define **_GLIBCXX_HAVE_SYS_RESOURCE_H**
- #define **_GLIBCXX_HAVE_SYS_STAT_H**
- #define **_GLIBCXX_HAVE_SYS_TIME_H**
- #define **_GLIBCXX_HAVE_SYS_TYPES_H**
- #define **_GLIBCXX_HAVE_TANF**
- #define **_GLIBCXX_HAVE_TANHF**
- #define **_GLIBCXX_HAVE_TGMATH_H**
- #define **_GLIBCXX_HAVE_TRUNCATE**
- #define **_GLIBCXX_HAVE_UNISTD_H**
- #define **_GLIBCXX_HAVE_USLEEP**

- #define **_GLIBCXX_HAVE_UTIME_H**
- #define **_GLIBCXX_HAVE_VFWSCANF**
- #define **_GLIBCXX_HAVE_VSWSCANF**
- #define **_GLIBCXX_HAVE_VWSCANF**
- #define **_GLIBCXX_HAVE_WCHAR_H**
- #define **_GLIBCXX_HAVE_WCSTOF**
- #define **_GLIBCXX_HAVE_WCTYPE_H**
- #define **_GLIBCXX_HOSTED**
- #define **_GLIBCXX_INLINE_VERSION**
- #define **_GLIBCXX_MANGLE_SIZE_T**
- #define **_GLIBCXX_NAMESPACE_CXX11**
- #define **_GLIBCXX_NAMESPACE_LDBL**
- #define **_GLIBCXX_NAMESPACE_LDBL_OR_CXX11**
- #define **_GLIBCXX_NODISCARD**
- #define **_GLIBCXX_NOEXCEPT_PARM**
- #define **_GLIBCXX_NOEXCEPT_QUAL**
- #define **_GLIBCXX_PACKAGE__GLIBCXX_VERSION**
- #define **_GLIBCXX_PACKAGE_BUGREPORT**
- #define **_GLIBCXX_PACKAGE_NAME**
- #define **_GLIBCXX_PACKAGE_STRING**
- #define **_GLIBCXX_PACKAGE_TARNAME**
- #define **_GLIBCXX_PACKAGE_URL**
- #define **_GLIBCXX_PSEUDO_VISIBILITY**(V)
- #define **_GLIBCXX_PTRDIFF_T_IS_INT**
- #define **_GLIBCXX_RELEASE**
- #define **_GLIBCXX_SIZE_T_IS_UINT**
- #define **_GLIBCXX_STD_A**
- #define **_GLIBCXX_STD_C**
- #define **_GLIBCXX_STDIO_EOF**
- #define **_GLIBCXX_STDIO_SEEK_CUR**
- #define **_GLIBCXX_STDIO_SEEK_END**
- #define **_GLIBCXX_SYNCHRONIZATION_HAPPENS_AFTER**(A)
- #define **_GLIBCXX_SYNCHRONIZATION_HAPPENS_BEFORE**(A)
- #define **_GLIBCXX_THROW_OR_ABORT**(_EXC)
- #define **_GLIBCXX_TXN_SAFE**
- #define **_GLIBCXX_TXN_SAFE_DYN**
- #define **_GLIBCXX_USE_ALLOCATOR_NEW**
- #define **_GLIBCXX_USE_C99_COMPLEX**
- #define **_GLIBCXX_USE_C99_CTYPE_TR1**
- #define **_GLIBCXX_USE_C99_FENV_TR1**
- #define **_GLIBCXX_USE_C99_INTTYPES_TR1**
- #define **_GLIBCXX_USE_C99_INTTYPES_WCHAR_T_TR1**
- #define **_GLIBCXX_USE_C99_MATH**
- #define **_GLIBCXX_USE_C99_MATH_TR1**
- #define **_GLIBCXX_USE_C99_STDINT_TR1**
- #define **_GLIBCXX_USE_C99_STDIO**
- #define **_GLIBCXX_USE_C99_STDLIB**
- #define **_GLIBCXX_USE_C99_WCHAR**
- #define **_GLIBCXX_USE_CXX11_ABI**
- #define **_GLIBCXX_USE_DEPRECATED**
- #define **_GLIBCXX_USE_DUAL_ABI**

- #define **_GLIBCXX_USE_FCHMOD**
- #define **_GLIBCXX_USE_FCHMODAT**
- #define **_GLIBCXX_USE_GETTIMEOFDAY**
- #define **_GLIBCXX_USE_LONG_LONG**
- #define **_GLIBCXX_USE_SC_NPROCESSORS_ONLN**
- #define **_GLIBCXX_USE_ST_MTIM**
- #define **_GLIBCXX_USE_TMPNAM**
- #define **_GLIBCXX_USE_WCHAR_T**
- #define **_GLIBCXX_USE_WEAK_REF**
- #define **_GLIBCXX_VERBOSE**
- #define **_GLIBCXX_VISIBILITY**(V)
- #define **_GLIBCXX_WEAK_DEFINITION**
- #define **_GTHREAD_USE_MUTEX_TIMEDLOCK**
- #define **LT_OBJDIR**
- #define **STDC_HEADERS**

Typedefs

- typedef __PTRDIFF_TYPE__ **std::ptrdiff_t**
- typedef __SIZE_TYPE__ **std::size_t**

Variables

- decltype(nullptr) typedef **std::nullptr_t**

5.52.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <version>.

Definition in file c++config.h.

5.53 c++io.h File Reference

Namespaces

- std

Typedefs

- typedef FILE **std::__c_file**
- typedef __gthread_mutex_t **std::__c_lock**

5.53.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ios>.

Definition in file c++io.h.

5.54 c++locale.h File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_NUM_CATEGORIES**

Typedefs

- typedef int * **std::__c_locale**

Functions

- int **std::__convert_from_v** (const __c_locale &, char *__out, const int __size, const char *__fmt,...)

5.54.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file c++locale.h.

5.55 cassert File Reference

5.55.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `assert.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cassert.

5.56 cast.h File Reference

Classes

- struct __gnu_cxx::_Caster< _ToType >

Namespaces

- __gnu_cxx

Functions

- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__const_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__const_pointer_cast** (_FromType *__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__dynamic_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__dynamic_pointer_cast** (_FromType *__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__reinterpret_pointer_cast** (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType **__gnu_cxx::__reinterpret_pointer_cast** (_FromType *__arg)
- template<typename _ToType , typename _FromType >
  _ToType __gnu_cxx::__static_pointer_cast (const _FromType &__arg)
- template<typename _ToType , typename _FromType >
  _ToType __gnu_cxx::__static_pointer_cast (_FromType *__arg)

5.56.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/pointer.h>.

Definition in file cast.h.

5.57 cc_hash_max_collision_check_resize_trigger_imp.hpp File Reference

5.57.1 Detailed Description

Contains a resize trigger implementation.

Definition in file cc_hash_max_collision_check_resize_trigger_imp.hpp.

5.58 cc_ht_map_.hpp File Reference

Classes

- class __gnu_pbds::detail::cc_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Hash_Fn, Resize_Policy >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CC_HASH_NAME**
- #define **PB_DS_CC_HASH_TRAITS_BASE**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

- #define **PB_DS_GEN_POS**
- #define **PB_DS_HASH_EQ_FN_C_DEC**
- #define **PB_DS_RANGED_HASH_FN_C_DEC**

5.58.1 Detailed Description

Contains an implementation class for cc_ht_map_.

Definition in file cc_ht_map_.hpp.

5.59 ccomplex File Reference

Macros

- #define **_GLIBCXX_CCOMPLEX**

5.59.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ccomplex.

5.60 ccomplex File Reference

Macros

- #define **_GLIBCXX_TR1_CCOMPLEX**

5.60.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/ccomplex.

5.61 cctype File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CCTYPE**

5.61.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `ctype.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cctype.

5.62 cctype File Reference

Macros

- #define **_GLIBCXX_TR1_CCTYPE**

5.62.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cctype.

5.63 cerrno File Reference

Macros

- #define **_GLIBCXX_CERRNO**
- #define **errno**

5.63.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `errno.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cerrno.

5.64 cfenv File Reference

Macros

- #define **_GLIBCXX_CFENV**

5.64.1 Detailed Description

This is a Standard C++ Library header.

Definition in file cfenv.

5.65 cfenv File Reference

Macros

- #define **_GLIBCXX_TR1_CFENV**

5.65.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cfenv.

5.66 cfloat File Reference

Macros

- #define **_GLIBCXX_CFLOAT**
- #define **DECIMAL_DIG**
- #define **FLT_EVAL_METHOD**

5.66.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `float.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cfloat.

5.67 cfloat File Reference

Macros

- #define **_GLIBCXX_TR1_CFLOAT**

5.67.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cfloat.

5.68 char_traits.h File Reference

Classes

- struct __gnu_cxx::_Char_types< _CharT >
- struct std::char_traits< _CharT >
- struct __gnu_cxx::char_traits< _CharT >
- struct std::char_traits< char >
- struct std::char_traits< wchar_t >

Namespaces

- __gnu_cxx
- std

Macros

- #define **_GLIBCXX_ALWAYS_INLINE**

5.68.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <string>.

Definition in file char_traits.h.

5.69 charconv File Reference

Classes

- struct std::from_chars_result
- struct std::to_chars_result

Namespaces

- std
- std::__detail

Macros

- #define **_GLIBCXX_CHARCONV**
- #define **_GLIBCXX_TO_CHARS**(T)

Typedefs

- template<typename _Tp >
  using **std::__detail::__integer_from_chars_result_type** = enable_if_t< __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >, is_same< char, remove_cv_t< _Tp >>>::value, from_chars_result >
- template<typename _Tp >
  using **std::__detail::__integer_to_chars_result_type** = enable_if_t< __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >, is_same< char, remove_cv_t< _Tp >>>::value, to_chars_result >
- template<typename _Tp >
  using **std::__detail::__unsigned_least_t** = typename __to_chars_unsigned_type< _Tp >::type

Enumerations

- enum std::chars_format { **scientific**, **fixed**, **hex**, **general** }

Functions

- template<typename _Tp >
  bool std::__detail::__from_chars_alnum (const char *&__first, const char *__last, _Tp &__val, int __base)
- constexpr unsigned char **std::__detail::__from_chars_alpha_to_num** (char __c)
- template<typename _Tp >
  bool std::__detail::__from_chars_binary (const char *&__first, const char *__last, _Tp &__val)

- template<typename _Tp >
  bool std::__detail::__from_chars_digit (const char *&__first, const char *__last, _Tp &__val, int __base)
- template<typename _Tp >
  bool **std::__detail::__raise_and_add** (_Tp &__val, int __base, unsigned char __c)
- template<typename _Tp >
  to_chars_result **std::__detail::__to_chars** (char *__first, char *__last, _Tp __val, int __base) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **std::__detail::__to_chars_10** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **std::__detail::__to_chars_16** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **std::__detail::__to_chars_2** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __integer_to_chars_result_type
  < _Tp > **std::__detail::__to_chars_8** (char *__first, char *__last, _Tp __val) noexcept
- template<typename _Tp >
  __detail::__integer_to_chars_result_type
  < _Tp > **std::__to_chars_i** (char *__first, char *__last, _Tp __value, int __base=10)
- template<typename _Tp >
  constexpr unsigned **std::__detail::__to_chars_len** (_Tp __value, int __base) noexcept
- template<typename _Tp >
  constexpr unsigned **std::__detail::__to_chars_len_2** (_Tp __value) noexcept
- template<typename _Tp >
  __detail::__integer_from_chars_result_type
  < _Tp > std::from_chars (const char *__first, const char *__last, _Tp &__value, int __base=10)
- constexpr chars_format **std::operator&** (chars_format __lhs, chars_format __rhs) noexcept
- constexpr chars_format & **std::operator&=** (chars_format &__lhs, chars_format __rhs) noexcept
- constexpr chars_format **std::operator^** (chars_format __lhs, chars_format __rhs) noexcept
- constexpr chars_format & **std::operator^=** (chars_format &__lhs, chars_format __rhs) noexcept
- constexpr chars_format **std::operator|** (chars_format __lhs, chars_format __rhs) noexcept
- constexpr chars_format & **std::operator|=** (chars_format &__lhs, chars_format __rhs) noexcept
- constexpr chars_format **std::operator~** (chars_format __fmt) noexcept
- to_chars_result **std::to_chars** (char *__first, char *__last, char __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, signed char __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, unsigned char __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, signed short __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, unsigned short __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, signed int __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, unsigned int __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, signed long __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, unsigned long __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, signed long long __value, int __base=10)
- to_chars_result **std::to_chars** (char *__first, char *__last, unsigned long long __value, int __base=10)
- to_chars_result **std::to_chars** (char *, char *, bool, int=10)=delete

5.69.1 Detailed Description

This is a Standard C++ Library header.

Definition in file charconv.

5.70 charconv.h File Reference

Namespaces

- std
- std::__detail

Functions

- template<typename _Tp >
  void **std::__detail::__to_chars_10_impl** (char *__first, unsigned __len, _Tp __val) noexcept
- template<typename _Tp >
  constexpr unsigned **std::__detail::__to_chars_len** (_Tp __value, int __base) noexcept

5.70.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <charconv>.

Definition in file charconv.h.

5.71 checkers.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter , typename _Compare >
  bool __gnu_parallel::__is_sorted (_IIter __begin, _IIter __end, _Compare __comp)

5.71.1 Detailed Description

Routines for checking the correctness of algorithm results. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file checkers.h.

5.72 chrono File Reference

Classes

- struct std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > >
- struct std::common_type< chrono::time_point< _Clock, _Duration1 >, chrono::time_point< _Clock, _Duration2 > >
- struct std::chrono::duration< _Rep, _Period >
- struct std::chrono::duration< _Rep, _Period >
- struct std::chrono::duration_values< _Rep >
- struct std::chrono::_V2::steady_clock

- struct std::chrono::_V2::system_clock
- struct std::chrono::time_point< _Clock, _Dur >
- struct std::chrono::time_point< _Clock, _Dur >
- struct std::chrono::treat_as_floating_point< _Rep >

Namespaces

- std
- std::chrono
- std::literals::chrono_literals

Macros

- #define **__cpp_lib_chrono_udls**
- #define **_GLIBCXX_CHRONO**
- #define **_GLIBCXX_CHRONO_INT64_T**

Typedefs

- using std::chrono::_V2::high_resolution_clock = system_clock
- using std::chrono::hours = duration< int64_t, ratio< 3600 >>
- using std::chrono::microseconds = duration< int64_t, micro >
- using std::chrono::milliseconds = duration< int64_t, milli >
- using std::chrono::minutes = duration< int64_t, ratio< 60 >>
- using std::chrono::nanoseconds = duration< int64_t, nano >
- using std::chrono::seconds = duration< int64_t >

Functions

- template<typename _ToDur , typename _Rep , typename _Period >
  constexpr
  __enable_if_is_duration
  < _ToDur > std::chrono::duration_cast (const duration< _Rep, _Period > &__d)
- constexpr chrono::duration
  < long double, ratio< 3600, 1 > > std::literals::chrono_literals::operator""h (long double __hours)
- template<char... _Digits>
  constexpr chrono::hours std::literals::chrono_literals::operator""h ()
- constexpr chrono::duration
  < long double, ratio< 60, 1 > > std::literals::chrono_literals::operator""min (long double __mins)
- template<char... _Digits>
  constexpr chrono::minutes std::literals::chrono_literals::operator""min ()
- constexpr chrono::duration
  < long double, milli > std::literals::chrono_literals::operator""ms (long double __msecs)
- template<char... _Digits>
  constexpr chrono::milliseconds std::literals::chrono_literals::operator""ms ()
- constexpr chrono::duration
  < long double, nano > std::literals::chrono_literals::operator""ns (long double __nsecs)
- template<char... _Digits>
  constexpr chrono::nanoseconds std::literals::chrono_literals::operator""ns ()

- constexpr chrono::duration
  < long double > std::literals::chrono_literals::operator""s (long double __secs)
- template<char... _Digits>
  constexpr chrono::seconds std::literals::chrono_literals::operator""s ()
- constexpr chrono::duration
  < long double, micro > std::literals::chrono_literals::operator""us (long double __usecs)
- template<char... _Digits>
  constexpr chrono::microseconds std::literals::chrono_literals::operator""us ()
- template<typename _ToDur , typename _Clock , typename _Dur >
  constexpr enable_if
  < __is_duration< _ToDur >
  ::value, time_point< _Clock,
  _ToDur > >::type std::chrono::time_point_cast (const time_point< _Clock, _Dur > &__t)

5.72.1 Detailed Description

This is a Standard C++ Library header.

Definition in file chrono.

5.73 chrono File Reference

Namespaces

- std
- std::chrono

Macros

- #define **_GLIBCXX_EXPERIMENTAL_CHRONO**

Variables

- template<typename _Rep >
  constexpr bool **std::chrono::experimental::fundamentals_v1::treat_as_floating_point_v**

5.73.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/chrono.

5.74 cinttypes File Reference

Macros

- #define **_GLIBCXX_CINTTYPES**

5.74.1 Detailed Description

This is a Standard C++ Library header.

Definition in file cinttypes.

5.75 cinttypes File Reference

Macros

- #define **_GLIBCXX_TR1_CINTTYPES**

5.75.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cinttypes.

5.76 ciso646 File Reference

5.76.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `iso646.h`, which is empty in C++.

Definition in file ciso646.

5.77 climits File Reference

Macros

- #define **_GLIBCXX_CLIMITS**
- #define **LLONG_MAX**
- #define **LLONG_MIN**
- #define **ULLONG_MAX**

5.77.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `limits.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file climits.

5.78 climits File Reference

Macros

- #define **_GLIBCXX_TR1_CLIMITS**

5.78.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/climits.

5.79 clocale File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CLOCALE**

5.79.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `locale.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file clocale.

5.80 cmath File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CMATH**
- #define **_GLIBCXX_INCLUDE_NEXT_C_HEADERS**

Functions

- constexpr float **std::acos** (float __x)
- constexpr long double **std::acos** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::acos** (_Tp __x)

- constexpr float **std::asin** (float __x)
- constexpr long double **std::asin** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::asin** (_Tp __x)
- constexpr float **std::atan** (float __x)
- constexpr long double **std::atan** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::atan** (_Tp __x)
- constexpr float **std::atan2** (float __y, float __x)
- constexpr long double **std::atan2** (long double __y, long double __x)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **std::atan2** (_Tp __y, _Up __x)
- constexpr float **std::ceil** (float __x)
- constexpr long double **std::ceil** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::ceil** (_Tp __x)
- constexpr float **std::cos** (float __x)
- constexpr long double **std::cos** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::cos** (_Tp __x)
- constexpr float **std::cosh** (float __x)
- constexpr long double **std::cosh** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::cosh** (_Tp __x)
- constexpr float **std::exp** (float __x)
- constexpr long double **std::exp** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::exp** (_Tp __x)
- constexpr float **std::fabs** (float __x)
- constexpr long double **std::fabs** (long double __x)

- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::fabs** (_Tp __x)
- constexpr float **std::floor** (float __x)
- constexpr long double **std::floor** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::floor** (_Tp __x)
- constexpr float **std::fmod** (float __x, float __y)
- constexpr long double **std::fmod** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **std::fmod** (_Tp __x, _Up __y)
- float **std::frexp** (float __x, int *__exp)
- long double **std::frexp** (long double __x, int *__exp)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::frexp** (_Tp __x, int *__exp)
- constexpr float **std::ldexp** (float __x, int __exp)
- constexpr long double **std::ldexp** (long double __x, int __exp)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::ldexp** (_Tp __x, int __exp)
- constexpr float **std::log** (float __x)
- constexpr long double **std::log** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::log** (_Tp __x)
- constexpr float **std::log10** (float __x)
- constexpr long double **std::log10** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::log10** (_Tp __x)
- float **std::modf** (float __x, float *__iptr)
- long double **std::modf** (long double __x, long double *__iptr)
- constexpr float **std::pow** (float __x, float __y)
- constexpr long double **std::pow** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  constexpr
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **std::pow** (_Tp __x, _Up __y)

- constexpr float **std::sin** (float __x)
- constexpr long double **std::sin** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::sin** (_Tp __x)
- constexpr float **std::sinh** (float __x)
- constexpr long double **std::sinh** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::sinh** (_Tp __x)
- constexpr float **std::sqrt** (float __x)
- constexpr long double **std::sqrt** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::sqrt** (_Tp __x)
- constexpr float **std::tan** (float __x)
- constexpr long double **std::tan** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::tan** (_Tp __x)
- constexpr float **std::tanh** (float __x)
- constexpr long double **std::tanh** (long double __x)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_integer< _Tp >::__value,
  double >::__type **std::tanh** (_Tp __x)

5.80.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `math.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cmath.

5.81 cmath File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_CMATH**

5.81.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file ext/cmath.

5.82 cmath File Reference

Namespaces

- std
- std::tr1

Macros

- #define **_GLIBCXX_TR1_CMATH**

Functions

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float **std::tr1::assoc_laguerref** (unsigned int __n, unsigned int __m, float __x)
- long double **std::tr1::assoc_laguerrel** (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float **std::tr1::assoc_legendref** (unsigned int __l, unsigned int __m, float __x)
- long double **std::tr1::assoc_legendrel** (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Tpx , typename _Tpy >
  __gnu_cxx::__promote_2< _Tpx,
  _Tpy >::__type std::tr1::beta (_Tpx __x, _Tpy __y)
- float **std::tr1::betaf** (float __x, float __y)
- long double **std::tr1::betal** (long double __x, long double __y)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::comp_ellint_1 (_Tp __k)
- float **std::tr1::comp_ellint_1f** (float __k)
- long double **std::tr1::comp_ellint_1l** (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::comp_ellint_2 (_Tp __k)
- float **std::tr1::comp_ellint_2f** (float __k)
- long double **std::tr1::comp_ellint_2l** (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type std::tr1::comp_ellint_3 (_Tp __k, _Tpn __nu)
- float **std::tr1::comp_ellint_3f** (float __k, float __nu)
- long double **std::tr1::comp_ellint_3l** (long double __k, long double __nu)

- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type std::tr1::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float **std::tr1::conf_hypergf** (float __a, float __c, float __x)
- long double **std::tr1::conf_hypergl** (long double __a, long double __c, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_if** (float __nu, float __x)
- long double **std::tr1::cyl_bessel_il** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_jf** (float __nu, float __x)
- long double **std::tr1::cyl_bessel_jl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_bessel_kf** (float __nu, float __x)
- long double **std::tr1::cyl_bessel_kl** (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::tr1::cyl_neumann (_Tpnu __nu, _Tp __x)
- float **std::tr1::cyl_neumannf** (float __nu, float __x)
- long double **std::tr1::cyl_neumannl** (long double __nu, long double __x)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::tr1::ellint_1 (_Tp __k, _Tpp __phi)
- float **std::tr1::ellint_1f** (float __k, float __phi)
- long double **std::tr1::ellint_1l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::tr1::ellint_2 (_Tp __k, _Tpp __phi)
- float **std::tr1::ellint_2f** (float __k, float __phi)
- long double **std::tr1::ellint_2l** (long double __k, long double __phi)
- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type std::tr1::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float **std::tr1::ellint_3f** (float __k, float __nu, float __phi)
- long double **std::tr1::ellint_3l** (long double __k, long double __nu, long double __phi)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::expint (_Tp __x)
- float **std::tr1::expintf** (float __x)
- long double **std::tr1::expintl** (long double __x)
- float **std::tr1::fabs** (float __x)
- long double **std::tr1::fabs** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type **std::tr1::fabs** (_Tp __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::hermite (unsigned int __n, _Tp __x)
- float **std::tr1::hermitef** (unsigned int __n, float __x)
- long double **std::tr1::hermitel** (unsigned int __n, long double __x)

- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type std::tr1::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float **std::tr1::hypergf** (float __a, float __b, float __c, float __x)
- long double **std::tr1::hypergl** (long double __a, long double __b, long double __c, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::laguerre (unsigned int __n, _Tp __x)
- float **std::tr1::laguerref** (unsigned int __n, float __x)
- long double **std::tr1::laguerrel** (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::legendre (unsigned int __n, _Tp __x)
- float **std::tr1::legendref** (unsigned int __n, float __x)
- long double **std::tr1::legendrel** (unsigned int __n, long double __x)
- float **std::tr1::pow** (float __x, float __y)
- long double **std::tr1::pow** (long double __x, long double __y)
- template<typename _Tp , typename _Up >
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type **std::tr1::pow** (_Tp __x, _Up __y)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::riemann_zeta (_Tp __x)
- float **std::tr1::riemann_zetaf** (float __x)
- long double **std::tr1::riemann_zetal** (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_bessel (unsigned int __n, _Tp __x)
- float **std::tr1::sph_besself** (unsigned int __n, float __x)
- long double **std::tr1::sph_bessell** (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float **std::tr1::sph_legendref** (unsigned int __l, unsigned int __m, float __theta)
- long double **std::tr1::sph_legendrel** (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::tr1::sph_neumann (unsigned int __n, _Tp __x)
- float **std::tr1::sph_neumannf** (unsigned int __n, float __x)
- long double **std::tr1::sph_neumannl** (unsigned int __n, long double __x)

5.82.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cmath.

5.83 cmp_fn_imps.hpp File Reference

5.83.1 Detailed Description

Contains implementations of cc_ht_map_'s entire container comparison related functions.

Definition in file cmp_fn_imps.hpp.

5.84 codecvt File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CODECVT**
- #define **_GLIBCXX_CODECVT_SPECIALIZATION**(_NAME, _ELEM)
- #define **_GLIBCXX_CODECVT_SPECIALIZATION2**(_NAME, _ELEM)

Enumerations

- enum **codecvt_mode** { **consume_header**, **generate_header**, **little_endian** }

5.84.1 Detailed Description

This is a Standard C++ Library header.

Definition in file codecvt.

5.85 codecvt.h File Reference

Classes

- class std::__codecvt_abstract_base< _InternT, _ExternT, _StateT >
- class std::codecvt< _InternT, _ExternT, _StateT >
- class std::codecvt< char, char, mbstate_t >
- class std::codecvt< char16_t, char, mbstate_t >
- class std::codecvt< char32_t, char, mbstate_t >
- class std::codecvt< wchar_t, char, mbstate_t >
- class std::codecvt_base
- class std::codecvt_byname< _InternT, _ExternT, _StateT >

Namespaces

- std

5.85.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file codecvt.h.

5.86 codecvt_specializations.h File Reference

Classes

- class std::codecvt< _InternT, _ExternT, encoding_state >
- struct __gnu_cxx::encoding_char_traits< _CharT >
- class __gnu_cxx::encoding_state

Namespaces

- __gnu_cxx
- std

Functions

- template<typename _Tp >
  size_t **std::__iconv_adaptor** (size_t(*__func)(iconv_t, _Tp, size_t *, char **, size_t *), iconv_t __cd, char **__inbuf, size_t *__inbytes, char **__outbuf, size_t *__outbytes)

5.86.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file codecvt_specializations.h.

5.87 compare File Reference

5.87.1 Detailed Description

This is a Standard C++ Library header.

Definition in file compare.

5.88 compatibility.h File Reference

5.88.1 Detailed Description

This is an internal header file, included by other library sources. You should not attempt to use it directly.

Definition in file arm-none-eabi/bits/compatibility.h.

5.89 compatibility.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _Tp >
  _Tp **__gnu_parallel::__add_omp** (volatile _Tp *__ptr, _Tp __addend)
- template<typename _Tp >
  bool **__gnu_parallel::__cas_omp** (volatile _Tp *__ptr, _Tp __comparand, _Tp __replacement)
- template<typename _Tp >
  bool __gnu_parallel::__compare_and_swap (volatile _Tp *__ptr, _Tp __comparand, _Tp __replacement)
- template<typename _Tp >
  _Tp __gnu_parallel::__fetch_and_add (volatile _Tp *__ptr, _Tp __addend)
- void __gnu_parallel::__yield ()

5.89.1 Detailed Description

Compatibility layer, mostly concerned with atomic operations. This file is a GNU parallel extension to the Standard C++ Library and contains implementation details for the library's internal use.

Definition in file parallel/compatibility.h.

5.90 compiletime_settings.h File Reference

Macros

- #define _GLIBCXX_CALL(__n)
- #define _GLIBCXX_PARALLEL_ASSERTIONS
- #define _GLIBCXX_RANDOM_SHUFFLE_CONSIDER_L1
- #define _GLIBCXX_RANDOM_SHUFFLE_CONSIDER_TLB
- #define _GLIBCXX_SCALE_DOWN_FPU
- #define _GLIBCXX_VERBOSE_LEVEL

5.90.1 Detailed Description

Defines on options concerning debugging and performance, at compile-time. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file compiletime_settings.h.

5.90.2 Macro Definition Documentation

5.90.2.1 #define _GLIBCXX_CALL(__n)

Macro to produce log message when entering a function.

Parameters

__n	Input size.

See Also

_GLIBCXX_VERBOSE_LEVEL

Definition at line 44 of file compiletime_settings.h.

Referenced by __gnu_parallel::__find_template(), __gnu_parallel::__for_each_template_random_access_workstealing(), __gnu_parallel::__merge_advance(), __gnu_parallel::__parallel_nth_element(), __gnu_parallel::__parallel_partial_sum(), __gnu_parallel::__parallel_partition(), __gnu_parallel::__parallel_random_shuffle_drs(), __gnu_parallel::__parallel_sort(), __gnu_parallel::__parallel_sort_qs(), __gnu_parallel::__parallel_sort_qsb(), __gnu_parallel::__parallel_unique_copy(), __gnu_parallel::__search_template(), __gnu_parallel::__sequential_multiway_merge(), __gnu_parallel::multiseq_partition(), __gnu_parallel::multiseq_selection(), __gnu_parallel::multiway_merge(), __gnu_parallel::multiway_merge_3_variant(), __gnu_parallel::multiway_merge_4_variant(), __gnu_parallel::multiway_merge_loser_tree(), __gnu_parallel::multiway_merge_loser_tree_sentinel(), __gnu_parallel::multiway_merge_loser_tree_unguarded(), __gnu_parallel::multiway_merge_sentinels(), __gnu_parallel::parallel_multiway_merge(), and __gnu_parallel::parallel_sort_mwms().

5.90.2.2 #define _GLIBCXX_PARALLEL_ASSERTIONS

Switch on many _GLIBCXX_PARALLEL_ASSERTions in parallel code. Should be switched on only locally.

Definition at line 61 of file compiletime_settings.h.

Referenced by __gnu_parallel::__qsb_local_sort_with_helping().

5.90.2.3 #define _GLIBCXX_RANDOM_SHUFFLE_CONSIDER_L1

Switch on many _GLIBCXX_PARALLEL_ASSERTions in parallel code. Consider the size of the L1 cache for gnu_parallel::__parallel_random_shuffle().

Definition at line 68 of file compiletime_settings.h.

5.90.2.4 #define _GLIBCXX_RANDOM_SHUFFLE_CONSIDER_TLB

Switch on many _GLIBCXX_PARALLEL_ASSERTions in parallel code. Consider the size of the TLB for gnu_parallel::__parallel_random_shuffle().

Definition at line 74 of file compiletime_settings.h.

5.90.2.5 #define _GLIBCXX_SCALE_DOWN_FPU

Use floating-point scaling instead of modulo for mapping random numbers to a range. This can be faster on certain CPUs.

Definition at line 55 of file compiletime_settings.h.

5.90.2.6 #define _GLIBCXX_VERBOSE_LEVEL

Determine verbosity level of the parallel mode. Level 1 prints a message each time a parallel-mode function is entered.

Definition at line 37 of file compiletime_settings.h.

5.91 complex File Reference

Classes

- struct std::complex< _Tp >
- struct std::complex< _Tp >
- struct std::complex< double >

- struct std::complex< float >
- struct std::complex< long double >

Namespaces

- __gnu_cxx
- std

Macros

- #define **__cpp_lib_complex_udls**
- #define **_GLIBCXX_COMPLEX**

Functions

- template<typename _Tp >
  _Tp **std::__complex_abs** (const complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_acos** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_acosh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  _Tp **std::__complex_arg** (const complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_asin** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_asinh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_atan** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_atanh** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_cos** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_cosh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_exp** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_log** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_pow** (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  complex< _Tp > **std::__complex_pow_unsigned** (complex< _Tp > __x, unsigned __n)
- template<typename _Tp >
  std::complex< _Tp > **std::__complex_proj** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sin** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sinh** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_sqrt** (const complex< _Tp > &__z)

- template<typename _Tp >
  complex< _Tp > **std::__complex_tan** (const complex< _Tp > &__z)
- template<typename _Tp >
  complex< _Tp > **std::__complex_tanh** (const complex< _Tp > &__z)
- template<typename _Tp >
  _Tp std::abs (const complex< _Tp > &)
- template<typename _Tp >
  std::complex< _Tp > std::acos (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > std::acosh (const std::complex< _Tp > &__z)
- template<typename _Tp >
  _Tp std::arg (const complex< _Tp > &)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::arg (_Tp __x)
- template<typename _Tp >
  std::complex< _Tp > std::asin (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > std::asinh (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > std::atan (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< _Tp > std::atanh (const std::complex< _Tp > &__z)
- template<typename _Tp >
  constexpr complex< _Tp > std::conj (const complex< _Tp > &)
- template<typename _Tp >
  constexpr std::complex
  < typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **std::conj** (_Tp __x)
- template<typename _Tp >
  complex< _Tp > std::cos (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::cosh (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::exp (const complex< _Tp > &)
- template<typename _Tp >
  _Tp std::fabs (const std::complex< _Tp > &__z)
- template<typename _Tp >
  constexpr _Tp **std::imag** (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote
  < _Tp >::__type **std::imag** (_Tp)
- template<typename _Tp >
  complex< _Tp > std::log (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::log10 (const complex< _Tp > &)
- template<typename _Tp >
  _Tp constexpr std::norm (const complex< _Tp > &)
- template<typename _Tp >
  constexpr _Tp std::norm (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote
  < _Tp >::__type **std::norm** (_Tp __x)

- constexpr std::complex< double > **std::literals::complex_literals::operator""i** (long double __num)
- constexpr std::complex< double > **std::literals::complex_literals::operator""i** (unsigned long long __num)
- constexpr std::complex< float > **std::literals::complex_literals::operator""if** (long double __num)
- constexpr std::complex< float > **std::literals::complex_literals::operator""if** (unsigned long long __num)
- constexpr std::complex< long double > **std::literals::complex_literals::operator""il** (long double __num)
- constexpr std::complex< long double > **std::literals::complex_literals::operator""il** (unsigned long long __num)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x)
- template<typename _Tp , typename _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__os, const complex< _Tp > &__x)
- template<typename _Tp , typename _CharT , class _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, complex< _Tp > &__x)
- template<typename _Tp >
  complex< _Tp > std::polar (const _Tp &, const _Tp &=0)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, int)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, const _Tp &)
- template<typename _Tp >
  complex< _Tp > std::pow (const complex< _Tp > &, const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::pow (const _Tp &, const complex< _Tp > &)
- template<typename _Tp , typename _Up >
  std::complex< typename __gnu_cxx::__promote_2< _Tp, _Up >::__type > **std::pow** (const std::complex< _Tp > &__x, const _Up &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename __gnu_cxx::__promote_2< _Tp, _Up >::__type > **std::pow** (const _Tp &__x, const std::complex< _Up > &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename __gnu_cxx::__promote_2< _Tp, _Up >::__type > **std::pow** (const std::complex< _Tp > &__x, const std::complex< _Up > &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::proj** (const std::complex< _Tp > &)
- template<typename _Tp >
  std::complex< typename __gnu_cxx::__promote< _Tp > ::__type > **std::proj** (_Tp __x)
- template<typename _Tp >
  constexpr _Tp **std::real** (const complex< _Tp > &__z)
- template<typename _Tp >
  constexpr __gnu_cxx::__promote < _Tp >::__type **std::real** (_Tp __x)
- template<typename _Tp >
  complex< _Tp > std::sin (const complex< _Tp > &)

- template<typename _Tp >
  complex< _Tp > std::sinh (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::sqrt (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::tan (const complex< _Tp > &)
- template<typename _Tp >
  complex< _Tp > std::tanh (const complex< _Tp > &)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator+ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator- (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator* (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr complex< _Tp > std::operator/ (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool std::operator== (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool std::operator== (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool std::operator== (const _Tp &__x, const complex< _Tp > &__y)

- template<typename _Tp >
  constexpr bool std::operator!= (const complex< _Tp > &__x, const complex< _Tp > &__y)
- template<typename _Tp >
  constexpr bool std::operator!= (const complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  constexpr bool std::operator!= (const _Tp &__x, const complex< _Tp > &__y)

5.91.1 Detailed Description

This is a Standard C++ Library header.

Definition in file complex.

5.92 complex File Reference

Namespaces

- std
- std::tr1

Macros

- #define **_GLIBCXX_TR1_COMPLEX**

Functions

- template<typename _Tp >
  std::complex< _Tp > **std::tr1::conj** (const std::complex< _Tp > &__z)
- template<typename _Tp >
  std::complex< typename
  __gnu_cxx::__promote< _Tp >
  ::__type > **std::tr1::conj** (_Tp __x)
- template<typename _Tp >
  std::complex< _Tp > std::tr1::fabs (const std::complex< _Tp > &__z)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::polar** (const _Tp &__rho, const _Up &__theta)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > std::tr1::pow (const std::complex< _Tp > &__x, const _Up &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::pow** (const _Tp &__x, const std::complex< _Up > &__y)
- template<typename _Tp , typename _Up >
  std::complex< typename
  __gnu_cxx::__promote_2< _Tp,
  _Up >::__type > **std::tr1::pow** (const std::complex< _Tp > &__x, const std::complex< _Up > &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const std::complex< _Tp > &__x, const _Tp &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const _Tp &__x, const std::complex< _Tp > &__y)
- template<typename _Tp >
  std::complex< _Tp > **std::tr1::pow** (const std::complex< _Tp > &__x, const std::complex< _Tp > &__y)

5.92.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/complex.

5.93 complex.h File Reference

Macros

- #define **_GLIBCXX_COMPLEX_H**

5.93.1 Detailed Description

This is a Standard C++ Library header.

Definition in file complex.h.

5.94 concept_check.h File Reference

Macros

- #define **__glibcxx_class_requires**(_a, _b)
- #define **__glibcxx_class_requires2**(_a, _b, _c)
- #define **__glibcxx_class_requires3**(_a, _b, _c, _d)
- #define **__glibcxx_class_requires4**(_a, _b, _c, _d, _e)
- #define **__glibcxx_function_requires**(...)

5.94.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file concept_check.h.

5.95 concepts File Reference

Macros

- #define **_GLIBCXX_CONCEPTS**

5.95.1 Detailed Description

This is a Standard C++ Library header.

Definition in file concepts.

5.96 concurrence.h File Reference

Classes

- class __gnu_cxx::__scoped_lock

Namespaces

- __gnu_cxx

Enumerations

- enum **_Lock_policy** { **_S_single**, **_S_mutex**, **_S_atomic** }

Functions

- void **__gnu_cxx::__throw_concurrence_lock_error** ()
- void **__gnu_cxx::__throw_concurrence_unlock_error** ()

Variables

- static const _Lock_policy **__gnu_cxx::__default_lock_policy**

5.96.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file concurrence.h.

5.97 cond_dealtor.hpp File Reference

Classes

- class __gnu_pbds::detail::cond_dealtor< Entry, _Alloc >

Namespaces

- __gnu_pbds

5.97.1 Detailed Description

Contains a conditional deallocator.

Definition in file cond_dealtor.hpp.

5.98 cond_key_dtor_entry_dealtor.hpp File Reference

Classes

- class __gnu_pbds::detail::cond_dealtor< Entry, _Alloc >

Namespaces

- __gnu_pbds

5.98.1 Detailed Description

Contains a conditional key destructor, used for exception handling.

Definition in file cond_key_dtor_entry_dealtor.hpp.

5.99 condition_variable File Reference

Classes

- class std::condition_variable
- class std::_V2::condition_variable_any

Namespaces

- std

Macros

- #define **_GLIBCXX_CONDITION_VARIABLE**

Enumerations

- enum std::cv_status { **no_timeout**, **timeout** }

Functions

- void **std::notify_all_at_thread_exit** (condition_variable &, unique_lock< mutex >)

5.99.1 Detailed Description

This is a Standard C++ Library header.

Definition in file condition_variable.

5.100 const_iterator.hpp File Reference

Classes

- class __gnu_pbds::detail::binary_heap_const_iterator_< Value_Type, Entry, Simple, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_BIN_HEAP_CIT_BASE**

5.100.1 Detailed Description

Contains an iterator class returned by the table's const find and insert methods.

Definition in file binary_heap_/const_iterator.hpp.

5.101 const_iterator.hpp File Reference

Classes

- class __gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_< Node, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_BASIC_HEAP_CIT_BASE**
- #define **PB_DS_CLASS_C_DEC**

5.101.1 Detailed Description

Contains an iterator class returned by the table's const find and insert methods.

Definition in file left_child_next_sibling_heap_/const_iterator.hpp.

5.102 const_iterator.hpp File Reference

5.102.1 Detailed Description

Contains an iterator class used for const ranging over the elements of the table.

This file is intended to be included inside a class definition, with PB_DS_CLASS_C_DEC defined to the name of the enclosing class.

Definition in file unordered_iterator/const_iterator.hpp.

5.103 constructor_destructor_fn_imps.hpp File Reference

5.103.1 Detailed Description

Contains implementations of cc_ht_map_'s constructors, destructor, and related functions.

Definition in file cc_hash_table_map_/constructor_destructor_fn_imps.hpp.

5.104 constructor_destructor_fn_imps.hpp File Reference

5.104.1 Detailed Description

Contains implementations of gp_ht_map_'s constructors, destructor, and related functions.

Definition in file gp_hash_table_map_/constructor_destructor_fn_imps.hpp.

5.105 constructor_destructor_fn_imps.hpp File Reference

5.106 constructor_destructor_no_store_hash_fn_imps.hpp File Reference

5.106.1 Detailed Description

Contains implementations of cc_ht_map_'s constructors, destructor, and related functions.

Definition in file cc_hash_table_map_/constructor_destructor_no_store_hash_fn_imps.hpp.

5.107 constructor_destructor_no_store_hash_fn_imps.hpp File Reference

5.107.1 Detailed Description

Contains implementations of gp_ht_map_'s constructors, destructor, and related functions.

Definition in file gp_hash_table_map_/constructor_destructor_no_store_hash_fn_imps.hpp.

5.108 constructor_destructor_store_hash_fn_imps.hpp File Reference

5.108.1 Detailed Description

Contains implementations of cc_ht_map_'s constructors, destructor, and related functions.

Definition in file cc_hash_table_map_/constructor_destructor_store_hash_fn_imps.hpp.

5.109 constructor_destructor_store_hash_fn_imps.hpp File Reference

5.109.1 Detailed Description

Contains implementations of gp_ht_map_'s constructors, destructor, and related functions.

Definition in file gp_hash_table_map_/constructor_destructor_store_hash_fn_imps.hpp.

5.110 constructors_destructor_fn_imps.hpp File Reference

5.110.1 Detailed Description

Contains an implementation class for binary_heap_.

Definition in file binary_heap_/constructors_destructor_fn_imps.hpp.

5.111 constructors_destructor_fn_imps.hpp File Reference

5.111.1 Detailed Description

Contains an implementation for binomial_heap_.

Definition in file binomial_heap_/constructors_destructor_fn_imps.hpp.

5.112 constructors_destructor_fn_imps.hpp File Reference

5.112.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/constructors_destructor_fn_imps.hpp.

5.113 constructors_destructor_fn_imps.hpp File Reference

5.113.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/constructors_destructor_fn_imps.hpp.

5.114 constructors_destructor_fn_imps.hpp File Reference

5.114.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/constructors_destructor_fn_imps.hpp.

5.115 constructors_destructor_fn_imps.hpp File Reference

5.115.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/constructors_destructor_fn_imps.hpp.

5.116 constructors_destructor_fn_imps.hpp File Reference

5.116.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/constructors_destructor_fn_imps.hpp.

5.117 constructors_destructor_fn_imps.hpp File Reference

5.117.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/constructors_destructor_fn_imps.hpp.

5.118 constructors_destructor_fn_imps.hpp File Reference

5.118.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/constructors_destructor_fn_imps.hpp.

5.119 constructors_destructor_fn_imps.hpp File Reference

5.119.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/constructors_destructor_fn_imps.hpp.

5.120 constructors_destructor_fn_imps.hpp File Reference

5.120.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/constructors_destructor_fn_imps.hpp.

5.121 constructors_destructor_fn_imps.hpp File Reference

5.121.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/constructors_destructor_fn_imps.hpp.

5.122 container_base_dispatch.hpp File Reference

Classes

- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, pat_trie_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl >

- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, rb_tree_tag, Policy_Tl >
- struct __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_VALID**(X)
- #define **PB_DS_CHECK_KEY_DOES_NOT_EXIST**(_Key)
- #define **PB_DS_CHECK_KEY_EXISTS**(_Key)
- #define **PB_DS_DATA_FALSE_INDICATOR**
- #define **PB_DS_DATA_TRUE_INDICATOR**
- #define **PB_DS_DEBUG_VERIFY**(_Cond)
- #define **PB_DS_EP2VP**(X)
- #define **PB_DS_EP2VP**(X)
- #define **PB_DS_V2F**(X)
- #define **PB_DS_V2F**(X)
- #define **PB_DS_V2S**(X)
- #define **PB_DS_V2S**(X)

5.122.1 Detailed Description

Contains associative container dispatching.

Definition in file container_base_dispatch.hpp.

5.123 cpp_type_traits.h File Reference

Classes

- struct std::iterator_traits< typename >

Namespaces

- std

Macros

- #define **__INT_N**(TYPE)

Functions

- template<typename _Iterator >
  constexpr _Iterator **std::__miter_base** (_Iterator __it)

5.123.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/type_traits>.

Definition in file cpp_type_traits.h.

5.124 cpu_defines.h File Reference

Macros

- #define **__glibcxx_integral_traps**

5.124.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iosfwd>.

Definition in file cpu_defines.h.

5.125 csetjmp File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSETJMP**
- #define **setjmp**(env)

5.125.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `setjmp.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file csetjmp.

5.126 csignal File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSIGNAL**

5.126.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `signal.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file csignal.

5.127 cstdalign File Reference

Macros

- #define **_GLIBCXX_CSTDALIGN**

5.127.1 Detailed Description

This is a Standard C++ Library header.

Definition in file cstdalign.

5.128 cstdarg File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTDARG**
- #define **va_end**(ap)

5.128.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `stdarg.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cstdarg.

5.129 cstdarg File Reference

Macros

- #define **_GLIBCXX_TR1_CSTDARG**

5.129.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cstdarg.

5.130 cstdbool File Reference

Macros

- #define **_GLIBCXX_CSTDBOOL**

5.130.1 Detailed Description

This is a Standard C++ Library header.

Definition in file cstdbool.

5.131 cstdbool File Reference

Macros

- #define **_GLIBCXX_TR1_CSTDBOOL**

5.131.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cstdbool.

5.132 cstddef File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTDDEF**

5.132.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `stddef.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cstddef.

5.133 cstdint File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTDINT**

5.133.1 Detailed Description

This is a Standard C++ Library header.

Definition in file cstdint.

5.134 cstdint File Reference

Namespaces

- std
- std::tr1

Macros

- #define **_GLIBCXX_TR1_CSTDINT**

5.134.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cstdint.

5.135 cstdio File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTDIO**

5.135.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `stdio.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cstdio.

5.136 cstdio File Reference

Macros

- #define **_GLIBCXX_TR1_CSTDIO**

5.136.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cstdio.

5.137 cstdlib File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTDLIB**
- #define **EXIT_FAILURE**
- #define **EXIT_SUCCESS**

Functions

- void **std::abort** (void) throw ()
- int **std::atexit** (void(*)(void)) throw ()
- void **std::exit** (int) throw ()

5.137.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `stdlib.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cstdlib.

5.138 cstdlib File Reference

Macros

- #define **_GLIBCXX_TR1_CSTDLIB**

5.138.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cstdlib.

5.139 cstring File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CSTRING**

Functions

- void * **std::memchr** (void *__s, int __c, size_t __n)
- char * **std::strchr** (char *__s, int __n)
- char * **std::strpbrk** (char *__s1, const char *__s2)
- char * **std::strrchr** (char *__s, int __n)
- char * **std::strstr** (char *__s1, const char *__s2)

5.139.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `string.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cstring.

5.140 ctgmath File Reference

Macros

- #define **_GLIBCXX_CTGMATH**

5.140.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ctgmath.

5.141 ctgmath File Reference

Macros

- #define **_GLIBCXX_TR1_CTGMATH**

5.141.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/ctgmath.

5.142 ctime File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CTIME**

5.142.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `time.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file ctime.

5.143 ctime File Reference

Macros

- #define **_GLIBCXX_TR1_CTIME**

5.143.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/ctime.

5.144 ctype_inline.h File Reference

Namespaces

- std

5.144.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file ctype_inline.h.

5.145 cuchar File Reference

Macros

- #define **_GLIBCXX_CUCHAR**

5.145.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `uchar.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cuchar.

5.146 cwchar File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CWCHAR**

Functions

- wchar_t * **std::wcschr** (wchar_t *__p, wchar_t __c)
- wchar_t * **std::wcspbrk** (wchar_t *__s1, const wchar_t *__s2)
- wchar_t * **std::wcsrchr** (wchar_t *__p, wchar_t __c)
- wchar_t * **std::wcsstr** (wchar_t *__s1, const wchar_t *__s2)
- wchar_t * **std::wmemchr** (wchar_t *__p, wchar_t __c, size_t __n)

5.146.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the *.h implementation files.

This is the C++ version of the Standard C Library header `wchar.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cwchar.

5.147 cwchar File Reference

Namespaces

- std
- std::tr1

Macros

- #define **_GLIBCXX_TR1_CWCHAR**

5.147.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cwchar.

5.148 cwctype File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CWCTYPE**

5.148.1 Detailed Description

This is a Standard C++ Library file. You should `#include` this file in your programs, rather than any of the `*`.h implementation files.

This is the C++ version of the Standard C Library header `wctype.h`, and its contents are (mostly) the same as that header, but are all contained in the namespace `std` (except for names which are defined as macros in C).

Definition in file cwctype.

5.149 cwctype File Reference

Namespaces

- std
- std::tr1

Macros

- #define **_GLIBCXX_TR1_CWCTYPE**

5.149.1 Detailed Description

This is a TR1 C++ Library header.

Definition in file tr1/cwctype.

5.150 cxxabi.h File Reference

Classes

- class __gnu_cxx::recursive_init_error

Namespaces

- __gnu_cxx
- abi

Typedefs

- typedef __cxa_cdtor_return_type(* **__cxxabiv1::__cxa_cdtor_type**)(void *)

Functions

- __cxa_dependent_exception * **__cxxabiv1::__cxa_allocate_dependent_exception** () noexcept
- int **__cxxabiv1::__cxa_atexit** (void(*)(void *), void *, void *) noexcept
- void **__cxxabiv1::__cxa_bad_cast** ()
- void **__cxxabiv1::__cxa_bad_typeid** ()
- void * **__cxxabiv1::__cxa_begin_catch** (void *) noexcept
- std::type_info * **__cxxabiv1::__cxa_current_exception_type** () noexcept
- void **__cxxabiv1::__cxa_deleted_virtual** (void)
- char * **__cxxabiv1::__cxa_demangle** (const char *__mangled_name, char *__output_buffer, size_t *__length, int *__status)
- void **__cxxabiv1::__cxa_end_catch** ()
- int **__cxxabiv1::__cxa_finalize** (void *)
- void **__cxxabiv1::__cxa_free_dependent_exception** (__cxa_dependent_exception *) noexcept
- void **__cxxabiv1::__cxa_free_exception** (void *) noexcept
- void * **__cxxabiv1::__cxa_get_exception_ptr** (void *) noexcept
- __cxa_eh_globals * **__cxxabiv1::__cxa_get_globals** () noexcept
- __cxa_eh_globals * **__cxxabiv1::__cxa_get_globals_fast** () noexcept
- void **__cxxabiv1::__cxa_guard_abort** (__guard *) noexcept
- int **__cxxabiv1::__cxa_guard_acquire** (__guard *)
- void **__cxxabiv1::__cxa_guard_release** (__guard *) noexcept
- void **__cxxabiv1::__cxa_pure_virtual** (void)
- void **__cxxabiv1::__cxa_rethrow** ()
- int **__cxxabiv1::__cxa_thread_atexit** (void(*)(void *), void *, void *) noexcept
- void **__cxxabiv1::__cxa_throw** (void *, std::type_info *, void(*)(void *))
- void **__cxxabiv1::__cxa_throw_bad_array_new_length** ()
- __cxa_vec_ctor_return_type **__cxxabiv1::__cxa_vec_cctor** (void *__dest_array, void *__src_array, size_t __element_count, size_t __element_size, __cxa_cdtor_return_type(*__constructor)(void *, void *), __cxa_cdtor_type __destructor)
- void **__cxxabiv1::__cxa_vec_cleanup** (void *__array_address, size_t __element_count, size_t __s, __cxa_cdtor_type __destructor) noexcept
- __cxa_vec_ctor_return_type **__cxxabiv1::__cxa_vec_ctor** (void *__array_address, size_t __element_count, size_t __element_size, __cxa_cdtor_type __constructor, __cxa_cdtor_type __destructor)
- void **__cxxabiv1::__cxa_vec_delete** (void *__array_address, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __destructor)

- void **__cxxabiv1::__cxa_vec_delete2** (void *__array_address, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __destructor, void(*__dealloc)(void *))
- void **__cxxabiv1::__cxa_vec_delete3** (void *__array_address, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __destructor, void(*__dealloc)(void *, size_t))
- void **__cxxabiv1::__cxa_vec_dtor** (void *__array_address, size_t __element_count, size_t __element_size, __cxa_cdtor_type __destructor)
- void * **__cxxabiv1::__cxa_vec_new** (size_t __element_count, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __constructor, __cxa_cdtor_type __destructor)
- void * **__cxxabiv1::__cxa_vec_new2** (size_t __element_count, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __constructor, __cxa_cdtor_type __destructor, void *(*__alloc)(size_t), void(*__dealloc)(void *))
- void * **__cxxabiv1::__cxa_vec_new3** (size_t __element_count, size_t __element_size, size_t __padding_size, __cxa_cdtor_type __constructor, __cxa_cdtor_type __destructor, void *(*__alloc)(size_t), void(*__dealloc)(void *, size_t))
- void * **__cxxabiv1::__dynamic_cast** (const void *__src_ptr, const __class_type_info *__src_type, const __class_type_info *__dst_type, ptrdiff_t __src2dst)

5.150.1 Detailed Description

The header provides an interface to the C++ ABI.

Definition in file cxxabi.h.

5.151 cxxabi_forced.h File Reference

Classes

- class __cxxabiv1::__forced_unwind

5.151.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <cxxabi.h>.

Definition in file cxxabi_forced.h.

5.152 cxxabi_init_exception.h File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_CDTOR_CALLABI**
- #define **_GLIBCXX_HAVE_CDTOR_CALLABI**

Functions

- void * **__cxxabiv1::__cxa_allocate_exception** (size_t) noexcept
- void **__cxxabiv1::__cxa_free_exception** (void *) noexcept
- __cxa_refcounted_exception * **__cxxabiv1::__cxa_init_primary_exception** (void *object, std::type_info *tinfo, void(*dest)(void *)) noexcept

5.152.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file cxxabi_init_exception.h.

5.153 cxxabi_tweaks.h File Reference

Macros

- #define **_GLIBCXX_CXA_VEC_CTOR_RETURN**(x)
- #define **_GLIBCXX_GUARD_BIT**
- #define **_GLIBCXX_GUARD_PENDING_BIT**
- #define **_GLIBCXX_GUARD_SET**(x)
- #define **_GLIBCXX_GUARD_TEST**(x)
- #define **_GLIBCXX_GUARD_WAITING_BIT**

Typedefs

- typedef void **__cxxabiv1::__cxa_cdtor_return_type**
- typedef void **__cxxabiv1::__cxa_vec_ctor_return_type**

Variables

- __extension__ typedef int **__cxxabiv1::__guard**

5.153.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <cxxabi.h>.

Definition in file cxxabi_tweaks.h.

5.154 debug.h File Reference

Classes

- class __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >

Namespaces

- __gnu_debug
- std
- std::__debug

Macros

- #define **__glibcxx_requires_can_decrement_range**(_First1, _Last1, _First2)
- #define **__glibcxx_requires_can_increment**(_First, _Size)
- #define **__glibcxx_requires_can_increment_range**(_First1, _Last1, _First2)
- #define **__glibcxx_requires_cond**(_Cond, _Msg)
- #define **__glibcxx_requires_heap**(_First, _Last)
- #define **__glibcxx_requires_heap_pred**(_First, _Last, _Pred)
- #define **__glibcxx_requires_irreflexive**(_First, _Last)
- #define **__glibcxx_requires_irreflexive2**(_First, _Last)
- #define **__glibcxx_requires_irreflexive_pred**(_First, _Last, _Pred)
- #define **__glibcxx_requires_irreflexive_pred2**(_First, _Last, _Pred)
- #define **__glibcxx_requires_partitioned_lower**(_First, _Last, _Value)
- #define **__glibcxx_requires_partitioned_lower_pred**(_First, _Last, _Value, _Pred)
- #define **__glibcxx_requires_partitioned_upper**(_First, _Last, _Value)
- #define **__glibcxx_requires_partitioned_upper_pred**(_First, _Last, _Value, _Pred)
- #define **__glibcxx_requires_sorted**(_First, _Last)
- #define **__glibcxx_requires_sorted_pred**(_First, _Last, _Pred)
- #define **__glibcxx_requires_sorted_set**(_First1, _Last1, _First2)
- #define **__glibcxx_requires_sorted_set_pred**(_First1, _Last1, _First2, _Pred)
- #define **__glibcxx_requires_string**(_String)
- #define **__glibcxx_requires_string_len**(_String, _Len)
- #define **__glibcxx_requires_valid_range**(_First, _Last)

5.154.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug.h.

5.155 debug_allocator.h File Reference

Classes

- class __gnu_cxx::debug_allocator< _Alloc >

Namespaces

- __gnu_cxx

5.155.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file debug_allocator.h.

5.156 debug_fn_imps.hpp File Reference

5.156.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/debug_fn_imps.hpp.

5.157 debug_fn_imps.hpp File Reference

5.157.1 Detailed Description

Contains an implementation for binomial_heap_.

Definition in file binomial_heap_/debug_fn_imps.hpp.

5.158 debug_fn_imps.hpp File Reference

5.158.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/debug_fn_imps.hpp.

5.159 debug_fn_imps.hpp File Reference

5.159.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/debug_fn_imps.hpp.

5.160 debug_fn_imps.hpp File Reference

5.160.1 Detailed Description

Contains implementations of cc_ht_map_'s debug-mode functions.

Definition in file cc_hash_table_map_/debug_fn_imps.hpp.

5.161 debug_fn_imps.hpp File Reference

5.161.1 Detailed Description

Contains implementations of gp_ht_map_'s debug-mode functions.

Definition in file gp_hash_table_map_/debug_fn_imps.hpp.

5.162 debug_fn_imps.hpp File Reference

5.162.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/debug_fn_imps.hpp.

5.163 debug_fn_imps.hpp File Reference

5.163.1 Detailed Description

Contains implementations of cc_ht_map_'s debug-mode functions.

Definition in file list_update_map_/debug_fn_imps.hpp.

5.164 debug_fn_imps.hpp File Reference

5.164.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/debug_fn_imps.hpp.

5.165 debug_fn_imps.hpp File Reference

5.165.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/debug_fn_imps.hpp.

5.166 debug_fn_imps.hpp File Reference

5.166.1 Detailed Description

Contains an implementation class for pat_trie_.

Definition in file pat_trie_/debug_fn_imps.hpp.

5.167 debug_fn_imps.hpp File Reference

5.167.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/debug_fn_imps.hpp.

5.168 debug_fn_imps.hpp File Reference

5.168.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/debug_fn_imps.hpp.

5.169 debug_fn_imps.hpp File Reference

5.169.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/debug_fn_imps.hpp.

5.170 debug_fn_imps.hpp File Reference

5.170.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/debug_fn_imps.hpp.

5.171 debug_map_base.hpp File Reference

5.171.1 Detailed Description

Contains a debug-mode base for all maps.

Definition in file debug_map_base.hpp.

5.172 debug_no_store_hash_fn_imps.hpp File Reference

5.172.1 Detailed Description

Contains implementations of cc_ht_map_'s debug-mode functions.

Definition in file cc_hash_table_map_/debug_no_store_hash_fn_imps.hpp.

5.173 debug_no_store_hash_fn_imps.hpp File Reference

5.173.1 Detailed Description

Contains implementations of gp_ht_map_'s debug-mode functions.

Definition in file gp_hash_table_map_/debug_no_store_hash_fn_imps.hpp.

5.174 debug_store_hash_fn_imps.hpp File Reference

5.174.1 Detailed Description

Contains implementations of cc_ht_map_'s debug-mode functions.

Definition in file cc_hash_table_map_/debug_store_hash_fn_imps.hpp.

5.175 debug_store_hash_fn_imps.hpp File Reference

5.175.1 Detailed Description

Contains implementations of gp_ht_map_'s debug-mode functions.

Definition in file gp_hash_table_map_/debug_store_hash_fn_imps.hpp.

5.176 decimal File Reference

Classes

- class std::decimal::decimal128
- class std::decimal::decimal32
- class std::decimal::decimal64

Namespaces

- std
- std::decimal

Macros

- #define **_DECLARE_DECIMAL128_COMPOUND_ASSIGNMENT**(_Op)
- #define **_DECLARE_DECIMAL32_COMPOUND_ASSIGNMENT**(_Op)
- #define **_DECLARE_DECIMAL64_COMPOUND_ASSIGNMENT**(_Op)
- #define **_DECLARE_DECIMAL_BINARY_OP_WITH_DEC**(_Op, _T1, _T2, _T3)
- #define **_DECLARE_DECIMAL_BINARY_OP_WITH_INT**(_Op, _Tp)
- #define **_DECLARE_DECIMAL_COMPARISON**(_Op, _Tp)
- #define **_GLIBCXX_DECIMAL**
- #define **_GLIBCXX_USE_DECIMAL_**

Functions

- double **std::decimal::decimal128_to_double** (decimal128 __d)
- float **std::decimal::decimal128_to_float** (decimal128 __d)
- long double **std::decimal::decimal128_to_long_double** (decimal128 __d)
- long long **std::decimal::decimal128_to_long_long** (decimal128 __d)
- double **std::decimal::decimal32_to_double** (decimal32 __d)
- float **std::decimal::decimal32_to_float** (decimal32 __d)
- long double **std::decimal::decimal32_to_long_double** (decimal32 __d)
- long long std::decimal::decimal32_to_long_long (decimal32 __d)
- double **std::decimal::decimal64_to_double** (decimal64 __d)
- float **std::decimal::decimal64_to_float** (decimal64 __d)
- long double **std::decimal::decimal64_to_long_double** (decimal64 __d)
- long long **std::decimal::decimal64_to_long_long** (decimal64 __d)
- double **std::decimal::decimal_to_double** (decimal32 __d)
- double **std::decimal::decimal_to_double** (decimal64 __d)
- double **std::decimal::decimal_to_double** (decimal128 __d)
- float **std::decimal::decimal_to_float** (decimal32 __d)

- float **std::decimal::decimal_to_float** (decimal64 __d)
- float **std::decimal::decimal_to_float** (decimal128 __d)
- long double **std::decimal::decimal_to_long_double** (decimal32 __d)
- long double **std::decimal::decimal_to_long_double** (decimal64 __d)
- long double **std::decimal::decimal_to_long_double** (decimal128 __d)
- long long **std::decimal::decimal_to_long_long** (decimal32 __d)
- long long **std::decimal::decimal_to_long_long** (decimal64 __d)
- long long **std::decimal::decimal_to_long_long** (decimal128 __d)
- static decimal128 **std::decimal::make_decimal128** (long long __coeff, int __exp)
- static decimal128 **std::decimal::make_decimal128** (unsigned long long __coeff, int __exp)
- static decimal32 **std::decimal::make_decimal32** (long long __coeff, int __exp)
- static decimal32 **std::decimal::make_decimal32** (unsigned long long __coeff, int __exp)
- static decimal64 **std::decimal::make_decimal64** (long long __coeff, int __exp)
- static decimal64 **std::decimal::make_decimal64** (unsigned long long __coeff, int __exp)
- bool **std::decimal::operator!=** (decimal32 __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, int __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, unsigned int __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, long __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, unsigned long __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, long long __rhs)
- bool **std::decimal::operator!=** (decimal32 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator!=** (int __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (unsigned int __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (long __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (unsigned long __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (unsigned long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, int __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, unsigned int __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, long __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, unsigned long __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, long long __rhs)
- bool **std::decimal::operator!=** (decimal64 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator!=** (int __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (unsigned int __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (long __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (unsigned long __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (unsigned long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, decimal32 __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, decimal64 __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, int __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, unsigned int __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, long __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, unsigned long __rhs)

- bool **std::decimal::operator!=** (decimal128 __lhs, long long __rhs)
- bool **std::decimal::operator!=** (decimal128 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator!=** (int __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (unsigned int __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (long __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (unsigned long __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator!=** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, int __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, long __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, long long __rhs)
- decimal32 **std::decimal::operator*** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **std::decimal::operator*** (int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (long long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator*** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator*** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, int __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, long __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, long long __rhs)
- decimal64 **std::decimal::operator*** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **std::decimal::operator*** (int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (long long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator*** (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator*** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, int __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, long __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, long long __rhs)
- decimal128 **std::decimal::operator*** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **std::decimal::operator*** (int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (unsigned long __lhs, decimal128 __rhs)

- decimal128 **std::decimal::operator*** (long long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator*** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, int __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, long __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, long long __rhs)
- decimal32 **std::decimal::operator+** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **std::decimal::operator+** (int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (long long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator+** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator+** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (unsigned long long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, int __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, long __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, long long __rhs)
- decimal64 **std::decimal::operator+** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **std::decimal::operator+** (int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator+** (long long __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator+** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, int __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, long __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, long long __rhs)
- decimal128 **std::decimal::operator+** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **std::decimal::operator+** (int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (long long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator+** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __rhs)

- decimal64 **std::decimal::operator-** (decimal64 __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, int __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, long __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, long long __rhs)
- decimal32 **std::decimal::operator-** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **std::decimal::operator-** (int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (long long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator-** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator-** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, int __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, long __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, long long __rhs)
- decimal64 **std::decimal::operator-** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **std::decimal::operator-** (int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (long long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator-** (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator-** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, int __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, long __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, long long __rhs)
- decimal128 **std::decimal::operator-** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **std::decimal::operator-** (int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (long long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator-** (unsigned long long __lhs, decimal128 __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, int __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, unsigned int __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, long __rhs)

- decimal32 **std::decimal::operator/** (decimal32 __lhs, unsigned long __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, long long __rhs)
- decimal32 **std::decimal::operator/** (decimal32 __lhs, unsigned long long __rhs)
- decimal32 **std::decimal::operator/** (int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (unsigned int __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (unsigned long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (long long __lhs, decimal32 __rhs)
- decimal32 **std::decimal::operator/** (unsigned long long __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator/** (decimal32 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, decimal32 __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, int __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, unsigned int __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, long __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, unsigned long __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, long long __rhs)
- decimal64 **std::decimal::operator/** (decimal64 __lhs, unsigned long long __rhs)
- decimal64 **std::decimal::operator/** (int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (unsigned int __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (unsigned long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (long long __lhs, decimal64 __rhs)
- decimal64 **std::decimal::operator/** (unsigned long long __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator/** (decimal32 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (decimal64 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, decimal32 __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, decimal64 __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, long __rhs)
- decimal128 **std::decimal::operator/** (long long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, int __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, unsigned int __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, unsigned long __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, long long __rhs)
- decimal128 **std::decimal::operator/** (decimal128 __lhs, unsigned long long __rhs)
- decimal128 **std::decimal::operator/** (int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (unsigned int __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (unsigned long __lhs, decimal128 __rhs)
- decimal128 **std::decimal::operator/** (unsigned long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (unsigned long __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, int __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, long __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, unsigned long __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, long long __rhs)
- bool **std::decimal::operator<** (int __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (long __lhs, decimal32 __rhs)

- bool **std::decimal::operator<** (decimal32 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator<** (long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (unsigned long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (unsigned int __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (decimal32 __lhs, unsigned int __rhs)
- bool **std::decimal::operator<** (long __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (unsigned long __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (unsigned long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, unsigned int __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, int __rhs)
- bool **std::decimal::operator<** (int __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (unsigned int __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, long long __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, long __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, unsigned long __rhs)
- bool **std::decimal::operator<** (decimal64 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator<** (unsigned long __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, unsigned int __rhs)
- bool **std::decimal::operator<** (unsigned long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, decimal32 __rhs)
- bool **std::decimal::operator<** (int __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (unsigned int __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (long __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, unsigned long __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, int __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, decimal64 __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, long __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, decimal128 __rhs)
- bool **std::decimal::operator<** (decimal128 __lhs, long long __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, unsigned long __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, int __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, unsigned int __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, long __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, long long __rhs)
- bool **std::decimal::operator==** (decimal32 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator==** (int __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (unsigned int __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (long __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (unsigned long __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (unsigned long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (unsigned long long __lhs, decimal64 __rhs)

- bool **std::decimal::operator==** (long __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, long long __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, unsigned int __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, int __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, long __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, unsigned long __rhs)
- bool **std::decimal::operator==** (decimal64 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator==** (int __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (unsigned int __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (unsigned long __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (int __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (unsigned int __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (long __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (unsigned long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (unsigned long __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, decimal32 __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, unsigned int __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, unsigned long __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, decimal128 __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, long long __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, decimal64 __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, int __rhs)
- bool **std::decimal::operator==** (decimal128 __lhs, long __rhs)
- bool **std::decimal::operator>** (unsigned int __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, decimal128 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, long long __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, unsigned long __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, decimal64 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, long __rhs)
- bool **std::decimal::operator>** (unsigned long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (unsigned long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, unsigned int __rhs)
- bool **std::decimal::operator>** (int __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (decimal32 __lhs, int __rhs)
- bool **std::decimal::operator>** (decimal64 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator>** (decimal64 __lhs, decimal32 __rhs)
- bool **std::decimal::operator>** (unsigned long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>** (unsigned long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>** (long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>** (int __lhs, decimal64 __rhs)
- bool **std::decimal::operator>** (decimal64 __lhs, unsigned int __rhs)

- bool **std::decimal::operator**> (decimal64 __lhs, unsigned long __rhs)
- bool **std::decimal::operator**> (decimal64 __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal64 __lhs, long __rhs)
- bool **std::decimal::operator**> (decimal64 __lhs, long long __rhs)
- bool **std::decimal::operator**> (decimal64 __lhs, decimal64 __rhs)
- bool **std::decimal::operator**> (decimal64 __lhs, int __rhs)
- bool **std::decimal::operator**> (long __lhs, decimal64 __rhs)
- bool **std::decimal::operator**> (unsigned int __lhs, decimal64 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (int __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, unsigned long __rhs)
- bool **std::decimal::operator**> (unsigned long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, unsigned int __rhs)
- bool **std::decimal::operator**> (unsigned int __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, decimal32 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, long __rhs)
- bool **std::decimal::operator**> (unsigned long __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, int __rhs)
- bool **std::decimal::operator**> (long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (long __lhs, decimal128 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, decimal64 __rhs)
- bool **std::decimal::operator**> (decimal128 __lhs, long long __rhs)
- bool **std::decimal::operator>=** (long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (unsigned long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, unsigned int __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, int __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (unsigned long long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (unsigned int __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (long __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, long long __rhs)
- bool **std::decimal::operator>=** (int __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, long __rhs)
- bool **std::decimal::operator>=** (decimal32 __lhs, unsigned long __rhs)
- bool **std::decimal::operator>=** (unsigned long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, long long __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, unsigned int __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, unsigned long __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, long __rhs)
- bool **std::decimal::operator>=** (unsigned int __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal64 __lhs, int __rhs)
- bool **std::decimal::operator>=** (unsigned long __lhs, decimal64 __rhs)

- bool **std::decimal::operator>=** (int __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (long long __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, int __rhs)
- bool **std::decimal::operator>=** (int __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, unsigned long __rhs)
- bool **std::decimal::operator>=** (long long __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, decimal64 __rhs)
- bool **std::decimal::operator>=** (unsigned long __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, decimal32 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, long __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, unsigned int __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, long long __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (unsigned int __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (decimal128 __lhs, unsigned long long __rhs)
- bool **std::decimal::operator>=** (long __lhs, decimal128 __rhs)
- bool **std::decimal::operator>=** (unsigned long long __lhs, decimal128 __rhs)

5.176.1 Detailed Description

This is a Standard C++ Library header.

Definition in file decimal.

5.177 deque File Reference

Macros

- #define **_GLIBCXX_DEQUE**

5.177.1 Detailed Description

This is a Standard C++ Library header.

Definition in file deque.

5.178 deque File Reference

Classes

- class std::__debug::deque< _Tp, _Allocator >
- class std::__debug::deque< _Tp, _Allocator >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_DEQUE**

Functions

- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator!=** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<=** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator==** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>=** (const deque< _Tp, _Alloc > &__lhs, const deque< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  void **std::__debug::swap** (deque< _Tp, _Alloc > &__lhs, deque< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)

5.178.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/deque.

5.179 deque File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_DEQUE**

Typedefs

- template<typename _Tp >
  using **std::experimental::fundamentals_v2::pmr::deque** = std::deque< _Tp, polymorphic_allocator< _Tp >>

Functions

- template<typename _Tp , typename _Alloc , typename _Up >
  void **std::experimental::fundamentals_v2::erase** (deque< _Tp, _Alloc > &__cont, const _Up &__value)
- template<typename _Tp , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (deque< _Tp, _Alloc > &__cont, _Predicate __pred)

5.179.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/deque.

5.180 deque.tcc File Reference

Namespaces

- std

Macros

- #define **_DEQUE_TCC**

Functions

- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
  _OI **std::__copy_move_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp >
  ::_Deque_iterator< _OTp, _OTp
  &, _OTp * > **std::__copy_move_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value,::_Deque_iterator
  < _Tp, _Tp &, _Tp * >
  >::__type **std::__copy_move_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
  _OI **std::__copy_move_backward_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp >
  ::_Deque_iterator< _OTp, _OTp
  &, _OTp * > **std::__copy_move_backward_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value,::_Deque_iterator
  < _Tp, _Tp &, _Tp * >
  >::__type **std::__copy_move_backward_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
  _OI **std::__copy_move_backward_dit** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
  _OI **std::__copy_move_dit** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)

- template<typename _Tp , typename _Ref , typename _Ptr , typename _II >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value, bool >::__type **std::__equal_aux1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first1,::_Deque_iterator<
  _Tp, _Ref, _Ptr > __last1, _II __first2)
- template<typename _Tp1 , typename _Ref1 , typename _Ptr1 , typename _Tp2 , typename _Ref2 , typename _Ptr2 >
  bool **std::__equal_aux1** (::_Deque_iterator< _Tp1, _Ref1, _Ptr1 > __first1,::_Deque_iterator< _Tp1, _Ref1,
  _Ptr1 > __last1,::_Deque_iterator< _Tp2, _Ref2, _Ptr2 > __first2)
- template<typename _II , typename _Tp , typename _Ref , typename _Ptr >
  __gnu_cxx::__enable_if
  < __is_random_access_iter< _II >
  ::__value, bool >::__type **std::__equal_aux1** (_II __first1, _II __last1,::_Deque_iterator< _Tp, _Ref, _Ptr > __-
  first2)
- template<typename _Tp , typename _Ref , typename _Ptr , typename _II >
  bool **std::__equal_dit** (const ::_Deque_iterator< _Tp, _Ref, _Ptr > &__first1, const ::_Deque_iterator< _Tp,
  _Ref, _Ptr > &__last1, _II __first2)
- template<typename _Tp , typename _VTp >
  void **std::__fill_a1** (const ::_Deque_iterator< _Tp, _Tp &, _Tp * > &__first, const ::_Deque_iterator< _Tp, _Tp
  &, _Tp * > &__last, const _VTp &__value)

5.180.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <deque>.

Definition in file deque.tcc.

5.181 direct_mask_range_hashing_imp.hpp File Reference

5.181.1 Detailed Description

Contains a range-hashing policy implementation

Definition in file direct_mask_range_hashing_imp.hpp.

5.182 direct_mod_range_hashing_imp.hpp File Reference

5.182.1 Detailed Description

Contains a range-hashing policy implementation

Definition in file direct_mod_range_hashing_imp.hpp.

5.183 dynamic_bitset File Reference

Classes

- struct std::tr2::__dynamic_bitset_base< _WordT, _Alloc >
- class std::tr2::dynamic_bitset< _WordT, _Alloc >
- class std::tr2::dynamic_bitset< _WordT, _Alloc >::reference

Namespaces

- std
- std::tr2

Macros

- #define **_GLIBCXX_TR2_DYNAMIC_BITSET**

Functions

- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_ostream< _CharT,
  _Traits > & std::tr2::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const dynamic_bitset< _WordT, _Alloc > &__x)

- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator!= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator<= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator> (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)
- template<typename _WordT , typename _Alloc >
  bool std::tr2::operator>= (const dynamic_bitset< _WordT, _Alloc > &__lhs, const dynamic_bitset< _WordT, _Alloc > &__rhs)

- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator& (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator| (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator^ (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)
- template<typename _WordT , typename _Alloc >
  dynamic_bitset< _WordT, _Alloc > std::tr2::operator- (const dynamic_bitset< _WordT, _Alloc > &__x, const dynamic_bitset< _WordT, _Alloc > &__y)

5.183.1 Detailed Description

This is a TR2 C++ Library header.

Definition in file dynamic_bitset.

5.184 dynamic_bitset.tcc File Reference

Namespaces

- std
- std::tr2

Macros

- #define **_GLIBCXX_TR2_DYNAMIC_BITSET_TCC**

Functions

- template<typename _CharT , typename _Traits , typename _WordT , typename _Alloc >
  std::basic_istream< _CharT,
  _Traits > & std::tr2::operator>> (std::basic_istream< _CharT, _Traits > &__is, dynamic_bitset< _WordT, _Alloc > &__x)

5.184.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <tr2/dynamic_bitset>.

Definition in file dynamic_bitset.tcc.

5.185 enable_special_members.h File Reference

Classes

- struct std::_Enable_copy_move< _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >
- struct std::_Enable_default_constructor< _Switch, _Tag >
- struct std::_Enable_destructor< _Switch, _Tag >
- struct std::_Enable_special_members< _Default, _Destructor, _Copy, _CopyAssignment, _Move, _MoveAssignment, _Tag >

Namespaces

- std

5.185.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file enable_special_members.h.

5.186 enc_filebuf.h File Reference

Classes

- class __gnu_cxx::enc_filebuf< _CharT >

Namespaces

- __gnu_cxx

5.186.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file enc_filebuf.h.

5.187 entry_cmp.hpp File Reference

Classes

- struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, No_Throw >
- struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >
- struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true >
- struct __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, false >::type

Namespaces

- __gnu_pbds

5.187.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file entry_cmp.hpp.

5.188 entry_list_fn_imps.hpp File Reference

5.188.1 Detailed Description

Contains implementations of cc_ht_map_'s entry-list related functions.

Definition in file entry_list_fn_imps.hpp.

5.189 entry_metadata_base.hpp File Reference

Namespaces

- __gnu_pbds

5.189.1 Detailed Description

Contains an implementation for a list update map.

Definition in file entry_metadata_base.hpp.

5.190 entry_pred.hpp File Reference

Classes

- struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, No_Throw >
- struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, false >
- struct __gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, true >

Namespaces

- __gnu_pbds

5.190.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file entry_pred.hpp.

5.191 eq_by_less.hpp File Reference

Classes

- struct __gnu_pbds::detail::eq_by_less< Key, Cmp_Fn >

Namespaces

- __gnu_pbds

5.191.1 Detailed Description

Contains an equivalence function.

Definition in file eq_by_less.hpp.

5.192 equally_split.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _DifferenceType , typename _OutputIterator >
  _OutputIterator __gnu_parallel::__equally_split (_DifferenceType __n, _ThreadIndex __num_threads, _Output-Iterator __s)
- template<typename _DifferenceType >
  _DifferenceType __gnu_parallel::__equally_split_point (_DifferenceType __n, _ThreadIndex __num_threads, _-ThreadIndex __thread_no)

5.192.1 Detailed Description

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file equally_split.h.

5.193 erase_fn_imps.hpp File Reference

5.193.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/erase_fn_imps.hpp.

5.194 erase_fn_imps.hpp File Reference

5.194.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/erase_fn_imps.hpp.

5.195 erase_fn_imps.hpp File Reference

5.195.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/erase_fn_imps.hpp.

5.196 erase_fn_imps.hpp File Reference

5.196.1 Detailed Description

Contains implementations of cc_ht_map_'s erase related functions.

Definition in file cc_hash_table_map_/erase_fn_imps.hpp.

5.197 erase_fn_imps.hpp File Reference

5.197.1 Detailed Description

Contains implementations of gp_ht_map_'s erase related functions.

Definition in file gp_hash_table_map_/erase_fn_imps.hpp.

5.198 erase_fn_imps.hpp File Reference

5.198.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/erase_fn_imps.hpp.

5.199 erase_fn_imps.hpp File Reference

5.199.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/erase_fn_imps.hpp.

5.200 erase_fn_imps.hpp File Reference

5.200.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/erase_fn_imps.hpp.

5.201 erase_fn_imps.hpp File Reference

5.201.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/erase_fn_imps.hpp.

5.202 erase_fn_imps.hpp File Reference

5.202.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/erase_fn_imps.hpp.

5.203 erase_fn_imps.hpp File Reference

5.203.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/erase_fn_imps.hpp.

5.204 erase_fn_imps.hpp File Reference

5.204.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/erase_fn_imps.hpp.

5.205 erase_fn_imps.hpp File Reference

5.205.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/erase_fn_imps.hpp.

5.206 erase_fn_imps.hpp File Reference

5.206.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/erase_fn_imps.hpp.

5.207 erase_if.h File Reference

Namespaces

- std
- std::__detail

Functions

- template<typename _Container , typename _Predicate >
  _Container::size_type **std::__detail::__erase_nodes_if** (_Container &__cont, _Predicate __pred)

5.207.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file erase_if.h.

5.208 erase_no_store_hash_fn_imps.hpp File Reference

5.208.1 Detailed Description

Contains implementations of cc_ht_map_'s erase related functions, when the hash value is not stored.

Definition in file cc_hash_table_map_/erase_no_store_hash_fn_imps.hpp.

5.209 erase_no_store_hash_fn_imps.hpp File Reference

5.209.1 Detailed Description

Contains implementations of gp_ht_map_'s erase related functions, when the hash value is not stored.

Definition in file gp_hash_table_map_/erase_no_store_hash_fn_imps.hpp.

5.210 erase_store_hash_fn_imps.hpp File Reference

5.210.1 Detailed Description

Contains implementations of cc_ht_map_'s erase related functions, when the hash value is stored.

Definition in file cc_hash_table_map_/erase_store_hash_fn_imps.hpp.

5.211 erase_store_hash_fn_imps.hpp File Reference

5.211.1 Detailed Description

Contains implementations of gp_ht_map_'s erase related functions, when the hash value is stored.

Definition in file gp_hash_table_map_/erase_store_hash_fn_imps.hpp.

5.212 error_constants.h File Reference

Namespaces

- std

Enumerations

- enum **errc** {
  address_family_not_supported, **address_in_use**, **address_not_available**, **already_connected**,
  argument_list_too_long, **argument_out_of_domain**, **bad_address**, **bad_file_descriptor**,
  broken_pipe, **connection_aborted**, **connection_already_in_progress**, **connection_refused**,
  connection_reset, **cross_device_link**, **destination_address_required**, **device_or_resource_busy**,
  directory_not_empty, **executable_format_error**, **file_exists**, **file_too_large**,
  filename_too_long, **function_not_supported**, **host_unreachable**, **illegal_byte_sequence**,
  inappropriate_io_control_operation, **interrupted**, **invalid_argument**, **invalid_seek**,
  io_error, **is_a_directory**, **message_size**, **network_down**,
  network_reset, **network_unreachable**, **no_buffer_space**, **no_child_process**,
  no_lock_available, **no_message**, **no_protocol_option**, **no_space_on_device**,
  no_such_device_or_address, **no_such_device**, **no_such_file_or_directory**, **no_such_process**,
  not_a_directory, **not_a_socket**, **not_connected**, **not_enough_memory**,
  operation_in_progress, **operation_not_permitted**, **operation_not_supported**, **operation_would_block**,
  permission_denied, **protocol_not_supported**, **read_only_file_system**, **resource_deadlock_would_occur**,
  resource_unavailable_try_again, **result_out_of_range**, **timed_out**, **too_many_files_open_in_system**,
  too_many_files_open, **too_many_links**, **too_many_symbolic_link_levels**, **wrong_protocol_type** }

5.212.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <system_error>.

Definition in file error_constants.h.

5.213 exception File Reference

Classes

- class std::bad_exception

Namespaces

- __gnu_cxx
- std

Macros

- #define **__cpp_lib_uncaught_exceptions**
- #define **__EXCEPTION__**

Typedefs

- typedef void(∗ std::terminate_handler)()
- typedef void(∗ std::unexpected_handler)()

Functions

- void __gnu_cxx::__verbose_terminate_handler ()
- terminate_handler std::get_terminate () noexcept
- unexpected_handler std::get_unexpected () noexcept
- terminate_handler std::set_terminate (terminate_handler) noexcept
- unexpected_handler std::set_unexpected (unexpected_handler) noexcept
- void std::terminate () noexcept
- bool std::uncaught_exception () noexcept
- int std::uncaught_exceptions () noexcept
- void std::unexpected ()

5.213.1 Detailed Description

This is a Standard C++ Library header.

Definition in file exception.

5.214 exception.h File Reference

Classes

- class std::exception

Namespaces

- std

5.214.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file exception.h.

5.215 exception.hpp File Reference

Classes

- struct __gnu_pbds::container_error
- struct __gnu_pbds::insert_error
- struct __gnu_pbds::join_error
- struct __gnu_pbds::resize_error

Namespaces

- __gnu_pbds

Functions

- void **__gnu_pbds::__throw_container_error** ()
- void **__gnu_pbds::__throw_insert_error** ()
- void **__gnu_pbds::__throw_join_error** ()
- void **__gnu_pbds::__throw_resize_error** ()

5.215.1 Detailed Description

Contains exception classes.

Definition in file exception.hpp.

5.216 exception_defines.h File Reference

Macros

- #define **__catch**(X)
- #define **__throw_exception_again**
- #define **__try**

5.216.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <exception>.

Definition in file exception_defines.h.

5.217 exception_ptr.h File Reference

Classes

- class std::__exception_ptr::exception_ptr

Namespaces

- std

Functions

- exception_ptr std::current_exception () noexcept
- template<typename _Ex >
  exception_ptr std::make_exception_ptr (_Ex __ex) noexcept
- void std::rethrow_exception (exception_ptr)

5.217.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <exception>.

Definition in file exception_ptr.h.

5.218 extc++.h File Reference

5.218.1 Detailed Description

This is an implementation file for a precompiled header.

Definition in file extc++.h.

5.219 extptr_allocator.h File Reference

Classes

- class __gnu_cxx::_ExtPtr_allocator< _Tp >

Namespaces

- __gnu_cxx

Functions

- template<typename _Tp >
  void **__gnu_cxx::swap** (_ExtPtr_allocator< _Tp > &__larg, _ExtPtr_allocator< _Tp > &__rarg)

5.219.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Author

Bob Walters

An example allocator which uses an alternative pointer type from bits/pointer.h. Supports test cases which confirm container support for alternative pointers.

Definition in file extptr_allocator.h.

5.220 features.h File Reference

Macros

- #define _GLIBCXX_BAL_QUICKSORT
- #define _GLIBCXX_FIND_CONSTANT_SIZE_BLOCKS
- #define _GLIBCXX_FIND_EQUAL_SPLIT
- #define _GLIBCXX_FIND_GROWING_BLOCKS
- #define _GLIBCXX_MERGESORT
- #define _GLIBCXX_QUICKSORT
- #define _GLIBCXX_TREE_DYNAMIC_BALANCING
- #define _GLIBCXX_TREE_FULL_COPY
- #define _GLIBCXX_TREE_INITIAL_SPLITTING

5.220.1 Detailed Description

Defines on whether to include algorithm variants. Less variants reduce executable size and compile time. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file features.h.

5.220.2 Macro Definition Documentation

5.220.2.1 #define _GLIBCXX_BAL_QUICKSORT

Include parallel dynamically load-balanced quicksort.

See Also

__gnu_parallel::_Settings::sort_algorithm

Definition at line 55 of file features.h.

5.220.2.2 #define _GLIBCXX_FIND_CONSTANT_SIZE_BLOCKS

Include the equal-sized blocks variant for std::find.

See Also

__gnu_parallel::_Settings::find_algorithm

Definition at line 67 of file features.h.

5.220.2.3 #define _GLIBCXX_FIND_EQUAL_SPLIT

Include the equal splitting variant for std::find.

See Also

__gnu_parallel::_Settings::find_algorithm

Definition at line 74 of file features.h.

5.220.2.4 #define _GLIBCXX_FIND_GROWING_BLOCKS

Include the growing blocks variant for std::find.

See Also

__gnu_parallel::_Settings::find_algorithm

Definition at line 61 of file features.h.

5.220.2.5 #define _GLIBCXX_MERGESORT

Include parallel multi-way mergesort.

See Also

__gnu_parallel::_Settings::sort_algorithm

Definition at line 41 of file features.h.

5.220.2.6 #define _GLIBCXX_QUICKSORT

Include parallel unbalanced quicksort.

See Also

__gnu_parallel::_Settings::sort_algorithm

Definition at line 48 of file features.h.

5.220.2.7 #define _GLIBCXX_TREE_DYNAMIC_BALANCING

Include the dynamic balancing variant for _Rb_tree::insert_unique(_IIter beg, _IIter __end).

See Also

__gnu_parallel::_Rb_tree

Definition at line 91 of file features.h.

5.220.2.8 #define _GLIBCXX_TREE_FULL_COPY

In order to sort the input sequence of _Rb_tree::insert_unique(_IIter beg, _IIter __end) a full copy of the input elements is done.

See Also

__gnu_parallel::_Rb_tree

Definition at line 100 of file features.h.

5.220.2.9 #define _GLIBCXX_TREE_INITIAL_SPLITTING

Include the initial splitting variant for _Rb_tree::insert_unique(_IIter beg, _IIter __end).

See Also

__gnu_parallel::_Rb_tree

Definition at line 83 of file features.h.

5.221 fenv.h File Reference

5.221.1 Detailed Description

This is a Standard C++ Library header.

Definition in file fenv.h.

5.222 filesystem File Reference

Macros

- #define **_GLIBCXX_FILESYSTEM**

5.222.1 Detailed Description

This is a Standard C++ Library header.

Definition in file filesystem.

5.223 find.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair< _RAIter1, _RAIter2 > __gnu_parallel::__find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair< _RAIter1, _RAIter2 > __gnu_parallel::__find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, equal_split_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair< _RAIter1, _RAIter2 > __gnu_parallel::__find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, growing_blocks_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Pred , typename _Selector > std::pair< _RAIter1, _RAIter2 > __gnu_parallel::__find_template (_RAIter1 __begin1, _RAIter1 __end1, _RAIter2 __begin2, _Pred __pred, _Selector __selector, constant_size_blocks_tag)

5.223.1 Detailed Description

Parallel implementation base for std::find(), std::equal() and related functions. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file find.h.

5.224 find_fn_imps.hpp File Reference

5.224.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/find_fn_imps.hpp.

5.225 find_fn_imps.hpp File Reference

5.225.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/find_fn_imps.hpp.

5.226 find_fn_imps.hpp File Reference

5.226.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/find_fn_imps.hpp.

5.227 find_fn_imps.hpp File Reference

5.227.1 Detailed Description

Contains implementations of cc_ht_map_'s find related functions.

Definition in file cc_hash_table_map_/find_fn_imps.hpp.

5.228 find_fn_imps.hpp File Reference

5.228.1 Detailed Description

Contains implementations of gp_ht_map_'s find related functions.

Definition in file gp_hash_table_map_/find_fn_imps.hpp.

5.229 find_fn_imps.hpp File Reference

5.229.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/find_fn_imps.hpp.

5.230 find_fn_imps.hpp File Reference

5.230.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/find_fn_imps.hpp.

5.231 find_fn_imps.hpp File Reference

5.231.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/find_fn_imps.hpp.

5.232 find_fn_imps.hpp File Reference

5.232.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/find_fn_imps.hpp.

5.233 find_fn_imps.hpp File Reference

5.233.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/find_fn_imps.hpp.

5.234 find_fn_imps.hpp File Reference

5.234.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/find_fn_imps.hpp.

5.235 find_no_store_hash_fn_imps.hpp File Reference

5.235.1 Detailed Description

Contains implementations of gp_ht_map_'s find related functions, when the hash value is not stored.

Definition in file find_no_store_hash_fn_imps.hpp.

5.236 find_selectors.h File Reference

Classes

- struct __gnu_parallel::__adjacent_find_selector
- struct __gnu_parallel::__find_first_of_selector< _FIterator >
- struct __gnu_parallel::__find_if_selector
- struct __gnu_parallel::__generic_find_selector
- struct __gnu_parallel::__mismatch_selector

Namespaces

- __gnu_parallel

5.236.1 Detailed Description

_Function objects representing different tasks to be plugged into the parallel find algorithm. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file find_selectors.h.

5.237 find_store_hash_fn_imps.hpp File Reference

5.237.1 Detailed Description

Contains implementations of cc_ht_map_'s find related functions, when the hash value is stored.

Definition in file cc_hash_table_map_/find_store_hash_fn_imps.hpp.

5.238 find_store_hash_fn_imps.hpp File Reference

5.238.1 Detailed Description

Contains implementations of gp_ht_map_'s insert related functions, when the hash value is stored.

Definition in file gp_hash_table_map_/find_store_hash_fn_imps.hpp.

5.239 for_each.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter , typename _UserOp , typename _Functionality , typename _Red , typename _Result >
  _UserOp __gnu_parallel::__for_each_template_random_access (_IIter __begin, _IIter __end, _UserOp __user_op, _Functionality &__functionality, _Red __reduction, _Result __reduction_start, _Result &__output, typename std::iterator_traits< _IIter >::difference_type __bound, _Parallelism __parallelism_tag)

5.239.1 Detailed Description

Main interface for embarrassingly parallel functions. The explicit implementation are in other header files, like workstealing.h, par_loop.h, omp_loop.h, and omp_loop_static.h. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file for_each.h.

5.240 for_each_selectors.h File Reference

Classes

- struct __gnu_parallel::__accumulate_binop_reduct< _BinOp >
- struct __gnu_parallel::__accumulate_selector< _It >
- struct __gnu_parallel::__adjacent_difference_selector< _It >
- struct __gnu_parallel::__count_if_selector< _It, _Diff >
- struct __gnu_parallel::__count_selector< _It, _Diff >
- struct __gnu_parallel::__fill_selector< _It >
- struct __gnu_parallel::__for_each_selector< _It >
- struct __gnu_parallel::__generate_selector< _It >
- struct __gnu_parallel::__generic_for_each_selector< _It >
- struct __gnu_parallel::__identity_selector< _It >
- struct __gnu_parallel::__inner_product_selector< _It, _It2, _Tp >
- struct __gnu_parallel::__max_element_reduct< _Compare, _It >
- struct __gnu_parallel::__min_element_reduct< _Compare, _It >
- struct __gnu_parallel::__replace_if_selector< _It, _Op, _Tp >
- struct __gnu_parallel::__replace_selector< _It, _Tp >
- struct __gnu_parallel::__transform1_selector< _It >
- struct __gnu_parallel::__transform2_selector< _It >
- struct __gnu_parallel::_DummyReduct
- struct __gnu_parallel::_Nothing

Namespaces

- __gnu_parallel

5.240.1 Detailed Description

Functors representing different tasks to be plugged into the generic parallelization methods for embarrassingly parallel functions. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file for_each_selectors.h.

5.241 formatter.h File Reference

Classes

- class __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >
- class __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >
- class __gnu_debug::_Safe_sequence< _Sequence >
- class std::move_iterator< _Iterator >
- class std::reverse_iterator< _Iterator >

Namespaces

- __gnu_cxx
- __gnu_debug
- std

Macros

- #define **_GLIBCXX_TYPEID**(_Type)

Enumerations

- enum **_Debug_msg_id** {
  __msg_valid_range, **__msg_insert_singular**, **__msg_insert_different**, **__msg_erase_bad**,
  __msg_erase_different, **__msg_subscript_oob**, **__msg_empty**, **__msg_unpartitioned**,
  __msg_unpartitioned_pred, **__msg_unsorted**, **__msg_unsorted_pred**, **__msg_not_heap**,
  __msg_not_heap_pred, **__msg_bad_bitset_write**, **__msg_bad_bitset_read**, **__msg_bad_bitset_flip**,
  __msg_self_splice, **__msg_splice_alloc**, **__msg_splice_bad**, **__msg_splice_other**,
  __msg_splice_overlap, **__msg_init_singular**, **__msg_init_copy_singular**, **__msg_init_const_singular**,
  __msg_copy_singular, **__msg_bad_deref**, **__msg_bad_inc**, **__msg_bad_dec**,
  __msg_iter_subscript_oob, **__msg_advance_oob**, **__msg_retreat_oob**, **__msg_iter_compare_bad**,
  __msg_compare_different, **__msg_iter_order_bad**, **__msg_order_different**, **__msg_distance_bad**,
  __msg_distance_different, **__msg_deref_istream**, **__msg_inc_istream**, **__msg_output_ostream**,
  __msg_deref_istreambuf, **__msg_inc_istreambuf**, **__msg_insert_after_end**, **__msg_erase_after_bad**,
  __msg_valid_range2, **__msg_local_iter_compare_bad**, **__msg_non_empty_range**, **__msg_self_move_-assign**,
  __msg_bucket_index_oob, **__msg_valid_load_factor**, **__msg_equal_allocs**, **__msg_insert_range_from_-self**,
  __msg_irreflexive_ordering }

Functions

- template<typename _Iterator >
  bool **__gnu_debug::__check_singular** (const _Iterator &)

5.241.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file formatter.h.

5.242 forward_list File Reference

Macros

- #define **_GLIBCXX_FORWARD_LIST**

5.242.1 Detailed Description

This is a Standard C++ Library header.

Definition in file forward_list.

5.243 forward_list File Reference

Classes

- class __gnu_debug::_Safe_forward_list< _SafeSequence >
- class std::__debug::forward_list< _Tp, _Allocator >
- class std::__debug::forward_list< _Tp, _Allocator >

Namespaces

- __gnu_debug
- std
- std::__debug

Macros

- #define **__glibcxx_check_valid_fl_range**(_First, _Last, _Dist)
- #define **_GLIBCXX20_ONLY**(__expr)
- #define **_GLIBCXX_DEBUG_FORWARD_LIST**
- #define **_GLIBCXX_FWDLIST_REMOVE_RETURN_TYPE_TAG**

Functions

- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator!=** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::__debug::operator<= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &_-_ly)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator==** (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::__debug::operator> (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)

- template<typename _Tp , typename _Alloc >
  bool std::__debug::operator>= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &_-
  _ly)
- template<typename _Tp , typename _Alloc >
  void std::__debug::swap (forward_list< _Tp, _Alloc > &__lx, forward_list< _Tp, _Alloc > &__ly) noexcept(noexcept(-
  __lx.swap(__ly)))

5.243.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/forward_list.

5.244 forward_list File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_FORWARD_LIST**

Typedefs

- template<typename _Tp >
  using **std::experimental::fundamentals_v2::pmr::forward_list** = std::forward_list< _Tp, polymorphic_-
  allocator< _Tp >>

Functions

- template<typename _Tp , typename _Alloc , typename _Up >
  void **std::experimental::fundamentals_v2::erase** (forward_list< _Tp, _Alloc > &__cont, const _Up &__value)
- template<typename _Tp , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (forward_list< _Tp, _Alloc > &__cont, _Predicate __pred)

5.244.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/forward_list.

5.245 forward_list.h File Reference

Classes

- struct std::_Fwd_list_base< _Tp, _Alloc >
- struct std::_Fwd_list_const_iterator< _Tp >

- struct std::_Fwd_list_iterator< _Tp >
- struct std::_Fwd_list_node< _Tp >
- struct std::_Fwd_list_node_base
- class std::forward_list< _Tp, _Alloc >

Namespaces

- std

Functions

- template<typename _Tp , typename _Alloc >
  bool std::operator!= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::operator< (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::operator<= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::operator== (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::operator> (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  bool std::operator>= (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)
- template<typename _Tp , typename _Alloc >
  void std::swap (forward_list< _Tp, _Alloc > &__lx, forward_list< _Tp, _Alloc > &__ly) noexcept(noexcept(__lx.-swap(__ly)))

5.245.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <forward_list>.

Definition in file forward_list.h.

5.246 forward_list.tcc File Reference

Namespaces

- std

Macros

- #define **_FORWARD_LIST_TCC**
- #define **_GLIBCXX20_ONLY**(__expr)

Functions

- template<typename _Tp , typename _Alloc >
  bool std::operator== (const forward_list< _Tp, _Alloc > &__lx, const forward_list< _Tp, _Alloc > &__ly)

5.246.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <forward_list>.

Definition in file forward_list.tcc.

5.247 fs_dir.h File Reference

5.247.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <filesystem>.

Definition in file fs_dir.h.

5.248 fs_fwd.h File Reference

5.248.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <filesystem>.

Definition in file fs_fwd.h.

5.249 fs_path.h File Reference

5.249.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <filesystem>.

Definition in file fs_path.h.

5.250 fstream File Reference

Classes

- class std::basic_filebuf< _CharT, _Traits >
- class std::basic_fstream< _CharT, _Traits >
- class std::basic_ifstream< _CharT, _Traits >
- class std::basic_ofstream< _CharT, _Traits >

Namespaces

- std

Macros

- #define **_GLIBCXX_FSTREAM**

Functions

- template<class _CharT , class _Traits >
  void std::swap (basic_filebuf< _CharT, _Traits > &__x, basic_filebuf< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void std::swap (basic_ifstream< _CharT, _Traits > &__x, basic_ifstream< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void std::swap (basic_ofstream< _CharT, _Traits > &__x, basic_ofstream< _CharT, _Traits > &__y)
- template<class _CharT , class _Traits >
  void std::swap (basic_fstream< _CharT, _Traits > &__x, basic_fstream< _CharT, _Traits > &__y)

5.250.1 Detailed Description

This is a Standard C++ Library header.

Definition in file fstream.

5.251 fstream.tcc File Reference

Namespaces

- std

Macros

- #define **_FSTREAM_TCC**

5.251.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <fstream>.

Definition in file fstream.tcc.

5.252 functexcept.h File Reference

Namespaces

- std

Functions

- void **std::__throw_bad_alloc** (void)
- void **std::__throw_bad_cast** (void)
- void **std::__throw_bad_exception** (void)
- void **std::__throw_bad_function_call** ()
- void **std::__throw_bad_typeid** (void)
- void **std::__throw_domain_error** (const char *)
- void **std::__throw_future_error** (int)
- void **std::__throw_invalid_argument** (const char *)

- void **std::__throw_ios_failure** (const char *)
- void **std::__throw_ios_failure** (const char *, int)
- void **std::__throw_length_error** (const char *)
- void **std::__throw_logic_error** (const char *)
- void **std::__throw_out_of_range** (const char *)
- void **std::__throw_out_of_range_fmt** (const char *,...)
- void **std::__throw_overflow_error** (const char *)
- void **std::__throw_range_error** (const char *)
- void **std::__throw_runtime_error** (const char *)
- void **std::__throw_system_error** (int)
- void **std::__throw_underflow_error** (const char *)

5.252.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <exception>.

This header provides support for -fno-exceptions.

Definition in file functexcept.h.

5.253 functional File Reference

Classes

- struct std::_Bind< _Signature >
- struct std::_Bind_result< _Result, _Signature >
- class std::_Mu< _Arg, _IsBindExp, _IsPlaceholder >
- class std::_Mu< _Arg, false, false >
- class std::_Mu< _Arg, false, true >
- class std::_Mu< _Arg, true, false >
- class std::_Mu< reference_wrapper< _Tp >, false, false >
- class std::_Not_fn< _Fn >
- struct std::_Placeholder< _Num >
- struct std::is_bind_expression< _Tp >
- struct std::is_bind_expression< _Bind< _Signature > >
- struct std::is_bind_expression< _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< const _Bind< _Signature > >
- struct std::is_bind_expression< const _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< const volatile _Bind< _Signature > >
- struct std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > >
- struct std::is_bind_expression< volatile _Bind< _Signature > >
- struct std::is_bind_expression< volatile _Bind_result< _Result, _Signature > >
- struct std::is_placeholder< _Tp >
- struct std::is_placeholder< _Placeholder< _Num > >

Namespaces

- std
- std::placeholders

Macros

- #define **_GLIBCXX_DEPR_BIND**
- #define **_GLIBCXX_FUNCTIONAL**
- #define **_GLIBCXX_NOT_FN_CALL_OP**(_QUALS)

Typedefs

- template<typename _Tp , typename _Tp2 = typename decay<_Tp>::type>
  using **std::__is_socketlike** = __or_< is_integral< _Tp2 >, is_enum< _Tp2 >>
- template<std::size_t __i, typename _Tuple >
  using **std::_Safe_tuple_element_t** = typename enable_if<(__i< tuple_size< _Tuple >::value), tuple_element< __i, _Tuple >>::type::type

Functions

- template<std::size_t _Ind, typename... _Tp>
  auto **std::__volget** (volatile tuple< _Tp...> &__tuple) -> __tuple_element_t< _Ind, tuple< _Tp...>> volatile &
- template<std::size_t _Ind, typename... _Tp>
  auto **std::__volget** (const volatile tuple< _Tp...> &__tuple) -> __tuple_element_t< _Ind, tuple< _Tp...>> const volatile &
- template<typename _Func , typename... _BoundArgs>
  constexpr _Bind_helper
  < __is_socketlike< _Func >
  ::value, _Func, _BoundArgs...>
  ::type std::bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Result , typename _Func , typename... _BoundArgs>
  constexpr _Bindres_helper
  < _Result, _Func,
  _BoundArgs...>::type std::bind (_Func &&__f, _BoundArgs &&...__args)
- template<typename _Tp , typename _Class >
  constexpr _Mem_fn< _Tp _Class::* > std::mem_fn (_Tp _Class::*__pm) noexcept

Variables

- const _Placeholder< 1 > **std::placeholders::_1**
- const _Placeholder< 10 > **std::placeholders::_10**
- const _Placeholder< 11 > **std::placeholders::_11**
- const _Placeholder< 12 > **std::placeholders::_12**
- const _Placeholder< 13 > **std::placeholders::_13**
- const _Placeholder< 14 > **std::placeholders::_14**
- const _Placeholder< 15 > **std::placeholders::_15**
- const _Placeholder< 16 > **std::placeholders::_16**
- const _Placeholder< 17 > **std::placeholders::_17**
- const _Placeholder< 18 > **std::placeholders::_18**
- const _Placeholder< 19 > **std::placeholders::_19**
- const _Placeholder< 2 > **std::placeholders::_2**
- const _Placeholder< 20 > **std::placeholders::_20**
- const _Placeholder< 21 > **std::placeholders::_21**
- const _Placeholder< 22 > **std::placeholders::_22**
- const _Placeholder< 23 > **std::placeholders::_23**

- const _Placeholder< 24 > **std::placeholders::_24**
- const _Placeholder< 25 > **std::placeholders::_25**
- const _Placeholder< 26 > **std::placeholders::_26**
- const _Placeholder< 27 > **std::placeholders::_27**
- const _Placeholder< 28 > **std::placeholders::_28**
- const _Placeholder< 29 > **std::placeholders::_29**
- const _Placeholder< 3 > **std::placeholders::_3**
- const _Placeholder< 4 > **std::placeholders::_4**
- const _Placeholder< 5 > **std::placeholders::_5**
- const _Placeholder< 6 > **std::placeholders::_6**
- const _Placeholder< 7 > **std::placeholders::_7**
- const _Placeholder< 8 > **std::placeholders::_8**
- const _Placeholder< 9 > **std::placeholders::_9**

5.253.1 Detailed Description

This is a Standard C++ Library header.

Definition in file functional.

5.254 functional File Reference

Classes

- class __gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 >
- struct __gnu_cxx::constant_binary_fun< _Result, _Arg1, _Arg2 >
- struct __gnu_cxx::constant_unary_fun< _Result, _Argument >
- struct __gnu_cxx::constant_void_fun< _Result >
- struct __gnu_cxx::project1st< _Arg1, _Arg2 >
- struct __gnu_cxx::project2nd< _Arg1, _Arg2 >
- struct __gnu_cxx::select1st< _Pair >
- struct __gnu_cxx::select2nd< _Pair >
- class __gnu_cxx::subtractive_rng
- class __gnu_cxx::unary_compose< _Operation1, _Operation2 >

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_FUNCTIONAL**

Functions

- template<class _Operation1 , class _Operation2 >
  unary_compose< _Operation1,
  _Operation2 > __gnu_cxx::compose1 (const _Operation1 &__fn1, const _Operation2 &__fn2)

- template<class _Operation1 , class _Operation2 , class _Operation3 >
  binary_compose< _Operation1,
  _Operation2, _Operation3 > __gnu_cxx::compose2 (const _Operation1 &__fn1, const _Operation2 &__fn2, const _Operation3 &__fn3)
- template<class _Result >
  constant_void_fun< _Result > __gnu_cxx::constant0 (const _Result &__val)
- template<class _Result >
  constant_unary_fun< _Result,
  _Result > __gnu_cxx::constant1 (const _Result &__val)
- template<class _Result >
  constant_binary_fun< _Result,
  _Result, _Result > __gnu_cxx::constant2 (const _Result &__val)
- template<class _Tp >
  _Tp __gnu_cxx::identity_element (std::plus< _Tp >)
- template<class _Tp >
  _Tp __gnu_cxx::identity_element (std::multiplies< _Tp >)
- template<class _Ret , class _Tp , class _Arg >
  std::mem_fun1_t< _Ret, _Tp, _Arg > **__gnu_cxx::mem_fun1** (_Ret(_Tp::*__f)(_Arg))
- template<class _Ret , class _Tp , class _Arg >
  std::const_mem_fun1_t< _Ret,
  _Tp, _Arg > **__gnu_cxx::mem_fun1** (_Ret(_Tp::*__f)(_Arg) const)
- template<class _Ret , class _Tp , class _Arg >
  std::mem_fun1_ref_t< _Ret, _Tp,
  _Arg > **__gnu_cxx::mem_fun1_ref** (_Ret(_Tp::*__f)(_Arg))
- template<class _Ret , class _Tp , class _Arg >
  std::const_mem_fun1_ref_t
  < _Ret, _Tp, _Arg > **__gnu_cxx::mem_fun1_ref** (_Ret(_Tp::*__f)(_Arg) const)

5.254.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file ext/functional.

5.255 functional File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_boyer_moore_searching**
- #define **__cpp_lib_experimental_not_fn**
- #define **_GLIBCXX_EXPERIMENTAL_FUNCTIONAL**

Typedefs

- template<typename _RAIter , typename _Hash , typename _Pred , typename _Val = typename iterator_traits<_RAIter>::value_type, typename _Diff = typename iterator_traits<_RAIter>::difference_type>

using **std::experimental::fundamentals_v1::__boyer_moore_base_t** = std::conditional_t< std::__is_byte_-like< _Val, _Pred >::value, __boyer_moore_array_base< _Diff, 256, _Pred >, __boyer_moore_map_base< _Val, _Diff, _Hash, _Pred >>

Functions

- template<typename _RAIter , typename _Hash = std::hash<typename std::iterator_traits<_RAIter>::value_type>, typename _Binary-Predicate = equal_to<>>
  boyer_moore_horspool_searcher
  < _RAIter, _Hash,
  _BinaryPredicate > **std::experimental::fundamentals_v1::make_boyer_moore_horspool_searcher** (_RAIter __pat_first, _RAIter __pat_last, _Hash __hf=_Hash(), _BinaryPredicate __pred=_BinaryPredicate())
- template<typename _RAIter , typename _Hash = std::hash<typename std::iterator_traits<_RAIter>::value_type>, typename _Binary-Predicate = equal_to<>>
  boyer_moore_searcher< _RAIter,
  _Hash, _BinaryPredicate > **std::experimental::fundamentals_v1::make_boyer_moore_searcher** (_RAIter __pat_first, _RAIter __pat_last, _Hash __hf=_Hash(), _BinaryPredicate __pred=_BinaryPredicate())
- template<typename _ForwardIterator , typename _BinaryPredicate = std::equal_to<>>
  default_searcher
  < _ForwardIterator,
  _BinaryPredicate > **std::experimental::fundamentals_v1::make_default_searcher** (_ForwardIterator __pat_-first, _ForwardIterator __pat_last, _BinaryPredicate __pred=_BinaryPredicate())
- template<typename _Fn >
  auto **std::experimental::fundamentals_v2::not_fn** (_Fn &&__fn) noexcept(std::is_nothrow_constructible< std-::decay_t< _Fn >, _Fn && >::value)

Variables

- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_bind_expression_v**
- template<typename _Tp >
  constexpr int **std::experimental::fundamentals_v1::is_placeholder_v**

5.255.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/functional.

5.256 functional_hash.h File Reference

Classes

- struct std::hash< _Tp >
- struct std::hash< _Tp >
- struct std::hash< _Tp * >
- struct std::hash< bool >
- struct std::hash< char >
- struct std::hash< char16_t >
- struct std::hash< char32_t >
- struct std::hash< double >

- struct std::hash< float >
- struct std::hash< int >
- struct std::hash< long >
- struct std::hash< long double >
- struct std::hash< long long >
- struct std::hash< short >
- struct std::hash< signed char >
- struct std::hash< unsigned char >
- struct std::hash< unsigned int >
- struct std::hash< unsigned long >
- struct std::hash< unsigned long long >
- struct std::hash< unsigned short >
- struct std::hash< wchar_t >

Namespaces

- std

Macros

- #define **_Cxx_hashtable_define_trivial_hash**(_Tp)

5.256.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file functional_hash.h.

5.257 functions.h File Reference

Namespaces

- __gnu_debug

Functions

- template<typename _ForwardIterator , typename _Tp >
  constexpr bool **__gnu_debug::__check_partitioned_lower** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _ForwardIterator , typename _Tp , typename _Pred >
  constexpr bool **__gnu_debug::__check_partitioned_lower** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value, _Pred __pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr bool **__gnu_debug::__check_partitioned_upper** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _ForwardIterator , typename _Tp , typename _Pred >
  constexpr bool **__gnu_debug::__check_partitioned_upper** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value, _Pred __pred)

- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__check_sorted** (const _InputIterator &__first, const _InputIterator &__last)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted** (const _InputIterator &__first, const _InputIterator &__last, _Predicate __pred)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__check_sorted_aux** (const _InputIterator &, const _InputIterator &, std::input_iterator_tag)
- template<typename _ForwardIterator >
  constexpr bool **__gnu_debug::__check_sorted_aux** (_ForwardIterator __first, _ForwardIterator __last, std::forward_iterator_tag)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted_aux** (const _InputIterator &, const _InputIterator &, _Predicate, std::input_iterator_tag)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted_aux** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, std::forward_iterator_tag)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr bool **__gnu_debug::__check_sorted_set** (const _InputIterator1 &__first, const _InputIterator1 &__last, const _InputIterator2 &)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted_set** (const _InputIterator1 &__first, const _InputIterator1 &__last, const _InputIterator2 &, _Predicate __pred)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__check_sorted_set_aux** (const _InputIterator &__first, const _InputIterator &__last, std::__true_type)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__check_sorted_set_aux** (const _InputIterator &, const _InputIterator &, std::__false_type)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted_set_aux** (const _InputIterator &__first, const _InputIterator &__last, _Predicate __pred, std::__true_type)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool **__gnu_debug::__check_sorted_set_aux** (const _InputIterator &, const _InputIterator &, _Predicate, std::__false_type)
- template<typename _InputIterator >
  _InputIterator **__gnu_debug::__check_valid_range** (const _InputIterator &__first, const _InputIterator &__last, const char *__file, unsigned int __line, const char *__function)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__gnu_debug::__foreign_iterator** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, _InputIterator __other, _InputIterator __other_end)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _Integral >
  bool **__gnu_debug::__foreign_iterator_aux** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, _Integral, _Integral, std::__true_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__gnu_debug::__foreign_iterator_aux** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, _InputIterator __other, _InputIterator __other_end, std::__false_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator >
  bool __gnu_debug::__foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _Safe_iterator< _OtherIterator, _Sequence, _Category > &__other, const _Safe_iterator< _OtherIterator, _Sequence, _Category > &)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _OtherIterator , typename _OtherSequence , typename _OtherCategory >

bool __gnu_debug::__foreign_iterator_aux2 (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > &, const _Safe_iterator< _OtherIterator, _OtherSequence, _OtherCategory > &)

- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__gnu_debug::__foreign_iterator_aux2** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _InputIterator &__other, const _InputIterator &__other_end)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__gnu_debug::__foreign_iterator_aux3** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const _InputIterator &__other, const _InputIterator &__other_end, std::__true_type)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _InputIterator >
  bool **__gnu_debug::__foreign_iterator_aux3** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _InputIterator &, const _InputIterator &, std::__false_type)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__gnu_debug::__foreign_iterator_aux4** (const _Safe_iterator< _Iterator, _Sequence, _Category > &__it, const typename _Sequence::value_type *__other)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__gnu_debug::__foreign_iterator_aux4** (const _Safe_iterator< _Iterator, _Sequence, _Category > &,...)
- template<typename _Iterator >
  constexpr bool **__gnu_debug::__is_irreflexive** (_Iterator __it)
- template<typename _Iterator , typename _Pred >
  constexpr bool **__gnu_debug::__is_irreflexive_pred** (_Iterator __it, _Pred __pred)

5.257.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file functions.h.

5.258 future File Reference

Classes

- class std::__basic_future< _Res >
- struct std::__future_base
- struct std::__future_base::_Result< _Res >
- struct std::__future_base::_Result< _Res & >
- struct std::__future_base::_Result< void >
- struct std::__future_base::_Result_alloc< _Res, _Alloc >
- struct std::__future_base::_Result_base
- class std::future< _Res >
- class std::future< _Res >
- class std::future< _Res & >
- class std::future< void >
- class std::future_error
- struct std::is_error_code_enum< future_errc >
- class std::packaged_task< _Res(_ArgTypes...)>
- class std::promise< _Res >
- class std::promise< _Res >
- class std::promise< _Res & >
- class std::promise< void >
- class std::shared_future< _Res >

- class std::shared_future< _Res >
- class std::shared_future< _Res & >
- class std::shared_future< void >

Namespaces

- std

Macros

- #define **_GLIBCXX_FUTURE**

Typedefs

- template<typename _Fn , typename... _Args>
  using **std::__async_result_of** = typename __invoke_result< typename decay< _Fn >::type, typename decay< _Args >::type...>::type

Enumerations

- enum std::future_errc { **future_already_retrieved**, **promise_already_satisfied**, **no_state**, **broken_promise** }
- enum std::future_status { **ready**, **timeout**, **deferred** }
- enum std::launch { **async**, **deferred** }

Functions

- template<typename _Signature , typename _Fn , typename _Alloc = std::allocator<int>>
  static shared_ptr
  < __future_base::_Task_state_base
  < _Signature > > **std::__create_task_state** (_Fn &&__fn, const _Alloc &__a=_Alloc())
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > std::async (launch __policy, _Fn &&__fn, _Args &&...__args)
- template<typename _Fn , typename... _Args>
  future< __async_result_of< _Fn,
  _Args...> > std::async (_Fn &&__fn, _Args &&...__args)
- const error_category & std::future_category () noexcept
- error_code std::make_error_code (future_errc __errc) noexcept
- error_condition std::make_error_condition (future_errc __errc) noexcept
- constexpr launch **std::operator&** (launch __x, launch __y)
- launch & **std::operator&=** (launch &__x, launch __y)
- constexpr launch **std::operator^** (launch __x, launch __y)
- launch & **std::operator^=** (launch &__x, launch __y)
- constexpr launch **std::operator|** (launch __x, launch __y)
- launch & **std::operator|=** (launch &__x, launch __y)
- constexpr launch **std::operator~** (launch __x)
- template<typename _Res >
  void **std::swap** (promise< _Res > &__x, promise< _Res > &__y) noexcept
- template<typename _Res , typename... _ArgTypes>
  void std::swap (packaged_task< _Res(_ArgTypes...)> &__x, packaged_task< _Res(_ArgTypes...)> &__y) noexcept

5.258.1 Detailed Description

This is a Standard C++ Library header.

Definition in file future.

5.259 gp_ht_map_.hpp File Reference

Classes

- class __gnu_pbds::detail::gp_ht_map< Key, Mapped, Hash_Fn, Eq_Fn, _Alloc, Store_Hash, Comb_Probe_Fn, Probe_Fn, Resize_Policy >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_GEN_POS**
- #define **PB_DS_GP_HASH_NAME**
- #define **PB_DS_GP_HASH_TRAITS_BASE**
- #define **PB_DS_HASH_EQ_FN_C_DEC**
- #define **PB_DS_RANGED_PROBE_FN_C_DEC**

5.259.1 Detailed Description

Contains an implementation class for general probing hash.

Definition in file gp_ht_map_.hpp.

5.260 gslice.h File Reference

Classes

- class std::gslice

Namespaces

- std

5.260.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file gslice.h.

5.261 gslice_array.h File Reference

Classes

- class std::gslice_array< _Tp >

Namespaces

- std

Macros

- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)

5.261.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file gslice_array.h.

5.262 hash_bytes.h File Reference

Namespaces

- std

Functions

- size_t **std::_Fnv_hash_bytes** (const void *__ptr, size_t __len, size_t __seed)
- size_t **std::_Hash_bytes** (const void *__ptr, size_t __len, size_t __seed)

5.262.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file hash_bytes.h.

5.263 hash_eq_fn.hpp File Reference

Classes

- struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, Store_Hash >
- struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, false >
- struct __gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, true >

Namespaces

- __gnu_pbds

5.263.1 Detailed Description

Contains 2 equivalence functions, one employing a hash value, and one ignoring it.

Definition in file hash_eq_fn.hpp.

5.264 hash_exponential_size_policy_imp.hpp File Reference

5.264.1 Detailed Description

Contains a resize size policy implementation.

Definition in file hash_exponential_size_policy_imp.hpp.

5.265 hash_fun.h File Reference

Namespaces

- __gnu_cxx

Functions

- size_t **__gnu_cxx::__stl_hash_string** (const char *__s)

5.265.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file hash_fun.h.

5.266 hash_load_check_resize_trigger_imp.hpp File Reference

Macros

- #define **PB_DS_ASSERT_VALID**(X)

5.266.1 Detailed Description

Contains a resize trigger implementation.

Definition in file hash_load_check_resize_trigger_imp.hpp.

5.267 hash_load_check_resize_trigger_size_base.hpp File Reference

Classes

- class __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, Hold_Size >
- class __gnu_pbds::detail::hash_load_check_resize_trigger_size_base< Size_Type, true >

Namespaces

- __gnu_pbds

5.267.1 Detailed Description

Contains an base holding size for some resize policies.

Definition in file hash_load_check_resize_trigger_size_base.hpp.

5.268 hash_map File Reference

Classes

- class __gnu_cxx::hash_map< _Key, _Tp, _HashFn, _EqualKey, _Alloc >
- class __gnu_cxx::hash_multimap< _Key, _Tp, _HashFn, _EqualKey, _Alloc >

Namespaces

- __gnu_cxx
- std

Macros

- #define **_BACKWARD_HASH_MAP**

Functions

- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  bool **__gnu_cxx::operator!=** (const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<class _Key , class _Tp , class _HF , class _EqKey , class _Alloc >
  bool **__gnu_cxx::operator!=** (const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm1, const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  bool **__gnu_cxx::operator==** (const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, const hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<class _Key , class _Tp , class _HF , class _EqKey , class _Alloc >
  bool **__gnu_cxx::operator==** (const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm1, const hash_multimap< _Key, _Tp, _HF, _EqKey, _Alloc > &__hm2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  void **__gnu_cxx::swap** (hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, hash_map< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)
- template<class _Key , class _Tp , class _HashFn , class _EqlKey , class _Alloc >
  void **__gnu_cxx::swap** (hash_multimap< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm1, hash_multimap< _Key, _Tp, _HashFn, _EqlKey, _Alloc > &__hm2)

5.268.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file hash_map.

5.269 hash_policy.hpp File Reference

Classes

- class __gnu_pbds::cc_hash_max_collision_check_resize_trigger< External_Load_Access, Size_Type >
- class __gnu_pbds::direct_mask_range_hashing< Size_Type >
- class __gnu_pbds::direct_mod_range_hashing< Size_Type >
- class __gnu_pbds::hash_exponential_size_policy< Size_Type >
- class __gnu_pbds::hash_load_check_resize_trigger< External_Load_Access, Size_Type >
- class __gnu_pbds::hash_prime_size_policy
- class __gnu_pbds::hash_standard_resize_policy< Size_Policy, Trigger_Policy, External_Size_Access, Size_Type >
- class __gnu_pbds::linear_probe_fn< Size_Type >
- class __gnu_pbds::quadratic_probe_fn< Size_Type >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_SIZE_BASE_C_DEC**

Enumerations

- enum { **num_distinct_sizes_32_bit**, **num_distinct_sizes_64_bit**, **num_distinct_sizes** }

Variables

- static const std::size_t **__gnu_pbds::detail::g_a_sizes** [num_distinct_sizes_64_bit]

5.269.1 Detailed Description

Contains hash-related policies.

Definition in file hash_policy.hpp.

5.270 hash_prime_size_policy_imp.hpp File Reference

5.270.1 Detailed Description

Contains a resize size policy implementation.

Definition in file hash_prime_size_policy_imp.hpp.

5.271 hash_set File Reference

Classes

- class __gnu_cxx::hash_multiset< _Value, _HashFcn, _EqualKey, _Alloc >
- class __gnu_cxx::hash_set< _Value, _HashFcn, _EqualKey, _Alloc >

Namespaces

- __gnu_cxx
- std

Macros

- #define **_BACKWARD_HASH_SET**

Functions

- template<class _Value , class _HashFcn , class _EqualKey , class _Alloc >
  bool **__gnu_cxx::operator!=** (const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  bool **__gnu_cxx::operator!=** (const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Value , class _HashFcn , class _EqualKey , class _Alloc >
  bool **__gnu_cxx::operator==** (const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_set< _Value, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  bool **__gnu_cxx::operator==** (const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, const hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  void **__gnu_cxx::swap** (hash_set< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, hash_set< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)
- template<class _Val , class _HashFcn , class _EqualKey , class _Alloc >
  void **__gnu_cxx::swap** (hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs1, hash_multiset< _Val, _HashFcn, _EqualKey, _Alloc > &__hs2)

5.271.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file hash_set.

5.272 hash_standard_resize_policy_imp.hpp File Reference

5.272.1 Detailed Description

Contains a resize policy implementation.

Definition in file hash_standard_resize_policy_imp.hpp.

5.273 hashtable.h File Reference

Classes

- class std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >

Namespaces

- std

Typedefs

- template<typename _Tp , typename _Hash >
  using **std::__cache_default** = __not_< __and_< __is_fast_hash< _Hash >, __is_nothrow_invocable< const _Hash &, const _Tp & >>>

5.273.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <unordered_map> or < unordered_set>.

Definition in file bits/hashtable.h.

5.274 hashtable.h File Reference

Namespaces

- __gnu_cxx

Enumerations

- enum { **_S_num_primes** }

Functions

- unsigned long **__gnu_cxx::__stl_next_prime** (unsigned long __n)
- template<class _Val , class _Key , class _HF , class _Ex , class _Eq , class _All >
  bool **__gnu_cxx::operator!=** (const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht1, const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht2)
- template<class _Val , class _Key , class _HF , class _Ex , class _Eq , class _All >
  bool **__gnu_cxx::operator==** (const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht1, const hashtable< _Val, _Key, _HF, _Ex, _Eq, _All > &__ht2)
- template<class _Val , class _Key , class _HF , class _Extract , class _EqKey , class _All >
  void **__gnu_cxx::swap** (hashtable< _Val, _Key, _HF, _Extract, _EqKey, _All > &__ht1, hashtable< _Val, _Key, _HF, _Extract, _EqKey, _All > &__ht2)

5.274.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file backward/hashtable.h.

5.275 hashtable_policy.h File Reference

Classes

- struct std::__detail::_Default_ranged_hash
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Equality< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, false >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Default_ranged_hash, true >
- struct std::__detail::_Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >
- struct std::__detail::_Hash_node< _Value, _Cache_hash_code >
- struct std::__detail::_Hash_node< _Value, false >
- struct std::__detail::_Hash_node< _Value, true >
- struct std::__detail::_Hash_node_base
- struct std::__detail::_Hash_node_value_base< _Value >
- class std::_Hashtable< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- struct std::__detail::_Hashtable_alloc< _NodeAlloc >
- struct std::__detail::_Hashtable_alloc< _NodeAlloc >
- struct std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- struct std::__detail::_Hashtable_base< _Key, _Value, _ExtractKey, _Equal, _H1, _H2, _Hash, _Traits >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, __use_ebo >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false >
- struct std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true >
- struct std::__detail::_Hashtable_traits< _Cache_hash_code, _Constant_iterators, _Unique_keys >
- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Constant_iterators >

- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Insert< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Insert_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits >
- struct std::__detail::_Local_const_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >
- struct std::__detail::_Local_iterator< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __constant_iterators, __cache >
- struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache_hash_code >
- struct std::__detail::_Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, true >
- struct std::__detail::_Map_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, _Unique_keys >
- struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false >
- struct std::__detail::_Map_base< _Key, _Pair, _Alloc, _Select1st, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true >
- struct std::__detail::_Mask_range_hashing
- struct std::__detail::_Mod_range_hashing
- struct std::__detail::_Node_const_iterator< _Value, __constant_iterators, __cache >
- struct std::__detail::_Node_iterator< _Value, __constant_iterators, __cache >
- struct std::__detail::_Node_iterator_base< _Value, _Cache_hash_code >
- struct std::__detail::_Power2_rehash_policy
- struct std::__detail::_Prime_rehash_policy
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, typename >
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, false_type >
- struct std::__detail::_Rehash_base< _Key, _Value, _Alloc, _ExtractKey, _Equal, _H1, _H2, _Hash, _RehashPolicy, _Traits, true_type >

Namespaces

- std
- std::__detail

Typedefs

- template<typename _Policy >
  using **std::__detail::__has_load_factor** = typename _Policy::__has_load_factor
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash >
  using **std::__detail::__hash_code_for_local_iter** = _Hash_code_storage< _Hash_code_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, false >>

Functions

- std::size_t std::__detail::__clp2 (std::size_t __n) noexcept

- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last, std::input_-iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last, std::forward_-iterator_tag)
- template<class _Iterator >
  std::iterator_traits
  < _Iterator >::difference_type **std::__detail::__distance_fw** (_Iterator __first, _Iterator __last)
- template<typename _Value , bool _Cache_hash_code>
  bool **std::__detail::operator!=** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _Node-_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **std::__detail::operator!=** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __-cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)
- template<typename _Value , bool _Cache_hash_code>
  bool **std::__detail::operator==** (const _Node_iterator_base< _Value, _Cache_hash_code > &__x, const _-Node_iterator_base< _Value, _Cache_hash_code > &__y) noexcept
- template<typename _Key , typename _Value , typename _ExtractKey , typename _H1 , typename _H2 , typename _Hash , bool __cache>
  bool **std::__detail::operator==** (const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __-cache > &__x, const _Local_iterator_base< _Key, _Value, _ExtractKey, _H1, _H2, _Hash, __cache > &__y)

5.275.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <unordered_map> or <unordered_set>.

Definition in file hashtable_policy.h.

5.276 helper_functions.h File Reference

Classes

- class __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >
- class __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >

Namespaces

- __gnu_debug

Enumerations

- enum __gnu_debug::_Distance_precision {
  __dp_none, **__dp_equality**, **__dp_sign**, **__dp_sign_max_size**,
  __dp_exact }

Functions

- template<typename _Iterator >
  constexpr _Iterator __gnu_debug::__base (_Iterator __it)
- template<typename _InputIterator , typename _Size >
  constexpr bool **__gnu_debug::__can_advance** (_InputIterator, _Size)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _Size >
  bool **__gnu_debug::__can_advance** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, _Size)
- template<typename _Iterator >
  bool **__gnu_debug::__check_singular** (const _Iterator &)
- template<typename _Tp >
  bool __gnu_debug::__check_singular (_Tp *const &__ptr)
- bool **__gnu_debug::__check_singular_aux** (const void *)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type __gnu_debug::__get_distance (_Iterator __lhs, _Iterator __rhs, std::random_access_iterator_tag)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type **__gnu_debug::__get_distance** (_Iterator __lhs, _Iterator __rhs, std::input_iterator_tag)
- template<typename _Iterator >
  constexpr _Distance_traits
  < _Iterator >::__type **__gnu_debug::__get_distance** (_Iterator __lhs, _Iterator __rhs)
- template<typename _Iterator >
  _Iterator **__gnu_debug::__unsafe** (_Iterator __it)
- template<typename _InputIterator >
  constexpr bool __gnu_debug::__valid_range (_InputIterator __first, _InputIterator __last, typename _Distance_traits< _InputIterator >::__type &__dist)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool __gnu_debug::__valid_range (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _Iterator, _Sequence, _Category > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _Iterator , typename _Sequence >
  bool __gnu_debug::__valid_range (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__valid_range** (_InputIterator __first, _InputIterator __last)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__gnu_debug::__valid_range** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_iterator< _Iterator, _Sequence, _Category > &)
- template<typename _Iterator , typename _Sequence >
  bool **__gnu_debug::__valid_range** (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &)
- template<typename _Integral >
  constexpr bool __gnu_debug::__valid_range_aux (_Integral, _Integral, std::__true_type)
- template<typename _Integral >
  constexpr bool **__gnu_debug::__valid_range_aux** (_Integral, _Integral, typename _Distance_traits< _Integral >::__type &__dist, std::__true_type)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__valid_range_aux** (_InputIterator __first, _InputIterator __last, std::input_iterator_tag)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__valid_range_aux** (_InputIterator __first, _InputIterator __last, std::random_access_iterator_tag)

- template<typename _InputIterator >
  constexpr bool __gnu_debug::__valid_range_aux (_InputIterator __first, _InputIterator __last, std::__false_type)
- template<typename _InputIterator >
  constexpr bool **__gnu_debug::__valid_range_aux** (_InputIterator __first, _InputIterator __last, typename _-Distance_traits< _InputIterator >::__type &__dist, std::__false_type)

5.276.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file helper_functions.h.

5.277 indirect_array.h File Reference

Classes

- class std::indirect_array< _Tp >

Namespaces

- std

Macros

- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)

5.277.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file indirect_array.h.

5.278 info_fn_imps.hpp File Reference

5.278.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/info_fn_imps.hpp.

5.279 info_fn_imps.hpp File Reference

5.279.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/info_fn_imps.hpp.

5.280 info_fn_imps.hpp File Reference

5.280.1 Detailed Description

Contains implementations of cc_ht_map_'s entire container info related functions.

Definition in file cc_hash_table_map_/info_fn_imps.hpp.

5.281 info_fn_imps.hpp File Reference

5.281.1 Detailed Description

Contains implementations of gp_ht_map_'s entire container info related functions.

Definition in file gp_hash_table_map_/info_fn_imps.hpp.

5.282 info_fn_imps.hpp File Reference

5.282.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/info_fn_imps.hpp.

5.283 info_fn_imps.hpp File Reference

5.283.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/info_fn_imps.hpp.

5.284 info_fn_imps.hpp File Reference

5.284.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/info_fn_imps.hpp.

5.285 info_fn_imps.hpp File Reference

5.285.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/info_fn_imps.hpp.

5.286 info_fn_imps.hpp File Reference

5.286.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/info_fn_imps.hpp.

5.287 info_fn_imps.hpp File Reference

5.287.1 Detailed Description

Contains an implementation.

Definition in file splay_tree_/info_fn_imps.hpp.

5.288 initializer_list File Reference

Classes

- class std::initializer_list< _E >

Namespaces

- std

5.288.1 Detailed Description

This is a Standard C++ Library header.

Definition in file initializer_list.

5.289 insert_fn_imps.hpp File Reference

5.289.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/insert_fn_imps.hpp.

5.290 insert_fn_imps.hpp File Reference

5.290.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/insert_fn_imps.hpp.

5.291 insert_fn_imps.hpp File Reference

5.291.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/insert_fn_imps.hpp.

5.292 insert_fn_imps.hpp File Reference

5.292.1 Detailed Description

Contains implementations of cc_ht_map_'s insert related functions.

Definition in file cc_hash_table_map_/insert_fn_imps.hpp.

5.293 insert_fn_imps.hpp File Reference

5.293.1 Detailed Description

Contains implementations of gp_ht_map_'s insert related functions.

Definition in file gp_hash_table_map_/insert_fn_imps.hpp.

5.294 insert_fn_imps.hpp File Reference

5.294.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/insert_fn_imps.hpp.

5.295 insert_fn_imps.hpp File Reference

5.295.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/insert_fn_imps.hpp.

5.296 insert_fn_imps.hpp File Reference

5.296.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/insert_fn_imps.hpp.

5.297 insert_fn_imps.hpp File Reference

5.297.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/insert_fn_imps.hpp.

5.298 insert_fn_imps.hpp File Reference

5.298.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/insert_fn_imps.hpp.

5.299 insert_fn_imps.hpp File Reference

5.299.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/insert_fn_imps.hpp.

5.300 insert_fn_imps.hpp File Reference

5.300.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/insert_fn_imps.hpp.

5.301 insert_fn_imps.hpp File Reference

5.301.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/insert_fn_imps.hpp.

5.302 insert_join_fn_imps.hpp File Reference

5.302.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file insert_join_fn_imps.hpp.

5.303 insert_no_store_hash_fn_imps.hpp File Reference

5.303.1 Detailed Description

Contains implementations of cc_ht_map_'s insert related functions, when the hash value is not stored.

Definition in file cc_hash_table_map_/insert_no_store_hash_fn_imps.hpp.

5.304 insert_no_store_hash_fn_imps.hpp File Reference

5.304.1 Detailed Description

Contains implementations of gp_ht_map_'s insert related functions, when the hash value is not stored.

Definition in file gp_hash_table_map_/insert_no_store_hash_fn_imps.hpp.

5.305 insert_store_hash_fn_imps.hpp File Reference

5.305.1 Detailed Description

Contains implementations of cc_ht_map_'s insert related functions, when the hash value is stored.

Definition in file cc_hash_table_map_/insert_store_hash_fn_imps.hpp.

5.306 insert_store_hash_fn_imps.hpp File Reference

5.306.1 Detailed Description

Contains implementations of gp_ht_map_'s find related functions, when the hash value is stored.

Definition in file gp_hash_table_map_/insert_store_hash_fn_imps.hpp.

5.307 invoke.h File Reference

Namespaces

- std

Typedefs

- template<typename _Res , typename _Callable , typename... _Args>
  using **std::__can_invoke_as_nonvoid** = __enable_if_t< __and_< __not_< is_void< _Res >>, is_convertible< typename __invoke_result< _Callable, _Args...>::type, _Res > >::value, _Res >
- template<typename _Res , typename _Callable , typename... _Args>
  using **std::__can_invoke_as_void** = __enable_if_t< __and_< is_void< _Res >, __is_invocable< _Callable, _Args...>>::value, _Res >

Functions

- template<typename _Tp , typename _Up = typename __inv_unwrap<_Tp>::type>
  constexpr _Up && **std::__invfwd** (typename remove_reference< _Tp >::type &__t) noexcept
- template<typename _Callable , typename... _Args>
  constexpr __invoke_result
  < _Callable, _Args...>::type std::__invoke (_Callable &&__fn, _Args &&...__args) noexcept(__is_nothrow_invocable< _Callable, _Args...>::value)
- template<typename _Res , typename _Fn , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_other, _Fn &&__f, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_memfun_ref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)
- template<typename _Res , typename _MemFun , typename _Tp , typename... _Args>
  constexpr _Res **std::__invoke_impl** (__invoke_memfun_deref, _MemFun &&__f, _Tp &&__t, _Args &&...__args)

- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **std::__invoke_impl** (__invoke_memobj_ref, _MemPtr &&__f, _Tp &&__t)
- template<typename _Res , typename _MemPtr , typename _Tp >
  constexpr _Res **std::__invoke_impl** (__invoke_memobj_deref, _MemPtr &&__f, _Tp &&__t)
- template<typename _Res , typename _Callable , typename... _Args>
  constexpr
  __can_invoke_as_nonvoid< _Res,
  _Callable, _Args...> **std::__invoke_r** (_Callable &&__fn, _Args &&...__args)
- template<typename _Res , typename _Callable , typename... _Args>
  constexpr __can_invoke_as_void
  < _Res, _Callable, _Args...> **std::__invoke_r** (_Callable &&__fn, _Args &&...__args)

5.307.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file invoke.h.

5.308 iomanip File Reference

Namespaces

- std

Macros

- #define **__cpp_lib_quoted_string_io**
- #define **_GLIBCXX_IOMANIP**

Functions

- template<typename _MoneyT >
  _Get_money< _MoneyT > std::get_money (_MoneyT &__mon, bool __intl=false)
- template<typename _CharT >
  _Get_time< _CharT > std::get_time (std::tm *__tmb, const _CharT *__fmt)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Resetiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setbase __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setfill< _CharT > __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setprecision __f)

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Setw __f)
- template<typename _CharT , typename _Traits , typename _MoneyT >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Put_money< _MoneyT > __f)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__os, _Put_time< _CharT > __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Resetiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Setiosflags __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Setbase __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Setfill< _CharT > __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Setprecision __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Setw __f)
- template<typename _CharT , typename _Traits , typename _MoneyT >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Get_money< _MoneyT > __f)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::operator**>> (basic_istream< _CharT, _Traits > &__is, _Get_time< _CharT > __f)
- template<typename _MoneyT >
  _Put_money< _MoneyT > std::put_money (const _MoneyT &__mon, bool __intl=false)
- template<typename _CharT >
  _Put_time< _CharT > std::put_time (const std::tm *__tmb, const _CharT *__fmt)
- template<typename _CharT >
  auto std::quoted (const _CharT *__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- template<typename _CharT , typename _Traits , typename _Alloc >
  auto **std::quoted** (const basic_string< _CharT, _Traits, _Alloc > &__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- template<typename _CharT , typename _Traits , typename _Alloc >
  auto **std::quoted** (basic_string< _CharT, _Traits, _Alloc > &__string, _CharT __delim=_CharT('"'), _CharT __escape = _CharT('\\'))
- _Resetiosflags std::resetiosflags (ios_base::fmtflags __mask)
- _Setbase std::setbase (int __base)
- template<typename _CharT >
  _Setfill< _CharT > std::setfill (_CharT __c)
- _Setiosflags std::setiosflags (ios_base::fmtflags __mask)
- _Setprecision std::setprecision (int __n)
- _Setw std::setw (int __n)

5.308.1 Detailed Description

This is a Standard C++ Library header.

Definition in file iomanip.

5.309 ios File Reference

Macros

- #define **_GLIBCXX_IOS**

5.309.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ios.

5.310 ios_base.h File Reference

Classes

- class std::ios_base::failure
- class std::ios_base

Namespaces

- std

Enumerations

- enum **_Ios_Fmtflags** {
  _S_boolalpha, **_S_dec**, **_S_fixed**, **_S_hex**,
  _S_internal, **_S_left**, **_S_oct**, **_S_right**,
  _S_scientific, **_S_showbase**, **_S_showpoint**, **_S_showpos**,
  _S_skipws, **_S_unitbuf**, **_S_uppercase**, **_S_adjustfield**,
  _S_basefield, **_S_floatfield**, **_S_ios_fmtflags_end**, **_S_ios_fmtflags_max**,
  _S_ios_fmtflags_min }
- enum **_Ios_Iostate** {
  _S_goodbit, **_S_badbit**, **_S_eofbit**, **_S_failbit**,
  _S_ios_iostate_end, **_S_ios_iostate_max**, **_S_ios_iostate_min** }
- enum **_Ios_Openmode** {
  _S_app, **_S_ate**, **_S_bin**, **_S_in**,
  _S_out, **_S_trunc**, **_S_ios_openmode_end**, **_S_ios_openmode_max**,
  _S_ios_openmode_min }
- enum **_Ios_Seekdir** { **_S_beg**, **_S_cur**, **_S_end**, **_S_ios_seekdir_end** }
- enum std::io_errc { **stream** }

Functions

- ios_base & std::boolalpha (ios_base &__base)
- ios_base & std::dec (ios_base &__base)
- ios_base & std::defaultfloat (ios_base &__base)
- ios_base & std::fixed (ios_base &__base)
- ios_base & std::hex (ios_base &__base)
- ios_base & std::hexfloat (ios_base &__base)
- ios_base & std::internal (ios_base &__base)
- const error_category & **std::iostream_category** () noexcept
- ios_base & std::left (ios_base &__base)
- error_code **std::make_error_code** (io_errc __e) noexcept
- error_condition **std::make_error_condition** (io_errc __e) noexcept
- ios_base & std::noboolalpha (ios_base &__base)
- ios_base & std::noshowbase (ios_base &__base)
- ios_base & std::noshowpoint (ios_base &__base)
- ios_base & std::noshowpos (ios_base &__base)
- ios_base & std::noskipws (ios_base &__base)
- ios_base & std::nounitbuf (ios_base &__base)
- ios_base & std::nouppercase (ios_base &__base)
- ios_base & std::oct (ios_base &__base)
- constexpr _Ios_Fmtflags **std::operator&** (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr _Ios_Openmode **std::operator&** (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr _Ios_Iostate **std::operator&** (_Ios_Iostate __a, _Ios_Iostate __b)
- const _Ios_Fmtflags & **std::operator&=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **std::operator&=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- const _Ios_Iostate & **std::operator&=** (_Ios_Iostate &__a, _Ios_Iostate __b)
- constexpr _Ios_Fmtflags **std::operator^** (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr _Ios_Openmode **std::operator^** (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr _Ios_Iostate **std::operator^** (_Ios_Iostate __a, _Ios_Iostate __b)
- const _Ios_Fmtflags & **std::operator^=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **std::operator^=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- const _Ios_Iostate & **std::operator^=** (_Ios_Iostate &__a, _Ios_Iostate __b)
- constexpr _Ios_Fmtflags **std::operator|** (_Ios_Fmtflags __a, _Ios_Fmtflags __b)
- constexpr _Ios_Openmode **std::operator|** (_Ios_Openmode __a, _Ios_Openmode __b)
- constexpr _Ios_Iostate **std::operator|** (_Ios_Iostate __a, _Ios_Iostate __b)
- const _Ios_Fmtflags & **std::operator|=** (_Ios_Fmtflags &__a, _Ios_Fmtflags __b)
- const _Ios_Openmode & **std::operator|=** (_Ios_Openmode &__a, _Ios_Openmode __b)
- const _Ios_Iostate & **std::operator|=** (_Ios_Iostate &__a, _Ios_Iostate __b)
- constexpr _Ios_Fmtflags **std::operator~** (_Ios_Fmtflags __a)
- constexpr _Ios_Openmode **std::operator~** (_Ios_Openmode __a)
- constexpr _Ios_Iostate **std::operator~** (_Ios_Iostate __a)
- ios_base & std::right (ios_base &__base)
- ios_base & std::scientific (ios_base &__base)
- ios_base & std::showbase (ios_base &__base)
- ios_base & std::showpoint (ios_base &__base)
- ios_base & std::showpos (ios_base &__base)
- ios_base & std::skipws (ios_base &__base)
- ios_base & std::unitbuf (ios_base &__base)
- ios_base & std::uppercase (ios_base &__base)

5.310.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ios>.

Definition in file ios_base.h.

5.311 iosfwd File Reference

Classes

- class std::basic_filebuf< _CharT, _Traits >
- class std::basic_fstream< _CharT, _Traits >
- class std::basic_ifstream< _CharT, _Traits >
- class std::basic_ios< _CharT, _Traits >
- class std::basic_iostream< _CharT, _Traits >
- class std::basic_istream< _CharT, _Traits >
- class std::basic_istringstream< _CharT, _Traits, _Alloc >
- class std::basic_ofstream< _CharT, _Traits >
- class std::basic_ostream< _CharT, _Traits >
- class std::basic_ostringstream< _CharT, _Traits, _Alloc >
- class std::basic_streambuf< _CharT, _Traits >
- class std::basic_stringbuf< _CharT, _Traits, _Alloc >
- class std::basic_stringstream< _CharT, _Traits, _Alloc >
- class std::istreambuf_iterator< _CharT, _Traits >
- class std::ostreambuf_iterator< _CharT, _Traits >

Namespaces

- std

Macros

- #define **_GLIBCXX_IOSFWD**

Typedefs

- typedef basic_filebuf< char > std::filebuf
- typedef basic_fstream< char > std::fstream
- typedef basic_ifstream< char > std::ifstream
- typedef basic_ios< char > std::ios
- typedef basic_iostream< char > std::iostream
- typedef basic_istream< char > std::istream
- typedef basic_istringstream< char > std::istringstream
- typedef basic_ofstream< char > std::ofstream
- typedef basic_ostream< char > std::ostream
- typedef basic_ostringstream< char > std::ostringstream
- typedef basic_streambuf< char > std::streambuf
- typedef basic_stringbuf< char > std::stringbuf
- typedef basic_stringstream< char > std::stringstream

- typedef basic_filebuf< wchar_t > std::wfilebuf
- typedef basic_fstream< wchar_t > std::wfstream
- typedef basic_ifstream< wchar_t > std::wifstream
- typedef basic_ios< wchar_t > std::wios
- typedef basic_iostream< wchar_t > std::wiostream
- typedef basic_istream< wchar_t > std::wistream
- typedef basic_istringstream < wchar_t > std::wistringstream
- typedef basic_ofstream< wchar_t > std::wofstream
- typedef basic_ostream< wchar_t > std::wostream
- typedef basic_ostringstream < wchar_t > std::wostringstream
- typedef basic_streambuf< wchar_t > std::wstreambuf
- typedef basic_stringbuf< wchar_t > std::wstringbuf
- typedef basic_stringstream < wchar_t > std::wstringstream

5.311.1 Detailed Description

This is a Standard C++ Library header.

Definition in file iosfwd.

5.312 iostream File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_IOSTREAM**

Variables

- static ios_base::Init std::__ioinit

Standard Stream Objects

The <iostream> header declares the eight standard stream objects. For other declarations, see `http://gcc.gnu.org/onlinedocs/libstdc++/manual/io.html` *and the I/O forward declarations*

They are required by default to cooperate with the global C library's `FILE` *streams, and to be available during program startup and termination. For more information, see the section of the manual linked to above.*

- istream std::cin
- ostream std::cout
- ostream std::cerr
- ostream std::clog
- wistream std::wcin
- wostream std::wcout
- wostream std::wcerr
- wostream std::wclog

5.312.1 Detailed Description

This is a Standard C++ Library header.

Definition in file iostream.

5.313 istream File Reference

Classes

- class std::basic_iostream< _CharT, _Traits >
- class std::basic_istream< _CharT, _Traits >
- class std::basic_istream< _CharT, _Traits >::sentry

Namespaces

- std

Macros

- #define **_GLIBCXX_ISTREAM**

Typedefs

- template<typename _Tp >
  using **std::__do_is_convertible_to_basic_istream_impl** = decltype(__is_convertible_to_basic_istream_-test(declval< typename remove_reference< _Tp >::type * >()))
- template<typename _Istream >
  using **std::__rvalue_istream_type** = typename __is_convertible_to_basic_istream< _Istream >::__istream_-type

Functions

- template<typename _Ch , typename _Up >
  basic_istream< _Ch, _Up > & **std::__is_convertible_to_basic_istream_test** (basic_istream< _Ch, _Up > *)
- template<typename _Istream , typename _Tp >
  enable_if< __and_< __not_
  < is_lvalue_reference
  < _Istream >
  >, __is_convertible_to_basic_istream
  < _Istream >, __is_extractable
  < __rvalue_istream_type
  < _Istream >, _Tp && >
  >::value,
  __rvalue_istream_type
  < _Istream > >::type std::operator>> (_Istream &&__is, _Tp &&__x)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::ws (basic_istream< _CharT, _Traits > &__is)
- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__in, _CharT &__c)

- template<class _Traits >
  basic_istream< char, _Traits > & std::operator>> (basic_istream< char, _Traits > &__in, unsigned char &__c)
- template<class _Traits >
  basic_istream< char, _Traits > & std::operator>> (basic_istream< char, _Traits > &__in, signed char &__c)

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__in, _CharT *__s)
- template<>
  basic_istream< char > & std::operator>> (basic_istream< char > &__in, char *__s)
- template<class _Traits >
  basic_istream< char, _Traits > & std::operator>> (basic_istream< char, _Traits > &__in, unsigned char *__s)
- template<class _Traits >
  basic_istream< char, _Traits > & std::operator>> (basic_istream< char, _Traits > &__in, signed char *__s)

5.313.1 Detailed Description

This is a Standard C++ Library header.

Definition in file istream.

5.314 istream.tcc File Reference

Namespaces

- std

Macros

- #define **_ISTREAM_TCC**

Functions

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::ws (basic_istream< _CharT, _Traits > &__is)

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__in, _CharT &__c)

- template<typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__in, _CharT *__s)

5.314.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <istream>.

Definition in file istream.tcc.

5.315 iterator File Reference

Macros

- #define **__cpp_lib_null_iterators**
- #define **_GLIBCXX_ITERATOR**

5.315.1 Detailed Description

This is a Standard C++ Library header.

Definition in file iterator.

5.316 iterator File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_ITERATOR**

Functions

- template<typename _InputIterator , typename _Distance >
  void **__gnu_cxx::__distance** (_InputIterator __first, _InputIterator __last, _Distance &__n, std::input_iterator_tag)
- template<typename _RandomAccessIterator , typename _Distance >
  void **__gnu_cxx::__distance** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Distance &__n, std::random_access_iterator_tag)
- template<typename _InputIterator , typename _Distance >
  void __gnu_cxx::distance (_InputIterator __first, _InputIterator __last, _Distance &__n)

5.316.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file ext/iterator.

5.317 iterator File Reference

Classes

- class std::experimental::fundamentals_v2::ostream_joiner< _DelimT, _CharT, _Traits >

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_ostream_joiner**
- #define **_GLIBCXX_EXPERIMENTAL_ITERATOR**

Functions

- template<typename _CharT , typename _Traits , typename _DelimT >
  ostream_joiner< decay_t
  < _DelimT >, _CharT, _Traits > **std::experimental::fundamentals_v2::make_ostream_joiner** (basic_-
  ostream< _CharT, _Traits > &__os, _DelimT &&__delimiter)

5.317.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/iterator.

5.318 iterator.h File Reference

Classes

- class __gnu_parallel::_IteratorPair< _Iterator1, _Iterator2, _IteratorCategory >
- class __gnu_parallel::_IteratorTriple< _Iterator1, _Iterator2, _Iterator3, _IteratorCategory >

Namespaces

- __gnu_parallel

5.318.1 Detailed Description

Helper iterator classes for the std::transform() functions. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file iterator.h.

5.319 iterator.hpp File Reference

5.319.1 Detailed Description

Contains an iterator_ class used for ranging over the elements of the table.

This file is intended to be included inside a class definition, with PB_DS_CLASS_C_DEC defined to the name of the enclosing class.

Definition in file iterator.hpp.

5.320 iterator_concepts.h File Reference

5.320.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file iterator_concepts.h.

5.321 iterator_fn_imps.hpp File Reference

5.321.1 Detailed Description

Contains implementations of gp_ht_map_'s iterators related functions, e.g., begin().

Definition in file iterator_fn_imps.hpp.

5.322 iterators_fn_imps.hpp File Reference

5.322.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/iterators_fn_imps.hpp.

5.323 iterators_fn_imps.hpp File Reference

5.323.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/iterators_fn_imps.hpp.

5.324 iterators_fn_imps.hpp File Reference

5.324.1 Detailed Description

Contains implementations of cc_ht_map_'s iterators related functions, e.g., begin().

Definition in file cc_hash_table_map_/iterators_fn_imps.hpp.

5.325 iterators_fn_imps.hpp File Reference

5.325.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/iterators_fn_imps.hpp.

5.326 iterators_fn_imps.hpp File Reference

5.326.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/iterators_fn_imps.hpp.

5.327 iterators_fn_imps.hpp File Reference

5.327.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/iterators_fn_imps.hpp.

5.328 iterators_fn_imps.hpp File Reference

5.328.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/iterators_fn_imps.hpp.

5.329 left_child_next_sibling_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::left_child_next_sibling_heap< Value_Type, Cmp_Fn, Node_Metadata, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.329.1 Detailed Description

Contains an implementation class for a basic heap.

Definition in file left_child_next_sibling_heap_.hpp.

5.330 lfts_config.h File Reference

5.330.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly.

Definition in file lfts_config.h.

5.331 limits File Reference

Classes

- struct std::__numeric_limits_base
- struct std::numeric_limits< _Tp >
- struct std::numeric_limits< bool >
- struct std::numeric_limits< char >
- struct std::numeric_limits< char16_t >
- struct std::numeric_limits< char32_t >
- struct std::numeric_limits< double >
- struct std::numeric_limits< float >
- struct std::numeric_limits< int >
- struct std::numeric_limits< long >
- struct std::numeric_limits< long double >
- struct std::numeric_limits< long long >
- struct std::numeric_limits< short >
- struct std::numeric_limits< signed char >
- struct std::numeric_limits< unsigned char >
- struct std::numeric_limits< unsigned int >
- struct std::numeric_limits< unsigned long >
- struct std::numeric_limits< unsigned long long >
- struct std::numeric_limits< unsigned short >
- struct std::numeric_limits< wchar_t >

Namespaces

- std

Macros

- #define **__glibcxx_digits**(T)
- #define **__glibcxx_digits10**(T)
- #define **__glibcxx_digits10_b**(T, B)
- #define **__glibcxx_digits_b**(T, B)
- #define **__glibcxx_double_has_denorm_loss**
- #define **__glibcxx_double_tinyness_before**
- #define **__glibcxx_double_traps**
- #define **__glibcxx_float_has_denorm_loss**
- #define **__glibcxx_float_tinyness_before**
- #define **__glibcxx_float_traps**
- #define **__glibcxx_integral_traps**
- #define **__glibcxx_long_double_has_denorm_loss**
- #define **__glibcxx_long_double_tinyness_before**
- #define **__glibcxx_long_double_traps**
- #define **__glibcxx_max**(T)
- #define **__glibcxx_max_b**(T, B)
- #define **__glibcxx_max_digits10**(T)
- #define **__glibcxx_min**(T)
- #define **__glibcxx_min_b**(T, B)

- #define **__glibcxx_signed**(T)
- #define **__glibcxx_signed_b**(T, B)
- #define **__INT_N**(TYPE, BITSIZE, EXT, UEXT)
- #define **__INT_N_201103**(TYPE)
- #define **__INT_N_U201103**(TYPE)
- #define **_GLIBCXX_NUMERIC_LIMITS**

Enumerations

- enum std::float_denorm_style { std::denorm_indeterminate, std::denorm_absent, std::denorm_present }
- enum std::float_round_style { **round_indeterminate**, std::round_toward_zero, std::round_to_nearest, std::round_toward_infinity, std::round_toward_neg_infinity }

5.331.1 Detailed Description

This is a Standard C++ Library header.

Definition in file limits.

5.332 linear_probe_fn_imp.hpp File Reference

5.332.1 Detailed Description

Contains a probe policy implementation

Definition in file linear_probe_fn_imp.hpp.

5.333 list File Reference

Macros

- #define **_GLIBCXX_LIST**

5.333.1 Detailed Description

This is a Standard C++ Library header.

Definition in file list.

5.334 list File Reference

Classes

- class std::__debug::list< _Tp, _Allocator >
- class std::__debug::list< _Tp, _Allocator >

Namespaces

- __gnu_debug
- std
- std::__debug

Macros

- #define **_GLIBCXX20_ONLY**(__expr)
- #define **_GLIBCXX_DEBUG_LIST**
- #define **_GLIBCXX_LIST_REMOVE_RETURN_TYPE_TAG**

Functions

- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator!=** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<=** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator==** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>=** (const list< _Tp, _Alloc > &__lhs, const list< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  void **std::__debug::swap** (list< _Tp, _Alloc > &__lhs, list< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)

5.334.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/list.

5.335 list File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_LIST**

Typedefs

- template<typename _Tp >
  using **std::experimental::fundamentals_v2::pmr::list** = std::list< _Tp, polymorphic_allocator< _Tp >>

Functions

- template<typename _Tp , typename _Alloc , typename _Up >
  void **std::experimental::fundamentals_v2::erase** (list< _Tp, _Alloc > &__cont, const _Up &__value)
- template<typename _Tp , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (list< _Tp, _Alloc > &__cont, _Predicate __pred)

5.335.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/list.

5.336 list.tcc File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX20_ONLY**(__expr)
- #define **_LIST_TCC**

5.336.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <list>.

Definition in file list.tcc.

5.337 list_partition.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter >
  void __gnu_parallel::__shrink (std::vector< _IIter > &__os_starts, size_t &__count_to_two, size_t &__range_-length)
- template<typename _IIter >
  void __gnu_parallel::__shrink_and_double (std::vector< _IIter > &__os_starts, size_t &__count_to_two, size_t &__range_length, const bool __make_twice)
- template<typename _IIter , typename _FunctorType >
  size_t __gnu_parallel::list_partition (const _IIter __begin, const _IIter __end, _IIter *__starts, size_t *__lengths, const int __num_parts, _FunctorType &__f, int __oversampling=0)

5.337.1 Detailed Description

_Functionality to split __sequence referenced by only input iterators. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file list_partition.h.

5.338 list_update_policy.hpp File Reference

Classes

- class __gnu_pbds::lu_counter_policy< Max_Count, _Alloc >
- class __gnu_pbds::lu_move_to_front_policy< _Alloc >

Namespaces

- __gnu_pbds

5.338.1 Detailed Description

Contains policies for list update containers.

Definition in file list_update_policy.hpp.

5.339 locale File Reference

Macros

- #define **_GLIBCXX_LOCALE**

5.339.1 Detailed Description

This is a Standard C++ Library header.

Definition in file locale.

5.340 locale_classes.h File Reference

Classes

- class std::collate< _CharT >
- class std::collate_byname< _CharT >
- class std::locale::facet
- class std::locale::id
- class std::locale

Namespaces

- std

5.340.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_classes.h.

5.341 locale_classes.tcc File Reference

Namespaces

- std

Macros

- #define **_LOCALE_CLASSES_TCC**

Functions

- template<typename _Facet >
  bool std::has_facet (const locale &__loc) throw ()
- template<typename _Facet >
  const _Facet & std::use_facet (const locale &__loc)

5.341.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_classes.tcc.

5.342 locale_conv.h File Reference

Classes

- class std::wbuffer_convert< _Codecvt, _Elem, _Tr >
- class std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >

Namespaces

- std

Functions

- template<typename _OutStr , typename _InChar , typename _Codecvt , typename _State , typename _Fn >
  bool **std::__do_str_codecvt** (const _InChar *__first, const _InChar *__last, _OutStr &__outstr, const _Codecvt &__cvt, _State &__state, size_t &__count, _Fn __fn)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)

- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_in_all** (const char *__first, const char *__last, basic_string< _CharT, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt, _State &__state, size_t &__count)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _State >
  bool **std::__str_codecvt_out_all** (const _CharT *__first, const _CharT *__last, basic_string< char, _Traits, _Alloc > &__outstr, const codecvt< _CharT, char, _State > &__cvt)

5.342.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_conv.h.

5.343 locale_facets.h File Reference

Classes

- class std::__ctype_abstract_base< _CharT >
- class std::ctype< _CharT >
- class std::ctype< char >
- class std::ctype< wchar_t >
- class std::ctype_byname< _CharT >
- class std::ctype_byname< char >
- class std::num_get< _CharT, _InIter >
- class std::num_put< _CharT, _OutIter >
- class std::numpunct< _CharT >
- class std::numpunct_byname< _CharT >

Namespaces

- std

Macros

- #define **_GLIBCXX_NUM_CXX11_FACETS**
- #define **_GLIBCXX_NUM_FACETS**
- #define **_GLIBCXX_NUM_UNICODE_FACETS**

Functions

- template<typename _CharT >
  _CharT * **std::__add_grouping** (_CharT *__s, _CharT __sep, const char *__gbeg, size_t __gsize, const _CharT *__first, const _CharT *__last)
- template<typename _Tp >
  void **std::__convert_to_v** (const char *, _Tp &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **std::__convert_to_v** (const char *, float &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **std::__convert_to_v** (const char *, double &, ios_base::iostate &, const __c_locale &) throw ()
- template<>
  void **std::__convert_to_v** (const char *, long double &, ios_base::iostate &, const __c_locale &) throw ()
- template<typename _CharT >
  ostreambuf_iterator< _CharT > **std::__write** (ostreambuf_iterator< _CharT > __s, const _CharT *__ws, int __len)
- template<typename _CharT , typename _OutIter >
  _OutIter **std::__write** (_OutIter __s, const _CharT *__ws, int __len)
- template<typename _CharT >
  bool std::isalnum (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isalpha (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isblank (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::iscntrl (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isdigit (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isgraph (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::islower (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isprint (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::ispunct (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isspace (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isupper (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isxdigit (_CharT __c, const locale &__loc)
- template<typename _CharT >
  _CharT std::tolower (_CharT __c, const locale &__loc)
- template<typename _CharT >
  _CharT std::toupper (_CharT __c, const locale &__loc)

5.343.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_facets.h.

5.344 locale_facets.tcc File Reference

Namespaces

- std

Macros

- #define **_LOCALE_FACETS_TCC**

Functions

- template<typename _CharT >
  _CharT * **std::__add_grouping** (_CharT *__s, _CharT __sep, const char *__gbeg, size_t __gsize, const _CharT *__first, const _CharT *__last)
- template<typename _CharT , typename _ValueT >
  int **std::__int_to_char** (_CharT *__bufend, _ValueT __v, const _CharT *__lit, ios_base::fmtflags __flags, bool __dec)
- bool **std::__verify_grouping** (const char *__grouping, size_t __grouping_size, const string &__grouping_tmp) throw ()

5.344.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_facets.tcc.

5.345 locale_facets_nonio.h File Reference

Classes

- class std::messages< _CharT >
- struct std::messages_base
- class std::messages_byname< _CharT >
- class std::money_base
- class std::money_get< _CharT, _InIter >
- class std::money_put< _CharT, _OutIter >
- class std::moneypunct< _CharT, _Intl >
- class std::moneypunct_byname< _CharT, _Intl >
- class std::time_base
- class std::time_get< _CharT, _InIter >
- class std::time_get_byname< _CharT, _InIter >
- class std::time_put< _CharT, _OutIter >
- class std::time_put_byname< _CharT, _OutIter >

Namespaces

- std

5.345.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_facets_nonio.h.

5.346 locale_facets_nonio.tcc File Reference

Namespaces

- std

Macros

- #define **_LOCALE_FACETS_NONIO_TCC**

5.346.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file locale_facets_nonio.tcc.

5.347 localefwd.h File Reference

Classes

- class std::codecvt< _InternT, _ExternT, _StateT >
- class std::codecvt_byname< _InternT, _ExternT, _StateT >
- class std::collate< _CharT >
- class std::collate_byname< _CharT >
- class std::ctype< _CharT >
- class std::ctype_byname< _CharT >
- class std::messages< _CharT >
- class std::messages_byname< _CharT >
- class std::money_get< _CharT, _InIter >
- class std::money_put< _CharT, _OutIter >
- class std::moneypunct< _CharT, _Intl >
- class std::moneypunct_byname< _CharT, _Intl >
- class std::num_get< _CharT, _InIter >
- class std::num_put< _CharT, _OutIter >
- class std::numpunct< _CharT >
- class std::numpunct_byname< _CharT >
- class std::time_get< _CharT, _InIter >
- class std::time_get_byname< _CharT, _InIter >
- class std::time_put< _CharT, _OutIter >
- class std::time_put_byname< _CharT, _OutIter >

Namespaces

- std

Functions

- template<typename _Facet >
  bool std::has_facet (const locale &__loc) throw ()
- template<typename _CharT >
  bool std::isalnum (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isalpha (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isblank (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::iscntrl (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isdigit (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isgraph (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::islower (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isprint (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::ispunct (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isspace (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isupper (_CharT __c, const locale &__loc)
- template<typename _CharT >
  bool std::isxdigit (_CharT __c, const locale &__loc)
- template<typename _CharT >
  _CharT std::tolower (_CharT __c, const locale &__loc)
- template<typename _CharT >
  _CharT std::toupper (_CharT __c, const locale &__loc)
- template<typename _Facet >
  const _Facet & std::use_facet (const locale &__loc)

5.347.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file localefwd.h.

5.348 losertree.h File Reference

Classes

- struct __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >::_Loser

- struct __gnu_parallel::_LoserTreeBase< _Tp, _Compare >::_Loser
- class __gnu_parallel::_LoserTree< __stable, _Tp, _Compare >
- class __gnu_parallel::_LoserTree< false, _Tp, _Compare >
- class __gnu_parallel::_LoserTreeBase< _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointer< __stable, _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointer< false, _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointerUnguarded< __stable, _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare >
- class __gnu_parallel::_LoserTreePointerUnguardedBase< _Tp, _Compare >
- class __gnu_parallel::_LoserTreeUnguarded< __stable, _Tp, _Compare >
- class __gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare >
- class __gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare >

Namespaces

- __gnu_parallel

5.348.1 Detailed Description

Many generic loser tree variants. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file losertree.h.

5.349 lu_counter_metadata.hpp File Reference

Classes

- class __gnu_pbds::detail::lu_counter_metadata< Size_Type >
- class __gnu_pbds::detail::lu_counter_policy_base< Size_Type >
- class __gnu_pbds::detail::lu_counter_policy_base< Size_Type >

Namespaces

- __gnu_pbds

5.349.1 Detailed Description

Contains implementation of a lu counter policy's metadata.

Definition in file lu_counter_metadata.hpp.

5.350 lu_map_.hpp File Reference

Classes

- class __gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_GEN_POS**
- #define **PB_DS_LU_NAME**
- #define **PB_DS_LU_TRAITS_BASE**

5.350.1 Detailed Description

Contains a list update map.

Definition in file lu_map_.hpp.

5.351 macros.h File Reference

Macros

- #define **__glibcxx_check_bucket_index**(_N)
- #define **__glibcxx_check_can_decrement_range**(_First1, _Last1, _First2)
- #define **__glibcxx_check_can_increment**(_First, _Size)
- #define **__glibcxx_check_can_increment_range**(_First1, _Last1, _First2)
- #define **__glibcxx_check_equal_allocs**(_This, _Other)
- #define __glibcxx_check_erase(_Position)
- #define __glibcxx_check_erase_after(_Position)
- #define __glibcxx_check_erase_range(_First, _Last)
- #define __glibcxx_check_erase_range_after(_First, _Last)
- #define **__glibcxx_check_heap**(_First, _Last)
- #define __glibcxx_check_heap_pred(_First, _Last, _Pred)
- #define __glibcxx_check_insert(_Position)
- #define __glibcxx_check_insert_after(_Position)
- #define __glibcxx_check_insert_range(_Position, _First, _Last, _Dist)
- #define __glibcxx_check_insert_range_after(_Position, _First, _Last, _Dist)
- #define **__glibcxx_check_irreflexive**(_First, _Last)
- #define **__glibcxx_check_irreflexive2**(_First, _Last)
- #define **__glibcxx_check_irreflexive_pred**(_First, _Last, _Pred)
- #define **__glibcxx_check_irreflexive_pred2**(_First, _Last, _Pred)
- #define **__glibcxx_check_max_load_factor**(_F)
- #define **__glibcxx_check_non_empty_range**(_First, _Last)
- #define **__glibcxx_check_nonempty**()
- #define __glibcxx_check_partitioned_lower(_First, _Last, _Value)
- #define __glibcxx_check_partitioned_lower_pred(_First, _Last, _Value, _Pred)
- #define **__glibcxx_check_partitioned_upper**(_First, _Last, _Value)
- #define __glibcxx_check_partitioned_upper_pred(_First, _Last, _Value, _Pred)
- #define **__glibcxx_check_self_move_assign**(_Other)
- #define **__glibcxx_check_sorted**(_First, _Last)

- #define __glibcxx_check_sorted_pred(_First, _Last, _Pred)
- #define **__glibcxx_check_sorted_set**(_First1, _Last1, _First2)
- #define **__glibcxx_check_sorted_set_pred**(_First1, _Last1, _First2, _Pred)
- #define **__glibcxx_check_string**(_String)
- #define **__glibcxx_check_string_len**(_String, _Len)
- #define **__glibcxx_check_subscript**(_N)
- #define **__glibcxx_check_valid_constructor_range**(_First, _Last)
- #define **__glibcxx_check_valid_range**(_First, _Last)
- #define **__glibcxx_check_valid_range2**(_First, _Last, _Dist)
- #define **__glibcxx_check_valid_range_at**(_First, _Last, _File, _Line, _Func)
- #define **_GLIBCXX_DEBUG_VERIFY**(_Cond, _ErrMsg)
- #define **_GLIBCXX_DEBUG_VERIFY_AT**(_Cond, _ErrMsg, _File, _Line)
- #define **_GLIBCXX_DEBUG_VERIFY_AT_F**(_Cond, _ErrMsg, _File, _Line, _Func)
- #define _GLIBCXX_DEBUG_VERIFY_COND_AT(_Cond, _ErrMsg, _File, _Line, _Func)

5.351.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file macros.h.

5.351.2 Macro Definition Documentation

5.351.2.1 #define __glibcxx_check_erase(*_Position*)

Verify that we can erase the element referenced by the iterator _Position. We can erase the element if the _Position iterator is dereferenceable and references this sequence.

Definition at line 216 of file macros.h.

5.351.2.2 #define __glibcxx_check_erase_after(*_Position*)

Verify that we can erase the element after the iterator _Position. We can erase the element if the _Position iterator is before a dereferenceable one and references this sequence.

Definition at line 230 of file macros.h.

5.351.2.3 #define __glibcxx_check_erase_range(*_First, _Last*)

Verify that we can erase the elements in the iterator range [_First, _Last). We can erase the elements if [_First, _Last) is a valid iterator range within this sequence.

Definition at line 244 of file macros.h.

5.351.2.4 #define __glibcxx_check_erase_range_after(*_First, _Last*)

Verify that we can erase the elements in the iterator range (_First, _Last). We can erase the elements if (_First, _Last) is a valid iterator range within this sequence.

Definition at line 256 of file macros.h.

5.351.2.5 #define __glibcxx_check_heap_pred(*_First, _Last, _Pred*)

Verify that the iterator range [_First, _Last) is a heap w.r.t. the predicate _Pred.

Definition at line 441 of file macros.h.

5.351.2.6 #define __glibcxx_check_insert(_Position)

Verify that we can insert into ∗this with the iterator _Position. Insertion into a container at a specific position requires that the iterator be nonsingular, either dereferenceable or past-the-end, and that it reference the sequence we are inserting into. Note that this macro is only valid when the container is a_Safe_sequence and the iterator is a _Safe_iterator.

Definition at line 150 of file macros.h.

5.351.2.7 #define __glibcxx_check_insert_after(_Position)

Verify that we can insert into ∗this after the iterator _Position. Insertion into a container after a specific position requires that the iterator be nonsingular, either dereferenceable or before-begin, and that it reference the sequence we are inserting into. Note that this macro is only valid when the container is a_Safe_sequence and the iterator is a _Safe_-iterator.

Definition at line 167 of file macros.h.

5.351.2.8 #define __glibcxx_check_insert_range(_Position, _First, _Last, _Dist)

Verify that we can insert the values in the iterator range [_First, _Last) into ∗this with the iterator _Position. Insertion into a container at a specific position requires that the iterator be nonsingular (i.e., either dereferenceable or past-the-end), that it reference the sequence we are inserting into, and that the iterator range [_First, _Last) is a valid (possibly empty) range which does not reference the sequence we are inserting into. Note that this macro is only valid when the container is a _Safe_sequence and the _Position iterator is a _Safe_iterator.

Definition at line 184 of file macros.h.

5.351.2.9 #define __glibcxx_check_insert_range_after(_Position, _First, _Last, _Dist)

Verify that we can insert the values in the iterator range [_First, _Last) into ∗this after the iterator _Position. Insertion into a container after a specific position requires that the iterator be nonsingular (i.e., either dereferenceable or past-the-end), that it reference the sequence we are inserting into, and that the iterator range [_First, _Last) is a valid (possibly empty) range which does not reference the sequence we are inserting into. Note that this macro is only valid when the container is a _Safe_sequence and the _Position iterator is a _Safe_iterator.

Definition at line 203 of file macros.h.

5.351.2.10 #define __glibcxx_check_partitioned_lower(_First, _Last, _Value)

Verify that the iterator range [_First, _Last) is partitioned w.r.t. the value _Value.

Definition at line 385 of file macros.h.

5.351.2.11 #define __glibcxx_check_partitioned_lower_pred(_First, _Last, _Value, _Pred)

Verify that the iterator range [_First, _Last) is partitioned w.r.t. the value _Value and predicate _Pred.

Definition at line 407 of file macros.h.

5.351.2.12 #define __glibcxx_check_partitioned_upper_pred(_First, _Last, _Value, _Pred)

Verify that the iterator range [_First, _Last) is partitioned w.r.t. the value _Value and predicate _Pred.

Definition at line 420 of file macros.h.

5.351.2.13 #define __glibcxx_check_sorted_pred(_First, _Last, _Pred)

Verify that the iterator range [_First, _Last) is sorted by the predicate _Pred.

Definition at line 350 of file macros.h.

5.351.2.14 #define _GLIBCXX_DEBUG_VERIFY_COND_AT(_Cond, _ErrMsg, _File, _Line, _Func)

Macros used by the implementation to verify certain properties. These macros may only be used directly by the debug wrappers. Note that these are macros (instead of the more obviously *correct* choice of making them functions) because we need line and file information at the call site, to minimize the distance between the user error and where the error is reported.

Definition at line 50 of file macros.h.

5.352 malloc_allocator.h File Reference

Classes

- class __gnu_cxx::malloc_allocator< _Tp >

Namespaces

- __gnu_cxx

5.352.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file malloc_allocator.h.

5.353 map File Reference

Macros

- #define **_GLIBCXX_MAP**

5.353.1 Detailed Description

This is a Standard C++ Library header.

Definition in file map.

5.354 map File Reference

Classes

- class std::__debug::map< _Key, _Tp, _Compare, _Allocator >
- class std::__debug::multimap< _Key, _Tp, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_MAP**

5.354.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/map.

5.355 map File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_MAP**

Typedefs

- template<typename _Key , typename _Tp , typename _Compare = less<_Key>>
  using **std::experimental::fundamentals_v2::pmr::map** = std::map< _Key, _Tp, _Compare, polymorphic_allocator< pair< const _Key, _Tp >>>
- template<typename _Key , typename _Tp , typename _Compare = less<_Key>>
  using **std::experimental::fundamentals_v2::pmr::multimap** = std::multimap< _Key, _Tp, _Compare, polymorphic_allocator< pair< const _Key, _Tp >>>

Functions

- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (map< _Key, _Tp, _Compare, _Alloc > &__cont, _Predicate __pred)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (multimap< _Key, _Tp, _Compare, _Alloc > &__cont, _Predicate __pred)

5.355.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/map.

5.356 map.h File Reference

Classes

- class std::__debug::map< _Key, _Tp, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Functions

- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator!=** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<=** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator==** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>=** (const map< _Key, _Tp, _Compare, _Allocator > &__lhs, const map< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  void **std::__debug::swap** (map< _Key, _Tp, _Compare, _Allocator > &__lhs, map< _Key, _Tp, _Compare, _Allocator > &__rhs) noexcept(/*conditional */)

5.356.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file map.h.

5.357 mask_array.h File Reference

Classes

- class std::mask_array< _Tp >

Namespaces

- std

Macros

- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)

5.357.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file mask_array.h.

5.358 mask_based_range_hashing.hpp File Reference

Classes

- class __gnu_pbds::detail::mask_based_range_hashing< Size_Type >

Namespaces

- __gnu_pbds

5.358.1 Detailed Description

Contains a range hashing policy base.

Definition in file mask_based_range_hashing.hpp.

5.359 math.h File Reference

5.359.1 Detailed Description

This is a Standard C++ Library header.

Definition in file math.h.

5.360 memory File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_MEMORY**

Enumerations

- enum std::pointer_safety { **relaxed**, **preferred**, **strict** }

Functions

- void * std::align (size_t __align, size_t __size, void *&__ptr, size_t &__space) noexcept
- void std::declare_no_pointers (char *, size_t)

- void std::declare_reachable (void *)
- pointer_safety std::get_pointer_safety () noexcept
- void std::undeclare_no_pointers (char *, size_t)
- template<typename _Tp >
  _Tp * std::undeclare_reachable (_Tp *__p)

5.360.1 Detailed Description

This is a Standard C++ Library header.

Definition in file memory.

5.361 memory File Reference

Classes

- struct __gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_MEMORY**

Functions

- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter,
  _ForwardIter > **__gnu_cxx::__uninitialized_copy_n** (_InputIter __first, _Size __count, _ForwardIter __result, std::input_iterator_tag)
- template<typename _RandomAccessIter , typename _Size , typename _ForwardIter >
  std::pair< _RandomAccessIter,
  _ForwardIter > **__gnu_cxx::__uninitialized_copy_n** (_RandomAccessIter __first, _Size __count, _ForwardIter __result, std::random_access_iterator_tag)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter,
  _ForwardIter > **__gnu_cxx::__uninitialized_copy_n** (_InputIter __first, _Size __count, _ForwardIter __result)
- template<typename _InputIter , typename _Size , typename _ForwardIter , typename _Allocator >
  std::pair< _InputIter,
  _ForwardIter > **__gnu_cxx::__uninitialized_copy_n_a** (_InputIter __first, _Size __count, _ForwardIter __result, _Allocator __alloc)
- template<typename _InputIter , typename _Size , typename _ForwardIter , typename _Tp >
  std::pair< _InputIter,
  _ForwardIter > **__gnu_cxx::__uninitialized_copy_n_a** (_InputIter __first, _Size __count, _ForwardIter __result, std::allocator< _Tp >)
- template<typename _InputIter , typename _Size , typename _ForwardIter >
  std::pair< _InputIter,
  _ForwardIter > __gnu_cxx::uninitialized_copy_n (_InputIter __first, _Size __count, _ForwardIter __result)

5.361.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file ext/memory.

5.362 memory File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_observer_ptr**
- #define **_GLIBCXX_EXPERIMENTAL_MEMORY**

Functions

- template<typename _Tp >
  observer_ptr< _Tp > **std::experimental::fundamentals_v2::make_observer** (_Tp *__p) noexcept
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator!=** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator!=** (observer_ptr< _Tp > __p, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator!=** (nullptr_t, observer_ptr< _Tp > __p) noexcept
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator<** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator<=** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator==** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator==** (observer_ptr< _Tp > __p, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator==** (nullptr_t, observer_ptr< _Tp > __p) noexcept
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator>** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp , typename _Up >
  bool **std::experimental::fundamentals_v2::operator>=** (observer_ptr< _Tp > __p1, observer_ptr< _Up > __p2)
- template<typename _Tp >
  void **std::experimental::fundamentals_v2::swap** (observer_ptr< _Tp > &__p1, observer_ptr< _Tp > &__p2) noexcept

5.362.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/memory.

5.363 memory_resource File Reference

Macros

- #define **_GLIBCXX_MEMORY_RESOURCE**

5.363.1 Detailed Description

This is a Standard C++ Library header.

Definition in file memory_resource.

5.364 memory_resource File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_memory_resources**
- #define **_GLIBCXX_EXPERIMENTAL_MEMORY_RESOURCE**

Typedefs

- template<typename _Alloc >
  using **std::experimental::fundamentals_v2::pmr::resource_adaptor** = __resource_adaptor_imp< typename allocator_traits< _Alloc >::template rebind_alloc< char >>

Functions

- memory_resource * **std::experimental::fundamentals_v2::pmr::get_default_resource** () noexcept
- memory_resource * **std::experimental::fundamentals_v2::pmr::new_delete_resource** () noexcept
- memory_resource * **std::experimental::fundamentals_v2::pmr::null_memory_resource** () noexcept
- bool **std::experimental::fundamentals_v2::pmr::operator!=** (const memory_resource &__a, const memory_resource &__b) noexcept
- template<class _Tp1 , class _Tp2 >
  bool **std::experimental::fundamentals_v2::pmr::operator!=** (const polymorphic_allocator< _Tp1 > &__a, const polymorphic_allocator< _Tp2 > &__b) noexcept
- bool **std::experimental::fundamentals_v2::pmr::operator==** (const memory_resource &__a, const memory_resource &__b) noexcept

- template<class _Tp1 , class _Tp2 >
  bool **std::experimental::fundamentals_v2::pmr::operator==** (const polymorphic_allocator< _Tp1 > &__a, const polymorphic_allocator< _Tp2 > &__b) noexcept
- memory_resource * **std::experimental::fundamentals_v2::pmr::set_default_resource** (memory_resource *__r) noexcept

5.364.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/memory_resource.

5.365 memoryfwd.h File Reference

Classes

- class std::allocator< _Tp >
- struct std::uses_allocator< typename, typename >

Namespaces

- std

5.365.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file memoryfwd.h.

5.366 merge.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __gnu_parallel::__merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __gnu_parallel::__merge_advance_movc (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __gnu_parallel::__merge_advance_usual (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<typename _RAIter1 , typename _RAIter2 , typename _RAIter3 , typename _Compare >
  _RAIter3 __gnu_parallel::__parallel_merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _RAIter3 __target, typename std::iterator_traits< _RAIter1 >::difference_type __max_length, _Compare __comp)

- template<typename _RAIter1 , typename _RAIter3 , typename _Compare > _RAIter3 __gnu_parallel::__parallel_merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter1 &__begin2, _RAIter1 __end2, _RAIter3 __target, typename std::iterator_traits< _RAIter1 >::difference_type __max_length, _Compare __comp)

5.366.1 Detailed Description

Parallel implementation of std::merge(). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file merge.h.

5.367 messages_members.h File Reference

Namespaces

- std

5.367.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file messages_members.h.

5.368 mod_based_range_hashing.hpp File Reference

Classes

- class __gnu_pbds::detail::mod_based_range_hashing< Size_Type >

Namespaces

- __gnu_pbds

5.368.1 Detailed Description

Contains a range hashing policy base.

Definition in file mod_based_range_hashing.hpp.

5.369 move.h File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_FORWARD**(_Tp, __val)
- #define **_GLIBCXX_MOVE**(__val)

Functions

- template<typename _Tp >
  constexpr _Tp * std::__addressof (_Tp &__r) noexcept
- template<typename _Tp , typename _Up = _Tp>
  constexpr _Tp **std::__exchange** (_Tp &__obj, _Up &&__new_val)
- template<typename _Tp >
  constexpr _Tp * std::addressof (_Tp &__r) noexcept
- template<typename _Tp >
  const _Tp * **std::addressof** (const _Tp &&)=delete
- template<typename _Tp >
  constexpr _Tp && std::forward (typename std::remove_reference< _Tp >::type &__t) noexcept
- template<typename _Tp >
  constexpr _Tp && std::forward (typename std::remove_reference< _Tp >::type &&__t) noexcept
- template<typename _Tp >
  constexpr
  std::remove_reference< _Tp >
  ::type && std::move (_Tp &&__t) noexcept
- template<typename _Tp >
  constexpr conditional
  < __move_if_noexcept_cond< _Tp >
  ::value, const _Tp &, _Tp && >
  ::type std::move_if_noexcept (_Tp &__x) noexcept
- template<typename _Tp >
  constexpr enable_if< __and_
  < __not_< __is_tuple_like< _Tp >
  >, is_move_constructible< _Tp >
  , is_move_assignable< _Tp >
  >::value >::type std::swap (_Tp &__a, _Tp &__b) noexcept(/*conditional */) is_nothrow_move_assignable< _Tp
  >>
- template<typename _Tp , size_t _Nm>
  constexpr enable_if
  < __is_swappable< _Tp >::value >
  ::type std::swap (_Tp(&__a)[_Nm], _Tp(&__b)[_Nm]) noexcept(/*conditional */)

5.369.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <utility>.

Definition in file move.h.

5.370 mt_allocator.h File Reference

Classes

- struct __gnu_cxx::__common_pool_policy< _PoolTp, _Thread >
- class __gnu_cxx::__mt_alloc< _Tp, _Poolp >
- class __gnu_cxx::__mt_alloc_base< _Tp >
- struct __gnu_cxx::__per_type_pool_policy< _Tp, _PoolTp, _Thread >
- class __gnu_cxx::__pool< _Thread >
- class __gnu_cxx::__pool< false >

- class __gnu_cxx::__pool< true >
- struct __gnu_cxx::__pool_base

Namespaces

- __gnu_cxx

Macros

- #define **__thread_default**

Typedefs

- typedef void(* **__gnu_cxx::__destroy_handler**)(void *)

Functions

- template<typename _Tp , typename _Poolp >
  bool **__gnu_cxx::operator!=** (const __mt_alloc< _Tp, _Poolp > &, const __mt_alloc< _Tp, _Poolp > &)
- template<typename _Tp , typename _Poolp >
  bool **__gnu_cxx::operator==** (const __mt_alloc< _Tp, _Poolp > &, const __mt_alloc< _Tp, _Poolp > &)

5.370.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file mt_allocator.h.

5.371 multimap.h File Reference

Classes

- class std::__debug::multimap< _Key, _Tp, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Functions

- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator!=** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)

- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<=** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator==** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>=** (const multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, const multimap< _Key, _Tp, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Tp , typename _Compare , typename _Allocator >
  void **std::__debug::swap** (multimap< _Key, _Tp, _Compare, _Allocator > &__lhs, multimap< _Key, _Tp, _Compare, _Allocator > &__rhs) noexcept(/*conditional */)

5.371.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file multimap.h.

5.372 multiseq_selection.h File Reference

Classes

- class __gnu_parallel::_Lexicographic< _T1, _T2, _Compare >
- class __gnu_parallel::_LexicographicReverse< _T1, _T2, _Compare >

Namespaces

- __gnu_parallel

Macros

- #define **__S**(__i)
- #define **__S**(__i)

Functions

- template<typename _RanSeqs , typename _RankType , typename _RankIterator , typename _Compare >
  void __gnu_parallel::multiseq_partition (_RanSeqs __begin_seqs, _RanSeqs __end_seqs, _RankType __rank, _RankIterator __begin_offsets, _Compare __comp=std::less< typename std::iterator_traits< typename std::iterator_traits< _RanSeqs >::value_type::first_type >::value_type >())
- template<typename _Tp , typename _RanSeqs , typename _RankType , typename _Compare >
  _Tp __gnu_parallel::multiseq_selection (_RanSeqs __begin_seqs, _RanSeqs __end_seqs, _RankType __rank, _RankType &__offset, _Compare __comp=std::less< _Tp >())

5.372.1 Detailed Description

Functions to find elements of a certain global __rank in multiple sorted sequences. Also serves for splitting such sequence sets. The algorithm description can be found in

P. J. Varman, S. D. Scheufler, B. R. Iyer, and G. R. Ricard. Merging Multiple Lists on Hierarchical-Memory Multiprocessors. Journal of Parallel and Distributed Computing, 12(2):171-177, 1991.

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file multiseq_selection.h.

5.373 multiset.h File Reference

Classes

- class std::__debug::multiset< _Key, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Functions

- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator!=** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<=** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator==** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>=** (const multiset< _Key, _Compare, _Allocator > &__lhs, const multiset< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  void **std::__debug::swap** (multiset< _Key, _Compare, _Allocator > &__x, multiset< _Key, _Compare, _Allocator > &__y) noexcept(/*conditional */)

5.373.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file multiset.h.

5.374 multiway_merge.h File Reference

Classes

- struct __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __gnu_parallel::__multiway_merge_3_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< __sentinels, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __gnu_parallel::__multiway_merge_4_variant_sentinel_switch< true, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< __sentinels, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- struct __gnu_parallel::__multiway_merge_k_variant_sentinel_switch< false, __stable, _RAIterIterator, _RAIter3, _DifferenceTp, _Compare >
- class __gnu_parallel::_GuardedIterator< _RAIter, _Compare >
- struct __gnu_parallel::_LoserTreeTraits< _Tp >
- struct __gnu_parallel::_SamplingSorter< __stable, _RAIter, _StrictWeakOrdering >
- struct __gnu_parallel::_SamplingSorter< false, _RAIter, _StrictWeakOrdering >

Namespaces

- __gnu_parallel

Macros

- #define **_GLIBCXX_PARALLEL_DECISION**(__a, __b, __c, __d)
- #define _GLIBCXX_PARALLEL_LENGTH(__s)
- #define **_GLIBCXX_PARALLEL_MERGE_3_CASE**(__a, __b, __c, __c0, __c1)
- #define **_GLIBCXX_PARALLEL_MERGE_4_CASE**(__a, __b, __c, __d,__c0, __c1, __c2)

Functions

- template<typename _RAIter1 , typename _RAIter2 , typename _OutputIterator , typename _DifferenceTp , typename _Compare >
  _OutputIterator __gnu_parallel::__merge_advance (_RAIter1 &__begin1, _RAIter1 __end1, _RAIter2 &__begin2, _RAIter2 __end2, _OutputIterator __target, _DifferenceTp __max_length, _Compare __comp)
- template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::__sequential_multiway_merge (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut __gnu_parallel::multiway_merge (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sampling_tag __tag)

- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::multiway_merge_3_variant (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<template< typename _RAI, typename _Cp > class iterator, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::multiway_merge_4_variant (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType >
  void __gnu_parallel::multiway_merge_exact_splitting (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _DifferenceType __length, _DifferenceType __total_length, _Compare __comp, std::vector< std::pair< _DifferenceType, _DifferenceType > > *__pieces)
- template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::multiway_merge_loser_tree (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, _DifferenceTp __length, _Compare __comp)
- template<typename _UnguardedLoserTree , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::multiway_merge_loser_tree_sentinel (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<typename _LT , typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Compare >
  _RAIter3 __gnu_parallel::multiway_merge_loser_tree_unguarded (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _RAIter3 __target, const typename std::iterator_traits< typename std::iterator_traits< _RAIterIterator >::value_type::first_type >::value_type &__sentinel, _DifferenceTp __length, _Compare __comp)
- template<bool __stable, typename _RAIterIterator , typename _Compare , typename _DifferenceType >
  void __gnu_parallel::multiway_merge_sampling_splitting (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end, _DifferenceType __length, _DifferenceType __total_length, _Compare __comp, std::vector< std::pair< _DifferenceType, _DifferenceType > > *__pieces)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut __gnu_parallel::multiway_merge_sentinels (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare >
  _RAIterOut **__gnu_parallel::multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<bool __stable, bool __sentinels, typename _RAIterIterator , typename _RAIter3 , typename _DifferenceTp , typename _Splitter , typename _Compare >
  _RAIter3 __gnu_parallel::parallel_multiway_merge (_RAIterIterator __seqs_begin, _RAIterIterator __seqs_end,

_RAIter3 __target, _Splitter __splitter, _DifferenceTp __length, _Compare __comp, _ThreadIndex __num_threads)

- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::sequential_tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, __gnu_parallel::exact_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, sampling_tag __tag)
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, parallel_tag __tag=parallel_tag(0))
- template<typename _RAIterPairIterator , typename _RAIterOut , typename _DifferenceTp , typename _Compare > _RAIterOut **__gnu_parallel::stable_multiway_merge_sentinels** (_RAIterPairIterator __seqs_begin, _RAIterPairIterator __seqs_end, _RAIterOut __target, _DifferenceTp __length, _Compare __comp, default_parallel_tag __tag)

5.374.1 Detailed Description

Implementation of sequential and parallel multiway merge. Explanations on the high-speed merging routines in the appendix of

P. Sanders. Fast priority queues for cached memory. ACM Journal of Experimental Algorithmics, 5, 2000.

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file multiway_merge.h.

5.374.2 Macro Definition Documentation

5.374.2.1 #define _GLIBCXX_PARALLEL_LENGTH(*__s*)

Length of a sequence described by a pair of iterators.

Definition at line 54 of file multiway_merge.h.

Referenced by __gnu_parallel::__sequential_multiway_merge(), __gnu_parallel::multiway_merge_exact_splitting(), __gnu_parallel::multiway_merge_loser_tree(), __gnu_parallel::multiway_merge_sampling_splitting(), and __gnu_parallel::parallel_multiway_merge().

5.375 multiway_mergesort.h File Reference

Classes

- struct __gnu_parallel::_Piece< _DifferenceTp >
- struct __gnu_parallel::_PMWMSSortingData< _RAIter >
- struct __gnu_parallel::_SplitConsistently< __exact, _RAIter, _Compare, _SortingPlacesIterator >
- struct __gnu_parallel::_SplitConsistently< false, _RAIter, _Compare, _SortingPlacesIterator >
- struct __gnu_parallel::_SplitConsistently< true, _RAIter, _Compare, _SortingPlacesIterator >

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _DifferenceTp >
  void __gnu_parallel::__determine_samples (_PMWMSSortingData< _RAIter > *__sd, _DifferenceTp __num_samples)
- template<bool __stable, bool __exact, typename _RAIter , typename _Compare >
  void __gnu_parallel::parallel_sort_mwms (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<bool __stable, bool __exact, typename _RAIter , typename _Compare >
  void __gnu_parallel::parallel_sort_mwms_pu (_PMWMSSortingData< _RAIter > *__sd, _Compare &__comp)

5.375.1 Detailed Description

Parallel multiway merge sort. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file multiway_mergesort.h.

5.376 mutex File Reference

Classes

- struct std::once_flag
- class std::recursive_mutex
- class std::recursive_timed_mutex
- class std::timed_mutex

Namespaces

- std

Macros

- #define **_GLIBCXX_MUTEX**

Functions

- template<typename _Callable , typename... _Args>
  void std::call_once (once_flag &__once, _Callable &&__f, _Args &&...__args)
- template<typename _L1 , typename _L2 , typename... _L3>
  void std::lock (_L1 &__l1, _L2 &__l2, _L3 &...__l3)
- template<typename _Lock1 , typename _Lock2 , typename... _Lock3>
  int std::try_lock (_Lock1 &__l1, _Lock2 &__l2, _Lock3 &...__l3)

5.376.1 Detailed Description

This is a Standard C++ Library header.

Definition in file mutex.

5.377 nested_exception.h File Reference

Classes

- class std::nested_exception

Namespaces

- std

Functions

- template<typename _Ex >
  void std::rethrow_if_nested (const _Ex &__ex)
- template<typename _Tp >
  void std::throw_with_nested (_Tp &&__t)

5.377.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <exception>.

Definition in file nested_exception.h.

5.378 net.h File Reference

Namespaces

- std
- std::experimental

5.378.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <experimental/net>.

Definition in file net.h.

5.379 new File Reference

Classes

- class std::bad_alloc

Namespaces

- std

Typedefs

- typedef void(* std::new_handler)()

Functions

- new_handler std::get_new_handler () noexcept
- new_handler std::set_new_handler (new_handler) throw ()

- void * operator new (std::size_t)
- void * operator new[] (std::size_t)
- void operator delete (void *) noexcept
- void operator delete[] (void *) noexcept
- void * operator new (std::size_t, const std::nothrow_t &) noexcept
- void * operator new[] (std::size_t, const std::nothrow_t &) noexcept
- void operator delete (void *, const std::nothrow_t &) noexcept
- void operator delete[] (void *, const std::nothrow_t &) noexcept
- void * operator new (std::size_t, void *__p) noexcept
- void * operator new[] (std::size_t, void *__p) noexcept
- void operator delete (void *, void *) noexcept
- void operator delete[] (void *, void *) noexcept

Variables

- const nothrow_t **std::nothrow**

5.379.1 Detailed Description

This is a Standard C++ Library header.

The header `new` defines several functions to manage dynamic memory and handling memory allocation errors; see https://gcc.gnu.org/onlinedocs/libstdc++/manual/dynamic_memory.html for more.

Definition in file new.

5.379.2 Function Documentation

5.379.2.1 void operator delete (void *) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.2 void operator delete (void *, const std::nothrow_t &) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.3 void operator delete (void *, void *) [inline], [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

Definition at line 180 of file new.

5.379.2.4 void operator delete[] (void *) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.5 void operator delete[] (void *, const std::nothrow_t &) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.6 void operator delete[] (void *, void *) [inline], [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

Definition at line 181 of file new.

5.379.2.7 void* operator new (std::size_t)

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.8 void* operator new (std::size_t , const std::nothrow_t &) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.9 void* operator new (std::size_t , void * __p) [inline], [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

Definition at line 174 of file new.

5.379.2.10 void* operator new[] (std::size_t)

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.11 void* operator new[] (std::size_t , const std::nothrow_t &) [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

5.379.2.12 void* operator new[] (std::size_t , void * __p) [inline], [noexcept]

These are replaceable signatures:

- normal single new and delete (no arguments, throw bad_alloc on error)
- normal array new and delete (same)
- nothrow single new and delete (take a nothrow argument, return NULL on error)
- nothrow array new and delete (same)

Placement new and delete signatures (take a memory address argument, does nothing) may not be replaced by a user's program.

Definition at line 176 of file new.

5.380 new_allocator.h File Reference

Classes

- class __gnu_cxx::new_allocator< _Tp >

Namespaces

- __gnu_cxx

5.380.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file new_allocator.h.

5.381 node.hpp File Reference

Classes

- struct __gnu_pbds::detail::left_child_next_sibling_heap_node_< _Value, _Metadata, _Alloc >

Namespaces

- __gnu_pbds

5.381.1 Detailed Description

Contains an implementation struct for this type of heap's node.

Definition in file left_child_next_sibling_heap_/node.hpp.

5.382 node.hpp File Reference

Classes

- struct __gnu_pbds::detail::rb_tree_node_< Value_Type, Metadata, _Alloc >

Namespaces

- __gnu_pbds

5.382.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/node.hpp.

5.383 node.hpp File Reference

Classes

- struct __gnu_pbds::detail::splay_tree_node_< Value_Type, Metadata, _Alloc >

Namespaces

- __gnu_pbds

5.383.1 Detailed Description

Contains an implementation struct for splay_tree_'s node.

Definition in file splay_tree_/node.hpp.

5.384 node_handle.h File Reference

5.384.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <map,set,unordered_map,unordered_set>.

Definition in file node_handle.h.

5.385 node_iterators.hpp File Reference

Classes

- class __gnu_pbds::detail::bin_search_tree_const_node_it_< Node, Const_Iterator, Iterator, _Alloc >
- class __gnu_pbds::detail::bin_search_tree_node_it_< Node, Const_Iterator, Iterator, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_TREE_CONST_NODE_ITERATOR_CLASS_C_DEC**
- #define **PB_DS_TREE_NODE_ITERATOR_CLASS_C_DEC**

5.385.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/node_iterators.hpp.

5.386 node_iterators.hpp File Reference

Classes

- class __gnu_pbds::detail::ov_tree_node_const_it_< Value_Type, Metadata_Type, _Alloc >
- class __gnu_pbds::detail::ov_tree_node_it_< Value_Type, Metadata_Type, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_OV_TREE_CONST_NODE_ITERATOR_C_DEC**
- #define **PB_DS_OV_TREE_NODE_ITERATOR_C_DEC**

5.386.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/node_iterators.hpp.

5.387 node_metadata_selector.hpp File Reference

Classes

- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp >
- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, false >
- struct __gnu_pbds::detail::tree_metadata_helper< Node_Update, true >
- struct __gnu_pbds::detail::tree_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >

Namespaces

- __gnu_pbds

5.387.1 Detailed Description

Contains an implementation class for trees.

Definition in file tree_policy/node_metadata_selector.hpp.

5.388 node_metadata_selector.hpp File Reference

Classes

- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp >
- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, false >
- struct __gnu_pbds::detail::trie_metadata_helper< Node_Update, true >
- struct __gnu_pbds::detail::trie_node_metadata_dispatch< Key, Data, Cmp_Fn, Node_Update, _Alloc >

Namespaces

- __gnu_pbds

5.388.1 Detailed Description

Contains an implementation class for tries.

Definition in file trie_policy/node_metadata_selector.hpp.

5.389 null_node_metadata.hpp File Reference

Classes

- struct __gnu_pbds::detail::dumnode_const_iterator< Key, Data, _Alloc >

Namespaces

- __gnu_pbds

5.389.1 Detailed Description

Contains an implementation class for tree-like classes.

Definition in file null_node_metadata.hpp.

5.390 numbers File Reference

Macros

- #define **_GLIBCXX_NUMBERS**

5.390.1 Detailed Description

This is a Standard C++ Library header.

Definition in file numbers.

5.391 numeric File Reference

Namespaces

- std
- std::__detail

Macros

- #define **_GLIBCXX_NUMERIC**

Functions

- template<typename _Up , typename _Tp >
  constexpr _Up **std::__detail::__absu** (_Tp __val)
- template<typename _Up >
  void **std::__detail::__absu** (bool)=delete
- template<typename _Tp >
  constexpr _Tp **std::__detail::__gcd** (_Tp __m, _Tp __n)
- template<typename _Tp >
  constexpr _Tp **std::__detail::__lcm** (_Tp __m, _Tp __n)

5.391.1 Detailed Description

This is a Standard C++ Library header.

Definition in file numeric.

5.392 numeric File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_NUMERIC**

Functions

- template<typename _Tp , typename _Integer , typename _MonoidOperation >
  _Tp **__gnu_cxx::__power** (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)
- template<typename _Tp , typename _Integer >
  _Tp **__gnu_cxx::__power** (_Tp __x, _Integer __n)
- template<typename _Tp , typename _Integer , typename _MonoidOperation >
  _Tp __gnu_cxx::power (_Tp __x, _Integer __n, _MonoidOperation __monoid_op)
- template<typename _Tp , typename _Integer >
  _Tp __gnu_cxx::power (_Tp __x, _Integer __n)

5.392.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file ext/numeric.

5.393 numeric File Reference

Namespaces

- std
- std::__parallel

Macros

- #define **_GLIBCXX_PARALLEL_NUMERIC_H**

Functions

- template<typename _IIter , typename _Tp , typename _IteratorTag >
  _Tp **std::__parallel::__accumulate_switch** (_IIter __begin, _IIter __end, _Tp __init, _IteratorTag)
- template<typename _IIter , typename _Tp , typename _BinaryOperation , typename _IteratorTag >
  _Tp **std::__parallel::__accumulate_switch** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, _IteratorTag)
- template<typename __RAIter , typename _Tp , typename _BinaryOperation >
  _Tp **std::__parallel::__accumulate_switch** (__RAIter __begin, __RAIter __end, _Tp __init, _BinaryOperation __binary_op, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
  _OutputIterator **std::__parallel::__adjacent_difference_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **std::__parallel::__adjacent_difference_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _RAIter1 , typename _RAIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **std::__parallel::__inner_product_switch** (_RAIter1, _RAIter1, _RAIter2, _Tp, _BinaryFunction1, _BinaryFunction2, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 , typename _IteratorTag1 , typename _IteratorTag2 >
  _Tp **std::__parallel::__inner_product_switch** (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _Tp __init, _BinaryFunction1 __binary_op1, _BinaryFunction2 __binary_op2, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation , typename _IteratorTag1 , typename _IteratorTag2 >
  _OutputIterator **std::__parallel::__partial_sum_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, _IteratorTag1, _IteratorTag2)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator **std::__parallel::__partial_sum_switch** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **std::__parallel::accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **std::__parallel::accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOperation >
  _Tp **std::__parallel::accumulate** (_IIter __begin, _IIter __end, _Tp __init, _BinaryOperation __binary_op)
- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::sequential_tag)

- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator > _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator > _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op, __gnu_parallel::_Parallelism __parallelism_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator **std::__parallel::adjacent_difference** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _IIter1 , typename _IIter2 , typename _Tp > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp)
- template<typename _IIter1 , typename _IIter2 , typename _Tp > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 > _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OutputIterator > _OutputIterator **std::__parallel::partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator **std::__parallel::partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OutputIterator > _OutputIterator **std::__parallel::partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation > _OutputIterator **std::__parallel::partial_sum** (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __binary_op)

5.393.1 Detailed Description

Parallel STL function calls corresponding to stl_numeric.h. The functions defined here mainly do case switches and call the actual parallelized versions in other files. Inlining policy: Functions that basically only contain one function call, are declared inline. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file parallel/numeric.

5.394 numeric File Reference

Namespaces

- std

- std::experimental

Macros

- #define **__cpp_lib_experimental_gcd_lcm**
- #define **_GLIBCXX_EXPERIMENTAL_NUMERIC**

Functions

- template<typename _Mn , typename _Nn >
  constexpr common_type_t< _Mn, _Nn > **std::experimental::fundamentals_v2::gcd** (_Mn __m, _Nn __n) noexcept
- template<typename _Mn , typename _Nn >
  constexpr common_type_t< _Mn, _Nn > **std::experimental::fundamentals_v2::lcm** (_Mn __m, _Nn __n)

5.394.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/numeric.

5.395 numeric_traits.h File Reference

Namespaces

- __gnu_cxx

Macros

- #define **__glibcxx_digits**(_Tp)
- #define **__glibcxx_digits10**(_Tp)
- #define **__glibcxx_floating**(_Tp, _Fval, _Dval, _LDval)
- #define **__glibcxx_max**(_Tp)
- #define **__glibcxx_max_digits10**(_Tp)
- #define **__glibcxx_max_exponent10**(_Tp)
- #define **__glibcxx_min**(_Tp)
- #define **__glibcxx_signed**(_Tp)

Typedefs

- template<typename _Tp >
  using **__gnu_cxx::__int_traits** = __numeric_traits_integer< _Tp >

5.395.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file numeric_traits.h.

5.396 numericfwd.h File Reference

Namespaces

- std
- std::__parallel

Functions

- template<typename _IIter , typename _Tp , typename _Tag >
  _Tp **std::__parallel::__accumulate_switch** (_IIter, _IIter, _Tp, _Tag)
- template<typename _IIter , typename _Tp , typename _BinaryOper , typename _Tag >
  _Tp **std::__parallel::__accumulate_switch** (_IIter, _IIter, _Tp, _BinaryOper, _Tag)
- template<typename _RAIter , typename _Tp , typename _BinaryOper >
  _Tp **std::__parallel::__accumulate_switch** (_RAIter, _RAIter, _Tp, _BinaryOper, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _IIter , typename _OIter , typename _BinaryOper , typename _Tag1 , typename _Tag2 >
  _OIter **std::__parallel::__adjacent_difference_switch** (_IIter, _IIter, _OIter, _BinaryOper, _Tag1, _Tag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::__adjacent_difference_switch** (_IIter, _IIter, _OIter, _BinaryOper, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism __parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _RAIter1 , typename _RAIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **std::__parallel::__inner_product_switch** (_RAIter1, _RAIter1, _RAIter2, _Tp, _BinaryFunction1, _BinaryFunction2, random_access_iterator_tag, random_access_iterator_tag, __gnu_parallel::_Parallelism=__gnu_parallel::parallel_unbalanced)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 , typename _Tag1 , typename _Tag2 >
  _Tp **std::__parallel::__inner_product_switch** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, _Tag1, _Tag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper , typename _Tag1 , typename _Tag2 >
  _OIter **std::__parallel::__partial_sum_switch** (_IIter, _IIter, _OIter, _BinaryOper, _Tag1, _Tag2)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::__partial_sum_switch** (_IIter, _IIter, _OIter, _BinaryOper, random_access_iterator_tag, random_access_iterator_tag)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, _BinaryOper)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _Tp , typename _BinaryOper >
  _Tp **std::__parallel::accumulate** (_IIter, _IIter, _Tp, _BinaryOper, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)

- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::adjacent_difference** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, __gnu_parallel::_Parallelism)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::sequential_tag)
- template<typename _IIter1 , typename _IIter2 , typename _Tp , typename _BinaryFunction1 , typename _BinaryFunction2 >
  _Tp **std::__parallel::inner_product** (_IIter1, _IIter1, _IIter2, _Tp, _BinaryFunction1, _BinaryFunction2, __gnu_parallel::_Parallelism)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::partial_sum** (_IIter, _IIter, _OIter, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::partial_sum** (_IIter, _IIter, _OIter, _BinaryOper, __gnu_parallel::sequential_tag)
- template<typename _IIter , typename _OIter >
  _OIter **std::__parallel::partial_sum** (_IIter, _IIter, _OIter __result)
- template<typename _IIter , typename _OIter , typename _BinaryOper >
  _OIter **std::__parallel::partial_sum** (_IIter, _IIter, _OIter, _BinaryOper)

5.396.1 Detailed Description

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file numericfwd.h.

5.397 omp_loop.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __gnu_parallel::__for_each_template_random_access_omp_loop (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)

5.397.1 Detailed Description

Parallelization of embarrassingly parallel execution by means of an OpenMP for loop. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file omp_loop.h.

5.398 omp_loop_static.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __gnu_parallel::__for_each_template_random_access_omp_loop_static (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)

5.398.1 Detailed Description

Parallelization of embarrassingly parallel execution by means of an OpenMP for loop with static scheduling. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file omp_loop_static.h.

5.399 opt_random.h File Reference

5.399.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <random>.

Definition in file opt_random.h.

5.400 optional File Reference

Macros

- #define **_GLIBCXX_OPTIONAL**

5.400.1 Detailed Description

This is a Standard C++ Library header.

Definition in file optional.

5.401 optional File Reference

Classes

- class std::experimental::fundamentals_v1::bad_optional_access
- struct std::hash< experimental::optional< _Tp > >
- struct std::experimental::fundamentals_v1::in_place_t
- struct std::experimental::fundamentals_v1::nullopt_t
- class std::experimental::fundamentals_v1::optional< _Tp >
- class std::experimental::fundamentals_v1::optional< _Tp >

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_optional**
- #define **_GLIBCXX_EXPERIMENTAL_OPTIONAL**

Variables

- constexpr in_place_t std::experimental::fundamentals_v1::in_place
- constexpr nullopt_t std::experimental::fundamentals_v1::nullopt

5.401.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/optional.

5.402 order_statistics_imp.hpp File Reference

5.402.1 Detailed Description

Contains forward declarations for order_statistics_key

Definition in file tree_policy/order_statistics_imp.hpp.

5.403 order_statistics_imp.hpp File Reference

5.403.1 Detailed Description

Contains forward declarations for order_statistics_key

Definition in file trie_policy/order_statistics_imp.hpp.

5.404 os_defines.h File Reference

5.404.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iosfwd>.

Definition in file os_defines.h.

5.405 ostream File Reference

Classes

- class std::basic_ostream< _CharT, _Traits >
- class std::basic_ostream< _CharT, _Traits >::sentry

Namespaces

- std

Macros

- #define **_GLIBCXX_OSTREAM**

Typedefs

- template<typename _Tp >
  using **std::__do_is_convertible_to_basic_ostream_impl** = decltype(__is_convertible_to_basic_ostream_test(declval< typename remove_reference< _Tp >::type * >()))
- template<typename _Ostream >
  using **std::__rvalue_ostream_type** = typename __is_convertible_to_basic_ostream< _Ostream >::__ostream_type

Functions

- template<typename _Ch , typename _Up >
  basic_ostream< _Ch, _Up > & **std::__is_convertible_to_basic_ostream_test** (basic_ostream< _Ch, _Up > *)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & std::endl (basic_ostream< _CharT, _Traits > &__os)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & std::ends (basic_ostream< _CharT, _Traits > &__os)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & std::flush (basic_ostream< _CharT, _Traits > &__os)
- template<typename _Ostream , typename _Tp >

enable_if< __and_< __not_
< is_lvalue_reference
< _Ostream >
>, __is_convertible_to_basic_ostream
< _Ostream >, __is_insertable
< __rvalue_ostream_type
< _Ostream >, const _Tp & >
>::value,
__rvalue_ostream_type
< _Ostream > >::type std::operator<< (_Ostream &&__os, const _Tp &__x)

- template<typename _CharT , typename _Traits >
basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__out, _CharT __c)
- template<typename _CharT , typename _Traits >
basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__out, char __c)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, char __c)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, signed char __c)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, unsigned char __c)

- template<typename _CharT , typename _Traits >
basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s)
- template<typename _CharT , typename _Traits >
basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__out, const char *__s)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, const char *__s)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, const signed char *__s)
- template<typename _Traits >
basic_ostream< char, _Traits > & std::operator<< (basic_ostream< char, _Traits > &__out, const unsigned char *__s)

5.405.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ostream.

5.406 ostream.tcc File Reference

Namespaces

- std

Macros

- #define **_OSTREAM_TCC**

Functions

- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__out, const char *__s)

5.406.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ostream>.

Definition in file ostream.tcc.

5.407 ostream_insert.h File Reference

Namespaces

- std

Functions

- template<typename _CharT , typename _Traits >
  void **std::__ostream_fill** (basic_ostream< _CharT, _Traits > &__out, streamsize __n)
- template<typename _CharT , typename _Traits >
  basic_ostream< _CharT, _Traits > & **std::__ostream_insert** (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s, streamsize __n)
- template<typename _CharT , typename _Traits >
  void **std::__ostream_write** (basic_ostream< _CharT, _Traits > &__out, const _CharT *__s, streamsize __n)

5.407.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ostream>.

Definition in file ostream_insert.h.

5.408 ov_tree_map_.hpp File Reference

Classes

- class __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >::cond_dtor< Size_Type >
- class __gnu_pbds::detail::ov_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CONST_NODE_ITERATOR_NAME**
- #define **PB_DS_OV_TREE_NAME**
- #define **PB_DS_OV_TREE_TRAITS_BASE**

5.408.1 Detailed Description

Contains an implementation class for ov_tree.

Definition in file ov_tree_map_.hpp.

5.409 pairing_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_NODE_CONSISTENT**(_Node, _Bool)
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_P_HEAP_BASE**

5.409.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_.hpp.

5.410 par_loop.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __gnu_parallel::__for_each_template_random_access_ed (_RAIter __begin, _RAIter __end, _Op __o, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)

5.410.1 Detailed Description

Parallelization of embarrassingly parallel execution by means of equal splitting. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file par_loop.h.

5.411 parallel.h File Reference

5.411.1 Detailed Description

End-user include file. Provides advanced settings and tuning options. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file parallel.h.

5.412 parse_numbers.h File Reference

Namespaces

- std

Typedefs

- template<unsigned long long _Val>
  using **std::__parse_int::__ull_constant** = integral_constant< unsigned long long, _Val >
- template<char... _Digs>
  using **std::__select_int::_Select_int** = typename _Select_int_base< __parse_int::_Parse_int< _Digs...>-::value, unsigned char, unsigned short, unsigned int, unsigned long, unsigned long long >::type

5.412.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <chrono>.

Definition in file parse_numbers.h.

5.413 partial_sum.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __gnu_parallel::__parallel_partial_sum (_IIter __begin, _IIter __end, _OutputIterator __result, _-BinaryOperation __bin_op)
- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __gnu_parallel::__parallel_partial_sum_basecase (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, typename std::iterator_traits< _IIter >::value_type __value)

- template<typename _IIter , typename _OutputIterator , typename _BinaryOperation >
  _OutputIterator __gnu_parallel::__parallel_partial_sum_linear (_IIter __begin, _IIter __end, _OutputIterator __result, _BinaryOperation __bin_op, typename std::iterator_traits< _IIter >::difference_type __n)

5.413.1 Detailed Description

Parallel implementation of std::partial_sum(), i.e. prefix sums. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file partial_sum.h.

5.414 partition.h File Reference

Namespaces

- __gnu_parallel

Macros

- #define _GLIBCXX_VOLATILE

Functions

- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_nth_element (_RAIter __begin, _RAIter __nth, _RAIter __end, _Compare __comp)
- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_partial_sort (_RAIter __begin, _RAIter __middle, _RAIter __end, _Compare __comp)
- template<typename _RAIter , typename _Predicate >
  std::iterator_traits< _RAIter >
  ::difference_type __gnu_parallel::__parallel_partition (_RAIter __begin, _RAIter __end, _Predicate __pred, _ThreadIndex __num_threads)

5.414.1 Detailed Description

Parallel implementation of std::partition(), std::nth_element(), and std::partial_sort(). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file partition.h.

5.414.2 Macro Definition Documentation

5.414.2.1 #define _GLIBCXX_VOLATILE

Decide whether to declare certain variables volatile.

Definition at line 43 of file partition.h.

Referenced by __gnu_parallel::__parallel_partition().

5.415 pat_trie_.hpp File Reference

Classes

- class __gnu_pbds::detail::pat_trie_map< Key, Mapped, Node_And_It_Traits, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_NODE_VALID**(X)
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_PAT_TRIE_NAME**
- #define **PB_DS_PAT_TRIE_TRAITS_BASE**
- #define **PB_DS_RECURSIVE_COUNT_LEAFS**(X)

5.415.1 Detailed Description

Contains an implementation class for a patricia tree.

Definition in file pat_trie_.hpp.

5.416 pat_trie_base.hpp File Reference

Classes

- class __gnu_pbds::detail::pat_trie_base::_CIter< Node, Leaf, Head, Inode, Is_Forward_Iterator >
- struct __gnu_pbds::detail::pat_trie_base::_Head< _ATraits, Metadata >
- struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >
- class __gnu_pbds::detail::pat_trie_base::_Iter< Node, Leaf, Head, Inode, Is_Forward_Iterator >
- struct __gnu_pbds::detail::pat_trie_base::_Leaf< _ATraits, Metadata >
- struct __gnu_pbds::detail::pat_trie_base::_Metadata< Metadata, _Alloc >
- struct __gnu_pbds::detail::pat_trie_base::_Metadata< null_type, _Alloc >
- struct __gnu_pbds::detail::pat_trie_base::_Node_base< _ATraits, Metadata >
- class __gnu_pbds::detail::pat_trie_base::_Node_citer< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >
- class __gnu_pbds::detail::pat_trie_base::_Node_iter< Node, Leaf, Head, Inode, _CIterator, Iterator, _Alloc >
- struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::const_iterator
- struct __gnu_pbds::detail::pat_trie_base::_Inode< _ATraits, Metadata >::iterator
- struct __gnu_pbds::detail::pat_trie_base

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CONST_IT_C_DEC**
- #define **PB_DS_CONST_ODIR_IT_C_DEC**
- #define **PB_DS_IT_C_DEC**
- #define **PB_DS_ODIR_IT_C_DEC**
- #define **PB_DS_PAT_TRIE_NODE_CONST_ITERATOR_C_DEC**
- #define **PB_DS_PAT_TRIE_NODE_ITERATOR_C_DEC**

5.416.1 Detailed Description

Contains the base class for a patricia tree.

Definition in file pat_trie_base.hpp.

5.417 pod_char_traits.h File Reference

Classes

- struct std::char_traits< __gnu_cxx::character< _Value, _Int, _St > >
- struct __gnu_cxx::character< _Value, _Int, _St >

Namespaces

- __gnu_cxx
- std

Functions

- template<typename _Value , typename _Int , typename _St >
  bool **__gnu_cxx::operator**< (const character< _Value, _Int, _St > &lhs, const character< _Value, _Int, _St > &rhs)
- template<typename _Value , typename _Int , typename _St >
  bool **__gnu_cxx::operator==** (const character< _Value, _Int, _St > &lhs, const character< _Value, _Int, _St > &rhs)

5.417.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file pod_char_traits.h.

5.418 point_const_iterator.hpp File Reference

Classes

- class __gnu_pbds::detail::binary_heap_point_const_iterator_< Value_Type, Entry, Simple, _Alloc >

Namespaces

- __gnu_pbds

5.418.1 Detailed Description

Contains an iterator class returned by the table's const find and insert methods.

Definition in file binary_heap_/point_const_iterator.hpp.

5.419 point_const_iterator.hpp File Reference

Classes

- class __gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_< Node, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.419.1 Detailed Description

Contains an iterator class returned by the table's const find and insert methods.

Definition in file left_child_next_sibling_heap_/point_const_iterator.hpp.

5.420 point_const_iterator.hpp File Reference

5.420.1 Detailed Description

Contains an iterator class returned by the tables' const find and insert methods.

- This file is intended to be included inside a class definition, with PB_DS_CLASS_C_DEC defined to the name of the enclosing class.

Definition in file unordered_iterator/point_const_iterator.hpp.

5.421 point_iterator.hpp File Reference

5.421.1 Detailed Description

Contains an iterator class returned by the tables' find and insert methods.

This file is intended to be included inside a class definition, with PB_DS_CLASS_C_DEC defined to the name of the enclosing class.

Definition in file point_iterator.hpp.

5.422 point_iterators.hpp File Reference

Classes

- class __gnu_pbds::detail::bin_search_tree_const_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >
- class __gnu_pbds::detail::bin_search_tree_it_< Node_Pointer, Value_Type, Pointer, Const_Pointer, Reference, Const_Reference, Is_Forward_Iterator, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_TREE_CONST_IT_C_DEC**
- #define **PB_DS_TREE_CONST_ODIR_IT_C_DEC**
- #define **PB_DS_TREE_IT_C_DEC**
- #define **PB_DS_TREE_ODIR_IT_C_DEC**

5.422.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file point_iterators.hpp.

5.423 pointer.h File Reference

Classes

- struct __gnu_cxx::_Invalid_type
- class __gnu_cxx::_Pointer_adapter< _Storage_policy >
- class __gnu_cxx::_Relative_pointer_impl< _Tp >
- class __gnu_cxx::_Relative_pointer_impl< const _Tp >
- class __gnu_cxx::_Std_pointer_impl< _Tp >
- struct __gnu_cxx::_Unqualified_type< _Tp >

Namespaces

- __gnu_cxx
- std

Macros

- #define **_CXX_POINTER_ARITH_OPERATOR_SET**(INT_TYPE)
- #define **_GCC_CXX_POINTER_COMPARISON_OPERATION_SET**(OPERATOR)

Functions

- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator!=** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator!=** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator!=** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator!=** (const _Pointer_adapter< _Tp > &__lhs, int __rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator!=** (int __lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator!=** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**< (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**< (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**< (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _CharT , typename _Traits , typename _StoreT >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const _Pointer_adapter< _StoreT > &__p)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**<= (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**<= (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**<= (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator**<= (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator==** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator==** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator==** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator==** (const _Pointer_adapter< _Tp > &__lhs, int __rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator==** (int __lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp >
  bool __gnu_cxx::operator== (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**> (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator**> (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)

- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator>** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator>** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator>=** (const _Pointer_adapter< _Tp1 > &__lhs, _Tp2 __rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator>=** (const _Pointer_adapter< _Tp1 > &__lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp1 , typename _Tp2 >
  bool **__gnu_cxx::operator>=** (_Tp1 __lhs, const _Pointer_adapter< _Tp2 > &__rhs)
- template<typename _Tp >
  bool **__gnu_cxx::operator>=** (const _Pointer_adapter< _Tp > &__lhs, const _Pointer_adapter< _Tp > &__rhs)

5.423.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Author

Bob Walters

Provides reusable _Pointer_adapter for assisting in the development of custom pointer types that can be used with the standard containers via the allocator::pointer and allocator::const_pointer typedefs.

Definition in file pointer.h.

5.424 policy_access_fn_imps.hpp File Reference

5.424.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/policy_access_fn_imps.hpp.

5.425 policy_access_fn_imps.hpp File Reference

5.425.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/policy_access_fn_imps.hpp.

5.426 policy_access_fn_imps.hpp File Reference

5.426.1 Detailed Description

Contains implementations of cc_ht_map_'s policy access functions.

Definition in file cc_hash_table_map_/policy_access_fn_imps.hpp.

5.427 policy_access_fn_imps.hpp File Reference

5.427.1 Detailed Description

Contains implementations of gp_ht_map_'s policy agpess functions.

Definition in file gp_hash_table_map_/policy_access_fn_imps.hpp.

5.428 policy_access_fn_imps.hpp File Reference

5.428.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/policy_access_fn_imps.hpp.

5.429 policy_access_fn_imps.hpp File Reference

5.429.1 Detailed Description

Contains an implementation class for ov_tree.

Definition in file ov_tree_map_/policy_access_fn_imps.hpp.

5.430 policy_access_fn_imps.hpp File Reference

5.430.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/policy_access_fn_imps.hpp.

5.431 pool_allocator.h File Reference

Classes

- class __gnu_cxx::__pool_alloc< _Tp >
- class __gnu_cxx::__pool_alloc_base

Namespaces

- __gnu_cxx

Functions

- template<typename _Tp >
  bool **__gnu_cxx::operator!=** (const __pool_alloc< _Tp > &, const __pool_alloc< _Tp > &)
- template<typename _Tp >
  bool **__gnu_cxx::operator==** (const __pool_alloc< _Tp > &, const __pool_alloc< _Tp > &)

5.431.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file pool_allocator.h.

5.432 postypes.h File Reference

Classes

- class std::fpos< _StateT >

Namespaces

- std

Typedefs

- typedef long long std::streamoff
- typedef fpos< mbstate_t > std::streampos
- typedef ptrdiff_t std::streamsize
- typedef fpos< mbstate_t > std::u16streampos
- typedef fpos< mbstate_t > std::u32streampos
- typedef fpos< mbstate_t > std::wstreampos

Functions

- template<typename _StateT >
  bool **std::operator!=** (const fpos< _StateT > &__lhs, const fpos< _StateT > &__rhs)
- template<typename _StateT >
  bool std::operator== (const fpos< _StateT > &__lhs, const fpos< _StateT > &__rhs)

5.432.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iosfwd>.

Definition in file postypes.h.

5.433 predefined_ops.h File Reference

Namespaces

- __gnu_cxx

Functions

- template<typename _Compare >
  constexpr _Iter_comp_iter
  < _Compare > **__gnu_cxx::__ops::__iter_comp_iter** (_Compare __comp)
- template<typename _Iterator >
  constexpr _Iter_equals_iter
  < _Iterator > **__gnu_cxx::__ops::__iter_comp_iter** (_Iter_equal_to_iter, _Iterator __it)
- template<typename _Compare , typename _Iterator >
  constexpr _Iter_comp_to_iter
  < _Compare, _Iterator > **__gnu_cxx::__ops::__iter_comp_iter** (_Iter_comp_iter< _Compare > __comp, _Iterator __it)
- constexpr _Iter_less_val **__gnu_cxx::__ops::__iter_comp_val** (_Iter_less_iter)
- constexpr _Iter_equal_to_val **__gnu_cxx::__ops::__iter_comp_val** (_Iter_equal_to_iter)
- template<typename _Compare >
  constexpr _Iter_comp_val
  < _Compare > **__gnu_cxx::__ops::__iter_comp_val** (_Compare __comp)
- template<typename _Compare >
  constexpr _Iter_comp_val
  < _Compare > **__gnu_cxx::__ops::__iter_comp_val** (_Iter_comp_iter< _Compare > __comp)
- template<typename _Compare , typename _Value >
  _Iter_comp_to_val< _Compare,
  _Value > constexpr **__gnu_cxx::__ops::__iter_comp_val** (_Compare __comp, _Value &__val)
- constexpr _Iter_equal_to_iter **__gnu_cxx::__ops::__iter_equal_to_iter** ()
- constexpr _Iter_equal_to_val **__gnu_cxx::__ops::__iter_equal_to_val** ()
- template<typename _Value >
  constexpr _Iter_equals_val
  < _Value > **__gnu_cxx::__ops::__iter_equals_val** (_Value &__val)
- constexpr _Iter_less_iter **__gnu_cxx::__ops::__iter_less_iter** ()
- constexpr _Iter_less_val **__gnu_cxx::__ops::__iter_less_val** ()
- template<typename _Predicate >
  constexpr _Iter_negate
  < _Predicate > **__gnu_cxx::__ops::__negate** (_Iter_pred< _Predicate > __pred)
- template<typename _Predicate >
  constexpr _Iter_pred< _Predicate > **__gnu_cxx::__ops::__pred_iter** (_Predicate __pred)
- constexpr _Val_less_iter **__gnu_cxx::__ops::__val_comp_iter** (_Iter_less_iter)
- template<typename _Compare >
  constexpr _Val_comp_iter
  < _Compare > **__gnu_cxx::__ops::__val_comp_iter** (_Compare __comp)
- template<typename _Compare >
  constexpr _Val_comp_iter
  < _Compare > **__gnu_cxx::__ops::__val_comp_iter** (_Iter_comp_iter< _Compare > __comp)
- constexpr _Val_less_iter **__gnu_cxx::__ops::__val_less_iter** ()

5.433.1 Detailed Description

This is an internal header file, included by other library headers. You should not attempt to use it directly. Instead, include <algorithm>.

Definition in file predefined_ops.h.

5.434 prefix_search_node_update_imp.hpp File Reference

5.434.1 Detailed Description

Contains an implementation of prefix_search_node_update.

Definition in file prefix_search_node_update_imp.hpp.

5.435 priority_queue.hpp File Reference

Classes

- class __gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >

Namespaces

- __gnu_pbds

5.435.1 Detailed Description

Contains priority_queues.

Definition in file priority_queue.hpp.

5.436 priority_queue_base_dispatch.hpp File Reference

Classes

- struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type >
- struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type >
- struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type >
- struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type >
- struct __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_VALID**(X)
- #define **PB_DS_DEBUG_VERIFY**(_Cond)

5.436.1 Detailed Description

Contains an pqiative container dispatching base.

Definition in file priority_queue_base_dispatch.hpp.

5.437 probe_fn_base.hpp File Reference

Classes

- class __gnu_pbds::detail::probe_fn_base< _Alloc >

Namespaces

- __gnu_pbds

5.437.1 Detailed Description

Contains a probe policy base.

Definition in file probe_fn_base.hpp.

5.438 propagate_const File Reference

Classes

- class std::experimental::fundamentals_v2::propagate_const< _Tp >

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_PROPAGATE_CONST**

Functions

- template<typename _Tp >
  constexpr const _Tp & **std::experimental::fundamentals_v2::get_underlying** (const propagate_const< _Tp > &__pt) noexcept
- template<typename _Tp >
  constexpr _Tp & **std::experimental::fundamentals_v2::get_underlying** (propagate_const< _Tp > &__pt) noexcept
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, nullptr_t)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (nullptr_t, const propagate_const< _Tp > &-__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)

- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator!=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator<=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, nullptr_t)
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (nullptr_t, const propagate_const< _Tp > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator==** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const propagate_const< _Tp > &__pt, const _Up &__u)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const propagate_const< _Tp > &__pt, const propagate_const< _Up > &__pu)
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const propagate_const< _Tp > &__pt, const _Up &__u)

- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v2::operator>=** (const _Tp &__t, const propagate_const< _Up > &__pu)
- template<typename _Tp >
  constexpr void **std::experimental::fundamentals_v2::swap** (propagate_const< _Tp > &__pt, propagate_const< _Tp > &__pt2) noexcept(__is_nothrow_swappable< _Tp >::value)

5.438.1 Detailed Description

This is a TS C++ Library header.

Definition in file propagate_const.

5.439 ptr_traits.h File Reference

Classes

- struct std::pointer_traits< _Ptr >
- struct std::pointer_traits< _Tp * >

Namespaces

- std

Typedefs

- template<typename _Tp >
  using **std::__get_first_arg_t** = typename __get_first_arg< _Tp >::type
- template<typename _Tp >
  using **std::__make_not_void** = typename conditional< is_void< _Tp >::value, __undefined, _Tp >::type
- template<typename _Ptr , typename _Tp >
  using std::__ptr_rebind = typename pointer_traits< _Ptr >::template rebind< _Tp >
- template<typename _Tp , typename _Up >
  using **std::__replace_first_arg_t** = typename __replace_first_arg< _Tp, _Up >::type

Functions

- template<typename _Tp >
  constexpr _Tp * **std::__to_address** (_Tp *__ptr) noexcept
- template<typename _Ptr >
  constexpr std::pointer_traits
  < _Ptr >::element_type * **std::__to_address** (const _Ptr &__ptr)

5.439.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file ptr_traits.h.

5.440 quadratic_probe_fn_imp.hpp File Reference

5.440.1 Detailed Description

Contains a probe policy implementation

Definition in file quadratic_probe_fn_imp.hpp.

5.441 queue File Reference

Macros

- #define **_GLIBCXX_QUEUE**

5.441.1 Detailed Description

This is a Standard C++ Library header.

Definition in file queue.

5.442 queue.h File Reference

Classes

- class __gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >

Namespaces

- __gnu_parallel

Macros

- #define _GLIBCXX_VOLATILE

5.442.1 Detailed Description

Lock-free double-ended queue. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file queue.h.

5.442.2 Macro Definition Documentation

5.442.2.1 #define _GLIBCXX_VOLATILE

Decide whether to declare certain variable volatile in this file.

Definition at line 40 of file queue.h.

5.443 quicksort.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort_qs (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort_qs_conquer (_RAIter __begin, _RAIter __end, _Compare __comp, _ThreadIndex __num_threads)
- template<typename _RAIter , typename _Compare >
  std::iterator_traits< _RAIter >
  ::difference_type __gnu_parallel::__parallel_sort_qs_divide (_RAIter __begin, _RAIter __end, _Compare __comp, typename std::iterator_traits< _RAIter >::difference_type __pivot_rank, typename std::iterator_traits< _RAIter >::difference_type __num_samples, _ThreadIndex __num_threads)

5.443.1 Detailed Description

Implementation of a unbalanced parallel quicksort (in-place). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file quicksort.h.

5.444 quoted_string.h File Reference

Classes

- struct std::__detail::_Quoted_string< _String, _CharT >

Namespaces

- std
- std::__detail

Functions

- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::__detail::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const _Quoted_string< const _CharT *, _CharT > &__str)
- template<typename _CharT , typename _Traits , typename _String >
  std::basic_ostream< _CharT,
  _Traits > & std::__detail::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const _Quoted_string< _String, _CharT > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc >
  std::basic_istream< _CharT,
  _Traits > & std::__detail::operator>> (std::basic_istream< _CharT, _Traits > &__is, const _Quoted_string< basic_string< _CharT, _Traits, _Alloc > &, _CharT > &__str)

5.444.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iomanip>.

Definition in file quoted_string.h.

5.445 r_erase_fn_imps.hpp File Reference

5.445.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/r_erase_fn_imps.hpp.

5.446 r_erase_fn_imps.hpp File Reference

5.446.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file pat_trie_/r_erase_fn_imps.hpp.

5.447 random File Reference

Macros

- #define **_GLIBCXX_RANDOM**

5.447.1 Detailed Description

This is a Standard C++ Library header.

Definition in file random.

5.448 random File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_randint**
- #define **_GLIBCXX_EXPERIMENTAL_RANDOM**

Functions

- std::default_random_engine & **std::experimental::fundamentals_v2::_S_randint_engine** ()
- template<typename _IntType >
  _IntType **std::experimental::fundamentals_v2::randint** (_IntType __a, _IntType __b)
- void **std::experimental::fundamentals_v2::reseed** ()
- void **std::experimental::fundamentals_v2::reseed** (default_random_engine::result_type __value)

5.448.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/random.

5.449 random.h File Reference

Classes

- class std::bernoulli_distribution
- class std::binomial_distribution< _IntType >
- class std::cauchy_distribution< _RealType >
- class std::chi_squared_distribution< _RealType >
- class std::discard_block_engine< _RandomNumberEngine, __p, __r >
- class std::discrete_distribution< _IntType >
- class std::exponential_distribution< _RealType >
- class std::extreme_value_distribution< _RealType >
- class std::fisher_f_distribution< _RealType >
- class std::gamma_distribution< _RealType >
- class std::geometric_distribution< _IntType >
- class std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >
- class std::linear_congruential_engine< _UIntType, __a, __c, __m >
- class std::lognormal_distribution< _RealType >
- class std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f >
- class std::negative_binomial_distribution< _IntType >
- class std::normal_distribution< _RealType >
- struct std::piecewise_linear_distribution< _RealType >::param_type
- struct std::piecewise_constant_distribution< _RealType >::param_type
- struct std::discrete_distribution< _IntType >::param_type
- struct std::extreme_value_distribution< _RealType >::param_type
- struct std::weibull_distribution< _RealType >::param_type
- struct std::exponential_distribution< _RealType >::param_type
- struct std::poisson_distribution< _IntType >::param_type
- struct std::negative_binomial_distribution< _IntType >::param_type
- struct std::geometric_distribution< _IntType >::param_type
- struct std::binomial_distribution< _IntType >::param_type
- struct std::bernoulli_distribution::param_type
- struct std::student_t_distribution< _RealType >::param_type
- struct std::fisher_f_distribution< _RealType >::param_type
- struct std::cauchy_distribution< _RealType >::param_type
- struct std::chi_squared_distribution< _RealType >::param_type

- struct std::gamma_distribution< _RealType >::param_type
- struct std::lognormal_distribution< _RealType >::param_type
- struct std::normal_distribution< _RealType >::param_type
- struct std::uniform_real_distribution< _RealType >::param_type
- class std::piecewise_constant_distribution< _RealType >
- class std::piecewise_linear_distribution< _RealType >
- class std::poisson_distribution< _IntType >
- class std::random_device
- class std::seed_seq
- class std::shuffle_order_engine< _RandomNumberEngine, __k >
- class std::student_t_distribution< _RealType >
- class std::subtract_with_carry_engine< _UIntType, __w, __s, __r >
- class std::uniform_real_distribution< _RealType >
- class std::weibull_distribution< _RealType >

Namespaces

- std
- std::__detail

Typedefs

- typedef minstd_rand0 **std::default_random_engine**
- typedef shuffle_order_engine < minstd_rand0, 256 > **std::knuth_b**
- typedef linear_congruential_engine < uint_fast32_t, 48271UL, 0UL, 2147483647UL > std::minstd_rand
- typedef linear_congruential_engine < uint_fast32_t, 16807UL, 0UL, 2147483647UL > std::minstd_rand0
- typedef mersenne_twister_engine < uint_fast32_t, 32, 624, 397, 31, 0x9908b0dfUL, 11, 0xffffffffUL, 7, 0x9d2c5680UL, 15, 0xefc60000UL, 18, 1812433253UL > std::mt19937
- typedef mersenne_twister_engine < uint_fast64_t, 64, 312, 156, 31, 0xb5026f5aa96619e9ULL, 29, 0x5555555555555555ULL, 17, 0x71d67fffeda60000ULL, 37, 0xfff7eee000000000ULL, 43, 6364136223846793005ULL > std::mt19937_64
- typedef discard_block_engine < ranlux24_base, 223, 23 > **std::ranlux24**
- typedef subtract_with_carry_engine < uint_fast32_t, 24, 10, 24 > **std::ranlux24_base**
- typedef discard_block_engine < ranlux48_base, 389, 11 > **std::ranlux48**
- typedef subtract_with_carry_engine < uint_fast64_t, 48, 5, 12 > **std::ranlux48_base**

Functions

- template<typename _RealType , size_t __bits, typename _UniformRandomNumberGenerator >
  _RealType std::generate_canonical (_UniformRandomNumberGenerator &__g)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m>
  bool std::operator!= (const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__lhs, const std::linear_congruential_engine< _UIntType, __a, __c, __m > &__rhs)
- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f>
  bool std::operator!= (const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__lhs, const std::mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__rhs)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r>
  bool std::operator!= (const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__lhs, const std::subtract_with_carry_engine< _UIntType, __w, __s, __r > &__rhs)
- template<typename _RandomNumberEngine , size_t __p, size_t __r>
  bool std::operator!= (const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__lhs, const std::discard_block_engine< _RandomNumberEngine, __p, __r > &__rhs)
- template<typename _RandomNumberEngine , size_t __w, typename _UIntType >
  bool std::operator!= (const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__lhs, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__rhs)
- template<typename _RandomNumberEngine , size_t __k>
  bool std::operator!= (const std::shuffle_order_engine< _RandomNumberEngine, __k > &__lhs, const std::shuffle_order_engine< _RandomNumberEngine, __k > &__rhs)
- template<typename _IntType >
  bool std::operator!= (const std::uniform_int_distribution< _IntType > &__d1, const std::uniform_int_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::uniform_real_distribution< _IntType > &__d1, const std::uniform_real_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::normal_distribution< _RealType > &__d1, const std::normal_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::lognormal_distribution< _RealType > &__d1, const std::lognormal_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::gamma_distribution< _RealType > &__d1, const std::gamma_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::chi_squared_distribution< _RealType > &__d1, const std::chi_squared_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::cauchy_distribution< _RealType > &__d1, const std::cauchy_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::fisher_f_distribution< _RealType > &__d1, const std::fisher_f_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::student_t_distribution< _RealType > &__d1, const std::student_t_distribution< _RealType > &__d2)
- bool std::operator!= (const std::bernoulli_distribution &__d1, const std::bernoulli_distribution &__d2)

- template<typename _IntType >
  bool std::operator!= (const std::binomial_distribution< _IntType > &__d1, const std::binomial_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::geometric_distribution< _IntType > &__d1, const std::geometric_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::negative_binomial_distribution< _IntType > &__d1, const std::negative_binomial_distribution< _IntType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::poisson_distribution< _IntType > &__d1, const std::poisson_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::exponential_distribution< _RealType > &__d1, const std::exponential_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::weibull_distribution< _RealType > &__d1, const std::weibull_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::extreme_value_distribution< _RealType > &__d1, const std::extreme_value_distribution< _RealType > &__d2)
- template<typename _IntType >
  bool std::operator!= (const std::discrete_distribution< _IntType > &__d1, const std::discrete_distribution< _IntType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::piecewise_constant_distribution< _RealType > &__d1, const std::piecewise_constant_distribution< _RealType > &__d2)
- template<typename _RealType >
  bool std::operator!= (const std::piecewise_linear_distribution< _RealType > &__d1, const std::piecewise_linear_distribution< _RealType > &__d2)
- template<typename _RandomNumberEngine , size_t __w, typename _UIntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_real_distribution< _RealType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::cauchy_distribution< _RealType > &__x)
- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::geometric_distribution< _IntType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::exponential_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::weibull_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::extreme_value_distribution< _RealType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_real_distribution< _RealType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::cauchy_distribution< _RealType > &__x)
- template<typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::bernoulli_distribution &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::geometric_distribution< _IntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::exponential_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::weibull_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::extreme_value_distribution< _RealType > &__x)

5.449.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <random>.

Definition in file random.h.

5.450 random.tcc File Reference

Namespaces

- std
- std::__detail

Macros

- #define **_RANDOM_TCC**

Functions

- template<typename _ValT , typename _CharT , typename _Traits >
  basic_istream< _CharT, _Traits > & **std::__detail::__extract_params** (basic_istream< _CharT, _Traits > &__is, vector< _ValT > &__vals, size_t __n)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  _OutputIterator **std::__detail::__normalize** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__factor)
- template<typename _RealType , size_t __bits, typename _UniformRandomNumberGenerator >
  _RealType std::generate_canonical (_UniformRandomNumberGenerator &__g)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const linear_congruential_engine< _UIntType, __a, __c, __m > &__lcr)
- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__x)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const subtract_with_carry_engine< _UIntType, __w, __s, __r > &__x)
- template<typename _RandomNumberEngine , size_t __p, size_t __r, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const discard_block_engine< _RandomNumberEngine, __p, __r > &__x)
- template<typename _RandomNumberEngine , size_t __k, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const shuffle_order_engine< _RandomNumberEngine, __k > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const negative_binomial_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const poisson_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT, _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const binomial_distribution< _IntType > &__x)

- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_int_distribution< _-
  IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const normal_distribution< _Real-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &, const std::uniform_real_distribution<
  _RealType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const lognormal_distribution<
  _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const chi_squared_distribution<
  _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const fisher_f_distribution< _-
  RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const student_t_distribution< _-
  RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const gamma_distribution< _-
  RealType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const discrete_distribution< _Int-
  Type > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const piecewise_constant_-
  distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::cauchy_distribution<
  _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **std::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const piecewise_linear_-
  distribution< _RealType > &__x)
- template<typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::bernoulli_distribution &_-
  _x)

- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::geometric_distribution< _IntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::exponential_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::weibull_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
std::basic_ostream< _CharT,
_Traits > & std::operator<< (std::basic_ostream< _CharT, _Traits > &__os, const std::extreme_value_distribution< _RealType > &__x)
- template<typename _RealType >
bool **std::operator==** (const std::normal_distribution< _RealType > &__d1, const std::normal_distribution< _RealType > &__d2)
- template<typename _UIntType , _UIntType __a, _UIntType __c, _UIntType __m, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, linear_congruential_engine< _UIntType, __a, __c, __m > &__lcr)
- template<typename _UIntType , size_t __w, size_t __n, size_t __m, size_t __r, _UIntType __a, size_t __u, _UIntType __d, size_t __s, _UIntType __b, size_t __t, _UIntType __c, size_t __l, _UIntType __f, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, mersenne_twister_engine< _UIntType, __w, __n, __m, __r, __a, __u, __d, __s, __b, __t, __c, __l, __f > &__x)
- template<typename _UIntType , size_t __w, size_t __s, size_t __r, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, subtract_with_carry_engine< _UIntType, __w, __s, __r > &__x)
- template<typename _RandomNumberEngine , size_t __p, size_t __r, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, discard_block_engine< _RandomNumberEngine, __p, __r > &__x)
- template<typename _RandomNumberEngine , size_t __k, typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, shuffle_order_engine< _RandomNumberEngine, __k > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, negative_binomial_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, poisson_distribution< _IntType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
std::basic_istream< _CharT,
_Traits > & **std::operator>>** (std::basic_istream< _CharT, _Traits > &__is, binomial_distribution< _IntType > &__x)

- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_int_distribution< _IntType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, normal_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &, std::uniform_real_distribution< _RealType > &)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, lognormal_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, chi_squared_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, fisher_f_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, student_t_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, gamma_distribution< _RealType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, discrete_distribution< _IntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, piecewise_constant_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::cauchy_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & **std::operator**>> (std::basic_istream< _CharT, _Traits > &__is, piecewise_linear_distribution< _RealType > &__x)
- template<typename _IntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::geometric_distribution< _IntType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::exponential_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::weibull_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT,
  _Traits > & std::operator>> (std::basic_istream< _CharT, _Traits > &__is, std::extreme_value_distribution< _RealType > &__x)

5.450.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <random>.

Definition in file bits/random.tcc.

5.451 random.tcc File Reference

Namespaces

- __gnu_cxx

Macros

- #define **_EXT_RANDOM_TCC**

Functions

- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4, typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::beta_distribution< _RealType > &__x)
- template<size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__os, const rice_distribution< _RealType > &__x)

- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const nakagami_-distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const pareto_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const k_distribution< _-RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const arcsine_-distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const hoyt_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx-::triangular_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::von_-mises_distribution< _RealType > &__x)
- template<typename _UIntType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx-::hypergeometric_distribution< _UIntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const logistic_-distribution< _RealType > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::uniform-_on_sphere_distribution< _Dimen, _RealType > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::uniform-_inside_sphere_distribution< _Dimen, _RealType > &__x)
- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4>
  bool **__gnu_cxx::operator==** (const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __-pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__lhs, const __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__rhs)
- template<size_t _Dimen, typename _RealType >
  bool **__gnu_cxx::operator==** (const __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__d1, const __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__d2)

- template<typename _UIntType , size_t __m, size_t __pos1, size_t __sl1, size_t __sl2, size_t __sr1, size_t __sr2, uint32_t __msk1, uint32_t __msk2, uint32_t __msk3, uint32_t __msk4, uint32_t __parity1, uint32_t __parity2, uint32_t __parity3, uint32_t __parity4, typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::simd_fast_mersenne_twister_engine< _UIntType, __m, __pos1, __sl1, __sl2, __sr1, __sr2, __msk1, __msk2, __msk3, __msk4, __parity1, __parity2, __parity3, __parity4 > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::beta_distribution< _RealType > &__x)
- template<size_t _Dimen, typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::normal_mv_distribution< _Dimen, _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, rice_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, nakagami_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, pareto_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, k_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, arcsine_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, hoyt_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::triangular_distribution< _RealType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::von_mises_distribution< _RealType > &__x)
- template<typename _UIntType , typename _CharT , typename _Traits >
  std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::hypergeometric_distribution< _UIntType > &__x)
- template<typename _RealType , typename _CharT , typename _Traits >

std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, logistic_distribution< _RealType > &__x)

- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::uniform_on_sphere_distribution< _Dimen, _RealType > &__x)
- template<std::size_t _Dimen, typename _RealType , typename _CharT , typename _Traits > std::basic_istream< _CharT, _Traits > & **__gnu_cxx::operator>>** (std::basic_istream< _CharT, _Traits > &__is, __gnu_cxx::uniform_inside_sphere_distribution< _Dimen, _RealType > &__x)

5.451.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/random>.

Definition in file ext/random.tcc.

5.452 random_number.h File Reference

Classes

- class __gnu_parallel::_RandomNumber

Namespaces

- __gnu_parallel

5.452.1 Detailed Description

Random number generator based on the Mersenne twister. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file random_number.h.

5.453 random_shuffle.h File Reference

Classes

- struct __gnu_parallel::_DRandomShufflingGlobalData< _RAIter >
- struct __gnu_parallel::_DRSSorterPU< _RAIter, _RandomNumberGenerator >

Namespaces

- __gnu_parallel

Typedefs

- typedef unsigned short __gnu_parallel::_BinIndex

Functions

- template<typename _RAIter , typename _RandomNumberGenerator >
  void __gnu_parallel::__parallel_random_shuffle (_RAIter __begin, _RAIter __end, _RandomNumberGenerator __rng=_RandomNumber())
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __gnu_parallel::__parallel_random_shuffle_drs (_RAIter __begin, _RAIter __end, typename std::iterator_traits< _RAIter >::difference_type __n, _ThreadIndex __num_threads, _RandomNumberGenerator &__rng)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __gnu_parallel::__parallel_random_shuffle_drs_pu (_DRSSorterPU< _RAIter, _RandomNumberGenerator > *__pus)
- template<typename _RandomNumberGenerator >
  int __gnu_parallel::__random_number_pow2 (int __logp, _RandomNumberGenerator &__rng)
- template<typename _Tp >
  _Tp __gnu_parallel::__round_up_to_pow2 (_Tp __x)
- template<typename _RAIter , typename _RandomNumberGenerator >
  void __gnu_parallel::__sequential_random_shuffle (_RAIter __begin, _RAIter __end, _RandomNumberGenerator &__rng)

5.453.1 Detailed Description

Parallel implementation of std::random_shuffle(). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file random_shuffle.h.

5.454 range_access.h File Reference

Classes

- class std::valarray< _Tp >

Namespaces

- std

Functions

- template<typename _Container >
  constexpr auto std::begin (_Container &__cont) -> decltype(__cont.begin())
- template<typename _Container >
  constexpr auto std::begin (const _Container &__cont) -> decltype(__cont.begin())
- template<typename _Tp , size_t _Nm>
  constexpr _Tp * std::begin (_Tp(&__arr)[_Nm])
- template<class _Tp >
  _Tp * std::begin (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::begin (const valarray< _Tp > &__va)
- template<typename _Container >
  constexpr auto std::cbegin (const _Container &__cont) noexcept(noexcept(std::begin(__cont))) -> decltype(std::begin(__cont))

- template<typename _Container >
  constexpr auto std::cend (const _Container &__cont) noexcept(noexcept(std::end(__cont))) -> decltype(std::end(__cont))
- template<typename _Container >
  constexpr auto std::crbegin (const _Container &__cont) -> decltype(std::rbegin(__cont))
- template<typename _Container >
  constexpr auto std::crend (const _Container &__cont) -> decltype(std::rend(__cont))
- template<typename _Container >
  constexpr auto std::end (_Container &__cont) -> decltype(__cont.end())
- template<typename _Container >
  constexpr auto std::end (const _Container &__cont) -> decltype(__cont.end())
- template<typename _Tp , size_t _Nm>
  constexpr _Tp * std::end (_Tp(&__arr)[_Nm])
- template<class _Tp >
  _Tp * std::end (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::end (const valarray< _Tp > &__va)
- template<typename _Container >
  constexpr auto std::rbegin (_Container &__cont) -> decltype(__cont.rbegin())
- template<typename _Container >
  constexpr auto std::rbegin (const _Container &__cont) -> decltype(__cont.rbegin())
- template<typename _Tp , size_t _Nm>
  constexpr reverse_iterator< _Tp * > std::rbegin (_Tp(&__arr)[_Nm])
- template<typename _Tp >
  constexpr reverse_iterator
  < const _Tp * > std::rbegin (initializer_list< _Tp > __il)
- template<typename _Container >
  constexpr auto std::rend (_Container &__cont) -> decltype(__cont.rend())
- template<typename _Container >
  constexpr auto std::rend (const _Container &__cont) -> decltype(__cont.rend())
- template<typename _Tp , size_t _Nm>
  constexpr reverse_iterator< _Tp * > std::rend (_Tp(&__arr)[_Nm])
- template<typename _Tp >
  constexpr reverse_iterator
  < const _Tp * > std::rend (initializer_list< _Tp > __il)

5.454.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file range_access.h.

5.455 range_cmp.h File Reference

5.455.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file range_cmp.h.

5.456 ranged_hash_fn.hpp File Reference

Classes

- class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, Store_Hash >
- class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, false >
- class __gnu_pbds::detail::ranged_hash_fn< Key, Hash_Fn, _Alloc, Comb_Hash_Fn, true >
- class __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, false >
- class __gnu_pbds::detail::ranged_hash_fn< Key, null_type, _Alloc, Comb_Hash_Fn, true >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.456.1 Detailed Description

Contains a unified ranged hash functor, allowing the hash tables to deal with a single class for ranged hashing.

Definition in file ranged_hash_fn.hpp.

5.457 ranged_probe_fn.hpp File Reference

Classes

- class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, Store_Hash >
- class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, false >
- class __gnu_pbds::detail::ranged_probe_fn< Key, Hash_Fn, _Alloc, Comb_Probe_Fn, Probe_Fn, true >
- class __gnu_pbds::detail::ranged_probe_fn< Key, null_type, _Alloc, Comb_Probe_Fn, null_type, false >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.457.1 Detailed Description

Contains a unified ranged probe functor, allowing the probe tables to deal with a single class for ranged probeing.

Definition in file ranged_probe_fn.hpp.

5.458 ranges File Reference

Macros

- #define **_GLIBCXX_RANGES**

5.458.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ranges.

5.459 ranges_algo.h File Reference

5.459.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <algorithm>.

Definition in file ranges_algo.h.

5.460 ranges_algobase.h File Reference

5.460.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <algorithm>.

Definition in file ranges_algobase.h.

5.461 ranges_uninitialized.h File Reference

5.461.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file ranges_uninitialized.h.

5.462 ratio File Reference

Classes

- struct std::ratio< _Num, _Den >
- struct std::ratio_equal< _R1, _R2 >

- struct std::ratio_greater< _R1, _R2 >
- struct std::ratio_greater_equal< _R1, _R2 >
- struct std::ratio_less< _R1, _R2 >
- struct std::ratio_less_equal< _R1, _R2 >
- struct std::ratio_not_equal< _R1, _R2 >

Namespaces

- std

Macros

- #define **_GLIBCXX_RATIO**

Typedefs

- typedef ratio< 1, 1000000000000000000 > **std::atto**
- typedef ratio< 1, 100 > **std::centi**
- typedef ratio< 10, 1 > **std::deca**
- typedef ratio< 1, 10 > **std::deci**
- typedef ratio< 1000000000000000000, 1 > **std::exa**
- typedef ratio< 1, 1000000000000000 > **std::femto**
- typedef ratio< 1000000000, 1 > **std::giga**
- typedef ratio< 100, 1 > **std::hecto**
- typedef ratio< 1000, 1 > **std::kilo**
- typedef ratio< 1000000, 1 > **std::mega**
- typedef ratio< 1, 1000000 > **std::micro**
- typedef ratio< 1, 1000 > **std::milli**
- typedef ratio< 1, 1000000000 > **std::nano**
- typedef ratio< 1000000000000000, 1 > **std::peta**
- typedef ratio< 1, 1000000000000 > **std::pico**
- template<typename _R1 , typename _R2 >
  using std::ratio_add = typename __ratio_add< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using std::ratio_divide = typename __ratio_divide< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using std::ratio_multiply = typename __ratio_multiply< _R1, _R2 >::type
- template<typename _R1 , typename _R2 >
  using std::ratio_subtract = typename __ratio_subtract< _R1, _R2 >::type
- typedef ratio< 1000000000000, 1 > **std::tera**

5.462.1 Detailed Description

This is a Standard C++ Library header.

Definition in file ratio.

5.463 ratio File Reference

Namespaces

- std
- std::tr2

5.463.1 Detailed Description

This is a TR2 C++ Library header.

Definition in file tr2/ratio.

5.464 ratio File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_RATIO**

Variables

- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_equal_v**
- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_greater_equal_v**
- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_greater_v**
- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_less_equal_v**
- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_less_v**
- template<typename _R1 , typename _R2 >
  constexpr bool **std::experimental::fundamentals_v1::ratio_not_equal_v**

5.464.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/ratio.

5.465 rb_tree File Reference

Classes

- struct __gnu_cxx::rb_tree< _Key, _Value, _KeyOfValue, _Compare, _Alloc >

Namespaces

- __gnu_cxx

Macros

- #define **_RB_TREE**

5.465.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file rb_tree.

5.466 rb_tree_.hpp File Reference

Classes

- class __gnu_pbds::detail::rb_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_RB_TREE_BASE**
- #define **PB_DS_RB_TREE_BASE_NAME**
- #define **PB_DS_RB_TREE_NAME**
- #define **PB_DS_STRUCT_ONLY_ASSERT_VALID**(X)

5.466.1 Detailed Description

Contains an implementation for Red Black trees.

Definition in file rb_tree_.hpp.

5.467 rc.hpp File Reference

Classes

- class __gnu_pbds::detail::rc< _Node, _Alloc >

Namespaces

- __gnu_pbds

5.467.1 Detailed Description

Contains a redundant (binary counter).

Definition in file rc.hpp.

5.468 rc_binomial_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::rc_binomial_heap< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_RC_C_DEC**

5.468.1 Detailed Description

Contains an implementation for redundant-counter binomial heap.

Definition in file rc_binomial_heap_.hpp.

5.469 rc_string_base.h File Reference

Classes

- class __gnu_cxx::__rc_string_base< _CharT, _Traits, _Alloc >

Namespaces

- __gnu_cxx

5.469.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/vstring.h>.

Definition in file rc_string_base.h.

5.470 refwrap.h File Reference

Classes

- class std::reference_wrapper< _Tp >

Namespaces

- std

5.470.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file refwrap.h.

5.471 regex File Reference

Macros

- #define **_GLIBCXX_REGEX**

5.471.1 Detailed Description

This is a Standard C++ Library header.

Definition in file regex.

5.472 regex File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_REGEX**

5.472.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/regex.

5.473 regex.h File Reference

Classes

- class std::__detail::_Executor< typename, typename, typename, bool >
- class std::basic_regex< typename, typename >
- class std::basic_regex< typename, typename >
- class std::match_results< typename, typename >
- class std::match_results< typename, typename >
- class std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >

- class std::regex_token_iterator< _Bi_iter, _Ch_type, _Rx_traits >
- class std::regex_traits< _Ch_type >
- class std::sub_match< _BiIter >

Namespaces

- std
- std::__detail

Typedefs

- typedef match_results< const char * > **std::cmatch**
- typedef regex_iterator< const char * > **std::cregex_iterator**
- typedef regex_token_iterator < const char * > std::cregex_token_iterator
- typedef sub_match< const char * > std::csub_match
- typedef basic_regex< char > std::regex
- typedef match_results < string::const_iterator > **std::smatch**
- typedef regex_iterator < string::const_iterator > **std::sregex_iterator**
- typedef regex_token_iterator < string::const_iterator > std::sregex_token_iterator
- typedef sub_match < string::const_iterator > std::ssub_match
- typedef match_results< const wchar_t * > **std::wcmatch**
- typedef regex_iterator< const wchar_t * > **std::wcregex_iterator**
- typedef regex_token_iterator < const wchar_t * > std::wcregex_token_iterator
- typedef sub_match< const wchar_t * > std::wcsub_match
- typedef basic_regex< wchar_t > std::wregex
- typedef match_results < wstring::const_iterator > **std::wsmatch**
- typedef regex_iterator < wstring::const_iterator > **std::wsregex_iterator**
- typedef regex_token_iterator < wstring::const_iterator > std::wsregex_token_iterator
- typedef sub_match < wstring::const_iterator > std::wssub_match

Enumerations

- enum **_RegexExecutorPolicy** : int { **_S_auto**, **_S_alternate** }

Functions

- template<typename _BiIter , typename _Alloc , typename _CharT , typename _TraitsT , _RegexExecutorPolicy __policy, bool __match_mode>
  bool **std::__detail::__regex_algo_impl** (_BiIter __s, _BiIter __e, match_results< _BiIter, _Alloc > &__m, const basic_regex< _CharT, _TraitsT > &__re, regex_constants::match_flag_type __flags)
- template<typename _Bi_iter , class _Alloc >
  bool std::operator!= (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__m2)
- template<typename _Bi_iter , typename _Alloc >
  bool std::operator== (const match_results< _Bi_iter, _Alloc > &__m1, const match_results< _Bi_iter, _Alloc > &__m2)
- template<typename _Bi_iter , typename _Alloc >
  void std::swap (match_results< _Bi_iter, _Alloc > &__lhs, match_results< _Bi_iter, _Alloc > &__rhs) noexcept

Matching, Searching, and Replacing

- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , typename _Alloc , typename _Rx_traits >
  bool std::regex_match (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Ch_type , class _Rx_traits >
  bool std::regex_match (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Str_allocator , typename _Ch_type , typename _Rx_traits >
  bool std::regex_match (const basic_string< _Ch_type, _Ch_traits, _Str_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (_Bi_iter __s, _Bi_iter __e, match_results< _Bi_iter, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Bi_iter , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (_Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__re, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_type , class _Alloc , class _Rx_traits >
  bool std::regex_search (const _Ch_type *__s, match_results< const _Ch_type *, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)

- template<typename _Ch_traits , typename _String_allocator , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _String_allocator > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &__s, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &__m, const basic_regex< _Ch_type, _Rx_traits > &__e, regex_constants::match_flag_type __f=regex_constants::match_default)
- template<typename _Ch_traits , typename _Ch_alloc , typename _Alloc , typename _Ch_type , typename _Rx_traits >
  bool std::regex_search (const basic_string< _Ch_type, _Ch_traits, _Ch_alloc > &&, match_results< typename basic_string< _Ch_type, _Ch_traits, _Ch_alloc >::const_iterator, _Alloc > &, const basic_regex< _Ch_type, _Rx_traits > &, regex_constants::match_flag_type=regex_constants::match_default)=delete
- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  _Out_iter std::regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Out_iter , typename _Bi_iter , typename _Rx_traits , typename _Ch_type >
  _Out_iter std::regex_replace (_Out_iter __out, _Bi_iter __first, _Bi_iter __last, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa , typename _Fst , typename _Fsa >
  basic_string< _Ch_type, _St, _Sa > std::regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _Fst, _Fsa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type, _St, _Sa > std::regex_replace (const basic_string< _Ch_type, _St, _Sa > &__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type , typename _St , typename _Sa >
  basic_string< _Ch_type > std::regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const basic_string< _Ch_type, _St, _Sa > &__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)
- template<typename _Rx_traits , typename _Ch_type >
  basic_string< _Ch_type > std::regex_replace (const _Ch_type *__s, const basic_regex< _Ch_type, _Rx_traits > &__e, const _Ch_type *__fmt, regex_constants::match_flag_type __flags=regex_constants::match_default)

5.473.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex.h.

5.474 regex.tcc File Reference

Namespaces

- std
- std::__detail

5.474.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex.tcc.

5.475 regex_automaton.h File Reference

Classes

- class std::__detail::_StateSeq< _TraitsT >

Namespaces

- std
- std::__detail

Macros

- #define **_GLIBCXX_REGEX_STATE_LIMIT**

Typedefs

- template<typename _CharT >
  using **std::__detail::_Matcher** = std::function< bool(_CharT)>
- typedef long **std::__detail::_StateIdT**

Enumerations

- enum std::__detail::_Opcode : int {
  _S_opcode_unknown, **_S_opcode_alternative**, **_S_opcode_repeat**, **_S_opcode_backref**,
  _S_opcode_line_begin_assertion, **_S_opcode_line_end_assertion**, **_S_opcode_word_boundary**, **_S_-opcode_subexpr_lookahead**,
  _S_opcode_subexpr_begin, **_S_opcode_subexpr_end**, **_S_opcode_dummy**, **_S_opcode_match**,
  _S_opcode_accept }

Variables

- static const _StateIdT **std::__detail::_S_invalid_state_id**

5.475.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_automaton.h.

5.476 regex_automaton.tcc File Reference

Namespaces

- std
- std::__detail

5.476.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_automaton.tcc.

5.477 regex_compiler.h File Reference

Classes

- struct std::__detail::_BracketMatcher< typename, bool, bool >
- struct std::__detail::_BracketMatcher< typename, bool, bool >
- class std::__detail::_Compiler< _TraitsT >
- class std::regex_traits< _Ch_type >

Namespaces

- std
- std::__detail

Typedefs

- template<typename _Iter , typename _TraitsT >
  using **std::__detail::__disable_if_contiguous_iter** = __enable_if_t< !__is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >
- template<typename _Iter , typename _TraitsT >
  using **std::__detail::__enable_if_contiguous_iter** = __enable_if_t< __is_contiguous_iter< _Iter >::value, std::shared_ptr< const _NFA< _TraitsT >> >

Functions

- template<typename _TraitsT , typename _FwdIter >
  __enable_if_contiguous_iter
  < _FwdIter, _TraitsT > **std::__detail::__compile_nfa** (_FwdIter __first, _FwdIter __last, const typename _TraitsT::locale_type &__loc, regex_constants::syntax_option_type __flags)
- template<typename _TraitsT , typename _FwdIter >
  __disable_if_contiguous_iter
  < _FwdIter, _TraitsT > **std::__detail::__compile_nfa** (_FwdIter __first, _FwdIter __last, const typename _TraitsT::locale_type &__loc, regex_constants::syntax_option_type __flags)

5.477.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_compiler.h.

5.478 regex_compiler.tcc File Reference

Namespaces

- std
- std::__detail

Macros

- #define **__INSERT_REGEX_MATCHER**(__func,...)

5.478.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_compiler.tcc.

5.479 regex_constants.h File Reference

Namespaces

- std
- std::regex_constants

5.1 Regular Expression Syntax Options

- enum std::regex_constants::__syntax_option {
  _S_icase, **_S_nosubs**, **_S_optimize**, **_S_collate**,
  _S_ECMAScript, **_S_basic**, **_S_extended**, **_S_awk**,
  _S_grep, **_S_egrep**, **_S_polynomial**, **_S_syntax_last** }
- enum std::regex_constants::syntax_option_type : unsigned int
- constexpr syntax_option_type std::regex_constants::icase
- constexpr syntax_option_type std::regex_constants::nosubs
- constexpr syntax_option_type std::regex_constants::optimize
- constexpr syntax_option_type std::regex_constants::collate
- constexpr syntax_option_type std::regex_constants::ECMAScript
- constexpr syntax_option_type std::regex_constants::basic
- constexpr syntax_option_type std::regex_constants::extended
- constexpr syntax_option_type std::regex_constants::awk
- constexpr syntax_option_type std::regex_constants::grep
- constexpr syntax_option_type std::regex_constants::egrep
- constexpr syntax_option_type std::regex_constants::__polynomial

- constexpr syntax_option_type std::regex_constants::operator& (syntax_option_type __a, syntax_option_type __b)
- constexpr syntax_option_type std::regex_constants::operator| (syntax_option_type __a, syntax_option_type __b)
- constexpr syntax_option_type std::regex_constants::operator^ (syntax_option_type __a, syntax_option_type __b)
- constexpr syntax_option_type std::regex_constants::operator~ (syntax_option_type __a)
- syntax_option_type & std::regex_constants::operator&= (syntax_option_type &__a, syntax_option_type __b)
- syntax_option_type & std::regex_constants::operator|= (syntax_option_type &__a, syntax_option_type __b)
- syntax_option_type & std::regex_constants::operator^= (syntax_option_type &__a, syntax_option_type __b)

5.2 Matching Rules

Matching a regular expression against a sequence of characters [first, last) proceeds according to the rules of the grammar specified for the regular expression object, modified according to the effects listed below for any bitmask elements set.

- enum std::regex_constants::__match_flag {
  _S_not_bol, **_S_not_eol**, **_S_not_bow**, **_S_not_eow**,
  _S_any, **_S_not_null**, **_S_continuous**, **_S_prev_avail**,
  _S_sed, **_S_no_copy**, **_S_first_only**, **_S_match_flag_last** }
- enum std::regex_constants::match_flag_type : unsigned int
- constexpr match_flag_type std::regex_constants::match_default
- constexpr match_flag_type std::regex_constants::match_not_bol
- constexpr match_flag_type std::regex_constants::match_not_eol
- constexpr match_flag_type std::regex_constants::match_not_bow
- constexpr match_flag_type std::regex_constants::match_not_eow
- constexpr match_flag_type std::regex_constants::match_any
- constexpr match_flag_type std::regex_constants::match_not_null
- constexpr match_flag_type std::regex_constants::match_continuous
- constexpr match_flag_type std::regex_constants::match_prev_avail
- constexpr match_flag_type std::regex_constants::format_default
- constexpr match_flag_type std::regex_constants::format_sed
- constexpr match_flag_type std::regex_constants::format_no_copy
- constexpr match_flag_type std::regex_constants::format_first_only
- constexpr match_flag_type std::regex_constants::operator& (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type std::regex_constants::operator| (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type std::regex_constants::operator^ (match_flag_type __a, match_flag_type __b)
- constexpr match_flag_type std::regex_constants::operator~ (match_flag_type __a)
- match_flag_type & std::regex_constants::operator&= (match_flag_type &__a, match_flag_type __b)
- match_flag_type & std::regex_constants::operator|= (match_flag_type &__a, match_flag_type __b)
- match_flag_type & std::regex_constants::operator^= (match_flag_type &__a, match_flag_type __b)

5.479.1 Detailed Description

Constant definitions for the std regex library. This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_constants.h.

5.480 regex_error.h File Reference

Classes

- class std::regex_error

Namespaces

- std
- std::regex_constants

Functions

- void **std::__throw_regex_error** (regex_constants::error_type __ecode)
- void **std::__throw_regex_error** (regex_constants::error_type __ecode, const char *__what)

5.3 Error Types

- enum std::regex_constants::error_type {
  _S_error_collate, **_S_error_ctype**, **_S_error_escape**, **_S_error_backref**,
  _S_error_brack, **_S_error_paren**, **_S_error_brace**, **_S_error_badbrace**,
  _S_error_range, **_S_error_space**, **_S_error_badrepeat**, **_S_error_complexity**,
  _S_error_stack }
- constexpr error_type std::regex_constants::error_collate (_S_error_collate)
- constexpr error_type std::regex_constants::error_ctype (_S_error_ctype)
- constexpr error_type std::regex_constants::error_escape (_S_error_escape)
- constexpr error_type std::regex_constants::error_backref (_S_error_backref)
- constexpr error_type std::regex_constants::error_brack (_S_error_brack)
- constexpr error_type std::regex_constants::error_paren (_S_error_paren)
- constexpr error_type std::regex_constants::error_brace (_S_error_brace)
- constexpr error_type std::regex_constants::error_badbrace (_S_error_badbrace)
- constexpr error_type std::regex_constants::error_range (_S_error_range)
- constexpr error_type std::regex_constants::error_space (_S_error_space)
- constexpr error_type std::regex_constants::error_badrepeat (_S_error_badrepeat)
- constexpr error_type std::regex_constants::error_complexity (_S_error_complexity)
- constexpr error_type std::regex_constants::error_stack (_S_error_stack)

5.480.1 Detailed Description

Error and exception objects for the std regex library. This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_error.h.

5.481 regex_executor.h File Reference

Classes

- class std::__detail::_Executor< typename, typename, typename, bool >

Namespaces

- std
- std::__detail

5.481.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_executor.h.

5.482 regex_executor.tcc File Reference

Namespaces

- std
- std::__detail

5.482.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_executor.tcc.

5.483 regex_scanner.h File Reference

Classes

- class std::__detail::_Scanner< _CharT >

Namespaces

- std
- std::__detail

5.483.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_scanner.h.

5.484 regex_scanner.tcc File Reference

Namespaces

- std
- std::__detail

5.484.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <regex>.

Definition in file regex_scanner.tcc.

5.485 resize_fn_imps.hpp File Reference

5.485.1 Detailed Description

Contains implementations of cc_ht_map_'s resize related functions.

Definition in file cc_hash_table_map_/resize_fn_imps.hpp.

5.486 resize_fn_imps.hpp File Reference

5.486.1 Detailed Description

Contains implementations of gp_ht_map_'s resize related functions.

Definition in file gp_hash_table_map_/resize_fn_imps.hpp.

5.487 resize_no_store_hash_fn_imps.hpp File Reference

5.487.1 Detailed Description

Contains implementations of cc_ht_map_'s resize related functions, when the hash value is not stored.

Definition in file cc_hash_table_map_/resize_no_store_hash_fn_imps.hpp.

5.488 resize_no_store_hash_fn_imps.hpp File Reference

5.488.1 Detailed Description

Contains implementations of gp_ht_map_'s resize related functions, when the hash value is not stored.

Definition in file gp_hash_table_map_/resize_no_store_hash_fn_imps.hpp.

5.489 resize_policy.hpp File Reference

Classes

- class __gnu_pbds::detail::resize_policy< _Tp >

Namespaces

- __gnu_pbds

5.489.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file resize_policy.hpp.

5.490 resize_store_hash_fn_imps.hpp File Reference

5.490.1 Detailed Description

Contains implementations of cc_ht_map_'s resize related functions, when the hash value is stored.

Definition in file cc_hash_table_map_/resize_store_hash_fn_imps.hpp.

5.491 resize_store_hash_fn_imps.hpp File Reference

5.491.1 Detailed Description

Contains implementations of gp_ht_map_'s resize related functions, when the hash value is stored.

Definition in file gp_hash_table_map_/resize_store_hash_fn_imps.hpp.

5.492 rope File Reference

Classes

- class __gnu_cxx::rope< _CharT, _Alloc >
- class __gnu_cxx::rope< _CharT, _Alloc >

Namespaces

- __gnu_cxx
- __gnu_cxx::__detail
- std
- std::tr1

Macros

- #define **__GC_CONST**
- #define **__ROPE_DEFINE_ALLOC**(_Tp, __name)
- #define **__ROPE_DEFINE_ALLOC**(_Tp, __name)
- #define **__ROPE_DEFINE_ALLOCS**(__a)
- #define **__STATIC_IF_SGI_ALLOC**
- #define **__STL_FREE_STRING**(__s, __l, __a)
- #define **__STL_ROPE_FROM_UNOWNED_CHAR_PTR**(__s, __size, __a)
- #define **_ROPE**

Typedefs

- typedef rope< char > **__gnu_cxx::crope**
- typedef rope< wchar_t > **__gnu_cxx::wrope**

Enumerations

- enum { **_S_max_rope_depth** }
- enum **_Tag** { **_S_leaf**, **_S_concat**, **_S_substringfn**, **_S_function** }

Functions

- crope::reference **__gnu_cxx::__mutable_reference_at** (crope &__c, std::size_t __i)
- template<typename _ForwardIterator , typename _Allocator >
  void **__gnu_cxx::_Destroy_const** (_ForwardIterator __first, _ForwardIterator __last, _Allocator __alloc)
- template<typename _ForwardIterator , typename _Tp >
  void **__gnu_cxx::_Destroy_const** (_ForwardIterator __first, _ForwardIterator __last, std::allocator< _Tp >)
- template<class _CharT >
  void **__gnu_cxx::_S_cond_store_eos** (_CharT &)
- void **__gnu_cxx::_S_cond_store_eos** (char &__c)
- void **__gnu_cxx::_S_cond_store_eos** (wchar_t &__c)
- template<class _CharT >
  _CharT **__gnu_cxx::_S_eos** (_CharT *)
- template<class _CharT >
  bool **__gnu_cxx::_S_is_basic_char_type** (_CharT *)
- bool **__gnu_cxx::_S_is_basic_char_type** (char *)
- bool **__gnu_cxx::_S_is_basic_char_type** (wchar_t *)
- template<class _CharT >
  bool **__gnu_cxx::_S_is_one_byte_char_type** (_CharT *)
- bool **__gnu_cxx::_S_is_one_byte_char_type** (char *)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator!=** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator!=** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator!=** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator!=** (const _Rope_char_ptr_proxy< _CharT, _Alloc > &__x, const _Rope_char_ptr_proxy< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  _Rope_const_iterator< _CharT, _Alloc > **__gnu_cxx::operator+** (const _Rope_const_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  _Rope_const_iterator< _CharT, _Alloc > **__gnu_cxx::operator+** (std::ptrdiff_t __n, const _Rope_const_iterator< _CharT, _Alloc > &__x)
- template<class _CharT , class _Alloc >
  _Rope_iterator< _CharT, _Alloc > **__gnu_cxx::operator+** (const _Rope_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  _Rope_iterator< _CharT, _Alloc > **__gnu_cxx::operator+** (std::ptrdiff_t __n, const _Rope_iterator< _CharT, _Alloc > &__x)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **__gnu_cxx::operator+** (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)

- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **__gnu_cxx::operator+** (const rope< _CharT, _Alloc > &__left, const _CharT *__right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **__gnu_cxx::operator+** (const rope< _CharT, _Alloc > &__left, _CharT __right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > & **__gnu_cxx::operator+=** (rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > & **__gnu_cxx::operator+=** (rope< _CharT, _Alloc > &__left, const _CharT *__right)
- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > & **__gnu_cxx::operator+=** (rope< _CharT, _Alloc > &__left, _CharT __right)
- template<class _CharT , class _Alloc >
  _Rope_const_iterator< _CharT, _Alloc > **__gnu_cxx::operator-** (const _Rope_const_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  std::ptrdiff_t **__gnu_cxx::operator-** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  _Rope_iterator< _CharT, _Alloc > **__gnu_cxx::operator-** (const _Rope_iterator< _CharT, _Alloc > &__x, std::ptrdiff_t __n)
- template<class _CharT , class _Alloc >
  std::ptrdiff_t **__gnu_cxx::operator-** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<** (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<class _CharT , class _Traits , class _Alloc >
  std::basic_ostream< _CharT, _Traits > & **__gnu_cxx::operator<<** (std::basic_ostream< _CharT, _Traits > &__o, const rope< _CharT, _Alloc > &__r)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<=** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<=** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator<=** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator==** (const _Rope_char_ptr_proxy< _CharT, _Alloc > &__x, const _Rope_char_ptr_proxy< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator==** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator==** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)

- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator==** (const rope< _CharT, _Alloc > &__left, const rope< _CharT, _Alloc > &__right)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>=** (const _Rope_const_iterator< _CharT, _Alloc > &__x, const _Rope_const_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>=** (const _Rope_iterator< _CharT, _Alloc > &__x, const _Rope_iterator< _CharT, _Alloc > &__y)
- template<class _CharT , class _Alloc >
  bool **__gnu_cxx::operator>=** (const rope< _CharT, _Alloc > &__x, const rope< _CharT, _Alloc > &__y)
- template<class _CharT , class __Alloc >
  void **__gnu_cxx::swap** (_Rope_char_ref_proxy< _CharT, __Alloc > __a, _Rope_char_ref_proxy< _CharT, __Alloc > __b)
- template<class _CharT , class _Alloc >
  void **__gnu_cxx::swap** (rope< _CharT, _Alloc > &__x, rope< _CharT, _Alloc > &__y)

Variables

- template<class _CharT , class _Alloc >
  rope< _CharT, _Alloc > **__gnu_cxx::identity_element** (_Rope_Concat_fn< _CharT, _Alloc >)

5.492.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file rope.

5.493 ropeimpl.h File Reference

Namespaces

- __gnu_cxx

Functions

- template<class _CharT , class _Traits >
  void **__gnu_cxx::_Rope_fill** (std::basic_ostream< _CharT, _Traits > &__o, std::size_t __n)
- template<class _CharT >
  bool **__gnu_cxx::_Rope_is_simple** (_CharT *)
- bool **__gnu_cxx::_Rope_is_simple** (char *)
- bool **__gnu_cxx::_Rope_is_simple** (wchar_t *)
- template<class _Rope_iterator >
  void **__gnu_cxx::_Rope_rotate** (_Rope_iterator __first, _Rope_iterator __middle, _Rope_iterator __last)

- template<class _CharT , class _Traits , class _Alloc >
  std::basic_ostream< _CharT,
  _Traits > & **__gnu_cxx::operator**<< (std::basic_ostream< _CharT, _Traits > &__o, const rope< _CharT, _Alloc > &__r)
- void **__gnu_cxx::rotate** (_Rope_iterator< char, __STL_DEFAULT_ALLOCATOR(char)> __first, _Rope_iterator< char, __STL_DEFAULT_ALLOCATOR(char)> __middle, _Rope_iterator< char, __STL_DEFAULT_ALLOCATOR(char)> __last)

5.493.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/rope>.

Definition in file ropeimpl.h.

5.494 rotate_fn_imps.hpp File Reference

5.494.1 Detailed Description

Contains imps for rotating nodes.

Definition in file bin_search_tree_/rotate_fn_imps.hpp.

5.495 rotate_fn_imps.hpp File Reference

5.495.1 Detailed Description

Contains imps for rotating nodes.

Definition in file pat_trie_/rotate_fn_imps.hpp.

5.496 safe_base.h File Reference

Classes

- class __gnu_debug::_Safe_iterator_base
- class __gnu_debug::_Safe_sequence_base

Namespaces

- __gnu_debug

Functions

- bool __gnu_debug::__check_singular_aux (const _Safe_iterator_base *__x)

5.496.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_base.h.

5.497 safe_container.h File Reference

Classes

- class __gnu_debug::_Safe_container< _SafeContainer, _Alloc, _SafeBase, _IsCxx11AllocatorAware >

Namespaces

- __gnu_debug

5.497.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_container.h.

5.498 safe_iterator.h File Reference

Classes

- struct __gnu_debug::_BeforeBeginHelper< _Sequence >
- class __gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat >
- struct __gnu_debug::_Sequence_traits< _Sequence >

Namespaces

- __gnu_debug

Macros

- #define **_GLIBCXX_DEBUG_VERIFY_DIST_OPERANDS**(_Lhs, _Rhs)
- #define **_GLIBCXX_DEBUG_VERIFY_EQ_OPERANDS**(_Lhs, _Rhs)
- #define **_GLIBCXX_DEBUG_VERIFY_OPERANDS**(_Lhs, _Rhs, _BadMsgId, _DiffMsgId)
- #define **_GLIBCXX_DEBUG_VERIFY_REL_OPERANDS**(_Lhs, _Rhs)

Functions

- template<typename _Iterator , typename _Sequence >
  _Iterator **__gnu_debug::__base** (const _Safe_iterator< _Iterator, _Sequence, std::random_access_iterator_tag > &__it)
- template<typename _Iterator , typename _Sequence , typename _Category , typename _Size >
  bool **__gnu_debug::__can_advance** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, _Size)
- template<typename _Iterator , typename _Sequence >
  _Iterator **__gnu_debug::__unsafe** (const _Safe_iterator< _Iterator, _Sequence > &__it)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool __gnu_debug::__valid_range (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe_-iterator< _Iterator, _Sequence, _Category > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _Iterator , typename _Sequence , typename _Category >
  bool **__gnu_debug::__valid_range** (const _Safe_iterator< _Iterator, _Sequence, _Category > &, const _Safe-_iterator< _Iterator, _Sequence, _Category > &)

5.498.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_iterator.h.

5.499 safe_iterator.tcc File Reference

Namespaces

- __gnu_debug
- std

Macros

- #define **_GLIBCXX_DEBUG_SAFE_ITERATOR_TCC**

Functions

- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _Ol >
  _Ol **std::__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _Ol)
- template<bool _IsMove, typename _Il , typename _Ite , typename _Seq , typename _Cat >
  __gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **std::__copy_move_a** (_Il, _Il, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)
- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat >
  ::__gnu_debug::_Safe_iterator
  < _OIte, _OSeq, _OCat > **std::__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)
- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _Ol >
  _Ol **std::__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _Ol)
- template<bool _IsMove, typename _Il , typename _Ite , typename _Seq , typename _Cat >
  __gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **std::__copy_move_backward_a** (_Il, _Il, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)
- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat >
  ::__gnu_debug::_Safe_iterator
  < _OIte, _OSeq, _OCat > **std::__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 >
  bool **std::__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, _II2)
- template<typename _II1 , typename _II2 , typename _Seq2 , typename _Cat2 >
  bool **std::__equal_aux** (_II1, _II1, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 , typename _Seq2 , typename _Cat2 >
  bool **std::__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)

- template<typename _Ite , typename _Seq , typename _Cat , typename _Tp >
  void **std::__fill_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const _Tp &)
- template<typename _Ite , typename _Seq , typename _Cat , typename _Size , typename _Tp >
  ::__gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **std::__fill_n_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &__first, _Size __n, const _Tp &__value, std::input_iterator_tag)

5.499.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_iterator.tcc.

5.500 safe_local_iterator.h File Reference

Classes

- class __gnu_debug::_Safe_local_iterator< _Iterator, _Sequence >

Namespaces

- __gnu_debug

Macros

- #define **_GLIBCXX_DEBUG_VERIFY_OPERANDS**(_Lhs, _Rhs)

Functions

- template<typename _Iterator , typename _Sequence >
  _Iterator **__gnu_debug::__unsafe** (const _Safe_local_iterator< _Iterator, _Sequence > &__it)
- template<typename _Iterator , typename _Sequence >
  bool __gnu_debug::__valid_range (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &, typename _Distance_traits< _Iterator >::__type &)
- template<typename _Iterator , typename _Sequence >
  bool **__gnu_debug::__valid_range** (const _Safe_local_iterator< _Iterator, _Sequence > &, const _Safe_local_iterator< _Iterator, _Sequence > &)

5.500.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_local_iterator.h.

5.501 safe_local_iterator.tcc File Reference

Namespaces

- __gnu_debug

Macros

- #define **_GLIBCXX_DEBUG_SAFE_LOCAL_ITERATOR_TCC**

5.501.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_local_iterator.tcc.

5.502 safe_sequence.h File Reference

Classes

- class __gnu_debug::_After_nth_from< _Iterator >
- class __gnu_debug::_Equal_to< _Type >
- class __gnu_debug::_Not_equal_to< _Type >
- class __gnu_debug::_Safe_node_sequence< _Sequence >
- class __gnu_debug::_Safe_sequence< _Sequence >

Namespaces

- __gnu_debug

5.502.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_sequence.h.

5.503 safe_sequence.tcc File Reference

Namespaces

- __gnu_debug

Macros

- #define **_GLIBCXX_DEBUG_SAFE_SEQUENCE_TCC**

5.503.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_sequence.tcc.

5.504 safe_unordered_base.h File Reference

Classes

- class __gnu_debug::_Safe_local_iterator_base
- class __gnu_debug::_Safe_unordered_container_base

Namespaces

- __gnu_debug

5.504.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_unordered_base.h.

5.505 safe_unordered_container.h File Reference

Classes

- class __gnu_debug::_Safe_unordered_container< _Container >

Namespaces

- __gnu_debug

5.505.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_unordered_container.h.

5.506 safe_unordered_container.tcc File Reference

Namespaces

- __gnu_debug

Macros

- #define **_GLIBCXX_DEBUG_SAFE_UNORDERED_CONTAINER_TCC**

5.506.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file safe_unordered_container.tcc.

5.507 sample_probe_fn.hpp File Reference

Classes

- class __gnu_pbds::sample_probe_fn

Namespaces

- __gnu_pbds

5.507.1 Detailed Description

Contains a sample probe policy.

Definition in file sample_probe_fn.hpp.

5.508 sample_range_hashing.hpp File Reference

Classes

- class __gnu_pbds::sample_range_hashing

Namespaces

- __gnu_pbds

5.508.1 Detailed Description

Contains a range hashing policy.

Definition in file sample_range_hashing.hpp.

5.509 sample_ranged_hash_fn.hpp File Reference

Classes

- class __gnu_pbds::sample_ranged_hash_fn

Namespaces

- __gnu_pbds

5.509.1 Detailed Description

Contains a ranged hash policy.

Definition in file sample_ranged_hash_fn.hpp.

5.510 sample_ranged_probe_fn.hpp File Reference

Classes

- class __gnu_pbds::sample_ranged_probe_fn

Namespaces

- __gnu_pbds

5.510.1 Detailed Description

Contains a ranged probe policy.

Definition in file sample_ranged_probe_fn.hpp.

5.511 sample_resize_policy.hpp File Reference

Classes

- class __gnu_pbds::sample_resize_policy

Namespaces

- __gnu_pbds

5.511.1 Detailed Description

Contains a sample resize policy for hash tables.

Definition in file sample_resize_policy.hpp.

5.512 sample_resize_trigger.hpp File Reference

Classes

- class __gnu_pbds::sample_resize_trigger

Namespaces

- __gnu_pbds

5.512.1 Detailed Description

Contains a sample resize trigger policy class.

Definition in file sample_resize_trigger.hpp.

5.513 sample_size_policy.hpp File Reference

Classes

- class __gnu_pbds::sample_size_policy

Namespaces

- __gnu_pbds

5.513.1 Detailed Description

Contains a sample size resize-policy.

Definition in file sample_size_policy.hpp.

5.514 sample_tree_node_update.hpp File Reference

Classes

- class __gnu_pbds::sample_tree_node_update< Const_Node_Iter, Node_Iter, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

5.514.1 Detailed Description

Contains a samle node update functor.

Definition in file sample_tree_node_update.hpp.

5.515 sample_trie_access_traits.hpp File Reference

Classes

- struct __gnu_pbds::sample_trie_access_traits

Namespaces

- __gnu_pbds

5.515.1 Detailed Description

Contains a sample probe policy.

Definition in file sample_trie_access_traits.hpp.

5.516 sample_trie_node_update.hpp File Reference

Classes

- class __gnu_pbds::sample_trie_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >

Namespaces

- __gnu_pbds

5.516.1 Detailed Description

Contains a samle node update functor.

Definition in file sample_trie_node_update.hpp.

5.517 sample_update_policy.hpp File Reference

Classes

- struct __gnu_pbds::sample_update_policy

Namespaces

- __gnu_pbds

5.517.1 Detailed Description

Contains a sample policy for list update containers.

Definition in file sample_update_policy.hpp.

5.518 scoped_allocator File Reference

Classes

- class std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs >

Namespaces

- std

Macros

- #define **_SCOPED_ALLOCATOR**

5.518.1 Detailed Description

This is a Standard C++ Library header.

Definition in file scoped_allocator.

5.519 search.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _RAIter , typename _DifferenceTp >
  void __gnu_parallel::__calc_borders (_RAIter __elements, _DifferenceTp __length, _DifferenceTp *__off)
- template<typename __RAIter1 , typename __RAIter2 , typename _Pred >
  __RAIter1 __gnu_parallel::__search_template (__RAIter1 __begin1, __RAIter1 __end1, __RAIter2 __begin2, _-
  _RAIter2 __end2, _Pred __pred)

5.519.1 Detailed Description

Parallel implementation base for std::search() and std::search_n(). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file search.h.

5.520 set File Reference

Macros

- #define **_GLIBCXX_SET**

5.520.1 Detailed Description

This is a Standard C++ Library header.

Definition in file set.

5.521 set File Reference

Classes

- class std::__debug::multiset< _Key, _Compare, _Allocator >
- class std::__debug::set< _Key, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_SET**

5.521.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/set.

5.522 set File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_SET**

Typedefs

- template<typename _Key , typename _Compare = less<_Key>>
  using **std::experimental::fundamentals_v2::pmr::multiset** = std::multiset< _Key, _Compare, polymorphic_allocator< _Key >>
- template<typename _Key , typename _Compare = less<_Key>>
  using **std::experimental::fundamentals_v2::pmr::set** = std::set< _Key, _Compare, polymorphic_allocator< _Key >>

Functions

- template<typename _Key , typename _Compare , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (set< _Key, _Compare, _Alloc > &__cont, _Predicate __pred)
- template<typename _Key , typename _Compare , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (multiset< _Key, _Compare, _Alloc > &__cont, _Predicate __pred)

5.522.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/set.

5.523 set.h File Reference

Classes

- class std::__debug::set< _Key, _Compare, _Allocator >

Namespaces

- std
- std::__debug

Functions

- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator!=** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator<=** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator==** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  bool **std::__debug::operator>=** (const set< _Key, _Compare, _Allocator > &__lhs, const set< _Key, _Compare, _Allocator > &__rhs)
- template<typename _Key , typename _Compare , typename _Allocator >
  void **std::__debug::swap** (set< _Key, _Compare, _Allocator > &__x, set< _Key, _Compare, _Allocator > &__y) noexcept(/*conditional */)

5.523.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file set.h.

5.524 set_operations.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter , typename _OutputIterator >
  _OutputIterator **__gnu_parallel::__copy_tail** (std::pair< _IIter, _IIter > __b, std::pair< _IIter, _IIter > __e, _OutputIterator __r)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__gnu_parallel::__parallel_set_difference** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _OutputIterator __result, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _Compare >
  _OutputIterator **__gnu_parallel::__parallel_set_intersection** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _OutputIterator __result, _Compare __comp)

- template<typename _IIter , typename _OutputIterator , typename _Operation > _OutputIterator **__gnu_parallel::__parallel_set_operation** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _OutputIterator __result, _Operation __op)
- template<typename _IIter , typename _OutputIterator , typename _Compare > _OutputIterator **__gnu_parallel::__parallel_set_symmetric_difference** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _OutputIterator __result, _Compare __comp)
- template<typename _IIter , typename _OutputIterator , typename _Compare > _OutputIterator **__gnu_parallel::__parallel_set_union** (_IIter __begin1, _IIter __end1, _IIter __begin2, _IIter __end2, _OutputIterator __result, _Compare __comp)

5.524.1 Detailed Description

Parallel implementations of set operations for random-access iterators. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file set_operations.h.

5.525 settings.h File Reference

Classes

- struct __gnu_parallel::_Settings

Namespaces

- __gnu_parallel

Macros

- #define _GLIBCXX_PARALLEL_CONDITION(__c)

5.525.1 Detailed Description

Runtime settings and tuning parameters, heuristics to decide whether to use parallelized algorithms. This file is a GNU parallel extension to the Standard C++ Library.

5.525.2 Deciding whether to run an algorithm in parallel.

There are several ways the user can switch on and off the parallel execution of an algorithm, both at compile- and run-time.

Only sequential execution can be forced at compile-time. This reduces code size and protects code parts that have non-thread-safe side effects.

Ultimately, forcing parallel execution at compile-time makes sense. Often, the sequential algorithm implementation is used as a subroutine, so no reduction in code size can be achieved. Also, the machine the program is run on might have only one processor core, so to avoid overhead, the algorithm is executed sequentially.

To force sequential execution of an algorithm ultimately at compile-time, the user must add the tag gnu_parallel::sequential_tag() to the end of the parameter list, e. g.

```
std::sort(__v.begin(), __v.end(), __gnu_parallel::sequential_tag());
```

This is compatible with all overloaded algorithm variants. No additional code will be instantiated, at all. The same holds for most algorithm calls with iterators not providing random access.

If the algorithm call is not forced to be executed sequentially at compile-time, the decision is made at run-time. The global variable __gnu_parallel::_Settings::algorithm_strategy is checked. It is a tristate variable corresponding to:

- a. force_sequential, meaning the sequential algorithm is executed.
- b. force_parallel, meaning the parallel algorithm is executed.
- c. heuristic

For heuristic, the parallel algorithm implementation is called only if the input size is sufficiently large. For most algorithms, the input size is the (combined) length of the input sequence(__s). The threshold can be set by the user, individually for each algorithm. The according variables are called gnu_parallel::_Settings::[algorithm]_minimal_n .

For some of the algorithms, there are even more tuning options, e. g. the ability to choose from multiple algorithm variants. See below for details.

Definition in file settings.h.

5.525.3 Macro Definition Documentation

5.525.3.1 #define _GLIBCXX_PARALLEL_CONDITION(__c)

Determine at compile(?)-time if the parallel variant of an algorithm should be called.

Parameters

__c	A condition that is convertible to bool that is overruled by __gnu_parallel::_Settings::algorithm_strategy. Usually a decision based on the input size.

Definition at line 94 of file settings.h.

5.526 shared_mutex File Reference

Classes

- class std::shared_lock< _Mutex >
- class std::shared_timed_mutex

Namespaces

- std

Macros

- #define **__cpp_lib_shared_timed_mutex**
- #define **_GLIBCXX_SHARED_MUTEX**

5.526.1 Detailed Description

This is a Standard C++ Library header.

Definition in file shared_mutex.

5.527 shared_ptr.h File Reference

Classes

- class std::enable_shared_from_this< _Tp >
- struct std::hash< shared_ptr< _Tp > >
- struct std::owner_less< _Tp >
- struct std::owner_less< shared_ptr< _Tp > >
- struct std::owner_less< void >
- struct std::owner_less< weak_ptr< _Tp > >
- class std::shared_ptr< _Tp >
- class std::weak_ptr< _Tp >

Namespaces

- std

Macros

- #define **__cpp_lib_enable_shared_from_this**

Functions

- template<typename _Del , typename _Tp , _Lock_policy _Lp>
  _Del * **std::get_deleter** (const __shared_ptr< _Tp, _Lp > &__p) noexcept

5.527.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file bits/shared_ptr.h.

5.528 shared_ptr.h File Reference

Classes

- struct std::hash< experimental::shared_ptr< _Tp > >
- struct std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >
- struct std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >

Namespaces

- std
- std::experimental

Functions

- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::atomic_compare_exchange_strong** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::atomic_compare_exchange_strong_explicit** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w, memory_order __success, memory_order __failure)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::atomic_compare_exchange_weak** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::atomic_compare_exchange_weak_explicit** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > *__v, shared_ptr< _Tp > __w, memory_order __success, memory_order __failure)
- template<typename _Tp >
  void **std::experimental::fundamentals_v2::atomic_exchange** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r)
- template<typename _Tp >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::atomic_exchange_explicit** (const shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order __mo)
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::atomic_is_lock_free** (const shared_ptr< _Tp > *__p)
- template<typename _Tp >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::atomic_load** (const shared_ptr< _Tp > *__p)
- template<typename _Tp >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::atomic_load_explicit** (const shared_ptr< _Tp > *__p, memory_order __mo)
- template<typename _Tp >
  void **std::experimental::fundamentals_v2::atomic_store** (shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r)
- template<typename _Tp >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::atomic_store_explicit** (const shared_ptr< _Tp > *__p, shared_ptr< _Tp > __r, memory_order __mo)
- template<typename _Tp , typename _Tp1 >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::const_pointer_cast** (const shared_ptr< _Tp1 > &__r) noexcept
- template<typename _Tp , typename _Tp1 >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::dynamic_pointer_cast** (const shared_ptr< _Tp1 > &__r) noexcept
- template<typename _Del , typename _Tp >
  _Del * **std::experimental::fundamentals_v2::get_deleter** (const shared_ptr< _Tp > &__p) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator!=** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator!=** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator!=** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator<** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator<** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept

- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator<** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Ch , typename _Tr , typename _Tp >
  std::basic_ostream< _Ch, _Tr > & **std::experimental::fundamentals_v2::operator<<** (std::basic_ostream< _Ch, _Tr > &__os, const shared_ptr< _Tp > &__p)
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator<=** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator<=** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator<=** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator==** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator==** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator==** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator>** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator>** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator>** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 >
  bool **std::experimental::fundamentals_v2::operator>=** (const shared_ptr< _Tp1 > &__a, const shared_ptr< _Tp2 > &__b) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator>=** (const shared_ptr< _Tp > &__a, nullptr_t) noexcept
- template<typename _Tp >
  bool **std::experimental::fundamentals_v2::operator>=** (nullptr_t, const shared_ptr< _Tp > &__a) noexcept
- template<typename _Tp , typename _Tp1 >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::reinterpret_pointer_cast** (const shared_ptr< _Tp1 > &__r) noexcept
- template<typename _Tp , typename _Tp1 >
  shared_ptr< _Tp > **std::experimental::fundamentals_v2::static_pointer_cast** (const shared_ptr< _Tp1 > &__r) noexcept
- template<typename _Tp >
  void **std::experimental::fundamentals_v2::swap** (shared_ptr< _Tp > &__a, shared_ptr< _Tp > &__b) noexcept
- template<typename _Tp >
  void **std::experimental::fundamentals_v2::swap** (weak_ptr< _Tp > &__a, weak_ptr< _Tp > &__b) noexcept

Variables

- template<typename _Yp , typename _Tp >
  constexpr bool **std::experimental::fundamentals_v2::__sp_compatible_v**
- template<typename _Tp , typename _Yp >
  constexpr bool **std::experimental::fundamentals_v2::__sp_is_constructible_v**

5.528.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <experimental/memory>.

Definition in file experimental/bits/shared_ptr.h.

5.529 shared_ptr_atomic.h File Reference

Namespaces

- std

5.529.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file shared_ptr_atomic.h.

5.530 shared_ptr_base.h File Reference

Classes

- struct std::_Sp_ebo_helper< _Nm, _Tp, false >
- struct std::_Sp_ebo_helper< _Nm, _Tp, true >
- class std::bad_weak_ptr
- class std::enable_shared_from_this< _Tp >
- struct std::hash< __shared_ptr< _Tp, _Lp > >
- struct std::owner_less< _Tp >
- class std::shared_ptr< _Tp >
- class std::weak_ptr< _Tp >

Namespaces

- std

Macros

- #define **__cpp_lib_shared_ptr_arrays**

Functions

- template<typename _Tp , _Lock_policy _Lp = __default_lock_policy, typename _Alloc , typename... _Args>
  __shared_ptr< _Tp, _Lp > **std::__allocate_shared** (const _Alloc &__a, _Args &&...__args)
- template<typename _Tp , _Lock_policy _Lp = __default_lock_policy, typename... _Args>
  __shared_ptr< _Tp, _Lp > **std::__make_shared** (_Args &&...__args)
- void **std::__throw_bad_weak_ptr** ()
- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > std::const_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept

- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > std::dynamic_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **std::operator!=** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator!=** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator!=** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp , typename _Up , _Lock_policy _Lp>
  bool **std::operator<** (const __shared_ptr< _Tp, _Lp > &__a, const __shared_ptr< _Up, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator<** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator<** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **std::operator<=** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator<=** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator<=** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **std::operator==** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator==** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator==** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **std::operator>** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator>** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator>** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp1 , typename _Tp2 , _Lock_policy _Lp>
  bool **std::operator>=** (const __shared_ptr< _Tp1, _Lp > &__a, const __shared_ptr< _Tp2, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator>=** (const __shared_ptr< _Tp, _Lp > &__a, nullptr_t) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  bool **std::operator>=** (nullptr_t, const __shared_ptr< _Tp, _Lp > &__a) noexcept
- template<typename _Tp , typename _Tp1 , _Lock_policy _Lp>
  __shared_ptr< _Tp, _Lp > std::static_pointer_cast (const __shared_ptr< _Tp1, _Lp > &__r) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  void **std::swap** (__shared_ptr< _Tp, _Lp > &__a, __shared_ptr< _Tp, _Lp > &__b) noexcept
- template<typename _Tp , _Lock_policy _Lp>
  void **std::swap** (__weak_ptr< _Tp, _Lp > &__a, __weak_ptr< _Tp, _Lp > &__b) noexcept

5.530.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file shared_ptr_base.h.

5.531 size_fn_imps.hpp File Reference

5.531.1 Detailed Description

Contains implementations of cc_ht_map_'s entire container size related functions.

Definition in file size_fn_imps.hpp.

5.532 slice_array.h File Reference

Classes

- class std::slice
- class std::slice_array< _Tp >

Namespaces

- std

Macros

- #define **_DEFINE_VALARRAY_OPERATOR**(_Op, _Name)

5.532.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file slice_array.h.

5.533 slist File Reference

Classes

- class __gnu_cxx::slist< _Tp, _Alloc >

Namespaces

- __gnu_cxx
- std

Macros

- #define **_SLIST**

Functions

- _Slist_node_base * **__gnu_cxx::__slist_make_link** (_Slist_node_base *__prev_node, _Slist_node_base *__new_node)
- _Slist_node_base * **__gnu_cxx::__slist_previous** (_Slist_node_base *__head, const _Slist_node_base *__node)
- const _Slist_node_base * **__gnu_cxx::__slist_previous** (const _Slist_node_base *__head, const _Slist_node_base *__node)
- _Slist_node_base * **__gnu_cxx::__slist_reverse** (_Slist_node_base *__node)
- std::size_t **__gnu_cxx::__slist_size** (_Slist_node_base *__node)
- void **__gnu_cxx::__slist_splice_after** (_Slist_node_base *__pos, _Slist_node_base *__before_first, _Slist_node_base *__before_last)
- void **__gnu_cxx::__slist_splice_after** (_Slist_node_base *__pos, _Slist_node_base *__head)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator!=** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator<** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator<=** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator==** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator>** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  bool **__gnu_cxx::operator>=** (const slist< _Tp, _Alloc > &_SL1, const slist< _Tp, _Alloc > &_SL2)
- template<class _Tp , class _Alloc >
  void **__gnu_cxx::swap** (slist< _Tp, _Alloc > &__x, slist< _Tp, _Alloc > &__y)

5.533.1 Detailed Description

This file is a GNU extension to the Standard C++ Library (possibly containing extensions from the HP/SGI STL subset).

Definition in file slist.

5.534 sort.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<bool __stable, typename _RAIter , typename _Compare , typename _Parallelism >
  void **__gnu_parallel::__parallel_sort** (_RAIter __begin, _RAIter __end, _Compare __comp, _Parallelism __parallelism)

- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_exact_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, multiway_mergesort_sampling_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, quicksort_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, balanced_quicksort_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, default_parallel_tag __parallelism)
- template<bool __stable, typename _RAIter , typename _Compare >
  void __gnu_parallel::__parallel_sort (_RAIter __begin, _RAIter __end, _Compare __comp, parallel_tag __parallelism)

5.534.1 Detailed Description

Parallel sorting algorithm switch. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file sort.h.

5.535 span File Reference

Macros

- #define **_GLIBCXX_SPAN**

5.535.1 Detailed Description

This is a Standard C++ Library header.

Definition in file span.

5.536 specfun.h File Reference

Namespaces

- __gnu_cxx
- std

Macros

- #define **__cpp_lib_math_special_functions**
- #define **__STDCPP_MATH_SPEC_FUNCS__**

Functions

- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type __gnu_cxx::airy_ai (_Tp __x)
- float __gnu_cxx::airy_aif (float __x)
- long double __gnu_cxx::airy_ail (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type __gnu_cxx::airy_bi (_Tp __x)
- float __gnu_cxx::airy_bif (float __x)
- long double __gnu_cxx::airy_bil (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::assoc_laguerre (unsigned int __n, unsigned int __m, _Tp __x)
- float std::assoc_laguerref (unsigned int __n, unsigned int __m, float __x)
- long double std::assoc_laguerrel (unsigned int __n, unsigned int __m, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::assoc_legendre (unsigned int __l, unsigned int __m, _Tp __x)
- float std::assoc_legendref (unsigned int __l, unsigned int __m, float __x)
- long double std::assoc_legendrel (unsigned int __l, unsigned int __m, long double __x)
- template<typename _Tpa , typename _Tpb >
  __gnu_cxx::__promote_2< _Tpa,
  _Tpb >::__type std::beta (_Tpa __a, _Tpb __b)
- float std::betaf (float __a, float __b)
- long double std::betal (long double __a, long double __b)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::comp_ellint_1 (_Tp __k)
- float std::comp_ellint_1f (float __k)
- long double std::comp_ellint_1l (long double __k)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::comp_ellint_2 (_Tp __k)
- float std::comp_ellint_2f (float __k)
- long double std::comp_ellint_2l (long double __k)
- template<typename _Tp , typename _Tpn >
  __gnu_cxx::__promote_2< _Tp,
  _Tpn >::__type std::comp_ellint_3 (_Tp __k, _Tpn __nu)
- float std::comp_ellint_3f (float __k, float __nu)
- long double std::comp_ellint_3l (long double __k, long double __nu)
- template<typename _Tpa , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_3< _Tpa,
  _Tpc, _Tp >::__type __gnu_cxx::conf_hyperg (_Tpa __a, _Tpc __c, _Tp __x)
- float __gnu_cxx::conf_hypergf (float __a, float __c, float __x)
- long double __gnu_cxx::conf_hypergl (long double __a, long double __c, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_i (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_if (float __nu, float __x)
- long double std::cyl_bessel_il (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_j (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_jf (float __nu, float __x)
- long double std::cyl_bessel_jl (long double __nu, long double __x)

- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_bessel_k (_Tpnu __nu, _Tp __x)
- float std::cyl_bessel_kf (float __nu, float __x)
- long double std::cyl_bessel_kl (long double __nu, long double __x)
- template<typename _Tpnu , typename _Tp >
  __gnu_cxx::__promote_2< _Tpnu,
  _Tp >::__type std::cyl_neumann (_Tpnu __nu, _Tp __x)
- float std::cyl_neumannf (float __nu, float __x)
- long double std::cyl_neumannl (long double __nu, long double __x)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::ellint_1 (_Tp __k, _Tpp __phi)
- float std::ellint_1f (float __k, float __phi)
- long double std::ellint_1l (long double __k, long double __phi)
- template<typename _Tp , typename _Tpp >
  __gnu_cxx::__promote_2< _Tp,
  _Tpp >::__type std::ellint_2 (_Tp __k, _Tpp __phi)
- float std::ellint_2f (float __k, float __phi)
- long double std::ellint_2l (long double __k, long double __phi)
- template<typename _Tp , typename _Tpn , typename _Tpp >
  __gnu_cxx::__promote_3< _Tp,
  _Tpn, _Tpp >::__type std::ellint_3 (_Tp __k, _Tpn __nu, _Tpp __phi)
- float std::ellint_3f (float __k, float __nu, float __phi)
- long double std::ellint_3l (long double __k, long double __nu, long double __phi)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::expint (_Tp __x)
- float std::expintf (float __x)
- long double std::expintl (long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::hermite (unsigned int __n, _Tp __x)
- float std::hermitef (unsigned int __n, float __x)
- long double std::hermitel (unsigned int __n, long double __x)
- template<typename _Tpa , typename _Tpb , typename _Tpc , typename _Tp >
  __gnu_cxx::__promote_4< _Tpa,
  _Tpb, _Tpc, _Tp >::__type __gnu_cxx::hyperg (_Tpa __a, _Tpb __b, _Tpc __c, _Tp __x)
- float __gnu_cxx::hypergf (float __a, float __b, float __c, float __x)
- long double __gnu_cxx::hypergl (long double __a, long double __b, long double __c, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::laguerre (unsigned int __n, _Tp __x)
- float std::laguerref (unsigned int __n, float __x)
- long double std::laguerrel (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::legendre (unsigned int __l, _Tp __x)
- float std::legendref (unsigned int __l, float __x)
- long double std::legendrel (unsigned int __l, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::riemann_zeta (_Tp __s)
- float std::riemann_zetaf (float __s)
- long double std::riemann_zetal (long double __s)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_bessel (unsigned int __n, _Tp __x)

- float std::sph_besself (unsigned int __n, float __x)
- long double std::sph_bessell (unsigned int __n, long double __x)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_legendre (unsigned int __l, unsigned int __m, _Tp __theta)
- float std::sph_legendref (unsigned int __l, unsigned int __m, float __theta)
- long double std::sph_legendrel (unsigned int __l, unsigned int __m, long double __theta)
- template<typename _Tp >
  __gnu_cxx::__promote< _Tp >::__type std::sph_neumann (unsigned int __n, _Tp __x)
- float std::sph_neumannf (unsigned int __n, float __x)
- long double std::sph_neumannl (unsigned int __n, long double __x)

5.536.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <cmath>.

Definition in file specfun.h.

5.537 splay_fn_imps.hpp File Reference

5.537.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_fn_imps.hpp.

5.538 splay_tree_.hpp File Reference

Classes

- class __gnu_pbds::detail::splay_tree_map< Key, Mapped, Cmp_Fn, Node_And_It_Traits, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_BASE_NODE_CONSISTENT**(_Node)
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_S_TREE_BASE**
- #define **PB_DS_S_TREE_BASE_NAME**
- #define **PB_DS_S_TREE_NAME**

5.538.1 Detailed Description

Contains an implementation class for splay trees.

Definition in file splay_tree_.hpp.

5.539 split_fn_imps.hpp File Reference

5.539.1 Detailed Description

Contains an implementation class for pat_trie.

Definition in file split_fn_imps.hpp.

5.540 split_join_fn_imps.hpp File Reference

5.540.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/split_join_fn_imps.hpp.

5.541 split_join_fn_imps.hpp File Reference

5.541.1 Detailed Description

Contains an implementation class for a base of binomial heaps.

Definition in file binomial_heap_base_/split_join_fn_imps.hpp.

5.542 split_join_fn_imps.hpp File Reference

5.542.1 Detailed Description

Contains an implementation class for bin_search_tree_.

Definition in file bin_search_tree_/split_join_fn_imps.hpp.

5.543 split_join_fn_imps.hpp File Reference

5.543.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/split_join_fn_imps.hpp.

5.544 split_join_fn_imps.hpp File Reference

5.544.1 Detailed Description

Contains an implementation class for a pairing heap.

Definition in file pairing_heap_/split_join_fn_imps.hpp.

5.545 split_join_fn_imps.hpp File Reference

5.545.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/split_join_fn_imps.hpp.

5.546 split_join_fn_imps.hpp File Reference

5.546.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/split_join_fn_imps.hpp.

5.547 split_join_fn_imps.hpp File Reference

5.547.1 Detailed Description

Contains an implementation class for splay_tree_.

Definition in file splay_tree_/split_join_fn_imps.hpp.

5.548 split_join_fn_imps.hpp File Reference

5.548.1 Detailed Description

Contains an implementation for thin_heap_.

Definition in file thin_heap_/split_join_fn_imps.hpp.

5.549 sso_string_base.h File Reference

Namespaces

- __gnu_cxx

5.549.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/vstring.h>.

Definition in file sso_string_base.h.

5.550 sstream File Reference

Classes

- class std::basic_istringstream< _CharT, _Traits, _Alloc >
- class std::basic_ostringstream< _CharT, _Traits, _Alloc >
- class std::basic_stringbuf< _CharT, _Traits, _Alloc >
- class std::basic_stringstream< _CharT, _Traits, _Alloc >

Namespaces

- std

Macros

- #define **_GLIBCXX_SSTREAM**

Functions

- template<class _CharT , class _Traits , class _Allocator >
  void std::swap (basic_stringbuf< _CharT, _Traits, _Allocator > &__x, basic_stringbuf< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void std::swap (basic_istringstream< _CharT, _Traits, _Allocator > &__x, basic_istringstream< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void std::swap (basic_ostringstream< _CharT, _Traits, _Allocator > &__x, basic_ostringstream< _CharT, _Traits, _Allocator > &__y)
- template<class _CharT , class _Traits , class _Allocator >
  void std::swap (basic_stringstream< _CharT, _Traits, _Allocator > &__x, basic_stringstream< _CharT, _Traits, _Allocator > &__y)

5.550.1 Detailed Description

This is a Standard C++ Library header.

Definition in file sstream.

5.551 sstream.tcc File Reference

Namespaces

- std

Macros

- #define **_SSTREAM_TCC**

5.551.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <sstream>.

Definition in file sstream.tcc.

5.552 stack File Reference

Macros

- #define **_GLIBCXX_STACK**

5.552.1 Detailed Description

This is a Standard C++ Library header.

Definition in file stack.

5.553 standard_policies.hpp File Reference

Classes

- struct __gnu_pbds::detail::default_comb_hash_fn
- struct __gnu_pbds::detail::default_eq_fn< Key >
- struct __gnu_pbds::detail::default_hash_fn< Key >
- struct __gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn >
- struct __gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn >
- struct __gnu_pbds::detail::default_trie_access_traits< Key >
- struct __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > >
- struct __gnu_pbds::detail::default_update_policy

Namespaces

- __gnu_pbds

Macros

- #define **__dtrie_alloc**
- #define **__dtrie_string**

Enumerations

- enum { **default_store_hash** }

5.553.1 Detailed Description

Contains standard policies for containers.

Definition in file standard_policies.hpp.

5.554 std_abs.h File Reference

Namespaces

- std

Functions

- long **std::abs** (long __i)
- long long **std::abs** (long long __x)
- constexpr double **std::abs** (double __x)
- constexpr float **std::abs** (float __x)
- constexpr long double **std::abs** (long double __x)

5.554.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <cmath> or < cstdlib>.

Definition in file std_abs.h.

5.555 std_function.h File Reference

Classes

- struct std::__is_location_invariant< _Tp >
- class std::_Function_base
- class std::bad_function_call
- class std::function< _Res(_ArgTypes...)>

Namespaces

- std

Enumerations

- enum **_Manager_operation** { **__get_type_info**, **__get_functor_ptr**, **__clone_functor**, **__destroy_functor** }

Functions

- template<typename _Res , typename... _Args>
  bool std::operator!= (const function< _Res(_Args...)> &__f, nullptr_t) noexcept
- template<typename _Res , typename... _Args>
  bool std::operator!= (nullptr_t, const function< _Res(_Args...)> &__f) noexcept
- template<typename _Res , typename... _Args>
  bool std::operator== (const function< _Res(_Args...)> &__f, nullptr_t) noexcept
- template<typename _Res , typename... _Args>
  bool std::operator== (nullptr_t, const function< _Res(_Args...)> &__f) noexcept
- template<typename _Res , typename... _Args>
  void std::swap (function< _Res(_Args...)> &__x, function< _Res(_Args...)> &__y) noexcept

5.555.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file std_function.h.

5.556 std_mutex.h File Reference

Classes

- struct std::adopt_lock_t
- struct std::defer_lock_t
- class std::lock_guard< _Mutex >
- class std::mutex
- struct std::try_to_lock_t

Namespaces

- std

Variables

- constexpr adopt_lock_t std::adopt_lock
- constexpr defer_lock_t std::defer_lock
- constexpr try_to_lock_t std::try_to_lock

5.556.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <mutex>.

Definition in file std_mutex.h.

5.557 stdc++.h File Reference

5.557.1 Detailed Description

This is an implementation file for a precompiled header.

Definition in file stdc++.h.

5.558 stdexcept File Reference

Classes

- class std::domain_error
- class std::invalid_argument
- class std::length_error
- class std::logic_error
- class std::out_of_range
- class std::overflow_error
- class std::range_error
- class std::runtime_error
- class std::underflow_error

Namespaces

- std

Macros

- #define **_GLIBCXX_STDEXCEPT**

Typedefs

- typedef basic_string< char > **std::__cow_string**
- typedef basic_string< char > **std::__sso_string**

5.558.1 Detailed Description

This is a Standard C++ Library header.

Definition in file stdexcept.

5.559 stdio_filebuf.h File Reference

Classes

- class __gnu_cxx::stdio_filebuf< _CharT, _Traits >

Namespaces

- __gnu_cxx

5.559.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file stdio_filebuf.h.

5.560 stdio_sync_filebuf.h File Reference

Classes

- class __gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >

Namespaces

- __gnu_cxx

5.560.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file stdio_sync_filebuf.h.

5.561 stdlib.h File Reference

5.561.1 Detailed Description

This is a Standard C++ Library header.

Definition in file stdlib.h.

5.562 stdtr1c++.h File Reference

5.562.1 Detailed Description

This is an implementation file for a precompiled header.

Definition in file stdtr1c++.h.

5.563 stl_algo.h File Reference

Namespaces

- std

Enumerations

- enum { **_S_threshold** }
- enum { **_S_chunk_size** }

Functions

- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator **std::__adjacent_find** (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _RandomAccessIterator , typename _Distance , typename _Compare >
  constexpr void **std::__chunk_insertion_sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Distance __chunk_size, _Compare __comp)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator **std::__copy_n** (_InputIterator __first, _Size __n, _OutputIterator __result, input_iterator_tag)
- template<typename _RandomAccessIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator **std::__copy_n** (_RandomAccessIterator __first, _Size __n, _OutputIterator __result, random_access_iterator_tag)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator **std::__copy_n_a** (_InputIterator __first, _Size __n, _OutputIterator __result)
- template<typename _CharT , typename _Size >
  __enable_if_t< __is_char
  < _CharT >::__value, _CharT * > **std::__copy_n_a** (istreambuf_iterator< _CharT, char_traits< _CharT >>, _Size, _CharT *)
- template<typename _ForwardIterator , typename _Tp , typename _CompareItTp , typename _CompareTpIt >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > **std::__equal_range** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _CompareItTp __comp_it_val, _CompareTpIt __comp_val_it)

- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::__final_insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 **std::__find_end** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, forward_iterator_tag, forward_iterator_tag, _BinaryPredicate __comp)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _BinaryPredicate >
  constexpr _BidirectionalIterator1 **std::__find_end** (_BidirectionalIterator1 __first1, _BidirectionalIterator1 __last1, _BidirectionalIterator2 __first2, _BidirectionalIterator2 __last2, bidirectional_iterator_tag, bidirectional_iterator_tag, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::__find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate , typename _Distance >
  constexpr _InputIterator std::__find_if_not_n (_InputIterator __first, _Distance &__len, _Predicate __pred)
- template<typename _EuclideanRingElement >
  constexpr _EuclideanRingElement std::__gcd (_EuclideanRingElement __m, _EuclideanRingElement __n)
- template<typename _IntType , typename _UniformRandomBitGenerator >
  pair< _IntType, _IntType > std::__gen_two_uniform_ints (_IntType __b0, _IntType __b1, _UniformRandomBitGenerator &&__g)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::__heap_select (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare >
  constexpr bool **std::__includes** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Compare >
  void **std::__inplace_merge** (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  void std::__inplace_stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::__insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Size , typename _Compare >
  constexpr void **std::__introselect** (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last, _Size __depth_limit, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Size , typename _Compare >
  constexpr void std::__introsort_loop (_RandomAccessIterator __first, _RandomAccessIterator __last, _Size __depth_limit, _Compare __comp)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool **std::__is_permutation** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __pred)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **std::__is_sorted_until** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **std::__max_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator **std::__merge** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)

- template<typename _BidirectionalIterator , typename _Distance , typename _Pointer , typename _Compare >
  void std::__merge_adaptive (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Distance __len1, _Distance __len2, _Pointer __buffer, _Distance __buffer_size, _Compare __comp)
- template<typename _RandomAccessIterator1 , typename _RandomAccessIterator2 , typename _Distance , typename _Compare >
  void **std::__merge_sort_loop** (_RandomAccessIterator1 __first, _RandomAccessIterator1 __last, _RandomAccessIterator2 __result, _Distance __step_size, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Pointer , typename _Compare >
  void **std::__merge_sort_with_buffer** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Pointer __buffer, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Distance , typename _Compare >
  void std::__merge_without_buffer (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Distance __len1, _Distance __len2, _Compare __comp)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator **std::__min_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > **std::__minmax_element** (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Iterator , typename _Compare >
  constexpr void std::__move_median_to_first (_Iterator __result, _Iterator __a, _Iterator __b, _Iterator __c, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator , typename _Compare >
  _OutputIterator std::__move_merge (_InputIterator __first1, _InputIterator __last1, _InputIterator __first2, _InputIterator __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  void std::__move_merge_adaptive (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _BidirectionalIterator3 , typename _Compare >
  void std::__move_merge_adaptive_backward (_BidirectionalIterator1 __first1, _BidirectionalIterator1 __last1, _BidirectionalIterator2 __first2, _BidirectionalIterator2 __last2, _BidirectionalIterator3 __result, _Compare __comp)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool **std::__next_permutation** (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **std::__partial_sort** (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator **std::__partial_sort_copy** (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last, _Compare __comp)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::__partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, forward_iterator_tag)
- template<typename _BidirectionalIterator , typename _Predicate >
  constexpr _BidirectionalIterator std::__partition (_BidirectionalIterator __first, _BidirectionalIterator __last, _Predicate __pred, bidirectional_iterator_tag)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool **std::__prev_permutation** (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator **std::__remove_copy_if** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)

- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator **std::__remove_if** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp >
  constexpr _OutputIterator **std::__replace_copy_if** (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred, const _Tp &__new_value)
- template<typename _BidirectionalIterator >
  constexpr void std::__reverse (_BidirectionalIterator __first, _BidirectionalIterator __last, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator >
  constexpr void std::__reverse (_RandomAccessIterator __first, _RandomAccessIterator __last, random_access_iterator_tag)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator **std::_V2::__rotate** (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last, forward_iterator_tag)
- template<typename _BidirectionalIterator >
  constexpr _BidirectionalIterator **std::_V2::__rotate** (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator >
  constexpr _RandomAccessIterator **std::_V2::__rotate** (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, random_access_iterator_tag)
- template<typename _BidirectionalIterator1 , typename _BidirectionalIterator2 , typename _Distance >
  _BidirectionalIterator1 std::__rotate_adaptive (_BidirectionalIterator1 __first, _BidirectionalIterator1 __middle, _BidirectionalIterator1 __last, _Distance __len1, _Distance __len2, _BidirectionalIterator2 __buffer, _Distance __buffer_size)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Size , typename _UniformRandomBitGenerator >
  _RandomAccessIterator std::__sample (_InputIterator __first, _InputIterator __last, input_iterator_tag, _RandomAccessIterator __out, random_access_iterator_tag, _Size __n, _UniformRandomBitGenerator &&__g)
- template<typename _ForwardIterator , typename _OutputIterator , typename _Cat , typename _Size , typename _UniformRandomBitGenerator >
  _OutputIterator std::__sample (_ForwardIterator __first, _ForwardIterator __last, forward_iterator_tag, _OutputIterator __out, _Cat, _Size __n, _UniformRandomBitGenerator &&__g)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 **std::__search** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __predicate)
- template<typename _ForwardIterator , typename _Integer , typename _UnaryPredicate >
  constexpr _ForwardIterator **std::__search_n** (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, _UnaryPredicate __unary_pred)
- template<typename _ForwardIterator , typename _Integer , typename _UnaryPredicate >
  constexpr _ForwardIterator std::__search_n_aux (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, _UnaryPredicate __unary_pred, std::forward_iterator_tag)
- template<typename _RandomAccessIter , typename _Integer , typename _UnaryPredicate >
  constexpr _RandomAccessIter std::__search_n_aux (_RandomAccessIter __first, _RandomAccessIter __last, _Integer __count, _UnaryPredicate __unary_pred, std::random_access_iterator_tag)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator **std::__set_difference** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator **std::__set_intersection** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator **std::__set_symmetric_difference** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)

- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
constexpr _OutputIterator **std::__set_union** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void **std::__sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Predicate >
_ForwardIterator **std::__stable_partition** (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Pointer , typename _Predicate , typename _Distance >
_ForwardIterator std::__stable_partition_adaptive (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, _Distance __len, _Pointer __buffer, _Distance __buffer_size)
- template<typename _RandomAccessIterator , typename _Compare >
void **std::__stable_sort** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Pointer , typename _Distance , typename _Compare >
void **std::__stable_sort_adaptive** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Pointer __buffer, _Distance __buffer_size, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void std::__unguarded_insertion_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr void std::__unguarded_linear_insert (_RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr _RandomAccessIterator std::__unguarded_partition (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomAccessIterator __pivot, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Compare >
constexpr _RandomAccessIterator std::__unguarded_partition_pivot (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _BinaryPredicate >
constexpr _ForwardIterator **std::__unique** (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _ForwardIterator , typename _OutputIterator , typename _BinaryPredicate >
constexpr _OutputIterator std::__unique_copy (_ForwardIterator __first, _ForwardIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred, forward_iterator_tag, output_iterator_tag)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate >
constexpr _OutputIterator std::__unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred, input_iterator_tag, output_iterator_tag)
- template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate >
constexpr _ForwardIterator std::__unique_copy (_InputIterator __first, _InputIterator __last, _ForwardIterator __result, _BinaryPredicate __binary_pred, input_iterator_tag, forward_iterator_tag)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
constexpr _ForwardIterator **std::__upper_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _ForwardIterator >
constexpr _ForwardIterator std::adjacent_find (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
constexpr _ForwardIterator std::adjacent_find (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _Predicate >
constexpr bool std::all_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate >
constexpr bool std::any_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Tp >
constexpr bool std::binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)

- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr bool std::binary_search (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator std::copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _InputIterator , typename _Size , typename _OutputIterator >
  constexpr _OutputIterator std::copy_n (_InputIterator __first, _Size __n, _OutputIterator __result)
- template<typename _InputIterator , typename _Tp >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type std::count (_InputIterator __first, _InputIterator __last, const _Tp &__value)
- template<typename _InputIterator , typename _Predicate >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type std::count_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::equal_range (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _InputIterator , typename _Tp >
  constexpr _InputIterator std::find (_InputIterator __first, _InputIterator __last, const _Tp &__val)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 std::find_end (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _ForwardIterator >
  constexpr _InputIterator std::find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2)
- template<typename _InputIterator , typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _InputIterator std::find_first_of (_InputIterator __first1, _InputIterator __last1, _ForwardIterator __first2, _ForwardIterator __last2, _BinaryPredicate __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::find_if_not (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _Function >
  constexpr _Function std::for_each (_InputIterator __first, _InputIterator __last, _Function __f)
- template<typename _ForwardIterator , typename _Generator >
  constexpr void std::generate (_ForwardIterator __first, _ForwardIterator __last, _Generator __gen)
- template<typename _OutputIterator , typename _Size , typename _Generator >
  constexpr _OutputIterator std::generate_n (_OutputIterator __first, _Size __n, _Generator __gen)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr bool std::includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)

- template<typename _InputIterator1 , typename _InputIterator2 , typename _Compare >
  constexpr bool std::includes (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _Compare __comp)
- template<typename _BidirectionalIterator >
  void std::inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  void std::inplace_merge (_BidirectionalIterator __first, _BidirectionalIterator __middle, _BidirectionalIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::is_partitioned (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _BinaryPredicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __pred)
- template<typename _ForwardIterator >
  constexpr bool std::is_sorted (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr bool std::is_sorted (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::is_sorted_until (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator std::lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **std::max** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **std::max** (initializer_list< _Tp >, _Compare)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::max_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::max_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::merge (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _Tp >
  constexpr _Tp **std::min** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr _Tp **std::min** (initializer_list< _Tp >, _Compare)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::min_element (_ForwardIterator __first, _ForwardIterator __last)

- template<typename _ForwardIterator , typename _Compare >
  constexpr _ForwardIterator std::min_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _Tp >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr pair< const _Tp
  &, const _Tp & > std::minmax (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr pair< _Tp, _Tp > **std::minmax** (initializer_list< _Tp >)
- template<typename _Tp , typename _Compare >
  constexpr pair< _Tp, _Tp > **std::minmax** (initializer_list< _Tp >, _Compare)
- template<typename _ForwardIterator >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::minmax_element (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _Compare >
  constexpr pair
  < _ForwardIterator,
  _ForwardIterator > std::minmax_element (_ForwardIterator __first, _ForwardIterator __last, _Compare __comp)
- template<typename _BidirectionalIterator >
  constexpr bool std::next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool std::next_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _Predicate >
  constexpr bool std::none_of (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _RandomAccessIterator >
  constexpr void std::nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::nth_element (_RandomAccessIterator __first, _RandomAccessIterator __nth, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::partial_sort (_RandomAccessIterator __first, _RandomAccessIterator __middle, _RandomAccessIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _RandomAccessIterator >
  constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last)
- template<typename _InputIterator , typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator std::partial_sort_copy (_InputIterator __first, _InputIterator __last, _RandomAccessIterator __result_first, _RandomAccessIterator __result_last, _Compare __comp)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _InputIterator , typename _OutputIterator1 , typename _OutputIterator2 , typename _Predicate >
  constexpr pair
  < _OutputIterator1,
  _OutputIterator2 > std::partition_copy (_InputIterator __first, _InputIterator __last, _OutputIterator1 __out_true, _OutputIterator2 __out_false, _Predicate __pred)

- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::partition_point (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _BidirectionalIterator >
  constexpr bool std::prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _Compare >
  constexpr bool std::prev_permutation (_BidirectionalIterator __first, _BidirectionalIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _RandomNumberGenerator >
  void std::random_shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomNumberGenerator &&__rand)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::remove (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  constexpr _OutputIterator std::remove_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__value)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate >
  constexpr _OutputIterator std::remove_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred)
- template<typename _ForwardIterator , typename _Predicate >
  constexpr _ForwardIterator std::remove_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::replace (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _InputIterator , typename _OutputIterator , typename _Tp >
  constexpr _OutputIterator std::replace_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, const _Tp &__old_value, const _Tp &__new_value)
- template<typename _InputIterator , typename _OutputIterator , typename _Predicate , typename _Tp >
  constexpr _OutputIterator std::replace_copy_if (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _Predicate __pred, const _Tp &__new_value)
- template<typename _ForwardIterator , typename _Predicate , typename _Tp >
  constexpr void std::replace_if (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred, const _Tp &__new_value)
- template<typename _BidirectionalIterator >
  constexpr void std::reverse (_BidirectionalIterator __first, _BidirectionalIterator __last)
- template<typename _BidirectionalIterator , typename _OutputIterator >
  constexpr _OutputIterator std::reverse_copy (_BidirectionalIterator __first, _BidirectionalIterator __last, _OutputIterator __result)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::_V2::rotate (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _OutputIterator >
  constexpr _OutputIterator std::rotate_copy (_ForwardIterator __first, _ForwardIterator __middle, _ForwardIterator __last, _OutputIterator __result)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator1 std::search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr _ForwardIterator1 std::search (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _ForwardIterator2 __last2, _BinaryPredicate __predicate)
- template<typename _ForwardIterator , typename _Integer , typename _Tp >
  constexpr _ForwardIterator std::search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val)

- template<typename _ForwardIterator , typename _Integer , typename _Tp , typename _BinaryPredicate >
  constexpr _ForwardIterator std::search_n (_ForwardIterator __first, _ForwardIterator __last, _Integer __count, const _Tp &__val, _BinaryPredicate __binary_pred)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_intersection (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_symmetric_difference (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator >
  constexpr _OutputIterator std::set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _Compare >
  constexpr _OutputIterator std::set_union (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _OutputIterator __result, _Compare __comp)
- template<typename _RandomAccessIterator , typename _UniformRandomNumberGenerator >
  void std::shuffle (_RandomAccessIterator __first, _RandomAccessIterator __last, _UniformRandomNumberGenerator &&__g)
- template<typename _RandomAccessIterator >
  constexpr void std::sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _ForwardIterator , typename _Predicate >
  _ForwardIterator std::stable_partition (_ForwardIterator __first, _ForwardIterator __last, _Predicate __pred)
- template<typename _RandomAccessIterator >
  void std::stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  void std::stable_sort (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _InputIterator , typename _OutputIterator , typename _UnaryOperation >
  constexpr _OutputIterator std::transform (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _UnaryOperation __unary_op)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::transform (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _ForwardIterator >
  constexpr _ForwardIterator std::unique (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _ForwardIterator , typename _BinaryPredicate >
  constexpr _ForwardIterator std::unique (_ForwardIterator __first, _ForwardIterator __last, _BinaryPredicate __binary_pred)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result)

- template<typename _InputIterator , typename _OutputIterator , typename _BinaryPredicate >
  constexpr _OutputIterator std::unique_copy (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryPredicate __binary_pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator std::upper_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)

5.563.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <algorithm>.

Definition in file stl_algo.h.

5.564 stl_algobase.h File Reference

Classes

- struct std::_Deque_iterator< _Tp, _Ref, _Ptr >
- struct std::char_traits< _CharT >
- class std::istreambuf_iterator< _CharT, _Traits >
- class std::ostreambuf_iterator< _CharT, _Traits >

Namespaces

- std

Macros

- #define **__cpp_lib_robust_nonmodifying_seq_ops**
- #define **_GLIBCXX_MOVE3**(_Tp, _Up, _Vp)
- #define **_GLIBCXX_MOVE_BACKWARD3**(_Tp, _Up, _Vp)

Functions

- template<bool _IsMove, typename _II , typename _OI >
  constexpr _OI **std::__copy_move_a** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _OI >
  _OI **std::__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _OI)
- template<bool _IsMove, typename _II , typename _Ite , typename _Seq , typename _Cat >
  __gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **std::__copy_move_a** (_II, _II, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)

- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat > ::__gnu_debug::_Safe_iterator < _OIte, _OSeq, _OCat > **std::__copy_move_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)
- template<bool _IsMove, typename _II , typename _OI > constexpr _OI **std::__copy_move_a1** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI > _OI **std::__copy_move_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp > ::_Deque_iterator< _OTp, _OTp &, _OTp * > **std::__copy_move_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp > __gnu_cxx::__enable_if < __is_random_access_iter< _II > ::__value,::_Deque_iterator < _Tp, _Tp &, _Tp * > >::__type **std::__copy_move_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT, char_traits< _CharT > > >::__type **std::__copy_move_a2** (_CharT *, _CharT *, ostreambuf_iterator< _CharT, char_traits< _CharT > >)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, ostreambuf_iterator< _CharT, char_traits< _CharT > > >::__type **std::__copy_move_a2** (const _CharT *, const _CharT *, ostreambuf_iterator< _CharT, char_traits< _CharT > >)
- template<bool _IsMove, typename _CharT > __gnu_cxx::__enable_if < __is_char< _CharT >::__value, _CharT * >::__type **std::__copy_move_a2** (istreambuf_iterator< _CharT, char_traits< _CharT > >, istreambuf_iterator< _CharT, char_traits< _CharT > >, _CharT *)
- template<bool _IsMove, typename _II , typename _OI > constexpr _OI **std::__copy_move_a2** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _II , typename _OI > constexpr _OI **std::__copy_move_backward_a** (_II __first, _II __last, _OI __result)
- template<bool _IsMove, typename _Ite , typename _Seq , typename _Cat , typename _OI > _OI **std::__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, _OI)
- template<bool _IsMove, typename _II , typename _Ite , typename _Seq , typename _Cat > __gnu_debug::_Safe_iterator < _Ite, _Seq, _Cat > **std::__copy_move_backward_a** (_II, _II, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &)
- template<bool _IsMove, typename _IIte , typename _ISeq , typename _ICat , typename _OIte , typename _OSeq , typename _OCat > ::__gnu_debug::_Safe_iterator < _OIte, _OSeq, _OCat > **std::__copy_move_backward_a** (const ::__gnu_debug::_Safe_iterator< _IIte, _I-

Seq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _IIte, _ISeq, _ICat > &, const ::__gnu_debug::_Safe_iterator< _OIte, _OSeq, _OCat > &)

- template<bool _IsMove, typename _BI1 , typename _BI2 >
constexpr _BI2 **std::__copy_move_backward_a1** (_BI1 __first, _BI1 __last, _BI2 __result)
- template<bool _IsMove, typename _Tp , typename _Ref , typename _Ptr , typename _OI >
_OI **std::__copy_move_backward_a1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first,::_Deque_iterator< _Tp, _Ref, _Ptr > __last, _OI __result)
- template<bool _IsMove, typename _ITp , typename _IRef , typename _IPtr , typename _OTp >
::_Deque_iterator< _OTp, _OTp
&, _OTp * > **std::__copy_move_backward_a1** (::_Deque_iterator< _ITp, _IRef, _IPtr > __first,::_Deque_iterator< _ITp, _IRef, _IPtr > __last,::_Deque_iterator< _OTp, _OTp &, _OTp * > __result)
- template<bool _IsMove, typename _II , typename _Tp >
__gnu_cxx::__enable_if
< __is_random_access_iter< _II >
::__value,::_Deque_iterator
< _Tp, _Tp &, _Tp * >
>::__type **std::__copy_move_backward_a1** (_II __first, _II __last,::_Deque_iterator< _Tp, _Tp &, _Tp * > __result)
- template<bool _IsMove, typename _BI1 , typename _BI2 >
constexpr _BI2 **std::__copy_move_backward_a2** (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _InputIterator , typename _Predicate >
constexpr iterator_traits
< _InputIterator >
::difference_type **std::__count_if** (_InputIterator __first, _InputIterator __last, _Predicate __pred)
- template<typename _II1 , typename _II2 >
constexpr bool **std::__equal4** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _BinaryPredicate >
constexpr bool **std::__equal4** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _BinaryPredicate __binary_pred)
- template<typename _II1 , typename _II2 >
constexpr bool **std::__equal_aux** (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 >
bool **std::__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, _II2)
- template<typename _II1 , typename _II2 , typename _Seq2 , typename _Cat2 >
bool **std::__equal_aux** (_II1, _II1, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)
- template<typename _II1 , typename _Seq1 , typename _Cat1 , typename _II2 , typename _Seq2 , typename _Cat2 >
bool **std::__equal_aux** (const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II1, _Seq1, _Cat1 > &, const ::__gnu_debug::_Safe_iterator< _II2, _Seq2, _Cat2 > &)
- template<typename _II1 , typename _II2 >
constexpr bool **std::__equal_aux1** (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _Tp , typename _Ref , typename _Ptr , typename _II >
__gnu_cxx::__enable_if
< __is_random_access_iter< _II >
::__value, bool >::__type **std::__equal_aux1** (::_Deque_iterator< _Tp, _Ref, _Ptr > __first1,::_Deque_iterator< _Tp, _Ref, _Ptr > __last1, _II __first2)
- template<typename _Tp1 , typename _Ref1 , typename _Ptr1 , typename _Tp2 , typename _Ref2 , typename _Ptr2 >
bool **std::__equal_aux1** (::_Deque_iterator< _Tp1, _Ref1, _Ptr1 > __first1,::_Deque_iterator< _Tp1, _Ref1, _Ptr1 > __last1,::_Deque_iterator< _Tp2, _Ref2, _Ptr2 > __first2)
- template<typename _II , typename _Tp , typename _Ref , typename _Ptr >
__gnu_cxx::__enable_if
< __is_random_access_iter< _II >
::__value, bool >::__type **std::__equal_aux1** (_II __first1, _II __last1,::_Deque_iterator< _Tp, _Ref, _Ptr > __first2)

- template<typename _FIte , typename _Tp >
  constexpr void **std::__fill_a** (_FIte __first, _FIte __last, const _Tp &__value)
- template<typename _Ite , typename _Seq , typename _Cat , typename _Tp >
  void **std::__fill_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &, const _Tp &)
- template<typename _ForwardIterator , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  <!__is_scalar< _Tp >::__value,
  void >::__type **std::__fill_a1** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _ForwardIterator , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_scalar< _Tp >::__value,
  void >::__type **std::__fill_a1** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_byte< _Tp >::__value,
  void >::__type **std::__fill_a1** (_Tp *__first, _Tp *__last, const _Tp &__c)
- template<typename _Ite , typename _Cont , typename _Tp >
  constexpr void **std::__fill_a1** (::__gnu_cxx::__normal_iterator< _Ite, _Cont > __first,::__gnu_cxx::__normal_iterator< _Ite, _Cont > __last, const _Tp &__value)
- template<typename _Tp , typename _VTp >
  void **std::__fill_a1** (const ::_Deque_iterator< _Tp, _Tp &, _Tp * > &__first, const ::_Deque_iterator< _Tp, _Tp &, _Tp * > &__last, const _VTp &__value)
- template<typename _Ite , typename _Seq , typename _Cat , typename _Size , typename _Tp >
  ::__gnu_debug::_Safe_iterator
  < _Ite, _Seq, _Cat > **std::__fill_n_a** (const ::__gnu_debug::_Safe_iterator< _Ite, _Seq, _Cat > &__first, _Size __n, const _Tp &__value, std::input_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **std::__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::output_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **std::__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::input_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr _OutputIterator **std::__fill_n_a** (_OutputIterator __first, _Size __n, const _Tp &__value, std::random_access_iterator_tag)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  <!__is_scalar< _Tp >::__value,
  _OutputIterator >::__type **std::__fill_n_a1** (_OutputIterator __first, _Size __n, const _Tp &__value)
- template<typename _OutputIterator , typename _Size , typename _Tp >
  constexpr
  __gnu_cxx::__enable_if
  < __is_scalar< _Tp >::__value,
  _OutputIterator >::__type **std::__fill_n_a1** (_OutputIterator __first, _Size __n, const _Tp &__value)
- template<typename _InputIterator , typename _Predicate >
  constexpr _InputIterator std::__find_if (_InputIterator __first, _InputIterator __last, _Predicate __pred, input_iterator_tag)

- template<typename _RandomAccessIterator , typename _Predicate >
  constexpr _RandomAccessIterator std::__find_if (_RandomAccessIterator __first, _RandomAccessIterator __last, _Predicate __pred, random_access_iterator_tag)
- template<typename _Iterator , typename _Predicate >
  constexpr _Iterator **std::__find_if** (_Iterator __first, _Iterator __last, _Predicate __pred)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 , typename _BinaryPredicate >
  constexpr bool **std::__is_permutation** (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2, _BinaryPredicate __pred)
- template<typename _II1 , typename _II2 >
  constexpr bool **std::__lexicographical_compare_aux** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _Compare >
  constexpr bool **std::__lexicographical_compare_impl** (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _Compare __comp)
- constexpr int std::__lg (int __n)
- constexpr unsigned **std::__lg** (unsigned __n)
- constexpr long **std::__lg** (long __n)
- constexpr unsigned long **std::__lg** (unsigned long __n)
- constexpr long long **std::__lg** (long long __n)
- constexpr unsigned long long **std::__lg** (unsigned long long __n)
- template<typename _ForwardIterator , typename _Tp , typename _Compare >
  constexpr _ForwardIterator **std::__lower_bound** (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val, _Compare __comp)
- template<typename _Tp , typename _Up >
  constexpr int **std::__memcmp** (const _Tp *__first1, const _Up *__first2, size_t __num)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > **std::__mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _BinaryPredicate __binary_pred)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > **std::__mismatch** (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred)
- template<typename _Iterator >
  constexpr _Iterator **std::__niter_base** (_Iterator __it) noexcept(/*conditional */)
- template<typename _From , typename _To >
  constexpr _From **std::__niter_wrap** (_From __from, _To __res)
- template<typename _Iterator >
  constexpr _Iterator **std::__niter_wrap** (const _Iterator &, _Iterator __res)
- constexpr int **std::__size_to_integer** (int __n)
- constexpr unsigned **std::__size_to_integer** (unsigned __n)
- constexpr long **std::__size_to_integer** (long __n)
- constexpr unsigned long **std::__size_to_integer** (unsigned long __n)
- constexpr long long **std::__size_to_integer** (long long __n)
- constexpr unsigned long long **std::__size_to_integer** (unsigned long long __n)
- constexpr long long **std::__size_to_integer** (float __n)
- constexpr long long **std::__size_to_integer** (double __n)
- constexpr long long **std::__size_to_integer** (long double __n)
- template<typename _II , typename _OI >
  constexpr _OI std::copy (_II __first, _II __last, _OI __result)

- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 std::copy_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool std::equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _BinaryPredicate __binary_pred)
- template<typename _II1 , typename _II2 >
  constexpr bool std::equal (_II1 __first1, _II1 __last1, _II2 __first2)
- template<typename _II1 , typename _II2 >
  constexpr bool std::equal (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _IIter1 , typename _IIter2 , typename _BinaryPredicate >
  constexpr bool std::equal (_IIter1 __first1, _IIter1 __last1, _IIter2 __first2, _IIter2 __last2, _BinaryPredicate __binary_pred)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__value)
- template<typename _OI , typename _Size , typename _Tp >
  constexpr _OI std::fill_n (_OI __first, _Size __n, const _Tp &__value)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr bool std::is_permutation (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr void std::iter_swap (_ForwardIterator1 __a, _ForwardIterator2 __b)
- template<typename _II1 , typename _II2 >
  constexpr bool std::lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2)
- template<typename _II1 , typename _II2 , typename _Compare >
  constexpr bool std::lexicographical_compare (_II1 __first1, _II1 __last1, _II2 __first2, _II2 __last2, _Compare __comp)
- template<typename _ForwardIterator , typename _Tp >
  constexpr _ForwardIterator std::lower_bound (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__val)
- template<typename _Tp >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::max (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _Tp >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b)
- template<typename _Tp , typename _Compare >
  constexpr const _Tp & std::min (const _Tp &__a, const _Tp &__b, _Compare __comp)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _BinaryPredicate __binary_pred)
- template<typename _InputIterator1 , typename _InputIterator2 >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _BinaryPredicate >
  constexpr pair
  < _InputIterator1,
  _InputIterator2 > std::mismatch (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _InputIterator2 __last2, _BinaryPredicate __binary_pred)

- template<typename _II , typename _OI >
  constexpr _OI std::move (_II __first, _II __last, _OI __result)
- template<typename _BI1 , typename _BI2 >
  constexpr _BI2 std::move_backward (_BI1 __first, _BI1 __last, _BI2 __result)
- template<typename _ForwardIterator1 , typename _ForwardIterator2 >
  constexpr _ForwardIterator2 std::swap_ranges (_ForwardIterator1 __first1, _ForwardIterator1 __last1, _ForwardIterator2 __first2)

5.564.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <algorithm>.

Definition in file stl_algobase.h.

5.565 stl_bvector.h File Reference

Classes

- struct std::hash<::vector< bool, _Alloc > >
- class std::vector< bool, _Alloc >

Namespaces

- std

Typedefs

- typedef unsigned long **std::_Bit_type**

Enumerations

- enum { **_S_word_bit** }

Functions

- void **std::__fill_bvector** (_Bit_type *__v, unsigned int __first, unsigned int __last, bool __x)
- void **std::fill** (_Bit_iterator __first, _Bit_iterator __last, const bool &__x)
- void **std::swap** (_Bit_reference __x, _Bit_reference __y) noexcept
- void **std::swap** (_Bit_reference __x, bool &__y) noexcept
- void **std::swap** (bool &__x, _Bit_reference __y) noexcept

5.565.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <vector>.

Definition in file stl_bvector.h.

5.566 stl_construct.h File Reference

Namespaces

- std

Functions

- template<typename _Tp , typename... _Args>
  void std::_Construct (_Tp *__p, _Args &&...__args)
- template<typename _T1 >
  void **std::_Construct_novalue** (_T1 *__p)
- template<typename _ForwardIterator >
  constexpr void std::_Destroy (_ForwardIterator __first, _ForwardIterator __last)
- template<typename _Tp >
  constexpr void std::_Destroy (_Tp *__pointer)
- template<typename _ForwardIterator , typename _Size >
  constexpr _ForwardIterator std::_Destroy_n (_ForwardIterator __first, _Size __count)

5.566.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file stl_construct.h.

5.567 stl_deque.h File Reference

Classes

- class std::_Deque_base< _Tp, _Alloc >
- struct std::_Deque_iterator< _Tp, _Ref, _Ptr >
- class std::deque< _Tp, _Alloc >

Namespaces

- std

Macros

- #define _GLIBCXX_DEQUE_BUF_SIZE

Functions

- constexpr size_t **std::__deque_buf_size** (size_t __size)
- template<typename _Tp , typename _Alloc >
  bool std::operator!= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator< (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)

- template<typename _Tp , typename _Alloc >
  bool std::operator<= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator== (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator> (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator>= (const deque< _Tp, _Alloc > &__x, const deque< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  void std::swap (deque< _Tp, _Alloc > &__x, deque< _Tp, _Alloc > &__y) noexcept(/*conditional */)

5.567.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <deque>.

Definition in file stl_deque.h.

5.567.2 Macro Definition Documentation

5.567.2.1 #define _GLIBCXX_DEQUE_BUF_SIZE

This function controls the size of memory nodes.

Parameters

__size	The size of an element.

Returns

The number (not byte size) of elements per node.

This function started off as a compiler kludge from SGI, but seems to be a useful wrapper around a repeated constant expression. The **512** is tunable (and no other code needs to change), but no investigation has been done since inheriting the SGI code. Touch _GLIBCXX_DEQUE_BUF_SIZE only if you know what you are doing, however: changing it breaks the binary compatibility!!

Definition at line 92 of file stl_deque.h.

5.568 stl_function.h File Reference

Classes

- struct std::binary_function< _Arg1, _Arg2, _Result >
- class std::binary_negate< _Predicate >
- class std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg >
- class std::const_mem_fun1_t< _Ret, _Tp, _Arg >
- class std::const_mem_fun_ref_t< _Ret, _Tp >
- class std::const_mem_fun_t< _Ret, _Tp >
- struct std::divides< _Tp >
- struct std::divides< _Tp >
- struct std::divides< void >
- struct std::equal_to< _Tp >

- struct std::equal_to< _Tp >
- struct std::equal_to< void >
- struct std::greater< _Tp >
- struct std::greater< _Tp >
- struct std::greater< void >
- struct std::greater_equal< _Tp >
- struct std::greater_equal< _Tp >
- struct std::greater_equal< void >
- struct std::less< _Tp >
- struct std::less< _Tp >
- struct std::less< void >
- struct std::less_equal< _Tp >
- struct std::less_equal< _Tp >
- struct std::less_equal< void >
- struct std::logical_and< _Tp >
- struct std::logical_and< _Tp >
- struct std::logical_and< void >
- struct std::logical_not< _Tp >
- struct std::logical_not< _Tp >
- struct std::logical_not< void >
- struct std::logical_or< _Tp >
- struct std::logical_or< _Tp >
- struct std::logical_or< void >
- class std::mem_fun1_ref_t< _Ret, _Tp, _Arg >
- class std::mem_fun1_t< _Ret, _Tp, _Arg >
- class std::mem_fun_ref_t< _Ret, _Tp >
- class std::mem_fun_t< _Ret, _Tp >
- struct std::minus< _Tp >
- struct std::minus< _Tp >
- struct std::minus< void >
- struct std::modulus< _Tp >
- struct std::modulus< _Tp >
- struct std::modulus< void >
- struct std::multiplies< _Tp >
- struct std::multiplies< _Tp >
- struct std::multiplies< void >
- struct std::negate< _Tp >
- struct std::negate< _Tp >
- struct std::negate< void >
- struct std::not_equal_to< _Tp >
- struct std::not_equal_to< _Tp >
- struct std::not_equal_to< void >
- struct std::plus< _Tp >
- struct std::plus< _Tp >
- class std::pointer_to_binary_function< _Arg1, _Arg2, _Result >
- class std::pointer_to_unary_function< _Arg, _Result >
- struct std::unary_function< _Arg, _Result >
- class std::unary_negate< _Predicate >

Namespaces

- std

Macros

- #define **__cpp_lib_transparent_operators**

Functions

- template<typename _Ret , typename _Tp >
  mem_fun_t< _Ret, _Tp > **std::mem_fun** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp >
  const_mem_fun_t< _Ret, _Tp > **std::mem_fun** (_Ret(_Tp::*__f)() const)
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_t< _Ret, _Tp, _Arg > **std::mem_fun** (_Ret(_Tp::*__f)(_Arg))
- template<typename _Ret , typename _Tp , typename _Arg >
  const_mem_fun1_t< _Ret, _Tp, _Arg > **std::mem_fun** (_Ret(_Tp::*__f)(_Arg) const)
- template<typename _Ret , typename _Tp >
  mem_fun_ref_t< _Ret, _Tp > **std::mem_fun_ref** (_Ret(_Tp::*__f)())
- template<typename _Ret , typename _Tp >
  const_mem_fun_ref_t< _Ret, _Tp > **std::mem_fun_ref** (_Ret(_Tp::*__f)() const)
- template<typename _Ret , typename _Tp , typename _Arg >
  mem_fun1_ref_t< _Ret, _Tp, _Arg > **std::mem_fun_ref** (_Ret(_Tp::*__f)(_Arg))
- template<typename _Ret , typename _Tp , typename _Arg >
  const_mem_fun1_ref_t< _Ret,
  _Tp, _Arg > **std::mem_fun_ref** (_Ret(_Tp::*__f)(_Arg) const)
- template<typename _Predicate >
  constexpr unary_negate
  < _Predicate > std::not1 (const _Predicate &__pred)
- template<typename _Predicate >
  constexpr binary_negate
  < _Predicate > std::not2 (const _Predicate &__pred)
- template<typename _Arg , typename _Result >
  pointer_to_unary_function
  < _Arg, _Result > std::ptr_fun (_Result(*__x)(_Arg))
- template<typename _Arg1 , typename _Arg2 , typename _Result >
  pointer_to_binary_function
  < _Arg1, _Arg2, _Result > std::ptr_fun (_Result(*__x)(_Arg1, _Arg2))

5.568.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <functional>.

Definition in file stl_function.h.

5.569 stl_heap.h File Reference

Namespaces

- std

Functions

- template<typename _RandomAccessIterator , typename _Distance , typename _Tp , typename _Compare >
  constexpr void **std::__adjust_heap** (_RandomAccessIterator __first, _Distance __holeIndex, _Distance __len, _Tp __value, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Distance >
  constexpr bool **std::__is_heap** (_RandomAccessIterator __first, _Distance __n)
- template<typename _RandomAccessIterator , typename _Compare , typename _Distance >
  constexpr bool **std::__is_heap** (_RandomAccessIterator __first, _Compare __comp, _Distance __n)
- template<typename _RandomAccessIterator >
  constexpr bool **std::__is_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr bool **std::__is_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator , typename _Distance , typename _Compare >
  constexpr _Distance **std::__is_heap_until** (_RandomAccessIterator __first, _Distance __n, _Compare &__comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **std::__make_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare &__comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **std::__pop_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _RandomAccessIterator __result, _Compare &__comp)
- template<typename _RandomAccessIterator , typename _Distance , typename _Tp , typename _Compare >
  constexpr void **std::__push_heap** (_RandomAccessIterator __first, _Distance __holeIndex, _Distance __topIndex, _Tp __value, _Compare &__comp)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void **std::__sort_heap** (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare &__comp)
- template<typename _RandomAccessIterator >
  constexpr bool std::is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr bool std::is_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr _RandomAccessIterator std::is_heap_until (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::make_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::pop_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)
- template<typename _RandomAccessIterator >
  constexpr void std::push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::push_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)

- template<typename _RandomAccessIterator >
  constexpr void std::sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last)
- template<typename _RandomAccessIterator , typename _Compare >
  constexpr void std::sort_heap (_RandomAccessIterator __first, _RandomAccessIterator __last, _Compare __comp)

5.569.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <queue>.

Definition in file stl_heap.h.

5.570 stl_iterator.h File Reference

Classes

- class std::back_insert_iterator< _Container >
- class std::front_insert_iterator< _Container >
- class std::insert_iterator< _Container >
- class std::move_iterator< _Iterator >
- class std::reverse_iterator< _Iterator >

Namespaces

- __gnu_cxx
- std

Macros

- #define **__cpp_lib_make_reverse_iterator**
- #define **_GLIBCXX_MAKE_MOVE_IF_NOEXCEPT_ITERATOR**(_Iter)
- #define **_GLIBCXX_MAKE_MOVE_ITERATOR**(_Iter)

Functions

- template<typename _Iterator , typename _ReturnType = typename conditional<__move_if_noexcept_cond <typename iterator_traits<_Iterator>::value_type>::value, _Iterator, move_iterator<_Iterator>>::type>
  constexpr _ReturnType **std::__make_move_if_noexcept_iterator** (_Iterator __i)
- template<typename _Tp , typename _ReturnType = typename conditional<__move_if_noexcept_cond<_Tp>::value, const _Tp*, move_iterator<_Tp*>>::type>
  constexpr _ReturnType **std::__make_move_if_noexcept_iterator** (_Tp *__i)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > **std::__make_reverse_iterator** (_Iterator __i)
- template<typename _Iterator >
  constexpr auto **std::__miter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__miter_base(__it.base())))
- template<typename _Iterator >
  auto **std::__miter_base** (move_iterator< _Iterator > __it) -> decltype(__miter_base(__it.base()))

- template<typename _Iterator >
  constexpr auto **std::__niter_base** (reverse_iterator< _Iterator > __it) -> decltype(__make_reverse_iterator(__niter_base(__it.base())))
- template<typename _Iterator , typename _Container >
  constexpr _Iterator **std::__niter_base** (__gnu_cxx::__normal_iterator< _Iterator, _Container > __it) noexcept(/*conditional */)
- template<typename _Iterator >
  auto **std::__niter_base** (move_iterator< _Iterator > __it) -> decltype(make_move_iterator(__niter_base(__it.base())))
- template<typename _Container >
  constexpr back_insert_iterator
  < _Container > std::back_inserter (_Container &__x)
- template<typename _Container >
  constexpr
  front_insert_iterator
  < _Container > std::front_inserter (_Container &__x)
- template<typename _Container , typename _Iterator >
  insert_iterator< _Container > std::inserter (_Container &__x, _Iterator __i)
- template<typename _Iterator >
  constexpr move_iterator
  < _Iterator > **std::make_move_iterator** (_Iterator __i)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > std::make_reverse_iterator (_Iterator __i)
- template<typename _Iterator >
  constexpr bool **std::operator!=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator!=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr bool **__gnu_cxx::operator!=** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator!=** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator!=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator!=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr reverse_iterator
  < _Iterator > **std::operator+** (typename reverse_iterator< _Iterator >::difference_type __n, const reverse_iterator< _Iterator > &__x)
- template<typename _Iterator , typename _Container >
  constexpr __normal_iterator
  < _Iterator, _Container > **__gnu_cxx::operator+** (typename __normal_iterator< _Iterator, _Container >::difference_type __n, const __normal_iterator< _Iterator, _Container > &__i) noexcept
- template<typename _Iterator >
  constexpr move_iterator
  < _Iterator > **std::operator+** (typename move_iterator< _Iterator >::difference_type __n, const move_iterator< _Iterator > &__x)

- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **std::operator-** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y) -> decltype(__y.base()-__x.base())
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr auto **__gnu_cxx::operator-** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept-> decltype(__lhs.base()-__rhs.base())
- template<typename _Iterator , typename _Container >
  constexpr __normal_iterator
  < _Iterator, _Container >
  ::difference_type **__gnu_cxx::operator-** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr auto **std::operator-** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y) -> decltype(__x.base()-__y.base())
- template<typename _Iterator >
  constexpr bool **std::operator<** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **__gnu_cxx::operator<** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator<** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator<** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator<=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **__gnu_cxx::operator<=** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator<=** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator<=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator<=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool std::operator== (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)

- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator==** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  constexpr bool **__gnu_cxx::operator==** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator==** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator==** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator==** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **__gnu_cxx::operator>** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator>** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>=** (const reverse_iterator< _Iterator > &__x, const reverse_iterator< _Iterator > &__y)
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>=** (const reverse_iterator< _IteratorL > &__x, const reverse_iterator< _IteratorR > &__y)
- template<typename _IteratorL , typename _IteratorR , typename _Container >
  bool **__gnu_cxx::operator>=** (const __normal_iterator< _IteratorL, _Container > &__lhs, const __normal_iterator< _IteratorR, _Container > &__rhs) noexcept
- template<typename _Iterator , typename _Container >
  constexpr bool **__gnu_cxx::operator>=** (const __normal_iterator< _Iterator, _Container > &__lhs, const __normal_iterator< _Iterator, _Container > &__rhs) noexcept
- template<typename _IteratorL , typename _IteratorR >
  constexpr bool **std::operator>=** (const move_iterator< _IteratorL > &__x, const move_iterator< _IteratorR > &__y)
- template<typename _Iterator >
  constexpr bool **std::operator>=** (const move_iterator< _Iterator > &__x, const move_iterator< _Iterator > &__y)

5.570.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

This file implements reverse_iterator, back_insert_iterator, front_insert_iterator, insert_iterator, __normal_iterator, and their supporting functions and overloaded operators.

Definition in file bits/stl_iterator.h.

5.571 stl_iterator.h File Reference

Namespaces

- __gnu_debug

Functions

- template<typename _Iterator , typename _Sequence >
  std::reverse_iterator< _Iterator > **__gnu_debug::__base** (const std::reverse_iterator< _Safe_iterator< _-Iterator, _Sequence, std::random_access_iterator_tag > > &__it)
- template<typename _Iterator >
  auto **__gnu_debug::__base** (const std::move_iterator< _Iterator > &__it) -> decltype(std::make_move_-iterator(__base(__it.base())))
- template<typename _Iterator , typename _Size >
  bool **__gnu_debug::__can_advance** (const std::reverse_iterator< _Iterator > &__it, _Size __n)
- template<typename _Iterator , typename _Size >
  bool **__gnu_debug::__can_advance** (const std::move_iterator< _Iterator > &__it, _Size __n)
- template<typename _Iterator >
  _Distance_traits< _Iterator >
  ::__type **__gnu_debug::__get_distance** (const std::reverse_iterator< _Iterator > &__first, const std::reverse_-iterator< _Iterator > &__last)
- template<typename _Iterator >
  _Distance_traits< _Iterator >
  ::__type **__gnu_debug::__get_distance** (const std::move_iterator< _Iterator > &__first, const std::move_-iterator< _Iterator > &__last)
- template<typename _Iterator >
  auto **__gnu_debug::__unsafe** (const std::reverse_iterator< _Iterator > &__it) -> decltype(std::__make_reverse-_iterator(__unsafe(__it.base())))
- template<typename _Iterator >
  auto **__gnu_debug::__unsafe** (const std::move_iterator< _Iterator > &__it) -> decltype(std::make_move_-iterator(__unsafe(__it.base())))
- template<typename _Iterator >
  bool **__gnu_debug::__valid_range** (const std::reverse_iterator< _Iterator > &__first, const std::reverse_-iterator< _Iterator > &__last, typename _Distance_traits< _Iterator >::__type &__dist)
- template<typename _Iterator >
  bool **__gnu_debug::__valid_range** (const std::move_iterator< _Iterator > &__first, const std::move_iterator< _Iterator > &__last, typename _Distance_traits< _Iterator >::__type &__dist)

5.571.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/stl_iterator.h.

5.572 stl_iterator_base_funcs.h File Reference

Classes

- struct std::_List_const_iterator< typename >
- struct std::_List_iterator< typename >

Namespaces

- std

Functions

- template<typename _InputIterator , typename _Distance >
  constexpr void **std::__advance** (_InputIterator &__i, _Distance __n, input_iterator_tag)
- template<typename _BidirectionalIterator , typename _Distance >
  constexpr void **std::__advance** (_BidirectionalIterator &__i, _Distance __n, bidirectional_iterator_tag)
- template<typename _RandomAccessIterator , typename _Distance >
  constexpr void **std::__advance** (_RandomAccessIterator &__i, _Distance __n, random_access_iterator_tag)
- template<typename _InputIterator >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type **std::__distance** (_InputIterator __first, _InputIterator __last, input_iterator_tag)
- template<typename _RandomAccessIterator >
  constexpr iterator_traits
  < _RandomAccessIterator >
  ::difference_type **std::__distance** (_RandomAccessIterator __first, _RandomAccessIterator __last, random_access_iterator_tag)
- template<typename _InputIterator , typename _Distance >
  constexpr void std::advance (_InputIterator &__i, _Distance __n)
- template<typename _InputIterator >
  constexpr iterator_traits
  < _InputIterator >
  ::difference_type std::distance (_InputIterator __first, _InputIterator __last)
- template<typename _InputIterator >
  constexpr _InputIterator **std::next** (_InputIterator __x, typename iterator_traits< _InputIterator >::difference_type __n=1)
- template<typename _BidirectionalIterator >
  constexpr _BidirectionalIterator **std::prev** (_BidirectionalIterator __x, typename iterator_traits< _BidirectionalIterator >::difference_type __n=1)

5.572.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

This file contains all of the general iterator-related utility functions, such as distance() and advance().

Definition in file stl_iterator_base_funcs.h.

5.573 stl_iterator_base_types.h File Reference

Classes

- struct std::bidirectional_iterator_tag
- struct std::forward_iterator_tag
- struct std::input_iterator_tag
- struct std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >
- struct std::iterator_traits< typename >
- struct std::iterator_traits< typename >
- struct std::iterator_traits< _Tp * >
- struct std::iterator_traits< const _Tp * >
- struct std::output_iterator_tag
- struct std::random_access_iterator_tag

Namespaces

- std

Typedefs

- template<typename _Iter >
  using **std::__iterator_category_t** = typename iterator_traits< _Iter >::iterator_category
- template<typename _InIter >
  using **std::_RequireInputIter** = __enable_if_t< is_convertible< __iterator_category_t< _InIter >, input_iterator_tag >::value >

Functions

- template<typename _Iter >
  constexpr iterator_traits
  < _Iter >::iterator_category std::__iterator_category (const _Iter &)

5.573.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

This file contains all of the general iterator-related utility types, such as iterator_traits and struct iterator.

Definition in file stl_iterator_base_types.h.

5.574 stl_list.h File Reference

Classes

- class std::_List_base< _Tp, _Alloc >
- struct std::_List_const_iterator< typename >
- struct std::_List_iterator< typename >
- struct std::_List_node< _Tp >
- struct std::__detail::_List_node_base

- struct std::__detail::_List_node_header
- class std::list< _Tp, _Alloc >

Namespaces

- std
- std::__detail

Functions

- template<typename _Tp , typename _Alloc >
  bool std::operator!= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator< (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator<= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator== (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator> (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator>= (const list< _Tp, _Alloc > &__x, const list< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  void std::swap (list< _Tp, _Alloc > &__x, list< _Tp, _Alloc > &__y) noexcept(/*conditional */)

5.574.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <list>.

Definition in file stl_list.h.

5.575 stl_map.h File Reference

Classes

- class std::map< _Key, _Tp, _Compare, _Alloc >
- class std::multimap< _Key, _Tp, _Compare, _Alloc >

Namespaces

- std

Functions

- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator!= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator< (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)

- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator<= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator== (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator> (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator>= (const map< _Key, _Tp, _Compare, _Alloc > &__x, const map< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  void std::swap (map< _Key, _Tp, _Compare, _Alloc > &__x, map< _Key, _Tp, _Compare, _Alloc > &__y) noexcept(/*conditional */)

5.575.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <map>.

Definition in file stl_map.h.

5.576 stl_multimap.h File Reference

Classes

- class std::map< _Key, _Tp, _Compare, _Alloc >
- class std::multimap< _Key, _Tp, _Compare, _Alloc >

Namespaces

- std

Functions

- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator!= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator< (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator<= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator== (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator> (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)

- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  bool std::operator>= (const multimap< _Key, _Tp, _Compare, _Alloc > &__x, const multimap< _Key, _Tp, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Compare , typename _Alloc >
  void std::swap (multimap< _Key, _Tp, _Compare, _Alloc > &__x, multimap< _Key, _Tp, _Compare, _Alloc > &__y) noexcept(/*conditional */)

5.576.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <map>.

Definition in file stl_multimap.h.

5.577 stl_multiset.h File Reference

Classes

- class std::multiset< _Key, _Compare, _Alloc >
- class std::set< _Key, _Compare, _Alloc >

Namespaces

- std

Functions

- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator!= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator< (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator<= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator== (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator> (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator>= (const multiset< _Key, _Compare, _Alloc > &__x, const multiset< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  void std::swap (multiset< _Key, _Compare, _Alloc > &__x, multiset< _Key, _Compare, _Alloc > &__y) noexcept(/*conditional */)

5.577.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <set>.

Definition in file stl_multiset.h.

5.578 stl_numeric.h File Reference

Namespaces

- std

Macros

- #define **_GLIBCXX_MOVE_IF_20**(_E)

Functions

- template<typename _InputIterator , typename _Tp >
  constexpr _Tp std::accumulate (_InputIterator __first, _InputIterator __last, _Tp __init)
- template<typename _InputIterator , typename _Tp , typename _BinaryOperation >
  constexpr _Tp std::accumulate (_InputIterator __first, _InputIterator __last, _Tp __init, _BinaryOperation __binary_op)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::adjacent_difference (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp >
  constexpr _Tp std::inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init)
- template<typename _InputIterator1 , typename _InputIterator2 , typename _Tp , typename _BinaryOperation1 , typename _BinaryOperation2 >
  constexpr _Tp std::inner_product (_InputIterator1 __first1, _InputIterator1 __last1, _InputIterator2 __first2, _Tp __init, _BinaryOperation1 __binary_op1, _BinaryOperation2 __binary_op2)
- template<typename _ForwardIterator , typename _Tp >
  constexpr void std::iota (_ForwardIterator __first, _ForwardIterator __last, _Tp __value)
- template<typename _InputIterator , typename _OutputIterator >
  constexpr _OutputIterator std::partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result)
- template<typename _InputIterator , typename _OutputIterator , typename _BinaryOperation >
  constexpr _OutputIterator std::partial_sum (_InputIterator __first, _InputIterator __last, _OutputIterator __result, _BinaryOperation __binary_op)

5.578.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <numeric>.

Definition in file stl_numeric.h.

5.579 stl_pair.h File Reference

Classes

- struct std::pair< _T1, _T2 >
- struct std::piecewise_construct_t

Namespaces

- std

Variables

- constexpr piecewise_construct_t std::piecewise_construct

5.579.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <utility>.

Definition in file stl_pair.h.

5.580 stl_queue.h File Reference

Classes

- class std::priority_queue< _Tp, _Sequence, _Compare >
- class std::queue< _Tp, _Sequence >

Namespaces

- std

Functions

- template<typename _Tp , typename _Seq >
  bool std::operator!= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator< (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator<= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator== (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator> (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator>= (const queue< _Tp, _Seq > &__x, const queue< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  enable_if< __is_swappable < _Seq >::value >::type **std::swap** (queue< _Tp, _Seq > &__x, queue< _Tp, _Seq > &__y) noexcept(noexcept(__x.swap(__y)))

- template<typename _Tp , typename _Sequence , typename _Compare >
  enable_if< __and_
  < __is_swappable< _Sequence >
  , __is_swappable< _Compare >
  >::value >::type **std::swap** (priority_queue< _Tp, _Sequence, _Compare > &__x, priority_queue< _Tp, _Sequence, _Compare > &__y) noexcept(noexcept(__x.swap(__y)))

5.580.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <queue>.

Definition in file stl_queue.h.

5.581 stl_raw_storage_iter.h File Reference

Classes

- class std::raw_storage_iterator< _OutputIterator, _Tp >

Namespaces

- std

5.581.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file stl_raw_storage_iter.h.

5.582 stl_relops.h File Reference

Namespaces

- std
- std::rel_ops

Functions

- template<class _Tp >
  bool std::rel_ops::operator!= (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool std::rel_ops::operator<= (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool std::rel_ops::operator> (const _Tp &__x, const _Tp &__y)
- template<class _Tp >
  bool std::rel_ops::operator>= (const _Tp &__x, const _Tp &__y)

5.582.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <utility>.

Inclusion of this file has been removed from all of the other STL headers for safety reasons, except std_utility.h. For more information, see the thread of about twenty messages starting with http://gcc.gnu.org/ml/libstdc++/2001-01/msg00223.html, or http://gcc.gnu.org/onlinedocs/libstdc++/faq.html#faq.ambiguous_overloads

Short summary: the rel_ops operators should be avoided for the present.

Definition in file stl_relops.h.

5.583 stl_set.h File Reference

Classes

- class std::multiset< _Key, _Compare, _Alloc >
- class std::set< _Key, _Compare, _Alloc >

Namespaces

- std

Functions

- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator!= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator< (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator<= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator== (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator> (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  bool std::operator>= (const set< _Key, _Compare, _Alloc > &__x, const set< _Key, _Compare, _Alloc > &__y)
- template<typename _Key , typename _Compare , typename _Alloc >
  void std::swap (set< _Key, _Compare, _Alloc > &__x, set< _Key, _Compare, _Alloc > &__y) noexcept(/*conditional */)

5.583.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <set>.

Definition in file stl_set.h.

5.584 stl_stack.h File Reference

Classes

- class std::stack< _Tp, _Sequence >

Namespaces

- std

Functions

- template<typename _Tp , typename _Seq >
  bool std::operator!= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator< (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator<= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator== (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator> (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  bool std::operator>= (const stack< _Tp, _Seq > &__x, const stack< _Tp, _Seq > &__y)
- template<typename _Tp , typename _Seq >
  enable_if< __is_swappable
  < _Seq >::value >::type **std::swap** (stack< _Tp, _Seq > &__x, stack< _Tp, _Seq > &__y) noexcept(noexcept(-
  __x.swap(__y)))

5.584.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <stack>.

Definition in file stl_stack.h.

5.585 stl_tempbuf.h File Reference

Classes

- class std::_Temporary_buffer< _ForwardIterator, _Tp >

Namespaces

- std
- std::__detail

Functions

- template<typename _Tp >
  void **std::__detail::__return_temporary_buffer** (_Tp *__p, size_t __len)
- template<typename _Pointer , typename _ForwardIterator >
  void **std::__uninitialized_construct_buf** (_Pointer __first, _Pointer __last, _ForwardIterator __seed)
- template<typename _Tp >
  pair< _Tp *, ptrdiff_t > std::get_temporary_buffer (ptrdiff_t __len) noexcept
- template<typename _Tp >
  void std::return_temporary_buffer (_Tp *__p)

5.585.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file stl_tempbuf.h.

5.586 stl_tree.h File Reference

Namespaces

- std

Macros

- #define **__cpp_lib_generic_associative_lookup**

Typedefs

- template<typename _Cmp , typename _SfinaeType >
  using **std::__has_is_transparent_t** = typename __has_is_transparent< _Cmp, _SfinaeType >::type

Enumerations

- enum **_Rb_tree_color** { **_S_red**, **_S_black** }

Functions

- unsigned int **std::_Rb_tree_black_count** (const _Rb_tree_node_base *__node, const _Rb_tree_node_base *__root) throw ()
- _Rb_tree_node_base * **std::_Rb_tree_decrement** (_Rb_tree_node_base *__x) throw ()
- const _Rb_tree_node_base * **std::_Rb_tree_decrement** (const _Rb_tree_node_base *__x) throw ()
- _Rb_tree_node_base * **std::_Rb_tree_increment** (_Rb_tree_node_base *__x) throw ()
- const _Rb_tree_node_base * **std::_Rb_tree_increment** (const _Rb_tree_node_base *__x) throw ()
- void **std::_Rb_tree_insert_and_rebalance** (const bool __insert_left, _Rb_tree_node_base *__x, _Rb_tree_node_base *__p, _Rb_tree_node_base &__header) throw ()
- _Rb_tree_node_base * **std::_Rb_tree_rebalance_for_erase** (_Rb_tree_node_base *const __z, _Rb_tree_node_base &__header) throw ()

- template<typename _Key , typename _Val , typename _KeyOfValue , typename _Compare , typename _Alloc >
  void **std::swap** (_Rb_tree< _Key, _Val, _KeyOfValue, _Compare, _Alloc > &__x, _Rb_tree< _Key, _Val, _KeyOfValue, _Compare, _Alloc > &__y)

5.586.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <map> or <set>.

Definition in file stl_tree.h.

5.587 stl_uninitialized.h File Reference

Namespaces

- std

Functions

- template<typename _InputIterator , typename _ForwardIterator >
  _ForwardIterator std::uninitialized_copy (_InputIterator __first, _InputIterator __last, _ForwardIterator __result)
- template<typename _InputIterator , typename _Size , typename _ForwardIterator >
  _ForwardIterator std::uninitialized_copy_n (_InputIterator __first, _Size __n, _ForwardIterator __result)
- template<typename _ForwardIterator , typename _Tp >
  void std::uninitialized_fill (_ForwardIterator __first, _ForwardIterator __last, const _Tp &__x)
- template<typename _ForwardIterator , typename _Size , typename _Tp >
  _ForwardIterator std::uninitialized_fill_n (_ForwardIterator __first, _Size __n, const _Tp &__x)

5.587.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file stl_uninitialized.h.

5.588 stl_vector.h File Reference

Classes

- struct std::_Vector_base< _Tp, _Alloc >
- class std::vector< _Tp, _Alloc >

Namespaces

- std

Macros

- #define **_GLIBCXX_ASAN_ANNOTATE_BEFORE_DEALLOC**
- #define **_GLIBCXX_ASAN_ANNOTATE_GREW**(n)
- #define **_GLIBCXX_ASAN_ANNOTATE_GROW**(n)
- #define **_GLIBCXX_ASAN_ANNOTATE_REINIT**
- #define **_GLIBCXX_ASAN_ANNOTATE_SHRINK**(n)

Functions

- template<typename _Tp , typename _Alloc >
  bool std::operator!= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator< (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator<= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator== (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator> (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  bool std::operator>= (const vector< _Tp, _Alloc > &__x, const vector< _Tp, _Alloc > &__y)
- template<typename _Tp , typename _Alloc >
  void std::swap (vector< _Tp, _Alloc > &__x, vector< _Tp, _Alloc > &__y) noexcept(/*conditional */)

5.588.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <vector>.

Definition in file stl_vector.h.

5.589 stop_token File Reference

5.589.1 Detailed Description

This is a Standard C++ Library header.

Definition in file stop_token.

5.590 stream_iterator.h File Reference

Classes

- class std::istream_iterator< _Tp, _CharT, _Traits, _Dist >
- class std::ostream_iterator< _Tp, _CharT, _Traits >

Namespaces

- std

5.590.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file stream_iterator.h.

5.591 streambuf File Reference

Classes

- class std::basic_streambuf< _CharT, _Traits >

Namespaces

- std

Macros

- #define **_GLIBXX_STREAMBUF**
- #define **_IsUnused**

Functions

- template<typename _CharT , typename _Traits >
  streamsize **std::__copy_streambufs_eof** (basic_streambuf< _CharT, _Traits > *, basic_streambuf< _CharT, _Traits > *, bool &)
- template<>
  streamsize **std::__copy_streambufs_eof** (basic_streambuf< char > *__sbin, basic_streambuf< char > *__sbout, bool &__ineof)
- template<>
  streamsize **std::__copy_streambufs_eof** (basic_streambuf< wchar_t > *__sbin, basic_streambuf< wchar_t > *__sbout, bool &__ineof)

5.591.1 Detailed Description

This is a Standard C++ Library header.

Definition in file streambuf.

5.592 streambuf.tcc File Reference

Namespaces

- std

Macros

- #define **_STREAMBUF_TCC**

Functions

- template<typename _CharT , typename _Traits >
  streamsize **std::__copy_streambufs** (basic_streambuf< _CharT, _Traits > *__sbin, basic_streambuf< _CharT, _Traits > *__sbout)
- template<typename _CharT , typename _Traits >
  streamsize **std::__copy_streambufs_eof** (basic_streambuf< _CharT, _Traits > *, basic_streambuf< _CharT, _Traits > *, bool &)

5.592.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <streambuf>.

Definition in file streambuf.tcc.

5.593 streambuf_iterator.h File Reference

Classes

- class std::istreambuf_iterator< _CharT, _Traits >
- class std::ostreambuf_iterator< _CharT, _Traits >

Namespaces

- std

Functions

- template<bool _IsMove, typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  ostreambuf_iterator< _CharT >
  >::__type **std::__copy_move_a2** (_CharT *__first, _CharT *__last, ostreambuf_iterator< _CharT > __result)
- template<bool _IsMove, typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  ostreambuf_iterator< _CharT >
  >::__type **std::__copy_move_a2** (const _CharT *__first, const _CharT *__last, ostreambuf_iterator< _CharT > __result)
- template<bool _IsMove, typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  _CharT * >::__type **std::__copy_move_a2** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, _CharT *__result)
- template<typename _CharT , typename _Size >
  __enable_if_t< __is_char
  < _CharT >::__value, _CharT * > **std::__copy_n_a** (istreambuf_iterator< _CharT > __it, _Size __n, _CharT *__result)

- template<typename _CharT , typename _Distance >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  void >::__type **std::advance** (istreambuf_iterator< _CharT > &__i, _Distance __n)
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  ostreambuf_iterator< _CharT >
  >::__type **std::copy** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, ostreambuf-
  _iterator< _CharT > __result)
- template<typename _CharT >
  __gnu_cxx::__enable_if
  < __is_char< _CharT >::__value,
  istreambuf_iterator< _CharT >
  >::__type **std::find** (istreambuf_iterator< _CharT > __first, istreambuf_iterator< _CharT > __last, const _CharT
  &__val)
- template<typename _CharT , typename _Traits >
  bool **std::operator!=** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT,
  _Traits > &__b)
- template<typename _CharT , typename _Traits >
  bool **std::operator==** (const istreambuf_iterator< _CharT, _Traits > &__a, const istreambuf_iterator< _CharT,
  _Traits > &__b)

5.593.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <iterator>.

Definition in file streambuf_iterator.h.

5.594 string File Reference

Macros

- #define **_GLIBCXX_STRING**

5.594.1 Detailed Description

This is a Standard C++ Library header.

Definition in file string.

5.595 string File Reference

Classes

- class __gnu_debug::basic_string< _CharT, _Traits, _Allocator >

Namespaces

- __gnu_debug

Macros

- #define **__glibcxx_check_string_constructor**(_Str)
- #define **__glibcxx_check_string_n_constructor**(_Str, _Size)
- #define **_GLIBCXX_DEBUG_STRING**
- #define **_GLIBCXX_DEBUG_VERIFY_STR_COND_AT**(_Cond, _File, _Line, _Func)

Typedefs

- typedef basic_string< char > **__gnu_debug::string**
- typedef basic_string< wchar_t > **__gnu_debug::wstring**

Functions

- template<typename _CharT , typename _Integer >
  const _CharT * __gnu_debug::__check_string (const _CharT *__s, _Integer __n, const char *__file, unsigned int __line, const char *__function)
- template<typename _CharT >
  const _CharT * __gnu_debug::__check_string (const _CharT *__s, const char *__file, unsigned int __line, const char *__function)
- template<typename _CharT , typename _Traits , typename _Allocator >
  std::basic_istream< _CharT, _Traits > & **__gnu_debug::getline** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Allocator >
  std::basic_istream< _CharT, _Traits > & **__gnu_debug::getline** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **__gnu_debug::operator!=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **__gnu_debug::operator!=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  bool **__gnu_debug::operator!=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  basic_string< _CharT, _Traits, _Allocator > **__gnu_debug::operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  basic_string< _CharT, _Traits, _Allocator > **__gnu_debug::operator+** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  basic_string< _CharT, _Traits, _Allocator > **__gnu_debug::operator+** (_CharT __lhs, const basic_string< _CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
  basic_string< _CharT, _Traits, _Allocator > **__gnu_debug::operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__rhs)

- template<typename _CharT , typename _Traits , typename _Allocator >
basic_string< _CharT, _Traits,
_Allocator > **__gnu_debug::operator+** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, _CharT __-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string<
_CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
std::basic_ostream< _CharT,
_Traits > & **__gnu_debug::operator<<** (std::basic_ostream< _CharT, _Traits > &__os, const basic_string<
_CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string<
_CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator<=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator==** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string<
_CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator==** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator==** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string<
_CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const basic_string<
_CharT, _Traits, _Allocator > &__rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>=** (const _CharT *__lhs, const basic_string< _CharT, _Traits, _Allocator > &__-
rhs)
- template<typename _CharT , typename _Traits , typename _Allocator >
bool **__gnu_debug::operator>=** (const basic_string< _CharT, _Traits, _Allocator > &__lhs, const _CharT *__-
rhs)

- template<typename _CharT , typename _Traits , typename _Allocator >
  std::basic_istream< _CharT,
  _Traits > & **__gnu_debug::operator>>** (std::basic_istream< _CharT, _Traits > &__is, basic_string< _CharT, _Traits, _Allocator > &__str)
- template<typename _CharT , typename _Traits , typename _Allocator >
  void **__gnu_debug::swap** (basic_string< _CharT, _Traits, _Allocator > &__lhs, basic_string< _CharT, _Traits, _Allocator > &__rhs)

5.595.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/string.

5.596 string File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_STRING**

Functions

- template<typename _CharT , typename _Traits , typename _Alloc , typename _Up >
  void **std::experimental::fundamentals_v2::erase** (basic_string< _CharT, _Traits, _Alloc > &__cont, const _Up &__value)
- template<typename _CharT , typename _Traits , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (basic_string< _CharT, _Traits, _Alloc > &__cont, _Predicate __pred)

5.596.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/string.

5.597 string_conversions.h File Reference

Namespaces

- __gnu_cxx

Functions

- template<typename _TRet , typename _Ret = _TRet, typename _CharT , typename... _Base>
  _Ret **__gnu_cxx::__stoa** (_TRet(*__convf)(const _CharT *, _CharT **, _Base...), const char *__name, const _CharT *__str, std::size_t *__idx, _Base...__base)
- template<typename _String , typename _CharT = typename _String::value_type>
  _String **__gnu_cxx::__to_xstring** (int(*__convf)(_CharT *, std::size_t, const _CharT *, __builtin_va_list), std::size_t __n, const _CharT *__fmt,...)

5.597.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file string_conversions.h.

5.598 string_view File Reference

Classes

- class std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >
- struct std::hash< _Tp >

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_string_view**
- #define **_GLIBCXX_EXPERIMENTAL_STRING_VIEW**

Typedefs

- using **std::experimental::fundamentals_v1::string_view** = basic_string_view< char >
- using **std::experimental::fundamentals_v1::u16string_view** = basic_string_view< char16_t >
- using **std::experimental::fundamentals_v1::u32string_view** = basic_string_view< char32_t >
- using **std::experimental::fundamentals_v1::wstring_view** = basic_string_view< wchar_t >

Functions

- template<typename _CharT , typename _Traits >
  constexpr bool **std::experimental::fundamentals_v1::operator!=** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits >
  constexpr bool **std::experimental::fundamentals_v1::operator!=** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits >
  constexpr bool **std::experimental::fundamentals_v1::operator!=** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept

- constexpr basic_string_view< char > **std::experimental::literals::string_view_literals::operator""sv** (const char *__str, size_t __len) noexcept
- constexpr basic_string_view < wchar_t > **std::experimental::literals::string_view_literals::operator""sv** (const wchar_t *__str, size_t __len) noexcept
- constexpr basic_string_view < char16_t > **std::experimental::literals::string_view_literals::operator""sv** (const char16_t *__str, size_t __len) noexcept
- constexpr basic_string_view < char32_t > **std::experimental::literals::string_view_literals::operator""sv** (const char32_t *__str, size_t __len) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > basic_ostream< _CharT, _Traits > & **std::experimental::fundamentals_v1::operator<<** (basic_ostream< _CharT, _Traits > &__os, basic_string_view< _CharT, _Traits > __str)
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<=** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<=** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator<=** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator==** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator==** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator==** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator>** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator>** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator>** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept
- template<typename _CharT , typename _Traits > constexpr bool **std::experimental::fundamentals_v1::operator>=** (basic_string_view< _CharT, _Traits > __x, basic_string_view< _CharT, _Traits > __y) noexcept

- template<typename _CharT , typename _Traits >
  constexpr bool **std::experimental::fundamentals_v1::operator>=** (basic_string_view< _CharT, _Traits > __x, __type_identity_t< basic_string_view< _CharT, _Traits >> __y) noexcept
- template<typename _CharT , typename _Traits >
  constexpr bool **std::experimental::fundamentals_v1::operator>=** (__type_identity_t< basic_string_view< _CharT, _Traits >> __x, basic_string_view< _CharT, _Traits > __y) noexcept

5.598.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/string_view.

5.599 string_view.tcc File Reference

Macros

- #define **_GLIBCXX_STRING_VIEW_TCC**

5.599.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <string_view>.

Definition in file bits/string_view.tcc.

5.600 string_view.tcc File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_STRING_VIEW_TCC**

5.600.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <experimental/string_view>.

Definition in file experimental/bits/string_view.tcc.

5.601 stringfwd.h File Reference

Classes

- class std::basic_string< _CharT, _Traits, _Alloc >
- struct std::char_traits< _CharT >

Namespaces

- std

Typedefs

- typedef basic_string< char > std::string
- typedef basic_string< char16_t > std::u16string
- typedef basic_string< char32_t > std::u32string
- typedef basic_string< wchar_t > std::wstring

5.601.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <string>.

Definition in file stringfwd.h.

5.602 strstream File Reference

Namespaces

- std

5.602.1 Detailed Description

This is a Standard C++ Library header.

Definition in file strstream.

5.603 synth_access_traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::synth_access_traits< Type_Traits, Set, _ATraits >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_SYNTH_E_ACCESS_TRAITS_C_DEC**
- #define **PB_DS_SYNTH_E_ACCESS_TRAITS_T_DEC**

5.603.1 Detailed Description

Contains an implementation class for a patricia tree.

Definition in file synth_access_traits.hpp.

5.604 system_error File Reference

Classes

- class std::_V2::error_category
- struct std::error_code
- struct std::error_condition
- struct std::hash< error_code >
- struct std::is_error_code_enum< _Tp >
- struct std::is_error_condition_enum< _Tp >
- class std::system_error

Namespaces

- std

Macros

- #define **_GLIBCXX_SYSTEM_ERROR**

Functions

- const error_category & std::_V2::generic_category () noexcept
- const error_category & std::_V2::system_category () noexcept

Variables

- error_code **std::make_error_code** (errc) noexcept

5.604.1 Detailed Description

This is a Standard C++ Library header.

Definition in file system_error.

5.605 system_error File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_SYSTEM_ERROR**

Variables

- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_error_code_enum_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_error_condition_enum_v**

5.605.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/system_error.

5.606 tag_and_trait.hpp File Reference

Classes

- struct __gnu_pbds::associative_tag
- struct __gnu_pbds::basic_branch_tag
- struct __gnu_pbds::basic_hash_tag
- struct __gnu_pbds::basic_invalidation_guarantee
- struct __gnu_pbds::binary_heap_tag
- struct __gnu_pbds::binomial_heap_tag
- struct __gnu_pbds::cc_hash_tag
- struct __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, Tag, Policy_Tl >
- struct __gnu_pbds::container_tag
- struct __gnu_pbds::container_traits< Cntnr >
- struct __gnu_pbds::container_traits_base< _Tag >
- struct __gnu_pbds::container_traits_base< binary_heap_tag >
- struct __gnu_pbds::container_traits_base< binomial_heap_tag >
- struct __gnu_pbds::container_traits_base< cc_hash_tag >
- struct __gnu_pbds::container_traits_base< gp_hash_tag >
- struct __gnu_pbds::container_traits_base< list_update_tag >
- struct __gnu_pbds::container_traits_base< ov_tree_tag >
- struct __gnu_pbds::container_traits_base< pairing_heap_tag >
- struct __gnu_pbds::container_traits_base< pat_trie_tag >
- struct __gnu_pbds::container_traits_base< rb_tree_tag >
- struct __gnu_pbds::container_traits_base< rc_binomial_heap_tag >
- struct __gnu_pbds::container_traits_base< splay_tree_tag >
- struct __gnu_pbds::container_traits_base< thin_heap_tag >
- struct __gnu_pbds::gp_hash_tag
- struct __gnu_pbds::list_update_tag
- struct __gnu_pbds::null_node_update< _Tp1, _Tp2, _Tp3, _Tp4 >
- struct __gnu_pbds::null_type
- struct __gnu_pbds::ov_tree_tag
- struct __gnu_pbds::pairing_heap_tag
- struct __gnu_pbds::pat_trie_tag
- struct __gnu_pbds::point_invalidation_guarantee
- struct __gnu_pbds::priority_queue_tag
- struct __gnu_pbds::range_invalidation_guarantee
- struct __gnu_pbds::rb_tree_tag

- struct __gnu_pbds::rc_binomial_heap_tag
- struct __gnu_pbds::sequence_tag
- struct __gnu_pbds::splay_tree_tag
- struct __gnu_pbds::string_tag
- struct __gnu_pbds::thin_heap_tag
- struct __gnu_pbds::tree_tag
- struct __gnu_pbds::trie_tag
- struct __gnu_pbds::trivial_iterator_tag

Namespaces

- __gnu_pbds

Typedefs

- typedef void __gnu_pbds::trivial_iterator_difference_type

5.606.1 Detailed Description

Contains tags and traits, e.g., ones describing underlying data structures.

Definition in file tag_and_trait.hpp.

5.607 tags.h File Reference

Classes

- struct __gnu_parallel::balanced_quicksort_tag
- struct __gnu_parallel::balanced_tag
- struct __gnu_parallel::constant_size_blocks_tag
- struct __gnu_parallel::default_parallel_tag
- struct __gnu_parallel::equal_split_tag
- struct __gnu_parallel::exact_tag
- struct __gnu_parallel::find_tag
- struct __gnu_parallel::growing_blocks_tag
- struct __gnu_parallel::multiway_mergesort_exact_tag
- struct __gnu_parallel::multiway_mergesort_sampling_tag
- struct __gnu_parallel::multiway_mergesort_tag
- struct __gnu_parallel::omp_loop_static_tag
- struct __gnu_parallel::omp_loop_tag
- struct __gnu_parallel::parallel_tag
- struct __gnu_parallel::quicksort_tag
- struct __gnu_parallel::sampling_tag
- struct __gnu_parallel::sequential_tag
- struct __gnu_parallel::unbalanced_tag

Namespaces

- __gnu_parallel

5.607.1 Detailed Description

Tags for compile-time selection. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file tags.h.

5.608 tgmath.h File Reference

Macros

- #define **_GLIBCXX_TGMATH_H**

5.608.1 Detailed Description

This is a Standard C++ Library header.

Definition in file tgmath.h.

5.609 thin_heap_.hpp File Reference

Classes

- class __gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_ASSERT_AUX_NULL**(X)
- #define **PB_DS_ASSERT_NODE_CONSISTENT**(_Node, _Bool)
- #define **PB_DS_BASE_T_P**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

Enumerations

- enum { **num_distinct_rank_bounds** }

Variables

- static const std::size_t **__gnu_pbds::detail::g_a_rank_bounds** [num_distinct_rank_bounds]

5.609.1 Detailed Description

Contains an implementation class for a thin heap.

Definition in file thin_heap_.hpp.

5.610 thread File Reference

Classes

- struct std::hash< thread::id >
- class std::thread::id
- class std::thread

Namespaces

- std
- std::this_thread

Macros

- #define **_GLIBCXX_THREAD**

Functions

- void **std::this_thread::__sleep_for** (chrono::seconds, chrono::nanoseconds)
- thread::id std::this_thread::get_id () noexcept
- bool **std::operator!=** (thread::id __x, thread::id __y) noexcept
- bool **std::operator**< (thread::id __x, thread::id __y) noexcept
- template<class _CharT , class _Traits >
  basic_ostream< _CharT, _Traits > & **std::operator**<< (basic_ostream< _CharT, _Traits > &__out, thread::id __id)
- bool **std::operator**<= (thread::id __x, thread::id __y) noexcept
- bool **std::operator==** (thread::id __x, thread::id __y) noexcept
- bool **std::operator**> (thread::id __x, thread::id __y) noexcept
- bool **std::operator**>= (thread::id __x, thread::id __y) noexcept
- template<typename _Rep , typename _Period >
  void std::this_thread::sleep_for (const chrono::duration< _Rep, _Period > &__rtime)
- template<typename _Clock , typename _Duration >
  void std::this_thread::sleep_until (const chrono::time_point< _Clock, _Duration > &__atime)
- void **std::swap** (thread &__x, thread &__y) noexcept
- void std::this_thread::yield () noexcept

5.610.1 Detailed Description

This is a Standard C++ Library header.

Definition in file thread.

5.611 throw_allocator.h File Reference

Classes

- struct __gnu_cxx::random_condition::always_adjustor
- struct __gnu_cxx::limit_condition::always_adjustor
- struct __gnu_cxx::annotate_base

- struct __gnu_cxx::condition_base
- struct __gnu_cxx::forced_error
- struct __gnu_cxx::random_condition::group_adjustor
- struct std::hash< __gnu_cxx::throw_value_limit >
- struct std::hash< __gnu_cxx::throw_value_random >
- struct __gnu_cxx::limit_condition::limit_adjustor
- struct __gnu_cxx::limit_condition
- struct __gnu_cxx::random_condition::never_adjustor
- struct __gnu_cxx::limit_condition::never_adjustor
- struct __gnu_cxx::random_condition
- class __gnu_cxx::throw_allocator_base< _Tp, _Cond >
- struct __gnu_cxx::throw_allocator_limit< _Tp >
- struct __gnu_cxx::throw_allocator_random< _Tp >
- struct __gnu_cxx::throw_value_base< _Cond >
- struct __gnu_cxx::throw_value_limit
- struct __gnu_cxx::throw_value_random

Namespaces

- __gnu_cxx
- std

Functions

- void **__gnu_cxx::__throw_forced_error** ()
- template<typename _Tp , typename _Cond >
  bool **__gnu_cxx::operator!=** (const throw_allocator_base< _Tp, _Cond > &, const throw_allocator_base< _Tp, _Cond > &)
- template<typename _Cond >
  throw_value_base< _Cond > **__gnu_cxx::operator*** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Cond >
  throw_value_base< _Cond > **__gnu_cxx::operator+** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Cond >
  throw_value_base< _Cond > **__gnu_cxx::operator-** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Cond >
  bool **__gnu_cxx::operator<** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- std::ostream & **__gnu_cxx::operator<<** (std::ostream &os, const annotate_base &__b)
- template<typename _Cond >
  bool **__gnu_cxx::operator==** (const throw_value_base< _Cond > &__a, const throw_value_base< _Cond > &__b)
- template<typename _Tp , typename _Cond >
  bool **__gnu_cxx::operator==** (const throw_allocator_base< _Tp, _Cond > &, const throw_allocator_base< _Tp, _Cond > &)
- template<typename _Cond >
  void **__gnu_cxx::swap** (throw_value_base< _Cond > &__a, throw_value_base< _Cond > &__b)

5.611.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Contains two exception-generating types (throw_value, throw_allocator) intended to be used as value and allocator types while testing exception safety in templatized containers and algorithms. The allocator has additional log and debug features. The exception generated is of type forced_exception_error.

Definition in file throw_allocator.h.

5.612 time_members.h File Reference

Namespaces

- std

5.612.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <locale>.

Definition in file time_members.h.

5.613 trace_fn_imps.hpp File Reference

5.613.1 Detailed Description

Contains an implementation class for a binary_heap.

Definition in file binary_heap_/trace_fn_imps.hpp.

5.614 trace_fn_imps.hpp File Reference

5.614.1 Detailed Description

Contains implementations of cc_ht_map_'s trace-mode functions.

Definition in file cc_hash_table_map_/trace_fn_imps.hpp.

5.615 trace_fn_imps.hpp File Reference

5.615.1 Detailed Description

Contains implementations of gp_ht_map_'s trace-mode functions.

Definition in file gp_hash_table_map_/trace_fn_imps.hpp.

5.616 trace_fn_imps.hpp File Reference

5.616.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file left_child_next_sibling_heap_/trace_fn_imps.hpp.

5.617 trace_fn_imps.hpp File Reference

5.617.1 Detailed Description

Contains implementations of lu_map_.

Definition in file list_update_map_/trace_fn_imps.hpp.

5.618 trace_fn_imps.hpp File Reference

5.618.1 Detailed Description

Contains an implementation class for pat_trie_.

Definition in file pat_trie_/trace_fn_imps.hpp.

5.619 trace_fn_imps.hpp File Reference

5.619.1 Detailed Description

Contains an implementation for rc_binomial_heap_.

Definition in file rc_binomial_heap_/trace_fn_imps.hpp.

5.620 trace_fn_imps.hpp File Reference

5.620.1 Detailed Description

Contains an implementation class for left_child_next_sibling_heap_.

Definition in file thin_heap_/trace_fn_imps.hpp.

5.621 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::bin_search_tree_traits< Key, Mapped, Cmp_Fn, Node_Update, Node, _Alloc >
- struct __gnu_pbds::detail::bin_search_tree_traits< Key, null_type, Cmp_Fn, Node_Update, Node, _Alloc >

Namespaces

- __gnu_pbds

5.621.1 Detailed Description

Contains an implementation for bin_search_tree_.

Definition in file bin_search_tree_/traits.hpp.

5.622 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::tree_traits< Key, Data, Cmp_Fn, Node_Update, Tag, _Alloc >
- struct __gnu_pbds::detail::trie_traits< Key, Data, _ATraits, Node_Update, Tag, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_DEBUG_VERIFY**(_Cond)

5.622.1 Detailed Description

Contains an implementation class for tree-like classes.

Definition in file branch_policy/traits.hpp.

5.623 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >

Namespaces

- __gnu_pbds

5.623.1 Detailed Description

Contains an implementation class for ov_tree_.

Definition in file ov_tree_map_/traits.hpp.

5.624 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >
- struct __gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >

Namespaces

- __gnu_pbds

5.624.1 Detailed Description

Contains an implementation class for pat_trie_.

Definition in file pat_trie_/traits.hpp.

5.625 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >

Namespaces

- __gnu_pbds

5.625.1 Detailed Description

Contains an implementation for rb_tree_.

Definition in file rb_tree_map_/traits.hpp.

5.626 traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >
- struct __gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >

Namespaces

- __gnu_pbds

5.626.1 Detailed Description

Contains an implementation for splay_tree_.

Definition in file splay_tree_/traits.hpp.

5.627 tree_policy.hpp File Reference

Classes

- class __gnu_pbds::tree_order_statistics_node_update< Node_CItr, Node_Itr, Cmp_Fn, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_BRANCH_POLICY_BASE**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.627.1 Detailed Description

Contains tree-related policies.

Definition in file tree_policy.hpp.

5.628 tree_trace_base.hpp File Reference

5.628.1 Detailed Description

Contains tree-related policies.

Definition in file tree_trace_base.hpp.

5.629 trie_policy.hpp File Reference

Classes

- class __gnu_pbds::trie_order_statistics_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >
- class __gnu_pbds::trie_prefix_search_node_update< Node_CItr, Node_Itr, _ATraits, _Alloc >
- struct __gnu_pbds::trie_string_access_traits< String, Min_E_Val, Max_E_Val, Reverse, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_CLASS_T_DEC**
- #define **PB_DS_TRIE_POLICY_BASE**

5.629.1 Detailed Description

Contains trie-related policies.

Definition in file trie_policy.hpp.

5.630 trie_policy_base.hpp File Reference

Classes

- class __gnu_pbds::detail::trie_policy_base< Node_CItr, Node_Itr, _ATraits, _Alloc >

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_CLASS_C_DEC**
- #define **PB_DS_CLASS_T_DEC**

5.630.1 Detailed Description

Contains an implementation of trie_policy_base.

Definition in file trie_policy_base.hpp.

5.631 trie_string_access_traits_imp.hpp File Reference

5.631.1 Detailed Description

Contains a policy for extracting character positions from a string for a vector-based PATRICIA tree

Definition in file trie_string_access_traits_imp.hpp.

5.632 tuple File Reference

Classes

- struct std::_Tuple_impl< _Idx, _Elements >
- struct std::_Tuple_impl< _Idx, _Head, _Tail...>
- class std::tuple< _Elements >
- class std::tuple< _Elements >
- class std::tuple< _T1, _T2 >
- struct std::tuple_element< 0, tuple< _Head, _Tail...> >
- struct std::tuple_element< __i, tuple< _Head, _Tail...> >
- struct std::tuple_element< __i, tuple<> >
- struct std::tuple_size< tuple< _Elements...> >
- struct std::uses_allocator< tuple< _Types...>, _Alloc >

Namespaces

- std

Macros

- #define **__cpp_lib_tuples_by_type**
- #define **_GLIBCXX_TUPLE**

Typedefs

- template<typename _Tp >
  using **std::__empty_not_final** = typename conditional< __is_final(_Tp), false_type, __is_empty_non_tuple< _Tp >>::type

Functions

- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr _Head & **std::__get_helper** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<std::size_t __i, typename _Head , typename... _Tail>
  constexpr const _Head & **std::__get_helper** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr _Head & **std::__get_helper2** (_Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename _Head , size_t __i, typename... _Tail>
  constexpr const _Head & **std::__get_helper2** (const _Tuple_impl< __i, _Head, _Tail...> &__t) noexcept
- template<typename... _Elements>
  constexpr tuple< _Elements &&...> std::forward_as_tuple (_Elements &&...__args) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > & std::get (tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > & std::get (const tuple< _Elements...> &__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr __tuple_element_t
  < __i, tuple< _Elements...> > && std::get (tuple< _Elements...> &&__t) noexcept
- template<std::size_t __i, typename... _Elements>
  constexpr const
  __tuple_element_t< __i, tuple
  < _Elements...> > && std::get (const tuple< _Elements...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp & std::get (tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr _Tp && std::get (tuple< _Types...> &&__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp & std::get (const tuple< _Types...> &__t) noexcept
- template<typename _Tp , typename... _Types>
  constexpr const _Tp && std::get (const tuple< _Types...> &&__t) noexcept
- template<typename... _Elements>
  constexpr tuple< typename
  __decay_and_strip< _Elements >
  ::__type...> **std::make_tuple** (_Elements &&...__args)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator!=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)

- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator<** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator<=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator==** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator>** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _TElements, typename... _UElements>
  constexpr bool **std::operator>=** (const tuple< _TElements...> &__t, const tuple< _UElements...> &__u)
- template<typename... _Elements>
  constexpr enable_if< __and_
  < __is_swappable< _Elements >
  ...>::value >::type std::swap (tuple< _Elements...> &__x, tuple< _Elements...> &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename... _Elements>
  constexpr enable_if<!__and_
  < __is_swappable< _Elements >
  ...>::value >::type std::swap (tuple< _Elements...> &, tuple< _Elements...> &)=delete
- template<typename... _Elements>
  constexpr tuple< _Elements &...> std::tie (_Elements &...__args) noexcept
- template<typename... _Tpls, typename = typename enable_if<__and_<__is_tuple_like<_Tpls>...>::value>::type>
  constexpr auto std::tuple_cat (_Tpls &&...__tpls) -> typename __tuple_cat_result< _Tpls...>::__type

Variables

- constexpr _Swallow_assign **std::ignore**

5.632.1 Detailed Description

This is a Standard C++ Library header.

Definition in file tuple.

5.633 tuple File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_tuple**
- #define **_GLIBCXX_EXPERIMENTAL_TUPLE**

Functions

- template<typename _Fn , typename _Tuple , std::size_t... _Idx>
  decltype(auto) constexpr **std::experimental::fundamentals_v1::__apply_impl** (_Fn &&__f, _Tuple &&__t, std::index_sequence< _Idx...>)

- template<typename _Fn , typename _Tuple >
  decltype(auto) constexpr **std::experimental::fundamentals_v1::apply** (_Fn &&__f, _Tuple &&__t)

Variables

- template<typename _Tp >
  constexpr size_t **std::experimental::fundamentals_v1::tuple_size_v**

5.633.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/tuple.

5.634 type_traits File Reference

Classes

- struct std::__add_pointer_helper< _Tp, bool >
- struct std::__detector< _Default, _AlwaysVoid, _Op, _Args >
- struct std::__detector< _Default, __void_t< _Op< _Args...> >, _Op, _Args...>
- struct std::__is_nullptr_t< _Tp >
- struct std::add_const< _Tp >
- struct std::add_cv< _Tp >
- struct std::add_lvalue_reference< _Tp >
- struct std::add_rvalue_reference< _Tp >
- struct std::add_volatile< _Tp >
- struct std::aligned_storage< _Len, _Align >
- struct std::aligned_union< _Len, _Types >
- struct std::alignment_of< _Tp >
- struct std::common_type< _Tp >
- struct std::conditional< bool, typename, typename >
- struct std::conditional< bool, typename, typename >
- class std::decay< _Tp >
- struct std::enable_if< bool, _Tp >
- struct std::extent< _Tp >
- struct std::extent< _Tp >
- struct std::has_virtual_destructor< _Tp >
- struct std::integral_constant< _Tp, __v >
- struct std::is_abstract< _Tp >
- struct std::is_arithmetic< _Tp >
- struct std::is_array< typename >
- struct std::is_assignable< _Tp, _Up >
- struct std::is_base_of< _Base, _Derived >
- struct std::is_class< _Tp >
- struct std::is_compound< _Tp >
- struct std::is_const< typename >
- struct std::is_const< typename >
- struct std::is_constructible< _Tp, _Args >
- struct std::is_convertible< _From, _To >

- struct std::is_copy_assignable< _Tp >
- struct std::is_copy_constructible< _Tp >
- struct std::is_default_constructible< _Tp >
- struct std::is_destructible< _Tp >
- struct std::is_empty< _Tp >
- struct std::is_enum< _Tp >
- struct std::is_final< _Tp >
- struct std::is_floating_point< _Tp >
- struct std::is_function< typename >
- struct std::is_function< typename >
- struct std::is_fundamental< _Tp >
- struct std::is_integral< _Tp >
- struct std::is_literal_type< _Tp >
- struct std::is_lvalue_reference< typename >
- struct std::is_member_function_pointer< _Tp >
- struct std::is_member_object_pointer< _Tp >
- struct std::is_member_pointer< typename >
- struct std::is_member_pointer< typename >
- struct std::is_move_assignable< _Tp >
- struct std::is_move_constructible< _Tp >
- struct std::is_nothrow_assignable< _Tp, _Up >
- struct std::is_nothrow_constructible< _Tp, _Args >
- struct std::is_nothrow_copy_assignable< _Tp >
- struct std::is_nothrow_copy_constructible< _Tp >
- struct std::is_nothrow_default_constructible< _Tp >
- struct std::is_nothrow_destructible< _Tp >
- struct std::is_nothrow_move_assignable< _Tp >
- struct std::is_nothrow_move_constructible< _Tp >
- struct std::is_nothrow_swappable< _Tp >
- struct std::is_nothrow_swappable_with< _Tp, _Up >
- struct std::is_null_pointer< _Tp >
- struct std::is_object< _Tp >
- struct std::is_pod< _Tp >
- struct std::is_pointer< _Tp >
- struct std::is_polymorphic< _Tp >
- struct std::is_reference< typename >
- struct std::is_reference< typename >
- struct std::is_rvalue_reference< typename >
- struct std::is_same< typename, typename >
- struct std::is_same< typename, typename >
- struct std::is_scalar< _Tp >
- struct std::is_standard_layout< _Tp >
- struct std::is_swappable< _Tp >
- struct std::is_swappable_with< _Tp, _Up >
- struct std::is_trivial< _Tp >
- struct std::is_trivially_assignable< _Tp, _Up >
- struct std::is_trivially_constructible< _Tp, _Args >
- struct std::is_trivially_copy_assignable< _Tp >
- struct std::is_trivially_copy_constructible< _Tp >
- struct std::is_trivially_default_constructible< _Tp >
- struct std::is_trivially_destructible< _Tp >

- struct std::is_trivially_move_assignable< _Tp >
- struct std::is_trivially_move_constructible< _Tp >
- struct std::is_union< _Tp >
- struct std::is_void< typename >
- struct std::is_void< typename >
- struct std::is_volatile< typename >
- struct std::make_signed< _Tp >
- struct std::make_unsigned< _Tp >
- struct std::rank< typename >
- class std::reference_wrapper< _Tp >
- struct std::remove_all_extents< typename >
- struct std::remove_all_extents< typename >
- struct std::remove_const< _Tp >
- struct std::remove_cv< typename >
- struct std::remove_cv< typename >
- struct std::remove_extent< _Tp >
- struct std::remove_pointer< _Tp >
- struct std::remove_reference< _Tp >
- struct std::remove_volatile< _Tp >
- class std::result_of< _Signature >
- class std::tuple< _Elements >
- struct std::underlying_type< _Tp >

Namespaces

- std

Macros

- #define **__cpp_lib_integral_constant_callable**
- #define **__cpp_lib_is_final**
- #define **__cpp_lib_is_null_pointer**
- #define **__cpp_lib_is_swappable**
- #define **__cpp_lib_result_of_sfinae**
- #define **__cpp_lib_transformation_trait_aliases**
- #define **__cpp_lib_void_t**
- #define _GLIBCXX_HAS_NESTED_TYPE(_NTYPE)
- #define **_GLIBCXX_TYPE_TRAITS**

Typedefs

- template<bool __v>
  using **std::__bool_constant** = integral_constant< bool, __v >
- template<typename _Fn , typename... _Args>
  using **std::__call_is_nothrow_** = __call_is_nothrow< __invoke_result< _Fn, _Args...>, _Fn, _Args...>
- template<typename _Tp >
  using **std::__decay_and_strip** = __strip_reference_wrapper< __decay_t< _Tp >>
- template<typename _Tp >
  using **std::__decay_t** = typename decay< _Tp >::type

- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::__detected_or** = __detector< _Default, void, _Op, _Args...>
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::__detected_or_t** = typename __detected_or< _Default, _Op, _Args...>::type
- template<bool _Cond, typename _Tp = void>
  using **std::__enable_if_t** = typename enable_if< _Cond, _Tp >::type
- template<typename _ToElementType , typename _FromElementType >
  using **std::__is_array_convertible** = is_convertible< _FromElementType(*)[], _ToElementType(*)[]>
- template<typename _Tp , typename... _Args>
  using **std::__is_nothrow_constructible_impl** = __is_nt_constructible_impl< __is_constructible(_Tp, _Args...), _Tp, _Args...>
- template<typename _Tp , typename... _Types>
  using **std::__is_one_of** = __or_< is_same< _Tp, _Types >...>
- template<typename _Tp >
  using **std::__is_signed_integer** = __is_one_of< __remove_cv_t< _Tp >, signed char, signed short, signed int, signed long, signed long long >
- template<typename _Tp >
  using **std::__is_standard_integer** = __or_< __is_signed_integer< _Tp >, __is_unsigned_integer< _Tp >>
- template<typename _Tp >
  using **std::__is_unsigned_integer** = __is_one_of< __remove_cv_t< _Tp >, unsigned char, unsigned short, unsigned int, unsigned long, unsigned long long >
- template<typename _Tp >
  using **std::__remove_cv_t** = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using **std::__remove_cvref_t** = typename remove_cv< typename remove_reference< _Tp >::type >::type
- template<typename _Tp >
  using **std::__type_identity_t** = typename __type_identity< _Tp >::type
- template<typename... >
  using **std::__void_t** = void
- template<typename... _Cond>
  using **std::_Require** = __enable_if_t< __and_< _Cond...>::value >
- template<typename _Tp >
  using std::add_const_t = typename add_const< _Tp >::type
- template<typename _Tp >
  using std::add_cv_t = typename add_cv< _Tp >::type
- template<typename _Tp >
  using std::add_lvalue_reference_t = typename add_lvalue_reference< _Tp >::type
- template<typename _Tp >
  using std::add_pointer_t = typename add_pointer< _Tp >::type
- template<typename _Tp >
  using std::add_rvalue_reference_t = typename add_rvalue_reference< _Tp >::type
- template<typename _Tp >
  using std::add_volatile_t = typename add_volatile< _Tp >::type
- template<size_t _Len, size_t _Align = __alignof__(typename __aligned_storage_msa<_Len>::__type)>
  using std::aligned_storage_t = typename aligned_storage< _Len, _Align >::type
- template<size_t _Len, typename... _Types>
  using **std::aligned_union_t** = typename aligned_union< _Len, _Types...>::type
- template<typename... _Tp>
  using std::common_type_t = typename common_type< _Tp...>::type
- template<bool _Cond, typename _Iftrue , typename _Iffalse >
  using std::conditional_t = typename conditional< _Cond, _Iftrue, _Iffalse >::type
- template<typename _Tp >
  using std::decay_t = typename decay< _Tp >::type

- template<bool _Cond, typename _Tp = void>
  using std::enable_if_t = typename enable_if< _Cond, _Tp >::type
- typedef integral_constant
  < bool, false > std::false_type
- template<typename _Tp >
  using std::make_signed_t = typename make_signed< _Tp >::type
- template<typename _Tp >
  using std::make_unsigned_t = typename make_unsigned< _Tp >::type
- template<typename _Tp >
  using std::remove_all_extents_t = typename remove_all_extents< _Tp >::type
- template<typename _Tp >
  using std::remove_const_t = typename remove_const< _Tp >::type
- template<typename _Tp >
  using std::remove_cv_t = typename remove_cv< _Tp >::type
- template<typename _Tp >
  using std::remove_extent_t = typename remove_extent< _Tp >::type
- template<typename _Tp >
  using std::remove_pointer_t = typename remove_pointer< _Tp >::type
- template<typename _Tp >
  using std::remove_reference_t = typename remove_reference< _Tp >::type
- template<typename _Tp >
  using std::remove_volatile_t = typename remove_volatile< _Tp >::type
- template<typename _Tp >
  using std::result_of_t = typename result_of< _Tp >::type
- typedef integral_constant
  < bool, true > std::true_type
- template<typename _Tp >
  using std::underlying_type_t = typename underlying_type< _Tp >::type
- template<typename... >
  using std::void_t = void

Functions

- template<typename _Fn , typename _Tp , typename... _Args>
  constexpr bool **std::__call_is_nt** (__invoke_memfun_ref)
- template<typename _Fn , typename _Tp , typename... _Args>
  constexpr bool **std::__call_is_nt** (__invoke_memfun_deref)
- template<typename _Fn , typename _Tp >
  constexpr bool **std::__call_is_nt** (__invoke_memobj_ref)
- template<typename _Fn , typename _Tp >
  constexpr bool **std::__call_is_nt** (__invoke_memobj_deref)
- template<typename _Fn , typename... _Args>
  constexpr bool **std::__call_is_nt** (__invoke_other)
- template<typename _Tp , size_t = sizeof(_Tp)>
  constexpr true_type **std::__is_complete_or_unbounded** (__type_identity< _Tp >)
- template<typename _TypeIdentity , typename _NestedType = typename _TypeIdentity::type>
  constexpr __or_< is_reference
  < _NestedType >, is_function
  < _NestedType >, is_void
  < _NestedType >
  , __is_array_unknown_bounds
  < _NestedType > >::type **std::__is_complete_or_unbounded** (_TypeIdentity)

- template<typename _Tp >
  std::__is_nullptr_t is_null_pointer **std::_GLIBCXX_DEPRECATED_SUGGEST** ("std::is_null_pointer")
- template<typename _Tp >
  auto **std::declval** () noexcept-> decltype(__declval< _Tp >(0))
- template<typename _Tp >
  constexpr _Require< __not_
  < __is_tuple_like< _Tp >
  >, is_move_constructible< _Tp >
  , is_move_assignable< _Tp > > std::swap (_Tp &, _Tp &) noexcept(__and_< is_nothrow_move_constructible<
  _Tp >, is_nothrow_move_assignable< _Tp >>::value)
- template<typename _Tp , size_t _Nm>
  constexpr __enable_if_t
  < __is_swappable< _Tp >::value > std::swap (_Tp(&__a)[_Nm], _Tp(&__b)[_Nm]) noexcept(__is_nothrow_-
  swappable< _Tp >::value)

Variables

- std::is_reference **std::_GLIBCXX_DEPRECATED_SUGGEST**
- template<typename _Tp >
  constexpr bool std::is_nothrow_swappable_v
- template<typename _Tp , typename _Up >
  constexpr bool std::is_nothrow_swappable_with_v
- template<typename _Tp >
  constexpr bool std::is_swappable_v
- template<typename _Tp , typename _Up >
  constexpr bool std::is_swappable_with_v

5.634.1 Detailed Description

This is a Standard C++ Library header.

Definition in file type_traits.

5.634.2 Macro Definition Documentation

5.634.2.1 #define _GLIBCXX_HAS_NESTED_TYPE(*_NTYPE*)

Use SFINAE to determine if the type _Tp has a publicly-accessible member type _NTYPE.

Definition at line 2614 of file type_traits.

5.635 type_traits File Reference

Classes

- struct std::tr2::__reflection_typelist< _Elements >
- struct std::tr2::__reflection_typelist< _First, _Rest...>
- struct std::tr2::__reflection_typelist<>
- struct std::tr2::bases< _Tp >
- struct std::tr2::direct_bases< _Tp >

Namespaces

- std
- std::tr2

Macros

- #define **_GLIBCXX_TR2_TYPE_TRAITS**

5.635.1 Detailed Description

This is a TR2 C++ Library header.

Definition in file tr2/type_traits.

5.636 type_traits File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_detect**
- #define **__cpp_lib_experimental_logical_traits**
- #define **__cpp_lib_experimental_type_trait_variable_templates**
- #define **_GLIBCXX_EXPERIMENTAL_TYPE_TRAITS**

Typedefs

- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::detected_or** = std::__detected_or< _Default, _Op, _Args...>
- template<typename _Default , template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::detected_or_t** = typename detected_or< _Default, _Op, _Args...>::type
- template<template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::detected_t** = typename std::__detector< nonesuch, void, _Op, _Args...>::type
- template<template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::is_detected** = typename std::__detector< nonesuch, void, _Op, _Args...>::value_t
- template<typename _To , template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::is_detected_convertible** = is_convertible< detected_t< _Op, _Args...>, _To >
- template<typename _Expected , template< typename...> class _Op, typename... _Args>
  using **std::experimental::fundamentals_v2::is_detected_exact** = is_same< _Expected, detected_t< _Op, _Args...>>
- template<typename... >
  using **std::experimental::fundamentals_v2::void_t** = void

Variables

- template<typename _Tp >
  constexpr size_t **std::experimental::fundamentals_v1::alignment_of_v**
- template<typename... _Bn>
  constexpr bool **std::experimental::fundamentals_v2::conjunction_v**
- template<typename... _Bn>
  constexpr bool **std::experimental::fundamentals_v2::disjunction_v**
- template<typename _Tp , unsigned _Idx = 0>
  constexpr size_t **std::experimental::fundamentals_v1::extent_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::has_virtual_destructor_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_abstract_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_arithmetic_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_array_v**
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v1::is_assignable_v**
- template<typename _Base , typename _Derived >
  constexpr bool **std::experimental::fundamentals_v1::is_base_of_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_class_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_compound_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_const_v**
- template<typename _Tp , typename... _Args>
  constexpr bool **std::experimental::fundamentals_v1::is_constructible_v**
- template<typename _From , typename _To >
  constexpr bool **std::experimental::fundamentals_v1::is_convertible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_copy_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_copy_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_default_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_destructible_v**
- template<typename _To , template< typename...> class _Op, typename... _Args>
  constexpr bool **std::experimental::fundamentals_v2::is_detected_convertible_v**
- template<typename _Expected , template< typename...> class _Op, typename... _Args>
  constexpr bool **std::experimental::fundamentals_v2::is_detected_exact_v**
- template<template< typename...> class _Op, typename... _Args>
  constexpr bool **std::experimental::fundamentals_v2::is_detected_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_empty_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_enum_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_final_v**

- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_floating_point_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_function_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_fundamental_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_integral_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_literal_type_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_lvalue_reference_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_member_function_pointer_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_member_object_pointer_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_member_pointer_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_move_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_move_constructible_v**
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_assignable_v**
- template<typename _Tp , typename... _Args>
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_copy_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_copy_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_default_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_destructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_move_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_nothrow_move_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_null_pointer_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_object_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_pod_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_pointer_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_polymorphic_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_reference_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_rvalue_reference_v**

- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v1::is_same_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_scalar_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_signed_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_standard_layout_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivial_v**
- template<typename _Tp , typename _Up >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_assignable_v**
- template<typename _Tp , typename... _Args>
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_copy_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_copy_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_copyable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_default_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_destructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_move_assignable_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_trivially_move_constructible_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_union_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_unsigned_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_void_v**
- template<typename _Tp >
  constexpr bool **std::experimental::fundamentals_v1::is_volatile_v**
- template<typename _Pp >
  constexpr bool **std::experimental::fundamentals_v2::negation_v**
- template<typename _Tp >
  constexpr size_t **std::experimental::fundamentals_v1::rank_v**

5.636.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/type_traits.

5.637 type_traits.h File Reference

Namespaces

- __gnu_cxx

Functions

- template<typename _Type >
  bool **__gnu_cxx::__is_null_pointer** (_Type *__ptr)
- template<typename _Type >
  bool **__gnu_cxx::__is_null_pointer** (_Type)
- bool **__gnu_cxx::__is_null_pointer** (std::nullptr_t)

5.637.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file type_traits.h.

5.638 type_utils.hpp File Reference

Namespaces

- __gnu_pbds

Macros

- #define **PB_DS_STATIC_ASSERT**(UNIQUE, E)

Typedefs

- typedef
  std::tr1::integral_constant
  < int, 0 > **__gnu_pbds::detail::false_type**
- typedef
  std::tr1::integral_constant
  < int, 1 > **__gnu_pbds::detail::true_type**

5.638.1 Detailed Description

Contains utilities for handling types. All of these classes are based on Modern C++ by Andrei Alxandrescu.

Definition in file type_utils.hpp.

5.639 typeindex File Reference

Classes

- struct std::hash< _Tp >
- struct std::hash< type_index >
- struct std::type_index

Namespaces

- std

Macros

- #define **_GLIBCXX_TYPEINDEX**

5.639.1 Detailed Description

This is a Standard C++ Library header.

Definition in file typeindex.

5.640 typeinfo File Reference

Classes

- class std::bad_cast
- class std::bad_typeid
- class std::type_info

Namespaces

- std

Macros

- #define **__GXX_MERGED_TYPEINFO_NAMES**
- #define **__GXX_TYPEINFO_EQUALITY_INLINE**
- #define **_TYPEINFO**

5.640.1 Detailed Description

This is a Standard C++ Library header.

Definition in file typeinfo.

5.641 typelist.h File Reference

Namespaces

- __gnu_cxx
- __gnu_cxx::typelist

Macros

- #define **_GLIBCXX_TYPELIST_CHAIN1**(X0)
- #define **_GLIBCXX_TYPELIST_CHAIN10**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9)
- #define **_GLIBCXX_TYPELIST_CHAIN11**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10)
- #define **_GLIBCXX_TYPELIST_CHAIN12**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11)
- #define **_GLIBCXX_TYPELIST_CHAIN13**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12)
- #define **_GLIBCXX_TYPELIST_CHAIN14**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13)

- #define **_GLIBCXX_TYPELIST_CHAIN15**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14)
- #define **_GLIBCXX_TYPELIST_CHAIN16**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15)
- #define **_GLIBCXX_TYPELIST_CHAIN17**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15, X16)
- #define **_GLIBCXX_TYPELIST_CHAIN18**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15, X16, X17)
- #define **_GLIBCXX_TYPELIST_CHAIN19**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15, X16, X17, X18)
- #define **_GLIBCXX_TYPELIST_CHAIN2**(X0, X1)
- #define **_GLIBCXX_TYPELIST_CHAIN20**(X0, X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15, X16, X17, X18, X19)
- #define **_GLIBCXX_TYPELIST_CHAIN3**(X0, X1, X2)
- #define **_GLIBCXX_TYPELIST_CHAIN4**(X0, X1, X2, X3)
- #define **_GLIBCXX_TYPELIST_CHAIN5**(X0, X1, X2, X3, X4)
- #define **_GLIBCXX_TYPELIST_CHAIN6**(X0, X1, X2, X3, X4, X5)
- #define **_GLIBCXX_TYPELIST_CHAIN7**(X0, X1, X2, X3, X4, X5, X6)
- #define **_GLIBCXX_TYPELIST_CHAIN8**(X0, X1, X2, X3, X4, X5, X6, X7)
- #define **_GLIBCXX_TYPELIST_CHAIN9**(X0, X1, X2, X3, X4, X5, X6, X7, X8)

Functions

- template<typename Fn , typename Typelist >
  void **__gnu_cxx::typelist::apply** (Fn &, Typelist)
- template<typename Gn , typename Typelist >
  void __gnu_cxx::typelist::apply_generator (Gn &, Typelist)
- template<typename Gn , typename TypelistT , typename TypelistV >
  void **__gnu_cxx::typelist::apply_generator** (Gn &, TypelistT, TypelistV)
- template<typename Fn , typename Typelist >
  void **__gnu_cxx::typelist::apply_generator** (Fn &fn, Typelist)
- template<typename Fn , typename TypelistT , typename TypelistV >
  void **__gnu_cxx::typelist::apply_generator** (Fn &fn, TypelistT, TypelistV)

5.641.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Contains typelist_chain definitions. Typelists are an idea by Andrei Alexandrescu.

Definition in file typelist.h.

5.642 types.h File Reference

Namespaces

- __gnu_parallel

Typedefs

- typedef int64_t __gnu_parallel::_CASable
- typedef uint64_t __gnu_parallel::_SequenceIndex
- typedef uint16_t __gnu_parallel::_ThreadIndex

Enumerations

- enum __gnu_parallel::_AlgorithmStrategy { **heuristic**, **force_sequential**, **force_parallel** }
- enum __gnu_parallel::_FindAlgorithm { **GROWING_BLOCKS**, **CONSTANT_SIZE_BLOCKS**, **EQUAL_SPLIT** }
- enum __gnu_parallel::_MultiwayMergeAlgorithm { **LOSER_TREE** }
- enum __gnu_parallel::_Parallelism { __gnu_parallel::sequential, __gnu_parallel::parallel_unbalanced, __gnu_parallel::parallel_balanced, __gnu_parallel::parallel_omp_loop, __gnu_parallel::parallel_omp_loop_static, __gnu_parallel::parallel_taskqueue }
- enum __gnu_parallel::_PartialSumAlgorithm { **RECURSIVE**, **LINEAR** }
- enum __gnu_parallel::_SortAlgorithm { **MWMS**, **QS**, **QS_BALANCED** }
- enum __gnu_parallel::_SplittingAlgorithm { **SAMPLING**, **EXACT** }

Variables

- static const int __gnu_parallel::_CASable_bits
- static const _CASable __gnu_parallel::_CASable_mask

5.642.1 Detailed Description

Basic types and typedefs. This file is a GNU parallel extension to the Standard C++ Library.

Definition in file types.h.

5.643 types_traits.hpp File Reference

Classes

- struct __gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash >
- struct __gnu_pbds::detail::maybe_null_type< Key, null_type, _Alloc, Store_Hash >
- struct __gnu_pbds::detail::no_throw_copies< Key, Mapped >
- struct __gnu_pbds::detail::no_throw_copies< Key, null_type >
- struct __gnu_pbds::detail::rebind_traits< _Alloc, T >
- struct __gnu_pbds::detail::select_value_type< Key, Mapped >
- struct __gnu_pbds::detail::select_value_type< Key, null_type >
- struct __gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash >
- struct __gnu_pbds::detail::stored_data< _Tv, _Th, false >
- struct __gnu_pbds::detail::stored_hash< _Th >
- struct __gnu_pbds::detail::stored_value< _Tv >
- struct __gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash >

Namespaces

- __gnu_pbds

5.643.1 Detailed Description

Contains a traits class of types used by containers.

Definition in file types_traits.hpp.

5.644 uniform_int_dist.h File Reference

Classes

- struct std::uniform_int_distribution< _IntType >::param_type
- class std::uniform_int_distribution< _IntType >

Namespaces

- std
- std::__detail

Functions

- template<typename _Tp >
  bool **std::__detail::_Power_of_2** (_Tp __x)

5.644.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <random>.

Definition in file uniform_int_dist.h.

5.645 unique_copy.h File Reference

Namespaces

- __gnu_parallel

Functions

- template<typename _IIter , class _OutputIterator , class _BinaryPredicate >
  _OutputIterator __gnu_parallel::__parallel_unique_copy (_IIter __first, _IIter __last, _OutputIterator __result, _BinaryPredicate __binary_pred)
- template<typename _IIter , class _OutputIterator >
  _OutputIterator __gnu_parallel::__parallel_unique_copy (_IIter __first, _IIter __last, _OutputIterator __result)

5.645.1 Detailed Description

Parallel implementations of std::unique_copy(). This file is a GNU parallel extension to the Standard C++ Library.

Definition in file unique_copy.h.

5.646 unique_lock.h File Reference

Classes

- class std::unique_lock< _Mutex >

Namespaces

- std

5.646.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <mutex>.

Definition in file unique_lock.h.

5.647 unique_ptr.h File Reference

Classes

- struct std::default_delete< _Tp >
- struct std::default_delete< _Tp[]>
- struct std::hash< unique_ptr< _Tp, _Dp > >
- class std::unique_ptr< _Tp, _Dp >
- class std::unique_ptr< _Tp[], _Dp >

Namespaces

- std

Macros

- #define __cpp_lib_make_unique

5.647.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <memory>.

Definition in file unique_ptr.h.

5.648 unordered_map File Reference

Macros

- #define **_GLIBCXX_UNORDERED_MAP**

5.648.1 Detailed Description

This is a Standard C++ Library header.

Definition in file unordered_map.

5.649 unordered_map File Reference

Classes

- class std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_map< _Key, _Tp, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Allocator >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_UNORDERED_MAP**

Functions

- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator!=** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator!=** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator==** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator==** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  void **std::__debug::swap** (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Key , typename _Tp , typename _Hash , typename _Pred , typename _Alloc >
  void **std::__debug::swap** (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))

5.649.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/unordered_map.

5.650 unordered_map File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_UNORDERED_MAP**

Typedefs

- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>>
  using **std::experimental::fundamentals_v2::pmr::unordered_map** = std::unordered_map< _Key, _Tp, _Hash, _Pred, polymorphic_allocator< pair< const _Key, _Tp >>>
- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>>
  using **std::experimental::fundamentals_v2::pmr::unordered_multimap** = std::unordered_multimap< _Key, -_Tp, _Hash, _Pred, polymorphic_allocator< pair< const _Key, _Tp >>>

Functions

- template<typename _Key , typename _Tp , typename _Hash , typename _CPred , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (unordered_map< _Key, _Tp, _Hash, _CPred, _Alloc > &__cont, _Predicate __pred)
- template<typename _Key , typename _Tp , typename _Hash , typename _CPred , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (unordered_multimap< _Key, _Tp, _Hash, _CPred, _Alloc > &__cont, _Predicate __pred)

5.650.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/unordered_map.

5.651 unordered_map.h File Reference

Classes

- class std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >
- class std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >
- class std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >

Namespaces

- std

Typedefs

- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = std::equal_to<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >, typename _Tr = __umap_traits<__cache_default<_Key, _Hash>::value>>
  using **std::__umap_hashtable** = _Hashtable< _Key, std::pair< const _Key, _Tp >, _Alloc, __detail::_Select1st, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using std::__umap_traits = __detail::_Hashtable_traits< _Cache, false, true >

- template<typename _Key , typename _Tp , typename _Hash = hash<_Key>, typename _Pred = std::equal_to<_Key>, typename _Alloc = std::allocator<std::pair<const _Key, _Tp> >, typename _Tr = __ummap_traits<__cache_default<_Key, _Hash>::value>>
  using **std::__ummap_hashtable** = _Hashtable< _Key, std::pair< const _Key, _Tp >, _Alloc, __detail::_Select1st, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using std::__ummap_traits = __detail::_Hashtable_traits< _Cache, false, false >

Functions

- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **std::operator!=** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **std::operator!=** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **std::operator==** (const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  bool **std::operator==** (const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, const unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y)
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  void **std::swap** (unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<class _Key , class _Tp , class _Hash , class _Pred , class _Alloc >
  void **std::swap** (unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__x, unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))

5.651.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <unordered_map>.

Definition in file unordered_map.h.

5.652 unordered_set File Reference

Macros

- #define **_GLIBCXX_UNORDERED_SET**

5.652.1 Detailed Description

This is a Standard C++ Library header.

Definition in file unordered_set.

5.653 unordered_set File Reference

Classes

- class std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_multiset< _Key, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator >
- class std::__debug::unordered_set< _Key, _Hash, _Pred, _Allocator >

Namespaces

- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_UNORDERED_SET**

Functions

- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator!=** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator!=** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator==** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  bool **std::__debug::operator==** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  void **std::__debug::swap** (unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, unordered_set< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<typename _Value , typename _Hash , typename _Pred , typename _Alloc >
  void **std::__debug::swap** (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))

5.653.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/unordered_set.

5.654 unordered_set File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_UNORDERED_SET**

Typedefs

- template<typename _Key , typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>>
  using **std::experimental::fundamentals_v2::pmr::unordered_multiset** = std::unordered_multiset< _Key, _Hash, _Pred, polymorphic_allocator< _Key >>
- template<typename _Key , typename _Hash = hash<_Key>, typename _Pred = equal_to<_Key>>
  using **std::experimental::fundamentals_v2::pmr::unordered_set** = std::unordered_set< _Key, _Hash, _Pred, polymorphic_allocator< _Key >>

Functions

- template<typename _Key , typename _Hash , typename _CPred , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (unordered_set< _Key, _Hash, _CPred, _Alloc > &__cont, _Predicate __pred)
- template<typename _Key , typename _Hash , typename _CPred , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (unordered_multiset< _Key, _Hash, _CPred, _Alloc > &__cont, _Predicate __pred)

5.654.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/unordered_set.

5.655 unordered_set.h File Reference

Classes

- class std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >
- class std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >
- class std::unordered_set< _Value, _Hash, _Pred, _Alloc >

Namespaces

- std

Typedefs

- template<typename _Value , typename _Hash = hash<_Value>, typename _Pred = std::equal_to<_Value>, typename _Alloc = std::allocator<_Value>, typename _Tr = __umset_traits<__cache_default<_Value, _Hash>::value>>
  using **std::__umset_hashtable** = _Hashtable< _Value, _Value, _Alloc, __detail::_Identity, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using std::__umset_traits = __detail::_Hashtable_traits< _Cache, true, false >

- template<typename _Value , typename _Hash = hash<_Value>, typename _Pred = std::equal_to<_Value>, typename _Alloc = std::allocator<_Value>, typename _Tr = __uset_traits<__cache_default<_Value, _Hash>::value>>
  using **std::__uset_hashtable** = _Hashtable< _Value, _Value, _Alloc, __detail::_Identity, _Pred, _Hash, __detail::_Mod_range_hashing, __detail::_Default_ranged_hash, __detail::_Prime_rehash_policy, _Tr >
- template<bool _Cache>
  using std::__uset_traits = __detail::_Hashtable_traits< _Cache, true, true >

Functions

- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **std::operator!=** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **std::operator!=** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **std::operator==** (const unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_set< _Value, _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  bool **std::operator==** (const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, const unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y)
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  void **std::swap** (unordered_set< _Value, _Hash, _Pred, _Alloc > &__x, unordered_set< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))
- template<class _Value , class _Hash , class _Pred , class _Alloc >
  void **std::swap** (unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__x, unordered_multiset< _Value, _Hash, _Pred, _Alloc > &__y) noexcept(noexcept(__x.swap(__y)))

5.655.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <unordered_set>.

Definition in file unordered_set.h.

5.656 update_fn_imps.hpp File Reference

5.656.1 Detailed Description

Contains an implementation class for pat_trie_.

Definition in file update_fn_imps.hpp.

5.657 utility File Reference

Classes

- struct std::__is_tuple_like_impl< std::pair< _T1, _T2 > >
- struct std::integer_sequence< _Tp, _Idx >
- struct std::tuple_element< _Int, _Tp >
- struct std::tuple_element< 0, std::pair< _Tp1, _Tp2 > >

- struct std::tuple_element< 1, std::pair< _Tp1, _Tp2 > >
- struct std::tuple_size< _Tp >
- struct std::tuple_size< std::pair< _Tp1, _Tp2 > >

Namespaces

- std

Macros

- #define **__cpp_lib_exchange_function**
- #define **__cpp_lib_integer_sequence**
- #define **__cpp_lib_tuple_element_t**
- #define **__cpp_lib_tuples_by_type**
- #define **_GLIBCXX_UTILITY**

Typedefs

- template<typename _Tp , typename _Up = typename remove_cv<_Tp>::type, typename = typename enable_if<is_same<_Tp, _Up>::value>::type, size_t = tuple_size<_Tp>::value>
  using **std::__enable_if_has_tuple_size** = _Tp
- template<std::size_t __i, typename _Tp >
  using **std::__tuple_element_t** = typename tuple_element< __i, _Tp >::type
- template<size_t... _Idx>
  using std::index_sequence = integer_sequence< size_t, _Idx...>
- template<typename... _Types>
  using std::index_sequence_for = make_index_sequence< sizeof...(_Types)>
- template<size_t _Num>
  using std::make_index_sequence = make_integer_sequence< size_t, _Num >
- template<typename _Tp , _Tp _Num>
  using std::make_integer_sequence = integer_sequence< _Tp, __integer_pack(_Num)...>
- template<std::size_t __i, typename _Tp >
  using **std::tuple_element_t** = typename tuple_element< __i, _Tp >::type

Functions

- template<typename _Tp , typename _Up = _Tp>
  constexpr _Tp std::exchange (_Tp &__obj, _Up &&__new_val)
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr tuple_element< _Int, std::pair< _Tp1, _Tp2 > >::type & **std::get** (std::pair< _Tp1, _Tp2 > &__in) noexcept
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr tuple_element< _Int, std::pair< _Tp1, _Tp2 > >::type && **std::get** (std::pair< _Tp1, _Tp2 > &&__in) noexcept
- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr const tuple_element < _Int, std::pair< _Tp1, _Tp2 > >::type & **std::get** (const std::pair< _Tp1, _Tp2 > &__in) noexcept

- template<std::size_t _Int, class _Tp1 , class _Tp2 >
  constexpr const tuple_element
  < _Int, std::pair< _Tp1, _Tp2 >
  >::type && **std::get** (const std::pair< _Tp1, _Tp2 > &&__in) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp & **std::get** (pair< _Tp, _Up > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp & **std::get** (const pair< _Tp, _Up > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp && **std::get** (pair< _Tp, _Up > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp && **std::get** (const pair< _Tp, _Up > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp & **std::get** (pair< _Up, _Tp > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp & **std::get** (const pair< _Up, _Tp > &__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr _Tp && **std::get** (pair< _Up, _Tp > &&__p) noexcept
- template<typename _Tp , typename _Up >
  constexpr const _Tp && **std::get** (const pair< _Up, _Tp > &&__p) noexcept

5.657.1 Detailed Description

This is a Standard C++ Library header.

Definition in file utility.

5.658 utility File Reference

Namespaces

- std
- std::experimental

Macros

- #define **_GLIBCXX_EXPERIMENTAL_UTILITY**

Typedefs

- using **std::experimental::fundamentals_v2::erased_type** = std::__erased_type

5.658.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/utility.

5.659 valarray File Reference

Classes

- class std::gslice_array< _Tp >
- class std::indirect_array< _Tp >
- class std::mask_array< _Tp >
- class std::slice_array< _Tp >
- class std::valarray< _Tp >
- class std::valarray< _Tp >

Namespaces

- std
- std::__detail

Macros

- #define **_DEFINE_BINARY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_VALARRAY_AUGMENTED_ASSIGNMENT**(_Op, _Name)
- #define **_DEFINE_VALARRAY_EXPR_AUGMENTED_ASSIGNMENT**(_Op, _Name)
- #define **_DEFINE_VALARRAY_UNARY_OPERATOR**(_Op, _Name)
- #define **_GLIBCXX_VALARRAY**

Functions

- template<class _Tp >
  _Tp * std::begin (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::begin (const valarray< _Tp > &__va)
- template<class _Tp >
  _Tp * std::end (valarray< _Tp > &__va)
- template<class _Tp >
  const _Tp * std::end (const valarray< _Tp > &__va)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _Constant, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _Constant,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- template<typename _Tp >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __not_equal_to, _Tp >
  ::result_type > **std::operator!=** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __modulus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __modulus,
  _Tp >::result_type > **std::operator%** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &_-
  _v)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_and,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_and, _Tp >
  ::result_type > **std::operator&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __logical_and,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __logical_and, _Tp >
  ::result_type > **std::operator&&** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >

_Expr< _BinClos< __logical_and,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun
< __logical_and, _Tp >
::result_type > **std::operator&&** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
&__v)

- template<typename _Tp >
_Expr< _BinClos< __logical_and,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun
< __logical_and, _Tp >
::result_type > **std::operator&&** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __multiplies,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __multiplies,
_Tp >::result_type > **std::operator*** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
type &__t)
- template<typename _Tp >
_Expr< _BinClos< __multiplies,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __multiplies,
_Tp >::result_type > **std::operator*** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
> &__v)
- template<typename _Tp >
_Expr< _BinClos< __multiplies,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __multiplies,
_Tp >::result_type > **std::operator*** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __plus,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __plus, _Tp >
::result_type > **std::operator+** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
_Expr< _BinClos< __plus,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __plus, _Tp >
::result_type > **std::operator+** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __plus,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __plus, _Tp >
::result_type > **std::operator+** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
_Expr< _BinClos< __minus,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __minus, _Tp >
::result_type > **std::operator-** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
_Expr< _BinClos< __minus,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __minus, _Tp >
::result_type > **std::operator-** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
  _Expr< _BinClos< __minus,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __minus, _Tp >
  ::result_type > **std::operator-** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __divides,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __divides,
  _Tp >::result_type > **std::operator/** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __less,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __less, _Tp >
  ::result_type > **std::operator**< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __shift_left,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __shift_left,
  _Tp >::result_type > **std::operator**<< (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __shift_left,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __shift_left,
  _Tp >::result_type > **std::operator**<< (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >

_Expr< _BinClos< __shift_left,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __shift_left,
_Tp >::result_type > **std::operator**<< (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
_Expr< _BinClos< __less_equal,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __less_equal,
_Tp >::result_type > **std::operator**<= (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
_Expr< _BinClos< __less_equal,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __less_equal,
_Tp >::result_type > **std::operator**<= (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
_Expr< _BinClos< __less_equal,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __less_equal,
_Tp >::result_type > **std::operator**<= (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- template<typename _Tp >
_Expr< _BinClos< __equal_to,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __equal_to,
_Tp >::result_type > **std::operator==** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >
_Expr< _BinClos< __equal_to,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __equal_to,
_Tp >::result_type > **std::operator==** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
_Expr< _BinClos< __equal_to,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __equal_to,
_Tp >::result_type > **std::operator==** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)

- template<typename _Tp >
_Expr< _BinClos< __greater,
_ValArray, _Constant, _Tp, _Tp >
, typename __fun< __greater,
_Tp >::result_type > **std::operator**> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
_Expr< _BinClos< __greater,
_ValArray, _ValArray, _Tp, _Tp >
, typename __fun< __greater,
_Tp >::result_type > **std::operator**> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)

- template<typename _Tp >

_Expr< _BinClos< __greater,
_Constant, _ValArray, _Tp, _Tp >
, typename __fun< __greater,
_Tp >::result_type > **std::operator**> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
> &__v)

- template<typename _Tp >
  _Expr< _BinClos
  < __greater_equal, _ValArray,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __greater_equal, _Tp >
  ::result_type > **std::operator**>= (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos
  < __greater_equal, _Constant,
  _ValArray, _Tp, _Tp >
  , typename __fun
  < __greater_equal, _Tp >
  ::result_type > **std::operator**>= (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos
  < __greater_equal, _ValArray,
  _Constant, _Tp, _Tp >
  , typename __fun
  < __greater_equal, _Tp >
  ::result_type > **std::operator**>= (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp >
  &__v)
- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __shift_right,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __shift_right, _Tp >
  ::result_type > **std::operator**>> (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **std::operator**^ (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)

- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **std::operator^** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &_-
  _v)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_xor,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun
  < __bitwise_xor, _Tp >
  ::result_type > **std::operator^** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **std::operator|** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **std::operator|** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type
  &__t)
- template<typename _Tp >
  _Expr< _BinClos< __bitwise_or,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __bitwise_or,
  _Tp >::result_type > **std::operator|** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _ValArray, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _ValArray, _Constant, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_-
  type &__t)
- template<typename _Tp >
  _Expr< _BinClos< __logical_or,
  _Constant, _ValArray, _Tp, _Tp >
  , typename __fun< __logical_or,
  _Tp >::result_type > **std::operator||** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp
  > &__v)

5.659.1 Detailed Description

This is a Standard C++ Library header.

Definition in file valarray.

5.660 valarray_after.h File Reference

Namespaces

- std
- std::__detail

Macros

- #define **_DEFINE_EXPR_BINARY_FUNCTION**(_Fun, _UFun)
- #define **_DEFINE_EXPR_BINARY_OPERATOR**(_Op, _Name)
- #define **_DEFINE_EXPR_UNARY_FUNCTION**(_Name, _UName)
- #define **_DEFINE_EXPR_UNARY_OPERATOR**(_Op, _Name)

Functions

- template<class _Dom >
  _Expr< _UnClos< _Abs, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::abs** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Abs,
  _ValArray, _Tp >, _Tp > **std::abs** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Acos, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::acos** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Acos,
  _ValArray, _Tp >, _Tp > **std::acos** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Asin, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::asin** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Asin,
  _ValArray, _Tp >, _Tp > **std::asin** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Atan, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::atan** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Atan,
  _ValArray, _Tp >, _Tp > **std::atan** (const valarray< _Tp > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< _Atan2, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename _Dom1::value_type > **std::atan2** (const _Expr< _Dom1, typename _Dom1::value_type > &__e1,
  const _Expr< _Dom2, typename _Dom2::value_type > &__e2)

- template<class _Dom >
  _Expr< _BinClos< _Atan2, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **std::atan2** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< _Atan2,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **std::atan2** (const valarray< typename _Dom::valarray > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< _Atan2, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **std::atan2** (const _Expr< _Dom, typename _Dom::value_type > &__e, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< _Atan2,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **std::atan2** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _ValArray, _ValArray, _Tp, _Tp >
  , _Tp > **std::atan2** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _ValArray, _Constant, _Tp, _Tp >
  , _Tp > **std::atan2** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< _Atan2,
  _Constant, _ValArray, _Tp, _Tp >
  , _Tp > **std::atan2** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Cos, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::cos** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Cos,
  _ValArray, _Tp >, _Tp > **std::cos** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Cosh, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::cosh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Cosh,
  _ValArray, _Tp >, _Tp > **std::cosh** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Exp, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::exp** (const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<typename _Tp >
  _Expr< _UnClos< _Exp,
  _ValArray, _Tp >, _Tp > **std::exp** (const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _UnClos< _Log,
  _ValArray, _Tp >, _Tp > **std::log** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Log, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::log** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _UnClos< _Log10, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::log10** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Log10,
  _ValArray, _Tp >, _Tp > **std::log10** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Constant,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __not_equal_to, typename
  _Dom::value_type >
  ::result_type > **std::operator!=** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  __fun< __not_equal_to,
  typename _Dom::value_type >
  ::result_type > **std::operator!=** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<
  typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _ValArray,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __not_equal_to, typename
  _Dom::value_type >
  ::result_type > **std::operator!=** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom,
  typename _Dom::value_type > &__e)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos
  < __not_equal_to, _Expr, _Expr,
  _Dom1, _Dom2 >, typename __fun
  < __not_equal_to, typename
  _Dom1::value_type >
  ::result_type > **std::operator!=** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos
  < __not_equal_to, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  __fun< __not_equal_to,
  typename _Dom::value_type >
  ::result_type > **std::operator!=** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **std::operator%** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __modulus,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __modulus,
  typename _Dom1::value_type >
  ::result_type > **std::operator%** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **std::operator%** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **std::operator%** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __modulus,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __modulus,
  typename _Dom::value_type >
  ::result_type > **std::operator%** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom >

_Expr< _BinClos< __bitwise_and,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun
< __bitwise_and, typename
_Dom::value_type >
::result_type > **std::operator&** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom >
_Expr< _BinClos< __bitwise_and,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __bitwise_and, typename
_Dom::value_type >
::result_type > **std::operator&** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)

- template<class _Dom >
_Expr< _BinClos< __bitwise_and,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun
< __bitwise_and, typename
_Dom::value_type >
::result_type > **std::operator&** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom >
_Expr< _BinClos< __bitwise_and,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __bitwise_and, typename
_Dom::value_type >
::result_type > **std::operator&** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __bitwise_and,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun
< __bitwise_and, typename
_Dom1::value_type >
::result_type > **std::operator&** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __logical_and,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun
< __logical_and, typename
_Dom1::value_type >
::result_type > **std::operator&&** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >

_Expr< _BinClos< __logical_and,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **std::operator&&** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _-Dom::value_type > &__v)

- template<class _Dom >
_Expr< _BinClos< __logical_and,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **std::operator&&** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom >
_Expr< _BinClos< __logical_and,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **std::operator&&** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom >
_Expr< _BinClos< __logical_and,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun
< __logical_and, typename
_Dom::value_type >
::result_type > **std::operator&&** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __multiplies,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun< __multiplies,
typename _Dom1::value_type >
::result_type > **std::operator*** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
_Expr< _BinClos< __multiplies,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun< __multiplies,
typename _Dom::value_type >
::result_type > **std::operator*** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _-Dom::value_type &__t)

- template<class _Dom >

_Expr< _BinClos< __multiplies, _Constant, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __multiplies, typename _Dom::value_type > ::result_type > **std::operator*** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)

- template<class _Dom > _Expr< _BinClos< __multiplies, _Expr, _ValArray, _Dom, typename _Dom::value_type > , typename __fun< __multiplies, typename _Dom::value_type > ::result_type > **std::operator*** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom > _Expr< _BinClos< __multiplies, _ValArray, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __multiplies, typename _Dom::value_type > ::result_type > **std::operator*** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom > _Expr< _BinClos< __plus, _Expr, _ValArray, _Dom, typename _Dom::value_type >, typename __fun< __plus, typename _Dom::value_type > ::result_type > **std::operator+** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom > _Expr< _BinClos< __plus, _Expr, _Constant, _Dom, typename _Dom::value_type >, typename __fun< __plus, typename _Dom::value_type > ::result_type > **std::operator+** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom > _Expr< _BinClos< __plus, _ValArray, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __plus, typename _Dom::value_type > ::result_type > **std::operator+** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom1 , class _Dom2 > _Expr< _BinClos< __plus, _Expr, _Expr, _Dom1, _Dom2 > , typename __fun< __plus, typename _Dom1::value_type > ::result_type > **std::operator+** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __plus,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __plus,
  typename _Dom::value_type >
  ::result_type > **std::operator+** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __minus,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __minus,
  typename _Dom::value_type >
  ::result_type > **std::operator-** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __minus,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __minus,
  typename _Dom::value_type >
  ::result_type > **std::operator-** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __minus,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __minus,
  typename _Dom::value_type >
  ::result_type > **std::operator-** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-
  name _Dom::value_type > &__e)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __minus,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __minus,
  typename _Dom1::value_type >
  ::result_type > **std::operator-** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _-
  Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __minus,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __minus,
  typename _Dom::value_type >
  ::result_type > **std::operator-** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _-
  Dom::value_type &__t)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __divides,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __divides,
  typename _Dom1::value_type >
  ::result_type > **std::operator/** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _-
  Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **std::operator/** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _-
  Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **std::operator/** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **std::operator/** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
  name _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __divides,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __divides,
  typename _Dom::value_type >
  ::result_type > **std::operator/** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-
  name _Dom::value_type > &__e)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __less, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename __fun< __less,
  typename _Dom1::value_type >
  ::result_type > **std::operator<** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __less, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  __fun< __less, typename
  _Dom::value_type >
  ::result_type > **std::operator<** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename
  _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __less,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __less,
  typename _Dom::value_type >
  ::result_type > **std::operator<** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-

::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __less, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  __fun< __less, typename
  _Dom::value_type >
  ::result_type > **std::operator**< (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<
  typename _Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __less,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __less,
  typename _Dom::value_type >
  ::result_type > **std::operator**< (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom,
  typename _Dom::value_type > &__e)

- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __shift_left,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __shift_left,
  typename _Dom1::value_type >
  ::result_type > **std::operator**<< (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **std::operator**<< (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename
  _Dom::value_type &__t)

- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **std::operator**<< (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _-
  Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __shift_left,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __shift_left,
  typename _Dom::value_type >
  ::result_type > **std::operator**<< (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<
  typename _Dom::value_type > &__v)

- template<class _Dom >

_Expr< _BinClos< __shift_left, _ValArray, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __shift_left, typename _Dom::value_type > ::result_type > **std::operator<<** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom1 , class _Dom2 > _Expr< _BinClos< __less_equal, _Expr, _Expr, _Dom1, _Dom2 > , typename __fun< __less_equal, typename _Dom1::value_type > ::result_type > **std::operator<=** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom > _Expr< _BinClos< __less_equal, _Expr, _Constant, _Dom, typename _Dom::value_type > , typename __fun< __less_equal, typename _Dom::value_type > ::result_type > **std::operator<=** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom > _Expr< _BinClos< __less_equal, _Expr, _ValArray, _Dom, typename _Dom::value_type > , typename __fun< __less_equal, typename _Dom::value_type > ::result_type > **std::operator<=** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom > _Expr< _BinClos< __less_equal, _Constant, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __less_equal, typename _Dom::value_type > ::result_type > **std::operator<=** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom > _Expr< _BinClos< __less_equal, _ValArray, _Expr, typename _Dom::value_type, _Dom > , typename __fun< __less_equal, typename _Dom::value_type > ::result_type > **std::operator<=** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom > _Expr< _BinClos< __equal_to, _Expr, _ValArray, _Dom, typename _Dom::value_type > , typename __fun< __equal_to, typename _Dom::value_type > ::result_type > **std::operator==** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **std::operator==** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **std::operator==** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __equal_to,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __equal_to,
  typename _Dom1::value_type >
  ::result_type > **std::operator==** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __equal_to,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __equal_to,
  typename _Dom::value_type >
  ::result_type > **std::operator==** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **std::operator**> (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **std::operator**> (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **std::operator**> (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom,

typename _Dom::value_type > &__e)

- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __greater,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __greater,
  typename _Dom1::value_type >
  ::result_type > **std::operator**> (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __greater,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __greater,
  typename _Dom::value_type >
  ::result_type > **std::operator**> (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  __fun< __greater_equal,
  typename _Dom::value_type >
  ::result_type > **std::operator**>= (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<
  typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _Constant,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __greater_equal, typename
  _Dom::value_type >
  ::result_type > **std::operator**>= (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _-
  Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _ValArray,
  _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __greater_equal, typename
  _Dom::value_type >
  ::result_type > **std::operator**>= (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom,
  typename _Dom::value_type > &__e)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos
  < __greater_equal, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename __fun
  < __greater_equal, typename
  _Dom1::value_type >
  ::result_type > **std::operator**>= (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
  _Expr< _BinClos
  < __greater_equal, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  __fun< __greater_equal,
  typename _Dom::value_type >
  ::result_type > **std::operator>=** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __shift_right,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun
  < __shift_right, typename
  _Dom1::value_type >
  ::result_type > **std::operator>>** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< __shift_right,
  _Expr, _Constant, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __shift_right, typename
  _Dom::value_type >
  ::result_type > **std::operator>>** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< __shift_right,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __shift_right, typename
  _Dom::value_type >
  ::result_type > **std::operator>>** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __shift_right,
  _Expr, _ValArray, _Dom,
  typename _Dom::value_type >
  , typename __fun
  < __shift_right, typename
  _Dom::value_type >
  ::result_type > **std::operator>>** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)
- template<class _Dom >
  _Expr< _BinClos< __shift_right,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun
  < __shift_right, typename
  _Dom::value_type >
  ::result_type > **std::operator>>** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >

_Expr< _BinClos< __bitwise_xor,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __bitwise_xor, typename
_Dom::value_type >
::result_type > **std::operator^** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, typename _Dom::value_type > &__e)

- template<class _Dom >
_Expr< _BinClos< __bitwise_xor,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun
< __bitwise_xor, typename
_Dom::value_type >
::result_type > **std::operator^** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< typename _Dom::value_type > &__v)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __bitwise_xor,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun
< __bitwise_xor, typename
_Dom1::value_type >
::result_type > **std::operator^** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >
_Expr< _BinClos< __bitwise_xor,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun
< __bitwise_xor, typename
_Dom::value_type >
::result_type > **std::operator^** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _Dom::value_type &__t)

- template<class _Dom >
_Expr< _BinClos< __bitwise_xor,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun
< __bitwise_xor, typename
_Dom::value_type >
::result_type > **std::operator^** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom::value_type > &__v)

- template<class _Dom1 , class _Dom2 >
_Expr< _BinClos< __bitwise_or,
_Expr, _Expr, _Dom1, _Dom2 >
, typename __fun< __bitwise_or,
typename _Dom1::value_type >
::result_type > **std::operator|** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr< _Dom2, typename _Dom2::value_type > &__w)

- template<class _Dom >

_Expr< _BinClos< __bitwise_or,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun< __bitwise_or,
typename _Dom::value_type >
::result_type > **std::operator|** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _-
Dom::value_type &__t)

- template<class _Dom >
_Expr< _BinClos< __bitwise_or,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun< __bitwise_or,
typename _Dom::value_type >
::result_type > **std::operator|** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray< type-
name _Dom::value_type > &__v)
- template<class _Dom >
_Expr< _BinClos< __bitwise_or,
_Constant, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun< __bitwise_or,
typename _Dom::value_type >
::result_type > **std::operator|** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
::value_type > &__v)
- template<class _Dom >
_Expr< _BinClos< __bitwise_or,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun< __bitwise_or,
typename _Dom::value_type >
::result_type > **std::operator|** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom, type-
name _Dom::value_type > &__e)
- template<class _Dom >
_Expr< _BinClos< __logical_or,
_ValArray, _Expr, typename
_Dom::value_type, _Dom >
, typename __fun< __logical_or,
typename _Dom::value_type >
::result_type > **std::operator||** (const valarray< typename _Dom::value_type > &__v, const _Expr< _Dom,
typename _Dom::value_type > &__e)
- template<class _Dom >
_Expr< _BinClos< __logical_or,
_Expr, _Constant, _Dom,
typename _Dom::value_type >
, typename __fun< __logical_or,
typename _Dom::value_type >
::result_type > **std::operator||** (const _Expr< _Dom, typename _Dom::value_type > &__v, const typename _-
Dom::value_type &__t)
- template<class _Dom >
_Expr< _BinClos< __logical_or,
_Expr, _ValArray, _Dom,
typename _Dom::value_type >
, typename __fun< __logical_or,
typename _Dom::value_type >
::result_type > **std::operator||** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<

typename _Dom::value_type > &__v)

- template<class _Dom >
  _Expr< _BinClos< __logical_or,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename __fun< __logical_or,
  typename _Dom::value_type >
  ::result_type > **std::operator||** (const typename _Dom::value_type &__t, const _Expr< _Dom, typename _Dom-
  ::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< __logical_or,
  _Expr, _Expr, _Dom1, _Dom2 >
  , typename __fun< __logical_or,
  typename _Dom1::value_type >
  ::result_type > **std::operator||** (const _Expr< _Dom1, typename _Dom1::value_type > &__v, const _Expr<
  _Dom2, typename _Dom2::value_type > &__w)
- template<class _Dom >
  _Expr< _BinClos< _Pow,
  _ValArray, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **std::pow** (const valarray< typename _Dom::valarray > &__v, const _Expr<
  _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _BinClos< _Pow,
  _Constant, _Expr, typename
  _Dom::value_type, _Dom >
  , typename _Dom::value_type > **std::pow** (const typename _Dom::value_type &__t, const _Expr< _Dom, type-
  name _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _ValArray, _Constant, _Tp, _Tp >
  , _Tp > **std::pow** (const valarray< _Tp > &__v, const typename valarray< _Tp >::value_type &__t)
- template<class _Dom >
  _Expr< _BinClos< _Pow, _Expr,
  _Constant, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **std::pow** (const _Expr< _Dom, typename _Dom::value_type > &__e, const typename
  _Dom::value_type &__t)
- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _ValArray, _ValArray, _Tp, _Tp >
  , _Tp > **std::pow** (const valarray< _Tp > &__v, const valarray< _Tp > &__w)
- template<class _Dom >
  _Expr< _BinClos< _Pow, _Expr,
  _ValArray, _Dom, typename
  _Dom::value_type >, typename
  _Dom::value_type > **std::pow** (const _Expr< _Dom, typename _Dom::value_type > &__e, const valarray<
  typename _Dom::value_type > &__v)
- template<class _Dom1 , class _Dom2 >
  _Expr< _BinClos< _Pow, _Expr,
  _Expr, _Dom1, _Dom2 >
  , typename _Dom1::value_type > **std::pow** (const _Expr< _Dom1, typename _Dom1::value_type > &__e1,
  const _Expr< _Dom2, typename _Dom2::value_type > &__e2)

- template<typename _Tp >
  _Expr< _BinClos< _Pow,
  _Constant, _ValArray, _Tp, _Tp >
  , _Tp > **std::pow** (const typename valarray< _Tp >::value_type &__t, const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Sin, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::sin** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Sin,
  _ValArray, _Tp >, _Tp > **std::sin** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Sinh, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::sinh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Sinh,
  _ValArray, _Tp >, _Tp > **std::sinh** (const valarray< _Tp > &__v)
- template<typename _Tp >
  _Expr< _UnClos< _Sqrt,
  _ValArray, _Tp >, _Tp > **std::sqrt** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Sqrt, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::sqrt** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Tan,
  _ValArray, _Tp >, _Tp > **std::tan** (const valarray< _Tp > &__v)
- template<class _Dom >
  _Expr< _UnClos< _Tan, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::tan** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<class _Dom >
  _Expr< _UnClos< _Tanh, _Expr,
  _Dom >, typename
  _Dom::value_type > **std::tanh** (const _Expr< _Dom, typename _Dom::value_type > &__e)
- template<typename _Tp >
  _Expr< _UnClos< _Tanh,
  _ValArray, _Tp >, _Tp > **std::tanh** (const valarray< _Tp > &__v)

5.660.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file valarray_after.h.

5.661 valarray_array.h File Reference

Namespaces

- std

Macros

- #define **_DEFINE_ARRAY_FUNCTION**(_Op, _Name)

Functions

- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, _Tp *__restrict__ __b)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, size_t __s, _Tp *__restrict__ __b)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __a, _Tp *__restrict__ __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __src, size_t __n, size_t __s1, _Tp *__restrict__ __dst, size_t __s2)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __a, const size_t *__restrict__ __i, _Tp *__restrict__ __b, size_t __n)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __a, size_t __n, _Tp *__restrict__ __b, const size_t *__restrict__ __i)
- template<typename _Tp >
  void **std::__valarray_copy** (const _Tp *__restrict__ __src, size_t __n, const size_t *__restrict__ __i, _Tp *__restrict__ __dst, const size_t *__restrict__ __j)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, size_t __n, size_t __s1, _Array< _Tp > __b, size_t __s2)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __src, size_t __n, _Array< size_t > __i, _Array< _Tp > __dst, _Array< size_t > __j)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (const _Tp *__b, const _Tp *__e, _Tp *__restrict__ __o)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (const _Tp *__restrict__ __a, size_t __n, size_t __s, _Tp *__restrict__ __o)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (const _Tp *__restrict__ __a, const size_t *__restrict__ __i, _Tp *__restrict__ __o, size_t __n)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)

- template<typename _Tp >
  void **std::__valarray_default_construct** (_Tp *__b, _Tp *__e)
- template<typename _Tp >
  void **std::__valarray_destroy_elements** (_Tp *__b, _Tp *__e)
- template<typename _Tp >
  void **std::__valarray_fill** (_Tp *__restrict__ __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill** (_Tp *__restrict__ __a, size_t __n, size_t __s, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill** (_Tp *__restrict__ __a, const size_t *__restrict__ __i, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill** (_Array< _Tp > __a, size_t __n, size_t __s, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill** (_Array< _Tp > __a, _Array< size_t > __i, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::__valarray_fill_construct** (_Tp *__b, _Tp *__e, const _Tp __t)
- template<typename _Tp >
  _Tp * **std::__valarray_get_storage** (size_t)
- template<typename _Ta >
  _Ta::value_type **std::__valarray_max** (const _Ta &__a)
- template<typename _Ta >
  _Ta::value_type **std::__valarray_min** (const _Ta &__a)
- void **std::__valarray_release_memory** (void *__p)
- template<typename _Tp >
  _Tp **std::__valarray_sum** (const _Tp *__f, const _Tp *__l)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)

- template<typename _Tp >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_and** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_or** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)

- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___bitwise_xor** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___divides** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)

- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___minus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)

- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___modulus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___multiplies** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)

- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___plus** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)
- template<typename _Tp >
  void **std::_Array_augmented___shift_left** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< _Tp > __b, size_t __n, size_t __s)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)

- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< size_t > __i, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< bool > __m, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, const _Tp &__t)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, _Array< size_t > __i, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __s, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp , class _Dom >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, const _Expr< _Dom, _Tp > &__e, size_t __n)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, size_t __s, _Array< _Tp > __b)
- template<typename _Tp >
  void **std::_Array_augmented___shift_right** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< size_t > __i)

5.661.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file valarray_array.h.

5.662 valarray_array.tcc File Reference

Namespaces

- std

Macros

- #define **_VALARRAY_ARRAY_TCC**

Functions

- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, size_t __n, _Array< _Tp > __b, _Array< bool > __m)

- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __a, _Array< bool > __m, size_t __n, _Array< _Tp > __b, _Array< bool > __k)
- template<typename _Tp , class _Dom >
  void **std::__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a)
- template<typename _Tp , class _Dom >
  void **std::__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, size_t __s)
- template<typename _Tp , class _Dom >
  void **std::__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, _Array< size_t > __i)
- template<typename _Tp >
  void **std::__valarray_copy** (_Array< _Tp > __e, _Array< size_t > __f, size_t __n, _Array< _Tp > __a, _Array< size_t > __i)
- template<typename _Tp , class _Dom >
  void **std::__valarray_copy** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a, _Array< bool > __m)
- template<typename _Tp , class _Dom >
  void **std::__valarray_copy_construct** (const _Expr< _Dom, _Tp > &__e, size_t __n, _Array< _Tp > __a)
- template<typename _Tp >
  void **std::__valarray_copy_construct** (_Array< _Tp > __a, _Array< bool > __m, _Array< _Tp > __b, size_t __n)
- template<typename _Tp >
  void **std::__valarray_fill** (_Array< _Tp > __a, size_t __n, _Array< bool > __m, const _Tp &__t)

5.662.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file valarray_array.tcc.

5.663 valarray_before.h File Reference

Namespaces

- std
- std::__detail

5.663.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <valarray>.

Definition in file valarray_before.h.

5.664 variant File Reference

Macros

- #define **_GLIBCXX_VARIANT**

5.664.1 Detailed Description

This is the <variant> C++ Library header.

Definition in file variant.

5.665 vector File Reference

Macros

- #define **_GLIBCXX_VECTOR**

5.665.1 Detailed Description

This is a Standard C++ Library header.

Definition in file vector.

5.666 vector File Reference

Classes

- class __gnu_debug::_Safe_vector< _SafeSequence, _BaseSequence >
- struct std::hash< __debug::vector< bool, _Alloc > >
- class std::__debug::vector< _Tp, _Allocator >
- class std::__debug::vector< _Tp, _Allocator >

Namespaces

- __gnu_debug
- std
- std::__debug

Macros

- #define **_GLIBCXX_DEBUG_VECTOR**

Functions

- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator!=** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator<=** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator==** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)

- template<typename _Tp , typename _Alloc >
  bool **std::__debug::operator>=** (const vector< _Tp, _Alloc > &__lhs, const vector< _Tp, _Alloc > &__rhs)
- template<typename _Tp , typename _Alloc >
  void **std::__debug::swap** (vector< _Tp, _Alloc > &__lhs, vector< _Tp, _Alloc > &__rhs) noexcept(/*conditional */)

5.666.1 Detailed Description

This file is a GNU debug extension to the Standard C++ Library.

Definition in file debug/vector.

5.667 vector File Reference

Namespaces

- std
- std::experimental

Macros

- #define **__cpp_lib_experimental_erase_if**
- #define **_GLIBCXX_EXPERIMENTAL_VECTOR**

Typedefs

- template<typename _Tp >
  using **std::experimental::fundamentals_v2::pmr::vector** = std::vector< _Tp, polymorphic_allocator< _Tp >>

Functions

- template<typename _Tp , typename _Alloc , typename _Up >
  void **std::experimental::fundamentals_v2::erase** (vector< _Tp, _Alloc > &__cont, const _Up &__value)
- template<typename _Tp , typename _Alloc , typename _Predicate >
  void **std::experimental::fundamentals_v2::erase_if** (vector< _Tp, _Alloc > &__cont, _Predicate __pred)

5.667.1 Detailed Description

This is a TS C++ Library header.

Definition in file experimental/vector.

5.668 vector.tcc File Reference

Namespaces

- std

Macros

- #define **_VECTOR_TCC**

5.668.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <vector>.

Definition in file vector.tcc.

5.669 vstring.h File Reference

Classes

- class __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >
- struct std::hash< __gnu_cxx::__u16vstring >
- struct std::hash< __gnu_cxx::__u32vstring >
- struct std::hash< __gnu_cxx::__vstring >
- struct std::hash< __gnu_cxx::__wvstring >

Namespaces

- __gnu_cxx
- std

Functions

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool __gnu_cxx::operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool __gnu_cxx::operator!= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  bool __gnu_cxx::operator!= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base>
  __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (_CharT __lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (const _CharT *__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (_CharT __lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &&__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > **__gnu_cxx::operator+** (__versa_string< _CharT, _Traits, _Alloc, _Base > &&__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator< (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_ostream< _CharT, _Traits > & std::operator<< (basic_ostream< _CharT, _Traits > &__os, const __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > &__str)

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator<= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , template< typename, typename, typename > class _Base> __enable_if< std::__is_char < _CharT >::__value, bool > ::__type **__gnu_cxx::operator==** (const __versa_string< _CharT, std::char_traits< _CharT >, std::allocator< _CharT >, _Base > &__lhs, const __versa_string< _CharT, std::char_traits< _CharT >, std::allocator< _CharT >, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator== (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator> (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator> (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>= (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> bool __gnu_cxx::operator>= (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base > &__str)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> void __gnu_cxx::swap (__versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)

5.669.1 Detailed Description

This file is a GNU extension to the Standard C++ Library.

Definition in file vstring.h.

5.670 vstring.tcc File Reference

Namespaces

- __gnu_cxx
- std

Macros

- #define **_VSTRING_TCC**

Functions

- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream< _CharT, _Traits > & std::getline (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__versa-_string< _CharT, _Traits, _Alloc, _Base > &__str, _CharT __delim)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const _CharT *__lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (_CharT __lhs, const __versa_string< _CharT, _Traits, _Alloc, _Base > &__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, const _CharT *__rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> __versa_string< _CharT, _Traits, _Alloc, _Base > __gnu_cxx::operator+ (const __versa_string< _CharT, _Traits, _Alloc, _Base > &__lhs, _CharT __rhs)
- template<typename _CharT , typename _Traits , typename _Alloc , template< typename, typename, typename > class _Base> basic_istream< _CharT, _Traits > & std::operator>> (basic_istream< _CharT, _Traits > &__is, __gnu_cxx::__-versa_string< _CharT, _Traits, _Alloc, _Base > &__str)

5.670.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/vstring.h>.

Definition in file vstring.tcc.

5.671 vstring_fwd.h File Reference

Classes

- class __gnu_cxx::__rc_string_base< _CharT, _Traits, _Alloc >

- class __gnu_cxx::__versa_string< _CharT, _Traits, _Alloc, _Base >

Namespaces

- __gnu_cxx

Typedefs

- typedef __versa_string< char, std::char_traits< char > , std::allocator< char > , __rc_string_base > **__gnu_cxx::__rc_string**
- typedef __vstring **__gnu_cxx::__sso_string**
- typedef __versa_string < char16_t, std::char_traits < char16_t >, std::allocator < char16_t >, __rc_string_base > **__gnu_cxx::__u16rc_string**
- typedef __u16vstring **__gnu_cxx::__u16sso_string**
- typedef __versa_string< char16_t > **__gnu_cxx::__u16vstring**
- typedef __versa_string < char32_t, std::char_traits < char32_t >, std::allocator < char32_t >, __rc_string_base > **__gnu_cxx::__u32rc_string**
- typedef __u32vstring **__gnu_cxx::__u32sso_string**
- typedef __versa_string< char32_t > **__gnu_cxx::__u32vstring**
- typedef __versa_string< char > **__gnu_cxx::__vstring**
- typedef __versa_string < wchar_t, std::char_traits < wchar_t >, std::allocator < wchar_t >, __rc_string_base > **__gnu_cxx::__wrc_string**
- typedef __wvstring **__gnu_cxx::__wsso_string**
- typedef __versa_string< wchar_t > **__gnu_cxx::__wvstring**

5.671.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/vstring.h>.

Definition in file vstring_fwd.h.

5.672 vstring_util.h File Reference

Namespaces

- __gnu_cxx

5.672.1 Detailed Description

This is an internal header file, included by other library headers. Do not attempt to use it directly. Instead, include <ext/vstring.h>.

Definition in file vstring_util.h.

5.673 workstealing.h File Reference

Classes

- struct __gnu_parallel::_Job< _DifferenceTp >

Namespaces

- __gnu_parallel

Macros

- #define **_GLIBCXX_JOB_VOLATILE**

Functions

- template<typename _RAIter , typename _Op , typename _Fu , typename _Red , typename _Result >
  _Op __gnu_parallel::__for_each_template_random_access_workstealing (_RAIter __begin, _RAIter __end, _Op __op, _Fu &__f, _Red __r, _Result __base, _Result &__output, typename std::iterator_traits< _RAIter >::difference_type __bound)

5.673.1 Detailed Description

Parallelization of embarrassingly parallel execution by means of work-stealing. Work stealing is described in

R. D. Blumofe and C. E. Leiserson. Scheduling multithreaded computations by work stealing. Journal of the ACM, 46(5):720-748, 1999.

This file is a GNU parallel extension to the Standard C++ Library.

Definition in file workstealing.h.

Index

~_LoserTreeBase
__gnu_parallel::_LoserTreeBase, 940
~_RestrictedBoundedConcurrentQueue
__gnu_parallel::_RestrictedBoundedConcurrent-Queue, 988
~_Safe_sequence_base
__gnu_debug::_Safe_sequence_base, 1030
~_Safe_unordered_container_base
__gnu_debug::_Safe_unordered_container_base, 1036
~__allocated_ptr
std::__allocated_ptr, 717
~__versa_string
__gnu_cxx::__versa_string, 802
~any
std::experimental::fundamentals_v1::any, 1077
~auto_ptr
std::auto_ptr, 1114
~basic_filebuf
std::basic_filebuf, 1136
~basic_fstream
std::basic_fstream, 1164
~basic_ifstream
std::basic_ifstream, 1220
~basic_ios
std::basic_ios, 1264
~basic_iostream
std::basic_iostream, 1293
~basic_istream
std::basic_istream, 1346
~basic_istringstream
std::basic_istringstream, 1389
~basic_ofstream
std::basic_ofstream, 1432
~basic_ostream
std::basic_ostream, 1466
~basic_ostringstream
std::basic_ostringstream, 1500
~basic_regex
std::basic_regex, 1530
~basic_streambuf
std::basic_streambuf, 1540
~basic_string
std::basic_string, 1586
~basic_stringstream
std::basic_stringstream, 1663
~collate
std::collate, 1825
~ctype
std::ctype< char >, 1884
std::ctype< wchar_t >, 1896
~deque
std::deque, 1952
~facet
std::locale::facet, 2045
~forward_list
std::forward_list, 2061
~gslice
Numeric Arrays, 215
~ios_base
std::ios_base, 2180
~list
std::list, 2287
~locale
std::locale, 2307
~map
std::map, 2339
~match_results
std::match_results, 2366
~messages
std::messages, 2384
~money_get
std::money_get, 2396
~money_put
std::money_put, 2400
~moneypunct
std::moneypunct, 2405
~multimap
std::multimap, 2431
~multiset
std::multiset, 2455
~num_get
std::num_get, 2495
~num_put
std::num_put, 2509
~numpunct
std::numpunct, 2544
~sentry
std::basic_ostream::sentry, 2738
~set
std::set, 2751
~stdio_filebuf
__gnu_cxx::stdio_filebuf, 2809
~temporary_buffer
__gnu_cxx::temporary_buffer, 2871
~time_get
std::time_get, 2887
~time_put
std::time_put, 2908
~type_info
std::type_info, 2966
~unique_ptr

std::unique_ptr, 2984
~vector
std::vector, 3103
__gnu_parallel
parallel_balanced, 423
parallel_omp_loop, 423
parallel_omp_loop_static, 423
parallel_taskqueue, 423
parallel_unbalanced, 423
sequential, 423
__gnu_pbds::cc_hash_max_collision_check_resize_trigger
external_load_access, 1770
__gnu_pbds::container_traits
erase_can_throw, 1864
order_preserving, 1864
reverse_iteration, 1864
split_join_can_throw, 1864
__gnu_pbds::hash_load_check_resize_trigger
external_load_access, 2145
__gnu_pbds::lu_counter_policy
max_count, 2323
_AlgorithmStrategy
__gnu_parallel, 423
_BinIndex
__gnu_parallel, 423
_Bit_scan_forward
__gnu_cxx, 394
_CASable
__gnu_parallel, 423
_CASable_bits
__gnu_parallel, 462
_CASable_mask
__gnu_parallel, 462
_Construct
std, 590
_DRandomShufflingGlobalData
__gnu_parallel::_DRandomShufflingGlobalData, 862
_Destroy
std, 591
_Destroy_n
std, 591
_Distance_precision
__gnu_debug, 412
_FindAlgorithm
__gnu_parallel, 423
_Find_first
SGI, 307
_Find_next
SGI, 307
_GLIBCXX_CALL
compiletime_settings.h, 3231
_GLIBCXX_MERGESORT
features.h, 3287
_GLIBCXX_QUICKSORT
features.h, 3287
_GLIBCXX_VOLATILE
partition.h, 3391
queue.h, 3405
_GuardedIterator
__gnu_parallel::_GuardedIterator, 882
_LoserTreeBase
__gnu_parallel::_LoserTreeBase, 940
_M_allocate_and_copy
std::vector, 3103
_M_allocate_single_object
__gnu_cxx::bitmap_allocator, 1750
_M_attach
__gnu_debug::_Safe_iterator, 1000
__gnu_debug::_Safe_iterator_base, 1007
__gnu_debug::_Safe_local_iterator, 1013
__gnu_debug::_Safe_local_iterator_base, 1021
_M_attach_single
__gnu_debug::_Safe_iterator, 1001
__gnu_debug::_Safe_iterator_base, 1007
__gnu_debug::_Safe_local_iterator, 1013
__gnu_debug::_Safe_local_iterator_base, 1021
_M_attached_to
__gnu_debug::_Safe_iterator, 1001
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1014
__gnu_debug::_Safe_local_iterator_base, 1021
_M_before_dereferenceable
__gnu_debug::_Safe_iterator, 1001
_M_begin
__gnu_parallel::_Piece, 972
_M_bin_proc
__gnu_parallel::_DRandomShufflingGlobalData, 862
_M_bins_begin
__gnu_parallel::_DRSSorterPU, 864
_M_buf
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2824
std::basic_filebuf, 1150
_M_buf_locale
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2824
__gnu_cxx::stdio_sync_filebuf, 2844
std::basic_filebuf, 1150
std::basic_streambuf, 1554
std::basic_stringbuf, 1650
std::wbuffer_convert, 3139
_M_buf_size
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2824
std::basic_filebuf, 1150
_M_can_compare
__gnu_debug::_Safe_iterator, 1001

__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1014
__gnu_debug::_Safe_local_iterator_base, 1021
_M_clear
__gnu_cxx::free_list, 2075
_M_comp
__gnu_parallel::_LoserTree, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 938
__gnu_parallel::_LoserTreeBase, 942
_M_const_iterators
__gnu_debug::_Safe_forward_list, 996
__gnu_debug::_Safe_node_sequence, 1025
__gnu_debug::_Safe_sequence, 1028
__gnu_debug::_Safe_sequence_base, 1031
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
__gnu_debug::basic_string, 1579
std::__debug::deque, 1970
std::__debug::forward_list, 2055
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2425
std::__debug::multiset, 2472
std::__debug::set, 2744
std::__debug::unordered_map, 3019
std::__debug::unordered_multimap, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3093
std::__debug::vector, 3119
_M_const_local_iterators
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
std::__debug::unordered_map, 3019
std::__debug::unordered_multimap, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3093
_M_create_node
std::list, 2287
_M_create_pback
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2809
std::basic_filebuf, 1136
_M_deallocate_single_object
__gnu_cxx::bitmap_allocator, 1750
_M_dereferenceable
__gnu_debug::_Safe_iterator, 1001
__gnu_debug::_Safe_local_iterator, 1014
_M_destroy_pback
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2809
std::basic_filebuf, 1136
_M_detach
__gnu_debug::_Safe_iterator, 1001
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1014
__gnu_debug::_Safe_local_iterator_base, 1021
_M_detach_all
__gnu_debug::_Safe_forward_list, 995
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1030
__gnu_debug::_Safe_unordered_container, 1033
__gnu_debug::_Safe_unordered_container_base, 1036
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2054
std::__debug::list, 2278
std::__debug::map, 2332
std::__debug::multimap, 2424
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_detach_single
__gnu_debug::_Safe_iterator, 1001
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1014
__gnu_debug::_Safe_local_iterator_base, 1021
_M_detach_singular
__gnu_debug::_Safe_forward_list, 995
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1030
__gnu_debug::_Safe_unordered_container, 1033
__gnu_debug::_Safe_unordered_container_base, 1036
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2054
std::__debug::list, 2278
std::__debug::map, 2332
std::__debug::multimap, 2424
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_dist
__gnu_parallel::_DRandomShufflingGlobalData, 862

_M_elements_leftover
__gnu_parallel::_QSBThreadLocal, 982
_M_end
__gnu_parallel::_Piece, 972
_M_ext_buf
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2824
std::basic_filebuf, 1150
_M_ext_buf_size
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2824
std::basic_filebuf, 1150
_M_ext_next
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2825
std::basic_filebuf, 1151
_M_fill_initialize
std::deque, 1952
_M_finish_iterator
__gnu_parallel::__accumulate_selector, 707
__gnu_parallel::__adjacent_difference_selector, 709
__gnu_parallel::__count_if_selector, 731
__gnu_parallel::__count_selector, 733
__gnu_parallel::__fill_selector, 749
__gnu_parallel::__for_each_selector, 754
__gnu_parallel::__generate_selector, 757
__gnu_parallel::__generic_for_each_selector, 759
__gnu_parallel::__identity_selector, 760
__gnu_parallel::__inner_product_selector, 762
__gnu_parallel::__replace_if_selector, 790
__gnu_parallel::__replace_selector, 791
__gnu_parallel::__transform1_selector, 793
__gnu_parallel::__transform2_selector, 795
_M_first
__gnu_parallel::_Job, 916
_M_first_insert
__gnu_parallel::_LoserTree, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 938
__gnu_parallel::_LoserTreeBase, 942
_M_gcount
std::basic_fstream, 1203
std::basic_ifstream, 1251
std::basic_iostream, 1332
std::basic_istream, 1375
std::basic_istringstream, 1419
std::basic_stringstream, 1700
_M_get
__gnu_cxx::free_list, 2075
_M_get_mutex
__gnu_debug::_Safe_forward_list, 995
__gnu_debug::_Safe_iterator, 1002
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1014
__gnu_debug::_Safe_local_iterator_base, 1021
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1030
__gnu_debug::_Safe_unordered_container, 1033
__gnu_debug::_Safe_unordered_container_base, 1036
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2054
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2424
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_get_result
std::__basic_future, 723
std::future, 2088
std::future< _Res & >, 2091
std::future< void >, 2093
std::shared_future, 2769
std::shared_future< _Res & >, 2772
std::shared_future< void >, 2774
_M_getloc
std::basic_fstream, 1164
std::basic_ifstream, 1220
std::basic_ios, 1264
std::basic_iostream, 1293
std::basic_istream, 1346
std::basic_istringstream, 1390
std::basic_ofstream, 1432
std::basic_ostream, 1466
std::basic_ostringstream, 1500
std::basic_stringstream, 1663
std::ios_base, 2180
_M_global
__gnu_parallel::_QSBThreadLocal, 982
_M_in_beg
__gnu_cxx::enc_filebuf, 2020
__gnu_cxx::stdio_filebuf, 2825
__gnu_cxx::stdio_sync_filebuf, 2844
std::basic_filebuf, 1151
std::basic_streambuf, 1554
std::basic_stringbuf, 1650
std::wbuffer_convert, 3139
_M_in_cur
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2825
__gnu_cxx::stdio_sync_filebuf, 2845

std::basic_filebuf, 1151
std::basic_streambuf, 1555
std::basic_stringbuf, 1651
std::wbuffer_convert, 3139
_M_in_end
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2825
__gnu_cxx::stdio_sync_filebuf, 2845
std::basic_filebuf, 1151
std::basic_streambuf, 1555
std::basic_stringbuf, 1651
std::wbuffer_convert, 3139
_M_in_same_bucket
__gnu_debug::_Safe_local_iterator, 1014
_M_incrementable
__gnu_debug::_Safe_iterator, 1002
__gnu_debug::_Safe_local_iterator, 1015
_M_initial
__gnu_parallel::_QSBThreadLocal, 982
_M_initialize_map
std::_Deque_base, 859
std::deque, 1952
_M_insert
__gnu_cxx::free_list, 2076
_M_invalidate
__gnu_debug::_Safe_iterator, 1002
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1015
__gnu_debug::_Safe_local_iterator_base, 1021
_M_invalidate_all
__gnu_debug::_Safe_forward_list, 995
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1030
__gnu_debug::_Safe_unordered_container, 1033
__gnu_debug::_Safe_unordered_container_base, 1036
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2054
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2424
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_invalidate_if
__gnu_debug::_Safe_forward_list, 995
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_unordered_container, 1033
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2054
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2424
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_invalidate_local_if
__gnu_debug::_Safe_unordered_container, 1033
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
_M_is_before_begin
__gnu_debug::_Safe_iterator, 1002
_M_is_begin
__gnu_debug::_Safe_iterator, 1002
__gnu_debug::_Safe_local_iterator, 1015
_M_is_beginnest
__gnu_debug::_Safe_iterator, 1002
_M_is_end
__gnu_debug::_Safe_iterator, 1002
__gnu_debug::_Safe_local_iterator, 1015
_M_iterators
__gnu_debug::_Safe_forward_list, 996
__gnu_debug::_Safe_node_sequence, 1025
__gnu_debug::_Safe_sequence, 1028
__gnu_debug::_Safe_sequence_base, 1031
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
__gnu_debug::basic_string, 1579
std::__debug::deque, 1970
std::__debug::forward_list, 2055
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2425
std::__debug::multiset, 2473
std::__debug::set, 2744
std::__debug::unordered_map, 3019
std::__debug::unordered_multimap, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3093
std::__debug::vector, 3120
_M_key
__gnu_parallel::_LoserTreeBase::_Loser, 932
_M_last

__gnu_parallel::_Job, 916
_M_leftover_parts
__gnu_parallel::_QSBThreadLocal, 982
_M_load
__gnu_parallel::_Job, 916
_M_local_iterators
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
std::__debug::unordered_map, 3019
std::__debug::unordered_multimap, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3093
_M_log_k
__gnu_parallel::_LoserTree, 936
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 938
__gnu_parallel::_LoserTreeBase, 942
_M_losers
__gnu_parallel::_LoserTree, 936
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 938
__gnu_parallel::_LoserTreeBase, 942
_M_mode
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2825
std::basic_filebuf, 1151
std::basic_stringbuf, 1651
_M_new_elements_at_back
std::deque, 1953
_M_new_elements_at_front
std::deque, 1953
_M_next
__gnu_debug::_Safe_iterator, 1005
__gnu_debug::_Safe_iterator_base, 1009
__gnu_debug::_Safe_local_iterator, 1018
__gnu_debug::_Safe_local_iterator_base, 1022
_M_num_bins
__gnu_parallel::_DRandomShufflingGlobalData, 863
_M_num_bits
__gnu_parallel::_DRandomShufflingGlobalData, 863
_M_num_threads
__gnu_parallel::_DRSSorterPU, 864
__gnu_parallel::_PMWMSSortingData, 974
__gnu_parallel::_QSBThreadLocal, 983
_M_offsets
__gnu_parallel::_PMWMSSortingData, 974
_M_out_beg
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2825
__gnu_cxx::stdio_sync_filebuf, 2845
std::basic_filebuf, 1151
std::basic_streambuf, 1555
std::basic_stringbuf, 1651
std::wbuffer_convert, 3139
_M_out_cur
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2825
__gnu_cxx::stdio_sync_filebuf, 2845
std::basic_filebuf, 1151
std::basic_streambuf, 1555
std::basic_stringbuf, 1651
std::wbuffer_convert, 3139
_M_out_end
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2826
__gnu_cxx::stdio_sync_filebuf, 2845
std::basic_filebuf, 1152
std::basic_streambuf, 1555
std::basic_stringbuf, 1651
std::wbuffer_convert, 3139
_M_pback
__gnu_cxx::enc_filebuf, 2021
__gnu_cxx::stdio_filebuf, 2826
std::basic_filebuf, 1152
_M_pback_cur_save
__gnu_cxx::enc_filebuf, 2022
__gnu_cxx::stdio_filebuf, 2826
std::basic_filebuf, 1152
_M_pback_end_save
__gnu_cxx::enc_filebuf, 2022
__gnu_cxx::stdio_filebuf, 2826
std::basic_filebuf, 1152
_M_pback_init
__gnu_cxx::enc_filebuf, 2022
__gnu_cxx::stdio_filebuf, 2826
std::basic_filebuf, 1152
_M_pieces
__gnu_parallel::_PMWMSSortingData, 975
_M_pop_back_aux
std::deque, 1953
_M_pop_front_aux
std::deque, 1953
_M_prior
__gnu_debug::_Safe_iterator, 1005
__gnu_debug::_Safe_iterator_base, 1009
__gnu_debug::_Safe_local_iterator, 1018
__gnu_debug::_Safe_local_iterator_base, 1022
_M_push_back_aux
std::deque, 1953
_M_push_front_aux
std::deque, 1953
_M_range_check
std::deque, 1953
std::vector, 3104
_M_range_initialize
std::deque, 1954
_M_reading

__gnu_cxx::enc_filebuf, 2022
__gnu_cxx::stdio_filebuf, 2827
std::basic_filebuf, 1153
_M_reallocate_map
std::deque, 1954
_M_reserve_elements_at_back
std::deque, 1955
_M_reserve_elements_at_front
std::deque, 1955
_M_reserve_map_at_back
std::deque, 1955
_M_reserve_map_at_front
std::deque, 1955
_M_reset
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1015
__gnu_debug::_Safe_local_iterator_base, 1021
_M_revalidate_singular
__gnu_debug::_Safe_forward_list, 996
__gnu_debug::_Safe_node_sequence, 1024
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1031
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1036
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2055
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2425
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018
std::__debug::unordered_multimap, 3042
std::__debug::unordered_multiset, 3067
std::__debug::unordered_set, 3092
std::__debug::vector, 3119
_M_samples
__gnu_parallel::_PMWMSSortingData, 975
_M_sd
__gnu_parallel::_DRSSorterPU, 864
_M_seed
__gnu_parallel::_DRSSorterPU, 864
_M_sequence
__gnu_debug::_Safe_iterator, 1005
__gnu_debug::_Safe_iterator_base, 1009
__gnu_debug::_Safe_local_iterator, 1018
__gnu_debug::_Safe_local_iterator_base, 1022
_M_sequential_algorithm
__gnu_parallel::__adjacent_find_selector, 709
__gnu_parallel::__find_first_of_selector, 750
__gnu_parallel::__find_if_selector, 752
__gnu_parallel::__mismatch_selector, 768
_M_set_buffer
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2809
std::basic_filebuf, 1136
_M_set_node
std::_Deque_iterator, 861
_M_singular
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_iterator_base, 1008
__gnu_debug::_Safe_local_iterator, 1015
__gnu_debug::_Safe_local_iterator_base, 1022
_M_source
__gnu_parallel::_DRandomShufflingGlobalData, 863
__gnu_parallel::_LoserTreeBase::_Loser, 932
__gnu_parallel::_PMWMSSortingData, 975
_M_starts
__gnu_parallel::_DRandomShufflingGlobalData, 863
__gnu_parallel::_PMWMSSortingData, 975
_M_sup
__gnu_parallel::_LoserTreeBase::_Loser, 933
_M_swap
__gnu_debug::_Safe_node_sequence, 1025
__gnu_debug::_Safe_sequence, 1027
__gnu_debug::_Safe_sequence_base, 1031
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2425
std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::unordered_map, 3018, 3019
std::__debug::unordered_multimap, 3042, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3092, 3093
std::__debug::vector, 3119
_M_temporaries
__gnu_parallel::_DRandomShufflingGlobalData, 863
_M_temporary
__gnu_parallel::_PMWMSSortingData, 975
_M_transfer_from_if
__gnu_debug::_Safe_forward_list, 996
__gnu_debug::_Safe_node_sequence, 1025
__gnu_debug::_Safe_sequence, 1028
__gnu_debug::basic_string, 1561
std::__debug::deque, 1969
std::__debug::forward_list, 2055
std::__debug::list, 2279
std::__debug::map, 2333
std::__debug::multimap, 2425

std::__debug::multiset, 2472
std::__debug::set, 2743
std::__debug::vector, 3119
_M_unlink
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_iterator_base, 1009
__gnu_debug::_Safe_local_iterator, 1016
__gnu_debug::_Safe_local_iterator_base, 1022
_M_use_pointer
__gnu_parallel::_LoserTreeTraits, 949
_M_version
__gnu_debug::_Safe_forward_list, 996
__gnu_debug::_Safe_iterator, 1005
__gnu_debug::_Safe_iterator_base, 1009
__gnu_debug::_Safe_local_iterator, 1018
__gnu_debug::_Safe_local_iterator_base, 1022
__gnu_debug::_Safe_node_sequence, 1025
__gnu_debug::_Safe_sequence, 1028
__gnu_debug::_Safe_sequence_base, 1031
__gnu_debug::_Safe_unordered_container, 1034
__gnu_debug::_Safe_unordered_container_base, 1037
__gnu_debug::basic_string, 1579
std::__debug::deque, 1970
std::__debug::forward_list, 2055
std::__debug::list, 2280
std::__debug::map, 2334
std::__debug::multimap, 2425
std::__debug::multiset, 2473
std::__debug::set, 2744
std::__debug::unordered_map, 3019
std::__debug::unordered_multimap, 3043
std::__debug::unordered_multiset, 3068
std::__debug::unordered_set, 3093
std::__debug::vector, 3120
_M_w
std::_Base_bitset, 849
std::tr2::__dynamic_bitset_base, 748
_M_write
std::basic_fstream, 1164
std::basic_iostream, 1293
std::basic_ofstream, 1432
std::basic_ostream, 1467
std::basic_ostringstream, 1500
std::basic_stringstream, 1663
_MultiwayMergeAlgorithm
__gnu_parallel, 423
_Opcode
Base and Implementation Classes, 25
_Parallelism
__gnu_parallel, 423
_PartialSumAlgorithm
__gnu_parallel, 424
_Piece
__gnu_parallel::_QSBThreadLocal, 982
_PseudoSequence
__gnu_parallel::_PseudoSequence, 980
_Ptr
std::__basic_future, 722
std::__future_base, 755
std::future, 2088
std::future< _Res & >, 2090
std::future< void >, 2093
std::shared_future, 2768
std::shared_future< _Res & >, 2771
std::shared_future< void >, 2774
_QSBThreadLocal
__gnu_parallel::_QSBThreadLocal, 982
_RandomNumber
__gnu_parallel::_RandomNumber, 984
_RestrictedBoundedConcurrentQueue
__gnu_parallel::_RestrictedBoundedConcurrentQueue, 988
_S_constant
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_local_iterator, 1016
_Safe_iterator
__gnu_debug::_Safe_iterator, 999, 1000
_Safe_iterator_base
__gnu_debug::_Safe_iterator_base, 1007
_Safe_local_iterator
__gnu_debug::_Safe_local_iterator, 1012, 1013
_Safe_local_iterator_base
__gnu_debug::_Safe_local_iterator_base, 1020
_SequenceIndex
__gnu_parallel, 423
_SortAlgorithm
__gnu_parallel, 424
_SplittingAlgorithm
__gnu_parallel, 424
_Temporary_buffer
std::_Temporary_buffer, 1052
_ThreadIndex
__gnu_parallel, 423
_TokenT
std::__detail::_Scanner, 1040
_Unchecked_flip
SGI, 308
_Unchecked_reset
SGI, 308
_Unchecked_set
SGI, 308
_Unchecked_test
SGI, 308
__addressof
Utilities, 372
__allocate_guarded
std, 583

__allocated_ptr
std::__allocated_ptr, 717
__allocator_base
Allocators, 7
__base
__gnu_debug, 412
__begin1_iterator
__gnu_parallel::__inner_product_selector, 762
__begin2_iterator
__gnu_parallel::__inner_product_selector, 762
__bins_end
__gnu_parallel::_DRSSorterPU, 864
__bit_allocate
__gnu_cxx::__detail, 405
__bit_free
__gnu_cxx::__detail, 405
__calc_borders
__gnu_parallel, 424
__check_singular
__gnu_debug, 413
__check_singular_aux
__gnu_debug, 413
__check_string
__gnu_debug, 413
__clp2
Base and Implementation Classes, 23
__compare_and_swap
__gnu_parallel, 424
__cpp_lib_make_unique
Pointer Abstractions, 242
__ctype_type
std::basic_ios, 1261
__cxxabiv1::__forced_unwind, 754
__decode2
__gnu_parallel, 424
__delete_min_insert
__gnu_parallel::_LoserTree, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 937
__determine_samples
__gnu_parallel, 426
__encode2
__gnu_parallel, 426
__equally_split
__gnu_parallel, 426
__equally_split_point
__gnu_parallel, 427
__fetch_and_add
__gnu_parallel, 427
__final_insertion_sort
std, 584
__find_if
std, 584
__find_if_not
std, 584
__find_if_not_n
std, 584
__find_template
__gnu_parallel, 427, 429, 430
__for_each_template_random_access
__gnu_parallel, 430
__for_each_template_random_access_ed
__gnu_parallel, 432
__for_each_template_random_access_omp_loop
__gnu_parallel, 432
__for_each_template_random_access_workstealing
__gnu_parallel, 433
__foreign_iterator_aux2
__gnu_debug, 413
__from_chars_alnum
std::__detail, 657
__from_chars_binary
std::__detail, 657
__from_chars_digit
std::__detail, 658
__gcd
std, 584
__gen_two_uniform_ints
std, 584
__genrand_bits
__gnu_parallel::_RandomNumber, 984
__get_distance
__gnu_debug, 413
__get_min_source
__gnu_parallel::_LoserTree, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 937
__gnu_parallel::_LoserTreeBase, 940
__get_num_threads
__gnu_parallel::balanced_quicksort_tag, 1128
__gnu_parallel::balanced_tag, 1129
__gnu_parallel::default_parallel_tag, 1941
__gnu_parallel::exact_tag, 2033
__gnu_parallel::multiway_mergesort_exact_tag, 2474
__gnu_parallel::multiway_mergesort_sampling_tag, 2475
__gnu_parallel::multiway_mergesort_tag, 2476
__gnu_parallel::omp_loop_static_tag, 2553
__gnu_parallel::omp_loop_tag, 2554
__gnu_parallel::parallel_tag, 2591
__gnu_parallel::quicksort_tag, 2646
__gnu_parallel::sampling_tag, 2729
__gnu_parallel::unbalanced_tag, 2972
__glibcxx_check_erase
macros.h, 3350
__glibcxx_check_erase_after
macros.h, 3350

__glibcxx_check_erase_range
macros.h, 3350
__glibcxx_check_erase_range_after
macros.h, 3350
__glibcxx_check_heap_pred
macros.h, 3350
__glibcxx_check_insert
macros.h, 3350
__glibcxx_check_insert_after
macros.h, 3351
__glibcxx_check_insert_range
macros.h, 3351
__glibcxx_check_insert_range_after
macros.h, 3351
__glibcxx_check_partitioned_lower
macros.h, 3351
__glibcxx_check_partitioned_lower_pred
macros.h, 3351
__glibcxx_check_partitioned_upper_pred
macros.h, 3351
__glibcxx_check_sorted_pred
macros.h, 3351
__gnu_cxx, 378
_Bit_scan_forward, 394
__static_pointer_cast, 394
operator<, 398, 399
operator<=, 399, 400
operator>, 402, 403
operator>=, 403, 404
operator+, 395, 397, 398
operator==, 400, 402
swap, 404
__gnu_cxx::_Caster< _ToType >, 853
__gnu_cxx::_Char_types< _CharT >, 854
__gnu_cxx::_ExtPtr_allocator< _Tp >, 873
__gnu_cxx::_Invalid_type, 911
__gnu_cxx::_Pointer_adapter< _Storage_policy >, 975
__gnu_cxx::_Relative_pointer_impl< _Tp >, 986
__gnu_cxx::_Relative_pointer_impl< const _Tp >, 987
__gnu_cxx::_Std_pointer_impl< _Tp >, 1050
__gnu_cxx::_Unqualified_type< _Tp >, 1054
__gnu_cxx::__alloc_traits
allocate, 714
const_void_pointer, 713
construct, 715
deallocate, 715
destroy, 715
is_always_equal, 713
max_size, 715
propagate_on_container_swap, 714
void_pointer, 714
__gnu_cxx::__alloc_traits< _Alloc, typename >, 711
__gnu_cxx::__detail, 404
__bit_allocate, 405
__bit_free, 405
__num_bitmaps, 405
__num_blocks, 405
__gnu_cxx::__detail::_Bitmap_counter< _Tp >, 852
__gnu_cxx::__detail::_Ffit_finder
argument_type, 875
result_type, 875
__gnu_cxx::__detail::_Ffit_finder< _Tp >, 874
__gnu_cxx::__mt_alloc< _Tp, _Poolp >, 768
__gnu_cxx::__mt_alloc_base< _Tp >, 770
__gnu_cxx::__pool< _Thread >, 777
__gnu_cxx::__pool< false >, 778
__gnu_cxx::__pool< true >, 779
__gnu_cxx::__pool_alloc< _Tp >, 780
__gnu_cxx::__pool_alloc_base, 782
__gnu_cxx::__pool_base, 783
__gnu_cxx::__scoped_lock, 792
__gnu_cxx::__versa_string
~__versa_string, 802
__versa_string, 800–802
append, 802–804
assign, 805–807
at, 808
back, 808, 809
begin, 809
c_str, 809
capacity, 809
cbegin, 809
cend, 810
clear, 810
compare, 810–812
copy, 813
crbegin, 813
crend, 813
data, 813
empty, 813
end, 814
erase, 814–816
find, 816, 817
find_first_not_of, 817, 819
find_first_of, 821, 823
find_last_not_of, 823, 824
find_last_of, 825, 826
front, 826
get_allocator, 826
insert, 827–830
length, 831
max_size, 831
npos, 847
operator+=, 831, 832
operator=, 832, 833
pop_back, 834
push_back, 834
rbegin, 836

rend, 836
replace, 836, 837, 839–842
reserve, 843
resize, 843
rfind, 844–846
shrink_to_fit, 846
size, 846
substr, 847
swap, 847
__gnu_cxx::annotate_base, 1075
__gnu_cxx::binary_compose
argument_type, 1723
result_type, 1724
__gnu_cxx::binary_compose< _Operation1, _Operation2, _Operation3 >, 1723
__gnu_cxx::bitmap_allocator
_M_allocate_single_object, 1750
_M_deallocate_single_object, 1750
__gnu_cxx::bitmap_allocator< _Tp >, 1749
__gnu_cxx::char_traits< _CharT >, 1783
__gnu_cxx::character< _Value, _Int, _St >, 1788
__gnu_cxx::condition_base, 1840
__gnu_cxx::constant_unary_fun< _Result, _Argument >, 1849
__gnu_cxx::constant_void_fun< _Result >, 1850
__gnu_cxx::debug_allocator< _Alloc >, 1931
__gnu_cxx::enc_filebuf
_M_buf, 2020
_M_buf_locale, 2020
_M_buf_size, 2020
_M_create_pback, 2006
_M_destroy_pback, 2006
_M_ext_buf, 2020
_M_ext_buf_size, 2020
_M_ext_next, 2020
_M_in_beg, 2020
_M_in_cur, 2021
_M_in_end, 2021
_M_mode, 2021
_M_out_beg, 2021
_M_out_cur, 2021
_M_out_end, 2021
_M_pback, 2021
_M_pback_cur_save, 2022
_M_pback_end_save, 2022
_M_pback_init, 2022
_M_reading, 2022
_M_set_buffer, 2006
close, 2006
eback, 2006
egptr, 2006
epptr, 2007
gbump, 2007
getloc, 2007
gptr, 2008
imbue, 2008
in_avail, 2008
is_open, 2009
open, 2009
overflow, 2011
pbackfail, 2011
pbase, 2011
pbump, 2012
pptr, 2012
pubimbue, 2012
pubseekoff, 2013
pubseekpos, 2013
pubsetbuf, 2013
pubsync, 2013
sbumpc, 2013
seekoff, 2014
seekpos, 2014
setbuf, 2014
setg, 2015
setp, 2015
sgetc, 2015
sgetn, 2016
showmanyc, 2016
snextc, 2016
sputbackc, 2017
sputc, 2017
sputn, 2017
sungetc, 2018
sync, 2018
uflow, 2018
underflow, 2018
xsgetn, 2019
xsputn, 2019
__gnu_cxx::enc_filebuf< _CharT >, 2003
__gnu_cxx::encoding_char_traits< _CharT >, 2023
__gnu_cxx::encoding_state, 2024
__gnu_cxx::forced_error, 2050
__gnu_cxx::free_list, 2075
_M_clear, 2075
_M_get, 2075
_M_insert, 2076
__gnu_cxx::limit_condition, 2270
__gnu_cxx::limit_condition::always_adjustor, 1074
__gnu_cxx::limit_condition::limit_adjustor, 2269
__gnu_cxx::limit_condition::never_adjustor, 2482
__gnu_cxx::malloc_allocator< _Tp >, 2328
__gnu_cxx::new_allocator< _Tp >, 2483
__gnu_cxx::project1st
first_argument_type, 2635
result_type, 2635
second_argument_type, 2636
__gnu_cxx::project1st< _Arg1, _Arg2 >, 2635
__gnu_cxx::project2nd

first_argument_type, 2636
result_type, 2636
second_argument_type, 2636
__gnu_cxx::project2nd< _Arg1, _Arg2 >, 2636
__gnu_cxx::random_condition, 2647
__gnu_cxx::random_condition::always_adjustor, 1074
__gnu_cxx::random_condition::group_adjustor, 2115
__gnu_cxx::random_condition::never_adjustor, 2482
__gnu_cxx::recursive_init_error, 2681
__gnu_cxx::rope< _CharT, _Alloc >, 2709
__gnu_cxx::select1st
argument_type, 2734
result_type, 2734
__gnu_cxx::select1st< _Pair >, 2734
__gnu_cxx::select2nd
argument_type, 2735
result_type, 2735
__gnu_cxx::select2nd< _Pair >, 2735
__gnu_cxx::slist< _Tp, _Alloc >, 2793
__gnu_cxx::stdio_filebuf
~stdio_filebuf, 2809
_M_buf, 2824
_M_buf_locale, 2824
_M_buf_size, 2824
_M_create_pback, 2809
_M_destroy_pback, 2809
_M_ext_buf, 2824
_M_ext_buf_size, 2824
_M_ext_next, 2825
_M_in_beg, 2825
_M_in_cur, 2825
_M_in_end, 2825
_M_mode, 2825
_M_out_beg, 2825
_M_out_cur, 2825
_M_out_end, 2826
_M_pback, 2826
_M_pback_cur_save, 2826
_M_pback_end_save, 2826
_M_pback_init, 2826
_M_reading, 2827
_M_set_buffer, 2809
close, 2809
eback, 2810
egptr, 2810
epptr, 2810
fd, 2810
file, 2811
gbump, 2811
getloc, 2811
gptr, 2811
imbue, 2812
in_avail, 2812
is_open, 2812
open, 2812, 2814
overflow, 2815
pbackfail, 2815
pbase, 2816
pbump, 2816
pptr, 2816
pubimbue, 2816
pubseekoff, 2817
pubseekpos, 2817
pubsetbuf, 2817
pubsync, 2817
sbumpc, 2817
seekoff, 2818
seekpos, 2818
setbuf, 2818
setg, 2819
setp, 2819
sgetc, 2819
sgetn, 2820
showmanyc, 2820
snextc, 2820
sputbackc, 2821
sputc, 2821
sputn, 2821
stdio_filebuf, 2807
sungetc, 2822
sync, 2822
uflow, 2822
underflow, 2822
xsgetn, 2823
xsputn, 2823
__gnu_cxx::stdio_filebuf< _CharT, _Traits >, 2804
__gnu_cxx::stdio_sync_filebuf
_M_buf_locale, 2844
_M_in_beg, 2844
_M_in_cur, 2845
_M_in_end, 2845
_M_out_beg, 2845
_M_out_cur, 2845
_M_out_end, 2845
eback, 2830
egptr, 2830
epptr, 2830
file, 2831
gbump, 2831
getloc, 2831
gptr, 2831
imbue, 2832
in_avail, 2832
overflow, 2832
pbackfail, 2833
pbase, 2833
pbump, 2833
pptr, 2835

pubimbue, 2835
pubseekoff, 2835
pubseekpos, 2835
pubsetbuf, 2837
pubsync, 2837
sbumpc, 2837
seekoff, 2837
seekpos, 2838
setbuf, 2838
setg, 2838
setp, 2839
sgetc, 2839
sgetn, 2839
showmanyc, 2839
snextc, 2840
sputbackc, 2840
sputc, 2840
sputn, 2842
sungetc, 2842
sync, 2842
uflow, 2843
underflow, 2843
xsgetn, 2843
xsputn, 2844
__gnu_cxx::stdio_sync_filebuf< _CharT, _Traits >, 2827
__gnu_cxx::subtractive_rng, 2866
argument_type, 2866
operator(), 2867
result_type, 2866
subtractive_rng, 2867
__gnu_cxx::temporary_buffer
~temporary_buffer, 2871
begin, 2871
end, 2871
requested_size, 2871
size, 2871
temporary_buffer, 2871
__gnu_cxx::temporary_buffer< _ForwardIterator, _Tp >, 2870
__gnu_cxx::throw_allocator_base< _Tp, _Cond >, 2876
__gnu_cxx::throw_allocator_limit< _Tp >, 2877
__gnu_cxx::throw_allocator_random< _Tp >, 2879
__gnu_cxx::throw_value_base< _Cond >, 2880
__gnu_cxx::throw_value_limit, 2881
__gnu_cxx::throw_value_random, 2883
__gnu_cxx::typelist, 406
apply_generator, 406
__gnu_cxx::unary_compose
argument_type, 2969
result_type, 2969
__gnu_cxx::unary_compose< _Operation1, _Operation2 >, 2968
__gnu_debug, 406
_Distance_precision, 412
__base, 412
__check_singular, 413
__check_singular_aux, 413
__check_string, 413
__foreign_iterator_aux2, 413
__get_distance, 413
__valid_range, 413, 414
__valid_range_aux, 414
__gnu_debug::_After_nth_from< _Iterator >, 848
__gnu_debug::_BeforeBeginHelper< _Sequence >, 851
__gnu_debug::_Equal_to< _Type >, 867
__gnu_debug::_Not_equal_to< _Type >, 970
__gnu_debug::_Safe_forward_list
_M_iterators, 996
_M_version, 996
__gnu_debug::_Safe_forward_list< _SafeSequence >, 994
__gnu_debug::_Safe_iterator
_M_attach, 1000
_M_attach_single, 1001
_M_attached_to, 1001
_M_before_dereferenceable, 1001
_M_can_compare, 1001
_M_dereferenceable, 1001
_M_detach, 1001
_M_detach_single, 1001
_M_get_mutex, 1002
_M_incrementable, 1002
_M_invalidate, 1002
_M_is_begin, 1002
_M_is_beginnest, 1002
_M_is_end, 1002
_M_next, 1005
_M_prior, 1005
_M_reset, 1003
_M_sequence, 1005
_M_singular, 1003
_M_unlink, 1003
_M_version, 1005
_S_constant, 1003
_Safe_iterator, 999, 1000
base, 1003
operator _Iterator, 1003
operator*, 1003
operator++, 1004
operator->, 1004
operator=, 1004
__gnu_debug::_Safe_iterator_base, 1006
_M_attach, 1007
_M_detach, 1008
_M_invalidate, 1008
_M_next, 1009
_M_prior, 1009
_M_reset, 1008

_M_sequence, 1009
_M_singular, 1008
_M_unlink, 1009
_M_version, 1009
__gnu_debug::_Safe_local_iterator
_M_attach, 1013
_M_dereferenceable, 1014
_M_detach, 1014
_M_incrementable, 1015
_M_invalidate, 1015
_M_next, 1018
_M_prior, 1018
_M_reset, 1015
_M_sequence, 1018
_M_singular, 1015
_M_unlink, 1016
_M_version, 1018
_S_constant, 1016
base, 1016
bucket, 1016
operator _Iterator, 1016
operator*, 1016
operator++, 1017
operator->, 1017
operator=, 1017, 1018
__gnu_debug::_Safe_local_iterator_base, 1019
__gnu_debug::_Safe_node_sequence
_M_iterators, 1025
_M_swap, 1025
_M_version, 1025
__gnu_debug::_Safe_node_sequence< _Sequence >, 1023
__gnu_debug::_Safe_sequence
_M_const_iterators, 1028
_M_detach_all, 1027
_M_detach_singular, 1027
_M_get_mutex, 1027
_M_invalidate_all, 1027
_M_invalidate_if, 1027
_M_iterators, 1028
_M_revalidate_singular, 1027
_M_swap, 1027
_M_version, 1028
__gnu_debug::_Safe_sequence< _Sequence >, 1026
__gnu_debug::_Safe_sequence_base, 1029
_M_iterators, 1031
_M_swap, 1031
_M_version, 1031
__gnu_debug::_Safe_unordered_container
_M_iterators, 1034
_M_swap, 1034
_M_version, 1034
__gnu_debug::_Safe_unordered_container< _Container >, 1032
__gnu_debug::_Safe_unordered_container_base, 1035
__gnu_debug::_Sequence_traits< _Sequence >, 1041
__gnu_debug::basic_string
_M_const_iterators, 1579
_M_detach_all, 1561
_M_detach_singular, 1561
_M_get_mutex, 1561
_M_invalidate_all, 1561
_M_invalidate_if, 1561
_M_iterators, 1579
_M_revalidate_singular, 1561
_M_swap, 1561
_M_transfer_from_if, 1561
_M_version, 1579
append, 1561, 1563
assign, 1563, 1565
at, 1565
back, 1566
capacity, 1566
compare, 1566, 1567
empty, 1567
erase, 1567, 1568
find, 1568
find_first_not_of, 1568
find_first_of, 1569
find_last_not_of, 1569
find_last_of, 1569
front, 1570
get_allocator, 1570
insert, 1570–1572
length, 1572
max_size, 1572
npos, 1579
operator+=, 1572
replace, 1574, 1575, 1577, 1578
reserve, 1578
rfind, 1578
size, 1579
swap, 1579
__gnu_debug::basic_string< _CharT, _Traits, _Allocator >, 1556
__gnu_internal, 414
__gnu_parallel, 414
_AlgorithmStrategy, 423
_BinIndex, 423
_CASable, 423
_CASable_bits, 462
_CASable_mask, 462
_FindAlgorithm, 423
_MultiwayMergeAlgorithm, 423
_Parallelism, 423
_PartialSumAlgorithm, 424
_SequenceIndex, 423
_SortAlgorithm, 424

_SplittingAlgorithm, 424
_ThreadIndex, 423
__calc_borders, 424
__compare_and_swap, 424
__decode2, 424
__determine_samples, 426
__encode2, 426
__equally_split, 426
__equally_split_point, 427
__fetch_and_add, 427
__find_template, 427, 429, 430
__for_each_template_random_access, 430
__for_each_template_random_access_ed, 432
__is_sorted, 434
__median_of_three_iterators, 434
__merge_advance, 435
__merge_advance_movc, 435
__merge_advance_usual, 436
__parallel_merge_advance, 436
__parallel_nth_element, 437
__parallel_partial_sort, 437
__parallel_partial_sum, 437
__parallel_partial_sum_basecase, 438
__parallel_partial_sum_linear, 438
__parallel_partition, 439
__parallel_random_shuffle, 439
__parallel_random_shuffle_drs, 439
__parallel_random_shuffle_drs_pu, 440
__parallel_sort, 440–443
__parallel_sort_qs, 445
__parallel_sort_qs_conquer, 445
__parallel_sort_qs_divide, 446
__parallel_sort_qsb, 446
__parallel_unique_copy, 446, 447
__qsb_conquer, 447
__qsb_divide, 447
__qsb_local_sort_with_helping, 449
__random_number_pow2, 449
__rd_log2, 449
__round_up_to_pow2, 450
__search_template, 450
__sequential_multiway_merge, 450
__sequential_random_shuffle, 451
__shrink, 451
__shrink_and_double, 451
__yield, 452
list_partition, 452
max, 452
min, 452
multiseq_partition, 452
multiseq_selection, 453
multiway_merge, 453
multiway_merge_3_variant, 455
multiway_merge_4_variant, 455
multiway_merge_exact_splitting, 456
multiway_merge_loser_tree, 456
multiway_merge_loser_tree_sentinel, 457
multiway_merge_loser_tree_unguarded, 457
multiway_merge_sampling_splitting, 458
multiway_merge_sentinels, 458
parallel_multiway_merge, 459
parallel_sort_mwms, 460
parallel_sort_mwms_pu, 460
__gnu_parallel::_DRSSorterPU
_M_sd, 864
_M_seed, 864
__gnu_parallel::_DRandomShufflingGlobalData
_M_dist, 862
_M_source, 863
_M_starts, 863
_M_temporaries, 863
__gnu_parallel::_DRandomShufflingGlobalData< _RAIter >, 862
__gnu_parallel::_DummyReduct, 865
__gnu_parallel::_EqualFromLess
first_argument_type, 868
result_type, 868
second_argument_type, 869
__gnu_parallel::_EqualTo
first_argument_type, 871
result_type, 871
second_argument_type, 871
__gnu_parallel::_EqualTo< _T1, _T2 >, 871
__gnu_parallel::_GuardedIterator
_GuardedIterator, 882
operator _RAIter, 883
operator<, 883
operator<=, 883
operator*, 883
operator++, 883
__gnu_parallel::_GuardedIterator< _RAIter, _Compare >, 882
__gnu_parallel::_IteratorPair
first, 914
first_type, 914
second, 914
second_type, 914
swap, 914
__gnu_parallel::_Job
_M_first, 916
_M_last, 916
_M_load, 916
__gnu_parallel::_Job< _DifferenceTp >, 915
__gnu_parallel::_Less
first_argument_type, 919
result_type, 919
second_argument_type, 919
__gnu_parallel::_Less< _T1, _T2 >, 918

__gnu_parallel::_Lexicographic
first_argument_type, 920
result_type, 920
second_argument_type, 920
__gnu_parallel::_Lexicographic< _T1, _T2, _Compare >, 919
__gnu_parallel::_LexicographicReverse
first_argument_type, 921
result_type, 921
second_argument_type, 921
__gnu_parallel::_LoserTree
_M_comp, 935
_M_first_insert, 935
_M_log_k, 936
_M_losers, 936
__delete_min_insert, 935
__get_min_source, 935
__insert_start, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 936
__gnu_parallel::_LoserTreeBase
~_LoserTreeBase, 940
_LoserTreeBase, 940
_M_comp, 942
_M_first_insert, 942
_M_log_k, 942
_M_losers, 942
__get_min_source, 940
__insert_start, 940
__gnu_parallel::_LoserTreeBase< _Tp, _Compare >, 939
__gnu_parallel::_LoserTreePointer< false, _Tp, _Compare >, 944
__gnu_parallel::_LoserTreePointerBase< _Tp, _Compare >, 945
__gnu_parallel::_LoserTreePointerUnguarded< false, _Tp, _Compare >, 947
__gnu_parallel::_LoserTreeTraits
_M_use_pointer, 949
__gnu_parallel::_LoserTreeTraits< _Tp >, 948
__gnu_parallel::_LoserTreeUnguarded< false, _Tp, _Compare >, 951
__gnu_parallel::_LoserTreeUnguardedBase< _Tp, _Compare >, 952
__gnu_parallel::_Multiplies
first_argument_type, 959
result_type, 959
second_argument_type, 959
__gnu_parallel::_Multiplies< _Tp1, _Tp2, _Result >, 958
__gnu_parallel::_Nothing, 971
operator(), 971
__gnu_parallel::_Piece
_M_begin, 972
_M_end, 972
__gnu_parallel::_Piece< _DifferenceTp >, 971
__gnu_parallel::_Plus
first_argument_type, 973
result_type, 973
second_argument_type, 973
__gnu_parallel::_Plus< _Tp1, _Tp2, _Result >, 973
__gnu_parallel::_PseudoSequence
_PseudoSequence, 980
begin, 980
end, 980
__gnu_parallel::_PseudoSequence< _Tp, _DifferenceTp >, 979
__gnu_parallel::_PseudoSequenceIterator< _Tp, _DifferenceTp >, 980
__gnu_parallel::_QSBThreadLocal
_M_global, 982
_M_initial, 982
_Piece, 982
__gnu_parallel::_QSBThreadLocal< _RAIter >, 981
__gnu_parallel::_RandomNumber, 983
_RandomNumber, 984
__genrand_bits, 984
operator(), 984
__gnu_parallel::_RestrictedBoundedConcurrentQueue
pop_back, 988
pop_front, 988
push_front, 988
__gnu_parallel::_RestrictedBoundedConcurrentQueue< _Tp >, 987
__gnu_parallel::_Settings, 1041
accumulate_minimal_n, 1043
adjacent_difference_minimal_n, 1043
cache_line_size, 1043
count_minimal_n, 1043
fill_minimal_n, 1043
find_increasing_factor, 1043
find_initial_block_size, 1043
find_maximum_block_size, 1043
find_scale_factor, 1043
find_sequential_search_size, 1044
for_each_minimal_n, 1044
generate_minimal_n, 1044
get, 1042
L1_cache_size, 1044
L2_cache_size, 1044
max_element_minimal_n, 1044
merge_minimal_n, 1044
merge_oversampling, 1044
min_element_minimal_n, 1044
multiway_merge_minimal_k, 1045
multiway_merge_minimal_n, 1045
multiway_merge_oversampling, 1045
nth_element_minimal_n, 1045
partial_sort_minimal_n, 1045
partial_sum_dilation, 1045

partial_sum_minimal_n, 1045
partition_chunk_share, 1045
partition_chunk_size, 1045
partition_minimal_n, 1046
qsb_steals, 1046
random_shuffle_minimal_n, 1046
replace_minimal_n, 1046
search_minimal_n, 1046
set, 1042
set_difference_minimal_n, 1046
set_intersection_minimal_n, 1046
set_symmetric_difference_minimal_n, 1046
set_union_minimal_n, 1046
sort_minimal_n, 1046
sort_mwms_oversampling, 1047
sort_qs_num_samples_preset, 1047
sort_qsb_base_case_maximal_n, 1047
TLB_size, 1047
transform_minimal_n, 1047
unique_copy_minimal_n, 1047
__gnu_parallel::__accumulate_binop_reduct< _BinOp >, 706
__gnu_parallel::__accumulate_selector
operator(), 707
__gnu_parallel::__accumulate_selector< _It >, 706
__gnu_parallel::__adjacent_difference_selector< _It >, 708
__gnu_parallel::__adjacent_find_selector, 709
operator(), 711
__gnu_parallel::__binder1st
argument_type, 724
result_type, 724
__gnu_parallel::__binder2nd
argument_type, 726
result_type, 726
__gnu_parallel::__count_if_selector
operator(), 731
__gnu_parallel::__count_selector
_M_finish_iterator, 733
operator(), 732
__gnu_parallel::__count_selector< _It, _Diff >, 732
__gnu_parallel::__fill_selector
_M_finish_iterator, 749
operator(), 749
__gnu_parallel::__fill_selector< _It >, 748
__gnu_parallel::__find_first_of_selector
operator(), 751
__gnu_parallel::__find_if_selector, 751
operator(), 752
__gnu_parallel::__for_each_selector
operator(), 753
__gnu_parallel::__for_each_selector< _It >, 753
__gnu_parallel::__generate_selector
_M_finish_iterator, 757
operator(), 756
__gnu_parallel::__generate_selector< _It >, 756
__gnu_parallel::__generic_find_selector, 757
__gnu_parallel::__generic_for_each_selector< _It >, 758
__gnu_parallel::__identity_selector
_M_finish_iterator, 760
operator(), 760
__gnu_parallel::__identity_selector< _It >, 759
__gnu_parallel::__inner_product_selector
operator(), 762
__gnu_parallel::__mismatch_selector, 767
operator(), 768
__gnu_parallel::__replace_if_selector
operator(), 789
__gnu_parallel::__replace_selector
_M_finish_iterator, 791
__new_val, 791
__replace_selector, 791
operator(), 791
__gnu_parallel::__replace_selector< _It, _Tp >, 790
__gnu_parallel::__transform1_selector
operator(), 793
__gnu_parallel::__transform1_selector< _It >, 792
__gnu_parallel::__transform2_selector
operator(), 794
__gnu_parallel::__transform2_selector< _It >, 794
__gnu_parallel::__unary_negate
argument_type, 796
result_type, 796
__gnu_parallel::__unary_negate< _Predicate, argument_type >, 795
__gnu_parallel::balanced_quicksort_tag, 1128
__get_num_threads, 1128
set_num_threads, 1128
__gnu_parallel::balanced_tag, 1129
__get_num_threads, 1129
set_num_threads, 1129
__gnu_parallel::constant_size_blocks_tag, 1849
__gnu_parallel::default_parallel_tag, 1941
__get_num_threads, 1941
set_num_threads, 1942
__gnu_parallel::equal_split_tag, 2028
__gnu_parallel::exact_tag, 2032
__get_num_threads, 2033
set_num_threads, 2033
__gnu_parallel::find_tag, 2047
__gnu_parallel::growing_blocks_tag, 2116
__gnu_parallel::multiway_mergesort_exact_tag, 2473
set_num_threads, 2474
__gnu_parallel::multiway_mergesort_sampling_tag, 2474
set_num_threads, 2475
__gnu_parallel::multiway_mergesort_tag, 2475
__get_num_threads, 2476
set_num_threads, 2476

__gnu_parallel::omp_loop_static_tag, 2553
set_num_threads, 2553
__gnu_parallel::omp_loop_tag, 2554
__get_num_threads, 2554
set_num_threads, 2554
__gnu_parallel::parallel_tag, 2590
__get_num_threads, 2591
parallel_tag, 2591
set_num_threads, 2591
__gnu_parallel::quicksort_tag, 2645
__get_num_threads, 2646
set_num_threads, 2646
__gnu_parallel::sampling_tag, 2729
__get_num_threads, 2729
set_num_threads, 2729
__gnu_parallel::sequential_tag, 2740
__gnu_parallel::unbalanced_tag, 2971
__get_num_threads, 2972
set_num_threads, 2972
__gnu_pbds, 462
__gnu_pbds::associative_tag, 1080
__gnu_pbds::basic_branch< Key, Mapped, Tag, Node_Update, Policy_Tl, _Alloc >, 1131
__gnu_pbds::basic_branch_tag, 1132
__gnu_pbds::basic_hash_tag, 1210
__gnu_pbds::basic_invalidation_guarantee, 1257
__gnu_pbds::binary_heap_tag, 1734
__gnu_pbds::binomial_heap_tag, 1748
__gnu_pbds::cc_hash_table
cc_hash_table, 1775–1777
__gnu_pbds::cc_hash_tag, 1778
__gnu_pbds::container_error, 1862
what, 1863
__gnu_pbds::container_tag, 1863
__gnu_pbds::container_traits< Cntnr >, 1864
__gnu_pbds::container_traits_base< _Tag >, 1865
__gnu_pbds::container_traits_base< binary_heap_tag >, 1865
__gnu_pbds::container_traits_base< binomial_heap_tag >, 1865
__gnu_pbds::container_traits_base< cc_hash_tag >, 1866
__gnu_pbds::container_traits_base< gp_hash_tag >, 1866
__gnu_pbds::container_traits_base< list_update_tag >, 1866
__gnu_pbds::container_traits_base< ov_tree_tag >, 1867
__gnu_pbds::container_traits_base< pairing_heap_tag >, 1867
__gnu_pbds::container_traits_base< pat_trie_tag >, 1868
__gnu_pbds::container_traits_base< rb_tree_tag >, 1868
__gnu_pbds::container_traits_base< rc_binomial_heap_tag >, 1868
__gnu_pbds::container_traits_base< splay_tree_tag >, 1869
__gnu_pbds::container_traits_base< thin_heap_tag >, 1869
__gnu_pbds::detail::bin_search_tree_node_it_
operator*, 1719
operator==, 1719
reference, 1718
value_type, 1718
__gnu_pbds::detail::bin_search_tree_traits
node_const_iterator, 1721
__gnu_pbds::detail::binary_heap< Value_Type, Cmp_Fn, _Alloc >, 1725
__gnu_pbds::detail::binary_heap_const_iterator_
const_pointer, 1729
const_reference, 1729
difference_type, 1729
iterator_category, 1729
operator*, 1730
operator->, 1730
operator==, 1730, 1731
pointer, 1729
reference, 1729
value_type, 1729
__gnu_pbds::detail::binary_heap_point_const_iterator_
operator*, 1733
operator->, 1734
operator==, 1734
pointer, 1733
reference, 1733
__gnu_pbds::detail::binomial_heap< Value_Type, Cmp_Fn, _Alloc >, 1743
__gnu_pbds::detail::cc_ht_map
empty, 1782
get_comb_hash_fn, 1782
get_eq_fn, 1782
get_hash_fn, 1782
get_resize_policy, 1782, 1783
__gnu_pbds::detail::cond_dealtor< Entry, _Alloc >, 1838
__gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, Tag, Policy_Tl >, 1851
__gnu_pbds::detail::default_comb_hash_fn, 1937
type, 1938
__gnu_pbds::detail::default_eq_fn
type, 1940
__gnu_pbds::detail::default_eq_fn< Key >, 1940
__gnu_pbds::detail::default_hash_fn
type, 1941
__gnu_pbds::detail::default_hash_fn< Key >, 1940
__gnu_pbds::detail::default_probe_fn
type, 1942

__gnu_pbds::detail::default_probe_fn< Comb_Probe_Fn >, 1942
__gnu_pbds::detail::default_resize_policy
type, 1943
__gnu_pbds::detail::default_resize_policy< Comb_Hash_Fn >, 1942
__gnu_pbds::detail::default_trie_access_traits< Key >, 1943
__gnu_pbds::detail::default_update_policy, 1944
type, 1944
__gnu_pbds::detail::dumnode_const_iterator< Key, Data, _Alloc >, 1984
__gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, false >, 2026
__gnu_pbds::detail::entry_pred< _VTp, Pred, _Alloc, true >, 2027
__gnu_pbds::detail::eq_by_less< Key, Cmp_Fn >, 2027
__gnu_pbds::detail::gp_ht_map
empty, 2110
get_comb_probe_fn, 2110
get_eq_fn, 2110
get_hash_fn, 2110
get_probe_fn, 2111
get_resize_policy, 2111
__gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, false >, 2142
__gnu_pbds::detail::hash_eq_fn< Key, Eq_Fn, _Alloc, true >, 2143
__gnu_pbds::detail::lu_counter_metadata< Size_Type >, 2321
__gnu_pbds::detail::lu_counter_policy_base< Size_Type >, 2323
__gnu_pbds::detail::lu_map< Key, Mapped, Eq_Fn, _Alloc, Update_Policy >, 2324
__gnu_pbds::detail::mask_based_range_hashing< Size_Type >, 2361
__gnu_pbds::detail::maybe_null_type< Key, Mapped, _Alloc, Store_Hash >, 2371
__gnu_pbds::detail::mod_based_range_hashing< Size_Type >, 2390
__gnu_pbds::detail::no_throw_copies< Key, Mapped >, 2484
__gnu_pbds::detail::no_throw_copies< Key, null_type >, 2485
__gnu_pbds::detail::ov_tree_map
node_begin, 2570
node_end, 2570, 2571
__gnu_pbds::detail::ov_tree_node_it_
get_l_child, 2575
get_r_child, 2575
operator*, 2575
__gnu_pbds::detail::pairing_heap< Value_Type, Cmp_Fn, _Alloc >, 2587
__gnu_pbds::detail::pat_trie_base, 2605
node_type, 2605
__gnu_pbds::detail::pat_trie_base::_Metadata< Metadata, _Alloc >, 955
__gnu_pbds::detail::pat_trie_base::_Node_citer
get_child, 962
operator*, 963
operator==, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter
get_child, 967
operator*, 967
operator==, 967
__gnu_pbds::detail::pat_trie_map
node_begin, 2609
node_end, 2609
node_type, 2608
__gnu_pbds::detail::probe_fn_base< _Alloc >, 2635
__gnu_pbds::detail::rb_tree_map
node_begin, 2674
node_end, 2674
__gnu_pbds::detail::rc< _Node, _Alloc >, 2676
__gnu_pbds::detail::rebind_traits< _Alloc, T >, 2680
__gnu_pbds::detail::resize_policy< _Tp >, 2704
__gnu_pbds::detail::select_value_type< Key, Mapped >, 2735
__gnu_pbds::detail::select_value_type< Key, null_type >, 2736
__gnu_pbds::detail::splay_tree_map
node_begin, 2799
node_end, 2799
__gnu_pbds::detail::stored_data< _Tv, _Th, Store_Hash >, 2846
__gnu_pbds::detail::stored_data< _Tv, _Th, false >, 2847
__gnu_pbds::detail::stored_hash< _Th >, 2848
__gnu_pbds::detail::stored_value< _Tv >, 2849
__gnu_pbds::detail::synth_access_traits< Type_Traits, Set, _ATraits >, 2867
__gnu_pbds::detail::thin_heap< Value_Type, Cmp_Fn, _Alloc >, 2872
__gnu_pbds::detail::tree_metadata_helper< Node_Update, _BTp >, 2917
__gnu_pbds::detail::tree_metadata_helper< Node_Update, false >, 2917
__gnu_pbds::detail::tree_metadata_helper< Node_Update, true >, 2918
__gnu_pbds::detail::trie_metadata_helper< Node_Update, _BTp >, 2937
__gnu_pbds::detail::trie_metadata_helper< Node_Update, false >, 2937
__gnu_pbds::detail::trie_metadata_helper< Node_Update, true >, 2937
__gnu_pbds::detail::types_traits< Key, Mapped, _Alloc, Store_Hash >, 2967
__gnu_pbds::direct_mask_range_hashing
operator(), 1971

__gnu_pbds::direct_mask_range_hashing< Size_Type >, 1971
__gnu_pbds::direct_mod_range_hashing
operator(), 1973
__gnu_pbds::direct_mod_range_hashing< Size_Type >, 1972
__gnu_pbds::gp_hash_table
gp_hash_table, 2102–2105
__gnu_pbds::gp_hash_tag, 2106
__gnu_pbds::hash_exponential_size_policy
hash_exponential_size_policy, 2144
__gnu_pbds::hash_exponential_size_policy< Size_Type >, 2143
__gnu_pbds::hash_load_check_resize_trigger
get_loads, 2146
notify_cleared, 2146
notify_inserted, 2146
notify_resized, 2146
set_loads, 2146
__gnu_pbds::hash_prime_size_policy, 2152
hash_prime_size_policy, 2153
size_type, 2153
__gnu_pbds::hash_standard_resize_policy
get_actual_size, 2156
get_new_size, 2156
get_size_policy, 2156, 2157
get_trigger_policy, 2157
hash_standard_resize_policy, 2156
resize, 2157
__gnu_pbds::insert_error, 2168
what, 2168
__gnu_pbds::join_error, 2255
what, 2255
__gnu_pbds::linear_probe_fn
operator(), 2275
__gnu_pbds::linear_probe_fn< Size_Type >, 2275
__gnu_pbds::list_update
list_update, 2302
__gnu_pbds::list_update< Key, Mapped, Eq_Fn, Update_Policy, _Alloc >, 2301
__gnu_pbds::list_update_tag, 2303
__gnu_pbds::lu_counter_policy
metadata_reference, 2323
metadata_type, 2323
operator(), 2323
__gnu_pbds::lu_counter_policy< Max_Count, _Alloc >, 2322
__gnu_pbds::lu_move_to_front_policy
metadata_reference, 2327
metadata_type, 2327
operator(), 2327
__gnu_pbds::lu_move_to_front_policy< _Alloc >, 2326
__gnu_pbds::null_type, 2491
__gnu_pbds::ov_tree_tag, 2576
__gnu_pbds::pairing_heap_tag, 2589
__gnu_pbds::pat_trie_tag, 2610
__gnu_pbds::point_invalidation_guarantee, 2620
__gnu_pbds::priority_queue< _Tv, Cmp_Fn, Tag, _Alloc >, 2629
__gnu_pbds::priority_queue_tag, 2634
__gnu_pbds::quadratic_probe_fn
operator(), 2641
__gnu_pbds::quadratic_probe_fn< Size_Type >, 2640
__gnu_pbds::range_invalidation_guarantee, 2650
__gnu_pbds::rb_tree_tag, 2676
__gnu_pbds::rc_binomial_heap_tag, 2680
__gnu_pbds::resize_error, 2703
what, 2703
__gnu_pbds::sample_probe_fn, 2716
operator(), 2717
sample_probe_fn, 2717
swap, 2717
__gnu_pbds::sample_range_hashing, 2717
notify_resized, 2718
operator(), 2718
sample_range_hashing, 2718
size_type, 2718
swap, 2718
__gnu_pbds::sample_ranged_hash_fn, 2718
notify_resized, 2719
operator(), 2719
sample_ranged_hash_fn, 2719
swap, 2719
__gnu_pbds::sample_ranged_probe_fn, 2719
__gnu_pbds::sample_resize_policy, 2720
get_new_size, 2721
is_resize_needed, 2721
notify_cleared, 2721
notify_erase_search_collision, 2721
notify_erase_search_end, 2721
notify_erase_search_start, 2721
notify_erased, 2721
notify_find_search_collision, 2721
notify_find_search_end, 2721
notify_find_search_start, 2721
notify_insert_search_collision, 2721
notify_insert_search_end, 2721
notify_insert_search_start, 2721
notify_inserted, 2722
notify_resized, 2722
sample_range_hashing, 2722
sample_resize_policy, 2721
size_type, 2720
swap, 2722
__gnu_pbds::sample_resize_trigger, 2722
is_grow_needed, 2723
is_resize_needed, 2723
notify_cleared, 2723

notify_erase_search_collision, 2723
notify_erase_search_end, 2723
notify_erase_search_start, 2723
notify_erased, 2723
notify_externally_resized, 2723
notify_find_search_collision, 2723
notify_find_search_end, 2724
notify_find_search_start, 2724
notify_insert_search_collision, 2724
notify_insert_search_end, 2724
notify_insert_search_start, 2724
notify_inserted, 2724
notify_resized, 2724
sample_range_hashing, 2724
sample_resize_trigger, 2723
size_type, 2723
swap, 2724
__gnu_pbds::sample_size_policy, 2724
get_nearest_larger_size, 2725
get_nearest_smaller_size, 2725
sample_range_hashing, 2725
sample_size_policy, 2725
size_type, 2725
swap, 2725
__gnu_pbds::sample_trie_access_traits, 2726
begin, 2726
e_pos, 2726
e_type, 2726
end, 2727
__gnu_pbds::sample_trie_node_update
operator(), 2727
sample_trie_node_update, 2727
__gnu_pbds::sample_update_policy, 2728
metadata_type, 2728
operator(), 2728
sample_update_policy, 2728
swap, 2728
__gnu_pbds::sequence_tag, 2739
__gnu_pbds::splay_tree_tag, 2801
__gnu_pbds::string_tag, 2850
__gnu_pbds::thin_heap_tag, 2874
__gnu_pbds::tree
cmp_fn, 2916
tree, 2917
__gnu_pbds::tree< Key, Mapped, Cmp_Fn, Tag, Node_-Update, _Alloc >, 2915
__gnu_pbds::tree_order_statistics_node_update
find_by_order, 2920
operator(), 2920
order_of_key, 2921
__gnu_pbds::tree_tag, 2921
__gnu_pbds::trie
access_traits, 2936
trie, 2936
__gnu_pbds::trie< Key, Mapped, _ATraits, Tag, Node_-Update, _Alloc >, 2935
__gnu_pbds::trie_order_statistics_node_update
find_by_order, 2940
operator(), 2940
order_of_key, 2940
order_of_prefix, 2941
__gnu_pbds::trie_prefix_search_node_update
a_const_iterator, 2945
access_traits, 2945
allocator_type, 2945
operator(), 2945
prefix_range, 2945, 2946
size_type, 2945
__gnu_pbds::trie_string_access_traits
begin, 2947
const_iterator, 2947
e_pos, 2948
e_type, 2947
end, 2948
__gnu_pbds::trie_tag, 2948
__gnu_pbds::trivial_iterator_tag, 2953
__gnu_sequential, 464
__heap_select
std, 586
__init_winner
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 937
__inner_product_selector
__gnu_parallel::__inner_product_selector, 761
__inplace_stable_sort
std, 586
__insert_start
__gnu_parallel::_LoserTree, 935
__gnu_parallel::_LoserTree< false, _Tp, _Compare >, 938
__gnu_parallel::_LoserTreeBase, 940
__insertion_sort
std, 586
__introsort_loop
std, 586
__invoke
Utilities, 372
__ioinit
std, 647
__is_sorted
__gnu_parallel, 434
__iterator_category
Iterators, 107
__lg
std, 586
__match_flag
std::regex_constants, 691
__median

SGI, 306, 307
__median_of_three_iterators
__gnu_parallel, 434
__merge_adaptive
std, 587
__merge_advance
__gnu_parallel, 435
__merge_advance_movc
__gnu_parallel, 435
__merge_advance_usual
__gnu_parallel, 436
__merge_without_buffer
std, 587
__move_median_to_first
std, 587
__move_merge
std, 587
__move_merge_adaptive
std, 587
__move_merge_adaptive_backward
std, 587
__new_val
__gnu_parallel::__replace_if_selector, 790
__gnu_parallel::__replace_selector, 791
__num_bitmaps
__gnu_cxx::__detail, 405
__num_blocks
__gnu_cxx::__detail, 405
__num_get_type
std::basic_ios, 1261
std::basic_ofstream, 1429
std::basic_ostream, 1464
std::basic_ostringstream, 1496
__num_put_type
std::basic_fstream, 1161
std::basic_ifstream, 1216
std::basic_ios, 1261
std::basic_iostream, 1291
std::basic_istream, 1343
std::basic_istringstream, 1386
std::basic_stringstream, 1659
__parallel_merge_advance
__gnu_parallel, 436
__parallel_nth_element
__gnu_parallel, 437
__parallel_partial_sort
__gnu_parallel, 437
__parallel_partial_sum
__gnu_parallel, 437
__parallel_partial_sum_basecase
__gnu_parallel, 438
__parallel_partial_sum_linear
__gnu_parallel, 438
__parallel_partition
__gnu_parallel, 439
__parallel_random_shuffle
__gnu_parallel, 439
__parallel_random_shuffle_drs
__gnu_parallel, 439
__parallel_random_shuffle_drs_pu
__gnu_parallel, 440
__parallel_sort
__gnu_parallel, 440–443
__parallel_sort_qs
__gnu_parallel, 445
__parallel_sort_qs_conquer
__gnu_parallel, 445
__parallel_sort_qs_divide
__gnu_parallel, 446
__parallel_sort_qsb
__gnu_parallel, 446
__parallel_unique_copy
__gnu_parallel, 446, 447
__partition
std, 588
__polynomial
std::regex_constants, 695
__ptr_rebind
std, 581
__qsb_conquer
__gnu_parallel, 447
__qsb_divide
__gnu_parallel, 447
__qsb_local_sort_with_helping
__gnu_parallel, 449
__random_number_pow2
__gnu_parallel, 449
__rd_log2
__gnu_parallel, 449
__replace_if_selector
__gnu_parallel::__replace_if_selector, 788
__replace_selector
__gnu_parallel::__replace_selector, 791
__reverse
std, 588
__rotate_adaptive
std, 588
__round_up_to_pow2
__gnu_parallel, 450
__sample
std, 588, 589
__search_n_aux
std, 589
__search_template
__gnu_parallel, 450
__sequential_multiway_merge
__gnu_parallel, 450
__sequential_random_shuffle

__gnu_parallel, 451
__shrink
__gnu_parallel, 451
__shrink_and_double
__gnu_parallel, 451
__stable_partition_adaptive
std, 589
__static_pointer_cast
__gnu_cxx, 394
__streambuf_type
std::basic_streambuf, 1539
std::wbuffer_convert, 3126
__syntax_option
std::regex_constants, 691
__umap_traits
std, 581
__ummap_traits
std, 581
__umset_traits
std, 581
__unguarded_insertion_sort
std, 589
__unguarded_linear_insert
std, 589
__unguarded_partition
std, 590
__unguarded_partition_pivot
std, 590
__unique_copy
std, 590
__uset_traits
std, 581
__valid_range
__gnu_debug, 413, 414
__valid_range_aux
__gnu_debug, 414
__verbose_terminate_handler
Exceptions, 71
__versa_string
__gnu_cxx::__versa_string, 800–802
__yield
__gnu_parallel, 452

a
std::extreme_value_distribution, 2041
std::weibull_distribution, 3142
a_const_iterator
__gnu_pbds::trie_prefix_search_node_update, 2945
abi, 464
abs
Complex Numbers, 46
access_traits
__gnu_pbds::trie, 2936
__gnu_pbds::trie_prefix_search_node_update, 2945
accumulate
Generalized Numeric operations, 79, 81
accumulate_minimal_n
__gnu_parallel::_Settings, 1043
acos
std, 591
acosh
std, 591
Adaptors for pointers to functions, 2
ptr_fun, 3
Adaptors for pointers to members, 4
add_const_t
Metaprogramming, 145
add_cv_t
Metaprogramming, 145
add_lvalue_reference_t
Metaprogramming, 145
add_pointer_t
Metaprogramming, 145
add_rvalue_reference_t
Metaprogramming, 146
add_volatile_t
Metaprogramming, 146
addressof
Utilities, 372
adjacent_difference
Generalized Numeric operations, 81
adjacent_difference_minimal_n
__gnu_parallel::_Settings, 1043
adjacent_find
Non-Mutating, 179
adjustfield
std::basic_fstream, 1204
std::basic_ifstream, 1251
std::basic_ios, 1279
std::basic_iostream, 1333
std::basic_istream, 1375
std::basic_istringstream, 1419
std::basic_ofstream, 1454
std::basic_ostream, 1485
std::basic_ostringstream, 1520
std::basic_stringstream, 1700
std::ios_base, 2186
adopt_lock
Mutexes, 173
advance
std, 591
airy_ai
Mathematical Special Functions, 118
airy_aif
Mathematical Special Functions, 118
airy_ail
Mathematical Special Functions, 118
airy_bi

Mathematical Special Functions, 118
airy_bif
Mathematical Special Functions, 118
airy_bil
Mathematical Special Functions, 119
algo.h, 3148
algobase.h, 3158
algorithm, 3159–3161
algorithmfwd.h, 3162, 3167
Algorithms, 5
align
Memory, 139
aligned_buffer.h, 3176
aligned_storage_t
Metaprogramming, 146
alignment_value
Metaprogramming, 148
all
std::bitset, 1757
std::locale, 2310
std::tr2::dynamic_bitset, 1992
all_of
Non-Mutating, 179
alloc_traits.h, 3176, 3177
allocate
__gnu_cxx::__alloc_traits, 714
std::allocator_traits, 1066
std::allocator_traits< allocator< _Tp > >, 1071
allocate_shared
Pointer Abstractions, 242
allocated_ptr.h, 3178
allocator.h, 3178
allocator_type
__gnu_pbds::trie_prefix_search_node_update, 2945
std::allocator_traits, 1064
std::allocator_traits< allocator< _Tp > >, 1070
std::set, 2748
std::unordered_map, 2994
std::unordered_multimap, 3022
std::unordered_multiset, 3046
std::unordered_set, 3071
Allocators, 6
__allocator_base, 7
operator==, 7
alpha
std::gamma_distribution, 2096
any, 3179
std::bitset, 1758
std::experimental::fundamentals_v1::any, 1076, 1077
std::tr2::dynamic_bitset, 1992
any_cast
Type-safe container of any type, 360–362
any_of
Non-Mutating, 179
app
std::basic_fstream, 1204
std::basic_ifstream, 1251
std::basic_ios, 1279
std::basic_iostream, 1333
std::basic_istream, 1375
std::basic_istringstream, 1419
std::basic_ofstream, 1454
std::basic_ostream, 1485
std::basic_ostringstream, 1521
std::basic_stringstream, 1700
std::ios_base, 2186
append
__gnu_cxx::__versa_string, 802–804
__gnu_debug::basic_string, 1561, 1563
std::basic_string, 1587, 1588
std::tr2::dynamic_bitset, 1992
apply
Numeric Arrays, 215
apply_generator
__gnu_cxx::typelist, 406
arg
Complex Numbers, 46
std, 592
argument_type
__gnu_cxx::__detail::_Ffit_finder, 875
__gnu_cxx::binary_compose, 1723
__gnu_cxx::select1st, 2734
__gnu_cxx::select2nd, 2735
__gnu_cxx::subtractive_rng, 2866
__gnu_cxx::unary_compose, 2969
__gnu_parallel::__binder1st, 724
__gnu_parallel::__binder2nd, 726
__gnu_parallel::__unary_negate, 796
std::binder1st, 1737
std::binder2nd, 1738
std::const_mem_fun_ref_t, 1847
std::const_mem_fun_t, 1848
std::hash< __gnu_cxx::throw_value_limit >, 2124
std::hash< __gnu_cxx::throw_value_random >, 2125
std::logical_not, 2315
std::mem_fun_ref_t, 2375
std::mem_fun_t, 2377
std::negate, 2478
std::pointer_to_unary_function, 2623
std::unary_function, 2970
std::unary_negate, 2971
Arithmetic Classes, 8
array, 3180–3182
Array creation functions, 9
make_array, 9
to_array, 9
asin

std, 592
asinh
std, 592
assertions.h, 3183
assign
__gnu_cxx::__versa_string, 805–807
__gnu_debug::basic_string, 1563, 1565
std::basic_regex, 1530, 1531, 1533
std::basic_string, 1590–1592
std::deque, 1955, 1956
std::forward_list, 2061
std::list, 2287, 2288
std::vector, 3104
assoc_container.hpp, 3183
assoc_laguerre
Mathematical Special Functions, 119
TR1 Mathematical Special Functions, 345
assoc_laguerref
Mathematical Special Functions, 119
assoc_laguerrel
Mathematical Special Functions, 119
assoc_legendre
Mathematical Special Functions, 120
TR1 Mathematical Special Functions, 345
assoc_legendref
Mathematical Special Functions, 120
assoc_legendrel
Mathematical Special Functions, 120
Associative, 10
async
Futures, 78
at
__gnu_cxx::__versa_string, 808
__gnu_debug::basic_string, 1565
std::basic_string, 1592, 1593
std::deque, 1956
std::map, 2339
std::unordered_map, 2999
std::vector, 3104, 3105
atan
std, 592
atanh
std, 592
ate
std::basic_fstream, 1204
std::basic_ifstream, 1251
std::basic_ios, 1279
std::basic_iostream, 1333
std::basic_istream, 1375
std::basic_istringstream, 1419
std::basic_ofstream, 1454
std::basic_ostream, 1485
std::basic_ostringstream, 1521
std::basic_stringstream, 1700
std::ios_base, 2186
atomic, 3184
atomic_base.h, 3188
atomic_bool
Atomics, 15
atomic_char
Atomics, 15
atomic_char16_t
Atomics, 16
atomic_char32_t
Atomics, 16
atomic_compare_exchange_strong_explicit
Pointer Abstractions, 242
atomic_exchange_explicit
Pointer Abstractions, 243
atomic_futex.h, 3189
atomic_int
Atomics, 16
atomic_int16_t
Atomics, 16
atomic_int32_t
Atomics, 16
atomic_int64_t
Atomics, 16
atomic_int8_t
Atomics, 16
atomic_int_fast16_t
Atomics, 16
atomic_int_fast32_t
Atomics, 16
atomic_int_fast64_t
Atomics, 16
atomic_int_fast8_t
Atomics, 17
atomic_int_least16_t
Atomics, 17
atomic_int_least32_t
Atomics, 17
atomic_int_least64_t
Atomics, 17
atomic_int_least8_t
Atomics, 17
atomic_intmax_t
Atomics, 17
atomic_intptr_t
Atomics, 17
atomic_is_lock_free
Pointer Abstractions, 243
atomic_llong
Atomics, 17
atomic_load_explicit
Pointer Abstractions, 243
atomic_lockfree_defines.h, 3189
atomic_long

Atomics, 17
atomic_ptrdiff_t
Atomics, 17
atomic_schar
Atomics, 18
atomic_short
Atomics, 18
atomic_size_t
Atomics, 18
atomic_store_explicit
Pointer Abstractions, 243
atomic_uchar
Atomics, 18
atomic_uint
Atomics, 18
atomic_uint16_t
Atomics, 18
atomic_uint32_t
Atomics, 18
atomic_uint64_t
Atomics, 18
atomic_uint8_t
Atomics, 18
atomic_uint_fast16_t
Atomics, 18
atomic_uint_fast32_t
Atomics, 19
atomic_uint_fast64_t
Atomics, 19
atomic_uint_fast8_t
Atomics, 19
atomic_uint_least16_t
Atomics, 19
atomic_uint_least32_t
Atomics, 19
atomic_uint_least64_t
Atomics, 19
atomic_uint_least8_t
Atomics, 19
atomic_uintmax_t
Atomics, 19
atomic_uintptr_t
Atomics, 19
atomic_ullong
Atomics, 19
atomic_ulong
Atomics, 20
atomic_ushort
Atomics, 20
atomic_wchar_t
Atomics, 20
atomic_word.h, 3190
atomicity.h, 3190
Atomics, 11
atomic_bool, 15
atomic_char, 15
atomic_char16_t, 16
atomic_char32_t, 16
atomic_int, 16
atomic_int16_t, 16
atomic_int32_t, 16
atomic_int64_t, 16
atomic_int8_t, 16
atomic_int_fast16_t, 16
atomic_int_fast32_t, 16
atomic_int_fast64_t, 16
atomic_int_fast8_t, 17
atomic_int_least16_t, 17
atomic_int_least32_t, 17
atomic_int_least64_t, 17
atomic_int_least8_t, 17
atomic_intmax_t, 17
atomic_intptr_t, 17
atomic_llong, 17
atomic_long, 17
atomic_ptrdiff_t, 17
atomic_schar, 18
atomic_short, 18
atomic_size_t, 18
atomic_uchar, 18
atomic_uint, 18
atomic_uint16_t, 18
atomic_uint32_t, 18
atomic_uint64_t, 18
atomic_uint8_t, 18
atomic_uint_fast16_t, 18
atomic_uint_fast32_t, 19
atomic_uint_fast64_t, 19
atomic_uint_fast8_t, 19
atomic_uint_least16_t, 19
atomic_uint_least32_t, 19
atomic_uint_least64_t, 19
atomic_uint_least8_t, 19
atomic_uintmax_t, 19
atomic_uintptr_t, 19
atomic_ullong, 19
atomic_ulong, 20
atomic_ushort, 20
atomic_wchar_t, 20
kill_dependency, 20
memory_order, 20
auto_ptr
std::auto_ptr, 1114, 1115
auto_ptr.h, 3191
awk
std::regex_constants, 695

b

std::extreme_value_distribution, 2041
std::weibull_distribution, 3142
back
__gnu_cxx::__versa_string, 808, 809
__gnu_debug::basic_string, 1566
std::basic_string, 1593
std::deque, 1957
std::list, 2288
std::queue, 2643
std::vector, 3105
back_insert_iterator
std::back_insert_iterator, 1119
back_inserter
Iterators, 107
backward_warning.h, 3191
bad
std::basic_fstream, 1164
std::basic_ifstream, 1221
std::basic_ios, 1265
std::basic_iostream, 1294
std::basic_istream, 1346
std::basic_istringstream, 1390
std::basic_ofstream, 1432
std::basic_ostream, 1467
std::basic_ostringstream, 1500
std::basic_stringstream, 1663
badbit
std::basic_fstream, 1204
std::basic_ifstream, 1252
std::basic_ios, 1279
std::basic_iostream, 1333
std::basic_istream, 1376
std::basic_istringstream, 1419
std::basic_ofstream, 1454
std::basic_ostream, 1485
std::basic_ostringstream, 1521
std::basic_stringstream, 1700
std::ios_base, 2186
balanced_quicksort.h, 3191
base
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_local_iterator, 1016
std::discard_block_engine, 1975
std::independent_bits_engine, 2162
std::reverse_iterator, 2707
std::shuffle_order_engine, 2789
Base and Implementation Classes, 21, 24
_Opcode, 25
__clp2, 23
Base and Policy Classes, 26–28
base.h, 3192
basefield
std::basic_fstream, 1204
std::basic_ifstream, 1252
std::basic_ios, 1279
std::basic_iostream, 1333
std::basic_istream, 1376
std::basic_istringstream, 1419
std::basic_ofstream, 1455
std::basic_ostream, 1486
std::basic_ostringstream, 1521
std::basic_stringstream, 1701
std::ios_base, 2186
basic
std::regex_constants, 695
basic_file.h, 3193
basic_filebuf
std::basic_filebuf, 1136
basic_fstream
std::basic_fstream, 1163
basic_ifstream
std::basic_ifstream, 1220
basic_ios
std::basic_ios, 1264
basic_ios.h, 3193
basic_ios.tcc, 3194
basic_iostream
std::basic_iostream, 1293
basic_istream
std::basic_istream, 1345
basic_istringstream
std::basic_istringstream, 1389
basic_iterator.h, 3194
basic_ofstream
std::basic_ofstream, 1431
basic_ostream
std::basic_ostream, 1466
basic_ostringstream
std::basic_ostringstream, 1498
basic_regex
std::basic_regex, 1527, 1529, 1530
basic_streambuf
std::basic_streambuf, 1540
basic_string
std::basic_string, 1584–1586
basic_string.h, 3194
basic_string.tcc, 3197
basic_stringbuf
std::basic_stringbuf, 1635, 1636
basic_stringstream
std::basic_stringstream, 1661
before_begin
std::forward_list, 2063
beg
std::basic_fstream, 1205
std::basic_ifstream, 1252
std::basic_ios, 1280
std::basic_iostream, 1334

std::basic_istream, 1376
std::basic_istringstream, 1420
std::basic_ofstream, 1455
std::basic_ostream, 1486
std::basic_ostringstream, 1521
std::basic_stringstream, 1701
std::ios_base, 2187
begin
__gnu_cxx::__versa_string, 809
__gnu_cxx::temporary_buffer, 2871
__gnu_parallel::_PseudoSequence, 980
__gnu_pbds::sample_trie_access_traits, 2726
__gnu_pbds::trie_string_access_traits, 2947
Numeric Arrays, 215, 216
std, 592, 593
std::_Temporary_buffer, 1052
std::basic_string, 1593
std::deque, 1957
std::forward_list, 2063
std::initializer_list, 2166
std::list, 2288
std::map, 2340
std::match_results, 2366
std::multimap, 2431
std::multiset, 2455
std::set, 2752
std::unordered_map, 3000
std::unordered_multimap, 3026
std::unordered_multiset, 3049, 3051
std::unordered_set, 3076
std::vector, 3105, 3106
Bernoulli Distributions, 29
operator<<, 30
operator>>, 31
bernoulli_distribution
std::bernoulli_distribution, 1706
beta
Mathematical Special Functions, 120
std::gamma_distribution, 2096
TR1 Mathematical Special Functions, 345
betaf
Mathematical Special Functions, 121
betal
Mathematical Special Functions, 121
bin_search_tree_.hpp, 3198
binary
std::basic_fstream, 1205
std::basic_ifstream, 1252
std::basic_ios, 1280
std::basic_iostream, 1334
std::basic_istream, 1376
std::basic_istringstream, 1420
std::basic_ofstream, 1455
std::basic_ostream, 1486
std::basic_ostringstream, 1521
std::basic_stringstream, 1701
std::ios_base, 2187
Binary Search, 32
binary_search, 33
equal_range, 33, 34
lower_bound, 34, 35
upper_bound, 35
binary_heap_.hpp, 3198
binary_heap_const_iterator_
__gnu_pbds::detail::binary_heap_const_iterator_, 1730
binary_search
Binary Search, 33
bind
Binder Classes, 38
bind1st
Binder Classes, 38
bind2nd
Binder Classes, 38
Binder Classes, 37
bind, 38
bind1st, 38
bind2nd, 38
binders.h, 3199
binomial_heap_.hpp, 3199
binomial_heap_base_.hpp, 3200
bit, 3200
Bit manipulation, 39
bitmap_allocator.h, 3200
bitset, 3201, 3202
std::bitset, 1756, 1757
bool_set, 3203
std::tr2::bool_set, 1764
bool_set.tcc, 3204
boolalpha
std, 593
std::basic_fstream, 1205
std::basic_ifstream, 1252
std::basic_ios, 1280
std::basic_iostream, 1334
std::basic_istream, 1376
std::basic_istringstream, 1420
std::basic_ofstream, 1455
std::basic_ostream, 1486
std::basic_ostringstream, 1522
std::basic_stringstream, 1701
std::ios_base, 2187
Boolean Operations Classes, 40
boost_concept_check.h, 3204
Branch-Based, 41
branch_policy.hpp, 3205
bucket
__gnu_debug::_Safe_local_iterator, 1016

bucket_count
std::unordered_map, 3001
std::unordered_multimap, 3026
std::unordered_multiset, 3051
std::unordered_set, 3077

c
std::queue, 2645
c++0x_warning.h, 3205
c++allocator.h, 3206
c++config.h, 3206
c++io.h, 3210
c++locale.h, 3211
c_str
__gnu_cxx::__versa_string, 809
std::basic_string, 1593
cache_line_size
__gnu_parallel::_Settings, 1043
call_once
Mutexes, 172
std::once_flag, 2556
capacity
__gnu_cxx::__versa_string, 809
__gnu_debug::basic_string, 1566
std::basic_string, 1594
std::vector, 3106
cassert, 3211
cast.h, 3211
category
std::locale, 2305
cbefore_begin
std::forward_list, 2063
cbegin
__gnu_cxx::__versa_string, 809
std, 593
std::basic_string, 1594
std::deque, 1957
std::forward_list, 2063
std::list, 2288
std::map, 2340
std::match_results, 2367
std::multimap, 2431
std::multiset, 2455
std::set, 2752
std::unordered_map, 3001
std::unordered_multimap, 3027
std::unordered_multiset, 3051
std::unordered_set, 3077
std::vector, 3106
cc_hash_max_collision_check_resize_trigger_imp.hpp, 3212
cc_hash_table
__gnu_pbds::cc_hash_table, 1775–1777
cc_ht_map_.hpp, 3212
ccomplex, 3213
cctype, 3213, 3214
cend
__gnu_cxx::__versa_string, 810
std, 593
std::basic_string, 1594
std::deque, 1957
std::forward_list, 2064
std::list, 2289
std::map, 2340
std::match_results, 2367
std::multimap, 2431
std::multiset, 2455
std::set, 2752
std::unordered_map, 3001
std::unordered_multimap, 3027
std::unordered_multiset, 3051
std::unordered_set, 3077
std::vector, 3106
cerr
std, 647
cerrno, 3214
cfenv, 3214
cfloat, 3215
char_traits.h, 3215
char_type
std::__ctype_abstract_base, 735
std::basic_ios, 1261
std::basic_streambuf, 1539
std::collate, 1823
std::collate_byname, 1830
std::ctype< char >, 1884
std::ctype< wchar_t >, 1896
std::ctype_byname< char >, 1923
std::istreambuf_iterator, 2248
std::messages, 2384
std::money_get, 2395
std::money_put, 2399
std::moneypunct, 2405
std::num_get, 2495
std::num_put, 2509
std::numpunct, 2543
std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
std::time_get, 2887
std::time_put, 2908
std::wbuffer_convert, 3126
charconv, 3216
charconv.h, 3218
chars_format
std, 583
checkers.h, 3218
chrono, 3218, 3220
cin

std, 647
cinttypes, 3220, 3221
ciso646, 3221
classic
std::locale, 2307
classic_table
std::ctype< char >, 1884
std::ctype_byname< char >, 1923
clear
__gnu_cxx::__versa_string, 810
std::basic_fstream, 1165
std::basic_ifstream, 1221
std::basic_ios, 1265
std::basic_iostream, 1294
std::basic_istream, 1346
std::basic_istringstream, 1390
std::basic_ofstream, 1433
std::basic_ostream, 1467
std::basic_ostringstream, 1501
std::basic_string, 1594
std::basic_stringstream, 1664
std::deque, 1957
std::experimental::fundamentals_v1::any, 1077
std::forward_list, 2064
std::list, 2289
std::map, 2340
std::multimap, 2431
std::multiset, 2455
std::set, 2752
std::tr2::dynamic_bitset, 1992
std::unordered_map, 3002
std::unordered_multimap, 3027
std::unordered_multiset, 3053
std::unordered_set, 3077
std::vector, 3106
climits, 3221
clocale, 3222
clog
std, 647
close
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2809
std::basic_filebuf, 1137
std::basic_fstream, 1165
std::basic_ifstream, 1221
std::basic_ofstream, 1433
cmath, 3222, 3225, 3226
cmp_fn
__gnu_pbds::tree, 2916
cmp_fn_imps.hpp, 3228
code
std::regex_error, 2687
codecvt, 3229
codecvt.h, 3229
codecvt_specializations.h, 3230
collate
std::collate, 1823, 1825
std::locale, 2310
std::regex_constants, 695
combine
std::locale, 2307
common_type_t
Metaprogramming, 146
comp_ellint_1
Mathematical Special Functions, 121
TR1 Mathematical Special Functions, 345
comp_ellint_1f
Mathematical Special Functions, 122
comp_ellint_1l
Mathematical Special Functions, 122
comp_ellint_2
Mathematical Special Functions, 122
TR1 Mathematical Special Functions, 345
comp_ellint_2f
Mathematical Special Functions, 123
comp_ellint_2l
Mathematical Special Functions, 123
comp_ellint_3
Mathematical Special Functions, 123
TR1 Mathematical Special Functions, 345
comp_ellint_3f
Mathematical Special Functions, 124
comp_ellint_3l
Mathematical Special Functions, 124
compare, 3230
__gnu_cxx::__versa_string, 810–812
__gnu_debug::basic_string, 1566, 1567
std::basic_string, 1594, 1595, 1597
std::collate, 1825
std::collate_byname, 1830
std::sub_match, 2858, 2859
Comparison Classes, 42
compatibility.h, 3230
compiletime_settings.h, 3231
_GLIBCXX_CALL, 3231
complex, 3232, 3237
std::complex, 1835
Complex Numbers, 43
abs, 46
arg, 46
conj, 46
cos, 47
cosh, 47
exp, 47
fabs, 47
log, 47
log10, 47
norm, 47

operator<<, 50
operator>>, 51
operator*, 48
operator*=, 48
operator+, 48, 49
operator+=, 49
operator-, 49
operator-=, 49
operator/, 49, 50
operator/=, 50
operator=, 50
operator==, 50, 51
polar, 51
pow, 51, 52
sin, 52
sinh, 52
sqrt, 52
tan, 52
tanh, 52
complex.h, 3238
compose1
SGI, 308
compose2
SGI, 308
concept_check.h, 3238
concepts, 3238
concurrence.h, 3239
Concurrency, 53
cond_dealtor.hpp, 3239
cond_key_dtor_entry_dealtor.hpp, 3239
Condition Variables, 54
cv_status, 54
condition_variable, 3240
conditional_t
Metaprogramming, 146
conf_hyperg
Mathematical Special Functions, 124
TR1 Mathematical Special Functions, 346
conf_hypergf
Mathematical Special Functions, 124
conf_hypergl
Mathematical Special Functions, 124
conj
Complex Numbers, 46
Const-propagating wrapper, 55
const_iterator
__gnu_pbds::trie_string_access_traits, 2947
std::set, 2748
std::unordered_map, 2994
std::unordered_multimap, 3022
std::unordered_multiset, 3046
std::unordered_set, 3071
const_iterator.hpp, 3240, 3241
const_local_iterator
std::unordered_map, 2994
std::unordered_multimap, 3023
std::unordered_multiset, 3046
std::unordered_set, 3071
const_pointer
__gnu_pbds::detail::binary_heap_const_iterator_, 1729
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1732
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2263
std::allocator_traits, 1064
std::allocator_traits< allocator< _Tp > >, 1070
std::set, 2748
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3046
std::unordered_set, 3072
const_pointer_cast
Pointer Abstractions, 244
std, 593
const_reference
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1717
__gnu_pbds::detail::binary_heap_const_iterator_, 1729
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1732
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2263
std::set, 2748
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3046
std::unordered_set, 3072
const_reverse_iterator
std::set, 2748
const_void_pointer
__gnu_cxx::__alloc_traits, 713
std::allocator_traits, 1065
std::allocator_traits< allocator< _Tp > >, 1070
constant0
SGI, 308
constant1
SGI, 309
constant2
SGI, 309
construct
__gnu_cxx::__alloc_traits, 715

std::allocator_traits, 1067
std::allocator_traits< allocator< _Tp > >, 1072
constructor_destructor_fn_imps.hpp, 3241, 3242
constructor_destructor_no_store_hash_fn_imps.hpp, 3242
constructor_destructor_store_hash_fn_imps.hpp, 3242
constructors_destructor_fn_imps.hpp, 3242–3244
container_base_dispatch.hpp, 3244
container_type
std::back_insert_iterator, 1118
std::front_insert_iterator, 2078
std::insert_iterator, 2170
Containers, 57, 58
converted
std::wstring_convert, 3146
copy
__gnu_cxx::__versa_string, 813
Mutating, 151
std::basic_string, 1598
copy_backward
Mutating, 151
copy_if
Mutating, 151
copy_n
Mutating, 153
SGI, 309
copyfmt
std::basic_fstream, 1165
std::basic_ifstream, 1221
std::basic_ios, 1265
std::basic_iostream, 1294
std::basic_istream, 1347
std::basic_istringstream, 1390
std::basic_ofstream, 1433
std::basic_ostream, 1467
std::basic_ostringstream, 1501
std::basic_stringstream, 1664
cos
Complex Numbers, 47
cosh
Complex Numbers, 47
count
Non-Mutating, 181
std::bitset, 1758
std::map, 2341
std::multimap, 2431, 2433
std::multiset, 2456
std::set, 2752
std::tr2::dynamic_bitset, 1992
std::unordered_map, 3002
std::unordered_multimap, 3027
std::unordered_multiset, 3053
std::unordered_set, 3078
count_if
Non-Mutating, 181
count_minimal_n
__gnu_parallel::_Settings, 1043
cout
std, 647
cpp_type_traits.h, 3245
cpu_defines.h, 3246
crbegin
__gnu_cxx::__versa_string, 813
std, 594
std::basic_string, 1598
std::deque, 1958
std::list, 2289
std::map, 2341
std::multimap, 2433
std::multiset, 2456
std::set, 2754
std::vector, 3106
cref
std::reference_wrapper, 2685
cregex_token_iterator
Regular Expressions, 274
crend
__gnu_cxx::__versa_string, 813
std, 594
std::basic_string, 1598
std::deque, 1958
std::list, 2289
std::map, 2341
std::multimap, 2433
std::multiset, 2456
std::set, 2754
std::vector, 3106
csetjmp, 3246
cshift
Numeric Arrays, 216
csignal, 3246
cstdalign, 3247
cstdarg, 3247
cstdbool, 3248
cstddef, 3248
cstdint, 3249
cstdio, 3249, 3250
cstdlib, 3250
cstring, 3251
csub_match
Regular Expressions, 274
ctgmath, 3251
ctime, 3252
ctype
std::ctype< char >, 1884
std::ctype< wchar_t >, 1896
std::locale, 2310
ctype_inline.h, 3252

cuchar, 3253
cur
    std::basic_fstream, 1205
    std::basic_ifstream, 1252
    std::basic_ios, 1280
    std::basic_iostream, 1334
    std::basic_istream, 1376
    std::basic_istringstream, 1420
    std::basic_ofstream, 1455
    std::basic_ostream, 1486
    std::basic_ostringstream, 1522
    std::basic_stringstream, 1701
    std::ios_base, 2187
curr_symbol
    std::moneypunct, 2406
    std::moneypunct_byname, 2414
current_exception
    Exceptions, 71
cv_status
    Condition Variables, 54
cwchar, 3253
cwctype, 3254
cxxabi.h, 3255
cxxabi_forced.h, 3256
cxxabi_init_exception.h, 3256
cxxabi_tweaks.h, 3257
cyl_bessel_i
    Mathematical Special Functions, 125
    TR1 Mathematical Special Functions, 346
cyl_bessel_if
    Mathematical Special Functions, 125
cyl_bessel_il
    Mathematical Special Functions, 125
cyl_bessel_j
    Mathematical Special Functions, 125
    TR1 Mathematical Special Functions, 346
cyl_bessel_jf
    Mathematical Special Functions, 126
cyl_bessel_jl
    Mathematical Special Functions, 126
cyl_bessel_k
    Mathematical Special Functions, 126
    TR1 Mathematical Special Functions, 346
cyl_bessel_kf
    Mathematical Special Functions, 127
cyl_bessel_kl
    Mathematical Special Functions, 127
cyl_neumann
    Mathematical Special Functions, 127
    TR1 Mathematical Special Functions, 346
cyl_neumannf
    Mathematical Special Functions, 128
cyl_neumannl
    Mathematical Special Functions, 128
data
    __gnu_cxx::__versa_string, 813
    std::basic_string, 1598
    std::vector, 3107
Data Structure Type, 59
date_order
    std::time_get, 2887
    std::time_get_byname, 2897
deallocate
    __gnu_cxx::__alloc_traits, 715
    std::allocator_traits, 1067
    std::allocator_traits< allocator< _Tp > >, 1072
debug.h, 3257
debug_allocator.h, 3258
debug_fn_imps.hpp, 3259–3261
debug_map_base.hpp, 3261
debug_no_store_hash_fn_imps.hpp, 3261
debug_store_hash_fn_imps.hpp, 3261, 3262
dec
    std, 594
    std::basic_fstream, 1205
    std::basic_ifstream, 1253
    std::basic_ios, 1280
    std::basic_iostream, 1334
    std::basic_istream, 1377
    std::basic_istringstream, 1420
    std::basic_ofstream, 1455
    std::basic_ostream, 1486
    std::basic_ostringstream, 1522
    std::basic_stringstream, 1702
    std::ios_base, 2187
decay_t
    Metaprogramming, 146
decimal, 3262
Decimal Floating-Point Arithmetic, 60
decimal128
    std::decimal::decimal128, 1934
decimal32
    std::decimal::decimal32, 1936
decimal32_to_long_long
    std::decimal, 686
decimal64
    std::decimal::decimal64, 1937
decimal_point
    std::moneypunct, 2406
    std::moneypunct_byname, 2414
    std::numpunct, 2544
    std::numpunct_byname, 2549
declare_no_pointers
    Pointer Safety and Garbage Collection, 250
declare_reachable
    Pointer Safety and Garbage Collection, 250
default_delete
    std::default_delete, 1938

defaultfloat
std, 594
defer_lock
Mutexes, 173
denorm_absent
std, 583
denorm_indeterminate
std, 583
denorm_present
std, 583
denorm_min
std::numeric_limits, 2519
densities
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2615
deque, 3271, 3272
std::deque, 1950, 1951
deque.tcc, 3273
destroy
__gnu_cxx::__alloc_traits, 715
std::allocator_traits, 1067
std::allocator_traits< allocator< _Tp > >, 1072
Diagnostics, 61
generic_category, 63
make_error_code, 63
make_error_condition, 63
operator<, 63
operator==, 63
system_category, 63
difference_type
__gnu_pbds::detail::bin_search_tree_const_node_it-
_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1717
__gnu_pbds::detail::binary_heap_const_iterator_,
1729
__gnu_pbds::detail::binary_heap_point_const_-
iterator_, 1732
__gnu_pbds::detail::left_child_next_sibling_heap_-
const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_-
node_point_const_iterator_, 2263
std::allocator_traits, 1065
std::allocator_traits< allocator< _Tp > >, 1070
std::back_insert_iterator, 1118
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istream_iterator, 2245
std::istreambuf_iterator, 2248
std::iterator, 2251
std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
std::pointer_traits, 2623
std::pointer_traits< _Tp * >, 2624
std::raw_storage_iterator, 2665
std::set, 2748
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3047
std::unordered_set, 3072
digits
std::__numeric_limits_base, 774
std::numeric_limits, 2520
digits10
std::__numeric_limits_base, 774
std::numeric_limits, 2521
direct_mask_range_hashing_imp.hpp, 3274
direct_mod_range_hashing_imp.hpp, 3274
discard
std::discard_block_engine, 1975
std::independent_bits_engine, 2162
std::linear_congruential_engine, 2272
std::mersenne_twister_engine, 2379
std::shuffle_order_engine, 2789
std::subtract_with_carry_engine, 2863
discard_block_engine
std::discard_block_engine, 1974, 1975
distance
SGI, 309
std, 594
do_compare
std::collate, 1825
std::collate_byname, 1831
do_curr_symbol
std::moneypunct, 2406
std::moneypunct_byname, 2414
do_date_order
std::time_get, 2887
std::time_get_byname, 2898
do_decimal_point
std::moneypunct, 2406
std::moneypunct_byname, 2415
std::numpunct, 2545
std::numpunct_byname, 2549
do_falsename
std::numpunct, 2545
std::numpunct_byname, 2550
do_frac_digits
std::moneypunct, 2407
std::moneypunct_byname, 2415
do_get
std::money_get, 2396
std::num_get, 2495–2500
std::time_get, 2888
std::time_get_byname, 2898
do_get_date
std::time_get, 2888
std::time_get_byname, 2899
do_get_monthname

std::time_get, 2889
std::time_get_byname, 2899
do_get_time
std::time_get, 2889
std::time_get_byname, 2900
do_get_weekday
std::time_get, 2890
std::time_get_byname, 2900
do_get_year
std::time_get, 2890
std::time_get_byname, 2901
do_grouping
std::moneypunct, 2407
std::moneypunct_byname, 2415
std::numpunct, 2545
std::numpunct_byname, 2550
do_hash
std::collate, 1826
std::collate_byname, 1831
do_is
std::__ctype_abstract_base, 735
std::ctype, 1872
std::ctype< wchar_t >, 1896, 1898
std::ctype_byname, 1912
do_narrow
std::__ctype_abstract_base, 736
std::ctype, 1873
std::ctype< char >, 1885
std::ctype< wchar_t >, 1898
std::ctype_byname, 1912, 1913
std::ctype_byname< char >, 1923, 1924
do_neg_format
std::moneypunct, 2407
std::moneypunct_byname, 2416
do_negative_sign
std::moneypunct, 2408
std::moneypunct_byname, 2416
do_out
std::__codecvt_abstract_base, 728
std::codecvt, 1794
std::codecvt< _InternT, _ExternT, encoding_state >, 1798
std::codecvt< char, char, mbstate_t >, 1803
std::codecvt< char16_t, char, mbstate_t >, 1806
std::codecvt< char32_t, char, mbstate_t >, 1810
std::codecvt< wchar_t, char, mbstate_t >, 1814
std::codecvt_byname, 1819
do_pos_format
std::moneypunct, 2408
std::moneypunct_byname, 2416
do_positive_sign
std::moneypunct, 2408
std::moneypunct_byname, 2417
do_put
std::money_put, 2400, 2401
std::num_put, 2510–2512
std::time_put, 2909
std::time_put_byname, 2912
do_scan_is
std::__ctype_abstract_base, 738
std::ctype, 1873
std::ctype< wchar_t >, 1899
std::ctype_byname, 1913
do_scan_not
std::__ctype_abstract_base, 738
std::ctype, 1874
std::ctype< wchar_t >, 1899
std::ctype_byname, 1913
do_thousands_sep
std::moneypunct, 2409
std::moneypunct_byname, 2417
std::numpunct, 2545
std::numpunct_byname, 2550
do_tolower
std::__ctype_abstract_base, 738, 739
std::ctype, 1874, 1875
std::ctype< char >, 1885, 1886
std::ctype< wchar_t >, 1900
std::ctype_byname, 1914
std::ctype_byname< char >, 1924
do_toupper
std::__ctype_abstract_base, 739, 740
std::ctype, 1875
std::ctype< char >, 1886
std::ctype< wchar_t >, 1900, 1902
std::ctype_byname, 1915
std::ctype_byname< char >, 1925
do_transform
std::collate, 1826
std::collate_byname, 1831
do_truename
std::numpunct, 2546
std::numpunct_byname, 2550
do_widen
std::__ctype_abstract_base, 740
std::ctype, 1876
std::ctype< char >, 1887
std::ctype< wchar_t >, 1902
std::ctype_byname, 1915, 1916
std::ctype_byname< char >, 1925, 1926
duration_cast
Time, 354
Dynamic Bitset., 64
operator<<, 65
operator<=, 66
operator>, 66
operator>>, 66
operator>=, 66

operator$\Gamma A30C$, 67
operator^, 66
operator-, 65
operator&, 65
dynamic_bitset, 3274
std::tr2::dynamic_bitset, 1990, 1991
dynamic_bitset.tcc, 3276
dynamic_pointer_cast
Pointer Abstractions, 244
std, 595

e_pos
__gnu_pbds::sample_trie_access_traits, 2726
__gnu_pbds::trie_string_access_traits, 2948
e_type
__gnu_pbds::sample_trie_access_traits, 2726
__gnu_pbds::trie_string_access_traits, 2947
ECMAScript
std::regex_constants, 695
eback
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2810
__gnu_cxx::stdio_sync_filebuf, 2830
std::basic_filebuf, 1137
std::basic_streambuf, 1540
std::basic_stringbuf, 1636
std::wbuffer_convert, 3127
egptr
__gnu_cxx::enc_filebuf, 2006
__gnu_cxx::stdio_filebuf, 2810
__gnu_cxx::stdio_sync_filebuf, 2830
std::basic_filebuf, 1137
std::basic_streambuf, 1541
std::basic_stringbuf, 1636
std::wbuffer_convert, 3127
egrep
std::regex_constants, 696
element_type
std::auto_ptr, 1114
std::pointer_traits, 2624
std::pointer_traits< _Tp * >, 2625
std::shared_ptr, 2779
ellint_1
Mathematical Special Functions, 128
TR1 Mathematical Special Functions, 346
ellint_1f
Mathematical Special Functions, 129
ellint_1l
Mathematical Special Functions, 129
ellint_2
Mathematical Special Functions, 129
TR1 Mathematical Special Functions, 346
ellint_2f
Mathematical Special Functions, 130
ellint_2l
Mathematical Special Functions, 130
ellint_3
Mathematical Special Functions, 130
TR1 Mathematical Special Functions, 346
ellint_3f
Mathematical Special Functions, 131
ellint_3l
Mathematical Special Functions, 131
emplace
std::deque, 1958
std::list, 2289
std::map, 2341
std::multimap, 2433
std::multiset, 2456
std::set, 2754
std::unordered_map, 3002
std::unordered_multimap, 3029
std::unordered_multiset, 3053
std::unordered_set, 3078
std::vector, 3107
emplace_after
std::forward_list, 2064
emplace_front
std::forward_list, 2064
emplace_hint
std::map, 2343
std::multimap, 2434
std::multiset, 2457
std::set, 2754
std::unordered_map, 3002
std::unordered_multimap, 3029
std::unordered_multiset, 3053
std::unordered_set, 3078
empty
__gnu_cxx::__versa_string, 813
__gnu_debug::basic_string, 1567
__gnu_pbds::detail::cc_ht_map, 1782
__gnu_pbds::detail::gp_ht_map, 2110
std::basic_string, 1599
std::deque, 1958
std::experimental::fundamentals_v1::any, 1077
std::forward_list, 2064
std::list, 2289
std::map, 2343
std::match_results, 2367
std::multimap, 2434
std::multiset, 2457
std::priority_queue, 2632
std::queue, 2643
std::set, 2755
std::stack, 2803
std::tr2::dynamic_bitset, 1992
std::unordered_map, 3003

std::unordered_multimap, 3029
std::unordered_multiset, 3054
std::unordered_set, 3079
std::vector, 3107
enable_if_t
Metaprogramming, 146
enable_special_members.h, 3276
enc_filebuf.h, 3276
end
__gnu_cxx::__versa_string, 814
__gnu_cxx::temporary_buffer, 2871
__gnu_parallel::_PseudoSequence, 980
__gnu_pbds::sample_trie_access_traits, 2727
__gnu_pbds::trie_string_access_traits, 2948
Numeric Arrays, 216
std, 595
std::_Temporary_buffer, 1052
std::basic_fstream, 1205
std::basic_ifstream, 1253
std::basic_ios, 1280
std::basic_iostream, 1334
std::basic_istream, 1377
std::basic_istringstream, 1420
std::basic_ofstream, 1455
std::basic_ostream, 1486
std::basic_ostringstream, 1522
std::basic_string, 1599
std::basic_stringstream, 1702
std::deque, 1958
std::forward_list, 2065
std::initializer_list, 2166
std::ios_base, 2187
std::list, 2289, 2290
std::map, 2343, 2344
std::match_results, 2367
std::multimap, 2434
std::multiset, 2457
std::set, 2755
std::unordered_map, 3003, 3004
std::unordered_multimap, 3029, 3030
std::unordered_multiset, 3054
std::unordered_set, 3079
std::vector, 3107, 3108
endl
std, 596
ends
std, 596
entry_cmp.hpp, 3277
entry_list_fn_imps.hpp, 3277
entry_metadata_base.hpp, 3277
entry_pred.hpp, 3278
eof
std::basic_fstream, 1165
std::basic_ifstream, 1222
std::basic_ios, 1266
std::basic_iostream, 1294
std::basic_istream, 1347
std::basic_istringstream, 1391
std::basic_ofstream, 1434
std::basic_ostream, 1468
std::basic_ostringstream, 1501
std::basic_stringstream, 1664
eofbit
std::basic_fstream, 1205
std::basic_ifstream, 1253
std::basic_ios, 1280
std::basic_iostream, 1334
std::basic_istream, 1377
std::basic_istringstream, 1420
std::basic_ofstream, 1456
std::basic_ostream, 1487
std::basic_ostringstream, 1522
std::basic_stringstream, 1702
std::ios_base, 2187
epptr
__gnu_cxx::enc_filebuf, 2007
__gnu_cxx::stdio_filebuf, 2810
__gnu_cxx::stdio_sync_filebuf, 2830
std::basic_filebuf, 1138
std::basic_streambuf, 1541
std::basic_stringbuf, 1637
std::wbuffer_convert, 3127
epsilon
std::numeric_limits, 2519
eq_by_less.hpp, 3278
equal
Non-Mutating, 181, 182
std::istreambuf_iterator, 2250
equal_range
Binary Search, 33, 34
std::map, 2344, 2345
std::multimap, 2434, 2435
std::multiset, 2457, 2459, 2460
std::set, 2755, 2757
std::unordered_map, 3004
std::unordered_multimap, 3030
std::unordered_multiset, 3055
std::unordered_set, 3081
equally_split.h, 3278
equals
std::tr2::bool_set, 1765
erase
__gnu_cxx::__versa_string, 814–816
__gnu_debug::basic_string, 1567, 1568
std::basic_string, 1599, 1600
std::deque, 1959
std::list, 2290
std::map, 2345, 2346

std::multimap, 2437, 2438
std::multiset, 2460, 2461
std::set, 2758
std::unordered_map, 3005, 3006
std::unordered_multimap, 3032, 3033
std::unordered_multiset, 3055, 3057
std::unordered_set, 3081, 3082
std::vector, 3108
erase_can_throw
__gnu_pbds::container_traits, 1864
erase_after
std::forward_list, 2065
erase_fn_imps.hpp, 3279–3281
erase_if.h, 3281
erase_no_store_hash_fn_imps.hpp, 3281
erase_store_hash_fn_imps.hpp, 3282
error_backref
std::regex_constants, 691
error_badbrace
std::regex_constants, 691
error_badrepeat
std::regex_constants, 692
error_brace
std::regex_constants, 692
error_brack
std::regex_constants, 692
error_collate
std::regex_constants, 692
error_complexity
std::regex_constants, 692
error_constants.h, 3282
error_ctype
std::regex_constants, 692
error_escape
std::regex_constants, 692
error_paren
std::regex_constants, 692
error_range
std::regex_constants, 692
error_space
std::regex_constants, 692
error_stack
std::regex_constants, 692
error_type
std::regex_constants, 691
event
std::basic_fstream, 1163
std::basic_ifstream, 1219
std::basic_ios, 1264
std::basic_iostream, 1293
std::basic_istream, 1345
std::basic_istringstream, 1388
std::basic_ofstream, 1431
std::basic_ostream, 1466
std::basic_ostringstream, 1498
std::basic_stringstream, 1661
std::ios_base, 2180
event_callback
std::basic_fstream, 1161
std::basic_ifstream, 1216
std::basic_ios, 1261
std::basic_iostream, 1291
std::basic_istream, 1343
std::basic_istringstream, 1386
std::basic_ofstream, 1429
std::basic_ostream, 1464
std::basic_ostringstream, 1496
std::basic_stringstream, 1659
std::ios_base, 2178
exception, 3282
exception.h, 3283
exception.hpp, 3284
exception_defines.h, 3284
exception_ptr.h, 3285
Exceptions, 68, 69
__verbose_terminate_handler, 71
current_exception, 71
get_terminate, 71
get_unexpected, 71
make_exception_ptr, 71
rethrow_exception, 71
rethrow_if_nested, 71
set_terminate, 71
set_unexpected, 71
terminate, 71
terminate_handler, 70
throw_with_nested, 72
uncaught_exception, 72
uncaught_exceptions, 72
unexpected, 72
unexpected_handler, 70
what, 72
exceptions
std::basic_fstream, 1166
std::basic_ifstream, 1222
std::basic_ios, 1266
std::basic_iostream, 1295
std::basic_istream, 1347
std::basic_istringstream, 1391
std::basic_ofstream, 1434
std::basic_ostream, 1468
std::basic_ostringstream, 1501, 1502
std::basic_stringstream, 1664, 1665
exchange
std, 596
exp
Complex Numbers, 47
expint

Mathematical Special Functions, 131
TR1 Mathematical Special Functions, 347
expintf
Mathematical Special Functions, 131
expintl
Mathematical Special Functions, 131
exponential_distribution
std::exponential_distribution, 2037
extc++.h, 3285
extended
std::regex_constants, 696
Extensions, 73
external_load_access
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1770
__gnu_pbds::hash_load_check_resize_trigger, 2145
extptr_allocator.h, 3285

fabs
Complex Numbers, 47
std, 596
facet
std::locale::facet, 2045
fail
std::basic_fstream, 1166
std::basic_ifstream, 1223
std::basic_ios, 1267
std::basic_iostream, 1295
std::basic_istream, 1348
std::basic_istringstream, 1392
std::basic_ofstream, 1435
std::basic_ostream, 1469
std::basic_ostringstream, 1502
std::basic_stringstream, 1665
failbit
std::basic_fstream, 1206
std::basic_ifstream, 1253
std::basic_ios, 1281
std::basic_iostream, 1335
std::basic_istream, 1377
std::basic_istringstream, 1421
std::basic_ofstream, 1456
std::basic_ostream, 1487
std::basic_ostringstream, 1522
std::basic_stringstream, 1702
std::ios_base, 2188
failed
std::ostreambuf_iterator, 2565
false_type
Metaprogramming, 146
falsename
std::numpunct, 2546
std::numpunct_byname, 2551
fd
__gnu_cxx::stdio_filebuf, 2810
features.h, 3286
_GLIBCXX_MERGESORT, 3287
_GLIBCXX_QUICKSORT, 3287
fenv.h, 3288
file
__gnu_cxx::stdio_filebuf, 2811
__gnu_cxx::stdio_sync_filebuf, 2831
filebuf
I/O, 97
filesystem, 3288
fill
Mutating, 153
std::basic_fstream, 1167
std::basic_ifstream, 1223
std::basic_ios, 1267
std::basic_iostream, 1296
std::basic_istream, 1348
std::basic_istringstream, 1392
std::basic_ofstream, 1435
std::basic_ostream, 1469
std::basic_ostringstream, 1502, 1503
std::basic_stringstream, 1665, 1666
fill_minimal_n
__gnu_parallel::_Settings, 1043
fill_n
Mutating, 153
find
__gnu_cxx::__versa_string, 816, 817
__gnu_debug::basic_string, 1568
Non-Mutating, 184
std::basic_string, 1600, 1602
std::map, 2348, 2349
std::multimap, 2438, 2439
std::multiset, 2461, 2462
std::set, 2759, 2760
std::unordered_map, 3006
std::unordered_multimap, 3033
std::unordered_multiset, 3057, 3058
std::unordered_set, 3083
find.h, 3288
find_by_order
__gnu_pbds::tree_order_statistics_node_update, 2920
__gnu_pbds::trie_order_statistics_node_update, 2940
find_end
Non-Mutating, 184, 185
find_first
std::tr2::dynamic_bitset, 1993
find_first_not_of
__gnu_cxx::__versa_string, 817, 819
__gnu_debug::basic_string, 1568
std::basic_string, 1602, 1603

find_first_of
__gnu_cxx::__versa_string, 821, 823
__gnu_debug::basic_string, 1569
Non-Mutating, 185, 186
std::basic_string, 1604, 1606
find_fn_imps.hpp, 3289, 3290
find_if
Non-Mutating, 186
find_if_not
Non-Mutating, 186
find_increasing_factor
__gnu_parallel::_Settings, 1043
find_initial_block_size
__gnu_parallel::_Settings, 1043
find_last_not_of
__gnu_cxx::__versa_string, 823, 824
__gnu_debug::basic_string, 1569
std::basic_string, 1606, 1608
find_last_of
__gnu_cxx::__versa_string, 825, 826
__gnu_debug::basic_string, 1569
std::basic_string, 1608, 1609
find_maximum_block_size
__gnu_parallel::_Settings, 1043
find_next
std::tr2::dynamic_bitset, 1993
find_no_store_hash_fn_imps.hpp, 3290
find_scale_factor
__gnu_parallel::_Settings, 1043
find_selectors.h, 3291
find_sequential_search_size
__gnu_parallel::_Settings, 1044
find_store_hash_fn_imps.hpp, 3291
first
__gnu_parallel::_IteratorPair, 914
std::pair, 2586
std::sub_match, 2860
first_argument_type
__gnu_cxx::project1st, 2635
__gnu_cxx::project2nd, 2636
__gnu_parallel::_EqualFromLess, 868
__gnu_parallel::_EqualTo, 871
__gnu_parallel::_Less, 919
__gnu_parallel::_Lexicographic, 920
__gnu_parallel::_LexicographicReverse, 921
__gnu_parallel::_Multiplies, 959
__gnu_parallel::_Plus, 973
std::binary_function, 1725
std::binary_negate, 1736
std::const_mem_fun1_ref_t, 1844
std::const_mem_fun1_t, 1846
std::divides, 1982
std::equal_to, 2029
std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >, 2578
std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >, 2581
std::greater, 2112
std::greater_equal, 2114
std::less, 2267
std::less_equal, 2268
std::logical_and, 2314
std::logical_or, 2317
std::mem_fun1_ref_t, 2373
std::mem_fun1_t, 2374
std::minus, 2388
std::modulus, 2391
std::multiplies, 2448
std::not_equal_to, 2490
std::owner_less< shared_ptr< _Tp > >, 2579
std::owner_less< void >, 2580
std::owner_less< weak_ptr< _Tp > >, 2582
std::plus, 2619
std::pointer_to_binary_function, 2621
first_type
__gnu_parallel::_IteratorPair, 914
std::pair, 2585
std::sub_match, 2858
fixed
std, 596
std::basic_fstream, 1206
std::basic_ifstream, 1253
std::basic_ios, 1281
std::basic_iostream, 1335
std::basic_istream, 1377
std::basic_istringstream, 1421
std::basic_ofstream, 1456
std::basic_ostream, 1487
std::basic_ostringstream, 1523
std::basic_stringstream, 1702
std::ios_base, 2188
flags
std::basic_fstream, 1167, 1168
std::basic_ifstream, 1224
std::basic_ios, 1267, 1268
std::basic_iostream, 1296, 1297
std::basic_istream, 1349
std::basic_istringstream, 1393
std::basic_ofstream, 1435, 1436
std::basic_ostream, 1470
std::basic_ostringstream, 1503
std::basic_regex, 1533
std::basic_stringstream, 1666
std::ios_base, 2180, 2181
flip
std::bitset, 1758
std::tr2::dynamic_bitset, 1993

float_denorm_style
std, 583
float_round_style
std, 583
floatfield
std::basic_fstream, 1206
std::basic_ifstream, 1254
std::basic_ios, 1281
std::basic_iostream, 1335
std::basic_istream, 1378
std::basic_istringstream, 1421
std::basic_ofstream, 1456
std::basic_ostream, 1487
std::basic_ostringstream, 1523
std::basic_stringstream, 1702
std::ios_base, 2188
flush
std, 596
std::basic_fstream, 1168
std::basic_iostream, 1297
std::basic_ofstream, 1436
std::basic_ostream, 1470
std::basic_ostringstream, 1503
std::basic_stringstream, 1666
fmtflags
std::basic_fstream, 1161
std::basic_ifstream, 1218
std::basic_ios, 1262
std::basic_iostream, 1291
std::basic_istream, 1344
std::basic_istringstream, 1387
std::basic_ofstream, 1429
std::basic_ostream, 1464
std::basic_ostringstream, 1496
std::basic_stringstream, 1659
std::ios_base, 2178
for_each
Non-Mutating, 187
for_each.h, 3291
for_each_minimal_n
__gnu_parallel::_Settings, 1044
for_each_selectors.h, 3292
format
std::match_results, 2367, 2368
format_default
std::regex_constants, 696
format_first_only
std::regex_constants, 696
format_no_copy
std::regex_constants, 696
format_sed
std::regex_constants, 697
formatter.h, 3293
forward
Utilities, 372, 373
forward_as_tuple
Utilities, 373
forward_list, 3294, 3295
std::forward_list, 2059–2061
forward_list.h, 3295
forward_list.tcc, 3296
fpos
std::fpos, 2073
frac_digits
std::moneypunct, 2409
std::moneypunct_byname, 2417
from_bytes
std::wstring_convert, 3146, 3147
from_chars
std, 596
front
__gnu_cxx::__versa_string, 826
__gnu_debug::basic_string, 1570
std::basic_string, 1610
std::deque, 1959
std::forward_list, 2066
std::list, 2291
std::queue, 2643
std::vector, 3108, 3109
front_insert_iterator
std::front_insert_iterator, 2078
front_inserter
Iterators, 107
fs_dir.h, 3297
fs_fwd.h, 3297
fs_path.h, 3297
fstream, 3297
I/O, 97
fstream.tcc, 3298
functexcept.h, 3298
function
std::function< _Res(_ArgTypes...)>, 2081, 2082
Function Objects, 74
mem_fn, 75
functional, 3299, 3301, 3302
functional_hash.h, 3303
functions.h, 3304
future, 3306
std::future, 2088
std::future< _Res & >, 2090
std::future< void >, 2093
future_category
Futures, 78
future_errc
Futures, 77
future_status
Futures, 77
Futures, 76

async, 78
future_category, 78
future_errc, 77
future_status, 77
launch, 77
make_error_code, 78
make_error_condition, 78
swap, 78

gamma_distribution
std::gamma_distribution, 2096
gbump
__gnu_cxx::enc_filebuf, 2007
__gnu_cxx::stdio_filebuf, 2811
__gnu_cxx::stdio_sync_filebuf, 2831
std::basic_filebuf, 1138
std::basic_streambuf, 1541
std::basic_stringbuf, 1637
std::wbuffer_convert, 3128
gcount
std::basic_fstream, 1168
std::basic_ifstream, 1224
std::basic_iostream, 1297
std::basic_istream, 1349
std::basic_istringstream, 1393
std::basic_stringstream, 1667
Generalized Numeric operations, 79
accumulate, 79, 81
adjacent_difference, 81
inner_product, 82
iota, 83
partial_sum, 83
generate
Mutating, 155
generate_canonical
Random Number Generation, 259
generate_minimal_n
__gnu_parallel::_Settings, 1044
generate_n
Mutating, 155
generic_category
Diagnostics, 63
get
__gnu_parallel::_Settings, 1042
std::__allocated_ptr, 717
std::auto_ptr, 1115
std::basic_fstream, 1168–1171
std::basic_ifstream, 1224–1227
std::basic_iostream, 1297–1300
std::basic_istream, 1349–1352
std::basic_istringstream, 1393–1396
std::basic_stringstream, 1667–1669
std::future, 2088
std::future< _Res & >, 2091
std::future< void >, 2093
std::money_get, 2396, 2397
std::num_get, 2501–2506
std::shared_future, 2769
std::shared_future< _Res & >, 2772
std::shared_ptr, 2784
std::time_get, 2891
std::time_get_byname, 2901, 2902
std::unique_ptr, 2984
Utilities, 373, 374
get_actual_size
__gnu_pbds::hash_standard_resize_policy, 2156
get_allocator
__gnu_cxx::__versa_string, 826
__gnu_debug::basic_string, 1570
std::basic_string, 1610
std::deque, 1959
std::forward_list, 2066
std::list, 2291
std::map, 2349
std::match_results, 2368
std::multimap, 2439
std::multiset, 2462
std::set, 2760
std::tr2::dynamic_bitset, 1994
std::unordered_map, 3007
std::unordered_multimap, 3034
std::unordered_multiset, 3058
std::unordered_set, 3083
get_child
__gnu_pbds::detail::pat_trie_base::_Node_citer, 962
__gnu_pbds::detail::pat_trie_base::_Node_iter, 967
get_comb_hash_fn
__gnu_pbds::detail::cc_ht_map, 1782
get_comb_probe_fn
__gnu_pbds::detail::gp_ht_map, 2110
get_date
std::time_get, 2892
std::time_get_byname, 2902
get_deleter
Pointer Abstractions, 244
std::unique_ptr, 2984
get_eq_fn
__gnu_pbds::detail::cc_ht_map, 1782
__gnu_pbds::detail::gp_ht_map, 2110
get_hash_fn
__gnu_pbds::detail::cc_ht_map, 1782
__gnu_pbds::detail::gp_ht_map, 2110
get_id
std::this_thread, 700
get_l_child
__gnu_pbds::detail::bin_search_tree_const_node_it-
_, 1713
__gnu_pbds::detail::bin_search_tree_node_it_, 1718

__gnu_pbds::detail::ov_tree_node_const_it_, 2573
__gnu_pbds::detail::ov_tree_node_it_, 2575
get_load
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
get_loads
__gnu_pbds::hash_load_check_resize_trigger, 2146
get_metadata
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1713
__gnu_pbds::detail::bin_search_tree_node_it_, 1718
__gnu_pbds::detail::pat_trie_base::_Node_citer, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter, 967
get_money
std, 597
get_monthname
std::time_get, 2892
std::time_get_byname, 2903
get_nearest_larger_size
__gnu_pbds::sample_size_policy, 2725
get_nearest_smaller_size
__gnu_pbds::sample_size_policy, 2725
get_new_handler
std, 597
get_new_size
__gnu_pbds::hash_standard_resize_policy, 2156
__gnu_pbds::sample_resize_policy, 2721
get_pointer_safety
Pointer Safety and Garbage Collection, 251
get_probe_fn
__gnu_pbds::detail::gp_ht_map, 2111
get_r_child
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1713
__gnu_pbds::detail::bin_search_tree_node_it_, 1718
__gnu_pbds::detail::ov_tree_node_const_it_, 2573
__gnu_pbds::detail::ov_tree_node_it_, 2575
get_resize_policy
__gnu_pbds::detail::cc_ht_map, 1782, 1783
__gnu_pbds::detail::gp_ht_map, 2111
get_size_policy
__gnu_pbds::hash_standard_resize_policy, 2156, 2157
get_temporary_buffer
std, 597
get_terminate
Exceptions, 71
get_time
std, 597
std::time_get, 2894
std::time_get_byname, 2903
get_trigger_policy
__gnu_pbds::hash_standard_resize_policy, 2157
get_unexpected
Exceptions, 71
get_weekday
std::time_get, 2894
std::time_get_byname, 2904
get_year
std::time_get, 2895
std::time_get_byname, 2904
getline
std, 598, 600
std::basic_fstream, 1171
std::basic_ifstream, 1227
std::basic_iostream, 1300
std::basic_istream, 1352
std::basic_istringstream, 1396
std::basic_stringstream, 1669, 1671
getloc
__gnu_cxx::enc_filebuf, 2007
__gnu_cxx::stdio_filebuf, 2811
__gnu_cxx::stdio_sync_filebuf, 2831
std::basic_filebuf, 1138
std::basic_fstream, 1173
std::basic_ifstream, 1229
std::basic_ios, 1268
std::basic_iostream, 1302
std::basic_istream, 1354
std::basic_istringstream, 1398
std::basic_ofstream, 1436
std::basic_ostream, 1470
std::basic_ostringstream, 1504
std::basic_regex, 1533
std::basic_streambuf, 1542
std::basic_stringbuf, 1637
std::basic_stringstream, 1671
std::ios_base, 2181
std::regex_traits, 2695
std::wbuffer_convert, 3128
global
std::locale, 2307
good
std::basic_fstream, 1173
std::basic_ifstream, 1229
std::basic_ios, 1268
std::basic_iostream, 1302
std::basic_istream, 1354
std::basic_istringstream, 1398
std::basic_ofstream, 1436
std::basic_ostream, 1471
std::basic_ostringstream, 1504
std::basic_stringstream, 1672
goodbit
std::basic_fstream, 1206
std::basic_ifstream, 1254
std::basic_ios, 1281
std::basic_iostream, 1335

std::basic_istream, 1378
std::basic_istringstream, 1421
std::basic_ofstream, 1456
std::basic_ostream, 1487
std::basic_ostringstream, 1523
std::basic_stringstream, 1703
std::ios_base, 2188
gp_hash_table
__gnu_pbds::gp_hash_table, 2102–2105
gp_ht_map_.hpp, 3308
gptr
__gnu_cxx::enc_filebuf, 2008
__gnu_cxx::stdio_filebuf, 2811
__gnu_cxx::stdio_sync_filebuf, 2831
std::basic_filebuf, 1138
std::basic_streambuf, 1542
std::basic_stringbuf, 1637
std::wbuffer_convert, 3128
grep
std::regex_constants, 697
grouping
std::moneypunct, 2409
std::moneypunct_byname, 2417
std::numpunct, 2546
std::numpunct_byname, 2551
gslice
Numeric Arrays, 212
gslice.h, 3308
gslice_array
Numeric Arrays, 212
gslice_array.h, 3309

has_denorm
std::__numeric_limits_base, 774
std::numeric_limits, 2521
has_denorm_loss
std::__numeric_limits_base, 774
std::numeric_limits, 2521
has_facet
Locales, 113
std::locale, 2309
std::locale::id, 2158
has_infinity
std::__numeric_limits_base, 775
std::numeric_limits, 2521
has_quiet_NaN
std::__numeric_limits_base, 775
std::numeric_limits, 2521
has_signaling_NaN
std::__numeric_limits_base, 775
std::numeric_limits, 2521
hash
std::collate, 1826
std::collate_byname, 1832
Hash-Based, 85
hash_bytes.h, 3309
hash_eq_fn.hpp, 3309
hash_exponential_size_policy
__gnu_pbds::hash_exponential_size_policy, 2144
hash_exponential_size_policy_imp.hpp, 3310
hash_fun.h, 3310
hash_function
std::unordered_map, 3007
std::unordered_multimap, 3034
std::unordered_multiset, 3058
std::unordered_set, 3083
hash_load_check_resize_trigger
__gnu_pbds::hash_load_check_resize_trigger, 2145
hash_load_check_resize_trigger_imp.hpp, 3310
hash_load_check_resize_trigger_size_base.hpp, 3310
hash_map, 3311
hash_policy.hpp, 3312
hash_prime_size_policy
__gnu_pbds::hash_prime_size_policy, 2153
hash_prime_size_policy_imp.hpp, 3313
hash_set, 3313
hash_standard_resize_policy
__gnu_pbds::hash_standard_resize_policy, 2156
hash_standard_resize_policy_imp.hpp, 3314
hasher
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3047
std::unordered_set, 3072
Hashes, 86
hashtable.h, 3314
hashtable_policy.h, 3315
Heap, 87
is_heap, 87, 89
is_heap_until, 89
make_heap, 90
pop_heap, 90, 91
push_heap, 91
sort_heap, 91, 93
Heap-Based, 94
priority_queue, 95
helper_functions.h, 3317
hermite
Mathematical Special Functions, 132
TR1 Mathematical Special Functions, 347
hermitef
Mathematical Special Functions, 132
hermitel
Mathematical Special Functions, 132
hex
std, 600
std::basic_fstream, 1207
std::basic_ifstream, 1254

std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1378
std::basic_istringstream, 1422
std::basic_ofstream, 1457
std::basic_ostream, 1488
std::basic_ostringstream, 1523
std::basic_stringstream, 1703
std::ios_base, 2189
hexfloat
std, 601
high_resolution_clock
Time, 354
hours
Time, 354
hyperg
Mathematical Special Functions, 132
TR1 Mathematical Special Functions, 347
hypergf
Mathematical Special Functions, 133
hypergl
Mathematical Special Functions, 133

I/O, 96
filebuf, 97
fstream, 97
ifstream, 97
ios, 97
iostream, 98
istream, 98
istringstream, 98
ofstream, 98
ostream, 98
ostringstream, 98
streambuf, 98
stringbuf, 98
stringstream, 98
wfilebuf, 98
wfstream, 99
wifstream, 99
wios, 99
wiostream, 99
wistream, 99
wistringstream, 99
wofstream, 99
wostream, 99
wostringstream, 99
wstreambuf, 99
wstringbuf, 100
wstringstream, 100
icase
std::regex_constants, 697
id
std::collate, 1828
std::collate_byname, 1833
std::ctype, 1881
std::ctype< char >, 1893
std::ctype< wchar_t >, 1908
std::ctype_byname, 1920
std::ctype_byname< char >, 1931
std::locale::id, 2158
std::messages, 2384
std::messages_byname, 2387
std::money_get, 2398
std::money_put, 2402
std::moneypunct, 2411
std::moneypunct_byname, 2420
std::num_get, 2507
std::num_put, 2517
std::numpunct, 2547
std::numpunct_byname, 2552
std::time_get, 2895
std::time_get_byname, 2905
std::time_put, 2910
std::time_put_byname, 2913
identity_element
SGI, 309
ifstream
I/O, 97
ignore
std::basic_fstream, 1173, 1174
std::basic_ifstream, 1229, 1230
std::basic_iostream, 1302, 1303
std::basic_istream, 1354, 1355
std::basic_istringstream, 1398, 1399
std::basic_stringstream, 1672, 1673
imbue
__gnu_cxx::enc_filebuf, 2008
__gnu_cxx::stdio_filebuf, 2812
__gnu_cxx::stdio_sync_filebuf, 2832
std::basic_filebuf, 1139
std::basic_fstream, 1174
std::basic_ifstream, 1230
std::basic_ios, 1268
std::basic_iostream, 1303
std::basic_istream, 1355
std::basic_istringstream, 1399
std::basic_ofstream, 1437
std::basic_ostream, 1471
std::basic_ostringstream, 1504
std::basic_regex, 1534
std::basic_streambuf, 1542
std::basic_stringbuf, 1638
std::basic_stringstream, 1673
std::ios_base, 2181
std::regex_traits, 2695
std::wbuffer_convert, 3128
in

std::__codecvt_abstract_base, 728
std::basic_fstream, 1207
std::basic_ifstream, 1254
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1378
std::basic_istringstream, 1422
std::basic_ofstream, 1457
std::basic_ostream, 1488
std::basic_ostringstream, 1523
std::basic_stringstream, 1703
std::codecvt, 1795
std::codecvt< _InternT, _ExternT, encoding_state >, 1798
std::codecvt< char, char, mbstate_t >, 1803
std::codecvt< char16_t, char, mbstate_t >, 1807
std::codecvt< char32_t, char, mbstate_t >, 1810
std::codecvt< wchar_t, char, mbstate_t >, 1815
std::codecvt_byname, 1820
std::ios_base, 2189
in_avail
__gnu_cxx::enc_filebuf, 2008
__gnu_cxx::stdio_filebuf, 2812
__gnu_cxx::stdio_sync_filebuf, 2832
std::basic_filebuf, 1139
std::basic_streambuf, 1543
std::basic_stringbuf, 1638
std::wbuffer_convert, 3129
in_place
Optional values, 238
includes
Set Operations, 314
increment
std::linear_congruential_engine, 2274
independent_bits_engine
std::independent_bits_engine, 2161, 2162
index_sequence
std, 581
index_sequence_for
std, 581
indirect_array
Numeric Arrays, 212
indirect_array.h, 3319
infinity
std::numeric_limits, 2519
info_fn_imps.hpp, 3319–3321
init
std::basic_fstream, 1175
std::basic_ifstream, 1231
std::basic_ios, 1270
std::basic_iostream, 1304
std::basic_istream, 1356
std::basic_istringstream, 1400
std::basic_ofstream, 1437
std::basic_ostream, 1471
std::basic_ostringstream, 1505
std::basic_stringstream, 1673
initializer_list, 3321
inner_product
Generalized Numeric operations, 82
inplace_merge
Sorting, 321
insert
__gnu_cxx::__versa_string, 827–830
__gnu_debug::basic_string, 1570–1572
std::basic_string, 1610, 1611, 1613, 1614
std::deque, 1960, 1961
std::list, 2291, 2292
std::map, 2349–2351, 2353
std::multimap, 2439, 2440, 2442, 2443
std::multiset, 2462, 2464
std::set, 2760, 2762
std::unordered_map, 3007–3009, 3011
std::unordered_multimap, 3034–3036
std::unordered_multiset, 3058, 3060, 3062
std::unordered_set, 3084, 3085
std::vector, 3109, 3110
insert_after
std::forward_list, 2066, 2067
insert_fn_imps.hpp, 3321–3323
insert_iterator
std::insert_iterator, 2170
insert_join_fn_imps.hpp, 3323
insert_no_store_hash_fn_imps.hpp, 3323
insert_store_hash_fn_imps.hpp, 3324
inserter
Iterators, 107
int_type
std::basic_ios, 1262
std::basic_streambuf, 1539
std::istreambuf_iterator, 2248
std::wbuffer_convert, 3126
internal
std, 601
std::basic_fstream, 1207
std::basic_ifstream, 1254
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1378
std::basic_istringstream, 1422
std::basic_ofstream, 1457
std::basic_ostream, 1488
std::basic_ostringstream, 1524
std::basic_stringstream, 1703
std::ios_base, 2189
intervals
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2615

intl
std::moneypunct, 2412
Invalidation Guarantees, 101
invoke.h, 3324
io_errc
std, 583
iomanip, 3325
ios, 3327
I/O, 97
ios_base.h, 3327
iosfwd, 3329
iostate
std::basic_fstream, 1162
std::basic_ifstream, 1218
std::basic_ios, 1262
std::basic_iostream, 1292
std::basic_istream, 1344
std::basic_istringstream, 1387
std::basic_ofstream, 1430
std::basic_ostream, 1465
std::basic_ostringstream, 1497
std::basic_stringstream, 1660
std::ios_base, 2179
iostream, 3330
I/O, 98
iota
Generalized Numeric operations, 83
is
std::__ctype_abstract_base, 741
std::ctype, 1877
std::ctype< char >, 1887, 1889
std::ctype< wchar_t >, 1903
std::ctype_byname, 1916, 1917
std::ctype_byname< char >, 1926
is_always_equal
__gnu_cxx::__alloc_traits, 713
std::allocator_traits, 1065
std::allocator_traits< allocator< _Tp > >, 1070
is_bounded
std::__numeric_limits_base, 775
std::numeric_limits, 2521
is_emptyset
std::tr2::bool_set, 1765
is_exact
std::__numeric_limits_base, 775
std::numeric_limits, 2521
is_grow_needed
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_trigger, 2723
is_heap
Heap, 87, 89
is_heap_until
Heap, 89
is_iec559
std::__numeric_limits_base, 775
std::numeric_limits, 2521
is_indeterminate
std::tr2::bool_set, 1765
is_integer
std::__numeric_limits_base, 775
std::numeric_limits, 2522
is_modulo
std::__numeric_limits_base, 775
std::numeric_limits, 2522
is_nothrow_swappable_v
std, 648
is_nothrow_swappable_with_v
std, 648
is_open
__gnu_cxx::enc_filebuf, 2009
__gnu_cxx::stdio_filebuf, 2812
std::basic_filebuf, 1139
std::basic_fstream, 1175
std::basic_ifstream, 1231
std::basic_ofstream, 1437
is_partitioned
Mutating, 155
is_permutation
Non-Mutating, 187, 188
is_resize_needed
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
is_signed
std::__numeric_limits_base, 775
std::numeric_limits, 2522
is_singleton
std::tr2::bool_set, 1765
is_sorted
Sorting, 322
is_sorted_until
Sorting, 322, 324
is_specialized
std::__numeric_limits_base, 776
std::numeric_limits, 2522
is_swappable_v
std, 648
is_swappable_with_v
std, 648
isalnum
std, 601
isalpha
std, 601
isblank
std, 601
iscntrl

std, 601
isctype
std::regex_traits, 2695
isdigit
std, 601
isgraph
std, 601
islower
std, 601
isprint
std, 602
ispunct
std, 602
isspace
std, 602
istream, 3331
I/O, 98
istream.tcc, 3332
istream_iterator
std::istream_iterator, 2246
istream_type
std::istreambuf_iterator, 2249
istreambuf_iterator
std::istreambuf_iterator, 2249, 2250
istringstream
I/O, 98
isupper
std, 602
isxdigit
std, 602
iter_swap
Mutating, 157
iter_type
std::money_get, 2395
std::money_put, 2399
std::num_get, 2495
std::num_put, 2509
std::time_get, 2887
std::time_put, 2908
iterator, 3333
std::set, 2748
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3047
std::unordered_set, 3072
Iterator Tags, 102
iterator.h, 3334
iterator.hpp, 3334
iterator_category
__gnu_pbds::detail::bin_search_tree_const_node_it-
_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1717
__gnu_pbds::detail::binary_heap_const_iterator_,
1729
__gnu_pbds::detail::binary_heap_point_const_-
iterator_, 1732
__gnu_pbds::detail::left_child_next_sibling_heap_-
const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_-
node_point_const_iterator_, 2263
std::back_insert_iterator, 1118
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istream_iterator, 2245
std::istreambuf_iterator, 2249
std::iterator, 2251
std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
std::raw_storage_iterator, 2665
std::reverse_iterator, 2706
iterator_concepts.h, 3335
iterator_fn_imps.hpp, 3335
Iterators, 103
__iterator_category, 107
back_inserter, 107
front_inserter, 107
inserter, 107
make_reverse_iterator, 108
operator==, 108
iterators_fn_imps.hpp, 3335, 3336
iword
std::basic_fstream, 1175
std::basic_ifstream, 1231
std::basic_ios, 1270
std::basic_iostream, 1304
std::basic_istream, 1356
std::basic_istringstream, 1400
std::basic_ofstream, 1438
std::basic_ostream, 1472
std::basic_ostringstream, 1505
std::basic_stringstream, 1674
std::ios_base, 2181

k
std::negative_binomial_distribution, 2480
key_comp
std::map, 2353
std::multimap, 2443
std::multiset, 2465
std::set, 2762
key_compare
std::set, 2749
key_eq
std::unordered_map, 3011
std::unordered_multimap, 3037
std::unordered_multiset, 3062
std::unordered_set, 3087
key_equal

std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3047
std::unordered_set, 3072
key_type
std::set, 2749
std::unordered_map, 2995
std::unordered_multimap, 3023
std::unordered_multiset, 3047
std::unordered_set, 3072
kill_dependency
Atomics, 20

L1_cache_size
__gnu_parallel::_Settings, 1044
L2_cache_size
__gnu_parallel::_Settings, 1044
laguerre
Mathematical Special Functions, 133
TR1 Mathematical Special Functions, 347
laguerref
Mathematical Special Functions, 133
laguerrel
Mathematical Special Functions, 134
lambda
std::exponential_distribution, 2037
launch
Futures, 77
left
std, 602
std::basic_fstream, 1207
std::basic_ifstream, 1255
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1379
std::basic_istringstream, 1422
std::basic_ofstream, 1457
std::basic_ostream, 1488
std::basic_ostringstream, 1524
std::basic_stringstream, 1703
std::ios_base, 2189
left_child_next_sibling_heap_.hpp, 3336
legendre
Mathematical Special Functions, 134
TR1 Mathematical Special Functions, 347
legendref
Mathematical Special Functions, 134
legendrel
Mathematical Special Functions, 134
length
__gnu_cxx::__versa_string, 831
__gnu_debug::basic_string, 1572
std::basic_string, 1615
std::match_results, 2368
std::regex_traits, 2697
std::sub_match, 2859
lexicographical_compare
Sorting, 324
lexicographical_compare_3way
SGI, 310
lfts_config.h, 3336
Library Fundamentals TS, 109
limits, 3337
linear_congruential_engine
std::linear_congruential_engine, 2272
linear_probe_fn_imp.hpp, 3338
list, 3338, 3339
std::list, 2284, 2285
List-Based, 111
list.tcc, 3340
list_partition
__gnu_parallel, 452
list_partition.h, 3340
list_update
__gnu_pbds::list_update, 2302
list_update_policy.hpp, 3341
load_factor
std::unordered_map, 3011
std::unordered_multimap, 3037
std::unordered_multiset, 3062
std::unordered_set, 3087
local_iterator
std::unordered_map, 2996
std::unordered_multimap, 3024
std::unordered_multiset, 3047
std::unordered_set, 3073
locale, 3341
std::locale, 2305, 2306
locale_classes.h, 3341
locale_classes.tcc, 3342
locale_conv.h, 3342
locale_facets.h, 3343
locale_facets.tcc, 3345
locale_facets_nonio.h, 3345
locale_facets_nonio.tcc, 3346
localefwd.h, 3346
Locales, 112
has_facet, 113
use_facet, 113
lock
Mutexes, 172
log
Complex Numbers, 47
log10
Complex Numbers, 47
logic_error
std::logic_error, 2313
lookup_classname

std::regex_traits, 2697
lookup_collatename
std::regex_traits, 2698
losertree.h, 3347
lower_bound
Binary Search, 34, 35
std::map, 2353, 2354
std::multimap, 2443, 2444
std::multiset, 2465, 2466
std::set, 2762, 2763
lowest
std::numeric_limits, 2519
lu_counter_metadata.hpp, 3348
lu_map_.hpp, 3348

macros.h, 3349
__glibcxx_check_erase, 3350
__glibcxx_check_erase_after, 3350
__glibcxx_check_erase_range, 3350
__glibcxx_check_erase_range_after, 3350
__glibcxx_check_heap_pred, 3350
__glibcxx_check_insert, 3350
__glibcxx_check_insert_after, 3351
__glibcxx_check_insert_range, 3351
__glibcxx_check_insert_range_after, 3351
__glibcxx_check_partitioned_lower, 3351
__glibcxx_check_partitioned_lower_pred, 3351
__glibcxx_check_partitioned_upper_pred, 3351
__glibcxx_check_sorted_pred, 3351
make_array
Array creation functions, 9
make_error_code
Diagnostics, 63
Futures, 78
make_error_condition
Diagnostics, 63
Futures, 78
make_exception_ptr
Exceptions, 71
make_heap
Heap, 90
make_index_sequence
std, 582
make_integer_sequence
std, 582
make_pair
Utilities, 374
make_reverse_iterator
Iterators, 108
make_shared
Pointer Abstractions, 244
make_signed_t
Metaprogramming, 146
make_unique
Pointer Abstractions, 244
make_unsigned_t
Metaprogramming, 147
malloc_allocator.h, 3352
map, 3352, 3353
std::map, 2337–2339
map.h, 3353
mapped_type
std::unordered_map, 2996
std::unordered_multimap, 3024
mark_count
std::basic_regex, 1534
mask_array
Numeric Arrays, 212
mask_array.h, 3354
mask_based_range_hashing.hpp, 3355
match_any
std::regex_constants, 697
match_continuous
std::regex_constants, 697
match_default
std::regex_constants, 697
match_flag_type
std::regex_constants, 691
match_not_bol
std::regex_constants, 697
match_not_bow
std::regex_constants, 697
match_not_eol
std::regex_constants, 697
match_not_eow
std::regex_constants, 698
match_not_null
std::regex_constants, 698
match_prev_avail
std::regex_constants, 698
match_results
std::match_results, 2366
math.h, 3355
Mathematical Special Functions, 114
airy_ai, 118
airy_aif, 118
airy_ail, 118
airy_bi, 118
airy_bif, 118
airy_bil, 119
assoc_laguerre, 119
assoc_laguerref, 119
assoc_laguerrel, 119
assoc_legendre, 120
assoc_legendref, 120
assoc_legendrel, 120
beta, 120
betaf, 121

betal, 121
comp_ellint_1, 121
comp_ellint_1f, 122
comp_ellint_1l, 122
comp_ellint_2, 122
comp_ellint_2f, 123
comp_ellint_2l, 123
comp_ellint_3, 123
comp_ellint_3f, 124
comp_ellint_3l, 124
conf_hyperg, 124
conf_hypergf, 124
conf_hypergl, 124
cyl_bessel_i, 125
cyl_bessel_if, 125
cyl_bessel_il, 125
cyl_bessel_j, 125
cyl_bessel_jf, 126
cyl_bessel_jl, 126
cyl_bessel_k, 126
cyl_bessel_kf, 127
cyl_bessel_kl, 127
cyl_neumann, 127
cyl_neumannf, 128
cyl_neumannl, 128
ellint_1, 128
ellint_1f, 129
ellint_1l, 129
ellint_2, 129
ellint_2f, 130
ellint_2l, 130
ellint_3, 130
ellint_3f, 131
ellint_3l, 131
expint, 131
expintf, 131
expintl, 131
hermite, 132
hermitef, 132
hermitel, 132
hyperg, 132
hypergf, 133
hypergl, 133
laguerre, 133
laguerref, 133
laguerrel, 134
legendre, 134
legendref, 134
legendrel, 134
riemann_zeta, 134
riemann_zetaf, 135
riemann_zetal, 135
sph_bessel, 135
sph_besself, 136
sph_bessell, 136
sph_legendre, 136
sph_legendref, 136
sph_legendrel, 137
sph_neumann, 137
sph_neumannf, 137
sph_neumannl, 137
max
__gnu_parallel, 452
Numeric Arrays, 218
Sorting, 325
std::bernoulli_distribution, 1707
std::binomial_distribution, 1740
std::cauchy_distribution, 1768
std::chi_squared_distribution, 1790
std::discard_block_engine, 1975
std::discrete_distribution, 1979
std::exponential_distribution, 2037
std::extreme_value_distribution, 2041
std::fisher_f_distribution, 2049
std::gamma_distribution, 2096
std::geometric_distribution, 2100
std::independent_bits_engine, 2162
std::linear_congruential_engine, 2272
std::lognormal_distribution, 2319
std::mersenne_twister_engine, 2379
std::negative_binomial_distribution, 2480
std::normal_distribution, 2487
std::numeric_limits, 2520
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2627
std::shuffle_order_engine, 2789
std::student_t_distribution, 2852
std::subtract_with_carry_engine, 2863
std::uniform_int_distribution, 2975
std::uniform_real_distribution, 2978
std::weibull_distribution, 3142
max_count
__gnu_pbds::lu_counter_policy, 2323
max_bucket_count
std::unordered_map, 3011
std::unordered_multimap, 3037
std::unordered_multiset, 3062
std::unordered_set, 3087
max_digits10
std::__numeric_limits_base, 776
std::numeric_limits, 2522
max_element
Sorting, 325, 327
max_element_minimal_n
__gnu_parallel::_Settings, 1044
max_exponent
std::__numeric_limits_base, 776

std::numeric_limits, 2522
max_exponent10
std::__numeric_limits_base, 776
std::numeric_limits, 2522
max_load_factor
std::unordered_map, 3011
std::unordered_multimap, 3037
std::unordered_multiset, 3062
std::unordered_set, 3087
max_size
__gnu_cxx::__alloc_traits, 715
__gnu_cxx::__versa_string, 831
__gnu_debug::basic_string, 1572
std::allocator_traits, 1067
std::allocator_traits< allocator< _Tp > >, 1072
std::basic_string, 1615
std::deque, 1961
std::forward_list, 2067
std::list, 2293
std::map, 2355
std::match_results, 2368
std::multimap, 2445
std::multiset, 2466
std::set, 2764
std::tr2::dynamic_bitset, 1994
std::unordered_map, 3012
std::unordered_multimap, 3037
std::unordered_multiset, 3062
std::unordered_set, 3087
std::vector, 3110
mean
std::normal_distribution, 2487
std::poisson_distribution, 2627
mem_fn
Function Objects, 75
Memory, 138
align, 139
uninitialized_copy, 139
uninitialized_copy_n, 139
uninitialized_fill, 140
uninitialized_fill_n, 140
memory, 3355–3357
memory_order
Atomics, 20
memory_resource, 3358
memoryfwd.h, 3359
merge
Sorting, 327
std::forward_list, 2068
std::list, 2293
merge.h, 3359
merge_minimal_n
__gnu_parallel::_Settings, 1044
merge_oversampling
__gnu_parallel::_Settings, 1044
mersenne_twister_engine
std::mersenne_twister_engine, 2379
messages
std::locale, 2310
std::messages, 2384
messages_members.h, 3360
metadata_const_reference
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1717
__gnu_pbds::detail::pat_trie_base::_Node_citer, 962
__gnu_pbds::detail::pat_trie_base::_Node_iter, 966
metadata_reference
__gnu_pbds::lu_counter_policy, 2323
__gnu_pbds::lu_move_to_front_policy, 2327
metadata_type
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1718
__gnu_pbds::detail::pat_trie_base::_Node_citer, 962
__gnu_pbds::detail::pat_trie_base::_Node_iter, 966
__gnu_pbds::lu_counter_policy, 2323
__gnu_pbds::lu_move_to_front_policy, 2327
__gnu_pbds::sample_update_policy, 2728
Metaprogramming, 141
add_const_t, 145
add_cv_t, 145
add_lvalue_reference_t, 145
add_pointer_t, 145
add_rvalue_reference_t, 146
add_volatile_t, 146
aligned_storage_t, 146
alignment_value, 148
common_type_t, 146
conditional_t, 146
decay_t, 146
enable_if_t, 146
false_type, 146
make_signed_t, 146
make_unsigned_t, 147
remove_all_extents_t, 147
remove_const_t, 147
remove_cv_t, 147
remove_extent_t, 147
remove_pointer_t, 147
remove_reference_t, 147
remove_volatile_t, 147
result_of_t, 147
true_type, 147
underlying_type_t, 147
void_t, 148
microseconds
Time, 354

milliseconds
Time, 354
min
__gnu_parallel, 452
Numeric Arrays, 218
Sorting, 329
std::bernoulli_distribution, 1707
std::binomial_distribution, 1740
std::cauchy_distribution, 1768
std::chi_squared_distribution, 1790
std::discard_block_engine, 1976
std::discrete_distribution, 1979
std::exponential_distribution, 2037
std::extreme_value_distribution, 2041
std::fisher_f_distribution, 2049
std::gamma_distribution, 2097
std::geometric_distribution, 2100
std::independent_bits_engine, 2162
std::linear_congruential_engine, 2272
std::lognormal_distribution, 2319
std::mersenne_twister_engine, 2379
std::negative_binomial_distribution, 2480
std::normal_distribution, 2487
std::numeric_limits, 2520
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2627
std::shuffle_order_engine, 2789
std::student_t_distribution, 2852
std::subtract_with_carry_engine, 2863
std::uniform_int_distribution, 2975
std::uniform_real_distribution, 2978
std::weibull_distribution, 3142
min_element
Sorting, 330
min_element_minimal_n
__gnu_parallel::_Settings, 1044
min_exponent
std::__numeric_limits_base, 776
std::numeric_limits, 2522
min_exponent10
std::__numeric_limits_base, 776
std::numeric_limits, 2522
minmax
Sorting, 330, 331
minmax_element
Sorting, 331
minstd_rand
Random Number Generators, 261
minstd_rand0
Random Number Generators, 261
minutes
Time, 354
mismatch
Non-Mutating, 188, 190
mod_based_range_hashing.hpp, 3360
modulus
std::linear_congruential_engine, 2274
monetary
std::locale, 2310
money_get
std::money_get, 2396
money_put
std::money_put, 2400
moneypunct
std::moneypunct, 2405
move
Mutating, 157
Utilities, 374
move.h, 3360
move_backward
Mutating, 157
move_if_noexcept
Utilities, 375
mt19937
Random Number Generators, 261
mt19937_64
Random Number Generators, 262
mt_allocator.h, 3361
multimap
std::multimap, 2429, 2430
multimap.h, 3362
multiplier
std::linear_congruential_engine, 2274
multiseq_partition
__gnu_parallel, 452
multiseq_selection
__gnu_parallel, 453
multiseq_selection.h, 3363
multiset
std::multiset, 2453–2455
multiset.h, 3364
multiway_merge
__gnu_parallel, 453
multiway_merge.h, 3365
multiway_merge_3_variant
__gnu_parallel, 455
multiway_merge_4_variant
__gnu_parallel, 455
multiway_merge_exact_splitting
__gnu_parallel, 456
multiway_merge_loser_tree
__gnu_parallel, 456
multiway_merge_loser_tree_sentinel
__gnu_parallel, 457
multiway_merge_loser_tree_unguarded
__gnu_parallel, 457
multiway_merge_minimal_k

__gnu_parallel::_Settings, 1045
multiway_merge_minimal_n
__gnu_parallel::_Settings, 1045
multiway_merge_oversampling
__gnu_parallel::_Settings, 1045
multiway_merge_sampling_splitting
__gnu_parallel, 458
multiway_merge_sentinels
__gnu_parallel, 458
multiway_mergesort.h, 3368
Mutating, 149
copy, 151
copy_backward, 151
copy_if, 151
copy_n, 153
fill, 153
fill_n, 153
generate, 155
generate_n, 155
is_partitioned, 155
iter_swap, 157
move, 157
move_backward, 157
partition, 159
partition_copy, 159
partition_point, 160
random_shuffle, 160
remove, 160
remove_copy, 161
remove_copy_if, 161
remove_if, 162
replace, 162
replace_copy_if, 162
replace_if, 163
reverse, 163
reverse_copy, 163
rotate, 165
rotate_copy, 165
shuffle, 166
stable_partition, 166
swap_ranges, 167
transform, 167
unique, 168
unique_copy, 168, 170
mutex, 3368
Mutexes, 171
adopt_lock, 173
call_once, 172
defer_lock, 173
lock, 172
try_lock, 172
try_to_lock, 173

name
std::locale, 2308
std::type_info, 2966
nanoseconds
Time, 354
narrow
std::__ctype_abstract_base, 741, 742
std::basic_fstream, 1176
std::basic_ifstream, 1232
std::basic_ios, 1270
std::basic_iostream, 1304
std::basic_istream, 1356
std::basic_istringstream, 1400
std::basic_ofstream, 1438
std::basic_ostream, 1472
std::basic_ostringstream, 1505
std::basic_stringstream, 1674
std::ctype, 1877, 1878
std::ctype< char >, 1889
std::ctype< wchar_t >, 1903, 1904
std::ctype_byname, 1917
std::ctype_byname< char >, 1927
native_handle
std::thread, 2875
neg_format
std::moneypunct, 2410
std::moneypunct_byname, 2418
negative_sign
std::moneypunct, 2410
std::moneypunct_byname, 2418
Negators, 174
not1, 174
not2, 175
nested_exception.h, 3369
net.h, 3369
Networking-ts, 176
new, 3370
operator delete, 3371
operator new, 3372
new_allocator.h, 3374
new_handler
std, 582
next_permutation
Sorting, 332
noboolalpha
std, 602
node.hpp, 3374, 3375
node_begin
__gnu_pbds::detail::ov_tree_map, 2570
__gnu_pbds::detail::pat_trie_map, 2609
__gnu_pbds::detail::rb_tree_map, 2674
__gnu_pbds::detail::splay_tree_map, 2799
node_const_iterator
__gnu_pbds::detail::bin_search_tree_traits, 1721
__gnu_pbds::detail::bin_search_tree_traits< Key,

null_type, Cmp_Fn, Node_Update, Node, _Alloc >, 1722
__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >, 2923
__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >, 2925
__gnu_pbds::detail::tree_traits< Key, Mapped, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >, 2928
__gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, ov_tree_tag, _Alloc >, 2929
__gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, rb_tree_tag, _Alloc >, 2931
__gnu_pbds::detail::tree_traits< Key, null_type, Cmp_Fn, Node_Update, splay_tree_tag, _Alloc >, 2934
__gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >, 2950
__gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >, 2952
node_end
__gnu_pbds::detail::ov_tree_map, 2570, 2571
__gnu_pbds::detail::pat_trie_map, 2609
__gnu_pbds::detail::rb_tree_map, 2674
__gnu_pbds::detail::splay_tree_map, 2799
node_handle.h, 3375
node_iterators.hpp, 3375, 3376
node_metadata_selector.hpp, 3376
node_type
__gnu_pbds::detail::pat_trie_base, 2605
__gnu_pbds::detail::pat_trie_map, 2608
node_update
__gnu_pbds::detail::trie_traits< Key, Mapped, _ATraits, Node_Update, pat_trie_tag, _Alloc >, 2950
__gnu_pbds::detail::trie_traits< Key, null_type, _ATraits, Node_Update, pat_trie_tag, _Alloc >, 2952
Non-Mutating, 177
adjacent_find, 179
all_of, 179
any_of, 179
count, 181
count_if, 181
equal, 181, 182
find, 184
find_end, 184, 185
find_first_of, 185, 186
find_if, 186
find_if_not, 186
for_each, 187
is_permutation, 187, 188
mismatch, 188, 190
none_of, 192
search, 192, 193
search_n, 193
none
std::bitset, 1758
std::locale, 2311
std::tr2::dynamic_bitset, 1994
none_of
Non-Mutating, 192
norm
Complex Numbers, 47
Normal Distributions, 196
operator<<, 197
operator>>, 199
normal_distribution
std::normal_distribution, 2486
noshowbase
std, 602
noshowpoint
std, 602
noshowpos
std, 603
noskipws
std, 603
nosubs
std::regex_constants, 698
not1
Negators, 174
not2
Negators, 175
notify_cleared
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::hash_load_check_resize_trigger, 2146
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
notify_erase_search_collision
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
notify_erase_search_end
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
notify_erase_search_start
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723

notify_erased
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1771
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
notify_externally_resized
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_trigger, 2723
notify_find_search_collision
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2723
notify_find_search_end
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2724
notify_find_search_start
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2724
notify_insert_search_collision
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2724
notify_insert_search_end
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2724
notify_insert_search_start
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1772
__gnu_pbds::sample_resize_policy, 2721
__gnu_pbds::sample_resize_trigger, 2724
notify_inserted
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1773
__gnu_pbds::hash_load_check_resize_trigger, 2146
__gnu_pbds::sample_resize_policy, 2722
__gnu_pbds::sample_resize_trigger, 2724
notify_resized
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1773
__gnu_pbds::hash_load_check_resize_trigger, 2146
__gnu_pbds::sample_range_hashing, 2718
__gnu_pbds::sample_ranged_hash_fn, 2719
__gnu_pbds::sample_resize_policy, 2722
__gnu_pbds::sample_resize_trigger, 2724
nounitbuf
std, 603
nouppercase
std, 603
npos
__gnu_cxx::__versa_string, 847
__gnu_debug::basic_string, 1579
std::basic_string, 1629
nth_element
Sorting, 332, 333
nth_element_minimal_n
__gnu_parallel::_Settings, 1045
null_node_metadata.hpp, 3377
nullopt
Optional values, 238
num_blocks
std::tr2::dynamic_bitset, 1994
num_children
__gnu_pbds::detail::pat_trie_base::_Node_citer, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter, 967
num_get
std::num_get, 2495
num_put
std::num_put, 2509
numbers, 3377
numeric, 3377, 3378, 3380
std::locale, 2311
Numeric Arrays, 200
~gslice, 215
apply, 215
begin, 215, 216
cshift, 216
end, 216
gslice, 212
gslice_array, 212
indirect_array, 212
mask_array, 212
max, 218
min, 218
operator<<=, 222, 223
operator>>=, 228
operator*=, 219, 220
operator$\Gamma A30C$=, 233, 234
operator~, 234
operator^=, 232, 233
operator+, 220
operator+=, 220, 221
operator-, 221
operator-=, 221
operator/=, 222
operator=, 223, 224, 226, 228
operator%=, 218, 219
operator&=, 219
resize, 234
shift, 234

size, 235
slice, 212
slice_array, 214
start, 235
stride, 235
sum, 235
swap, 235
valarray, 214, 215
numeric_traits.h, 3381
numericfwd.h, 3382
Numerics, 237
numpunct
std::numpunct, 2544

oct
std, 603
std::basic_fstream, 1207
std::basic_ifstream, 1255
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1379
std::basic_istringstream, 1422
std::basic_ofstream, 1457
std::basic_ostream, 1488
std::basic_ostringstream, 1524
std::basic_stringstream, 1704
std::ios_base, 2189
off_type
std::basic_ios, 1263
std::basic_streambuf, 1540
std::wbuffer_convert, 3126
ofstream
I/O, 98
omp_loop.h, 3383
omp_loop_static.h, 3384
once_flag
std::once_flag, 2556
open
__gnu_cxx::enc_filebuf, 2009
__gnu_cxx::stdio_filebuf, 2812, 2814
std::basic_filebuf, 1139, 1140
std::basic_fstream, 1176
std::basic_ifstream, 1232
std::basic_ofstream, 1438, 1439
openmode
std::basic_fstream, 1162
std::basic_ifstream, 1219
std::basic_ios, 1263
std::basic_iostream, 1292
std::basic_istream, 1345
std::basic_istringstream, 1388
std::basic_ofstream, 1430
std::basic_ostream, 1465
std::basic_ostringstream, 1497
std::basic_stringstream, 1660
std::ios_base, 2179
operator _Iterator
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_local_iterator, 1016
operator _RAIter
__gnu_parallel::_GuardedIterator, 883
operator bool
std::basic_fstream, 1177
std::basic_ifstream, 1233
std::basic_ios, 1271
std::basic_iostream, 1305
std::basic_istream, 1357
std::basic_istream::sentry, 2737
std::basic_istringstream, 1401
std::basic_ofstream, 1439
std::basic_ostream, 1472
std::basic_ostream::sentry, 2739
std::basic_ostringstream, 1506
std::basic_stringstream, 1674
std::function< _Res(_ArgTypes...)>, 2082
std::shared_ptr, 2784
std::tr2::bool_set, 1765
std::unique_ptr, 2985
operator delete
new, 3371
operator new
new, 3372
operator streamoff
std::fpos, 2074
operator string_type
std::sub_match, 2859
operator<
__gnu_cxx, 398, 399
__gnu_parallel::_GuardedIterator, 883
Diagnostics, 63
Pointer Abstractions, 245, 246
Regular Expressions, 278–280
std, 607, 609, 610, 612, 613
Utilities, 375
operator<<
Bernoulli Distributions, 30
Complex Numbers, 50
Dynamic Bitset., 65
Normal Distributions, 197
Pointer Abstractions, 246
Poisson Distributions, 254
Random Number Generators, 265
Regular Expressions, 280
std, 614–619
std::__detail, 658
std::basic_fstream, 1177, 1179, 1180, 1182, 1184
std::basic_iostream, 1305, 1306, 1308, 1309, 1311
std::basic_ofstream, 1439–1442, 1444

std::basic_ostream, 1473–1477
std::basic_ostringstream, 1506, 1507, 1509, 1510, 1512
std::basic_stringstream, 1675, 1676, 1678, 1679, 1681
std::binomial_distribution, 1741
std::bitset, 1760
std::chi_squared_distribution, 1791
std::discard_block_engine, 1976
std::discrete_distribution, 1980
std::fisher_f_distribution, 2049
std::gamma_distribution, 2098
std::linear_congruential_engine, 2273
std::lognormal_distribution, 2320
std::mersenne_twister_engine, 2380
std::negative_binomial_distribution, 2481
std::normal_distribution, 2488
std::piecewise_constant_distribution, 2613
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2628
std::shuffle_order_engine, 2790
std::student_t_distribution, 2852
std::subtract_with_carry_engine, 2863
std::tr2::dynamic_bitset, 1996
Uniform Distributions, 365
operator<<=
Numeric Arrays, 222, 223
std::bitset, 1760
std::tr2::dynamic_bitset, 1996
operator<=
__gnu_cxx, 399, 400
__gnu_parallel::_GuardedIterator, 883
Dynamic Bitset., 66
Pointer Abstractions, 246, 247
Regular Expressions, 282, 283
std, 619–621
std::__debug, 653
std::rel_ops, 699
Utilities, 375
operator>
__gnu_cxx, 402, 403
Dynamic Bitset., 66
Pointer Abstractions, 247, 248
Regular Expressions, 288–290
std, 626, 627
std::__debug, 653
std::rel_ops, 699
Utilities, 376
operator>>
Bernoulli Distributions, 31
Complex Numbers, 51
Dynamic Bitset., 66
Normal Distributions, 199
Poisson Distributions, 255
std, 630, 631, 633, 634, 636
std::__detail, 658
std::basic_fstream, 1184–1187, 1189, 1191
std::basic_ifstream, 1233, 1235–1237, 1239
std::basic_iostream, 1312, 1314, 1315, 1317, 1319
std::basic_istream, 1357, 1358, 1360, 1361, 1363
std::basic_istringstream, 1401–1403, 1405, 1407
std::basic_stringstream, 1681–1684, 1686, 1688
std::binomial_distribution, 1743
std::bitset, 1760
std::chi_squared_distribution, 1792
std::discard_block_engine, 1977
std::discrete_distribution, 1980
std::fisher_f_distribution, 2050
std::gamma_distribution, 2098
std::independent_bits_engine, 2163
std::linear_congruential_engine, 2274
std::lognormal_distribution, 2320
std::mersenne_twister_engine, 2381
std::negative_binomial_distribution, 2481
std::normal_distribution, 2488
std::piecewise_constant_distribution, 2613
std::piecewise_linear_distribution, 2618
std::poisson_distribution, 2628
std::shuffle_order_engine, 2790
std::student_t_distribution, 2854
std::subtract_with_carry_engine, 2865
std::tr2::dynamic_bitset, 1996
Uniform Distributions, 365, 366
operator>>=
Numeric Arrays, 228
std::bitset, 1760
std::tr2::dynamic_bitset, 1997
operator>=
__gnu_cxx, 403, 404
Dynamic Bitset., 66
Pointer Abstractions, 248, 249
Regular Expressions, 290–292
std, 628, 629
std::__debug, 653
std::rel_ops, 699
Utilities, 376
operator*
__gnu_debug::_Safe_iterator, 1003
__gnu_debug::_Safe_local_iterator, 1016
__gnu_parallel::_GuardedIterator, 883
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1713
__gnu_pbds::detail::bin_search_tree_node_it_, 1719
__gnu_pbds::detail::binary_heap_const_iterator_, 1730
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1733

__gnu_pbds::detail::left_child_next_sibling_heap_-
const_iterator_, 2260
__gnu_pbds::detail::left_child_next_sibling_heap_-
node_point_const_iterator_, 2264
__gnu_pbds::detail::ov_tree_node_it_, 2575
__gnu_pbds::detail::pat_trie_base::_Node_citer, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter, 967
Complex Numbers, 48
std::auto_ptr, 1115
std::back_insert_iterator, 1119
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istreambuf_iterator, 2250
std::ostreambuf_iterator, 2565
std::regex_iterator, 2688
std::regex_token_iterator, 2693
std::reverse_iterator, 2707
std::unique_ptr, 2985
Time, 355
operator∗=
Complex Numbers, 48
Numeric Arrays, 219, 220
operatorΓA30C
Dynamic Bitset., 67
std, 637
std::regex_constants, 694
operatorΓA30C=
Numeric Arrays, 233, 234
std::bitset, 1761
std::regex_constants, 694
std::tr2::dynamic_bitset, 1999
operator∼
Numeric Arrays, 234
std::bitset, 1762
std::regex_constants, 695
std::tr2::dynamic_bitset, 1999
operator∧
Dynamic Bitset., 66
std, 637
std::regex_constants, 693
operator∧=
Numeric Arrays, 232, 233
std::bitset, 1761
std::regex_constants, 693, 694
std::tr2::dynamic_bitset, 1997
operator()
__gnu_cxx::subtractive_rng, 2867
__gnu_parallel::_Nothing, 971
__gnu_parallel::_RandomNumber, 984
__gnu_parallel::__accumulate_selector, 707
__gnu_parallel::__adjacent_find_selector, 711
__gnu_parallel::__count_if_selector, 731
__gnu_parallel::__count_selector, 732
__gnu_parallel::__fill_selector, 749
__gnu_parallel::__find_first_of_selector, 751
__gnu_parallel::__find_if_selector, 752
__gnu_parallel::__for_each_selector, 753
__gnu_parallel::__generate_selector, 756
__gnu_parallel::__identity_selector, 760
__gnu_parallel::__inner_product_selector, 762
__gnu_parallel::__mismatch_selector, 768
__gnu_parallel::__replace_if_selector, 789
__gnu_parallel::__replace_selector, 791
__gnu_parallel::__transform1_selector, 793
__gnu_parallel::__transform2_selector, 794
__gnu_pbds::direct_mask_range_hashing, 1971
__gnu_pbds::direct_mod_range_hashing, 1973
__gnu_pbds::linear_probe_fn, 2275
__gnu_pbds::lu_counter_policy, 2323
__gnu_pbds::lu_move_to_front_policy, 2327
__gnu_pbds::quadratic_probe_fn, 2641
__gnu_pbds::sample_probe_fn, 2717
__gnu_pbds::sample_range_hashing, 2718
__gnu_pbds::sample_ranged_hash_fn, 2719
__gnu_pbds::sample_trie_node_update, 2727
__gnu_pbds::sample_update_policy, 2728
__gnu_pbds::tree_order_statistics_node_update,
2920
__gnu_pbds::trie_order_statistics_node_update,
2940
__gnu_pbds::trie_prefix_search_node_update, 2945
std::bernoulli_distribution, 1707
std::binomial_distribution, 1740, 1741
std::cauchy_distribution, 1768
std::chi_squared_distribution, 1791
std::default_delete, 1939
std::discard_block_engine, 1976
std::discrete_distribution, 1979
std::exponential_distribution, 2037
std::extreme_value_distribution, 2041
std::fisher_f_distribution, 2049
std::function< _Res(_ArgTypes...)>, 2082
std::gamma_distribution, 2097
std::geometric_distribution, 2100
std::independent_bits_engine, 2162
std::linear_congruential_engine, 2273
std::locale, 2308
std::lognormal_distribution, 2319
std::negative_binomial_distribution, 2480
std::normal_distribution, 2487
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2627
std::shuffle_order_engine, 2789
std::student_t_distribution, 2852
std::subtract_with_carry_engine, 2863
std::uniform_int_distribution, 2976
std::uniform_real_distribution, 2978

std::weibull_distribution, 3142
operator+
__gnu_cxx, 395, 397, 398
Complex Numbers, 48, 49
Numeric Arrays, 220
std, 606, 607
std::fpos, 2074
std::reverse_iterator, 2707
Time, 355
operator++
__gnu_debug::_Safe_iterator, 1004
__gnu_debug::_Safe_local_iterator, 1017
__gnu_parallel::_GuardedIterator, 883
std::back_insert_iterator, 1119
std::front_insert_iterator, 2079
std::insert_iterator, 2171
std::istreambuf_iterator, 2250
std::ostreambuf_iterator, 2565
std::regex_iterator, 2689
std::regex_token_iterator, 2693
std::reverse_iterator, 2708
operator+=
__gnu_cxx::__versa_string, 831, 832
__gnu_debug::basic_string, 1572
Complex Numbers, 49
Numeric Arrays, 220, 221
std::basic_string, 1615, 1616
std::complex, 1835
std::fpos, 2074
std::reverse_iterator, 2708
operator-
Complex Numbers, 49
Dynamic Bitset., 65
Numeric Arrays, 221
std::fpos, 2074
std::reverse_iterator, 2708
Time, 355
operator->
__gnu_debug::_Safe_iterator, 1004
__gnu_debug::_Safe_local_iterator, 1017
__gnu_pbds::detail::binary_heap_const_iterator_, 1730
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1734
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2260
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2265
std::auto_ptr, 1115
std::regex_iterator, 2689
std::regex_token_iterator, 2693
std::reverse_iterator, 2709
std::unique_ptr, 2985
operator--
std::reverse_iterator, 2708, 2709
operator-=
Complex Numbers, 49
Numeric Arrays, 221
std::complex, 1835
std::fpos, 2074
std::reverse_iterator, 2709
std::tr2::dynamic_bitset, 1996
operator/
Complex Numbers, 49, 50
operator/=
Complex Numbers, 50
Numeric Arrays, 222
operator=
__gnu_cxx::__versa_string, 832, 833
__gnu_debug::_Safe_iterator, 1004
__gnu_debug::_Safe_local_iterator, 1017, 1018
Complex Numbers, 50
Numeric Arrays, 223, 224, 226, 228
std::__allocated_ptr, 717
std::auto_ptr, 1115, 1116
std::back_insert_iterator, 1119
std::basic_regex, 1534, 1535
std::basic_string, 1616, 1618
std::deque, 1961, 1962
std::experimental::fundamentals_v1::any, 1077, 1078
std::forward_list, 2068, 2069
std::front_insert_iterator, 2079
std::function< _Res(_ArgTypes...)>, 2082, 2084, 2085
std::insert_iterator, 2171
std::list, 2293, 2295
std::locale, 2308
std::map, 2355
std::match_results, 2368, 2369
std::multimap, 2445
std::multiset, 2466
std::once_flag, 2556
std::ostream_iterator, 2561
std::ostreambuf_iterator, 2566
std::regex_iterator, 2689
std::regex_token_iterator, 2694
std::set, 2764
std::tr2::dynamic_bitset, 1996
std::unique_ptr, 2985
std::unordered_map, 3012
std::unordered_multimap, 3037, 3038
std::unordered_multiset, 3063
std::unordered_set, 3087, 3088
std::vector, 3111
operator==
__gnu_cxx, 400, 402
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1713

__gnu_pbds::detail::bin_search_tree_node_it_, 1719
__gnu_pbds::detail::binary_heap_const_iterator_, 1730, 1731
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1734
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2260, 2261
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2265
__gnu_pbds::detail::pat_trie_base::_Node_citer, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter, 967
Allocators, 7
Complex Numbers, 50, 51
Diagnostics, 63
Iterators, 108
Pointer Abstractions, 247
Regular Expressions, 285, 286, 288
std, 621–625
std::__exception_ptr::exception_ptr, 2035
std::_Fwd_list_const_iterator, 878
std::_Fwd_list_iterator, 880
std::bernoulli_distribution, 1707
std::binomial_distribution, 1743
std::bitset, 1760
std::cauchy_distribution, 1769
std::chi_squared_distribution, 1792
std::discard_block_engine, 1977
std::discrete_distribution, 1980
std::exponential_distribution, 2038
std::extreme_value_distribution, 2043
std::fisher_f_distribution, 2050
std::gamma_distribution, 2098
std::geometric_distribution, 2101
std::independent_bits_engine, 2163
std::istream_iterator, 2246
std::linear_congruential_engine, 2274
std::locale, 2309
std::lognormal_distribution, 2320
std::mersenne_twister_engine, 2380
std::negative_binomial_distribution, 2481
std::normal_distribution, 2488
std::piecewise_constant_distribution, 2613
std::piecewise_linear_distribution, 2618
std::poisson_distribution, 2628
std::regex_iterator, 2689
std::regex_token_iterator, 2694
std::shuffle_order_engine, 2790
std::student_t_distribution, 2854
std::subtract_with_carry_engine, 2865
std::uniform_int_distribution, 2976
std::uniform_real_distribution, 2979
std::weibull_distribution, 3143
Utilities, 376
operator%=
Numeric Arrays, 218, 219
operator&
Dynamic Bitset., 65
std, 606
std::regex_constants, 692, 693
operator&=
Numeric Arrays, 219
std::bitset, 1758
std::regex_constants, 693
std::tr2::dynamic_bitset, 1994
operator""h
std::literals::chrono_literals, 687
operator""min
std::literals::chrono_literals, 687
operator""ms
std::literals::chrono_literals, 687
operator""ns
std::literals::chrono_literals, 687, 688
operator""s
std::literals::chrono_literals, 688
operator""us
std::literals::chrono_literals, 688
opt_random.h, 3384
optimize
std::regex_constants, 698
optional, 3384, 3385
Optional values, 238
in_place, 238
nullopt, 238
order_preserving
__gnu_pbds::container_traits, 1864
order_of_key
__gnu_pbds::tree_order_statistics_node_update, 2921
__gnu_pbds::trie_order_statistics_node_update, 2940
order_of_prefix
__gnu_pbds::trie_order_statistics_node_update, 2941
order_statistics_imp.hpp, 3385
os_defines.h, 3386
ostream, 3386
I/O, 98
ostream.tcc, 3387
ostream_insert.h, 3388
ostream_iterator
std::ostream_iterator, 2561
ostream_type
std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
ostreambuf_iterator
std::ostreambuf_iterator, 2565
ostringstream
I/O, 98

out
std::__codecvt_abstract_base, 728
std::basic_fstream, 1207
std::basic_ifstream, 1255
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1379
std::basic_istringstream, 1422
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1524
std::basic_stringstream, 1704
std::codecvt, 1795
std::codecvt< _InternT, _ExternT, encoding_state >, 1799
std::codecvt< char, char, mbstate_t >, 1803
std::codecvt< char16_t, char, mbstate_t >, 1807
std::codecvt< char32_t, char, mbstate_t >, 1811
std::codecvt< wchar_t, char, mbstate_t >, 1815
std::codecvt_byname, 1820
std::ios_base, 2189
ov_tree_map_.hpp, 3388
overflow
__gnu_cxx::enc_filebuf, 2011
__gnu_cxx::stdio_filebuf, 2815
__gnu_cxx::stdio_sync_filebuf, 2832
std::basic_filebuf, 1141
std::basic_streambuf, 1543
std::basic_stringbuf, 1638
std::wbuffer_convert, 3129
owner_before
std::shared_ptr, 2784

p
std::bernoulli_distribution, 1707
std::binomial_distribution, 1741
std::geometric_distribution, 2100
std::negative_binomial_distribution, 2480
pair
std::pair, 2585, 2586
Utilities, 372
pairing_heap_.hpp, 3389
par_loop.h, 3389
parallel.h, 3390
parallel_balanced
__gnu_parallel, 423
parallel_omp_loop
__gnu_parallel, 423
parallel_omp_loop_static
__gnu_parallel, 423
parallel_taskqueue
__gnu_parallel, 423
parallel_unbalanced
__gnu_parallel, 423
parallel_multiway_merge
__gnu_parallel, 459
parallel_sort_mwms
__gnu_parallel, 460
parallel_sort_mwms_pu
__gnu_parallel, 460
parallel_tag
__gnu_parallel::parallel_tag, 2591
param
std::bernoulli_distribution, 1707
std::binomial_distribution, 1741
std::cauchy_distribution, 1769
std::chi_squared_distribution, 1791
std::discrete_distribution, 1979
std::exponential_distribution, 2038
std::extreme_value_distribution, 2041
std::fisher_f_distribution, 2049
std::gamma_distribution, 2097
std::geometric_distribution, 2100
std::lognormal_distribution, 2319, 2320
std::negative_binomial_distribution, 2480, 2481
std::normal_distribution, 2487
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2627
std::student_t_distribution, 2852
std::uniform_int_distribution, 2976
std::uniform_real_distribution, 2978, 2979
std::weibull_distribution, 3143
parse_numbers.h, 3390
partial_sort
Sorting, 333, 334
partial_sort_copy
Sorting, 334
partial_sort_minimal_n
__gnu_parallel::_Settings, 1045
partial_sum
Generalized Numeric operations, 83
partial_sum.h, 3390
partial_sum_dilation
__gnu_parallel::_Settings, 1045
partial_sum_minimal_n
__gnu_parallel::_Settings, 1045
partition
Mutating, 159
partition.h, 3391
_GLIBCXX_VOLATILE, 3391
partition_chunk_share
__gnu_parallel::_Settings, 1045
partition_chunk_size
__gnu_parallel::_Settings, 1045
partition_copy
Mutating, 159
partition_minimal_n

__gnu_parallel::_Settings, 1046
partition_point
Mutating, 160
pat_trie_.hpp, 3392
pat_trie_base.hpp, 3392
pbackfail
__gnu_cxx::enc_filebuf, 2011
__gnu_cxx::stdio_filebuf, 2815
__gnu_cxx::stdio_sync_filebuf, 2833
std::basic_filebuf, 1141
std::basic_streambuf, 1543
std::basic_stringbuf, 1640
std::wbuffer_convert, 3130
pbase
__gnu_cxx::enc_filebuf, 2011
__gnu_cxx::stdio_filebuf, 2816
__gnu_cxx::stdio_sync_filebuf, 2833
std::basic_filebuf, 1142
std::basic_streambuf, 1545
std::basic_stringbuf, 1640
std::wbuffer_convert, 3130
pbump
__gnu_cxx::enc_filebuf, 2012
__gnu_cxx::stdio_filebuf, 2816
__gnu_cxx::stdio_sync_filebuf, 2833
std::basic_filebuf, 1142
std::basic_streambuf, 1545
std::basic_stringbuf, 1641
std::wbuffer_convert, 3130
peek
std::basic_fstream, 1191
std::basic_ifstream, 1240
std::basic_iostream, 1319
std::basic_istream, 1364
std::basic_istringstream, 1408
std::basic_stringstream, 1688
piecewise_construct
Utilities, 377
pod_char_traits.h, 3393
point_const_iterator.hpp, 3393, 3394
point_iterator.hpp, 3394
point_iterators.hpp, 3395
pointer
__gnu_pbds::detail::binary_heap_const_iterator_, 1729
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1733
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2263
std::allocator_traits, 1065
std::allocator_traits< allocator< _Tp > >, 1070
std::back_insert_iterator, 1118
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istream_iterator, 2245
std::istreambuf_iterator, 2249
std::iterator, 2251
std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
std::pointer_traits, 2624
std::pointer_traits< _Tp * >, 2625
std::raw_storage_iterator, 2665
std::set, 2749
std::unordered_map, 2996
std::unordered_multimap, 3024
std::unordered_multiset, 3047
std::unordered_set, 3073
Pointer Abstractions, 239
__cpp_lib_make_unique, 242
allocate_shared, 242
atomic_compare_exchange_strong_explicit, 242
atomic_exchange_explicit, 243
atomic_is_lock_free, 243
atomic_load_explicit, 243
atomic_store_explicit, 243
const_pointer_cast, 244
dynamic_pointer_cast, 244
get_deleter, 244
make_shared, 244
make_unique, 244
operator<, 245, 246
operator<<, 246
operator<=, 246, 247
operator>, 247, 248
operator>=, 248, 249
operator==, 247
static_pointer_cast, 249
swap, 249
Pointer Safety and Garbage Collection, 250
declare_no_pointers, 250
declare_reachable, 250
get_pointer_safety, 251
pointer_safety, 250
undeclare_no_pointers, 251
undeclare_reachable, 251
pointer.h, 3395
pointer_safety
Pointer Safety and Garbage Collection, 250
pointer_to
std::pointer_traits< _Tp * >, 2625
Poisson Distributions, 252
operator<<, 254
operator>>, 255
polar
Complex Numbers, 51
Policy-Based Data Structures, 257

policy_access_fn_imps.hpp, 3397, 3398
pool_allocator.h, 3398
pop
    std::priority_queue, 2632
    std::queue, 2643
    std::stack, 2803
pop_back
    __gnu_cxx::__versa_string, 834
    __gnu_parallel::_RestrictedBoundedConcurrent-
        Queue, 988
    std::basic_string, 1618
    std::deque, 1964
    std::list, 2295
    std::vector, 3112
pop_front
    __gnu_parallel::_RestrictedBoundedConcurrent-
        Queue, 988
    std::deque, 1964
    std::forward_list, 2069
    std::list, 2295
pop_heap
    Heap, 90, 91
pos_format
    std::moneypunct, 2410
    std::moneypunct_byname, 2419
pos_type
    std::basic_ios, 1263
    std::basic_streambuf, 1540
    std::wbuffer_convert, 3126
position
    std::match_results, 2369
positive_sign
    std::moneypunct, 2411
    std::moneypunct_byname, 2419
postypes.h, 3399
pow
    Complex Numbers, 51, 52
power
    SGI, 310
pptr
    __gnu_cxx::enc_filebuf, 2012
    __gnu_cxx::stdio_filebuf, 2816
    __gnu_cxx::stdio_sync_filebuf, 2835
    std::basic_filebuf, 1142
    std::basic_streambuf, 1545
    std::basic_stringbuf, 1641
    std::wbuffer_convert, 3131
precision
    std::basic_fstream, 1191, 1192
    std::basic_ifstream, 1240
    std::basic_ios, 1271
    std::basic_iostream, 1319, 1320
    std::basic_istream, 1364
    std::basic_istringstream, 1408
    std::basic_ofstream, 1446
    std::basic_ostream, 1477, 1478
    std::basic_ostringstream, 1513
    std::basic_stringstream, 1688, 1689
    std::ios_base, 2183
predefined_ops.h, 3399
prefix
    std::match_results, 2369
prefix_range
    __gnu_pbds::trie_prefix_search_node_update, 2945,
        2946
prefix_search_node_update_imp.hpp, 3401
prev_permutation
    Sorting, 336
priority_queue
    Heap-Based, 95
    std::priority_queue, 2631, 2632
priority_queue.hpp, 3401
priority_queue_base_dispatch.hpp, 3401
probabilities
    std::discrete_distribution, 1980
probe_fn_base.hpp, 3402
propagate_const, 3402
propagate_on_container_copy_assignment
    __gnu_cxx::__alloc_traits, 713
    std::allocator_traits, 1065
    std::allocator_traits< allocator< _Tp > >, 1071
propagate_on_container_move_assignment
    __gnu_cxx::__alloc_traits, 713
    std::allocator_traits, 1065
    std::allocator_traits< allocator< _Tp > >, 1071
propagate_on_container_swap
    __gnu_cxx::__alloc_traits, 714
    std::allocator_traits, 1066
    std::allocator_traits< allocator< _Tp > >, 1071
ptr_fun
    Adaptors for pointers to functions, 3
ptr_traits.h, 3404
pubimbue
    __gnu_cxx::enc_filebuf, 2012
    __gnu_cxx::stdio_filebuf, 2816
    __gnu_cxx::stdio_sync_filebuf, 2835
    std::basic_filebuf, 1142
    std::basic_streambuf, 1546
    std::basic_stringbuf, 1641
    std::wbuffer_convert, 3131
pubseekoff
    __gnu_cxx::enc_filebuf, 2013
    __gnu_cxx::stdio_filebuf, 2817
    __gnu_cxx::stdio_sync_filebuf, 2835
    std::basic_filebuf, 1143
    std::basic_streambuf, 1546
    std::basic_stringbuf, 1641
    std::wbuffer_convert, 3131

pubseekpos
__gnu_cxx::enc_filebuf, 2013
__gnu_cxx::stdio_filebuf, 2817
__gnu_cxx::stdio_sync_filebuf, 2835
std::basic_filebuf, 1143
std::basic_streambuf, 1546
std::basic_stringbuf, 1642
std::wbuffer_convert, 3132
pubsetbuf
__gnu_cxx::enc_filebuf, 2013
__gnu_cxx::stdio_filebuf, 2817
__gnu_cxx::stdio_sync_filebuf, 2837
std::basic_filebuf, 1143
std::basic_streambuf, 1546
std::basic_stringbuf, 1642
std::wbuffer_convert, 3132
pubsync
__gnu_cxx::enc_filebuf, 2013
__gnu_cxx::stdio_filebuf, 2817
__gnu_cxx::stdio_sync_filebuf, 2837
std::basic_filebuf, 1143
std::basic_streambuf, 1547
std::basic_stringbuf, 1642
std::wbuffer_convert, 3132
push
std::priority_queue, 2632
std::queue, 2643
std::stack, 2803
push_back
__gnu_cxx::__versa_string, 834
std::basic_string, 1619
std::deque, 1964
std::list, 2295
std::tr2::dynamic_bitset, 1999
std::vector, 3112
push_front
__gnu_parallel::_RestrictedBoundedConcurrent-
Queue, 988
std::deque, 1964
std::forward_list, 2069
std::list, 2297
push_heap
Heap, 91
put
std::basic_fstream, 1192
std::basic_iostream, 1320
std::basic_ofstream, 1446
std::basic_ostream, 1478
std::basic_ostringstream, 1513
std::basic_stringstream, 1689
std::money_put, 2401, 2402
std::num_put, 2513–2517
std::time_put, 2909
std::time_put_byname, 2912, 2913
put_money
std, 637
put_time
std, 638
putback
std::basic_fstream, 1192
std::basic_ifstream, 1240
std::basic_iostream, 1320
std::basic_istream, 1364
std::basic_istringstream, 1408
std::basic_stringstream, 1689
pword
std::basic_fstream, 1193
std::basic_ifstream, 1241
std::basic_ios, 1272
std::basic_iostream, 1321
std::basic_istream, 1365
std::basic_istringstream, 1409
std::basic_ofstream, 1447
std::basic_ostream, 1478
std::basic_ostringstream, 1514
std::basic_stringstream, 1690
std::ios_base, 2183

qsb_steals
__gnu_parallel::_Settings, 1046
quadratic_probe_fn_imp.hpp, 3405
queue, 3405
std::queue, 2642
queue.h, 3405
_GLIBCXX_VOLATILE, 3405
quicksort.h, 3406
quiet_NaN
std::numeric_limits, 2520
quoted
std, 638
quoted_string.h, 3406

r_erase_fn_imps.hpp, 3407
radix
std::__numeric_limits_base, 776
std::numeric_limits, 2522
random, 3407
Random Number Distributions, 258
Random Number Generation, 259
generate_canonical, 259
Random Number Generators, 260
minstd_rand, 261
minstd_rand0, 261
mt19937, 261
mt19937_64, 262
operator<<, 265
Random Number Utilities, 266
random.h, 3408
random.tcc, 3412, 3417

random_number.h, 3420
random_sample
SGI, 310
random_sample_n
SGI, 311
random_shuffle
Mutating, 160
random_shuffle.h, 3420
random_shuffle_minimal_n
__gnu_parallel::_Settings, 1046
range_access.h, 3421
range_cmp.h, 3422
ranged_hash_fn.hpp, 3423
ranged_probe_fn.hpp, 3423
ranges, 3424
ranges_algo.h, 3424
ranges_algobase.h, 3424
ranges_uninitialized.h, 3424
ratio, 3424, 3426
ratio_add
Rational Arithmetic, 268
ratio_divide
Rational Arithmetic, 268
ratio_multiply
Rational Arithmetic, 268
ratio_subtract
Rational Arithmetic, 268
Rational Arithmetic, 267
ratio_add, 268
ratio_divide, 268
ratio_multiply, 268
ratio_subtract, 268
rb_tree, 3426
rb_tree_.hpp, 3427
rbegin
__gnu_cxx::__versa_string, 836
std, 638, 640
std::basic_string, 1619
std::deque, 1964, 1965
std::list, 2297
std::map, 2356
std::multimap, 2445
std::multiset, 2467
std::set, 2764
std::vector, 3112
rc.hpp, 3427
rc_binomial_heap_.hpp, 3428
rc_string_base.h, 3428
rdbuf
std::basic_fstream, 1193, 1194
std::basic_ifstream, 1241, 1242
std::basic_ios, 1272
std::basic_iostream, 1321, 1322
std::basic_istream, 1365, 1366
std::basic_istringstream, 1409, 1410
std::basic_ofstream, 1447, 1448
std::basic_ostream, 1479
std::basic_ostringstream, 1514
std::basic_stringstream, 1690, 1691
rdstate
std::basic_fstream, 1194
std::basic_ifstream, 1242
std::basic_ios, 1273
std::basic_iostream, 1322
std::basic_istream, 1366
std::basic_istringstream, 1410
std::basic_ofstream, 1448
std::basic_ostream, 1480
std::basic_ostringstream, 1515
std::basic_stringstream, 1691
read
std::basic_fstream, 1194
std::basic_ifstream, 1242
std::basic_iostream, 1322
std::basic_istream, 1366
std::basic_istringstream, 1410
std::basic_stringstream, 1691
readsome
std::basic_fstream, 1195
std::basic_ifstream, 1243
std::basic_iostream, 1323
std::basic_istream, 1367
std::basic_istringstream, 1411
std::basic_stringstream, 1692
ready
std::match_results, 2370
rebind
std::pointer_traits, 2624
ref
std::reference_wrapper, 2685
reference
__gnu_pbds::detail::bin_search_tree_const_node_it-_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1718
__gnu_pbds::detail::binary_heap_const_iterator_, 1729
__gnu_pbds::detail::binary_heap_point_const_-iterator_, 1733
__gnu_pbds::detail::left_child_next_sibling_heap_-const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_-node_point_const_iterator_, 2264
std::back_insert_iterator, 1119
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istream_iterator, 2245
std::istreambuf_iterator, 2249
std::iterator, 2251

std::ostream_iterator, 2560
std::ostreambuf_iterator, 2564
std::raw_storage_iterator, 2665
std::set, 2749
std::unordered_map, 2996
std::unordered_multimap, 3024
std::unordered_multiset, 3047
std::unordered_set, 3073
refwrap.h, 3428
regex, 3429
Regular Expressions, 274
regex.h, 3429
regex.tcc, 3432
regex_automaton.h, 3433
regex_automaton.tcc, 3434
regex_compiler.h, 3434
regex_compiler.tcc, 3435
regex_constants.h, 3435
regex_error
std::regex_error, 2686
regex_error.h, 3437
regex_executor.h, 3437
regex_executor.tcc, 3438
regex_iterator
std::regex_iterator, 2688
regex_match
Regular Expressions, 292–294
regex_replace
Regular Expressions, 295–297
regex_scanner.h, 3438
regex_scanner.tcc, 3438
regex_search
Regular Expressions, 298, 300, 301
regex_token_iterator
std::regex_token_iterator, 2690, 2692, 2693
regex_traits
std::regex_traits, 2695
register_callback
std::basic_fstream, 1195
std::basic_ifstream, 1243
std::basic_ios, 1273
std::basic_iostream, 1323
std::basic_istream, 1367
std::basic_istringstream, 1411
std::basic_ofstream, 1448
std::basic_ostream, 1480
std::basic_ostringstream, 1515
std::basic_stringstream, 1692
std::ios_base, 2183
Regular Expressions, 269
cregex_token_iterator, 274
csub_match, 274
operator<, 278–280
operator<<, 280
operator<=, 282, 283
operator>, 288–290
operator>=, 290–292
operator==, 285, 286, 288
regex, 274
regex_match, 292–294
regex_replace, 295–297
regex_search, 298, 300, 301
sregex_token_iterator, 275
ssub_match, 275
swap, 301
wcregex_token_iterator, 275
wcsub_match, 275
wregex, 275
wsregex_token_iterator, 275
wssub_match, 275
rehash
std::unordered_map, 3013
std::unordered_multimap, 3038
std::unordered_multiset, 3063
std::unordered_set, 3088
release
std::auto_ptr, 1116
std::unique_ptr, 2985
remove
Mutating, 160
std::forward_list, 2069
std::list, 2297
remove_all_extents_t
Metaprogramming, 147
remove_const_t
Metaprogramming, 147
remove_copy
Mutating, 161
remove_copy_if
Mutating, 161
remove_cv_t
Metaprogramming, 147
remove_extent_t
Metaprogramming, 147
remove_if
Mutating, 162
std::forward_list, 2070
std::list, 2297
remove_pointer_t
Metaprogramming, 147
remove_reference_t
Metaprogramming, 147
remove_volatile_t
Metaprogramming, 147
rend
__gnu_cxx::__versa_string, 836
std, 640
std::basic_string, 1619

std::deque, 1965
std::list, 2298
std::map, 2356
std::multimap, 2445, 2446
std::multiset, 2467
std::set, 2764
std::vector, 3113
replace
__gnu_cxx::__versa_string, 836, 837, 839–842
__gnu_debug::basic_string, 1574, 1575, 1577, 1578
Mutating, 162
std::basic_string, 1619–1625
replace_copy
std, 640
replace_copy_if
Mutating, 162
replace_if
Mutating, 163
replace_minimal_n
__gnu_parallel::_Settings, 1046
requested_size
__gnu_cxx::temporary_buffer, 2871
std::_Temporary_buffer, 1052
reserve
__gnu_cxx::__versa_string, 843
__gnu_debug::basic_string, 1578
std::basic_string, 1625
std::unordered_map, 3013
std::unordered_multimap, 3038
std::unordered_multiset, 3063
std::unordered_set, 3088
std::vector, 3113
reset
std::auto_ptr, 1116
std::bernoulli_distribution, 1707
std::binomial_distribution, 1741
std::bitset, 1762
std::cauchy_distribution, 1769
std::chi_squared_distribution, 1791
std::discrete_distribution, 1980
std::exponential_distribution, 2038
std::extreme_value_distribution, 2043
std::fisher_f_distribution, 2049
std::gamma_distribution, 2097
std::geometric_distribution, 2100
std::lognormal_distribution, 2320
std::negative_binomial_distribution, 2481
std::normal_distribution, 2488
std::piecewise_constant_distribution, 2613
std::piecewise_linear_distribution, 2616
std::poisson_distribution, 2628
std::student_t_distribution, 2852
std::tr2::dynamic_bitset, 1999
std::uniform_int_distribution, 2976
std::uniform_real_distribution, 2979
std::unique_ptr, 2986
std::weibull_distribution, 3143
resetiosflags
std, 642
resize
__gnu_cxx::__versa_string, 843
__gnu_pbds::hash_standard_resize_policy, 2157
Numeric Arrays, 234
std::basic_string, 1626
std::deque, 1965
std::forward_list, 2070
std::list, 2298
std::tr2::dynamic_bitset, 1999
std::vector, 3113
resize_fn_imps.hpp, 3439
resize_no_store_hash_fn_imps.hpp, 3439
resize_policy.hpp, 3439
resize_store_hash_fn_imps.hpp, 3440
result_of_t
Metaprogramming, 147
result_type
__gnu_cxx::__detail::_Ffit_finder, 875
__gnu_cxx::binary_compose, 1724
__gnu_cxx::project1st, 2635
__gnu_cxx::project2nd, 2636
__gnu_cxx::select1st, 2734
__gnu_cxx::select2nd, 2735
__gnu_cxx::subtractive_rng, 2866
__gnu_cxx::unary_compose, 2969
__gnu_parallel::_EqualFromLess, 868
__gnu_parallel::_EqualTo, 871
__gnu_parallel::_Less, 919
__gnu_parallel::_Lexicographic, 920
__gnu_parallel::_LexicographicReverse, 921
__gnu_parallel::_Multiplies, 959
__gnu_parallel::_Plus, 973
__gnu_parallel::__binder1st, 724
__gnu_parallel::__binder2nd, 726
__gnu_parallel::__unary_negate, 796
std::bernoulli_distribution, 1706
std::binary_function, 1725
std::binary_negate, 1736
std::binder1st, 1737
std::binder2nd, 1739
std::binomial_distribution, 1740
std::cauchy_distribution, 1768
std::chi_squared_distribution, 1790
std::const_mem_fun1_ref_t, 1844
std::const_mem_fun1_t, 1846
std::const_mem_fun_ref_t, 1847
std::const_mem_fun_t, 1848
std::discard_block_engine, 1974
std::discrete_distribution, 1979

std::divides, 1982
std::equal_to, 2029
std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >, 2578
std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >, 2581
std::exponential_distribution, 2037
std::extreme_value_distribution, 2041
std::fisher_f_distribution, 2048
std::gamma_distribution, 2096
std::geometric_distribution, 2099
std::greater, 2112
std::greater_equal, 2114
std::hash< __gnu_cxx::throw_value_limit >, 2124
std::hash< __gnu_cxx::throw_value_random >, 2125
std::independent_bits_engine, 2161
std::less, 2267
std::less_equal, 2268
std::linear_congruential_engine, 2271
std::logical_and, 2314
std::logical_not, 2315
std::logical_or, 2317
std::lognormal_distribution, 2319
std::mem_fun1_ref_t, 2373
std::mem_fun1_t, 2374
std::mem_fun_ref_t, 2376
std::mem_fun_t, 2377
std::mersenne_twister_engine, 2379
std::minus, 2388
std::modulus, 2391
std::multiplies, 2448
std::negate, 2478
std::negative_binomial_distribution, 2480
std::normal_distribution, 2486
std::not_equal_to, 2490
std::owner_less< shared_ptr< _Tp > >, 2579
std::owner_less< void >, 2580
std::owner_less< weak_ptr< _Tp > >, 2582
std::piecewise_constant_distribution, 2612
std::piecewise_linear_distribution, 2615
std::plus, 2619
std::pointer_to_binary_function, 2621
std::pointer_to_unary_function, 2623
std::poisson_distribution, 2626
std::random_device, 2649
std::seed_seq, 2733
std::shuffle_order_engine, 2787
std::student_t_distribution, 2851
std::subtract_with_carry_engine, 2861
std::unary_function, 2970
std::unary_negate, 2971
std::uniform_int_distribution, 2975
std::uniform_real_distribution, 2978
std::weibull_distribution, 3142
rethrow_exception
Exceptions, 71
rethrow_if_nested
Exceptions, 71
return_temporary_buffer
std, 642
reverse
Mutating, 163
std::forward_list, 2070
std::list, 2298
reverse_iteration
__gnu_pbds::container_traits, 1864
reverse_copy
Mutating, 163
reverse_iterator
std::reverse_iterator, 2706, 2707
std::set, 2749
rfind
__gnu_cxx::__versa_string, 844–846
__gnu_debug::basic_string, 1578
std::basic_string, 1626–1628
riemann_zeta
Mathematical Special Functions, 134
TR1 Mathematical Special Functions, 347
riemann_zetaf
Mathematical Special Functions, 135
riemann_zetal
Mathematical Special Functions, 135
right
std, 642
std::basic_fstream, 1207
std::basic_ifstream, 1255
std::basic_ios, 1282
std::basic_iostream, 1336
std::basic_istream, 1379
std::basic_istringstream, 1422
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1524
std::basic_stringstream, 1704
std::ios_base, 2189
rope, 3440
ropeimpl.h, 3443
rotate
Mutating, 165
rotate_copy
Mutating, 165
rotate_fn_imps.hpp, 3444
round_to_nearest
std, 583
round_toward_infinity
std, 583
round_toward_neg_infinity

std, 583
round_toward_zero
std, 583
round_error
std::numeric_limits, 2520
round_style
std::__numeric_limits_base, 776
std::numeric_limits, 2523
runtime_error
std::runtime_error, 2716

SGI, 304
_Find_first, 307
_Find_next, 307
_Unchecked_flip, 308
_Unchecked_reset, 308
_Unchecked_set, 308
_Unchecked_test, 308
__median, 306, 307
compose1, 308
compose2, 308
constant0, 308
constant1, 309
constant2, 309
copy_n, 309
distance, 309
identity_element, 309
lexicographical_compare_3way, 310
power, 310
random_sample, 310
random_sample_n, 311
uninitialized_copy_n, 311
safe_base.h, 3444
safe_container.h, 3445
safe_iterator.h, 3445
safe_iterator.tcc, 3446
safe_local_iterator.h, 3447
safe_local_iterator.tcc, 3447
safe_sequence.h, 3448
safe_sequence.tcc, 3448
safe_unordered_base.h, 3449
safe_unordered_container.h, 3449
safe_unordered_container.tcc, 3449
sample_probe_fn
__gnu_pbds::sample_probe_fn, 2717
sample_probe_fn.hpp, 3450
sample_range_hashing
__gnu_pbds::sample_range_hashing, 2718
__gnu_pbds::sample_resize_policy, 2722
__gnu_pbds::sample_resize_trigger, 2724
__gnu_pbds::sample_size_policy, 2725
sample_range_hashing.hpp, 3450
sample_ranged_hash_fn
__gnu_pbds::sample_ranged_hash_fn, 2719
sample_ranged_hash_fn.hpp, 3450
sample_ranged_probe_fn.hpp, 3451
sample_resize_policy
__gnu_pbds::sample_resize_policy, 2721
sample_resize_policy.hpp, 3451
sample_resize_trigger
__gnu_pbds::sample_resize_trigger, 2723
sample_resize_trigger.hpp, 3451
sample_size_policy
__gnu_pbds::sample_size_policy, 2725
sample_size_policy.hpp, 3452
sample_tree_node_update.hpp, 3452
sample_trie_access_traits.hpp, 3452
sample_trie_node_update
__gnu_pbds::sample_trie_node_update, 2727
sample_trie_node_update.hpp, 3453
sample_update_policy
__gnu_pbds::sample_update_policy, 2728
sample_update_policy.hpp, 3453
sbumpc
__gnu_cxx::enc_filebuf, 2013
__gnu_cxx::stdio_filebuf, 2817
__gnu_cxx::stdio_sync_filebuf, 2837
std::basic_filebuf, 1143
std::basic_streambuf, 1547
std::basic_stringbuf, 1642
std::wbuffer_convert, 3132
scan_is
std::__ctype_abstract_base, 742
std::ctype, 1878
std::ctype< char >, 1890
std::ctype< wchar_t >, 1904
std::ctype_byname, 1918
std::ctype_byname< char >, 1928
scan_not
std::__ctype_abstract_base, 743
std::ctype, 1878
std::ctype< char >, 1890
std::ctype< wchar_t >, 1905
std::ctype_byname, 1918
std::ctype_byname< char >, 1928
scientific
std, 642
std::basic_fstream, 1208
std::basic_ifstream, 1255
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1379
std::basic_istringstream, 1423
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1524
std::basic_stringstream, 1704
std::ios_base, 2190

scoped_allocator, 3453
search
    Non-Mutating, 192, 193
search.h, 3454
search_minimal_n
    __gnu_parallel::_Settings, 1046
search_n
    Non-Mutating, 193
second
    __gnu_parallel::_IteratorPair, 914
    std::pair, 2586
    std::sub_match, 2860
second_argument_type
    __gnu_cxx::project1st, 2636
    __gnu_cxx::project2nd, 2636
    __gnu_parallel::_EqualFromLess, 869
    __gnu_parallel::_EqualTo, 871
    __gnu_parallel::_Less, 919
    __gnu_parallel::_Lexicographic, 920
    __gnu_parallel::_LexicographicReverse, 921
    __gnu_parallel::_Multiplies, 959
    __gnu_parallel::_Plus, 973
    std::binary_function, 1725
    std::binary_negate, 1736
    std::const_mem_fun1_ref_t, 1844
    std::const_mem_fun1_t, 1846
    std::divides, 1982
    std::equal_to, 2029
    std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >, 2578
    std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >, 2581
    std::greater, 2112
    std::greater_equal, 2114
    std::less, 2267
    std::less_equal, 2268
    std::logical_and, 2314
    std::logical_or, 2317
    std::mem_fun1_ref_t, 2373
    std::mem_fun1_t, 2374
    std::minus, 2388
    std::modulus, 2391
    std::multiplies, 2448
    std::not_equal_to, 2490
    std::owner_less< shared_ptr< _Tp > >, 2579
    std::owner_less< void >, 2580
    std::owner_less< weak_ptr< _Tp > >, 2582
    std::plus, 2619
    std::pointer_to_binary_function, 2622
second_type
    __gnu_parallel::_IteratorPair, 914
    std::pair, 2585
    std::sub_match, 2858
seconds
    Time, 354
seed
    std::discard_block_engine, 1976
    std::independent_bits_engine, 2163
    std::linear_congruential_engine, 2273
    std::shuffle_order_engine, 2789, 2790
    std::subtract_with_carry_engine, 2863
seed_seq
    std::seed_seq, 2734
seekdir
    std::basic_fstream, 1162
    std::basic_ifstream, 1219
    std::basic_ios, 1263
    std::basic_iostream, 1292
    std::basic_istream, 1345
    std::basic_istringstream, 1388
    std::basic_ofstream, 1431
    std::basic_ostream, 1465
    std::basic_ostringstream, 1497
    std::basic_stringstream, 1660
    std::ios_base, 2179
seekg
    std::basic_fstream, 1195, 1196
    std::basic_ifstream, 1244
    std::basic_iostream, 1324
    std::basic_istream, 1368
    std::basic_istringstream, 1412
    std::basic_stringstream, 1692, 1693
seekoff
    __gnu_cxx::enc_filebuf, 2014
    __gnu_cxx::stdio_filebuf, 2818
    __gnu_cxx::stdio_sync_filebuf, 2837
    std::basic_filebuf, 1144
    std::basic_streambuf, 1547
    std::basic_stringbuf, 1642
    std::wbuffer_convert, 3133
seekp
    std::basic_fstream, 1196, 1197
    std::basic_iostream, 1324, 1326
    std::basic_ofstream, 1448, 1449
    std::basic_ostream, 1480
    std::basic_ostringstream, 1515
    std::basic_stringstream, 1693, 1694
seekpos
    __gnu_cxx::enc_filebuf, 2014
    __gnu_cxx::stdio_filebuf, 2818
    __gnu_cxx::stdio_sync_filebuf, 2838
    std::basic_filebuf, 1144
    std::basic_streambuf, 1547
    std::basic_stringbuf, 1643
    std::wbuffer_convert, 3133
select_on_container_copy_construction
    __gnu_cxx::__alloc_traits, 716
    std::allocator_traits, 1069

std::allocator_traits< allocator< _Tp > >, 1074
sentry
std::basic_istream::sentry, 2737
std::basic_ostream::sentry, 2738
Sequences, 312
sequential
__gnu_parallel, 423
set, 3454, 3455
__gnu_parallel::_Settings, 1042
std::bitset, 1762
std::set, 2750, 2751
std::tr2::dynamic_bitset, 2000
Set Operations, 313
includes, 314
set_difference, 314, 315
set_intersection, 315, 316
set_symmetric_difference, 316, 317
set_union, 317, 318
set.h, 3455
set_difference
Set Operations, 314, 315
set_difference_minimal_n
__gnu_parallel::_Settings, 1046
set_intersection
Set Operations, 315, 316
set_intersection_minimal_n
__gnu_parallel::_Settings, 1046
set_load
__gnu_pbds::cc_hash_max_collision_check_resize_trigger, 1773
set_loads
__gnu_pbds::hash_load_check_resize_trigger, 2146
set_new_handler
std, 642
set_num_threads
__gnu_parallel::balanced_quicksort_tag, 1128
__gnu_parallel::balanced_tag, 1129
__gnu_parallel::default_parallel_tag, 1942
__gnu_parallel::exact_tag, 2033
__gnu_parallel::multiway_mergesort_exact_tag, 2474
__gnu_parallel::multiway_mergesort_sampling_tag, 2475
__gnu_parallel::multiway_mergesort_tag, 2476
__gnu_parallel::omp_loop_static_tag, 2553
__gnu_parallel::omp_loop_tag, 2554
__gnu_parallel::parallel_tag, 2591
__gnu_parallel::quicksort_tag, 2646
__gnu_parallel::sampling_tag, 2729
__gnu_parallel::unbalanced_tag, 2972
set_operations.h, 3456
set_symmetric_difference
Set Operations, 316, 317
set_symmetric_difference_minimal_n
__gnu_parallel::_Settings, 1046
set_terminate
Exceptions, 71
set_unexpected
Exceptions, 71
set_union
Set Operations, 317, 318
set_union_minimal_n
__gnu_parallel::_Settings, 1046
setbase
std, 643
setbuf
__gnu_cxx::enc_filebuf, 2014
__gnu_cxx::stdio_filebuf, 2818
__gnu_cxx::stdio_sync_filebuf, 2838
std::basic_filebuf, 1144
std::basic_streambuf, 1548
std::basic_stringbuf, 1643
std::wbuffer_convert, 3133
setf
std::basic_fstream, 1197
std::basic_ifstream, 1244, 1246
std::basic_ios, 1273, 1274
std::basic_iostream, 1326
std::basic_istream, 1368, 1370
std::basic_istringstream, 1412, 1414
std::basic_ofstream, 1449
std::basic_ostream, 1481
std::basic_ostringstream, 1516
std::basic_stringstream, 1694
std::ios_base, 2184
setfill
std, 643
setg
__gnu_cxx::enc_filebuf, 2015
__gnu_cxx::stdio_filebuf, 2819
__gnu_cxx::stdio_sync_filebuf, 2838
std::basic_filebuf, 1145
std::basic_streambuf, 1548
std::basic_stringbuf, 1643
std::wbuffer_convert, 3133
setiosflags
std, 643
setp
__gnu_cxx::enc_filebuf, 2015
__gnu_cxx::stdio_filebuf, 2819
__gnu_cxx::stdio_sync_filebuf, 2839
std::basic_filebuf, 1145
std::basic_streambuf, 1548
std::basic_stringbuf, 1645
std::wbuffer_convert, 3134
setprecision
std, 643
setstate

std::basic_fstream, 1198
std::basic_ifstream, 1246
std::basic_ios, 1274
std::basic_iostream, 1327
std::basic_istream, 1370
std::basic_istringstream, 1414
std::basic_ofstream, 1449
std::basic_ostream, 1481
std::basic_ostringstream, 1516
std::basic_stringstream, 1695
settings.h, 3457
setw
std, 643
sgetc
__gnu_cxx::enc_filebuf, 2015
__gnu_cxx::stdio_filebuf, 2819
__gnu_cxx::stdio_sync_filebuf, 2839
std::basic_filebuf, 1145
std::basic_streambuf, 1549
std::basic_stringbuf, 1645
std::wbuffer_convert, 3134
sgetn
__gnu_cxx::enc_filebuf, 2016
__gnu_cxx::stdio_filebuf, 2820
__gnu_cxx::stdio_sync_filebuf, 2839
std::basic_filebuf, 1146
std::basic_streambuf, 1549
std::basic_stringbuf, 1645
std::wbuffer_convert, 3134
shared_future
std::shared_future, 2768, 2769
std::shared_future< _Res & >, 2771
std::shared_future< void >, 2774
shared_mutex, 3458
shared_ptr
std::shared_ptr, 2779–2781, 2783, 2784
shared_ptr.h, 3459
shared_ptr_atomic.h, 3462
shared_ptr_base.h, 3462
shift
Numeric Arrays, 234
showbase
std, 643
std::basic_fstream, 1208
std::basic_ifstream, 1255
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1379
std::basic_istringstream, 1423
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1525
std::basic_stringstream, 1704
std::ios_base, 2190
showmanyc
__gnu_cxx::enc_filebuf, 2016
__gnu_cxx::stdio_filebuf, 2820
__gnu_cxx::stdio_sync_filebuf, 2839
std::basic_filebuf, 1146
std::basic_streambuf, 1549
std::basic_stringbuf, 1646
std::wbuffer_convert, 3135
showpoint
std, 644
std::basic_fstream, 1208
std::basic_ifstream, 1255
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1379
std::basic_istringstream, 1423
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1525
std::basic_stringstream, 1704
std::ios_base, 2190
showpos
std, 644
std::basic_fstream, 1208
std::basic_ifstream, 1255
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1379
std::basic_istringstream, 1423
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1525
std::basic_stringstream, 1704
std::ios_base, 2190
shrink_to_fit
__gnu_cxx::__versa_string, 846
std::basic_string, 1628
std::deque, 1965
std::vector, 3115
shuffle
Mutating, 166
shuffle_order_engine
std::shuffle_order_engine, 2787, 2789
signaling_NaN
std::numeric_limits, 2520
sin
Complex Numbers, 52
sinh
Complex Numbers, 52
size
__gnu_cxx::__versa_string, 846
__gnu_cxx::temporary_buffer, 2871
__gnu_debug::basic_string, 1579
Numeric Arrays, 235

std::_Temporary_buffer, 1052
std::basic_string, 1629
std::bitset, 1762
std::deque, 1966
std::list, 2298
std::map, 2356
std::match_results, 2370
std::multimap, 2446
std::multiset, 2467
std::priority_queue, 2634
std::queue, 2645
std::set, 2765
std::stack, 2804
std::tr2::dynamic_bitset, 2000
std::unordered_map, 3013
std::unordered_multimap, 3038
std::unordered_multiset, 3063
std::unordered_set, 3088
std::vector, 3115
size_fn_imps.hpp, 3464
size_type
__gnu_pbds::hash_prime_size_policy, 2153
__gnu_pbds::sample_range_hashing, 2718
__gnu_pbds::sample_resize_policy, 2720
__gnu_pbds::sample_resize_trigger, 2723
__gnu_pbds::sample_size_policy, 2725
__gnu_pbds::trie_prefix_search_node_update, 2945
std::allocator_traits, 1066
std::allocator_traits< allocator< _Tp > >, 1071
std::set, 2749
std::unordered_map, 2996
std::unordered_multimap, 3024
std::unordered_multiset, 3048
std::unordered_set, 3073
skipws
std, 644
std::basic_fstream, 1208
std::basic_ifstream, 1256
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1380
std::basic_istringstream, 1423
std::basic_ofstream, 1458
std::basic_ostream, 1489
std::basic_ostringstream, 1525
std::basic_stringstream, 1704
std::ios_base, 2190
sleep_for
std::this_thread, 700
sleep_until
std::this_thread, 700
slice
Numeric Arrays, 212
slice_array
Numeric Arrays, 214
slice_array.h, 3464
slist, 3464
snextc
__gnu_cxx::enc_filebuf, 2016
__gnu_cxx::stdio_filebuf, 2820
__gnu_cxx::stdio_sync_filebuf, 2840
std::basic_filebuf, 1146
std::basic_streambuf, 1550
std::basic_stringbuf, 1646
std::wbuffer_convert, 3135
sort
Sorting, 336, 338
std::forward_list, 2071
std::list, 2299
sort.h, 3465
sort_heap
Heap, 91, 93
sort_minimal_n
__gnu_parallel::_Settings, 1046
sort_mwms_oversampling
__gnu_parallel::_Settings, 1047
sort_qs_num_samples_preset
__gnu_parallel::_Settings, 1047
sort_qsb_base_case_maximal_n
__gnu_parallel::_Settings, 1047
Sorting, 319
inplace_merge, 321
is_sorted, 322
is_sorted_until, 322, 324
lexicographical_compare, 324
max, 325
max_element, 325, 327
merge, 327
min, 329
min_element, 330
minmax, 330, 331
minmax_element, 331
next_permutation, 332
nth_element, 332, 333
partial_sort, 333, 334
partial_sort_copy, 334
prev_permutation, 336
sort, 336, 338
stable_sort, 338
span, 3466
specfun.h, 3466
sph_bessel
Mathematical Special Functions, 135
TR1 Mathematical Special Functions, 347
sph_besself
Mathematical Special Functions, 136
sph_bessell
Mathematical Special Functions, 136

sph_legendre
Mathematical Special Functions, 136
TR1 Mathematical Special Functions, 347
sph_legendref
Mathematical Special Functions, 136
sph_legendrel
Mathematical Special Functions, 137
sph_neumann
Mathematical Special Functions, 137
TR1 Mathematical Special Functions, 347
sph_neumannf
Mathematical Special Functions, 137
sph_neumannl
Mathematical Special Functions, 137
splay_fn_imps.hpp, 3469
splay_tree_.hpp, 3469
splice
std::list, 2299, 2300
splice_after
std::forward_list, 2071, 2072
split_join_can_throw
__gnu_pbds::container_traits, 1864
split_fn_imps.hpp, 3470
split_join_fn_imps.hpp, 3470, 3471
sputbackc
__gnu_cxx::enc_filebuf, 2017
__gnu_cxx::stdio_filebuf, 2821
__gnu_cxx::stdio_sync_filebuf, 2840
std::basic_filebuf, 1147
std::basic_streambuf, 1550
std::basic_stringbuf, 1646
std::wbuffer_convert, 3135
sputc
__gnu_cxx::enc_filebuf, 2017
__gnu_cxx::stdio_filebuf, 2821
__gnu_cxx::stdio_sync_filebuf, 2840
std::basic_filebuf, 1147
std::basic_streambuf, 1550
std::basic_stringbuf, 1647
std::wbuffer_convert, 3136
sputn
__gnu_cxx::enc_filebuf, 2017
__gnu_cxx::stdio_filebuf, 2821
__gnu_cxx::stdio_sync_filebuf, 2842
std::basic_filebuf, 1147
std::basic_streambuf, 1551
std::basic_stringbuf, 1647
std::wbuffer_convert, 3136
sqrt
Complex Numbers, 52
sregex_token_iterator
Regular Expressions, 275
sso_string_base.h, 3471
sstream, 3471
sstream.tcc, 3472
ssub_match
Regular Expressions, 275
stable_partition
Mutating, 166
stable_sort
Sorting, 338
stack, 3472
std::stack, 2803
standard_policies.hpp, 3473
start
Numeric Arrays, 235
state
std::fpos, 2074
std::wbuffer_convert, 3136
std::wstring_convert, 3147
static_pointer_cast
Pointer Abstractions, 249
std, 644
std, 464
_Construct, 590
_Destroy, 591
_Destroy_n, 591
__allocate_guarded, 583
__final_insertion_sort, 584
__find_if, 584
__find_if_not, 584
__find_if_not_n, 584
__gcd, 584
__gen_two_uniform_ints, 584
__heap_select, 586
__inplace_stable_sort, 586
__insertion_sort, 586
__introsort_loop, 586
__ioinit, 647
__lg, 586
__merge_adaptive, 587
__merge_without_buffer, 587
__move_median_to_first, 587
__move_merge, 587
__move_merge_adaptive, 587
__move_merge_adaptive_backward, 587
__partition, 588
__ptr_rebind, 581
__reverse, 588
__rotate_adaptive, 588
__sample, 588, 589
__search_n_aux, 589
__stable_partition_adaptive, 589
__umap_traits, 581
__ummap_traits, 581
__umset_traits, 581
__unguarded_insertion_sort, 589
__unguarded_linear_insert, 589

__unguarded_partition, 590
__unguarded_partition_pivot, 590
__unique_copy, 590
__uset_traits, 581
acos, 591
acosh, 591
advance, 591
arg, 592
asin, 592
asinh, 592
atan, 592
atanh, 592
begin, 592, 593
boolalpha, 593
cbegin, 593
cend, 593
cerr, 647
chars_format, 583
cin, 647
clog, 647
const_pointer_cast, 593
cout, 647
crbegin, 594
crend, 594
dec, 594
defaultfloat, 594
denorm_absent, 583
denorm_indeterminate, 583
denorm_present, 583
distance, 594
dynamic_pointer_cast, 595
end, 595
endl, 596
ends, 596
exchange, 596
fabs, 596
fixed, 596
float_denorm_style, 583
float_round_style, 583
flush, 596
from_chars, 596
get_money, 597
get_new_handler, 597
get_temporary_buffer, 597
get_time, 597
getline, 598, 600
hex, 600
hexfloat, 601
index_sequence, 581
index_sequence_for, 581
internal, 601
io_errc, 583
is_nothrow_swappable_v, 648
is_nothrow_swappable_with_v, 648
is_swappable_v, 648
is_swappable_with_v, 648
isalnum, 601
isalpha, 601
isblank, 601
iscntrl, 601
isdigit, 601
isgraph, 601
islower, 601
isprint, 602
ispunct, 602
isspace, 602
isupper, 602
isxdigit, 602
left, 602
make_index_sequence, 582
make_integer_sequence, 582
new_handler, 582
noboolalpha, 602
noshowbase, 602
noshowpoint, 602
noshowpos, 603
noskipws, 603
nounitbuf, 603
nouppercase, 603
oct, 603
operator<, 607, 609, 610, 612, 613
operator<<, 614–619
operator<=, 619–621
operator>, 626, 627
operator>>, 630, 631, 633, 634, 636
operator>=, 628, 629
operator$\Gamma A30C$, 637
operator^, 637
operator+, 606, 607
operator==, 621–625
operator&, 606
put_money, 637
put_time, 638
quoted, 638
rbegin, 638, 640
rend, 640
replace_copy, 640
resetiosflags, 642
return_temporary_buffer, 642
right, 642
round_to_nearest, 583
round_toward_infinity, 583
round_toward_neg_infinity, 583
round_toward_zero, 583
scientific, 642
set_new_handler, 642
setbase, 643
setfill, 643

setiosflags, 643
setprecision, 643
setw, 643
showbase, 643
showpoint, 644
showpos, 644
skipws, 644
static_pointer_cast, 644
streamoff, 582
streampos, 582
streamsize, 582
swap, 644–646
tolower, 646
toupper, 646
u16streampos, 582
u32streampos, 582
unitbuf, 646
uppercase, 647
wcerr, 648
wcin, 648
wclog, 648
wcout, 648
ws, 647
wstreampos, 582
std::__add_pointer_helper< _Tp, bool >, 707
std::__allocated_ptr
~__allocated_ptr, 717
__allocated_ptr, 717
get, 717
operator=, 717
std::__allocated_ptr< _Alloc >, 716
std::__atomic_base< _IntTp >, 717
std::__atomic_base< _PTp * >, 719
std::__atomic_flag_base, 720
std::__basic_future
_M_get_result, 723
_Ptr, 722
std::__basic_future< _Res >, 721
std::__codecvt_abstract_base
do_out, 728
in, 728
out, 728
unshift, 729
std::__ctype_abstract_base
char_type, 735
do_is, 735
do_narrow, 736
do_scan_is, 738
do_scan_not, 738
do_tolower, 738, 739
do_toupper, 739, 740
do_widen, 740
is, 741
narrow, 741, 742
scan_is, 742
scan_not, 743
tolower, 743
toupper, 744
widen, 744, 745
std::__ctype_abstract_base< _CharT >, 733
std::__debug, 648
operator<=, 653
operator>, 653
operator>=, 653
swap, 653
std::__debug::bitset< _Nb >, 1751
std::__debug::deque
_M_const_iterators, 1970
_M_detach_all, 1969
_M_detach_singular, 1969
_M_get_mutex, 1969
_M_invalidate_all, 1969
_M_invalidate_if, 1969
_M_iterators, 1970
_M_revalidate_singular, 1969
_M_swap, 1969
_M_transfer_from_if, 1969
_M_version, 1970
std::__debug::deque< _Tp, _Allocator >, 1966
std::__debug::forward_list
_M_const_iterators, 2055
_M_detach_all, 2054
_M_detach_singular, 2054
_M_get_mutex, 2054
_M_invalidate_all, 2054
_M_invalidate_if, 2054
_M_iterators, 2055
_M_revalidate_singular, 2055
_M_transfer_from_if, 2055
_M_version, 2055
std::__debug::forward_list< _Tp, _Allocator >, 2052
std::__debug::list
_M_const_iterators, 2279
_M_detach_all, 2278
_M_detach_singular, 2278
_M_get_mutex, 2279
_M_invalidate_all, 2279
_M_invalidate_if, 2279
_M_iterators, 2279
_M_revalidate_singular, 2279
_M_swap, 2279
_M_transfer_from_if, 2279
_M_version, 2280
std::__debug::list< _Tp, _Allocator >, 2276
std::__debug::map
_M_const_iterators, 2333
_M_detach_all, 2332
_M_detach_singular, 2332

_M_get_mutex, 2333
_M_invalidate_all, 2333
_M_invalidate_if, 2333
_M_iterators, 2333
_M_revalidate_singular, 2333
_M_swap, 2333
_M_transfer_from_if, 2333
_M_version, 2334
std::__debug::map< _Key, _Tp, _Compare, _Allocator >, 2329
std::__debug::multimap
_M_const_iterators, 2425
_M_detach_all, 2424
_M_detach_singular, 2424
_M_get_mutex, 2424
_M_invalidate_all, 2424
_M_invalidate_if, 2424
_M_iterators, 2425
_M_revalidate_singular, 2425
_M_swap, 2425
_M_transfer_from_if, 2425
_M_version, 2425
std::__debug::multimap< _Key, _Tp, _Compare, _Allocator >, 2421
std::__debug::multiset
_M_const_iterators, 2472
_M_detach_all, 2472
_M_detach_singular, 2472
_M_get_mutex, 2472
_M_invalidate_all, 2472
_M_invalidate_if, 2472
_M_iterators, 2473
_M_revalidate_singular, 2472
_M_swap, 2472
_M_transfer_from_if, 2472
_M_version, 2473
std::__debug::multiset< _Key, _Compare, _Allocator >, 2469
std::__debug::set
_M_const_iterators, 2744
_M_detach_all, 2743
_M_detach_singular, 2743
_M_get_mutex, 2743
_M_invalidate_all, 2743
_M_invalidate_if, 2743
_M_iterators, 2744
_M_revalidate_singular, 2743
_M_swap, 2743
_M_transfer_from_if, 2743
_M_version, 2744
std::__debug::set< _Key, _Compare, _Allocator >, 2740
std::__debug::unordered_map
_M_const_iterators, 3019
_M_const_local_iterators, 3019
_M_detach_all, 3018
_M_detach_singular, 3018
_M_get_mutex, 3018
_M_invalidate_all, 3018
_M_invalidate_if, 3018
_M_invalidate_local_if, 3018
_M_iterators, 3019
_M_local_iterators, 3019
_M_revalidate_singular, 3018
_M_swap, 3018, 3019
_M_version, 3019
std::__debug::unordered_multimap
_M_const_iterators, 3043
_M_const_local_iterators, 3043
_M_detach_all, 3042
_M_detach_singular, 3042
_M_get_mutex, 3042
_M_invalidate_all, 3042
_M_invalidate_if, 3042
_M_invalidate_local_if, 3042
_M_iterators, 3043
_M_local_iterators, 3043
_M_revalidate_singular, 3042
_M_swap, 3042, 3043
_M_version, 3043
std::__debug::unordered_multiset
_M_const_iterators, 3068
_M_const_local_iterators, 3068
_M_detach_all, 3067
_M_detach_singular, 3067
_M_get_mutex, 3067
_M_invalidate_all, 3067
_M_invalidate_if, 3067
_M_invalidate_local_if, 3067
_M_iterators, 3068
_M_local_iterators, 3068
_M_revalidate_singular, 3067
_M_swap, 3068
_M_version, 3068
std::__debug::unordered_set
_M_const_iterators, 3093
_M_const_local_iterators, 3093
_M_detach_all, 3092
_M_detach_singular, 3092
_M_get_mutex, 3092
_M_invalidate_all, 3092
_M_invalidate_if, 3092
_M_invalidate_local_if, 3092
_M_iterators, 3093
_M_local_iterators, 3093
_M_revalidate_singular, 3092
_M_swap, 3092, 3093
_M_version, 3093
std::__debug::vector

_M_const_iterators, 3119
_M_detach_all, 3119
_M_detach_singular, 3119
_M_get_mutex, 3119
_M_invalidate_all, 3119
_M_invalidate_if, 3119
_M_iterators, 3120
_M_revalidate_singular, 3119
_M_swap, 3119
_M_transfer_from_if, 3119
_M_version, 3120
vector, 3118
std::__debug::vector< _Tp, _Allocator >, 3116
std::__detail, 653
__from_chars_alnum, 657
__from_chars_binary, 657
__from_chars_digit, 658
operator<<, 658
operator>>, 658
std::__detail::_BracketMatcher< typename, bool, bool >, 853
std::__detail::_Compiler< _TraitsT >, 856
std::__detail::_Default_ranged_hash, 857
std::__detail::_Executor< typename, typename, typename, bool >, 872
std::__detail::_Hash_node< _Value, false >, 889
std::__detail::_Hash_node< _Value, true >, 890
std::__detail::_Hash_node_base, 891
std::__detail::_Hash_node_value_base< _Value >, 892
std::__detail::_Hashtable_alloc< _NodeAlloc >, 898
std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, false >, 901
std::__detail::_Hashtable_ebo_helper< _Nm, _Tp, true >, 902
std::__detail::_List_node_base, 927
std::__detail::_List_node_header, 928
std::__detail::_Mask_range_hashing, 954
std::__detail::_Mod_range_hashing, 956
std::__detail::_Power2_rehash_policy, 978
std::__detail::_Prime_rehash_policy, 979
std::__detail::_Quoted_string< _String, _CharT >, 983
std::__detail::_Scanner
_TokenT, 1040
std::__detail::_Scanner< _CharT >, 1039
std::__detail::_StateSeq< _TraitsT >, 1049
std::__detector< _Default, _AlwaysVoid, _Op, _Args >, 745
std::__exception_ptr::exception_ptr, 2035
operator==, 2035
std::__future_base, 754
_Ptr, 755
std::__future_base::_Result< _Res >, 989
std::__future_base::_Result< _Res & >, 990
std::__future_base::_Result< void >, 991
std::__future_base::_Result_alloc< _Res, _Alloc >, 992
std::__future_base::_Result_base, 993
std::__is_location_invariant< _Tp >, 763
std::__is_nullptr_t< _Tp >, 764
std::__is_tuple_like_impl< std::pair< _T1, _T2 > >, 764
std::__numeric_limits_base, 773
digits, 774
digits10, 774
has_denorm, 774
has_denorm_loss, 774
has_infinity, 775
has_quiet_NaN, 775
has_signaling_NaN, 775
is_bounded, 775
is_exact, 775
is_iec559, 775
is_integer, 775
is_modulo, 775
is_signed, 775
is_specialized, 776
max_digits10, 776
max_exponent, 776
max_exponent10, 776
min_exponent, 776
min_exponent10, 776
radix, 776
round_style, 776
tinyness_before, 776
traps, 777
std::__parallel, 658
std::__parallel::_CRandNumber< _MustBeInt >, 857
std::_Base_bitset
_M_w, 849
std::_Base_bitset< 0 >, 849
std::_Base_bitset< 1 >, 850
std::_Base_bitset< _Nw >, 848
std::_Bind< _Signature >, 852
std::_Bind_result< _Result, _Signature >, 852
std::_Deque_base
_M_initialize_map, 859
std::_Deque_base< _Tp, _Alloc >, 858
std::_Deque_iterator
_M_set_node, 861
std::_Deque_iterator< _Tp, _Ref, _Ptr >, 860
std::_Enable_default_constructor< _Switch, _Tag >, 866
std::_Enable_destructor< _Switch, _Tag >, 866
std::_Function_base, 875
std::_Fwd_list_base< _Tp, _Alloc >, 876
std::_Fwd_list_const_iterator
operator==, 878
std::_Fwd_list_const_iterator< _Tp >, 878
std::_Fwd_list_iterator
operator==, 880
std::_Fwd_list_iterator< _Tp >, 879

std::_Fwd_list_node< _Tp >, 880
std::_Fwd_list_node_base, 881
std::_List_base< _Tp, _Alloc >, 922
std::_List_const_iterator< typename >, 923
std::_List_iterator< typename >, 924
std::_List_node< _Tp >, 926
std::_Mu< _Arg, _IsBindExp, _IsPlaceholder >, 956
std::_Mu< _Arg, false, false >, 957
std::_Mu< _Arg, false, true >, 957
std::_Mu< _Arg, true, false >, 957
std::_Mu< reference_wrapper< _Tp >, false, false >, 958
std::_Not_fn< _Fn >, 970
std::_Placeholder< _Num >, 972
std::_Sp_ebo_helper< _Nm, _Tp, false >, 1047
std::_Sp_ebo_helper< _Nm, _Tp, true >, 1048
std::_Temporary_buffer
_Temporary_buffer, 1052
begin, 1052
end, 1052
requested_size, 1052
size, 1052
std::_Temporary_buffer< _ForwardIterator, _Tp >, 1051
std::_Tuple_impl< _Idx, _Elements >, 1052
std::_Tuple_impl< _Idx, _Head, _Tail...>, 1053
std::_V2::condition_variable_any, 1841
std::_V2::error_category, 2030
std::_Vector_base< _Tp, _Alloc >, 1055
std::add_const< _Tp >, 1056
std::add_cv< _Tp >, 1056
std::add_lvalue_reference< _Tp >, 1057
std::add_rvalue_reference< _Tp >, 1057
std::add_volatile< _Tp >, 1058
std::adopt_lock_t, 1058
std::aligned_storage< _Len, _Align >, 1058
std::aligned_union
type, 1059
std::aligned_union< _Len, _Types >, 1058
std::alignment_of< _Tp >, 1060
std::allocator< _Tp >, 1061
std::allocator< void >, 1062
std::allocator_arg_t, 1062
std::allocator_traits
allocate, 1066
allocator_type, 1064
const_pointer, 1064
const_void_pointer, 1065
construct, 1067
deallocate, 1067
destroy, 1067
difference_type, 1065
is_always_equal, 1065
max_size, 1067
pointer, 1065
propagate_on_container_copy_assignment, 1065
propagate_on_container_move_assignment, 1065
propagate_on_container_swap, 1066
select_on_container_copy_construction, 1069
size_type, 1066
value_type, 1066
void_pointer, 1066
std::allocator_traits< _Alloc >, 1063
std::allocator_traits< allocator< _Tp > >, 1069
allocate, 1071
allocator_type, 1070
const_pointer, 1070
const_void_pointer, 1070
construct, 1072
deallocate, 1072
destroy, 1072
difference_type, 1070
is_always_equal, 1070
max_size, 1072
pointer, 1070
propagate_on_container_copy_assignment, 1071
propagate_on_container_move_assignment, 1071
propagate_on_container_swap, 1071
select_on_container_copy_construction, 1074
size_type, 1071
value_type, 1071
void_pointer, 1071
std::array< _Tp, _Nm >, 1078
std::atomic< _Tp >, 1080
std::atomic< _Tp * >, 1081
std::atomic< bool >, 1083
std::atomic< char >, 1084
std::atomic< char16_t >, 1086
std::atomic< char32_t >, 1088
std::atomic< int >, 1090
std::atomic< long >, 1092
std::atomic< long long >, 1094
std::atomic< short >, 1096
std::atomic< signed char >, 1098
std::atomic< unsigned char >, 1100
std::atomic< unsigned int >, 1102
std::atomic< unsigned long >, 1104
std::atomic< unsigned long long >, 1106
std::atomic< unsigned short >, 1108
std::atomic< wchar_t >, 1110
std::atomic_flag, 1112
std::auto_ptr
~auto_ptr, 1114
auto_ptr, 1114, 1115
element_type, 1114
get, 1115
operator*, 1115
operator->, 1115
operator=, 1115, 1116
release, 1116

reset, 1116
std::auto_ptr< _Tp >, 1113
std::auto_ptr_ref< _Tp1 >, 1117
std::back_insert_iterator
back_insert_iterator, 1119
container_type, 1118
difference_type, 1118
iterator_category, 1118
operator*, 1119
operator++, 1119
operator=, 1119
pointer, 1118
reference, 1119
value_type, 1119
std::back_insert_iterator< _Container >, 1117
std::bad_alloc, 1120
what, 1120
std::bad_cast, 1122
what, 1122
std::bad_exception, 1123
what, 1123
std::bad_function_call, 1124
what, 1124
std::bad_typeid, 1126
what, 1126
std::bad_weak_ptr, 1127
what, 1127
std::basic_filebuf
~basic_filebuf, 1136
_M_buf, 1150
_M_buf_locale, 1150
_M_buf_size, 1150
_M_create_pback, 1136
_M_destroy_pback, 1136
_M_ext_buf, 1150
_M_ext_buf_size, 1150
_M_ext_next, 1151
_M_in_beg, 1151
_M_in_cur, 1151
_M_in_end, 1151
_M_mode, 1151
_M_out_beg, 1151
_M_out_cur, 1151
_M_out_end, 1152
_M_pback, 1152
_M_pback_cur_save, 1152
_M_pback_end_save, 1152
_M_pback_init, 1152
_M_reading, 1153
_M_set_buffer, 1136
basic_filebuf, 1136
close, 1137
eback, 1137
egptr, 1137
epptr, 1138
gbump, 1138
getloc, 1138
gptr, 1138
imbue, 1139
in_avail, 1139
is_open, 1139
open, 1139, 1140
overflow, 1141
pbackfail, 1141
pbase, 1142
pbump, 1142
pptr, 1142
pubimbue, 1142
pubseekoff, 1143
pubseekpos, 1143
pubsetbuf, 1143
pubsync, 1143
sbumpc, 1143
seekoff, 1144
seekpos, 1144
setbuf, 1144
setg, 1145
setp, 1145
sgetc, 1145
sgetn, 1146
showmanyc, 1146
snextc, 1146
sputbackc, 1147
sputc, 1147
sputn, 1147
sungetc, 1148
sync, 1148
uflow, 1148
underflow, 1148
xsgetn, 1149
xsputn, 1149
std::basic_filebuf< _CharT, _Traits >, 1133
std::basic_fstream
~basic_fstream, 1164
_M_gcount, 1203
_M_getloc, 1164
_M_write, 1164
__num_put_type, 1161
adjustfield, 1204
app, 1204
ate, 1204
bad, 1164
badbit, 1204
basefield, 1204
basic_fstream, 1163
beg, 1205
binary, 1205
boolalpha, 1205

clear, 1165
close, 1165
copyfmt, 1165
cur, 1205
dec, 1205
end, 1205
eof, 1165
eofbit, 1205
event, 1163
event_callback, 1161
exceptions, 1166
fail, 1166
failbit, 1206
fill, 1167
fixed, 1206
flags, 1167, 1168
floatfield, 1206
flush, 1168
fmtflags, 1161
gcount, 1168
get, 1168–1171
getline, 1171
getloc, 1173
good, 1173
goodbit, 1206
hex, 1207
ignore, 1173, 1174
imbue, 1174
in, 1207
init, 1175
internal, 1207
iostate, 1162
is_open, 1175
iword, 1175
left, 1207
narrow, 1176
oct, 1207
open, 1176
openmode, 1162
operator bool, 1177
operator<<, 1177, 1179, 1180, 1182, 1184
operator>>, 1184–1187, 1189, 1191
out, 1207
peek, 1191
precision, 1191, 1192
put, 1192
putback, 1192
pword, 1193
rdbuf, 1193, 1194
rdstate, 1194
read, 1194
readsome, 1195
register_callback, 1195
right, 1207
scientific, 1208
seekdir, 1162
seekg, 1195, 1196
seekp, 1196, 1197
setf, 1197
setstate, 1198
showbase, 1208
showpoint, 1208
showpos, 1208
skipws, 1208
sync, 1198
sync_with_stdio, 1199
tellg, 1199
tellp, 1199
tie, 1199, 1200
trunc, 1208
unget, 1200
unitbuf, 1208
unsetf, 1200
uppercase, 1208
widen, 1202
width, 1202
write, 1203
xalloc, 1203
std::basic_fstream< _CharT, _Traits >, 1154
std::basic_ifstream
~basic_ifstream, 1220
_M_gcount, 1251
_M_getloc, 1220
__num_put_type, 1216
adjustfield, 1251
app, 1251
ate, 1251
bad, 1221
badbit, 1252
basefield, 1252
basic_ifstream, 1220
beg, 1252
binary, 1252
boolalpha, 1252
clear, 1221
close, 1221
copyfmt, 1221
cur, 1252
dec, 1253
end, 1253
eof, 1222
eofbit, 1253
event, 1219
event_callback, 1216
exceptions, 1222
fail, 1223
failbit, 1253
fill, 1223

fixed, 1253
flags, 1224
floatfield, 1254
fmtflags, 1218
gcount, 1224
get, 1224–1227
getline, 1227
getloc, 1229
good, 1229
goodbit, 1254
hex, 1254
ignore, 1229, 1230
imbue, 1230
in, 1254
init, 1231
internal, 1254
iostate, 1218
is_open, 1231
iword, 1231
left, 1255
narrow, 1232
oct, 1255
open, 1232
openmode, 1219
operator bool, 1233
operator>>, 1233, 1235–1237, 1239
out, 1255
peek, 1240
precision, 1240
putback, 1240
pword, 1241
rdbuf, 1241, 1242
rdstate, 1242
read, 1242
readsome, 1243
register_callback, 1243
right, 1255
scientific, 1255
seekdir, 1219
seekg, 1244
setf, 1244, 1246
setstate, 1246
showbase, 1255
showpoint, 1255
showpos, 1255
skipws, 1256
sync, 1246
sync_with_stdio, 1247
tellg, 1247
tie, 1247, 1248
trunc, 1256
unget, 1248
unitbuf, 1256
unsetf, 1248
uppercase, 1256
widen, 1250
width, 1250
xalloc, 1251
std::basic_ifstream< _CharT, _Traits >, 1211
std::basic_ios
~basic_ios, 1264
_M_getloc, 1264
__ctype_type, 1261
__num_get_type, 1261
__num_put_type, 1261
adjustfield, 1279
app, 1279
ate, 1279
bad, 1265
badbit, 1279
basefield, 1279
basic_ios, 1264
beg, 1280
binary, 1280
boolalpha, 1280
char_type, 1261
clear, 1265
copyfmt, 1265
cur, 1280
dec, 1280
end, 1280
eof, 1266
eofbit, 1280
event, 1264
event_callback, 1261
exceptions, 1266
fail, 1267
failbit, 1281
fill, 1267
fixed, 1281
flags, 1267, 1268
floatfield, 1281
fmtflags, 1262
getloc, 1268
good, 1268
goodbit, 1281
hex, 1282
imbue, 1268
in, 1282
init, 1270
int_type, 1262
internal, 1282
iostate, 1262
iword, 1270
left, 1282
narrow, 1270
oct, 1282
off_type, 1263

openmode, 1263
operator bool, 1271
out, 1282
pos_type, 1263
precision, 1271
pword, 1272
rdbuf, 1272
rdstate, 1273
register_callback, 1273
right, 1282
scientific, 1283
seekdir, 1263
setf, 1273, 1274
setstate, 1274
showbase, 1283
showpoint, 1283
showpos, 1283
skipws, 1283
sync_with_stdio, 1274
tie, 1276
traits_type, 1264
trunc, 1283
unitbuf, 1283
unsetf, 1276
uppercase, 1283
widen, 1276
width, 1278
xalloc, 1278
std::basic_ios< _CharT, _Traits >, 1257
std::basic_iostream
~basic_iostream, 1293
_M_gcount, 1332
_M_getloc, 1293
_M_write, 1293
__num_put_type, 1291
adjustfield, 1333
app, 1333
ate, 1333
bad, 1294
badbit, 1333
basefield, 1333
basic_iostream, 1293
beg, 1334
binary, 1334
boolalpha, 1334
clear, 1294
copyfmt, 1294
cur, 1334
dec, 1334
end, 1334
eof, 1294
eofbit, 1334
event, 1293
event_callback, 1291
exceptions, 1295
fail, 1295
failbit, 1335
fill, 1296
fixed, 1335
flags, 1296, 1297
floatfield, 1335
flush, 1297
fmtflags, 1291
gcount, 1297
get, 1297–1300
getline, 1300
getloc, 1302
good, 1302
goodbit, 1335
hex, 1336
ignore, 1302, 1303
imbue, 1303
in, 1336
init, 1304
internal, 1336
iostate, 1292
iword, 1304
left, 1336
narrow, 1304
oct, 1336
openmode, 1292
operator bool, 1305
operator<<, 1305, 1306, 1308, 1309, 1311
operator>>, 1312, 1314, 1315, 1317, 1319
out, 1336
peek, 1319
precision, 1319, 1320
put, 1320
putback, 1320
pword, 1321
rdbuf, 1321, 1322
rdstate, 1322
read, 1322
readsome, 1323
register_callback, 1323
right, 1336
scientific, 1337
seekdir, 1292
seekg, 1324
seekp, 1324, 1326
setf, 1326
setstate, 1327
showbase, 1337
showpoint, 1337
showpos, 1337
skipws, 1337
sync, 1327
sync_with_stdio, 1328

tellg, 1328
tellp, 1328
tie, 1328, 1329
trunc, 1337
unget, 1329
unitbuf, 1337
unsetf, 1329
uppercase, 1337
widen, 1331
width, 1331
write, 1332
xalloc, 1332
std::basic_iostream< _CharT, _Traits >, 1284
std::basic_istream
~basic_istream, 1346
_M_gcount, 1375
_M_getloc, 1346
__num_put_type, 1343
adjustfield, 1375
app, 1375
ate, 1375
bad, 1346
badbit, 1376
basefield, 1376
basic_istream, 1345
beg, 1376
binary, 1376
boolalpha, 1376
clear, 1346
copyfmt, 1347
cur, 1376
dec, 1377
end, 1377
eof, 1347
eofbit, 1377
event, 1345
event_callback, 1343
exceptions, 1347
fail, 1348
failbit, 1377
fill, 1348
fixed, 1377
flags, 1349
floatfield, 1378
fmtflags, 1344
gcount, 1349
get, 1349–1352
getline, 1352
getloc, 1354
good, 1354
goodbit, 1378
hex, 1378
ignore, 1354, 1355
imbue, 1355
in, 1378
init, 1356
internal, 1378
iostate, 1344
iword, 1356
left, 1379
narrow, 1356
oct, 1379
openmode, 1345
operator bool, 1357
operator>>, 1357, 1358, 1360, 1361, 1363
out, 1379
peek, 1364
precision, 1364
putback, 1364
pword, 1365
rdbuf, 1365, 1366
rdstate, 1366
read, 1366
readsome, 1367
register_callback, 1367
right, 1379
scientific, 1379
seekdir, 1345
seekg, 1368
setf, 1368, 1370
setstate, 1370
showbase, 1379
showpoint, 1379
showpos, 1379
skipws, 1380
sync, 1370
sync_with_stdio, 1371
tellg, 1371
tie, 1371, 1372
trunc, 1380
unget, 1372
unitbuf, 1380
unsetf, 1372
uppercase, 1380
widen, 1374
width, 1374
xalloc, 1375
std::basic_istream< _CharT, _Traits >, 1338
std::basic_istream< _CharT, _Traits >::sentry, 2736
std::basic_istream::sentry
operator bool, 2737
sentry, 2737
traits_type, 2737
std::basic_istringstream
~basic_istringstream, 1389
_M_gcount, 1419
_M_getloc, 1390
__num_put_type, 1386

adjustfield, 1419
app, 1419
ate, 1419
bad, 1390
badbit, 1419
basefield, 1419
basic_istringstream, 1389
beg, 1420
binary, 1420
boolalpha, 1420
clear, 1390
copyfmt, 1390
cur, 1420
dec, 1420
end, 1420
eof, 1391
eofbit, 1420
event, 1388
event_callback, 1386
exceptions, 1391
fail, 1392
failbit, 1421
fill, 1392
fixed, 1421
flags, 1393
floatfield, 1421
fmtflags, 1387
gcount, 1393
get, 1393–1396
getline, 1396
getloc, 1398
good, 1398
goodbit, 1421
hex, 1422
ignore, 1398, 1399
imbue, 1399
in, 1422
init, 1400
internal, 1422
iostate, 1387
iword, 1400
left, 1422
narrow, 1400
oct, 1422
openmode, 1388
operator bool, 1401
operator>>, 1401–1403, 1405, 1407
out, 1422
peek, 1408
precision, 1408
putback, 1408
pword, 1409
rdbuf, 1409, 1410
rdstate, 1410
read, 1410
readsome, 1411
register_callback, 1411
right, 1422
scientific, 1423
seekdir, 1388
seekg, 1412
setf, 1412, 1414
setstate, 1414
showbase, 1423
showpoint, 1423
showpos, 1423
skipws, 1423
str, 1414, 1415
sync, 1415
sync_with_stdio, 1415
tellg, 1416
tie, 1416
trunc, 1423
unget, 1417
unitbuf, 1423
unsetf, 1417
uppercase, 1423
widen, 1417
width, 1418
xalloc, 1418
std::basic_istringstream< _CharT, _Traits, _Alloc >, 1381
std::basic_ofstream
~basic_ofstream, 1432
_M_getloc, 1432
_M_write, 1432
__num_get_type, 1429
adjustfield, 1454
app, 1454
ate, 1454
bad, 1432
badbit, 1454
basefield, 1455
basic_ofstream, 1431
beg, 1455
binary, 1455
boolalpha, 1455
clear, 1433
close, 1433
copyfmt, 1433
cur, 1455
dec, 1455
end, 1455
eof, 1434
eofbit, 1456
event, 1431
event_callback, 1429
exceptions, 1434
fail, 1435

failbit, 1456
fill, 1435
fixed, 1456
flags, 1435, 1436
floatfield, 1456
flush, 1436
fmtflags, 1429
getloc, 1436
good, 1436
goodbit, 1456
hex, 1457
imbue, 1437
in, 1457
init, 1437
internal, 1457
iostate, 1430
is_open, 1437
iword, 1438
left, 1457
narrow, 1438
oct, 1457
open, 1438, 1439
openmode, 1430
operator bool, 1439
operator<<, 1439–1442, 1444
out, 1458
precision, 1446
put, 1446
pword, 1447
rdbuf, 1447, 1448
rdstate, 1448
register_callback, 1448
right, 1458
scientific, 1458
seekdir, 1431
seekp, 1448, 1449
setf, 1449
setstate, 1449
showbase, 1458
showpoint, 1458
showpos, 1458
skipws, 1458
sync_with_stdio, 1451
tellp, 1451
tie, 1451, 1452
trunc, 1458
unitbuf, 1459
unsetf, 1452
uppercase, 1459
widen, 1452
width, 1453
write, 1453
xalloc, 1454

std::basic_ofstream< _CharT, _Traits >, 1424

std::basic_ostream
~basic_ostream, 1466
_M_getloc, 1466
_M_write, 1467
__num_get_type, 1464
adjustfield, 1485
app, 1485
ate, 1485
bad, 1467
badbit, 1485
basefield, 1486
basic_ostream, 1466
beg, 1486
binary, 1486
boolalpha, 1486
clear, 1467
copyfmt, 1467
cur, 1486
dec, 1486
end, 1486
eof, 1468
eofbit, 1487
event, 1466
event_callback, 1464
exceptions, 1468
fail, 1469
failbit, 1487
fill, 1469
fixed, 1487
flags, 1470
floatfield, 1487
flush, 1470
fmtflags, 1464
getloc, 1470
good, 1471
goodbit, 1487
hex, 1488
imbue, 1471
in, 1488
init, 1471
internal, 1488
iostate, 1465
iword, 1472
left, 1488
narrow, 1472
oct, 1488
openmode, 1465
operator bool, 1472
operator<<, 1473–1477
out, 1489
precision, 1477, 1478
put, 1478
pword, 1478
rdbuf, 1479

rdstate, 1480
register_callback, 1480
right, 1489
scientific, 1489
seekdir, 1465
seekp, 1480
setf, 1481
setstate, 1481
showbase, 1489
showpoint, 1489
showpos, 1489
skipws, 1489
sync_with_stdio, 1482
tellp, 1482
tie, 1482, 1483
trunc, 1489
unitbuf, 1490
unsetf, 1483
uppercase, 1490
widen, 1483
width, 1484
write, 1484
xalloc, 1485
std::basic_ostream< _CharT, _Traits >, 1459
std::basic_ostream< _CharT, _Traits >::sentry, 2738
std::basic_ostream::sentry
~sentry, 2738
operator bool, 2739
sentry, 2738
std::basic_ostringstream
~basic_ostringstream, 1500
_M_getloc, 1500
_M_write, 1500
__num_get_type, 1496
adjustfield, 1520
app, 1521
ate, 1521
bad, 1500
badbit, 1521
basefield, 1521
basic_ostringstream, 1498
beg, 1521
binary, 1521
boolalpha, 1522
clear, 1501
copyfmt, 1501
cur, 1522
dec, 1522
end, 1522
eof, 1501
eofbit, 1522
event, 1498
event_callback, 1496
exceptions, 1501, 1502
fail, 1502
failbit, 1522
fill, 1502, 1503
fixed, 1523
flags, 1503
floatfield, 1523
flush, 1503
fmtflags, 1496
getloc, 1504
good, 1504
goodbit, 1523
hex, 1523
imbue, 1504
in, 1523
init, 1505
internal, 1524
iostate, 1497
iword, 1505
left, 1524
narrow, 1505
oct, 1524
openmode, 1497
operator bool, 1506
operator<<, 1506, 1507, 1509, 1510, 1512
out, 1524
precision, 1513
put, 1513
pword, 1514
rdbuf, 1514
rdstate, 1515
register_callback, 1515
right, 1524
scientific, 1524
seekdir, 1497
seekp, 1515
setf, 1516
setstate, 1516
showbase, 1525
showpoint, 1525
showpos, 1525
skipws, 1525
str, 1517
sync_with_stdio, 1517
tellp, 1517
tie, 1518
trunc, 1525
unitbuf, 1525
unsetf, 1518
uppercase, 1525
widen, 1519
width, 1519
write, 1520
xalloc, 1520
std::basic_ostringstream< _CharT, _Traits, _Alloc >, 1491

std::basic_regex
~basic_regex, 1530
assign, 1530, 1531, 1533
basic_regex, 1527, 1529, 1530
flags, 1533
getloc, 1533
imbue, 1534
mark_count, 1534
operator=, 1534, 1535
swap, 1535
std::basic_regex< typename, typename >, 1526
std::basic_streambuf
~basic_streambuf, 1540
_M_buf_locale, 1554
_M_in_beg, 1554
_M_in_cur, 1555
_M_in_end, 1555
_M_out_beg, 1555
_M_out_cur, 1555
_M_out_end, 1555
__streambuf_type, 1539
basic_streambuf, 1540
char_type, 1539
eback, 1540
egptr, 1541
epptr, 1541
gbump, 1541
getloc, 1542
gptr, 1542
imbue, 1542
in_avail, 1543
int_type, 1539
off_type, 1540
overflow, 1543
pbackfail, 1543
pbase, 1545
pbump, 1545
pos_type, 1540
pptr, 1545
pubimbue, 1546
pubseekoff, 1546
pubseekpos, 1546
pubsetbuf, 1546
pubsync, 1547
sbumpc, 1547
seekoff, 1547
seekpos, 1547
setbuf, 1548
setg, 1548
setp, 1548
sgetc, 1549
sgetn, 1549
showmanyc, 1549
snextc, 1550
sputbackc, 1550
sputc, 1550
sputn, 1551
sungetc, 1551
sync, 1551
traits_type, 1540
uflow, 1552
underflow, 1552
xsgetn, 1552
xsputn, 1554
std::basic_streambuf< _CharT, _Traits >, 1536
std::basic_string
~basic_string, 1586
append, 1587, 1588
assign, 1590–1592
at, 1592, 1593
back, 1593
basic_string, 1584–1586
begin, 1593
c_str, 1593
capacity, 1594
cbegin, 1594
cend, 1594
clear, 1594
compare, 1594, 1595, 1597
copy, 1598
crbegin, 1598
crend, 1598
data, 1598
empty, 1599
end, 1599
erase, 1599, 1600
find, 1600, 1602
find_first_not_of, 1602, 1603
find_first_of, 1604, 1606
find_last_not_of, 1606, 1608
find_last_of, 1608, 1609
front, 1610
get_allocator, 1610
insert, 1610, 1611, 1613, 1614
length, 1615
max_size, 1615
npos, 1629
operator+=, 1615, 1616
operator=, 1616, 1618
pop_back, 1618
push_back, 1619
rbegin, 1619
rend, 1619
replace, 1619–1625
reserve, 1625
resize, 1626
rfind, 1626–1628
shrink_to_fit, 1628

size, 1629
substr, 1629
swap, 1629
std::basic_string< _CharT, _Traits, _Alloc >, 1580
std::basic_stringbuf
_M_buf_locale, 1650
_M_in_beg, 1650
_M_in_cur, 1651
_M_in_end, 1651
_M_mode, 1651
_M_out_beg, 1651
_M_out_cur, 1651
_M_out_end, 1651
basic_stringbuf, 1635, 1636
eback, 1636
egptr, 1636
epptr, 1637
gbump, 1637
getloc, 1637
gptr, 1637
imbue, 1638
in_avail, 1638
overflow, 1638
pbackfail, 1640
pbase, 1640
pbump, 1641
pptr, 1641
pubimbue, 1641
pubseekoff, 1641
pubseekpos, 1642
pubsetbuf, 1642
pubsync, 1642
sbumpc, 1642
seekoff, 1642
seekpos, 1643
setbuf, 1643
setg, 1643
setp, 1645
sgetc, 1645
sgetn, 1645
showmanyc, 1646
snextc, 1646
sputbackc, 1646
sputc, 1647
sputn, 1647
str, 1647, 1648
sungetc, 1648
sync, 1648
uflow, 1649
underflow, 1649
xsgetn, 1649
xsputn, 1650
std::basic_stringbuf< _CharT, _Traits, _Alloc >, 1633
std::basic_stringstream
~basic_stringstream, 1663
_M_gcount, 1700
_M_getloc, 1663
_M_write, 1663
__num_put_type, 1659
adjustfield, 1700
app, 1700
ate, 1700
bad, 1663
badbit, 1700
basefield, 1701
basic_stringstream, 1661
beg, 1701
binary, 1701
boolalpha, 1701
clear, 1664
copyfmt, 1664
cur, 1701
dec, 1702
end, 1702
eof, 1664
eofbit, 1702
event, 1661
event_callback, 1659
exceptions, 1664, 1665
fail, 1665
failbit, 1702
fill, 1665, 1666
fixed, 1702
flags, 1666
floatfield, 1702
flush, 1666
fmtflags, 1659
gcount, 1667
get, 1667–1669
getline, 1669, 1671
getloc, 1671
good, 1672
goodbit, 1703
hex, 1703
ignore, 1672, 1673
imbue, 1673
in, 1703
init, 1673
internal, 1703
iostate, 1660
iword, 1674
left, 1703
narrow, 1674
oct, 1704
openmode, 1660
operator bool, 1674
operator<<, 1675, 1676, 1678, 1679, 1681
operator>>, 1681–1684, 1686, 1688

out, 1704
peek, 1688
precision, 1688, 1689
put, 1689
putback, 1689
pword, 1690
rdbuf, 1690, 1691
rdstate, 1691
read, 1691
readsome, 1692
register_callback, 1692
right, 1704
scientific, 1704
seekdir, 1660
seekg, 1692, 1693
seekp, 1693, 1694
setf, 1694
setstate, 1695
showbase, 1704
showpoint, 1704
showpos, 1704
skipws, 1704
str, 1695
sync, 1696
sync_with_stdio, 1696
tellg, 1696
tellp, 1697
tie, 1697
trunc, 1705
unget, 1697
unitbuf, 1705
unsetf, 1698
uppercase, 1705
widen, 1698
width, 1699
write, 1699
xalloc, 1700
std::basic_stringstream< _CharT, _Traits, _Alloc >, 1652
std::bernoulli_distribution, 1705
bernoulli_distribution, 1706
max, 1707
min, 1707
operator(), 1707
operator==, 1707
p, 1707
param, 1707
reset, 1707
result_type, 1706
std::bernoulli_distribution::param_type, 2597
std::bidirectional_iterator_tag, 1708
std::binary_function
first_argument_type, 1725
result_type, 1725
second_argument_type, 1725
std::binary_function< _Arg1, _Arg2, _Result >, 1724
std::binary_negate
first_argument_type, 1736
result_type, 1736
second_argument_type, 1736
std::binary_negate< _Predicate >, 1735
std::binder1st
argument_type, 1737
result_type, 1737
std::binder1st< _Operation >, 1736
std::binder2nd
argument_type, 1738
result_type, 1739
std::binder2nd< _Operation >, 1738
std::binomial_distribution
max, 1740
min, 1740
operator<<, 1741
operator>>, 1743
operator(), 1740, 1741
operator==, 1743
p, 1741
param, 1741
reset, 1741
result_type, 1740
t, 1741
std::binomial_distribution< _IntType >, 1739
std::binomial_distribution< _IntType >::param_type, 2599
std::bitset
all, 1757
any, 1758
bitset, 1756, 1757
count, 1758
flip, 1758
none, 1758
operator<<, 1760
operator<<=, 1760
operator>>, 1760
operator>>=, 1760
operator$\Gamma A30C$=, 1761
operator~, 1762
operator^=, 1761
operator==, 1760
operator&=, 1758
reset, 1762
set, 1762
size, 1762
test, 1763
to_string, 1763
to_ulong, 1763
std::bitset< _Nb >, 1752
std::bitset< _Nb >::reference, 2683
std::cauchy_distribution
max, 1768

min, 1768
operator(), 1768
operator==, 1769
param, 1769
reset, 1769
result_type, 1768
std::cauchy_distribution< _RealType >, 1767
std::cauchy_distribution< _RealType >::param_type, 2599
std::char_traits< __gnu_cxx::character< _Value, _Int, _St > >, 1786
std::char_traits< _CharT >, 1785
std::char_traits< char >, 1787
std::char_traits< wchar_t >, 1788
std::chi_squared_distribution
max, 1790
min, 1790
operator<<, 1791
operator>>, 1792
operator(), 1791
operator==, 1792
param, 1791
reset, 1791
result_type, 1790
std::chi_squared_distribution< _RealType >, 1789
std::chi_squared_distribution< _RealType >::param_type, 2604
std::chrono, 676
std::chrono::_V2::steady_clock, 2845
std::chrono::_V2::system_clock, 2868
std::chrono::duration< _Rep, _Period >, 1984
std::chrono::duration_values< _Rep >, 1986
std::chrono::time_point< _Clock, _Dur >, 2905
std::chrono::treat_as_floating_point< _Rep >, 2915
std::codecvt
do_out, 1794
in, 1795
out, 1795
unshift, 1796
std::codecvt< _InternT, _ExternT, _StateT >, 1793
std::codecvt< _InternT, _ExternT, encoding_state >, 1797
do_out, 1798
in, 1798
out, 1799
unshift, 1800
std::codecvt< char, char, mbstate_t >, 1801
do_out, 1803
in, 1803
out, 1803
unshift, 1804
std::codecvt< char16_t, char, mbstate_t >, 1805
do_out, 1806
in, 1807
out, 1807
unshift, 1808
std::codecvt< char32_t, char, mbstate_t >, 1809
do_out, 1810
in, 1810
out, 1811
unshift, 1812
std::codecvt< wchar_t, char, mbstate_t >, 1813
do_out, 1814
in, 1815
out, 1815
unshift, 1816
std::codecvt_base, 1817
std::codecvt_byname
do_out, 1819
in, 1820
out, 1820
unshift, 1821
std::codecvt_byname< _InternT, _ExternT, _StateT >, 1818
std::collate
~collate, 1825
char_type, 1823
collate, 1823, 1825
compare, 1825
do_compare, 1825
do_hash, 1826
do_transform, 1826
hash, 1826
id, 1828
string_type, 1823
transform, 1828
std::collate< _CharT >, 1822
std::collate_byname
char_type, 1830
compare, 1830
do_compare, 1831
do_hash, 1831
do_transform, 1831
hash, 1832
id, 1833
string_type, 1830
transform, 1832
std::collate_byname< _CharT >, 1829
std::common_type< _Tp >, 1833
std::common_type< chrono::duration< _Rep1, _Period1 >, chrono::duration< _Rep2, _Period2 > >, 1833
std::complex
complex, 1835
operator+=, 1835
operator-=, 1835
value_type, 1835
std::complex< _Tp >, 1834
std::complex< double >, 1836

std::complex< float >, 1836
std::complex< long double >, 1837
std::condition_variable, 1840
std::conditional< bool, typename, typename >, 1842
std::const_mem_fun1_ref_t
    first_argument_type, 1844
    result_type, 1844
    second_argument_type, 1844
std::const_mem_fun1_ref_t< _Ret, _Tp, _Arg >, 1844
std::const_mem_fun1_t
    first_argument_type, 1846
    result_type, 1846
    second_argument_type, 1846
std::const_mem_fun1_t< _Ret, _Tp, _Arg >, 1845
std::const_mem_fun_ref_t
    argument_type, 1847
    result_type, 1847
std::const_mem_fun_ref_t< _Ret, _Tp >, 1846
std::const_mem_fun_t
    argument_type, 1848
    result_type, 1848
std::const_mem_fun_t< _Ret, _Tp >, 1847
std::ctype
    do_is, 1872
    do_narrow, 1873
    do_scan_is, 1873
    do_scan_not, 1874
    do_tolower, 1874, 1875
    do_toupper, 1875
    do_widen, 1876
    id, 1881
    is, 1877
    narrow, 1877, 1878
    scan_is, 1878
    scan_not, 1878
    tolower, 1879
    toupper, 1879, 1880
    widen, 1880
std::ctype< _CharT >, 1870
std::ctype< char >, 1882
    ~ctype, 1884
    char_type, 1884
    classic_table, 1884
    ctype, 1884
    do_narrow, 1885
    do_tolower, 1885, 1886
    do_toupper, 1886
    do_widen, 1887
    id, 1893
    is, 1887, 1889
    narrow, 1889
    scan_is, 1890
    scan_not, 1890
    table, 1891
    table_size, 1893
    tolower, 1891
    toupper, 1891, 1892
    widen, 1892
std::ctype< wchar_t >, 1894
    ~ctype, 1896
    char_type, 1896
    ctype, 1896
    do_is, 1896, 1898
    do_narrow, 1898
    do_scan_is, 1899
    do_scan_not, 1899
    do_tolower, 1900
    do_toupper, 1900, 1902
    do_widen, 1902
    id, 1908
    is, 1903
    narrow, 1903, 1904
    scan_is, 1904
    scan_not, 1905
    tolower, 1905
    toupper, 1907
    widen, 1907, 1908
std::ctype_base, 1909
std::ctype_byname
    do_is, 1912
    do_narrow, 1912, 1913
    do_scan_is, 1913
    do_scan_not, 1913
    do_tolower, 1914
    do_toupper, 1915
    do_widen, 1915, 1916
    id, 1920
    is, 1916, 1917
    narrow, 1917
    scan_is, 1918
    scan_not, 1918
    tolower, 1918, 1919
    toupper, 1919
    widen, 1920
std::ctype_byname< _CharT >, 1910
std::ctype_byname< char >, 1921
    char_type, 1923
    classic_table, 1923
    do_narrow, 1923, 1924
    do_tolower, 1924
    do_toupper, 1925
    do_widen, 1925, 1926
    id, 1931
    is, 1926
    narrow, 1927
    scan_is, 1928
    scan_not, 1928
    table, 1928

table_size, 1931
tolower, 1928, 1929
toupper, 1929
widen, 1930
std::decay< _Tp >, 1932
std::decimal, 677
decimal32_to_long_long, 686
std::decimal::decimal128, 1932
decimal128, 1934
std::decimal::decimal32, 1934
decimal32, 1936
std::decimal::decimal64, 1936
decimal64, 1937
std::default_delete
default_delete, 1938
operator(), 1939
std::default_delete< _Tp >, 1938
std::defer_lock_t, 1944
std::deque
~deque, 1952
_M_fill_initialize, 1952
_M_initialize_map, 1952
_M_new_elements_at_back, 1953
_M_new_elements_at_front, 1953
_M_pop_back_aux, 1953
_M_pop_front_aux, 1953
_M_push_back_aux, 1953
_M_push_front_aux, 1953
_M_range_check, 1953
_M_range_initialize, 1954
_M_reallocate_map, 1954
_M_reserve_elements_at_back, 1955
_M_reserve_elements_at_front, 1955
_M_reserve_map_at_back, 1955
_M_reserve_map_at_front, 1955
assign, 1955, 1956
at, 1956
back, 1957
begin, 1957
cbegin, 1957
cend, 1957
clear, 1957
crbegin, 1958
crend, 1958
deque, 1950, 1951
emplace, 1958
empty, 1958
end, 1958
erase, 1959
front, 1959
get_allocator, 1959
insert, 1960, 1961
max_size, 1961
operator=, 1961, 1962
pop_back, 1964
pop_front, 1964
push_back, 1964
push_front, 1964
rbegin, 1964, 1965
rend, 1965
resize, 1965
shrink_to_fit, 1965
size, 1966
swap, 1966
std::deque< _Tp, _Alloc >, 1945
std::discard_block_engine
base, 1975
discard, 1975
discard_block_engine, 1974, 1975
max, 1975
min, 1976
operator<<, 1976
operator>>, 1977
operator(), 1976
operator==, 1977
result_type, 1974
seed, 1976
std::discard_block_engine< _RandomNumberEngine, __p, __r >, 1973
std::discrete_distribution
max, 1979
min, 1979
operator<<, 1980
operator>>, 1980
operator(), 1979
operator==, 1980
param, 1979
probabilities, 1980
reset, 1980
result_type, 1979
std::discrete_distribution< _IntType >, 1977
std::discrete_distribution< _IntType >::param_type, 2595
std::divides
first_argument_type, 1982
result_type, 1982
second_argument_type, 1982
std::divides< _Tp >, 1981
std::divides< void >, 1982
std::domain_error, 1983
what, 1983
std::enable_if< bool, _Tp >, 2002
std::enable_shared_from_this< _Tp >, 2002
std::equal_to
first_argument_type, 2029
result_type, 2029
second_argument_type, 2029
std::equal_to< _Tp >, 2028
std::equal_to< void >, 2029

std::error_code, 2030
std::error_condition, 2031
std::exception, 2034
std::experimental, 686
std::experimental::fundamentals_v1::any, 1076
~any, 1077
any, 1076, 1077
clear, 1077
empty, 1077
operator=, 1077, 1078
swap, 1078
type, 1078
std::experimental::fundamentals_v1::bad_any_cast, 1121
what, 1121
std::experimental::fundamentals_v1::bad_optional_access, 1125
what, 1125
std::experimental::fundamentals_v1::basic_string_view< _CharT, _Traits >, 1630
std::experimental::fundamentals_v1::in_place_t, 2159
std::experimental::fundamentals_v1::nullopt_t, 2492
std::experimental::fundamentals_v1::optional< _Tp >, 2557
std::experimental::fundamentals_v2::ostream_joiner< _DelimT, _CharT, _Traits >, 2562
std::experimental::fundamentals_v2::owner_less< shared_ptr< _Tp > >, 2578
first_argument_type, 2578
result_type, 2578
second_argument_type, 2578
std::experimental::fundamentals_v2::owner_less< weak_ptr< _Tp > >, 2580
first_argument_type, 2581
result_type, 2581
second_argument_type, 2581
std::experimental::fundamentals_v2::propagate_const< _Tp >, 2639
std::exponential_distribution
exponential_distribution, 2037
lambda, 2037
max, 2037
min, 2037
operator(), 2037
operator==, 2038
param, 2038
reset, 2038
result_type, 2037
std::exponential_distribution< _RealType >, 2036
std::exponential_distribution< _RealType >::param_type, 2591
std::extent< _Tp >, 2039
std::extreme_value_distribution
a, 2041
b, 2041
max, 2041
min, 2041
operator(), 2041
operator==, 2043
param, 2041
reset, 2043
result_type, 2041
std::extreme_value_distribution< _RealType >, 2039
std::extreme_value_distribution< _RealType >::param_type, 2595
std::fisher_f_distribution
max, 2049
min, 2049
operator<<, 2049
operator>>, 2050
operator(), 2049
operator==, 2050
param, 2049
reset, 2049
result_type, 2048
std::fisher_f_distribution< _RealType >, 2047
std::fisher_f_distribution< _RealType >::param_type, 2597
std::forward_iterator_tag, 2051
std::forward_list
~forward_list, 2061
assign, 2061
before_begin, 2063
begin, 2063
cbefore_begin, 2063
cbegin, 2063
cend, 2064
clear, 2064
emplace_after, 2064
emplace_front, 2064
empty, 2064
end, 2065
erase_after, 2065
forward_list, 2059–2061
front, 2066
get_allocator, 2066
insert_after, 2066, 2067
max_size, 2067
merge, 2068
operator=, 2068, 2069
pop_front, 2069
push_front, 2069
remove, 2069
remove_if, 2070
resize, 2070
reverse, 2070
sort, 2071
splice_after, 2071, 2072
swap, 2072

unique, 2072
std::forward_list< _Tp, _Alloc >, 2056
std::fpos
fpos, 2073
operator streamoff, 2074
operator+, 2074
operator+=, 2074
operator-, 2074
operator-=, 2074
state, 2074
std::fpos< _StateT >, 2073
std::from_chars_result, 2076
std::front_insert_iterator
container_type, 2078
difference_type, 2078
front_insert_iterator, 2078
iterator_category, 2078
operator*, 2078
operator++, 2079
operator=, 2079
pointer, 2078
reference, 2078
value_type, 2078
std::front_insert_iterator< _Container >, 2077
std::function< _Res(_ArgTypes...)>, 2079
function, 2081, 2082
operator bool, 2082
operator(), 2082
operator=, 2082, 2084, 2085
swap, 2085
target, 2085
target_type, 2086
std::future
_M_get_result, 2088
_Ptr, 2088
future, 2088
get, 2088
std::future< _Res >, 2086
std::future< _Res & >, 2089
_M_get_result, 2091
_Ptr, 2090
future, 2090
get, 2091
std::future< void >, 2091
_M_get_result, 2093
_Ptr, 2093
future, 2093
get, 2093
std::future_error, 2094
what, 2094
std::gamma_distribution
alpha, 2096
beta, 2096
gamma_distribution, 2096
max, 2096
min, 2097
operator<<, 2098
operator>>, 2098
operator(), 2097
operator==, 2098
param, 2097
reset, 2097
result_type, 2096
std::gamma_distribution< _RealType >, 2095
std::gamma_distribution< _RealType >::param_type, 2601
std::geometric_distribution
max, 2100
min, 2100
operator(), 2100
operator==, 2101
p, 2100
param, 2100
reset, 2100
result_type, 2099
std::geometric_distribution< _IntType >, 2098
std::geometric_distribution< _IntType >::param_type, 2598
std::greater
first_argument_type, 2112
result_type, 2112
second_argument_type, 2112
std::greater< _Tp >, 2112
std::greater< void >, 2113
std::greater_equal
first_argument_type, 2114
result_type, 2114
second_argument_type, 2114
std::greater_equal< _Tp >, 2114
std::greater_equal< void >, 2115
std::gslice, 2116
std::gslice_array< _Tp >, 2117
std::has_virtual_destructor< _Tp >, 2119
std::hash< __debug::bitset< _Nb > >, 2120
std::hash< __debug::vector< bool, _Alloc > >, 2120
std::hash< __gnu_cxx::__u16vstring >, 2121
std::hash< __gnu_cxx::__u32vstring >, 2121
std::hash< __gnu_cxx::__vstring >, 2122
std::hash< __gnu_cxx::__wvstring >, 2122
std::hash< __gnu_cxx::throw_value_limit >, 2123
argument_type, 2124
result_type, 2124
std::hash< __gnu_cxx::throw_value_random >, 2124
argument_type, 2125
result_type, 2125
std::hash< __shared_ptr< _Tp, _Lp > >, 2125
std::hash< _Tp >, 2119
std::hash< _Tp * >, 2126

std::hash< bool >, 2126
std::hash< char >, 2127
std::hash< char16_t >, 2127
std::hash< char32_t >, 2128
std::hash< double >, 2128
std::hash< error_code >, 2129
std::hash< experimental::optional< _Tp > >, 2129
std::hash< experimental::shared_ptr< _Tp > >, 2129
std::hash< float >, 2130
std::hash< int >, 2130
std::hash< long >, 2131
std::hash< long double >, 2131
std::hash< long long >, 2132
std::hash< shared_ptr< _Tp > >, 2132
std::hash< short >, 2133
std::hash< signed char >, 2133
std::hash< string >, 2134
std::hash< thread::id >, 2134
std::hash< type_index >, 2135
std::hash< u16string >, 2135
std::hash< u32string >, 2136
std::hash< unique_ptr< _Tp, _Dp > >, 2136
std::hash< unsigned char >, 2137
std::hash< unsigned int >, 2137
std::hash< unsigned long >, 2138
std::hash< unsigned long long >, 2138
std::hash< unsigned short >, 2139
std::hash< wchar_t >, 2139
std::hash< wstring >, 2140
std::hash<::bitset< _Nb > >, 2140
std::hash<::vector< bool, _Alloc > >, 2141
std::independent_bits_engine
    base, 2162
    discard, 2162
    independent_bits_engine, 2161, 2162
    max, 2162
    min, 2162
    operator>>, 2163
    operator(), 2162
    operator==, 2163
    result_type, 2161
    seed, 2163
std::independent_bits_engine< _RandomNumberEngine, __w, _UIntType >, 2160
std::indirect_array< _Tp >, 2164
std::initializer_list
    begin, 2166
    end, 2166
std::initializer_list< _E >, 2165
std::input_iterator_tag, 2167
std::insert_iterator
    container_type, 2170
    difference_type, 2170
    insert_iterator, 2170
    iterator_category, 2170
    operator*, 2170
    operator++, 2171
    operator=, 2171
    pointer, 2170
    reference, 2170
    value_type, 2170
std::insert_iterator< _Container >, 2169
std::integer_sequence< _Tp, _Idx >, 2171
std::integral_constant< _Tp, __v >, 2173
std::invalid_argument, 2174
    what, 2175
std::ios_base, 2175
    ~ios_base, 2180
    _M_getloc, 2180
    adjustfield, 2186
    app, 2186
    ate, 2186
    badbit, 2186
    basefield, 2186
    beg, 2187
    binary, 2187
    boolalpha, 2187
    cur, 2187
    dec, 2187
    end, 2187
    eofbit, 2187
    event, 2180
    event_callback, 2178
    failbit, 2188
    fixed, 2188
    flags, 2180, 2181
    floatfield, 2188
    fmtflags, 2178
    getloc, 2181
    goodbit, 2188
    hex, 2189
    imbue, 2181
    in, 2189
    internal, 2189
    iostate, 2179
    iword, 2181
    left, 2189
    oct, 2189
    openmode, 2179
    out, 2189
    precision, 2183
    pword, 2183
    register_callback, 2183
    right, 2189
    scientific, 2190
    seekdir, 2179
    setf, 2184
    showbase, 2190

showpoint, 2190
showpos, 2190
skipws, 2190
sync_with_stdio, 2184
trunc, 2190
unitbuf, 2190
unsetf, 2185
uppercase, 2190
width, 2185
xalloc, 2185
std::ios_base::failure, 2046
what, 2046
std::is_abstract< _Tp >, 2191
std::is_arithmetic< _Tp >, 2192
std::is_array< typename >, 2192
std::is_assignable< _Tp, _Up >, 2193
std::is_base_of< _Base, _Derived >, 2194
std::is_bind_expression< _Bind< _Signature > >, 2196
std::is_bind_expression< _Bind_result< _Result, _Signature > >, 2197
std::is_bind_expression< _Tp >, 2195
std::is_bind_expression< const _Bind< _Signature > >, 2198
std::is_bind_expression< const _Bind_result< _Result, _Signature > >, 2199
std::is_bind_expression< const volatile _Bind< _Signature > >, 2200
std::is_bind_expression< const volatile _Bind_result< _Result, _Signature > >, 2201
std::is_bind_expression< volatile _Bind< _Signature > >, 2202
std::is_bind_expression< volatile _Bind_result< _Result, _Signature > >, 2203
std::is_class< _Tp >, 2204
std::is_compound< _Tp >, 2205
std::is_const< typename >, 2206
std::is_constructible< _Tp, _Args >, 2206
std::is_convertible< _From, _To >, 2207
std::is_copy_assignable< _Tp >, 2207
std::is_copy_constructible< _Tp >, 2208
std::is_default_constructible< _Tp >, 2208
std::is_destructible< _Tp >, 2208
std::is_empty< _Tp >, 2209
std::is_enum< _Tp >, 2210
std::is_error_code_enum< _Tp >, 2211
std::is_error_code_enum< future_errc >, 2212
std::is_error_condition_enum< _Tp >, 2213
std::is_final< _Tp >, 2214
std::is_floating_point< _Tp >, 2214
std::is_function< typename >, 2215
std::is_fundamental< _Tp >, 2216
std::is_integral< _Tp >, 2216
std::is_literal_type< _Tp >, 2217
std::is_lvalue_reference< typename >, 2218
std::is_member_function_pointer< _Tp >, 2219
std::is_member_object_pointer< _Tp >, 2220
std::is_member_pointer< typename >, 2220
std::is_move_assignable< _Tp >, 2221
std::is_move_constructible< _Tp >, 2221
std::is_nothrow_assignable< _Tp, _Up >, 2222
std::is_nothrow_constructible< _Tp, _Args >, 2222
std::is_nothrow_copy_assignable< _Tp >, 2223
std::is_nothrow_copy_constructible< _Tp >, 2223
std::is_nothrow_default_constructible< _Tp >, 2224
std::is_nothrow_destructible< _Tp >, 2224
std::is_nothrow_move_assignable< _Tp >, 2225
std::is_nothrow_move_constructible< _Tp >, 2225
std::is_nothrow_swappable< _Tp >, 2225
std::is_nothrow_swappable_with< _Tp, _Up >, 2226
std::is_null_pointer< _Tp >, 2226
std::is_object< _Tp >, 2227
std::is_placeholder< _Placeholder< _Num > >, 2229
std::is_placeholder< _Tp >, 2228
std::is_pod< _Tp >, 2230
std::is_pointer< _Tp >, 2230
std::is_polymorphic< _Tp >, 2231
std::is_reference< typename >, 2232
std::is_rvalue_reference< typename >, 2232
std::is_same< typename, typename >, 2233
std::is_scalar< _Tp >, 2234
std::is_standard_layout< _Tp >, 2234
std::is_swappable< _Tp >, 2235
std::is_swappable_with< _Tp, _Up >, 2235
std::is_trivial< _Tp >, 2236
std::is_trivially_assignable< _Tp, _Up >, 2237
std::is_trivially_constructible< _Tp, _Args >, 2238
std::is_trivially_copy_assignable< _Tp >, 2239
std::is_trivially_copy_constructible< _Tp >, 2239
std::is_trivially_default_constructible< _Tp >, 2239
std::is_trivially_destructible< _Tp >, 2240
std::is_trivially_move_assignable< _Tp >, 2240
std::is_trivially_move_constructible< _Tp >, 2241
std::is_union< _Tp >, 2241
std::is_void< typename >, 2242
std::is_volatile< typename >, 2243
std::istream_iterator
difference_type, 2245
istream_iterator, 2246
iterator_category, 2245
operator==, 2246
pointer, 2245
reference, 2245
value_type, 2245
std::istream_iterator< _Tp, _CharT, _Traits, _Dist >, 2244
std::istreambuf_iterator
char_type, 2248
difference_type, 2248
equal, 2250

int_type, 2248
istream_type, 2249
istreambuf_iterator, 2249, 2250
iterator_category, 2249
operator*, 2250
operator++, 2250
pointer, 2249
reference, 2249
streambuf_type, 2249
traits_type, 2249
value_type, 2249
std::istreambuf_iterator< _CharT, _Traits >, 2247
std::iterator
difference_type, 2251
iterator_category, 2251
pointer, 2251
reference, 2251
value_type, 2251
std::iterator< _Category, _Tp, _Distance, _Pointer, _Reference >, 2250
std::iterator_traits< _Tp * >, 2253
std::iterator_traits< const _Tp * >, 2254
std::iterator_traits< typename >, 2253
std::length_error, 2265
what, 2266
std::less
first_argument_type, 2267
result_type, 2267
second_argument_type, 2267
std::less< _Tp >, 2266
std::less< void >, 2267
std::less_equal
first_argument_type, 2268
result_type, 2268
second_argument_type, 2268
std::less_equal< _Tp >, 2268
std::less_equal< void >, 2269
std::linear_congruential_engine
discard, 2272
increment, 2274
linear_congruential_engine, 2272
max, 2272
min, 2272
modulus, 2274
multiplier, 2274
operator<<, 2273
operator>>, 2274
operator(), 2273
operator==, 2274
result_type, 2271
seed, 2273
std::list
~list, 2287
_M_create_node, 2287
assign, 2287, 2288
back, 2288
begin, 2288
cbegin, 2288
cend, 2289
clear, 2289
crbegin, 2289
crend, 2289
emplace, 2289
empty, 2289
end, 2289, 2290
erase, 2290
front, 2291
get_allocator, 2291
insert, 2291, 2292
list, 2284, 2285
max_size, 2293
merge, 2293
operator=, 2293, 2295
pop_back, 2295
pop_front, 2295
push_back, 2295
push_front, 2297
rbegin, 2297
remove, 2297
remove_if, 2297
rend, 2298
resize, 2298
reverse, 2298
size, 2298
sort, 2299
splice, 2299, 2300
swap, 2300
unique, 2301
std::list< _Tp, _Alloc >, 2280
std::literals::chrono_literals, 686
operator""h, 687
operator""min, 687
operator""ms, 687
operator""ns, 687, 688
operator""s, 688
operator""us, 688
std::locale, 2303
~locale, 2307
all, 2310
category, 2305
classic, 2307
collate, 2310
combine, 2307
ctype, 2310
global, 2307
has_facet, 2309
locale, 2305, 2306
messages, 2310

monetary, 2310
name, 2308
none, 2311
numeric, 2311
operator(), 2308
operator=, 2308
operator==, 2309
time, 2311
use_facet, 2309
std::locale::facet, 2044
~facet, 2045
facet, 2045
std::locale::id, 2157
has_facet, 2158
id, 2158
use_facet, 2158
std::lock_guard< _Mutex >, 2311
std::logic_error, 2312
logic_error, 2313
what, 2313
std::logical_and
first_argument_type, 2314
result_type, 2314
second_argument_type, 2314
std::logical_and< _Tp >, 2313
std::logical_and< void >, 2314
std::logical_not
argument_type, 2315
result_type, 2315
std::logical_not< _Tp >, 2315
std::logical_not< void >, 2316
std::logical_or
first_argument_type, 2317
result_type, 2317
second_argument_type, 2317
std::logical_or< _Tp >, 2316
std::logical_or< void >, 2317
std::lognormal_distribution
max, 2319
min, 2319
operator<<, 2320
operator>>, 2320
operator(), 2319
operator==, 2320
param, 2319, 2320
reset, 2320
result_type, 2319
std::lognormal_distribution< _RealType >, 2318
std::lognormal_distribution< _RealType >::param_type, 2592
std::make_signed< _Tp >, 2327
std::make_unsigned< _Tp >, 2328
std::map
~map, 2339
at, 2339
begin, 2340
cbegin, 2340
cend, 2340
clear, 2340
count, 2341
crbegin, 2341
crend, 2341
emplace, 2341
emplace_hint, 2343
empty, 2343
end, 2343, 2344
equal_range, 2344, 2345
erase, 2345, 2346
find, 2348, 2349
get_allocator, 2349
insert, 2349–2351, 2353
key_comp, 2353
lower_bound, 2353, 2354
map, 2337–2339
max_size, 2355
operator=, 2355
rbegin, 2356
rend, 2356
size, 2356
swap, 2356
upper_bound, 2357
value_comp, 2359
std::map< _Key, _Tp, _Compare, _Alloc >, 2334
std::mask_array< _Tp >, 2359
std::match_results
~match_results, 2366
begin, 2366
cbegin, 2367
cend, 2367
empty, 2367
end, 2367
format, 2367, 2368
get_allocator, 2368
length, 2368
match_results, 2366
max_size, 2368
operator=, 2368, 2369
position, 2369
prefix, 2369
ready, 2370
size, 2370
str, 2370
suffix, 2370
swap, 2371
std::match_results< typename, typename >, 2362
std::mem_fun1_ref_t
first_argument_type, 2373
result_type, 2373

second_argument_type, 2373
std::mem_fun1_ref_t< _Ret, _Tp, _Arg >, 2372
std::mem_fun1_t
first_argument_type, 2374
result_type, 2374
second_argument_type, 2374
std::mem_fun1_t< _Ret, _Tp, _Arg >, 2374
std::mem_fun_ref_t
argument_type, 2375
result_type, 2376
std::mem_fun_ref_t< _Ret, _Tp >, 2375
std::mem_fun_t
argument_type, 2377
result_type, 2377
std::mem_fun_t< _Ret, _Tp >, 2376
std::mersenne_twister_engine
discard, 2379
max, 2379
mersenne_twister_engine, 2379
min, 2379
operator<<, 2380
operator>>, 2381
operator==, 2380
result_type, 2379
std::messages
~messages, 2384
char_type, 2384
id, 2384
messages, 2384
string_type, 2384
std::messages< _CharT >, 2382
std::messages_base, 2385
std::messages_byname
id, 2387
std::messages_byname< _CharT >, 2386
std::minus
first_argument_type, 2388
result_type, 2388
second_argument_type, 2388
std::minus< _Tp >, 2388
std::minus< void >, 2389
std::modulus
first_argument_type, 2391
result_type, 2391
second_argument_type, 2391
std::modulus< _Tp >, 2391
std::modulus< void >, 2392
std::money_base, 2393
std::money_get
~money_get, 2396
char_type, 2395
do_get, 2396
get, 2396, 2397
id, 2398
iter_type, 2395
money_get, 2396
string_type, 2395
std::money_get< _CharT, _InIter >, 2394
std::money_put
~money_put, 2400
char_type, 2399
do_put, 2400, 2401
id, 2402
iter_type, 2399
money_put, 2400
put, 2401, 2402
string_type, 2400
std::money_put< _CharT, _OutIter >, 2398
std::moneypunct
~moneypunct, 2405
char_type, 2405
curr_symbol, 2406
decimal_point, 2406
do_curr_symbol, 2406
do_decimal_point, 2406
do_frac_digits, 2407
do_grouping, 2407
do_neg_format, 2407
do_negative_sign, 2408
do_pos_format, 2408
do_positive_sign, 2408
do_thousands_sep, 2409
frac_digits, 2409
grouping, 2409
id, 2411
intl, 2412
moneypunct, 2405
neg_format, 2410
negative_sign, 2410
pos_format, 2410
positive_sign, 2411
string_type, 2405
thousands_sep, 2411
std::moneypunct< _CharT, _Intl >, 2403
std::moneypunct_byname
curr_symbol, 2414
decimal_point, 2414
do_curr_symbol, 2414
do_decimal_point, 2415
do_frac_digits, 2415
do_grouping, 2415
do_neg_format, 2416
do_negative_sign, 2416
do_pos_format, 2416
do_positive_sign, 2417
do_thousands_sep, 2417
frac_digits, 2417
grouping, 2417

id, 2420
neg_format, 2418
negative_sign, 2418
pos_format, 2419
positive_sign, 2419
thousands_sep, 2419
std::moneypunct_byname< _CharT, _Intl >, 2412
std::move_iterator< _Iterator >, 2420
std::multimap
~multimap, 2431
begin, 2431
cbegin, 2431
cend, 2431
clear, 2431
count, 2431, 2433
crbegin, 2433
crend, 2433
emplace, 2433
emplace_hint, 2434
empty, 2434
end, 2434
equal_range, 2434, 2435
erase, 2437, 2438
find, 2438, 2439
get_allocator, 2439
insert, 2439, 2440, 2442, 2443
key_comp, 2443
lower_bound, 2443, 2444
max_size, 2445
multimap, 2429, 2430
operator=, 2445
rbegin, 2445
rend, 2445, 2446
size, 2446
swap, 2446
upper_bound, 2446, 2447
value_comp, 2447
std::multimap< _Key, _Tp, _Compare, _Alloc >, 2425
std::multiplies
first_argument_type, 2448
result_type, 2448
second_argument_type, 2448
std::multiplies< _Tp >, 2448
std::multiplies< void >, 2449
std::multiset
~multiset, 2455
begin, 2455
cbegin, 2455
cend, 2455
clear, 2455
count, 2456
crbegin, 2456
crend, 2456
emplace, 2456
emplace_hint, 2457
empty, 2457
end, 2457
equal_range, 2457, 2459, 2460
erase, 2460, 2461
find, 2461, 2462
get_allocator, 2462
insert, 2462, 2464
key_comp, 2465
lower_bound, 2465, 2466
max_size, 2466
multiset, 2453–2455
operator=, 2466
rbegin, 2467
rend, 2467
size, 2467
swap, 2467
upper_bound, 2467, 2468
value_comp, 2468
std::multiset< _Key, _Compare, _Alloc >, 2449
std::mutex, 2476
std::negate
argument_type, 2478
result_type, 2478
std::negate< _Tp >, 2477
std::negate< void >, 2478
std::negative_binomial_distribution
k, 2480
max, 2480
min, 2480
operator<<, 2481
operator>>, 2481
operator(), 2480
operator==, 2481
p, 2480
param, 2480, 2481
reset, 2481
result_type, 2480
std::negative_binomial_distribution< _IntType >, 2478
std::negative_binomial_distribution< _IntType >::param_type, 2593
std::nested_exception, 2482
std::normal_distribution
max, 2487
mean, 2487
min, 2487
normal_distribution, 2486
operator<<, 2488
operator>>, 2488
operator(), 2487
operator==, 2488
param, 2487
reset, 2488
result_type, 2486

stddev, 2488
std::normal_distribution< _RealType >, 2485
std::normal_distribution< _RealType >::param_type, 2602
std::not_equal_to
first_argument_type, 2490
result_type, 2490
second_argument_type, 2490
std::not_equal_to< _Tp >, 2489
std::not_equal_to< void >, 2490
std::num_get
~num_get, 2495
char_type, 2495
do_get, 2495–2500
get, 2501–2506
id, 2507
iter_type, 2495
num_get, 2495
std::num_get< _CharT, _InIter >, 2493
std::num_put
~num_put, 2509
char_type, 2509
do_put, 2510–2512
id, 2517
iter_type, 2509
num_put, 2509
put, 2513–2517
std::num_put< _CharT, _OutIter >, 2507
std::numeric_limits
denorm_min, 2519
digits, 2520
digits10, 2521
epsilon, 2519
has_denorm, 2521
has_denorm_loss, 2521
has_infinity, 2521
has_quiet_NaN, 2521
has_signaling_NaN, 2521
infinity, 2519
is_bounded, 2521
is_exact, 2521
is_iec559, 2521
is_integer, 2522
is_modulo, 2522
is_signed, 2522
is_specialized, 2522
lowest, 2519
max, 2520
max_digits10, 2522
max_exponent, 2522
max_exponent10, 2522
min, 2520
min_exponent, 2522
min_exponent10, 2522
quiet_NaN, 2520
radix, 2522
round_error, 2520
round_style, 2523
signaling_NaN, 2520
tinyness_before, 2523
traps, 2523
std::numeric_limits< _Tp >, 2518
std::numeric_limits< bool >, 2523
std::numeric_limits< char >, 2524
std::numeric_limits< char16_t >, 2525
std::numeric_limits< char32_t >, 2526
std::numeric_limits< double >, 2527
std::numeric_limits< float >, 2528
std::numeric_limits< int >, 2529
std::numeric_limits< long >, 2530
std::numeric_limits< long double >, 2531
std::numeric_limits< long long >, 2532
std::numeric_limits< short >, 2533
std::numeric_limits< signed char >, 2534
std::numeric_limits< unsigned char >, 2535
std::numeric_limits< unsigned int >, 2536
std::numeric_limits< unsigned long >, 2537
std::numeric_limits< unsigned long long >, 2538
std::numeric_limits< unsigned short >, 2539
std::numeric_limits< wchar_t >, 2540
std::numpunct
~numpunct, 2544
char_type, 2543
decimal_point, 2544
do_decimal_point, 2545
do_falsename, 2545
do_grouping, 2545
do_thousands_sep, 2545
do_truename, 2546
falsename, 2546
grouping, 2546
id, 2547
numpunct, 2544
string_type, 2543
thousands_sep, 2546
truename, 2547
std::numpunct< _CharT >, 2542
std::numpunct_byname
decimal_point, 2549
do_decimal_point, 2549
do_falsename, 2550
do_grouping, 2550
do_thousands_sep, 2550
do_truename, 2550
falsename, 2551
grouping, 2551
id, 2552
thousands_sep, 2551

truename, 2552
std::numpunct_byname< _CharT >, 2548
std::once_flag, 2556
call_once, 2556
once_flag, 2556
operator=, 2556
std::ostream_iterator
char_type, 2560
difference_type, 2560
iterator_category, 2560
operator=, 2561
ostream_iterator, 2561
ostream_type, 2560
pointer, 2560
reference, 2560
traits_type, 2561
value_type, 2561
std::ostream_iterator< _Tp, _CharT, _Traits >, 2559
std::ostreambuf_iterator
char_type, 2564
difference_type, 2564
failed, 2565
iterator_category, 2564
operator*, 2565
operator++, 2565
operator=, 2566
ostream_type, 2564
ostreambuf_iterator, 2565
pointer, 2564
reference, 2564
streambuf_type, 2564
traits_type, 2565
value_type, 2565
std::ostreambuf_iterator< _CharT, _Traits >, 2563
std::out_of_range, 2566
what, 2567
std::output_iterator_tag, 2567
std::overflow_error, 2577
what, 2577
std::owner_less< _Tp >, 2578
std::owner_less< shared_ptr< _Tp > >, 2579
first_argument_type, 2579
result_type, 2579
second_argument_type, 2579
std::owner_less< void >, 2580
first_argument_type, 2580
result_type, 2580
second_argument_type, 2580
std::owner_less< weak_ptr< _Tp > >, 2581
first_argument_type, 2582
result_type, 2582
second_argument_type, 2582
std::packaged_task< _Res(_ArgTypes...)>, 2582
std::pair
first, 2586
first_type, 2585
pair, 2585, 2586
second, 2586
second_type, 2585
swap, 2586
std::pair< _T1, _T2 >, 2583
std::piecewise_constant_distribution
densities, 2612
intervals, 2612
max, 2612
min, 2612
operator<<, 2613
operator>>, 2613
operator(), 2612
operator==, 2613
param, 2612
reset, 2613
result_type, 2612
std::piecewise_constant_distribution< _RealType >, 2610
std::piecewise_constant_distribution< _RealType >::param_type, 2596
std::piecewise_construct_t, 2614
std::piecewise_linear_distribution
densities, 2615
intervals, 2615
max, 2616
min, 2616
operator<<, 2616
operator>>, 2618
operator(), 2616
operator==, 2618
param, 2616
reset, 2616
result_type, 2615
std::piecewise_linear_distribution< _RealType >, 2614
std::piecewise_linear_distribution< _RealType >::param_type, 2603
std::placeholders, 688
std::plus
first_argument_type, 2619
result_type, 2619
second_argument_type, 2619
std::plus< _Tp >, 2618
std::pointer_to_binary_function
first_argument_type, 2621
result_type, 2621
second_argument_type, 2622
std::pointer_to_binary_function< _Arg1, _Arg2, _Result >, 2621
std::pointer_to_unary_function
argument_type, 2623
result_type, 2623
std::pointer_to_unary_function< _Arg, _Result >, 2622

std::pointer_traits
difference_type, 2623
element_type, 2624
pointer, 2624
rebind, 2624
std::pointer_traits< _Ptr >, 2623
std::pointer_traits< _Tp * >, 2624
difference_type, 2624
element_type, 2625
pointer, 2625
pointer_to, 2625
std::poisson_distribution
max, 2627
mean, 2627
min, 2627
operator<<, 2628
operator>>, 2628
operator(), 2627
operator==, 2628
param, 2627
reset, 2628
result_type, 2626
std::poisson_distribution< _IntType >, 2625
std::poisson_distribution< _IntType >::param_type, 2593
std::priority_queue
empty, 2632
pop, 2632
priority_queue, 2631, 2632
push, 2632
size, 2634
top, 2634
std::priority_queue< _Tp, _Sequence, _Compare >, 2630
std::promise< _Res >, 2637
std::promise< _Res & >, 2638
std::promise< void >, 2638
std::queue
back, 2643
c, 2645
empty, 2643
front, 2643
pop, 2643
push, 2643
queue, 2642
size, 2645
std::queue< _Tp, _Sequence >, 2641
std::random_access_iterator_tag, 2647
std::random_device, 2648
result_type, 2649
std::range_error, 2649
what, 2650
std::rank< typename >, 2657
std::ratio< _Num, _Den >, 2658
std::ratio_equal< _R1, _R2 >, 2659
std::ratio_greater< _R1, _R2 >, 2660
std::ratio_greater_equal< _R1, _R2 >, 2661
std::ratio_less< _R1, _R2 >, 2661
std::ratio_less_equal< _R1, _R2 >, 2662
std::ratio_not_equal< _R1, _R2 >, 2663
std::raw_storage_iterator
difference_type, 2665
iterator_category, 2665
pointer, 2665
reference, 2665
value_type, 2665
std::raw_storage_iterator< _OutputIterator, _Tp >, 2664
std::recursive_mutex, 2681
std::recursive_timed_mutex, 2682
std::reference_wrapper
cref, 2685
ref, 2685
std::reference_wrapper< _Tp >, 2684
std::regex_constants, 689
__match_flag, 691
__polynomial, 695
__syntax_option, 691
awk, 695
basic, 695
collate, 695
ECMAScript, 695
egrep, 696
error_backref, 691
error_badbrace, 691
error_badrepeat, 692
error_brace, 692
error_brack, 692
error_collate, 692
error_complexity, 692
error_ctype, 692
error_escape, 692
error_paren, 692
error_range, 692
error_space, 692
error_stack, 692
error_type, 691
extended, 696
format_default, 696
format_first_only, 696
format_no_copy, 696
format_sed, 697
grep, 697
icase, 697
match_any, 697
match_continuous, 697
match_default, 697
match_flag_type, 691
match_not_bol, 697
match_not_bow, 697
match_not_eol, 697

match_not_eow, 698
match_not_null, 698
match_prev_avail, 698
nosubs, 698
operatorΓA30C, 694
operatorΓA30C=, 694
operator∼, 695
operator^, 693
operator^=, 693, 694
operator&, 692, 693
operator&=, 693
optimize, 698
syntax_option_type, 691
std::regex_error, 2686
code, 2687
regex_error, 2686
what, 2687
std::regex_iterator
operator∗, 2688
operator++, 2689
operator->, 2689
operator=, 2689
operator==, 2689
regex_iterator, 2688
std::regex_iterator< _Bi_iter, _Ch_type, _Rx_traits >, 2687
std::regex_token_iterator
operator∗, 2693
operator++, 2693
operator->, 2693
operator=, 2694
operator==, 2694
regex_token_iterator, 2690, 2692, 2693
std::regex_traits
getloc, 2695
imbue, 2695
isctype, 2695
length, 2697
lookup_classname, 2697
lookup_collatename, 2698
regex_traits, 2695
transform, 2698
transform_primary, 2699
translate, 2699
translate_nocase, 2699
value, 2700
std::regex_traits< _Ch_type >, 2694
std::rel_ops, 698
operator<=, 699
operator>, 699
operator>=, 699
std::remove_all_extents< typename >, 2700
std::remove_const< _Tp >, 2700
std::remove_cv< typename >, 2701
std::remove_extent< _Tp >, 2701
std::remove_pointer< _Tp >, 2701
std::remove_reference< _Tp >, 2702
std::remove_volatile< _Tp >, 2702
std::result_of< _Signature >, 2704
std::reverse_iterator
base, 2707
iterator_category, 2706
operator∗, 2707
operator+, 2707
operator++, 2708
operator+=, 2708
operator-, 2708
operator->, 2709
operator--, 2708, 2709
operator-=, 2709
reverse_iterator, 2706, 2707
value_type, 2706
std::reverse_iterator< _Iterator >, 2705
std::runtime_error, 2715
runtime_error, 2716
what, 2716
std::scoped_allocator_adaptor< _OuterAlloc, _InnerAllocs >, 2731
std::seed_seq, 2733
result_type, 2733
seed_seq, 2734
std::set
∼set, 2751
allocator_type, 2748
begin, 2752
cbegin, 2752
cend, 2752
clear, 2752
const_iterator, 2748
const_pointer, 2748
const_reference, 2748
const_reverse_iterator, 2748
count, 2752
crbegin, 2754
crend, 2754
difference_type, 2748
emplace, 2754
emplace_hint, 2754
empty, 2755
end, 2755
equal_range, 2755, 2757
erase, 2758
find, 2759, 2760
get_allocator, 2760
insert, 2760, 2762
iterator, 2748
key_comp, 2762
key_compare, 2749

key_type, 2749
lower_bound, 2762, 2763
max_size, 2764
operator=, 2764
pointer, 2749
rbegin, 2764
reference, 2749
rend, 2764
reverse_iterator, 2749
set, 2750, 2751
size, 2765
size_type, 2749
swap, 2765
upper_bound, 2765, 2766
value_comp, 2766
value_compare, 2749
value_type, 2749
std::set< _Key, _Compare, _Alloc >, 2744
std::shared_future
_M_get_result, 2769
_Ptr, 2768
get, 2769
shared_future, 2768, 2769
std::shared_future< _Res >, 2767
std::shared_future< _Res & >, 2770
_M_get_result, 2772
_Ptr, 2771
get, 2772
shared_future, 2771
std::shared_future< void >, 2772
_M_get_result, 2774
_Ptr, 2774
shared_future, 2774
std::shared_lock< _Mutex >, 2774
std::shared_ptr
element_type, 2779
get, 2784
operator bool, 2784
owner_before, 2784
shared_ptr, 2779–2781, 2783, 2784
swap, 2784
unique, 2785
use_count, 2785
std::shared_ptr< _Tp >, 2775
std::shared_timed_mutex, 2785
std::shuffle_order_engine
base, 2789
discard, 2789
max, 2789
min, 2789
operator<<, 2790
operator>>, 2790
operator(), 2789
operator==, 2790
result_type, 2787
seed, 2789, 2790
shuffle_order_engine, 2787, 2789
std::shuffle_order_engine< _RandomNumberEngine, __k >, 2786
std::slice, 2791
std::slice_array< _Tp >, 2791
std::stack
empty, 2803
pop, 2803
push, 2803
size, 2804
stack, 2803
top, 2804
std::stack< _Tp, _Sequence >, 2801
std::student_t_distribution
max, 2852
min, 2852
operator<<, 2852
operator>>, 2854
operator(), 2852
operator==, 2854
param, 2852
reset, 2852
result_type, 2851
std::student_t_distribution< _RealType >, 2850
std::student_t_distribution< _RealType >::param_type, 2600
std::sub_match
compare, 2858, 2859
first, 2860
first_type, 2858
length, 2859
operator string_type, 2859
second, 2860
second_type, 2858
str, 2859
swap, 2859
std::sub_match< _BiIter >, 2854
std::subtract_with_carry_engine
discard, 2863
max, 2863
min, 2863
operator<<, 2863
operator>>, 2865
operator(), 2863
operator==, 2865
result_type, 2861
seed, 2863
subtract_with_carry_engine, 2861
std::system_error, 2869
what, 2869
std::this_thread, 700
get_id, 700

sleep_for, 700
sleep_until, 700
yield, 701
std::thread, 2875
native_handle, 2875
std::thread::id, 2159
std::time_base, 2884
std::time_get
~time_get, 2887
char_type, 2887
date_order, 2887
do_date_order, 2887
do_get, 2888
do_get_date, 2888
do_get_monthname, 2889
do_get_time, 2889
do_get_weekday, 2890
do_get_year, 2890
get, 2891
get_date, 2892
get_monthname, 2892
get_time, 2894
get_weekday, 2894
get_year, 2895
id, 2895
iter_type, 2887
time_get, 2887
std::time_get< _CharT, _InIter >, 2885
std::time_get_byname
date_order, 2897
do_date_order, 2898
do_get, 2898
do_get_date, 2899
do_get_monthname, 2899
do_get_time, 2900
do_get_weekday, 2900
do_get_year, 2901
get, 2901, 2902
get_date, 2902
get_monthname, 2903
get_time, 2903
get_weekday, 2904
get_year, 2904
id, 2905
std::time_get_byname< _CharT, _InIter >, 2896
std::time_put
~time_put, 2908
char_type, 2908
do_put, 2909
id, 2910
iter_type, 2908
put, 2909
time_put, 2908
std::time_put< _CharT, _OutIter >, 2907
std::time_put_byname
do_put, 2912
id, 2913
put, 2912, 2913
std::time_put_byname< _CharT, _OutIter >, 2911
std::timed_mutex, 2914
std::to_chars_result, 2914
std::tr1, 701
std::tr1::__detail, 704
std::tr2, 704
std::tr2::__detail, 706
std::tr2::__dynamic_bitset_base
_M_w, 748
std::tr2::__dynamic_bitset_base< _WordT, _Alloc >, 746
std::tr2::__reflection_typelist< _Elements >, 786
std::tr2::__reflection_typelist< _First, _Rest...>, 787
std::tr2::__reflection_typelist<>, 787
std::tr2::bases< _Tp >, 1131
std::tr2::bool_set, 1763
bool_set, 1764
equals, 1765
is_emptyset, 1765
is_indeterminate, 1765
is_singleton, 1765
operator bool, 1765
std::tr2::direct_bases< _Tp >, 1970
std::tr2::dynamic_bitset
all, 1992
any, 1992
append, 1992
clear, 1992
count, 1992
dynamic_bitset, 1990, 1991
empty, 1992
find_first, 1993
find_next, 1993
flip, 1993
get_allocator, 1994
max_size, 1994
none, 1994
num_blocks, 1994
operator<<, 1996
operator<<=, 1996
operator>>, 1996
operator>>=, 1997
operatorΓA30C=, 1999
operator~, 1999
operator^=, 1997
operator-=, 1996
operator=, 1996
operator&=, 1994
push_back, 1999
reset, 1999
resize, 1999

set, 2000
size, 2000
swap, 2000
test, 2000
to_string, 2001
to_ullong, 2001
to_ulong, 2001
std::tr2::dynamic_bitset< _WordT, _Alloc >, 1986
std::tr2::dynamic_bitset< _WordT, _Alloc >::reference, 2683
std::try_to_lock_t, 2953
std::tuple< _Elements >, 2953
std::tuple< _T1, _T2 >, 2955
std::tuple_element< 0, std::pair< _Tp1, _Tp2 > >, 2958
std::tuple_element< 0, tuple< _Head, _Tail...> >, 2958
std::tuple_element< 1, std::pair< _Tp1, _Tp2 > >, 2958
std::tuple_element< __i, tuple< _Head, _Tail...> >, 2959
std::tuple_element< __i, tuple<> >, 2959
std::tuple_element< _Int, _Tp >, 2957
std::tuple_element< _Int, std::__debug::array< _Tp, _Nm > >, 2959
std::tuple_element< _Int,::array< _Tp, _Nm > >, 2960
std::tuple_size< _Tp >, 2960
std::tuple_size< std::__debug::array< _Tp, _Nm > >, 2961
std::tuple_size< std::pair< _Tp1, _Tp2 > >, 2962
std::tuple_size< tuple< _Elements...> >, 2963
std::tuple_size<::array< _Tp, _Nm > >, 2964
std::type_index, 2965
std::type_info, 2965
~type_info, 2966
name, 2966
std::unary_function
argument_type, 2970
result_type, 2970
std::unary_function< _Arg, _Result >, 2969
std::unary_negate
argument_type, 2971
result_type, 2971
std::unary_negate< _Predicate >, 2970
std::underflow_error, 2973
what, 2973
std::underlying_type< _Tp >, 2974
std::uniform_int_distribution
max, 2975
min, 2975
operator(), 2976
operator==, 2976
param, 2976
reset, 2976
result_type, 2975
uniform_int_distribution, 2975
std::uniform_int_distribution< _IntType >, 2974
std::uniform_int_distribution< _IntType >::param_type, 2600
std::uniform_real_distribution
max, 2978
min, 2978
operator(), 2978
operator==, 2979
param, 2978, 2979
reset, 2979
result_type, 2978
uniform_real_distribution, 2978
std::uniform_real_distribution< _RealType >, 2976
std::uniform_real_distribution< _RealType >::param_type, 2602
std::unique_lock
swap, 2980
std::unique_lock< _Mutex >, 2979
std::unique_ptr
~unique_ptr, 2984
get, 2984
get_deleter, 2984
operator bool, 2985
operator*, 2985
operator->, 2985
operator=, 2985
release, 2985
reset, 2986
swap, 2986
unique_ptr, 2983, 2984
std::unique_ptr< _Tp, _Dp >, 2981
std::unordered_map
allocator_type, 2994
at, 2999
begin, 3000
bucket_count, 3001
cbegin, 3001
cend, 3001
clear, 3002
const_iterator, 2994
const_local_iterator, 2994
const_pointer, 2995
const_reference, 2995
count, 3002
difference_type, 2995
emplace, 3002
emplace_hint, 3002
empty, 3003
end, 3003, 3004
equal_range, 3004
erase, 3005, 3006
find, 3006
get_allocator, 3007
hash_function, 3007
hasher, 2995

insert, 3007–3009, 3011
iterator, 2995
key_eq, 3011
key_equal, 2995
key_type, 2995
load_factor, 3011
local_iterator, 2996
mapped_type, 2996
max_bucket_count, 3011
max_load_factor, 3011
max_size, 3012
operator=, 3012
pointer, 2996
reference, 2996
rehash, 3013
reserve, 3013
size, 3013
size_type, 2996
swap, 3013
unordered_map, 2996, 2997, 2999
value_type, 2996
std::unordered_map< _Key, _Tp, _Hash, _Pred, _Alloc >, 2991
std::unordered_multimap
allocator_type, 3022
begin, 3026
bucket_count, 3026
cbegin, 3027
cend, 3027
clear, 3027
const_iterator, 3022
const_local_iterator, 3023
const_pointer, 3023
const_reference, 3023
count, 3027
difference_type, 3023
emplace, 3029
emplace_hint, 3029
empty, 3029
end, 3029, 3030
equal_range, 3030
erase, 3032, 3033
find, 3033
get_allocator, 3034
hash_function, 3034
hasher, 3023
insert, 3034–3036
iterator, 3023
key_eq, 3037
key_equal, 3023
key_type, 3023
load_factor, 3037
local_iterator, 3024
mapped_type, 3024
max_bucket_count, 3037
max_load_factor, 3037
max_size, 3037
operator=, 3037, 3038
pointer, 3024
reference, 3024
rehash, 3038
reserve, 3038
size, 3038
size_type, 3024
swap, 3038
unordered_multimap, 3024, 3025
value_type, 3024
std::unordered_multimap< _Key, _Tp, _Hash, _Pred, _Alloc >, 3019
std::unordered_multiset
allocator_type, 3046
begin, 3049, 3051
bucket_count, 3051
cbegin, 3051
cend, 3051
clear, 3053
const_iterator, 3046
const_local_iterator, 3046
const_pointer, 3046
const_reference, 3046
count, 3053
difference_type, 3047
emplace, 3053
emplace_hint, 3053
empty, 3054
end, 3054
equal_range, 3055
erase, 3055, 3057
find, 3057, 3058
get_allocator, 3058
hash_function, 3058
hasher, 3047
insert, 3058, 3060, 3062
iterator, 3047
key_eq, 3062
key_equal, 3047
key_type, 3047
load_factor, 3062
local_iterator, 3047
max_bucket_count, 3062
max_load_factor, 3062
max_size, 3062
operator=, 3063
pointer, 3047
reference, 3047
rehash, 3063
reserve, 3063
size, 3063

size_type, 3048
swap, 3064
unordered_multiset, 3048, 3049
value_type, 3048
std::unordered_multiset< _Value, _Hash, _Pred, _Alloc >, 3043
std::unordered_set
allocator_type, 3071
begin, 3076
bucket_count, 3077
cbegin, 3077
cend, 3077
clear, 3077
const_iterator, 3071
const_local_iterator, 3071
const_pointer, 3072
const_reference, 3072
count, 3078
difference_type, 3072
emplace, 3078
emplace_hint, 3078
empty, 3079
end, 3079
equal_range, 3081
erase, 3081, 3082
find, 3083
get_allocator, 3083
hash_function, 3083
hasher, 3072
insert, 3084, 3085
iterator, 3072
key_eq, 3087
key_equal, 3072
key_type, 3072
load_factor, 3087
local_iterator, 3073
max_bucket_count, 3087
max_load_factor, 3087
max_size, 3087
operator=, 3087, 3088
pointer, 3073
reference, 3073
rehash, 3088
reserve, 3088
size, 3088
size_type, 3073
swap, 3089
unordered_set, 3073, 3074
value_type, 3073
std::unordered_set< _Value, _Hash, _Pred, _Alloc >, 3069
std::uses_allocator< tuple< _Types...>, _Alloc >, 3094
std::uses_allocator< typename, typename >, 3093
std::valarray
valarray, 3097
std::valarray< _Tp >, 3095
std::vector
~vector, 3103
_M_allocate_and_copy, 3103
_M_range_check, 3104
assign, 3104
at, 3104, 3105
back, 3105
begin, 3105, 3106
capacity, 3106
cbegin, 3106
cend, 3106
clear, 3106
crbegin, 3106
crend, 3106
data, 3107
emplace, 3107
empty, 3107
end, 3107, 3108
erase, 3108
front, 3108, 3109
insert, 3109, 3110
max_size, 3110
operator=, 3111
pop_back, 3112
push_back, 3112
rbegin, 3112
rend, 3113
reserve, 3113
resize, 3113
shrink_to_fit, 3115
size, 3115
swap, 3115
vector, 3101–3103
std::vector< _Tp, _Alloc >, 3098
std::vector< bool, _Alloc >, 3120
std::wbuffer_convert
_M_buf_locale, 3139
_M_in_beg, 3139
_M_in_cur, 3139
_M_in_end, 3139
_M_out_beg, 3139
_M_out_cur, 3139
_M_out_end, 3139
__streambuf_type, 3126
char_type, 3126
eback, 3127
egptr, 3127
epptr, 3127
gbump, 3128
getloc, 3128
gptr, 3128
imbue, 3128

in_avail, 3129
int_type, 3126
off_type, 3126
overflow, 3129
pbackfail, 3130
pbase, 3130
pbump, 3130
pos_type, 3126
pptr, 3131
pubimbue, 3131
pubseekoff, 3131
pubseekpos, 3132
pubsetbuf, 3132
pubsync, 3132
sbumpc, 3132
seekoff, 3133
seekpos, 3133
setbuf, 3133
setg, 3133
setp, 3134
sgetc, 3134
sgetn, 3134
showmanyc, 3135
snextc, 3135
sputbackc, 3135
sputc, 3136
sputn, 3136
state, 3136
sungetc, 3136
sync, 3137
traits_type, 3126
uflow, 3137
underflow, 3137
wbuffer_convert, 3126, 3127
xsgetn, 3138
xsputn, 3138
std::wbuffer_convert< _Codecvt, _Elem, _Tr >, 3124
std::weak_ptr< _Tp >, 3139
std::weibull_distribution
a, 3142
b, 3142
max, 3142
min, 3142
operator(), 3142
operator==, 3143
param, 3143
reset, 3143
result_type, 3142
std::weibull_distribution< _RealType >, 3141
std::weibull_distribution< _RealType >::param_type, 2594
std::wstring_convert
converted, 3146
from_bytes, 3146, 3147
state, 3147
to_bytes, 3147
wstring_convert, 3144, 3146
std::wstring_convert< _Codecvt, _Elem, _Wide_alloc, _Byte_alloc >, 3143
std_abs.h, 3473
std_function.h, 3474
std_mutex.h, 3475
stdc++.h, 3475
stddev
std::normal_distribution, 2488
stdexcept, 3475
stdio_filebuf
__gnu_cxx::stdio_filebuf, 2807
stdio_filebuf.h, 3476
stdio_sync_filebuf.h, 3476
stdlib.h, 3477
stdtr1c++.h, 3477
stl_algo.h, 3477
stl_algobase.h, 3487
stl_bvector.h, 3493
stl_construct.h, 3494
stl_deque.h, 3494
stl_function.h, 3495
stl_heap.h, 3497
stl_iterator.h, 3499, 3503
stl_iterator_base_funcs.h, 3504
stl_iterator_base_types.h, 3505
stl_list.h, 3505
stl_map.h, 3506
stl_multimap.h, 3507
stl_multiset.h, 3508
stl_numeric.h, 3509
stl_pair.h, 3510
stl_queue.h, 3510
stl_raw_storage_iter.h, 3511
stl_relops.h, 3511
stl_set.h, 3512
stl_stack.h, 3513
stl_tempbuf.h, 3513
stl_tree.h, 3514
stl_uninitialized.h, 3515
stl_vector.h, 3515
stop_token, 3516
str
std::basic_istringstream, 1414, 1415
std::basic_ostringstream, 1517
std::basic_stringbuf, 1647, 1648
std::basic_stringstream, 1695
std::match_results, 2370
std::sub_match, 2859
stream_iterator.h, 3516
streambuf, 3517
I/O, 98

streambuf.tcc, 3517
streambuf_iterator.h, 3518
streambuf_type
    std::istreambuf_iterator, 2249
    std::ostreambuf_iterator, 2564
streamoff
    std, 582
streampos
    std, 582
streamsize
    std, 582
stride
    Numeric Arrays, 235
string, 3519, 3522
    Strings, 341
string_conversions.h, 3522
string_type
    std::collate, 1823
    std::collate_byname, 1830
    std::messages, 2384
    std::money_get, 2395
    std::money_put, 2400
    std::moneypunct, 2405
    std::numpunct, 2543
string_view, 3523
string_view.tcc, 3525
stringbuf
    I/O, 98
stringfwd.h, 3525
Strings, 341
    string, 341
    u16string, 341
    u32string, 341
    wstring, 341
stringstream
    I/O, 98
strstream, 3526
substr
    __gnu_cxx::__versa_string, 847
    std::basic_string, 1629
subtract_with_carry_engine
    std::subtract_with_carry_engine, 2861
subtractive_rng
    __gnu_cxx::subtractive_rng, 2867
suffix
    std::match_results, 2370
sum
    Numeric Arrays, 235
sungetc
    __gnu_cxx::enc_filebuf, 2018
    __gnu_cxx::stdio_filebuf, 2822
    __gnu_cxx::stdio_sync_filebuf, 2842
    std::basic_filebuf, 1148
    std::basic_streambuf, 1551
    std::basic_stringbuf, 1648
    std::wbuffer_convert, 3136
swap
    __gnu_cxx, 404
    __gnu_cxx::__versa_string, 847
    __gnu_debug::basic_string, 1579
    __gnu_parallel::_IteratorPair, 914
    __gnu_pbds::sample_probe_fn, 2717
    __gnu_pbds::sample_range_hashing, 2718
    __gnu_pbds::sample_ranged_hash_fn, 2719
    __gnu_pbds::sample_resize_policy, 2722
    __gnu_pbds::sample_resize_trigger, 2724
    __gnu_pbds::sample_size_policy, 2725
    __gnu_pbds::sample_update_policy, 2728
    Futures, 78
    Numeric Arrays, 235
    Pointer Abstractions, 249
    Regular Expressions, 301
    std, 644–646
    std::__debug, 653
    std::basic_regex, 1535
    std::basic_string, 1629
    std::deque, 1966
    std::experimental::fundamentals_v1::any, 1078
    std::forward_list, 2072
    std::function< _Res(_ArgTypes...)>, 2085
    std::list, 2300
    std::map, 2356
    std::match_results, 2371
    std::multimap, 2446
    std::multiset, 2467
    std::pair, 2586
    std::set, 2765
    std::shared_ptr, 2784
    std::sub_match, 2859
    std::tr2::dynamic_bitset, 2000
    std::unique_lock, 2980
    std::unique_ptr, 2986
    std::unordered_map, 3013
    std::unordered_multimap, 3038
    std::unordered_multiset, 3064
    std::unordered_set, 3089
    std::vector, 3115
    Type-safe container of any type, 362
    Utilities, 376, 377
swap_ranges
    Mutating, 167
sync
    __gnu_cxx::enc_filebuf, 2018
    __gnu_cxx::stdio_filebuf, 2822
    __gnu_cxx::stdio_sync_filebuf, 2842
    std::basic_filebuf, 1148
    std::basic_fstream, 1198
    std::basic_ifstream, 1246

std::basic_iostream, 1327
std::basic_istream, 1370
std::basic_istringstream, 1415
std::basic_streambuf, 1551
std::basic_stringbuf, 1648
std::basic_stringstream, 1696
std::wbuffer_convert, 3137
sync_with_stdio
std::basic_fstream, 1199
std::basic_ifstream, 1247
std::basic_ios, 1274
std::basic_iostream, 1328
std::basic_istream, 1371
std::basic_istringstream, 1415
std::basic_ofstream, 1451
std::basic_ostream, 1482
std::basic_ostringstream, 1517
std::basic_stringstream, 1696
std::ios_base, 2184
syntax_option_type
std::regex_constants, 691
synth_access_traits
__gnu_pbds::detail::trie_traits< Key, Mapped, _A-Traits, Node_Update, pat_trie_tag, _Alloc >, 2951
__gnu_pbds::detail::trie_traits< Key, null_type, _A-Traits, Node_Update, pat_trie_tag, _Alloc >, 2952
synth_access_traits.hpp, 3526
system_category
Diagnostics, 63
system_error, 3527

t
std::binomial_distribution, 1741
TLB_size
__gnu_parallel::_Settings, 1047
TR1 Mathematical Special Functions, 343
assoc_laguerre, 345
assoc_legendre, 345
beta, 345
comp_ellint_1, 345
comp_ellint_2, 345
comp_ellint_3, 345
conf_hyperg, 346
cyl_bessel_i, 346
cyl_bessel_j, 346
cyl_bessel_k, 346
cyl_neumann, 346
ellint_1, 346
ellint_2, 346
ellint_3, 346
expint, 347
hermite, 347
hyperg, 347
laguerre, 347
legendre, 347
riemann_zeta, 347
sph_bessel, 347
sph_legendre, 347
sph_neumann, 347
table
std::ctype< char >, 1891
std::ctype_byname< char >, 1928
table_size
std::ctype< char >, 1893
std::ctype_byname< char >, 1931
tag_and_trait.hpp, 3528
Tags, 349
trivial_iterator_difference_type, 349
tags.h, 3529
tan
Complex Numbers, 52
tanh
Complex Numbers, 52
target
std::function< _Res(_ArgTypes...)>, 2085
target_type
std::function< _Res(_ArgTypes...)>, 2086
Technical Specifications, 350
tellg
std::basic_fstream, 1199
std::basic_ifstream, 1247
std::basic_iostream, 1328
std::basic_istream, 1371
std::basic_istringstream, 1416
std::basic_stringstream, 1696
tellp
std::basic_fstream, 1199
std::basic_iostream, 1328
std::basic_ofstream, 1451
std::basic_ostream, 1482
std::basic_ostringstream, 1517
std::basic_stringstream, 1697
temporary_buffer
__gnu_cxx::temporary_buffer, 2871
terminate
Exceptions, 71
terminate_handler
Exceptions, 70
test
std::bitset, 1763
std::tr2::dynamic_bitset, 2000
tgmath.h, 3530
thin_heap_.hpp, 3530
thousands_sep
std::moneypunct, 2411
std::moneypunct_byname, 2419

std::numpunct, 2546
std::numpunct_byname, 2551
thread, 3531
Threads, 351
throw_allocator.h, 3531
throw_with_nested
Exceptions, 72
tie
std::basic_fstream, 1199, 1200
std::basic_ifstream, 1247, 1248
std::basic_ios, 1276
std::basic_iostream, 1328, 1329
std::basic_istream, 1371, 1372
std::basic_istringstream, 1416
std::basic_ofstream, 1451, 1452
std::basic_ostream, 1482, 1483
std::basic_ostringstream, 1518
std::basic_stringstream, 1697
Utilities, 377
Time, 352
duration_cast, 354
high_resolution_clock, 354
hours, 354
microseconds, 354
milliseconds, 354
minutes, 354
nanoseconds, 354
operator∗, 355
operator+, 355
operator-, 355
seconds, 354
time_point_cast, 356
time
std::locale, 2311
time_get
std::time_get, 2887
time_members.h, 3533
time_point_cast
Time, 356
time_put
std::time_put, 2908
tinyness_before
std::__numeric_limits_base, 776
std::numeric_limits, 2523
to_array
Array creation functions, 9
to_bytes
std::wstring_convert, 3147
to_string
std::bitset, 1763
std::tr2::dynamic_bitset, 2001
to_ullong
std::tr2::dynamic_bitset, 2001
to_ulong
std::bitset, 1763
std::tr2::dynamic_bitset, 2001
tolower
std, 646
std::__ctype_abstract_base, 743
std::ctype, 1879
std::ctype< char >, 1891
std::ctype< wchar_t >, 1905
std::ctype_byname, 1918, 1919
std::ctype_byname< char >, 1928, 1929
top
std::priority_queue, 2634
std::stack, 2804
toupper
std, 646
std::__ctype_abstract_base, 744
std::ctype, 1879, 1880
std::ctype< char >, 1891, 1892
std::ctype< wchar_t >, 1907
std::ctype_byname, 1919
std::ctype_byname< char >, 1929
trace_fn_imps.hpp, 3533, 3534
Traits, 357
traits.hpp, 3534–3536
traits_type
std::basic_ios, 1264
std::basic_istream::sentry, 2737
std::basic_streambuf, 1540
std::istreambuf_iterator, 2249
std::ostream_iterator, 2561
std::ostreambuf_iterator, 2565
std::wbuffer_convert, 3126
transform
Mutating, 167
std::collate, 1828
std::collate_byname, 1832
std::regex_traits, 2698
transform_minimal_n
__gnu_parallel::_Settings, 1047
transform_primary
std::regex_traits, 2699
translate
std::regex_traits, 2699
translate_nocase
std::regex_traits, 2699
traps
std::__numeric_limits_base, 777
std::numeric_limits, 2523
tree
__gnu_pbds::tree, 2917
tree_policy.hpp, 3536
tree_trace_base.hpp, 3537
trie
__gnu_pbds::trie, 2936

trie_policy.hpp, 3537
trie_policy_base.hpp, 3538
trie_string_access_traits_imp.hpp, 3538
trivial_iterator_difference_type
    Tags, 349
true_type
    Metaprogramming, 147
truename
    std::numpunct, 2547
    std::numpunct_byname, 2552
trunc
    std::basic_fstream, 1208
    std::basic_ifstream, 1256
    std::basic_ios, 1283
    std::basic_iostream, 1337
    std::basic_istream, 1380
    std::basic_istringstream, 1423
    std::basic_ofstream, 1458
    std::basic_ostream, 1489
    std::basic_ostringstream, 1525
    std::basic_stringstream, 1705
    std::ios_base, 2190
try_lock
    Mutexes, 172
try_to_lock
    Mutexes, 173
tuple, 3538, 3540
tuple_cat
    Utilities, 377
type
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, cc_hash_tag, Policy_Tl >, 1854
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, gp_hash_tag, Policy_Tl >, 1855
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, list_update_tag, Policy_Tl >, 1855
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, ov_tree_tag, Policy_Tl >, 1856
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, rb_tree_tag, Policy_Tl >, 1857
    __gnu_pbds::detail::container_base_dispatch< Key, Mapped, _Alloc, splay_tree_tag, Policy_Tl >, 1858
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, cc_hash_tag, Policy_Tl >, 1858
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, gp_hash_tag, Policy_Tl >, 1859
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, list_update_tag, Policy_Tl >, 1859
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, ov_tree_tag, Policy_Tl >, 1860
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, pat_trie_tag, Policy_Tl >, 1861
    __gnu_pbds::detail::container_base_dispatch< Key, null_type, _Alloc, splay_tree_tag, Policy_Tl >, 1862
    __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binary_heap_tag, null_type >, 1851
    __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, binomial_heap_tag, null_type >, 1852
    __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, pairing_heap_tag, null_type >, 1852
    __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, rc_binomial_heap_tag, null_type >, 1853
    __gnu_pbds::detail::container_base_dispatch< _VTp, Cmp_Fn, _Alloc, thin_heap_tag, null_type >, 1854
    __gnu_pbds::detail::default_comb_hash_fn, 1938
    __gnu_pbds::detail::default_eq_fn, 1940
    __gnu_pbds::detail::default_hash_fn, 1941
    __gnu_pbds::detail::default_probe_fn, 1942
    __gnu_pbds::detail::default_resize_policy, 1943
    __gnu_pbds::detail::default_trie_access_traits< std::basic_string< Char, Char_Traits, std::allocator< char > > >, 1944
    __gnu_pbds::detail::default_update_policy, 1944
    __gnu_pbds::detail::entry_cmp< _VTp, Cmp_Fn, _Alloc, true >, 2026
    std::aligned_union, 1059
    std::experimental::fundamentals_v1::any, 1078
Type-safe container of any type, 359
    any_cast, 360–362
    swap, 362
type_traits, 3541, 3546, 3547
type_traits.h, 3550
type_utils.hpp, 3551
typeindex, 3551
typeinfo, 3552
typelist.h, 3552
types.h, 3553
types_traits.hpp, 3554

u16streampos
    std, 582
u16string
    Strings, 341

u32streampos
std, 582
u32string
Strings, 341
uflow
__gnu_cxx::enc_filebuf, 2018
__gnu_cxx::stdio_filebuf, 2822
__gnu_cxx::stdio_sync_filebuf, 2843
std::basic_filebuf, 1148
std::basic_streambuf, 1552
std::basic_stringbuf, 1649
std::wbuffer_convert, 3137
uncaught_exception
Exceptions, 72
uncaught_exceptions
Exceptions, 72
undeclare_no_pointers
Pointer Safety and Garbage Collection, 251
undeclare_reachable
Pointer Safety and Garbage Collection, 251
underflow
__gnu_cxx::enc_filebuf, 2018
__gnu_cxx::stdio_filebuf, 2822
__gnu_cxx::stdio_sync_filebuf, 2843
std::basic_filebuf, 1148
std::basic_streambuf, 1552
std::basic_stringbuf, 1649
std::wbuffer_convert, 3137
underlying_type_t
Metaprogramming, 147
unexpected
Exceptions, 72
unexpected_handler
Exceptions, 70
unget
std::basic_fstream, 1200
std::basic_ifstream, 1248
std::basic_iostream, 1329
std::basic_istream, 1372
std::basic_istringstream, 1417
std::basic_stringstream, 1697
Uniform Distributions, 364
operator<<, 365
operator>>, 365, 366
uniform_int_dist.h, 3555
uniform_int_distribution
std::uniform_int_distribution, 2975
uniform_real_distribution
std::uniform_real_distribution, 2978
uninitialized_copy
Memory, 139
uninitialized_copy_n
Memory, 139
SGI, 311
uninitialized_fill
Memory, 140
uninitialized_fill_n
Memory, 140
unique
Mutating, 168
std::forward_list, 2072
std::list, 2301
std::shared_ptr, 2785
unique_copy
Mutating, 168, 170
unique_copy.h, 3555
unique_copy_minimal_n
__gnu_parallel::_Settings, 1047
unique_lock.h, 3555
unique_ptr
std::unique_ptr, 2983, 2984
unique_ptr.h, 3556
unitbuf
std, 646
std::basic_fstream, 1208
std::basic_ifstream, 1256
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1380
std::basic_istringstream, 1423
std::basic_ofstream, 1459
std::basic_ostream, 1490
std::basic_ostringstream, 1525
std::basic_stringstream, 1705
std::ios_base, 2190
Unordered Associative, 367
unordered_map, 3556, 3557
std::unordered_map, 2996, 2997, 2999
unordered_map.h, 3558
unordered_multimap
std::unordered_multimap, 3024, 3025
unordered_multiset
std::unordered_multiset, 3048, 3049
unordered_set, 3559, 3560
std::unordered_set, 3073, 3074
unordered_set.h, 3561
unsetf
std::basic_fstream, 1200
std::basic_ifstream, 1248
std::basic_ios, 1276
std::basic_iostream, 1329
std::basic_istream, 1372
std::basic_istringstream, 1417
std::basic_ofstream, 1452
std::basic_ostream, 1483
std::basic_ostringstream, 1518
std::basic_stringstream, 1698
std::ios_base, 2185

unshift
std::__codecvt_abstract_base, 729
std::codecvt, 1796
std::codecvt< _InternT, _ExternT, encoding_state >, 1800
std::codecvt< char, char, mbstate_t >, 1804
std::codecvt< char16_t, char, mbstate_t >, 1808
std::codecvt< char32_t, char, mbstate_t >, 1812
std::codecvt< wchar_t, char, mbstate_t >, 1816
std::codecvt_byname, 1821
update_fn_imps.hpp, 3562
upper_bound
Binary Search, 35
std::map, 2357
std::multimap, 2446, 2447
std::multiset, 2467, 2468
std::set, 2765, 2766
uppercase
std, 647
std::basic_fstream, 1208
std::basic_ifstream, 1256
std::basic_ios, 1283
std::basic_iostream, 1337
std::basic_istream, 1380
std::basic_istringstream, 1423
std::basic_ofstream, 1459
std::basic_ostream, 1490
std::basic_ostringstream, 1525
std::basic_stringstream, 1705
std::ios_base, 2190
use_count
std::shared_ptr, 2785
use_facet
Locales, 113
std::locale, 2309
std::locale::id, 2158
Utilities, 368
__addressof, 372
__invoke, 372
addressof, 372
forward, 372, 373
forward_as_tuple, 373
get, 373, 374
make_pair, 374
move, 374
move_if_noexcept, 375
operator<, 375
operator<=, 375
operator>, 376
operator>=, 376
operator==, 376
pair, 372
piecewise_construct, 377
swap, 376, 377
tie, 377
tuple_cat, 377
utility, 3562, 3564

valarray, 3565
Numeric Arrays, 214, 215
std::valarray, 3097
valarray_after.h, 3572
valarray_array.h, 3589
valarray_array.tcc, 3597
valarray_before.h, 3598
valid_prefix
__gnu_pbds::detail::pat_trie_base::_Node_citer, 963
__gnu_pbds::detail::pat_trie_base::_Node_iter, 968
value
std::regex_traits, 2700
value_comp
std::map, 2359
std::multimap, 2447
std::multiset, 2468
std::set, 2766
value_compare
std::set, 2749
value_type
__gnu_pbds::detail::bin_search_tree_const_node_it_, 1712
__gnu_pbds::detail::bin_search_tree_node_it_, 1718
__gnu_pbds::detail::binary_heap_const_iterator_, 1729
__gnu_pbds::detail::binary_heap_point_const_iterator_, 1733
__gnu_pbds::detail::left_child_next_sibling_heap_const_iterator_, 2259
__gnu_pbds::detail::left_child_next_sibling_heap_node_point_const_iterator_, 2264
std::allocator_traits, 1066
std::allocator_traits< allocator< _Tp > >, 1071
std::back_insert_iterator, 1119
std::complex, 1835
std::front_insert_iterator, 2078
std::insert_iterator, 2170
std::istream_iterator, 2245
std::istreambuf_iterator, 2249
std::iterator, 2251
std::ostream_iterator, 2561
std::ostreambuf_iterator, 2565
std::raw_storage_iterator, 2665
std::reverse_iterator, 2706
std::set, 2749
std::unordered_map, 2996
std::unordered_multimap, 3024
std::unordered_multiset, 3048
std::unordered_set, 3073
variant, 3598

vector, 3599, 3600
  std::__debug::vector, 3118
  std::vector, 3101–3103
vector.tcc, 3600
void_pointer
  __gnu_cxx::__alloc_traits, 714
  std::allocator_traits, 1066
  std::allocator_traits< allocator< _Tp > >, 1071
void_t
  Metaprogramming, 148
vstring.h, 3601
vstring.tcc, 3604
vstring_fwd.h, 3604
vstring_util.h, 3605

wbuffer_convert
  std::wbuffer_convert, 3126, 3127
wcerr
  std, 648
wcin
  std, 648
wclog
  std, 648
wcout
  std, 648
wcregex_token_iterator
  Regular Expressions, 275
wcsub_match
  Regular Expressions, 275
wfilebuf
  I/O, 98
wfstream
  I/O, 99
what
  __gnu_pbds::container_error, 1863
  __gnu_pbds::insert_error, 2168
  __gnu_pbds::join_error, 2255
  __gnu_pbds::resize_error, 2703
  Exceptions, 72
  std::bad_alloc, 1120
  std::bad_cast, 1122
  std::bad_exception, 1123
  std::bad_function_call, 1124
  std::bad_typeid, 1126
  std::bad_weak_ptr, 1127
  std::domain_error, 1983
  std::experimental::fundamentals_v1::bad_any_cast, 1121
  std::experimental::fundamentals_v1::bad_optional_access, 1125
  std::future_error, 2094
  std::invalid_argument, 2175
  std::ios_base::failure, 2046
  std::length_error, 2266
  std::logic_error, 2313
  std::out_of_range, 2567
  std::overflow_error, 2577
  std::range_error, 2650
  std::regex_error, 2687
  std::runtime_error, 2716
  std::system_error, 2869
  std::underflow_error, 2973
widen
  std::__ctype_abstract_base, 744, 745
  std::basic_fstream, 1202
  std::basic_ifstream, 1250
  std::basic_ios, 1276
  std::basic_iostream, 1331
  std::basic_istream, 1374
  std::basic_istringstream, 1417
  std::basic_ofstream, 1452
  std::basic_ostream, 1483
  std::basic_ostringstream, 1519
  std::basic_stringstream, 1698
  std::ctype, 1880
  std::ctype< char >, 1892
  std::ctype< wchar_t >, 1907, 1908
  std::ctype_byname, 1920
  std::ctype_byname< char >, 1930
width
  std::basic_fstream, 1202
  std::basic_ifstream, 1250
  std::basic_ios, 1278
  std::basic_iostream, 1331
  std::basic_istream, 1374
  std::basic_istringstream, 1418
  std::basic_ofstream, 1453
  std::basic_ostream, 1484
  std::basic_ostringstream, 1519
  std::basic_stringstream, 1699
  std::ios_base, 2185
wifstream
  I/O, 99
wios
  I/O, 99
wiostream
  I/O, 99
wistream
  I/O, 99
wistringstream
  I/O, 99
wofstream
  I/O, 99
workstealing.h, 3606
wostream
  I/O, 99
wostringstream
  I/O, 99

wregex
Regular Expressions, 275
write
std::basic_fstream, 1203
std::basic_iostream, 1332
std::basic_ofstream, 1453
std::basic_ostream, 1484
std::basic_ostringstream, 1520
std::basic_stringstream, 1699
ws
std, 647
wsregex_token_iterator
Regular Expressions, 275
wssub_match
Regular Expressions, 275
wstreambuf
I/O, 99
wstreampos
std, 582
wstring
Strings, 341
wstring_convert
std::wstring_convert, 3144, 3146
wstringbuf
I/O, 100
wstringstream
I/O, 100

xalloc
std::basic_fstream, 1203
std::basic_ifstream, 1251
std::basic_ios, 1278
std::basic_iostream, 1332
std::basic_istream, 1375
std::basic_istringstream, 1418
std::basic_ofstream, 1454
std::basic_ostream, 1485
std::basic_ostringstream, 1520
std::basic_stringstream, 1700
std::ios_base, 2185
xsgetn
__gnu_cxx::enc_filebuf, 2019
__gnu_cxx::stdio_filebuf, 2823
__gnu_cxx::stdio_sync_filebuf, 2843
std::basic_filebuf, 1149
std::basic_streambuf, 1552
std::basic_stringbuf, 1649
std::wbuffer_convert, 3138
xsputn
__gnu_cxx::enc_filebuf, 2019
__gnu_cxx::stdio_filebuf, 2823
__gnu_cxx::stdio_sync_filebuf, 2844
std::basic_filebuf, 1149
std::basic_streambuf, 1554
std::basic_stringbuf, 1650
std::wbuffer_convert, 3138

yield
std::this_thread, 701